

FCC Test Report (Part 27)

Report No.: RF151229C25-7

FCC ID: M82-TREK733L

Test Model: TREK-733L

Received Date: Apr. 14, 2016

Test Date: Jun. 13 ~ Aug. 02, 2016

Issued Date: Aug. 09, 2016

Applicant: ADVANTECH CO., LTD

Address: No. 1, Alley 20, Lane 26, Rueiguang Rd, Neihu District, Taipei, Taiwan 114

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agency

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Configuration of System Under Test.....	9
3.2.1 Description of Support Units.....	9
3.3 Test Mode Applicability and Tested Channel Detail.....	10
3.4 EUT Operating Conditions.....	13
3.5 General Description of Applied Standards.....	13
4 Test Types and Results	14
4.1 Output Power Measurement.....	14
4.1.1 Limits of Output Power Measurement.....	14
4.1.2 Test Procedures.....	14
4.1.3 Test Setup.....	15
4.1.4 Test Results.....	16
4.2 Frequency Stability Measurement.....	29
4.2.1 Limits of Frequency Stability Measurement.....	29
4.2.2 Test Procedure.....	29
4.2.3 Test Setup.....	29
4.2.4 Test Results.....	30
4.3 Emission Bandwidth Measurement.....	31
4.3.1 Limits of Emission Bandwidth Measurement.....	31
4.3.2 Test Procedure.....	31
4.3.3 Test Setup.....	31
4.3.4 Test Result.....	32
4.4 Channel Edge Measurement.....	42
4.4.1 Limits of Band Edge Measurement.....	42
4.4.2 Test Setup.....	42
4.4.3 Test Procedures.....	42
4.4.4 Test Results.....	43
4.5 Peak to Average Ratio.....	53
4.5.1 Limits of Peak to Average Ratio Measurement.....	53
4.5.2 Test Setup.....	53
4.5.3 Test Procedures.....	53
4.5.4 Test Results.....	54
4.6 Conducted Spurious Emissions.....	64
4.6.1 Limits of Conducted Spurious Emissions Measurement.....	64
4.6.2 Test Setup.....	64
4.6.3 Test Procedure.....	64
4.6.4 Test Results.....	65
4.7 Radiated Emission Measurement.....	93
4.7.1 Limits of Radiated Emission Measurement.....	93
4.7.2 Test Procedure.....	93
4.7.3 Deviation from Test Standard.....	93
4.7.4 Test Setup.....	94
4.7.5 Test Results.....	95
5 Pictures of Test Arrangements	124
Appendix – Information on the Testing Laboratories	125

Release Control Record

Issue No.	Description	Date Issued
RF151229C25-7	Original release.	Aug. 09, 2016

1 Certificate of Conformity

Product: Computer

Brand: Advantech

Test Model: TREK-733L

Sample Status: Engineering sample

Applicant: ADVANTECH CO., LTD

Test Date: Jun. 13 ~ Aug. 02, 2016

Standards: FCC Part 27, Subpart L, F

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Aug. 09, 2016
Celine Chou / Specialist

Approved by : Burce Chen , **Date:** Aug. 09, 2016
Burce Chen / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2					
FCC Clause			Test Item	Result	Remarks
LTE Band 4	LTE Band 13	LTE Band 17			
2.1046 27.50(d)(4)	2.1046 27.50(b)(10)	2.1046 27.50(c)(10)	Equivalent Isotropically Radiated Power	Pass	Meet the requirement of limit.
----	----	----	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1055 27.54	2.1055 27.54	2.1055 27.54	Frequency Stability Stay with the authorized bands of operation	Pass	Meet the requirement of limit.
2.1049 27.53(m)(6)	2.1049 27.53(m)(6)	2.1049 27.53(m)(6)	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1051 27.53(h)	2.1051 27.53(c)	2.1051 27.53(g)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	2.1051 27.53(c)	2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1051 27.53(h)	2.1051 27.53(c)	2.1051 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -16.40dB at 1559.00MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	Apr. 18, 2016	Apr. 17, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Sep. 02, 2015	Sep. 01, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Jan. 07, 2016	Jan. 06, 2017
HORN Antenna SCHWARZBECK	9120D	209	Jan. 20, 2016	Jan. 19, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Jan. 18, 2016	Jan. 17, 2017
Preamplifier Agilent	8447D	2944A10738	Oct. 18, 2015	Oct. 17, 2016
Preamplifier Agilent	8449B	3008A01964	Aug. 22, 2015	Aug. 21, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (214378)	Aug. 22, 2015	Aug. 21, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 106	Cable-CH3-03 (309224+12738)	Aug. 22, 2015	Aug. 21, 2016
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 08, 2016	Jun. 07, 2017
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Jun. 09, 2016	Jun. 08, 2017
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

3 General Information

3.1 General Description of EUT

Product	Computer		
Brand	Advantech		
Test Model	TREK-733L		
Status of EUT	Engineering sample		
Nominal Voltage	12 or 24Vdc (Car power system) 3.6Vdc (Battery)		
Modulation Type	QPSK, 16QAM		
Operating Frequency	LTE Band 4	Channel Bandwidth 1.4MHz	1710.7MHz ~ 1754.3MHz
		Channel Bandwidth 3MHz	1711.5MHz ~ 1753.5MHz
		Channel Bandwidth 5MHz	1712.5MHz ~ 1752.5MHz
		Channel Bandwidth 10MHz	1715MHz ~ 1750MHz
		Channel Bandwidth 15MHz	1717.5MHz ~ 1747.5MHz
		Channel Bandwidth 20MHz	1720MHz ~ 1745MHz
	LTE Band 13	Channel Bandwidth 5MHz	779.5MHz ~ 784.5MHz
		Channel Bandwidth 10MHz	782MHz
	LTE Band 17	Channel Bandwidth 5MHz	706.5MHz ~ 713.5MHz
		Channel Bandwidth 10MHz	709MHz ~ 711MHz
Max. EIRP Power	LTE Band 4	Channel Bandwidth 1.4MHz	181.970mW (22.60dBm)
		Channel Bandwidth 3MHz	158.489mW (22.00dBm)
		Channel Bandwidth 5MHz	173.780mW (22.40dBm)
		Channel Bandwidth 10MHz	165.959mW (22.20dBm)
		Channel Bandwidth 15MHz	181.970mW (22.60dBm)
		Channel Bandwidth 20MHz	162.181mW (22.10dBm)
Max. ERP Power	LTE Band 13	Channel Bandwidth 5MHz	154.882mW (21.90dBm)
		Channel Bandwidth 10MHz	141.254mW (21.50dBm)
	LTE Band 17	Channel Bandwidth 5MHz	151.356mW (21.80dBm)
		Channel Bandwidth 10MHz	138.038mW (21.40dBm)
Antenna Type	Refer to Note		
Antenna Connector	Refer to Note		
Accessory Device	Stand, GPS + LTE antenna, LTE antenna, Core (For power cable), Battery		
Data Cable Supplied	2.1m Display cable with 1 core 5m Coaxial cable without core (For GPS + LTE antenna) 5.1m Coaxial cable without core (For LTE antenna) 0.27m power cable with one external ferrite core		

Note:

1. The EUT provides 1 completed transmitter (Fixed on chain 0) and 2 receivers.
2. The EUT uses following antennas.


Antenna	Brand	Frequency Range (MHz)	Antenna Gain (dBi)	Antenna Type	Antenna Connector
WWAN (Main) – Chain 0	JEM	1850-1910	0.9	Dipole	SMA
		1710-1755	-0.5		
		824-849	0.5		
		777-787	0.2		
		704-716	0.2		
		1920-1980	-0.4		
WWAN (Aux) – Chain 1	JEM	1850-1910	1.2	Dipole	SMA
		1710-1755	1.8		
		824-849	-0.1		
		777-787	1		
		704-716	1		
		1920-1980	0.7		
WiFi & BT	JEM	2400-2483.5	2.87	PCB	i-pex(MHF)

3. The EUT was operated with following battery:

Battery	
Brand:	Formosan
Model:	GP01NCR18650PF
Rating:	3.6Vdc, 2270mA

4. WLAN 2.4GHz, WWAN 2/3G and LTE 4G technologies can transmit at same time.
5. Spurious emission of the simultaneous operation (WLAN 2.4GHz, WWAN 2/3G and LTE 4G) has been evaluated and no non-compliance was found.

3.2 Configuration of System Under Test

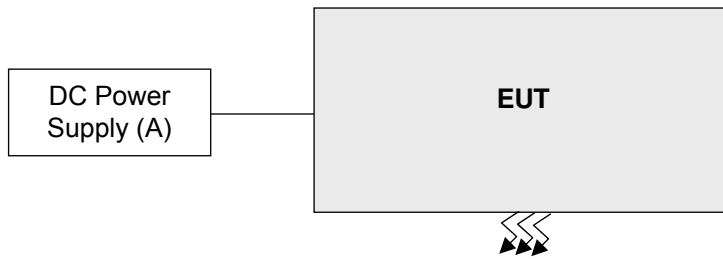

Remote site



3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	DC Power Supply	Topward	33010D	807748	NA	-
B.	Universal Radio Communication Tester	R&S	CMU200	123112	NA	

Note: All power cords of the above support units are non-shielded (1.8m).

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Z-plane. Following channel(s) was (were) selected for the final test as listed below:

LTE Band 4

Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Output Power	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK	1 RB / 0 RB Offset
	19965 to 20385	19965, 20175, 20385	3MHz	QPSK	1 RB / 0 RB Offset
	19975 to 20375	19975, 20175, 20375	5MHz	QPSK	1 RB / 0 RB Offset
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK	1 RB / 0 RB Offset
	20025 to 20325	20025, 20175, 20325	15MHz	QPSK	1 RB / 0 RB Offset
	20050 to 20300	20050, 20175, 20300	20MHz	QPSK	1 RB / 0 RB Offset
Frequency Stability	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 0 RB Offset
Emission Bandwidth	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
	19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	15 RB / 0 RB Offset
	19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
	20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset
	20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	100 RB / 0 RB Offset
Channel Edge	19957 to 20393	19957, 20393	1.4MHz	QPSK	1 RB / 0 RB Offset 1 RB / 5 RB Offset 6 RB / 0 RB Offset
	19965 to 20385	19965, 20385	3MHz	QPSK	1 RB / 0 RB Offset 1 RB / 14 RB Offset 15 RB / 0 RB Offset
	19975 to 20375	19975, 20375	5MHz	QPSK	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
	20000 to 20350	20000, 20350	10MHz	QPSK	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
	20025 to 20325	20025, 20325	15MHz	QPSK	1 RB / 0 RB Offset 1 RB / 74 RB Offset 75 RB / 0 RB Offset
	20050 to 20300	20050, 20300	20MHz	QPSK	1 RB / 0 RB Offset 1 RB / 99 RB Offset 100 RB / 0 RB Offset
Conducted Emission	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK	1 RB / 0 RB Offset
	19965 to 20385	19965, 20175, 20385	3MHz	QPSK	1 RB / 0 RB Offset
	19975 to 20375	19975, 20175, 20375	5MHz	QPSK	1 RB / 0 RB Offset
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK	1 RB / 0 RB Offset
	20025 to 20325	20025, 20175, 20325	15MHz	QPSK	1 RB / 0 RB Offset
	20050 to 20300	20050, 20175, 20300	20MHz	QPSK	1 RB / 0 RB Offset

Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Radiated Emission Below 1GHz	19957 to 20393	19957	1.4MHz	QPSK	1 RB / 0 RB Offset
	19965 to 20385	19965	3MHz	QPSK	1 RB / 0 RB Offset
	19975 to 20375	19975	5MHz	QPSK	1 RB / 0 RB Offset
	20000 to 20350	20000	10MHz	QPSK	1 RB / 0 RB Offset
	20025 to 20325	20025	15MHz	QPSK	1 RB / 0 RB Offset
	20050 to 20300	20050	20MHz	QPSK	1 RB / 0 RB Offset
Radiated Emission Above 1GHz	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK	1 RB / 0 RB Offset
	19965 to 20385	19965, 20175, 20385	3MHz	QPSK	1 RB / 0 RB Offset
	19975 to 20375	19975, 20175, 20375	5MHz	QPSK	1 RB / 0 RB Offset
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK	1 RB / 0 RB Offset
	20025 to 20325	20025, 20175, 20325	15MHz	QPSK	1 RB / 0 RB Offset
	20050 to 20300	20050, 20175, 20300	20MHz	QPSK	1 RB / 0 RB Offset

LTE Band 13

Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Output Power	23205 to 23255	23205, 23230, 23255	5MHz	QPSK	1 RB / 0 RB Offset
	23230	23230	10MHz	QPSK	1 RB / 0 RB Offset
Frequency Stability	23205 to 23255	23230	5MHz	QPSK	1 RB / 0 RB Offset
Emission Bandwidth	23205 to 23255	23205, 23230, 23255	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
	23230	23230	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
Channel Edge	23205 to 23255	23205, 23255	5MHz	QPSK	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
	23230	23230	10MHz	QPSK	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
Conducted Emission	23205 to 23255	23205, 23230, 23255	5MHz	QPSK	1 RB / 0 RB Offset
	23230	23230	10MHz	QPSK	1 RB / 0 RB Offset
Radiated Emission Below 1GHz	23205 to 23255	23205	5MHz	QPSK	1 RB / 0 RB Offset
	23230	23230	10MHz	QPSK	1 RB / 0 RB Offset
Radiated Emission Above 1GHz	23205 to 23255	23205, 23230, 23255	5MHz	QPSK	1 RB / 0 RB Offset
	23230	23230	10MHz	QPSK	1 RB / 0 RB Offset

LTE Band 17

Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Output Power	23755 to 23825	23755, 23790, 23825	5MHz	QPSK	1 RB / 0 RB Offset
	23780 to 23800	23780, 23790, 23800	10MHz	QPSK	1 RB / 0 RB Offset
Frequency Stability	23755 to 23825	23790	5MHz	QPSK	1 RB / 0 RB Offset
Emission Bandwidth	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
	23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
Channel Edge	23755 to 23825	23755, 23825	5MHz	QPSK	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
	23780 to 23800	23780, 23800	10MHz	QPSK	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
Conducted Emission	23755 to 23825	23755, 23790, 23825	5MHz	QPSK	1 RB / 0 RB Offset
	23780 to 23800	23780, 23790, 23800	10MHz	QPSK	1 RB / 0 RB Offset
Radiated Emission Below 1GHz	23755 to 23825	23755	5MHz	QPSK	1 RB / 0 RB Offset
	23780 to 23800	23780	10MHz	QPSK	1 RB / 0 RB Offset
Radiated Emission Above 1GHz	23755 to 23825	23755, 23790, 23825	5MHz	QPSK	1 RB / 0 RB Offset
	23780 to 23800	23780, 23790, 23800	10MHz	QPSK	1 RB / 0 RB Offset

Note:

1. For radiated emission below 1 GHz, the low, mid and high channels were pre-tested in chamber. The low channel was the worst case and chosen for final test.
2. The conducted output power for QPSK and 16QAM, measured value of QPSK is higher than 16QAM mode. Therefore, only Emission Bandwidth had been tested under QPSK and 16QAM modes, the others test items were performed under QPSK mode only.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
Output Power	20deg. C, 69%RH	120Vac, 60Hz	Bayu Chen
Frequency Stability	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Emission Bandwidth	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Channel Edge	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Conducted Emission	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Radiated Emission	20deg. C, 69%RH	120Vac, 60Hz	Bayu Chen

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/EIA-603-C 2004

Note: All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).
The test report has been issued separately.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 1 watts e.i.r.p for LTE Band 4 and 3 watts e.r.p for LTE Band 13 & 17.

4.1.2 Test Procedures

EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RWB and VBW is 5MHz for LTE Mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}$.

Conducted Power Measurement:

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.1.3 Test Setup

EIRP / ERP MEASUREMENT:

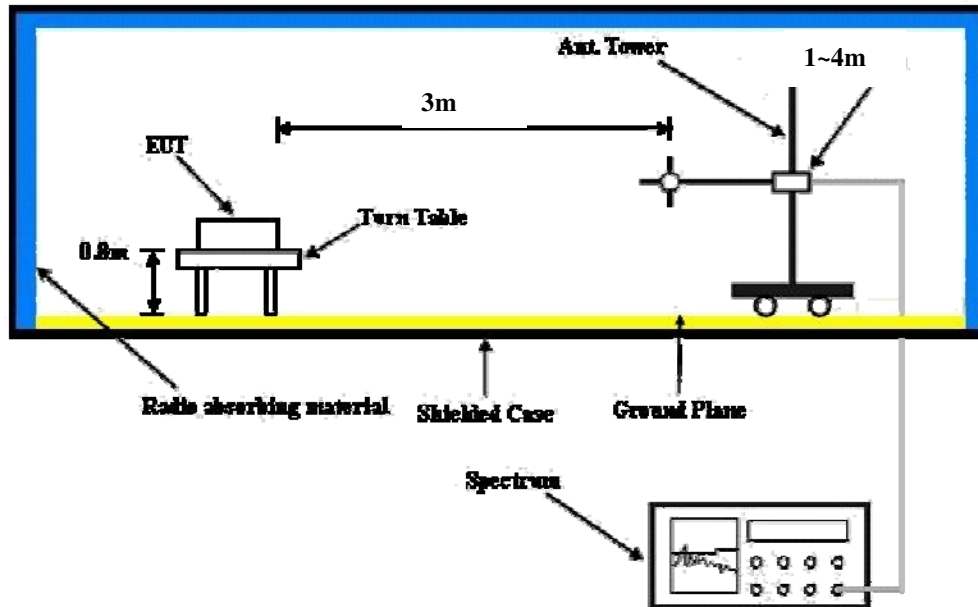

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

CONDUCTED OUTPUT POWER (dBm)

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			Low CH 19957	Mid CH 20175	High CH 20393	Low CH 19957	Mid CH 20175	High CH 20393
			1710.7 MHz	1732.5 MHz	1754.3 MHz	1710.7 MHz	1732.5 MHz	1754.3 MHz
4 / 1.4M	1	0	22.78	22.85	22.91	21.60	21.61	21.64
	1	2	22.72	22.76	22.78	21.61	21.73	21.64
	1	5	22.81	22.79	22.93	21.70	21.72	21.79
	3	0	22.64	22.58	22.72	21.53	21.55	21.58
	3	1	22.69	22.59	22.73	21.58	21.56	21.54
	3	3	22.65	22.54	22.67	21.55	21.51	21.59
	6	0	21.71	21.66	21.72	20.86	20.78	20.87
Band / BW	RB Size	RB Offset	QPSK			16QAM		
			Low CH 19965	Mid CH 20175	High CH 20385	Low CH 19965	Mid CH 20175	High CH 20385
			1711.5 MHz	1732.5 MHz	1753.5 MHz	1711.5 MHz	1732.5 MHz	1753.5 MHz
4 / 3M	1	0	22.83	22.80	22.92	21.85	21.74	21.82
	1	7	22.75	22.79	22.87	21.77	21.70	21.77
	1	14	22.86	22.84	22.95	21.80	21.78	21.88
	8	0	21.65	21.59	21.78	20.67	20.53	20.68
	8	3	21.69	21.63	21.78	20.71	20.57	20.68
	8	7	21.72	21.65	21.68	20.79	20.61	20.71
	15	0	21.59	21.61	21.69	20.61	20.52	20.59
Band / BW	RB Size	RB Offset	QPSK			16QAM		
			Low CH 19975	Mid CH 20175	High CH 20375	Low CH 19975	Mid CH 20175	High CH 20375
			1712.5 MHz	1732.5 MHz	1752.5 MHz	1712.5 MHz	1732.5 MHz	1752.5 MHz
4 / 5M	1	0	22.76	22.72	22.87	21.66	21.68	21.84
	1	12	22.71	22.70	22.86	21.61	21.72	21.83
	1	24	22.81	22.75	22.90	21.71	21.74	21.87
	12	0	21.71	21.68	21.84	20.61	20.70	20.81
	12	6	21.68	21.62	21.82	20.63	20.64	20.81
	12	13	21.73	21.70	21.88	20.63	20.72	20.89
	25	0	21.64	21.59	21.71	20.54	20.59	20.68

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			Low CH 20000	Mid CH 20175	High CH 20350	Low CH 20000	Mid CH 20175	High CH 20350
			1715 MHz	1732.5 MHz	1750 MHz	1715 MHz	1732.5 MHz	1750 MHz
4 / 10M	1	0	22.62	22.57	22.76	21.67	21.49	21.74
	1	24	22.68	22.65	22.82	21.73	21.60	21.75
	1	49	22.74	22.69	22.85	21.79	21.64	21.83
	25	0	21.62	21.58	21.76	20.67	20.51	20.74
	25	12	21.68	21.72	21.82	20.70	20.67	20.80
	25	25	21.59	21.51	21.60	20.64	20.52	20.69
	50	0	21.53	21.49	21.62	20.63	20.41	20.60
Band / BW	RB Size	RB Offset	QPSK			16QAM		
			Low CH 20025	Mid CH 20175	High CH 20325	Low CH 20025	Mid CH 20175	High CH 20325
			1717.5 MHz	1732.5 MHz	1747.5 MHz	1717.5 MHz	1732.5 MHz	1747.5 MHz
4 / 15M	1	0	22.74	22.65	22.87	21.65	21.62	21.78
	1	37	22.68	22.60	22.80	21.59	21.62	21.71
	1	74	22.83	22.71	22.95	21.74	21.71	21.86
	36	0	21.56	21.48	21.67	20.47	20.50	20.58
	36	19	21.52	21.42	21.61	20.43	20.42	20.52
	36	39	21.59	21.43	21.69	20.54	20.41	20.60
	75	0	21.42	21.38	21.53	20.33	20.42	20.46
Band / BW	RB Size	RB Offset	QPSK			16QAM		
			Low CH 20050	Mid CH 20175	High CH 20300	Low CH 20050	Mid CH 20175	High CH 20300
			1720 MHz	1732.5 MHz	1745 MHz	1720 MHz	1732.5 MHz	1745 MHz
4 / 20M	1	0	22.71	22.62	22.78	21.71	21.55	21.69
	1	50	22.76	22.68	22.84	21.79	21.64	21.75
	1	99	23.41	23.35	23.53	22.38	22.29	22.44
	50	0	21.46	21.41	21.57	20.49	20.34	20.48
	50	25	21.38	21.30	21.49	20.41	20.26	20.38
	50	50	21.35	21.24	21.46	20.38	20.21	20.37
	100	0	21.45	21.39	21.58	20.51	20.37	20.49

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			Low CH 23205	Mid CH 23230	High CH 23255	Low CH 23205	Mid CH 23230	High CH 23255
			779.5 MHz	782 MHz	784.5 MHz	779.5 MHz	782 MHz	784.5 MHz
13 / 5M	1	0	22.68	22.57	22.75	21.65	21.43	21.72
	1	12	22.62	22.54	22.67	21.64	21.40	21.64
	1	24	22.70	22.59	22.76	21.71	21.45	21.73
	12	0	21.63	21.52	21.74	20.65	20.42	20.71
	12	6	21.46	21.39	21.56	20.48	20.31	20.53
	12	13	21.43	21.34	21.53	20.45	20.34	20.50
25	0	21.44	21.31	21.52	20.41	20.20	20.49	
Band / BW	RB Size	RB Offset	QPSK			16QAM		
			Mid CH 23230			Mid CH 23230		
			782MHz			782MHz		
13 / 10M	1	0	24.06			23.28		
	1	24	22.53			21.44		
	1	49	21.53			21.04		
	25	0	21.72			20.63		
	25	12	21.60			20.55		
	25	25	22.87			21.94		
	50	0	22.18			21.22		
Band / BW	RB Size	RB Offset	QPSK			16QAM		
			Low CH 23755	Mid CH 23790	High CH 23825	Low CH 23755	Mid CH 23790	High CH 23825
			706.5 MHz	710 MHz	713.5 MHz	706.5 MHz	710 MHz	713.5 MHz
17 / 5M	1	0	22.55	22.49	22.69	21.46	21.41	21.72
	1	12	22.64	22.56	22.75	21.55	21.48	21.78
	1	24	22.69	22.59	22.79	21.60	21.56	21.82
	12	0	21.76	21.68	21.79	20.67	20.65	20.82
	12	6	21.76	21.70	21.85	20.67	20.61	20.88
	12	13	21.71	21.62	21.84	20.62	20.59	20.87
	25	0	21.68	21.61	21.77	20.55	20.55	20.80
Band / BW	RB Size	RB Offset	QPSK			16QAM		
			Low CH 23780	Mid CH 23790	High CH 23800	Low CH 23780	Mid CH 23790	High CH 23800
			709 MHz	710 MHz	711 MHz	709 MHz	710 MHz	711 MHz
17 / 10M	1	0	22.36	22.29	22.45	21.39	21.22	21.42
	1	24	22.73	22.65	22.85	21.76	21.58	21.82
	1	49	22.76	22.69	22.90	21.77	21.61	21.87
	25	0	21.56	21.49	21.65	20.59	20.42	20.62
	25	12	21.63	21.52	21.74	20.66	20.45	20.67
	25	25	21.59	21.47	21.64	20.67	20.40	20.68
	50	0	21.37	21.31	21.49	20.40	20.31	20.46

EIRP Power (dBm)

LTE Band 4

Channel Bandwidth: 1.4MHz

MODE		TX channel 19957					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1710.70	-21.10	16.90	0.70	17.60	30.00	-12.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1710.70	-16.80	21.00	0.70	21.70	30.00	-8.30

MODE		TX channel 20175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-22.00	16.40	0.60	17.00	30.00	-13.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-17.70	20.60	0.60	21.20	30.00	-8.80

MODE		TX channel 20393					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1754.30	-20.80	18.00	0.50	18.50	30.00	-11.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1754.30	-16.80	22.10	0.50	22.60	30.00	-7.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Channel Bandwidth: 3MHz

MODE		TX channel 19965					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1711.50	-19.00	19.00	0.70	19.70	30.00	-10.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1711.50	-16.50	21.30	0.70	22.00	30.00	-8.00

MODE		TX channel 20175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-19.00	19.40	0.60	20.00	30.00	-10.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-17.00	21.30	0.60	21.90	30.00	-8.10

MODE		TX channel 20385					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1753.50	-19.50	19.30	0.50	19.80	30.00	-10.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1753.50	-17.50	21.40	0.50	21.90	30.00	-8.10

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Channel Bandwidth: 5MHz

MODE		TX channel 19975					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1712.50	-18.50	19.60	0.70	20.30	30.00	-9.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1712.50	-16.50	21.40	0.70	22.10	30.00	-7.90

MODE		TX channel 20175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-19.10	19.30	0.60	19.90	30.00	-10.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-17.10	21.20	0.60	21.80	30.00	-8.20

MODE		TX channel 20375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1752.50	-18.90	19.90	0.50	20.40	30.00	-9.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1752.50	-16.90	21.90	0.50	22.40	30.00	-7.60

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Channel Bandwidth: 10MHz

MODE		TX channel 20000					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1715.00	-18.70	19.40	0.70	20.10	30.00	-9.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1715.00	-16.40	21.50	0.70	22.20	30.00	-7.80

MODE		TX channel 20175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-18.70	19.70	0.60	20.30	30.00	-9.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-16.90	21.40	0.60	22.00	30.00	-8.00

MODE		TX channel 20350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1750.00	-19.30	19.50	0.50	20.00	30.00	-10.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1750.00	-17.10	21.70	0.50	22.20	30.00	-7.80

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Channel Bandwidth: 15MHz

MODE		TX channel 20025					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1717.50	-20.20	17.90	0.70	18.60	30.00	-11.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1717.50	-16.80	21.20	0.70	21.90	30.00	-8.10

MODE		TX channel 20175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-21.20	17.20	0.60	17.80	30.00	-12.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-17.90	20.40	0.60	21.00	30.00	-9.00

MODE		TX channel 20325					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1747.50	-20.80	17.90	0.50	18.40	30.00	-11.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1747.50	-16.60	22.10	0.50	22.60	30.00	-7.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Channel Bandwidth: 20MHz

MODE		TX channel 20050					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1720.00	-20.40	17.80	0.70	18.50	30.00	-11.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1720.00	-17.40	20.60	0.70	21.30	30.00	-8.70

MODE		TX channel 20175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-20.30	18.10	0.60	18.70	30.00	-11.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1732.50	-17.90	20.40	0.60	21.00	30.00	-9.00

MODE		TX channel 20300					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1745.00	-20.00	18.70	0.50	19.20	30.00	-10.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1745.00	-17.10	21.60	0.50	22.10	30.00	-7.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 13

Channel Bandwidth: 5MHz

MODE		TX channel 23205					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	779.50	-9.40	16.60	4.00	20.60	34.80	-14.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	779.50	-10.50	17.60	4.00	21.60	34.80	-13.20

MODE		TX channel 23230					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	782.00	-9.20	16.80	4.00	20.80	34.80	-14.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	782.00	-10.00	17.90	4.00	21.90	34.80	-12.90

MODE		TX channel 23255					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	784.50	-9.40	16.70	4.00	20.70	34.80	-14.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	784.50	-10.00	17.90	4.00	21.90	34.80	-12.90

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Channel Bandwidth: 10MHz

MODE		TX channel 23230					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	782.00	-9.30	16.70	4.00	20.70	34.80	-14.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	782.00	-10.40	17.50	4.00	21.50	34.80	-13.30

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 17

Channel Bandwidth: 5MHz

MODE		TX channel 23755					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	706.50	-7.40	17.30	3.50	20.80	34.80	-14.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	706.50	-9.90	17.70	3.50	21.20	34.80	-13.60

MODE		TX channel 23790					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	710.00	-7.20	17.70	3.50	21.20	34.80	-13.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	710.00	-9.30	18.30	3.50	21.80	34.80	-13.00

MODE		TX channel 23825					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	713.50	-7.80	17.20	3.50	20.70	34.80	-14.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	713.50	-10.10	17.70	3.50	21.20	34.80	-13.60

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Channel Bandwidth: 10MHz

MODE		TX channel 23780					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	709.00	-7.10	17.60	3.50	21.10	34.80	-13.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	709.00	-9.80	17.90	3.50	21.40	34.80	-13.40

MODE		TX channel 23790					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	710.00	-7.90	17.00	3.50	20.50	34.80	-14.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	710.00	-10.10	17.50	3.50	21.00	34.80	-13.80

MODE		TX channel 23800					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	711.00	-7.90	17.10	3.50	20.60	34.80	-14.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	711.00	-9.80	17.80	3.50	21.30	34.80	-13.50

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.2.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

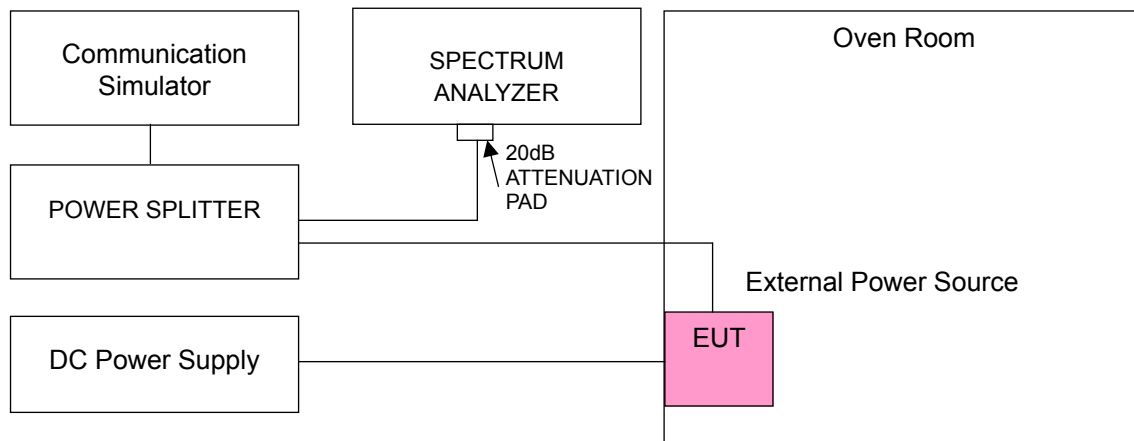

4.2.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (ppm)			Limit (ppm)
	LTE Band 4	LTE Band 13	LTE Band 17	
26.4	-0.007	-0.015	-0.016	2.5
24	-0.007	-0.015	-0.017	2.5
21.6	-0.007	-0.014	-0.016	2.5

Note: The applicant defined the normal working voltage is from 26.4Vdc to 21.6Vdc.

Frequency Error vs. Temperature

Voltage (Volts)	Frequency Error (ppm)			Limit (ppm)
	LTE Band 4	LTE Band 13	LTE Band 17	
70	-0.011	-0.022	-0.028	2.5
60	-0.011	-0.023	-0.026	2.5
50	-0.010	-0.020	-0.022	2.5
40	-0.008	-0.018	-0.021	2.5
30	-0.007	-0.016	-0.018	2.5
20	-0.007	-0.015	-0.017	2.5
10	-0.009	-0.019	-0.022	2.5
0	0.009	-0.020	-0.022	2.5
-10	-0.012	-0.026	-0.026	2.5
-20	-0.013	-0.029	-0.031	2.5

4.3 Emission Bandwidth Measurement


4.3.1 Limits of Emission Bandwidth Measurement

According to FCC 27.53(m)(6) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

4.3.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW = 30kHz and VBW = 100kHz (Channel Bandwidth: 1.4MHz), RBW = 51kHz and VBW = 150kHz (Channel Bandwidth: 3MHz and 5MHz), RBW = 100kHz and VBW = 300kHz (Channel Bandwidth: 10MHz), RBW = 200kHz and VBW = 620kHz (Channel Bandwidth: 15MHz) and RBW = 430kHz and VBW = 1.2MHz (Channel Bandwidth: 20MHz). The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.

4.3.3 Test Setup

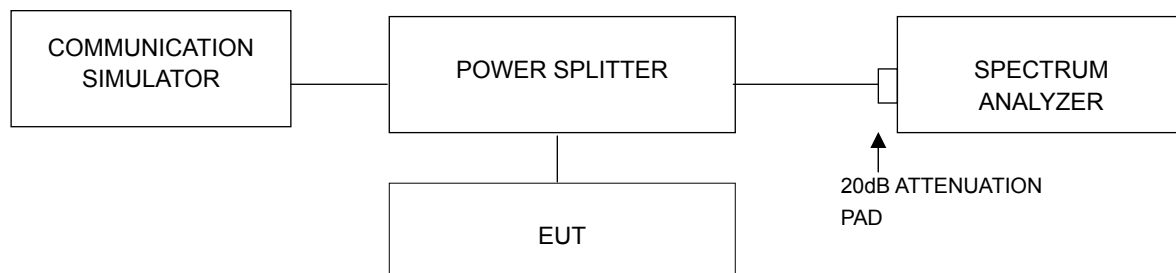


4.3.4 Test Result

LTE Band 4


Channel Bandwidth: 1.4MHz					
Channel	Frequency (MHz)	-26dBc Bandwidth (MHz)		Occupied Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
19957	1710.7	1.56	1.52	1.11	1.09
20175	1732.5	1.54	1.54	1.09	1.10
20393	1754.3	1.55	1.52	1.09	1.10

SPECTRUM PLOT OF WORST VALUE

-26dBc Bandwidth

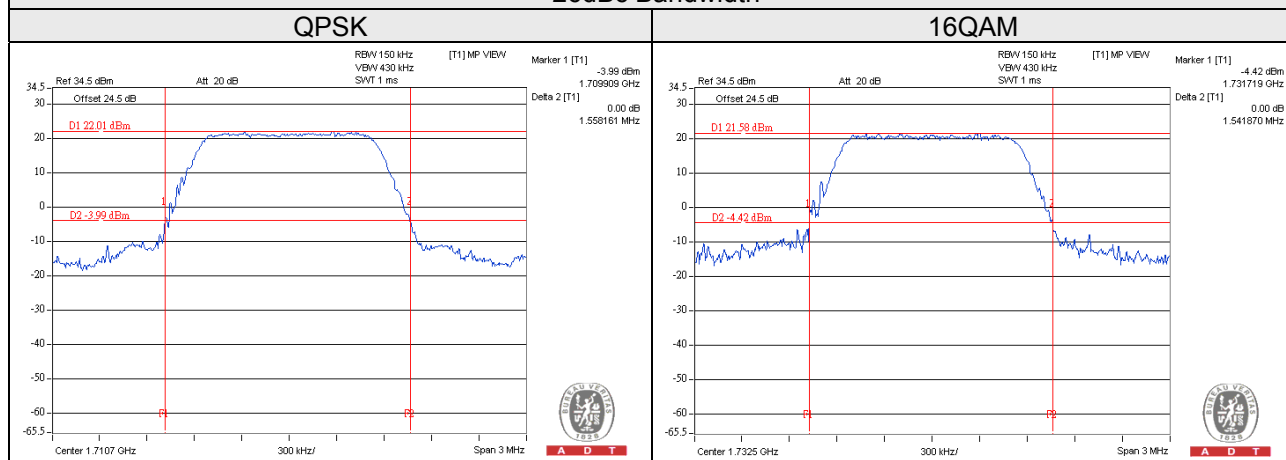


Occupied Bandwidth

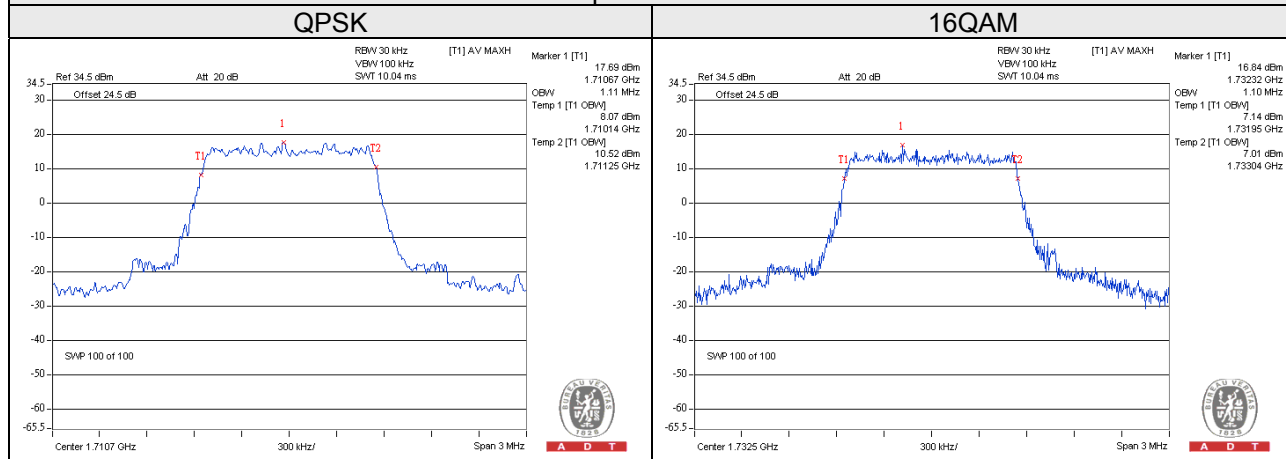


Channel Bandwidth: 3MHz					
Channel	Frequency (MHz)	-26dBc Bandwidth (MHz)		Occupied Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
19965	1711.5	3.14	3.14	2.68	2.68
20175	1732.5	3.15	3.11	2.69	2.68
20385	1753.5	3.13	3.10	2.68	2.68

SPECTRUM PLOT OF WORST VALUE
-26dBc Bandwidth

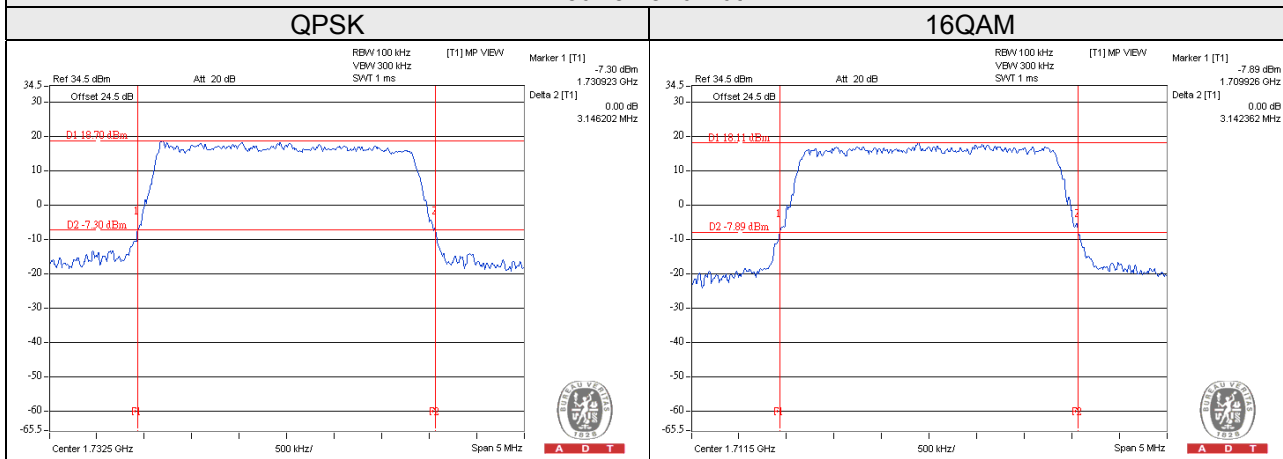


Occupied Bandwidth

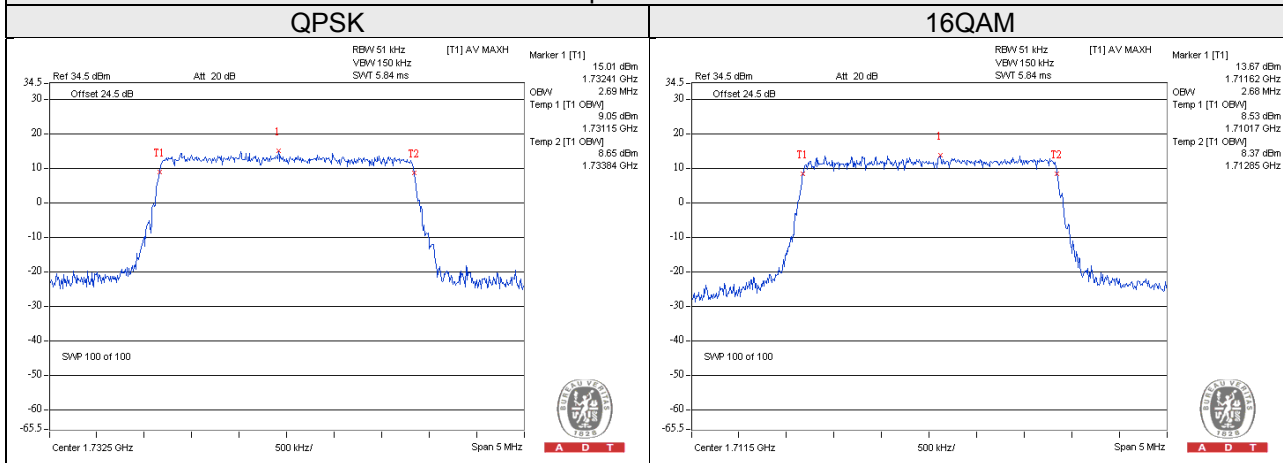


Channel Bandwidth: 5MHz					
Channel	Frequency (MHz)	-26dBc Bandwidth (MHz)		Occupied Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
19975	1712.5	5.06	5.06	4.47	4.47
20175	1732.5	5.08	5.04	4.47	4.47
20375	1752.5	5.13	5.05	4.47	4.47

SPECTRUM PLOT OF WORST VALUE
-26dBc Bandwidth

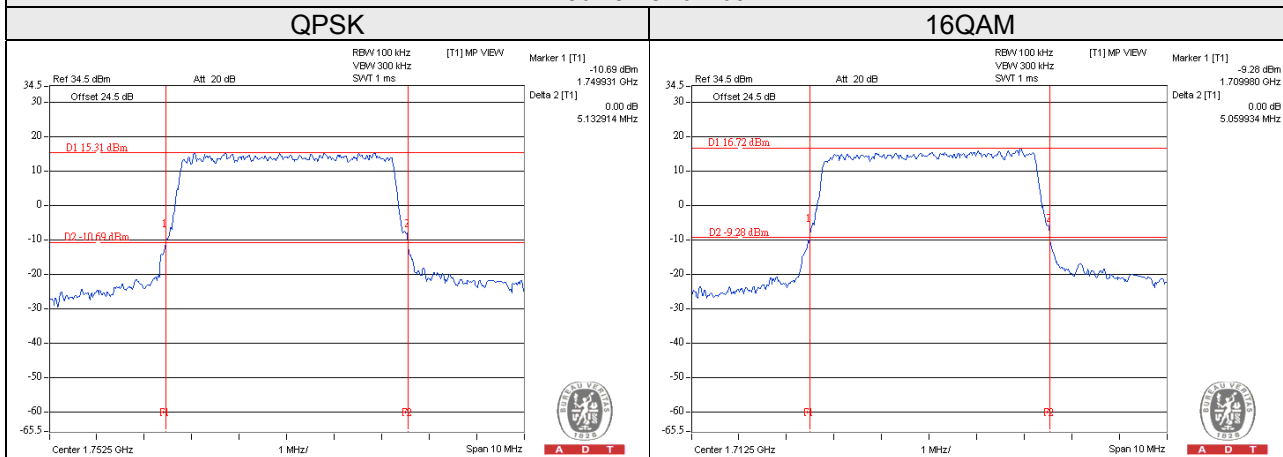


Occupied Bandwidth

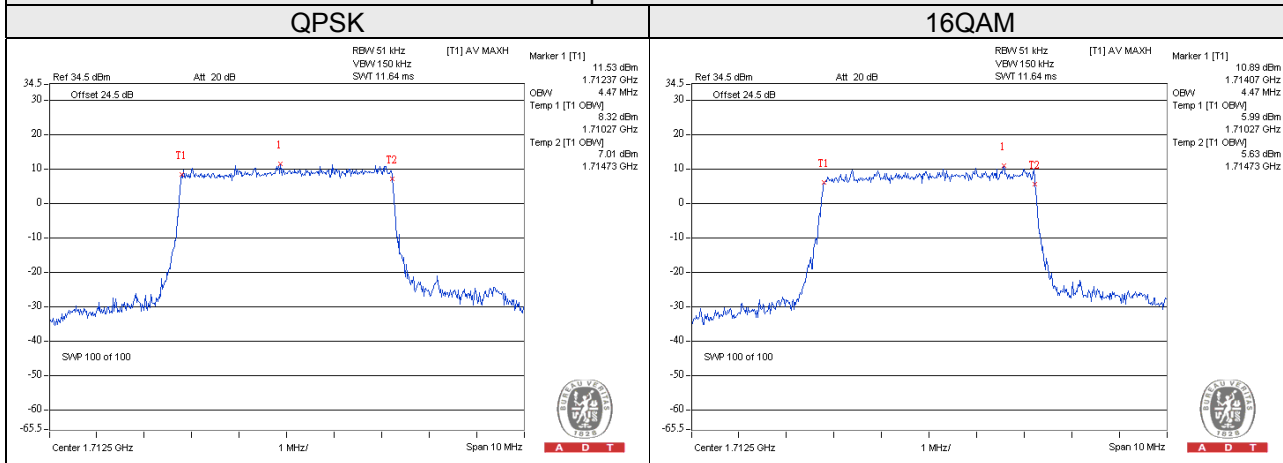


Channel Bandwidth: 10MHz					
Channel	Frequency (MHz)	-26dBc Bandwidth (MHz)		Occupied Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20000	1715.0	9.84	9.86	8.93	8.93
20175	1732.5	9.86	9.88	8.93	8.93
20350	1750.0	9.85	9.87	8.93	8.93

SPECTRUM PLOT OF WORST VALUE
-26dBc Bandwidth

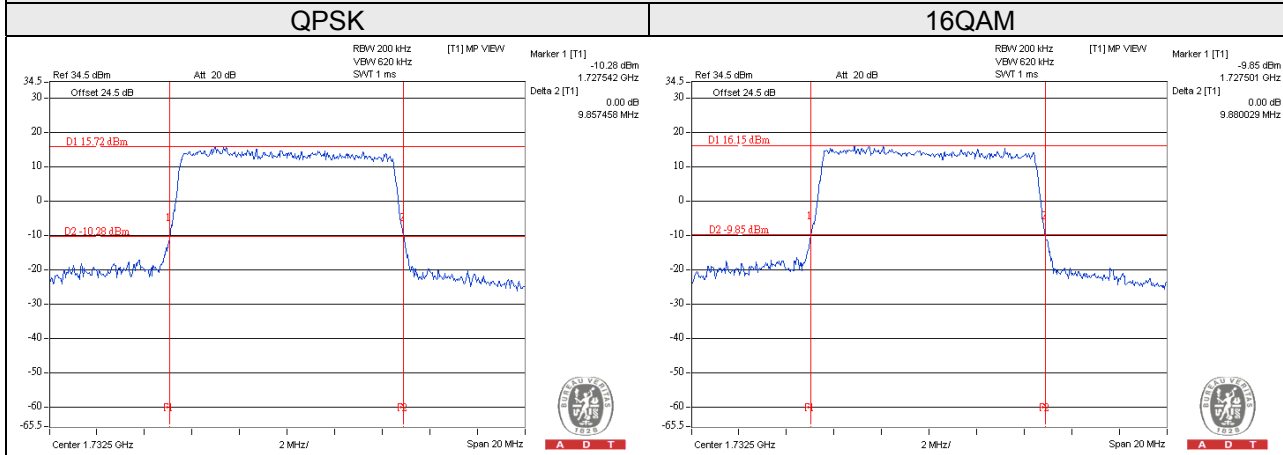


Occupied Bandwidth

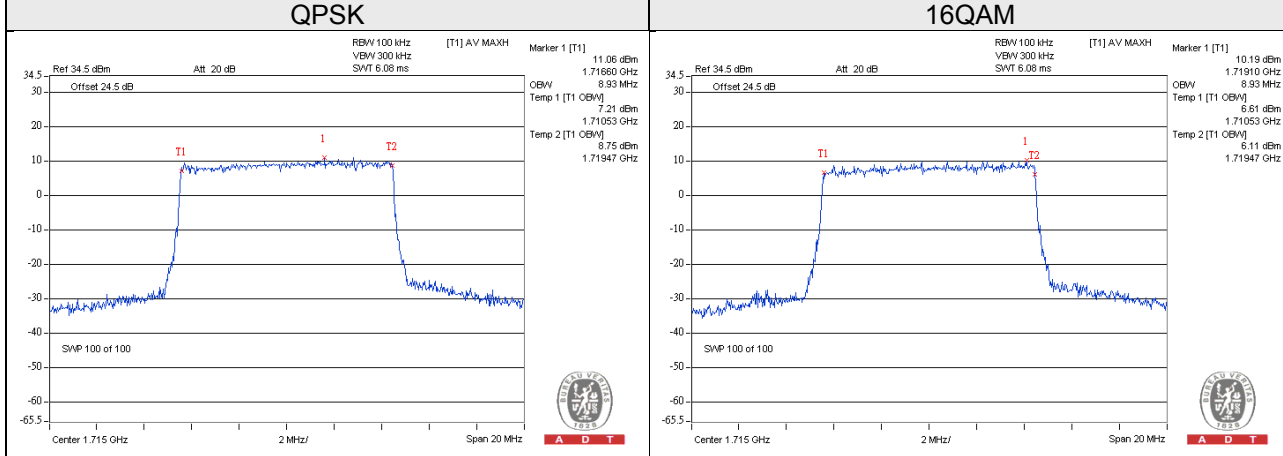


Channel Bandwidth: 15MHz					
Channel	Frequency (MHz)	-26dBc Bandwidth (MHz)		Occupied Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20025	1717.5	14.47	14.50	13.33	13.33
20175	1732.5	14.64	14.61	13.37	13.40
20325	1747.5	14.70	14.49	13.37	13.40

SPECTRUM PLOT OF WORST VALUE
-26dBc Bandwidth

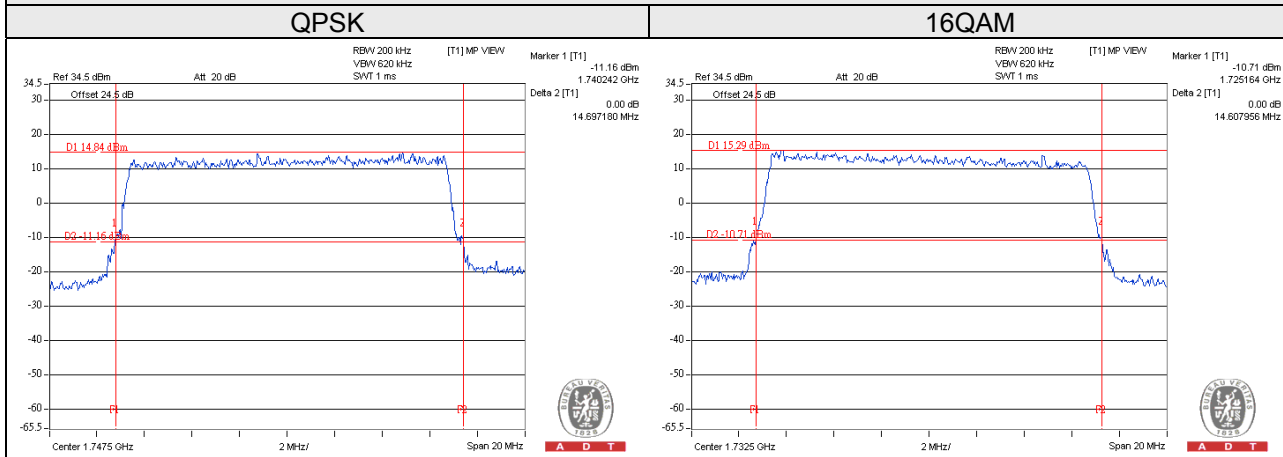

Occupied Bandwidth

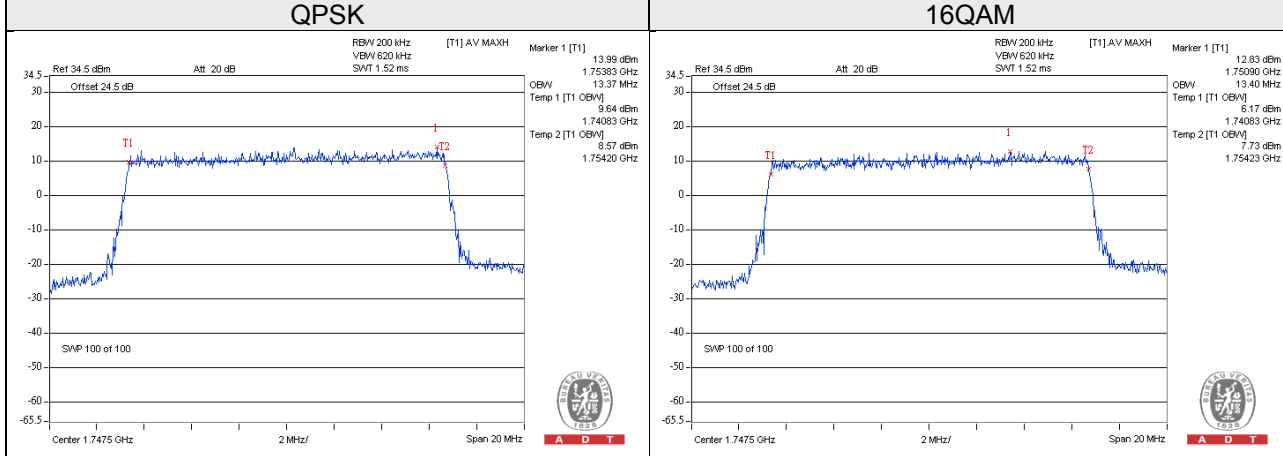

Channel Bandwidth: 20MHz



Channel	Frequency (MHz)	-26dBc Bandwidth (MHz)		Occupied Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20050	1720.0	19.78	19.69	17.87	17.80
20175	1732.5	19.70	19.65	17.93	17.93
20300	1745.0	19.85	19.66	18.00	17.93

SPECTRUM PLOT OF WORST VALUE

-26dBc Bandwidth

QPSK



16QAM

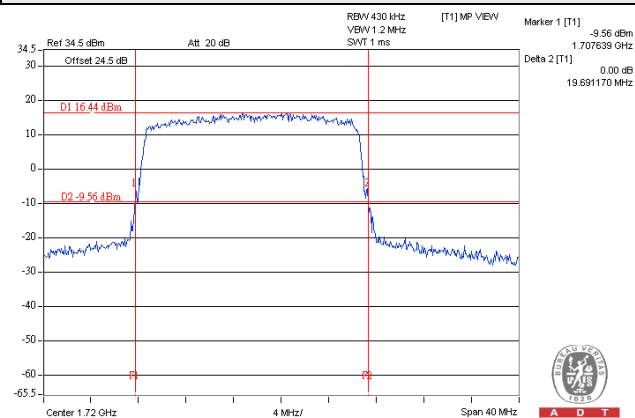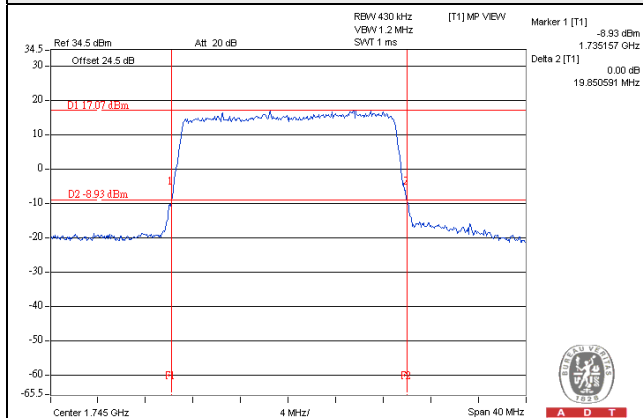

Occupied Bandwidth

QPSK

16QAM

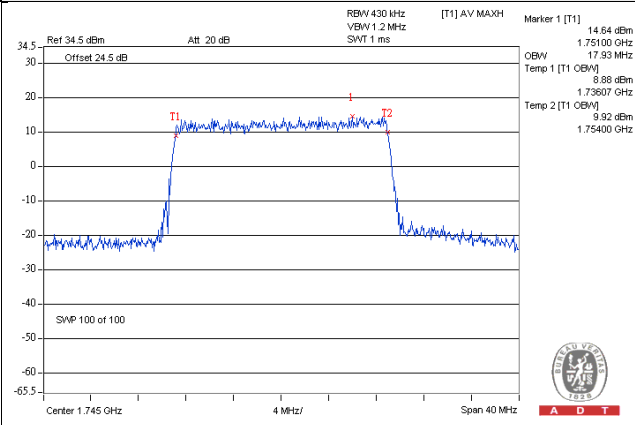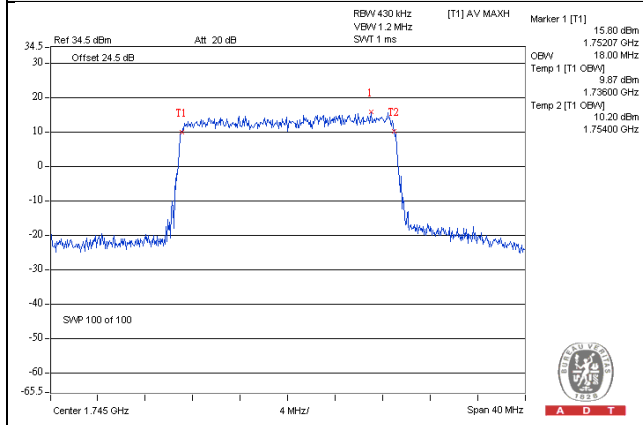


LTE Band 13


Channel Bandwidth: 5MHz					
Channel	Frequency (MHz)	-26dBc Bandwidth (MHz)		Occupied Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23205	779.5	5.00	5.00	4.47	4.45
23230	782.0	5.00	5.00	4.45	4.45
23255	784.5	5.07	5.07	4.47	4.45

SPECTRUM PLOT OF WORST VALUE

-26dBc Bandwidth

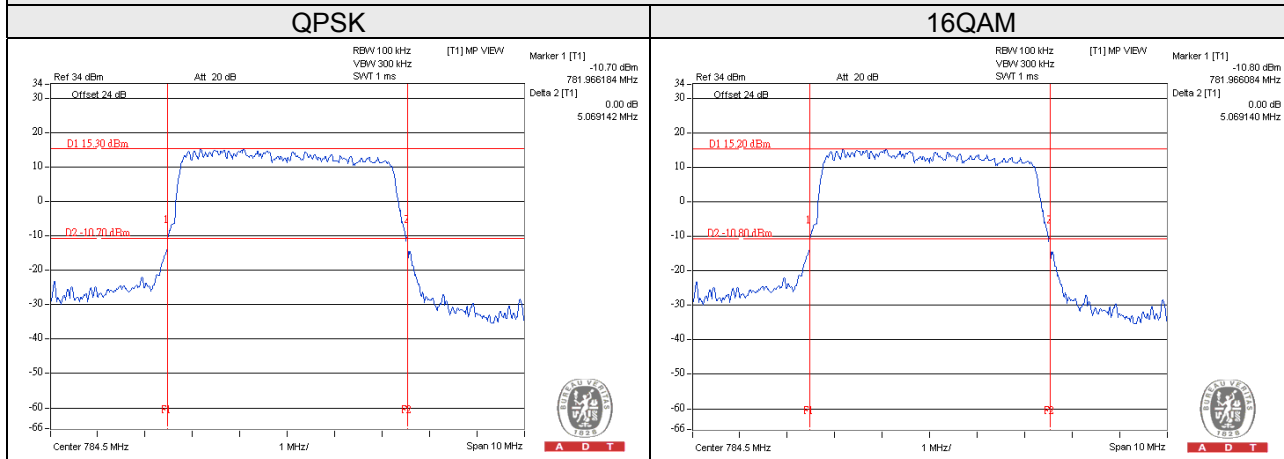

Occupied Bandwidth

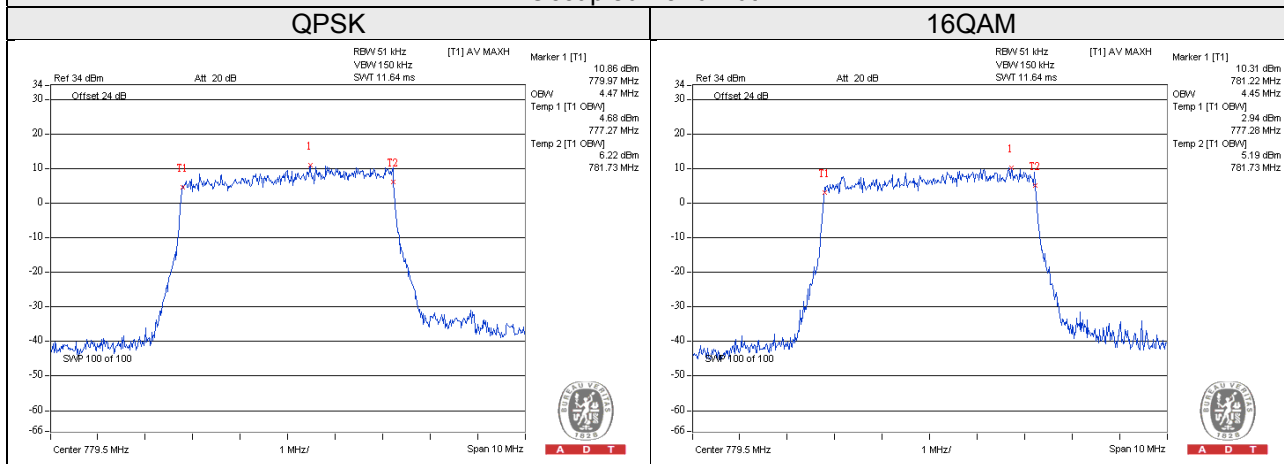


Channel Bandwidth: 10MHz

Channel	Frequency (MHz)	-26dBc Bandwidth (MHz)		Occupied Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23230	782.0	9.49	9.49	8.90	8.90


SPECTRUM PLOT OF WORST VALUE

-26dBc Bandwidth

QPSK

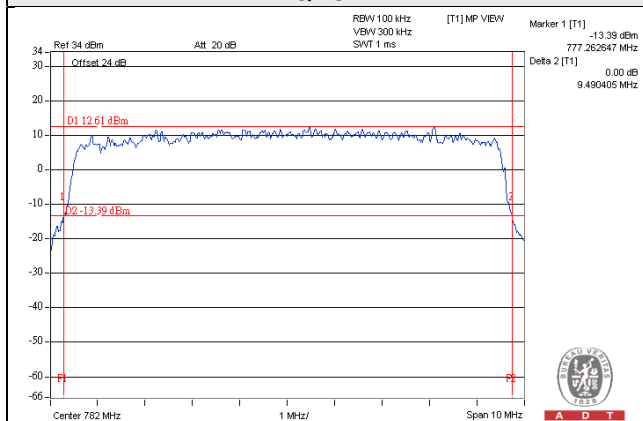


16QAM

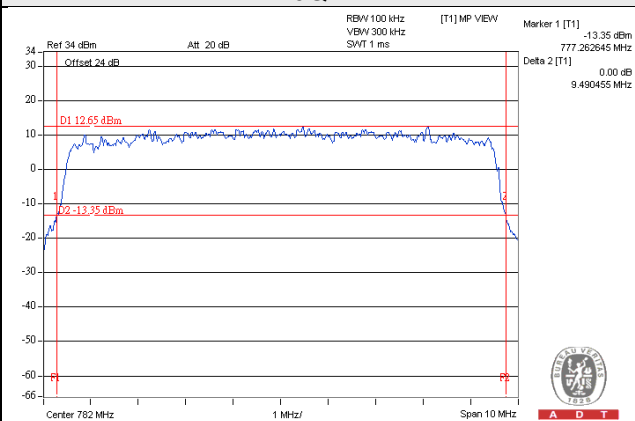


Occupied Bandwidth

QPSK

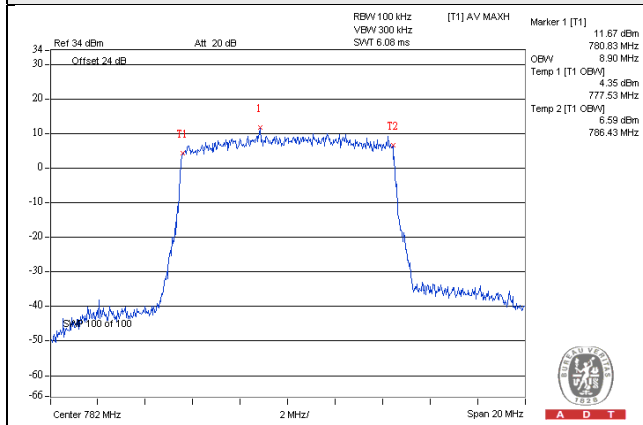


16QAM

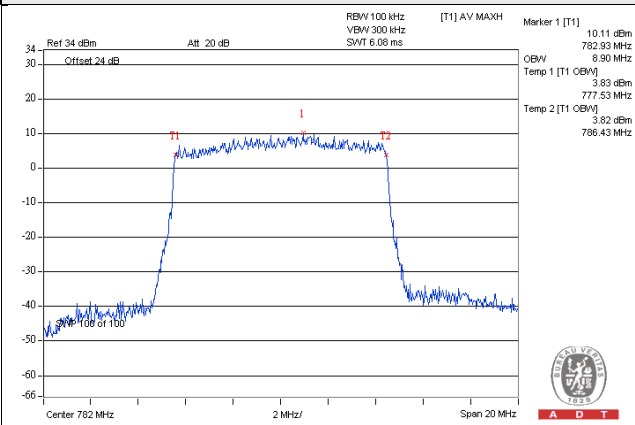


LTE Band 17

Channel Bandwidth: 5MHz					
Channel	Frequency (MHz)	-26dBc Bandwidth (MHz)		Occupied Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23755	706.5	5.03	5.03	4.48	4.45
23790	710.0	5.08	5.08	4.47	4.47
23825	713.5	5.10	5.10	4.47	4.48

SPECTRUM PLOT OF WORST VALUE
-26dBc Bandwidth

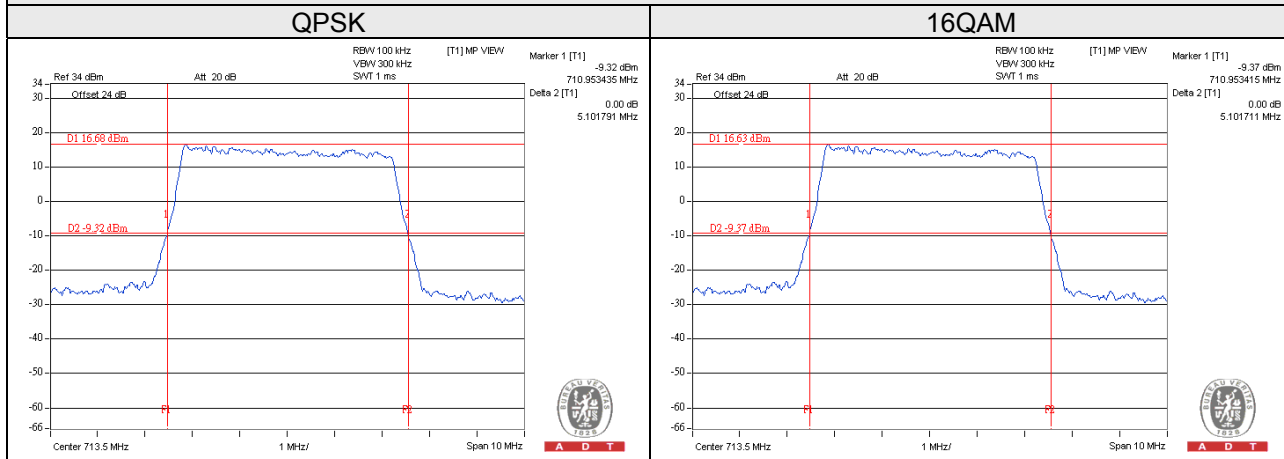

Occupied Bandwidth

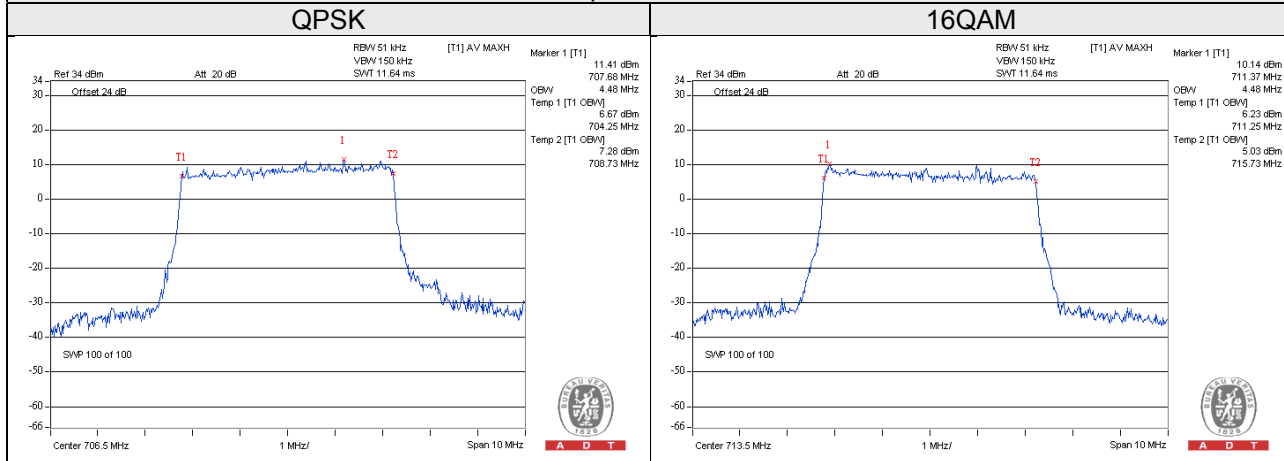


Channel Bandwidth: 10MHz

Channel	Frequency (MHz)	-26dBc Bandwidth (MHz)		Occupied Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23780	709.0	9.88	9.88	8.90	8.90
23790	710.0	9.86	9.91	8.93	8.90
23800	711.0	9.82	9.80	8.90	8.93


SPECTRUM PLOT OF WORST VALUE

-26dBc Bandwidth

QPSK

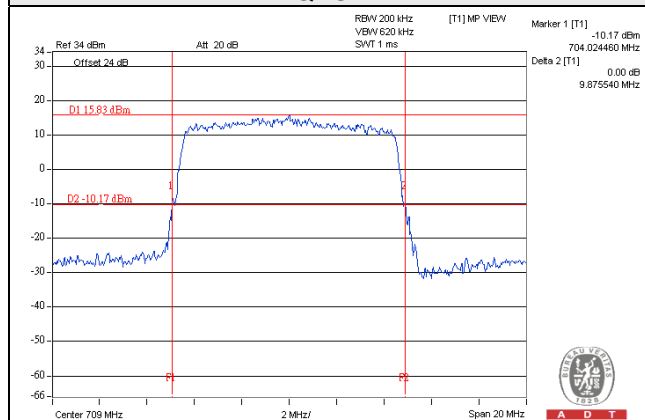


16QAM

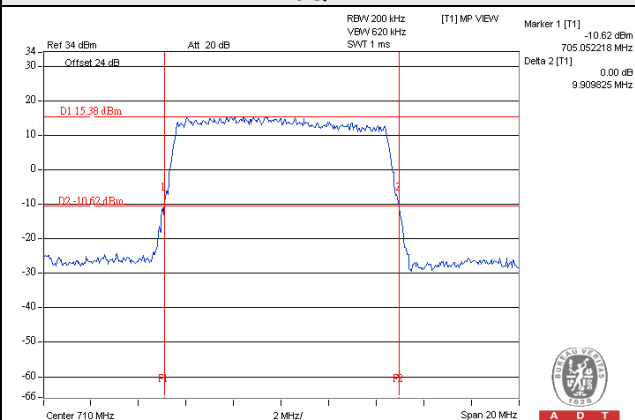


Occupied Bandwidth

QPSK

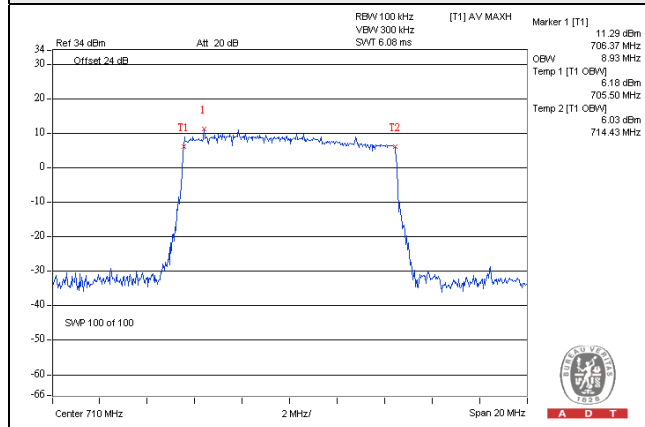

16QAM

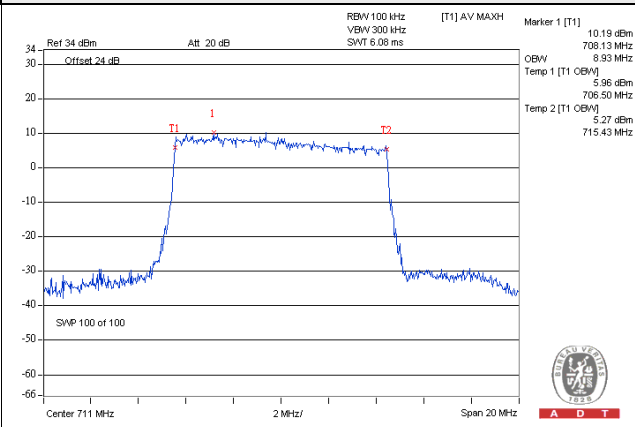

4.4 Channel Edge Measurement

4.4.1 Limits of Band Edge Measurement

For LTE Band 4

According to FCC 27.53(h) for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


For LTE Band 13

According to FCC 27.53(c) (2) for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.

For LTE Band 17

According to FCC 27.53(g) for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

4.4.2 Test Setup

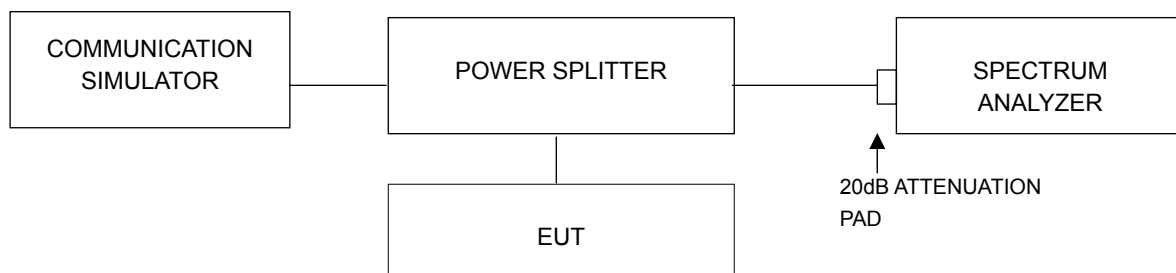


4.4.3 Test Procedures

- The EUT was set up for the rated peak power. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RBW = 30kHz and VBW = 100kHz (Channel Bandwidth: 1.4MHz and 3MHz), RBW = 51kHz and VBW = 150kHz (Channel Bandwidth: 5MHz), RBW = 100kHz and VBW = 300kHz (Channel Bandwidth: 10MHz), RBW = 200kHz and VBW = 620kHz (Channel Bandwidth: 15MHz) and RBW = 430kHz and VBW = 1.2MHz (Channel Bandwidth: 20MHz).
- Record the max trace plot into the test report.



4.4.4 Test Results

LTE Band 4


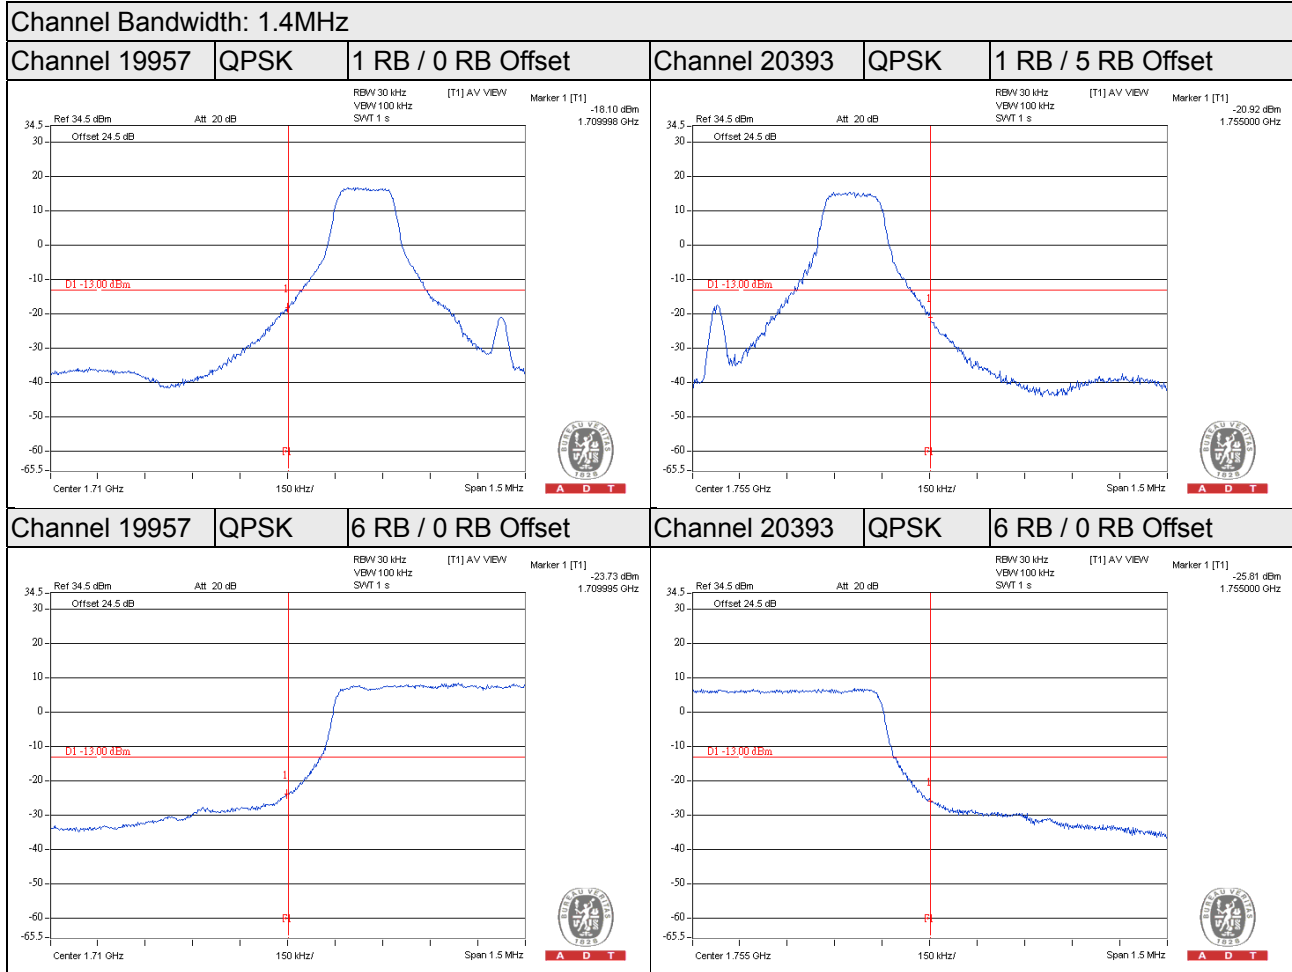


Channel Bandwidth: 3MHz

Channel 19965	QPSK	1 RB / 0 RB Offset	Channel 20385	QPSK	1 RB / 14 RB Offset
----------------------	-------------	---------------------------	----------------------	-------------	----------------------------

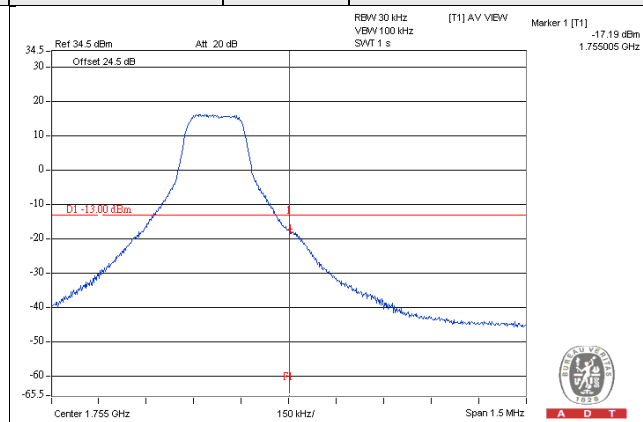
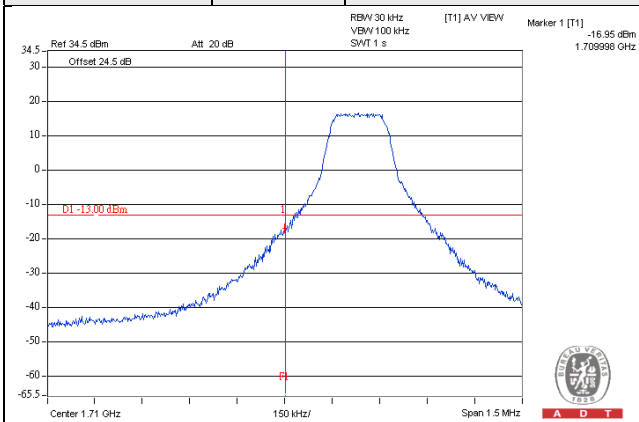


Channel 19965	QPSK	15 RB / 0 RB Offset	Channel 20385	QPSK	15 RB / 0 RB Offset
----------------------	-------------	----------------------------	----------------------	-------------	----------------------------

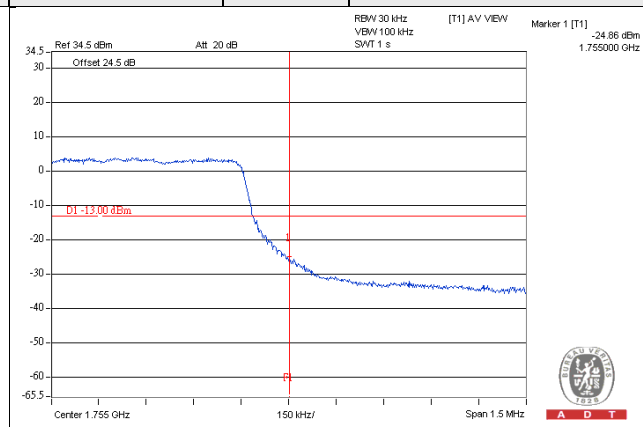
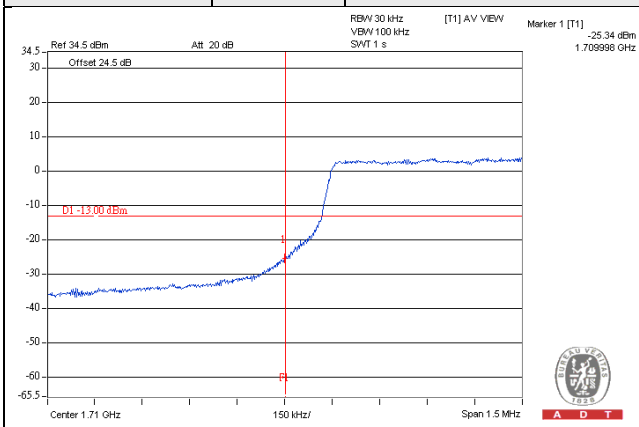


Channel Bandwidth: 5MHz

Channel 19975	QPSK	1 RB / 0 RB Offset	Channel 20375	QPSK	1 RB / 24 RB Offset
----------------------	-------------	---------------------------	----------------------	-------------	----------------------------

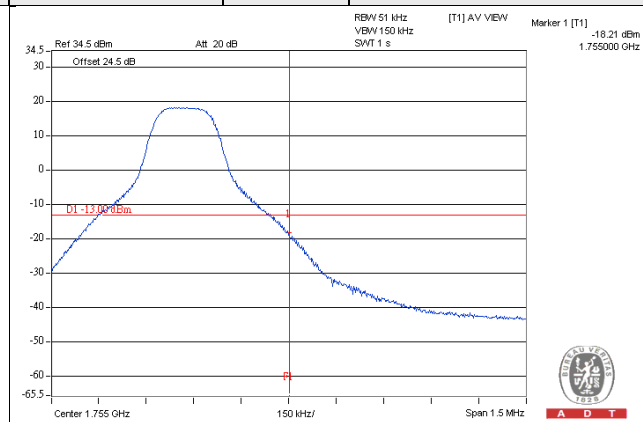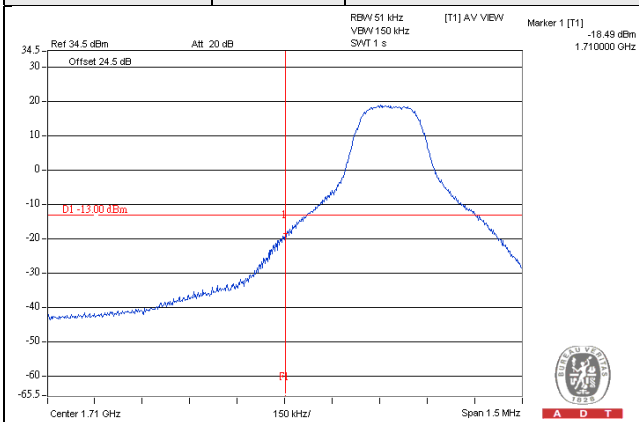

Channel 19975	QPSK	25 RB / 0 RB Offset	Channel 20375	QPSK	25 RB / 0 RB Offset
----------------------	-------------	----------------------------	----------------------	-------------	----------------------------

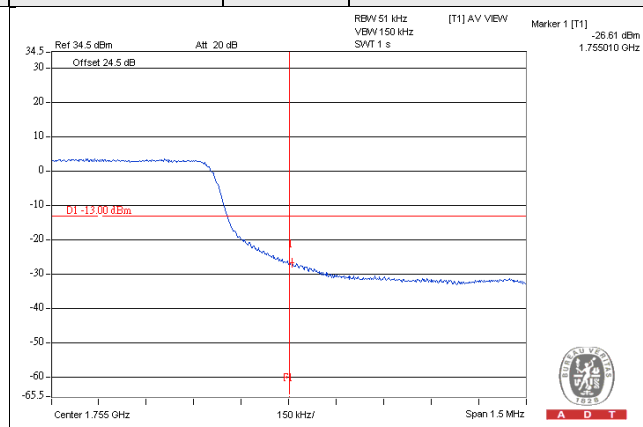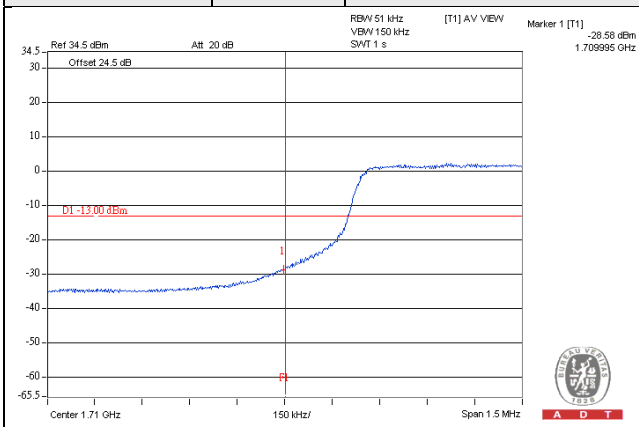

Channel Bandwidth: 10MHz

Channel 20000



QPSK

1 RB / 0 RB Offset

Channel 20350

QPSK

1 RB / 49 RB Offset

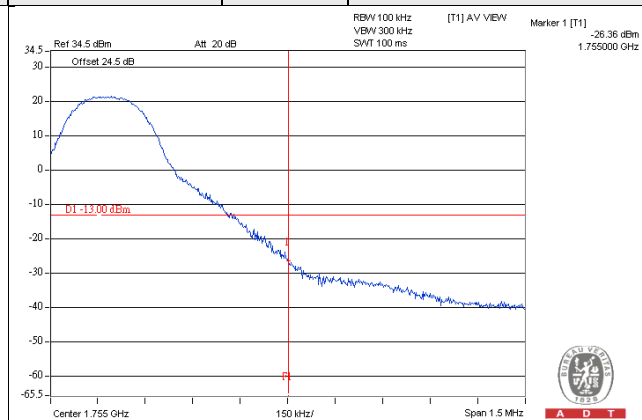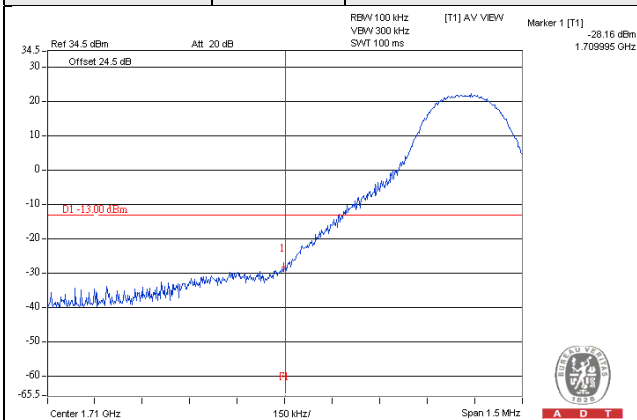

Channel 20000



QPSK

50 RB / 0 RB Offset

Channel 20350



QPSK

50 RB / 0 RB Offset

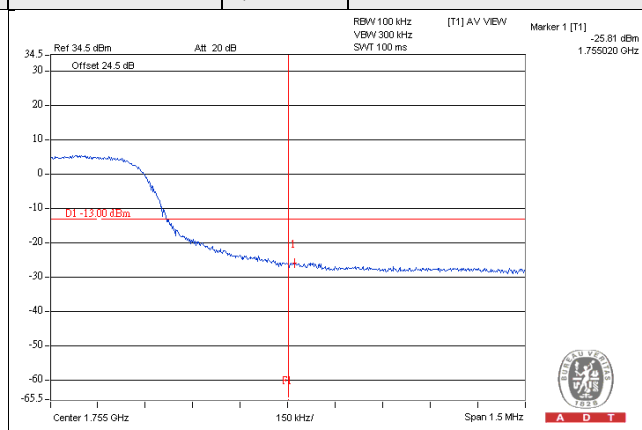
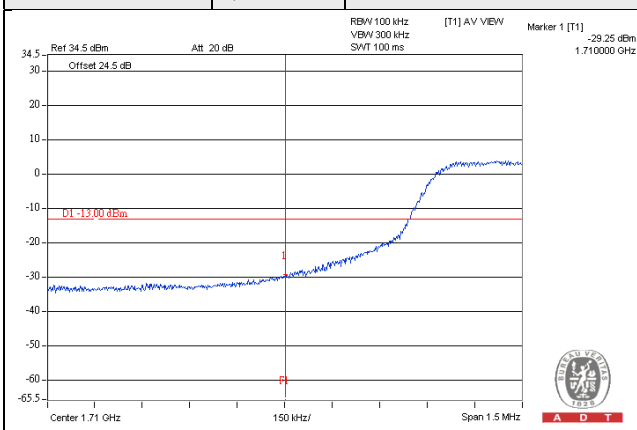


Channel Bandwidth: 15MHz

Channel 20025	QPSK	1 RB / 0 RB Offset	Channel 20325	QPSK	1 RB / 74 RB Offset
---------------	------	--------------------	---------------	------	---------------------

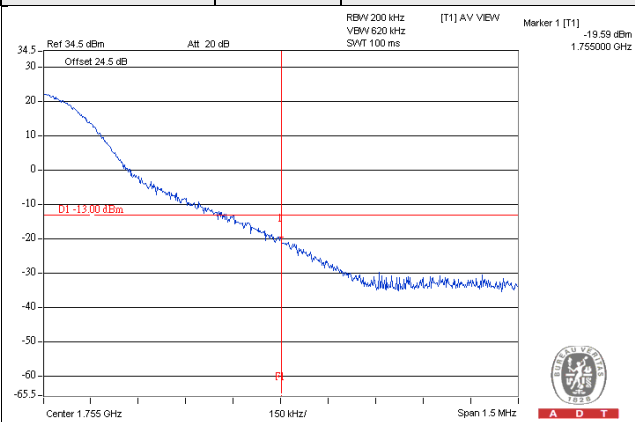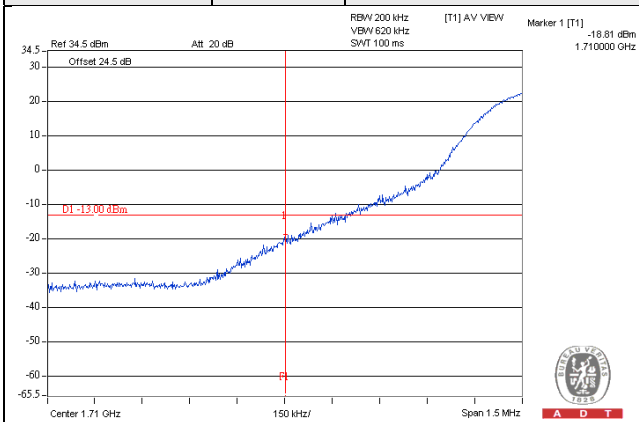

Channel 20025	QPSK	75 RB / 0 RB Offset	Channel 20325	QPSK	75 RB / 0 RB Offset
---------------	------	---------------------	---------------	------	---------------------

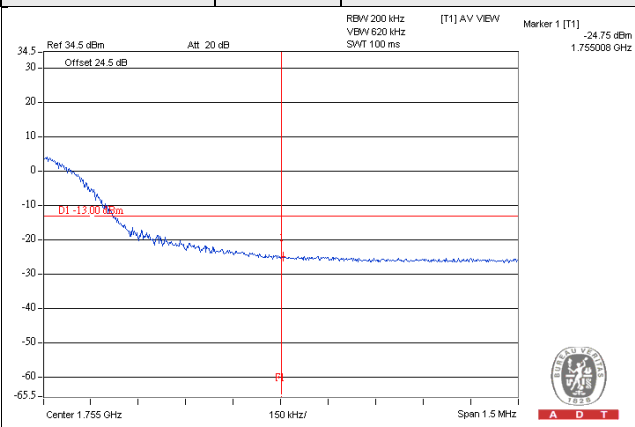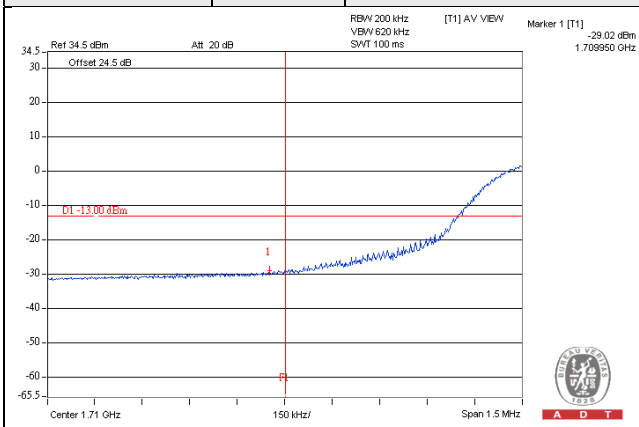

Channel Bandwidth: 20MHz

Channel 20050



QPSK

1 RB / 0 RB Offset

Channel 20300

QPSK

1 RB / 99 RB Offset

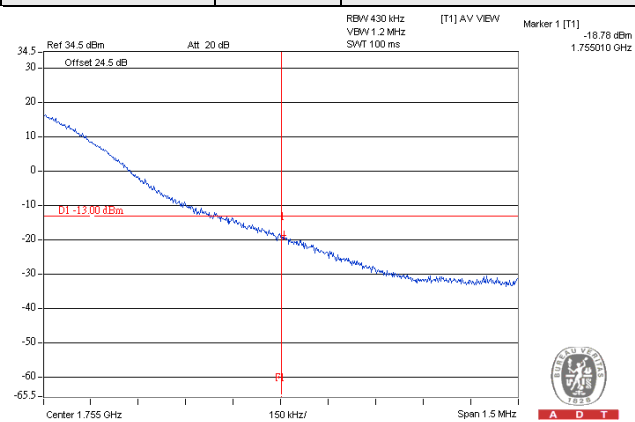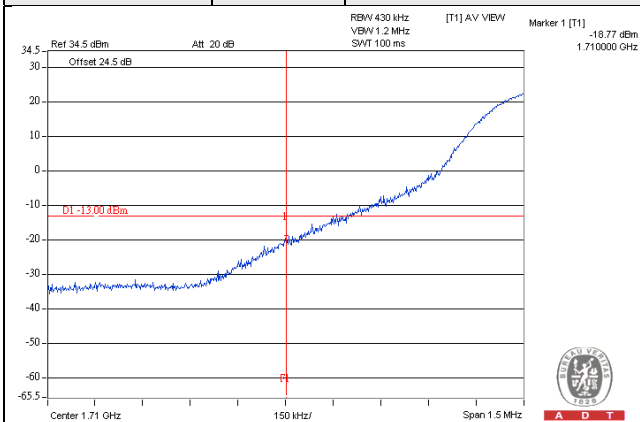

Channel 20050



QPSK

100 RB / 0 RB Offset

Channel 20300

QPSK

100 RB / 0 RB Offset

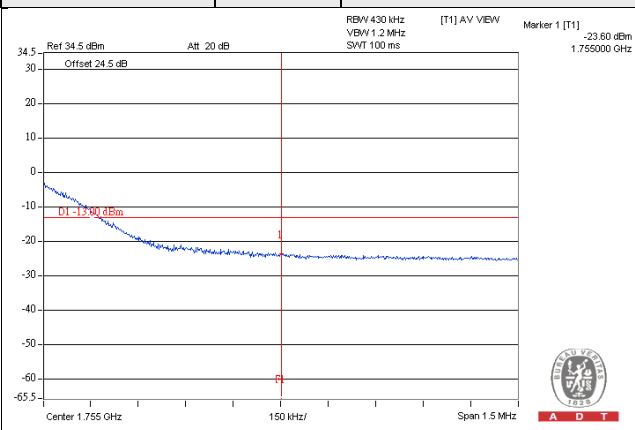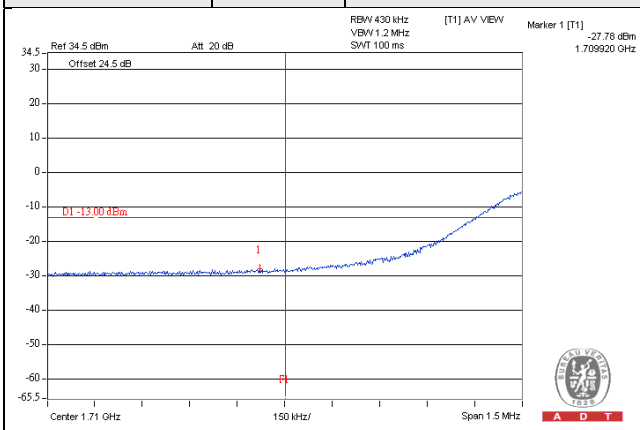

LTE Band 13

Channel Bandwidth: 5MHz

Channel 23205



QPSK

1 RB / 0 RB Offset

Channel 23255

QPSK

1 RB / 24 RB Offset

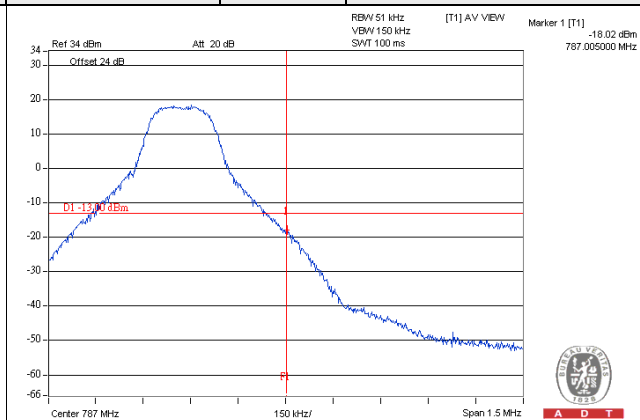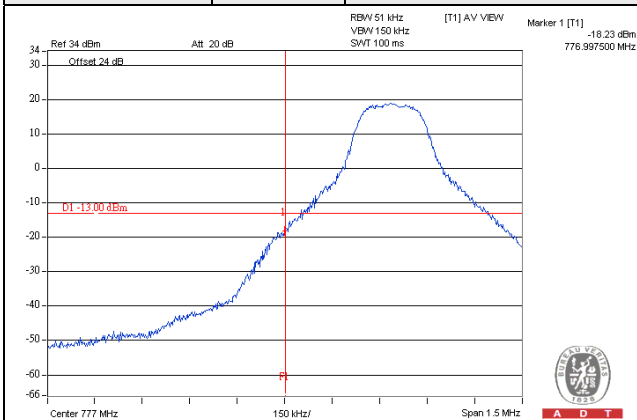

Channel 23205



QPSK

25 RB / 0 RB Offset

Channel 23255

QPSK

25 RB / 0 RB Offset

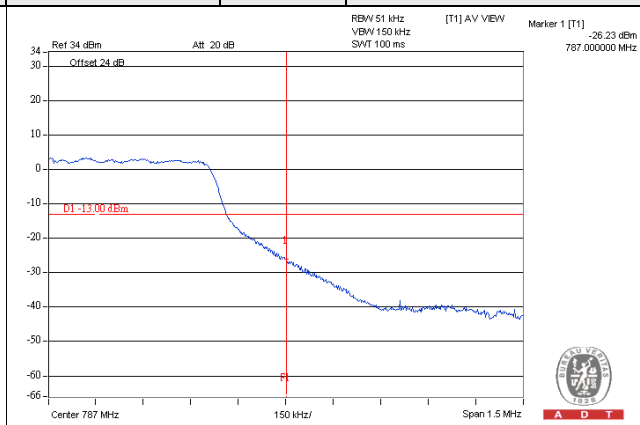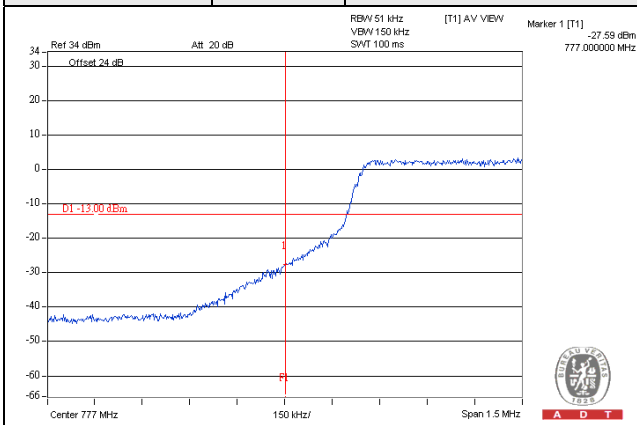

Channel Bandwidth: 10MHz

Channel 23230



QPSK

1 RB / 0 RB Offset

Channel 23230

QPSK

1 RB / 49 RB Offset

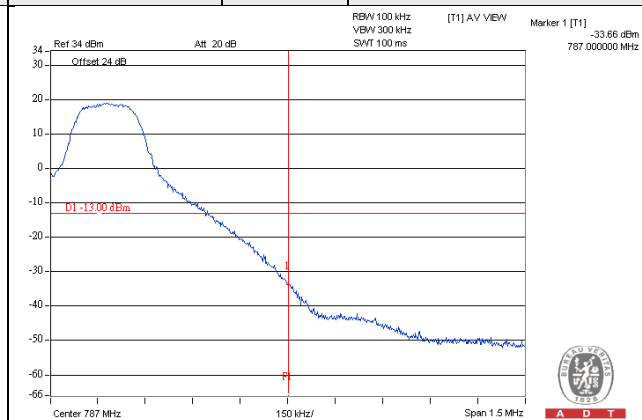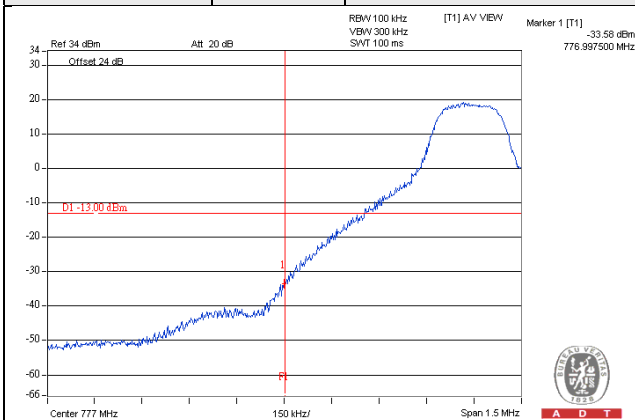

Channel 23230



QPSK

50 RB / 0 RB Offset

Channel 23230

QPSK

50 RB / 0 RB Offset

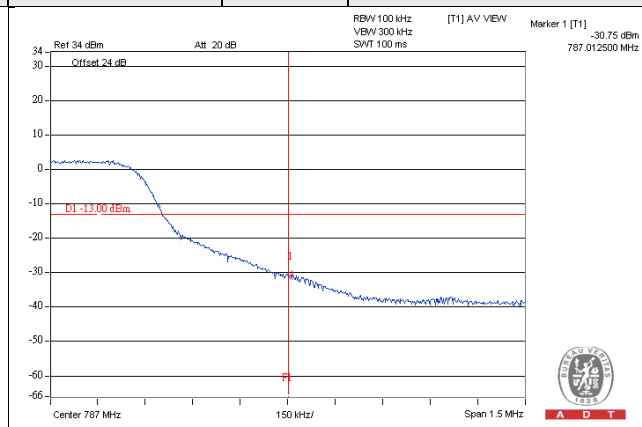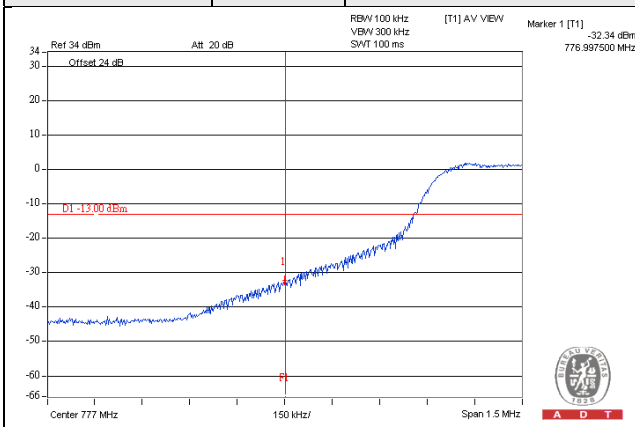

LTE Band 17

Channel Bandwidth: 5MHz

Channel 23755



QPSK

1 RB / 0 RB Offset

Channel 23825

QPSK

1 RB / 24 RB Offset

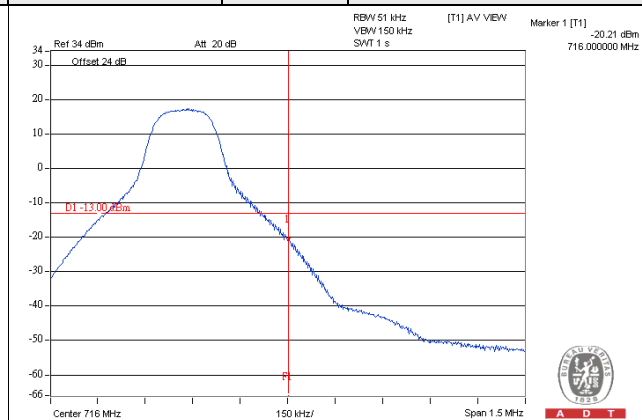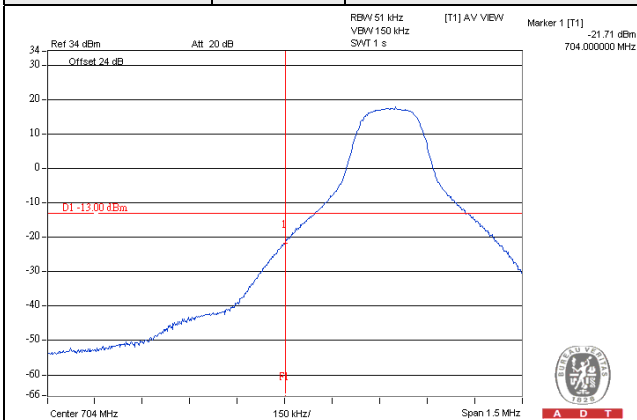

Channel 23755



QPSK

25 RB / 0 RB Offset

Channel 23825



QPSK

25 RB / 0 RB Offset

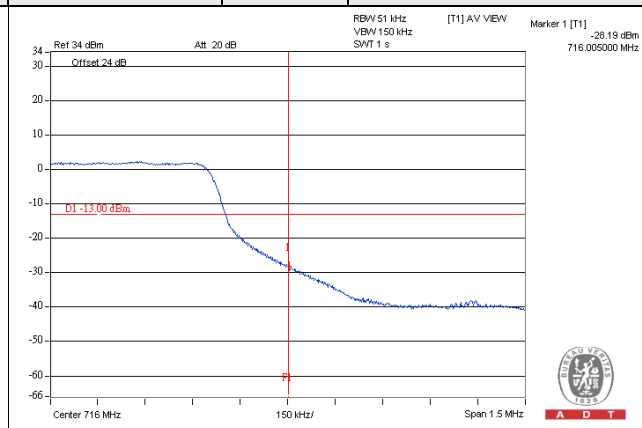
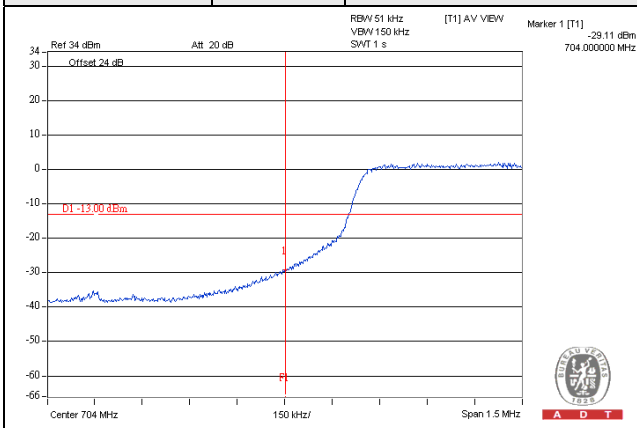


Channel Bandwidth: 10MHz

Channel 23780	QPSK	1 RB / 0 RB Offset	Channel 23790	QPSK	1 RB / 49 RB Offset
----------------------	-------------	---------------------------	----------------------	-------------	----------------------------

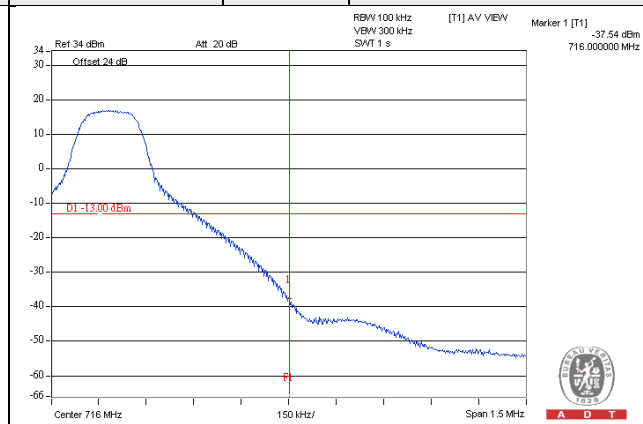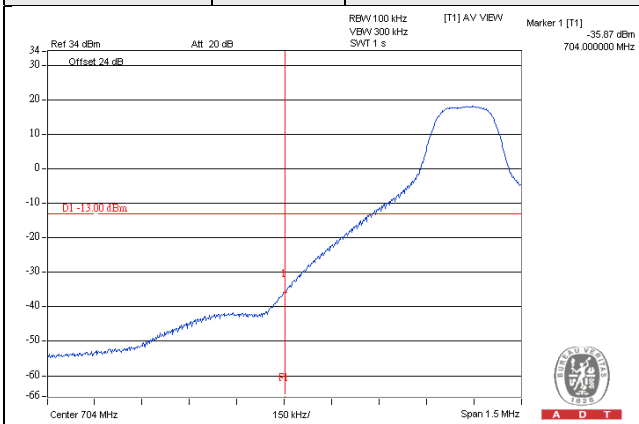

Channel 23780	QPSK	50 RB / 0 RB Offset	Channel 23790	QPSK	50 RB / 0 RB Offset
----------------------	-------------	----------------------------	----------------------	-------------	----------------------------

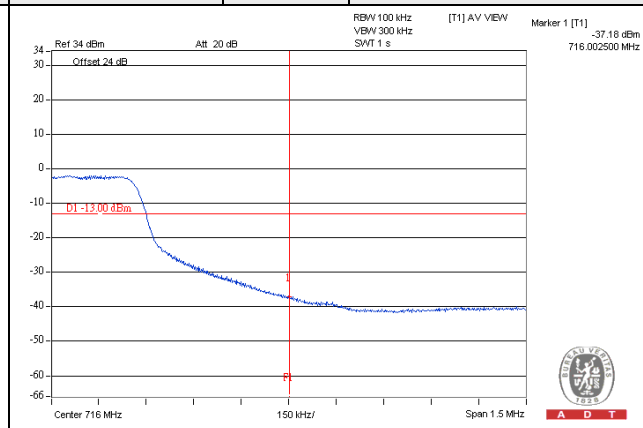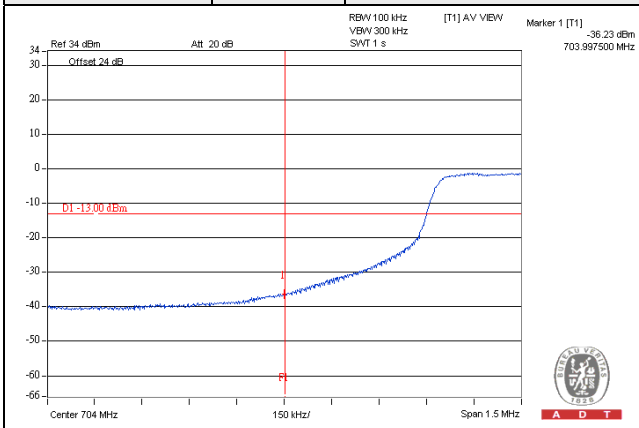


4.5 Peak to Average Ratio

4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.5.2 Test Setup

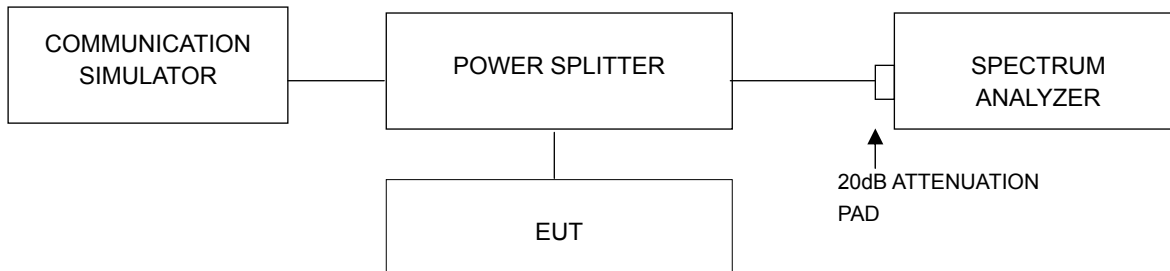


4.5.3 Test Procedures

- Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results

LTE Band 4

Channel Bandwidth: 1.4MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
19957	1710.7	5.50	5.47
20175	1732.5	5.29	5.44
20393	1754.3	5.55	5.47

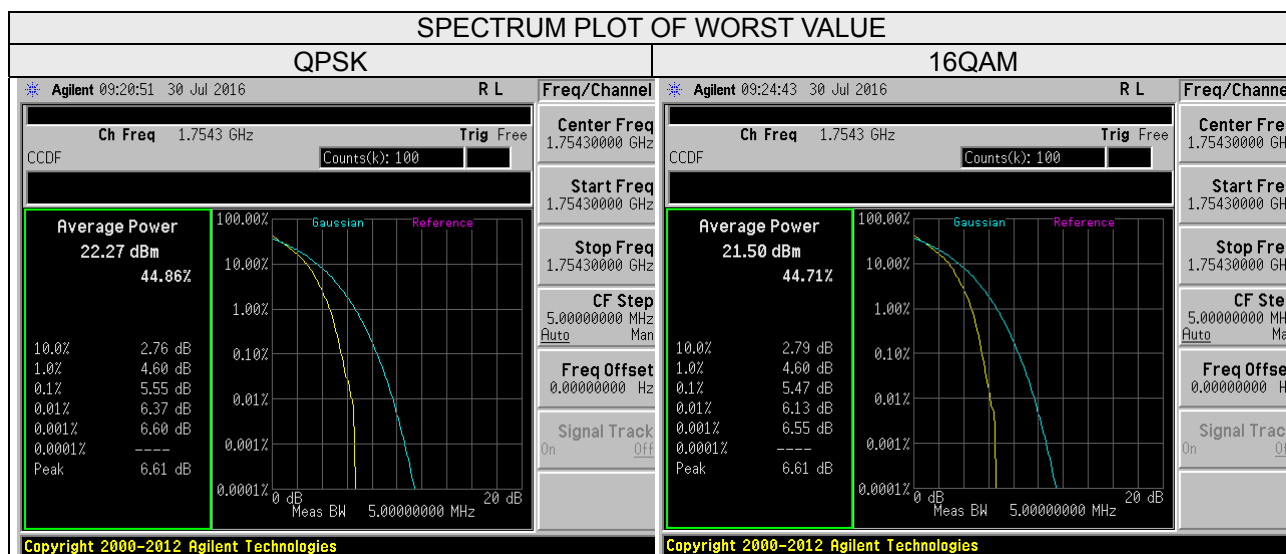

Channel Bandwidth: 3MHz

Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
19965	1711.5	5.65	5.62
20175	1732.5	5.41	5.38
20385	1753.5	5.57	5.57

SPECTRUM PLOT OF WORST VALUE

QPSK		16QAM	
<p>* Agilent 09:32:51 30 Jul 2016 R L</p> <p>Ch Freq 1.7115 GHz Trig Free</p> <p>CCDF Counts(k): 100</p> <p>Average Power 22.55 dBm 44.26%</p> <p>10.0% 2.59 dB 1.0% 4.58 dB 0.1% 5.65 dB 0.01% 6.30 dB 0.001% 6.60 dB 0.0001% ---- Peak 6.63 dB</p>		<p>* Agilent 09:40:30 30 Jul 2016 R L</p> <p>Ch Freq 1.7115 GHz Trig Free</p> <p>CCDF Counts(k): 100</p> <p>Average Power 21.78 dBm 44.40%</p> <p>10.0% 2.59 dB 1.0% 4.55 dB 0.1% 5.62 dB 0.01% 6.23 dB 0.001% 6.55 dB 0.0001% ---- Peak 6.62 dB</p>	
<p>Center Freq 1.71150000 GHz</p> <p>Start Freq 1.71150000 GHz</p> <p>Stop Freq 1.71150000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>		<p>Center Freq 1.71150000 GHz</p> <p>Start Freq 1.71150000 GHz</p> <p>Stop Freq 1.71150000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>	
Copyright 2000-2012 Agilent Technologies		Copyright 2000-2012 Agilent Technologies	

Channel Bandwidth: 5MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
19975	1712.5	5.62	5.66
20175	1732.5	5.53	5.58
20375	1752.5	5.60	5.62


SPECTRUM PLOT OF WORST VALUE

QPSK		16QAM	
* Agilent 09:46:25 30 Jul 2016 R L Ch Freq 1.7125 GHz Trig Free CCDF Counts(k): 100		* Agilent 09:53:55 30 Jul 2016 R L Ch Freq 1.7125 GHz Trig Free CCDF Counts(k): 100	
Freq/Channel Center Freq 1.71250000 GHz Start Freq 1.71250000 GHz Stop Freq 1.71250000 GHz CF Step 5.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off		Freq/Channel Center Freq 1.71250000 GHz Start Freq 1.71250000 GHz Stop Freq 1.71250000 GHz CF Step 5.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	
Average Power 22.33 dBm 45.82% 10.0% 2.44 dB 1.0% 4.48 dB 0.1% 5.62 dB 0.01% 6.18 dB 0.001% 6.45 dB 0.0001% ---- Peak 6.50 dB		Average Power 21.39 dBm 45.86% 10.0% 2.47 dB 1.0% 4.50 dB 0.1% 5.66 dB 0.01% 6.24 dB 0.001% 6.50 dB 0.0001% ---- Peak 6.56 dB	
			
Copyright 2000-2012 Agilent Technologies		Copyright 2000-2012 Agilent Technologies	

Channel Bandwidth: 10MHz

Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
20000	1715.0	5.34	5.36
20175	1732.5	5.46	5.48
20350	1750.0	5.57	5.57

SPECTRUM PLOT OF WORST VALUE

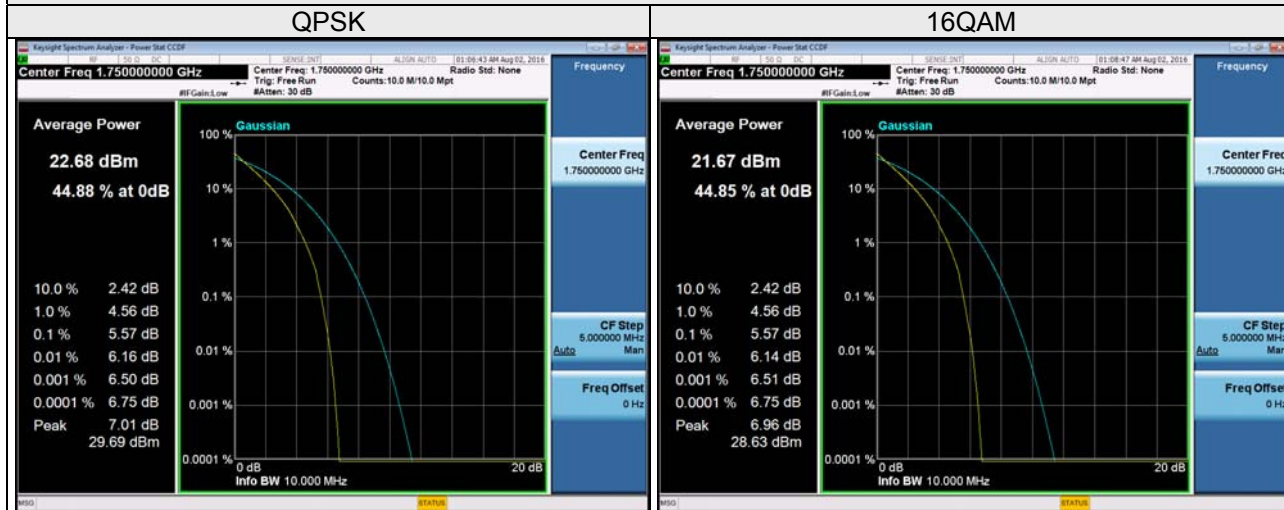

Channel Bandwidth: 15MHz

Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
20025	1717.5	5.40	5.40
20175	1732.5	5.67	5.66
20325	1747.5	5.81	5.82

SPECTRUM PLOT OF WORST VALUE



Channel Bandwidth: 20MHz


Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
20050	1720.0	5.16	5.16
20175	1732.5	5.51	5.51
20300	1745.0	5.58	5.58

SPECTRUM PLOT OF WORST VALUE



LTE Band 13

Channel Bandwidth: 5MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
23205	779.5	5.00	5.55
23230	782.0	5.28	5.36
23255	784.5	5.66	5.61

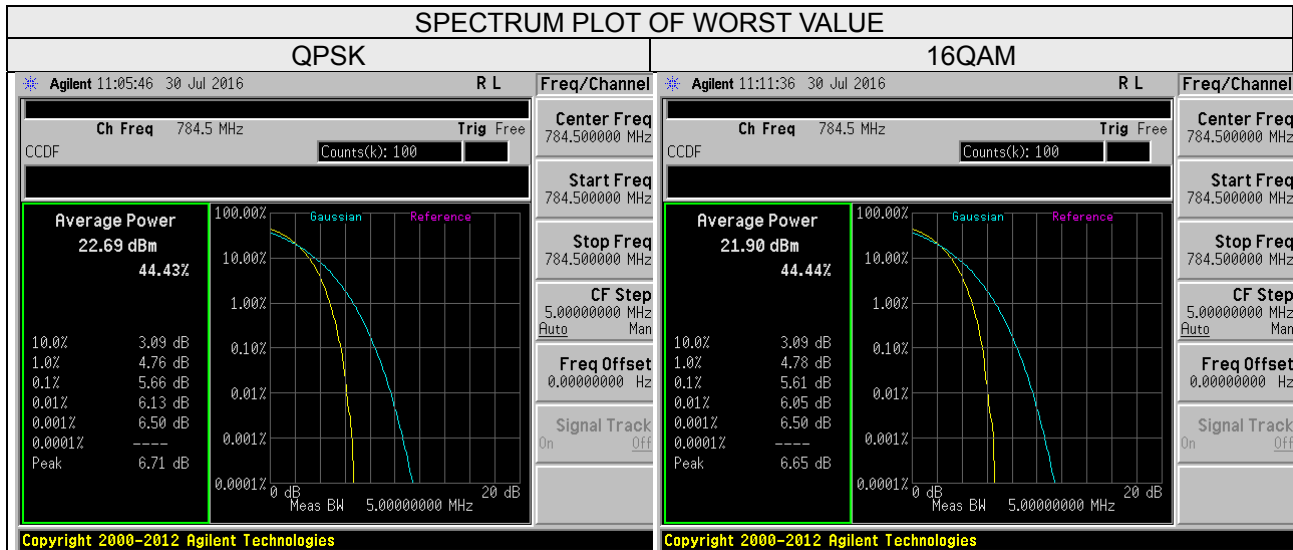

Channel Bandwidth: 10MHz


Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
23230	782.0	5.22	5.19

SPECTRUM PLOT OF WORST VALUE



LTE Band 17

Channel Bandwidth: 5MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
23755	706.5	5.47	5.45
23790	710.0	5.56	5.53
23825	713.5	5.66	5.68

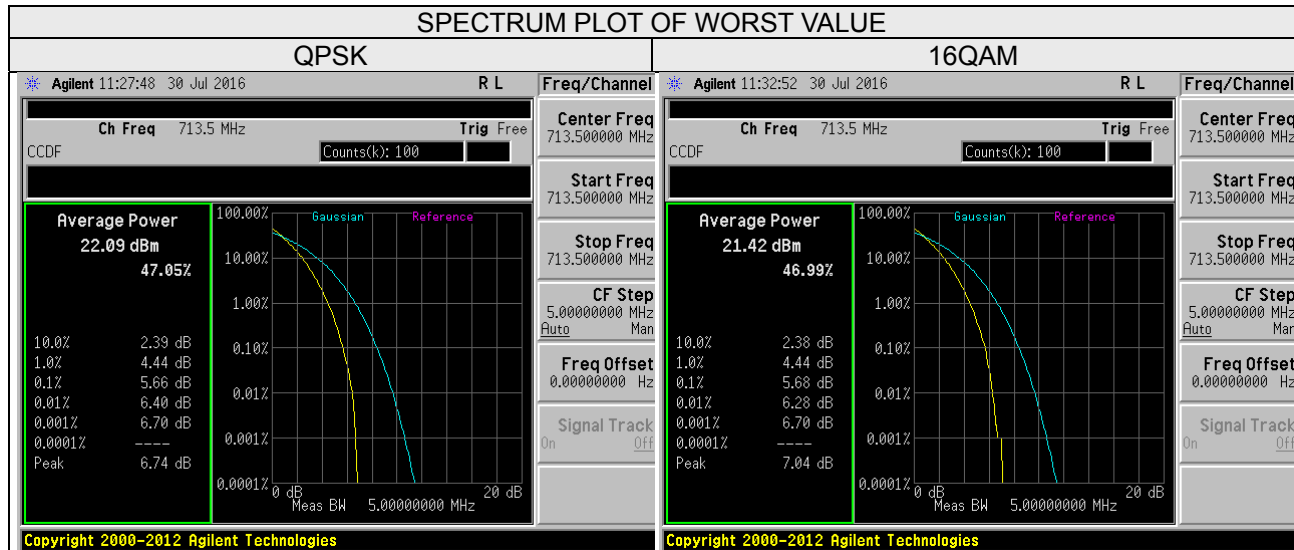

Channel Bandwidth: 10MHz

Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
23780	709.0	5.49	5.45
23790	710.0	5.53	5.51
23800	711.0	5.55	5.56

SPECTRUM PLOT OF WORST VALUE



4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

For LTE Band 4

According to FCC 27.53(h) for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


For LTE Band 13

According to FCC 27.53(c) (2) for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.

For LTE Band 17

According to FCC 27.53(g) for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

4.6.2 Test Setup

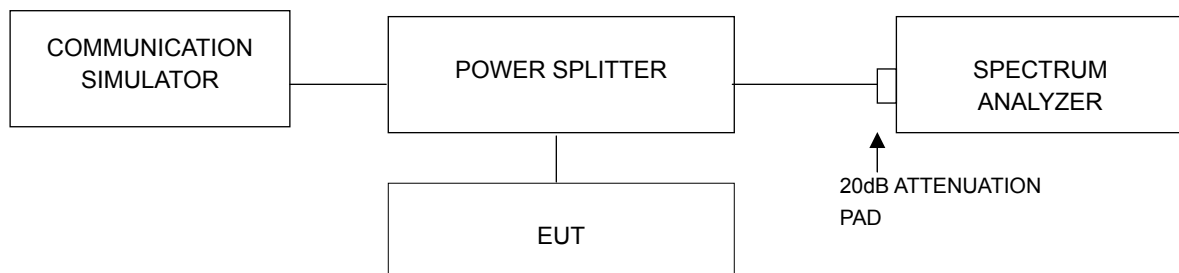

4.6.3 Test Procedure

- a. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 9kHz to 20GHz for LTE Band 4 and 9kHz to 9GHz for LTE Band 13 & 17, it shall be connected to the 20dB pad attenuated the carried frequency. The spectrum set RB = 1MHz, VB = 3MHz.


4.6.4 Test Results

LTE Band 4


Channel Bandwidth: 1.4MHz

Channel 19957


Frequency Range : 9kHz~3GHz

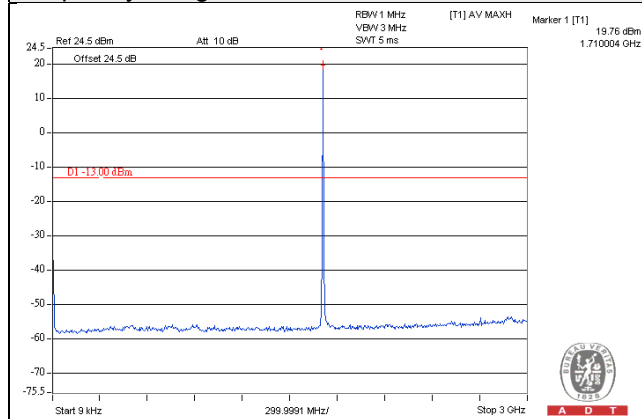

Frequency Range : 3GHz~10GHz

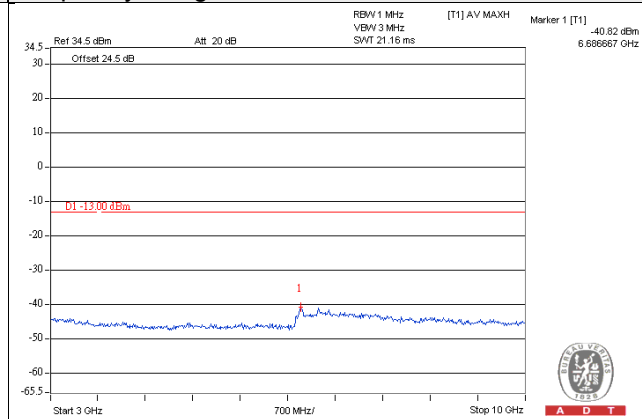


Frequency Range : 10GHz~20GHz

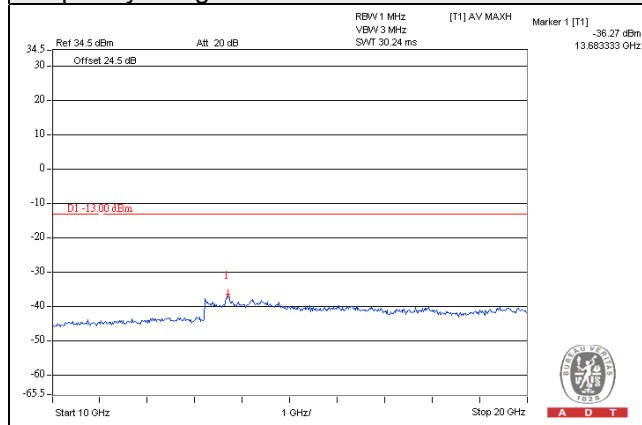


Channel Bandwidth: 1.4MHz

Channel 20175


Frequency Range : 9kHz~3GHz

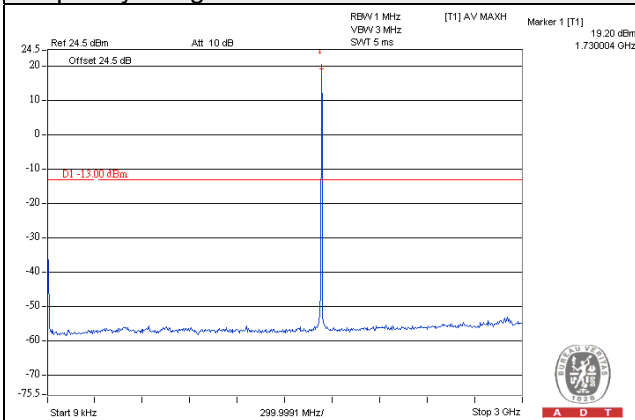

Frequency Range : 3GHz~10GHz

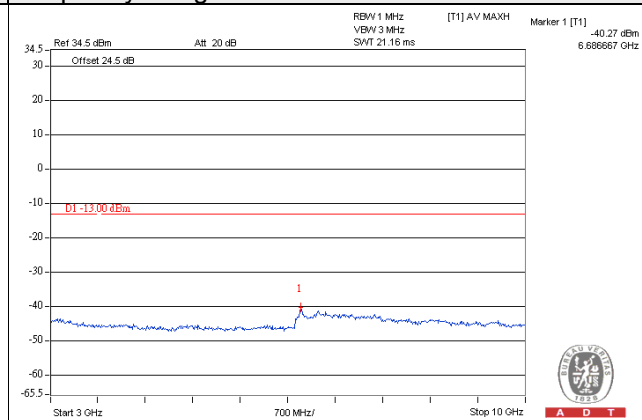


Frequency Range : 10GHz~20GHz

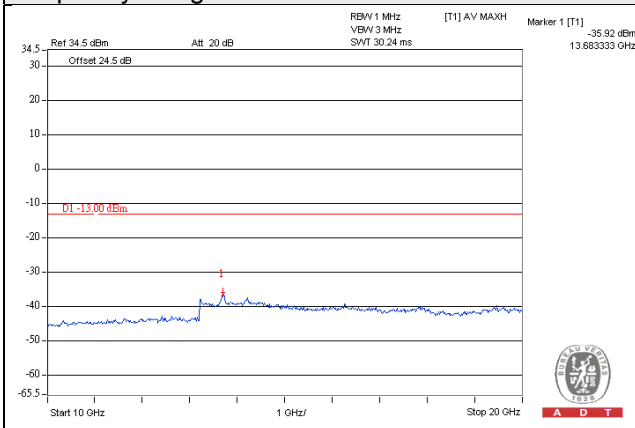


Channel Bandwidth: 1.4MHz

Channel 20393


Frequency Range : 9kHz~3GHz

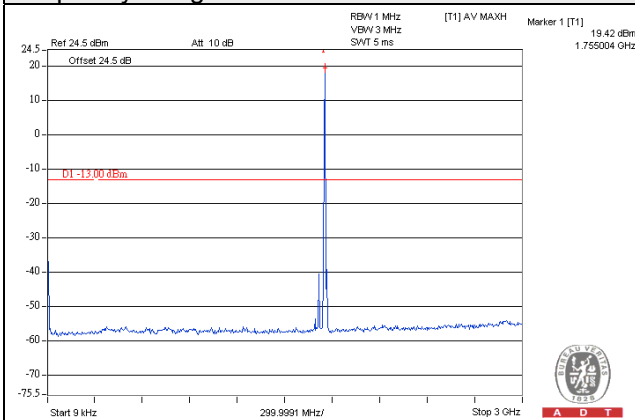

Frequency Range : 3GHz~10GHz

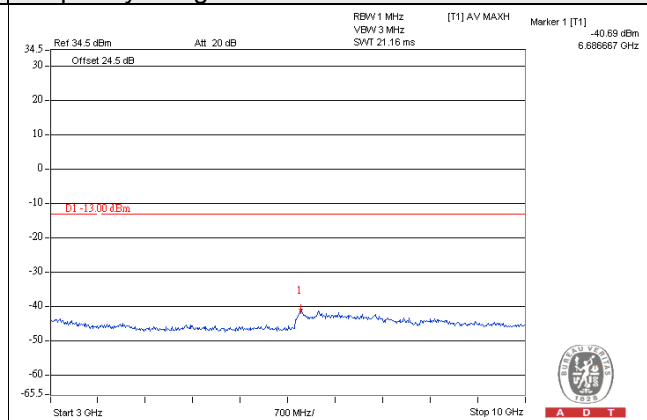


Frequency Range : 10GHz~20GHz

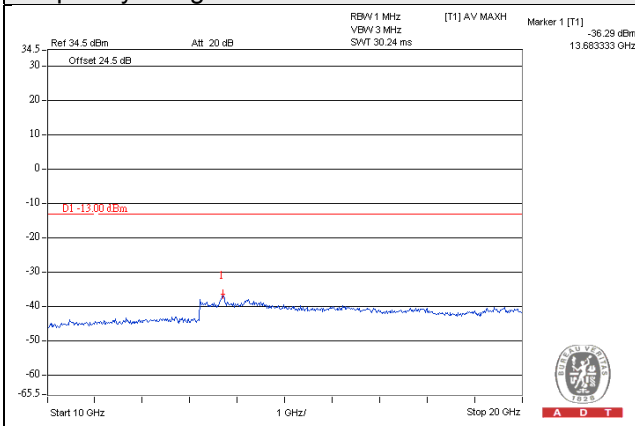


Channel Bandwidth: 3MHz

Channel 19965


Frequency Range : 9kHz~3GHz

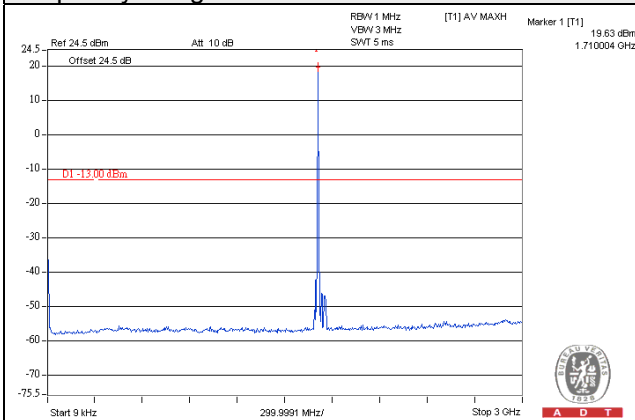

Frequency Range : 3GHz~10GHz

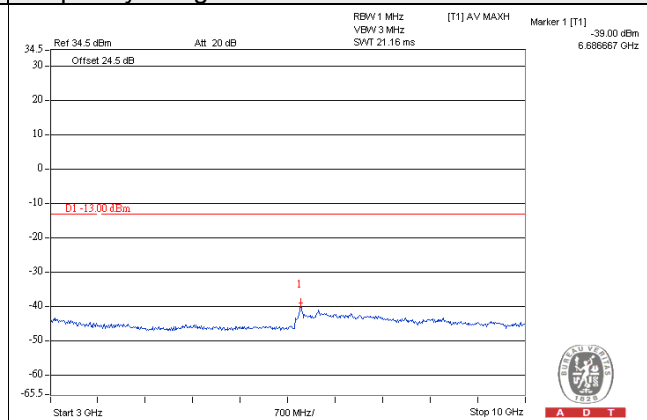


Frequency Range : 10GHz~20GHz

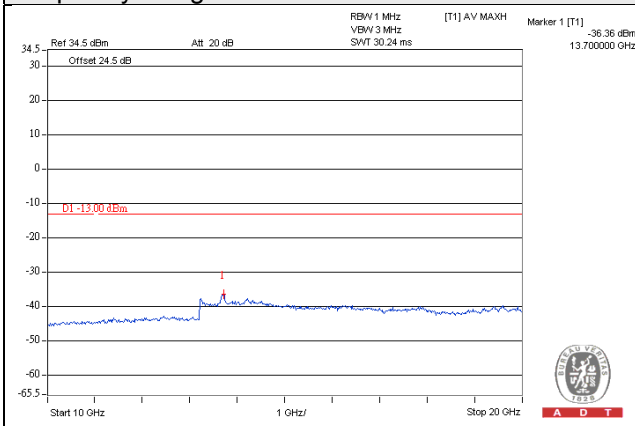


Channel Bandwidth: 3MHz

Channel 20175


Frequency Range : 9kHz~3GHz

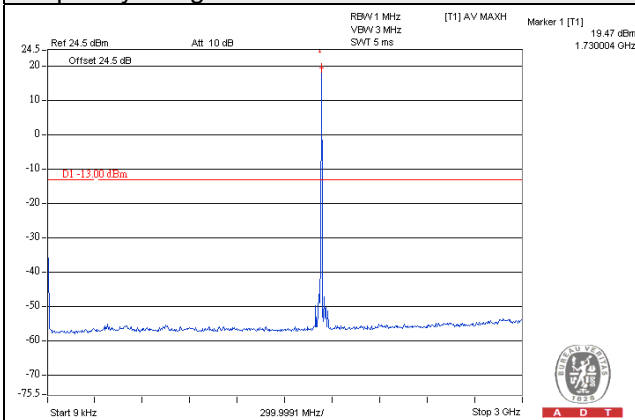

Frequency Range : 3GHz~10GHz

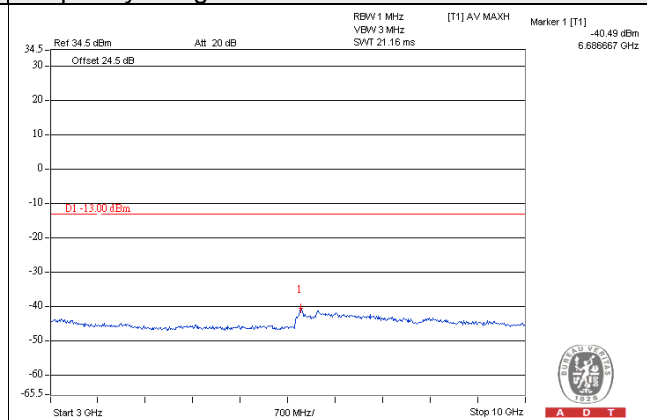


Frequency Range : 10GHz~20GHz

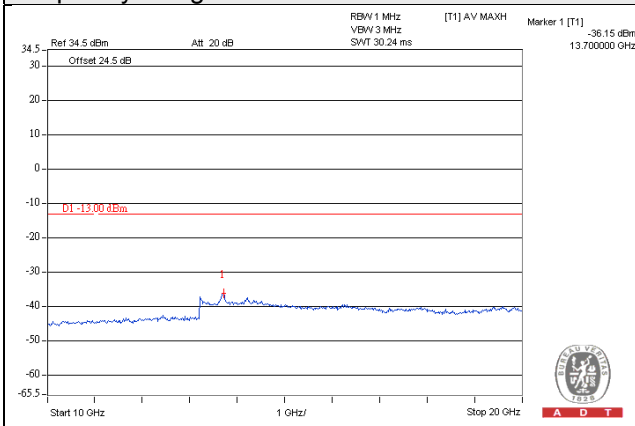


Channel Bandwidth: 3MHz

Channel 20385


Frequency Range : 9kHz~3GHz

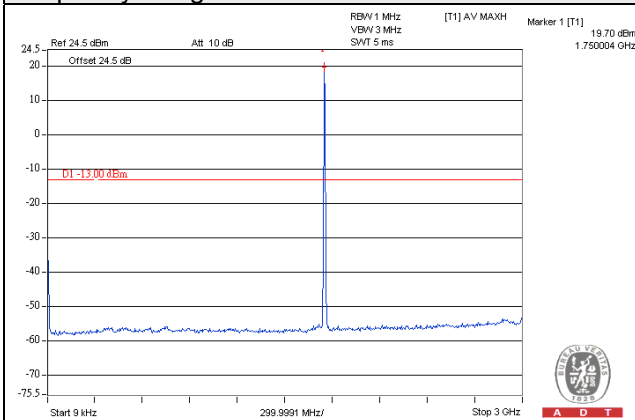

Frequency Range : 3GHz~10GHz

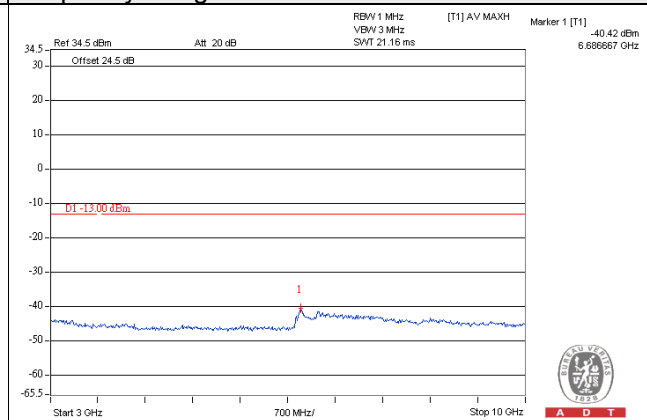


Frequency Range : 10GHz~20GHz

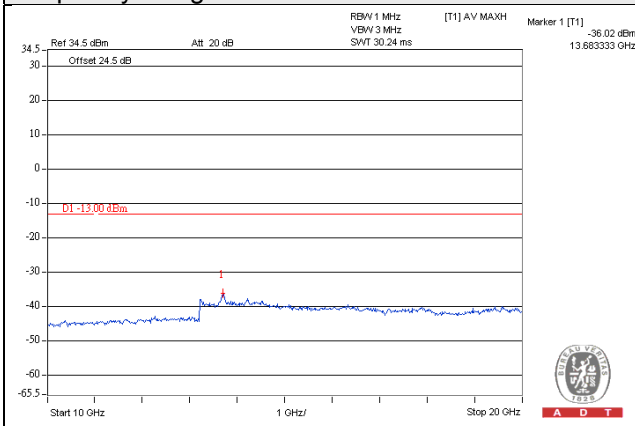


Channel Bandwidth: 5MHz

Channel 19975


Frequency Range : 9kHz~3GHz

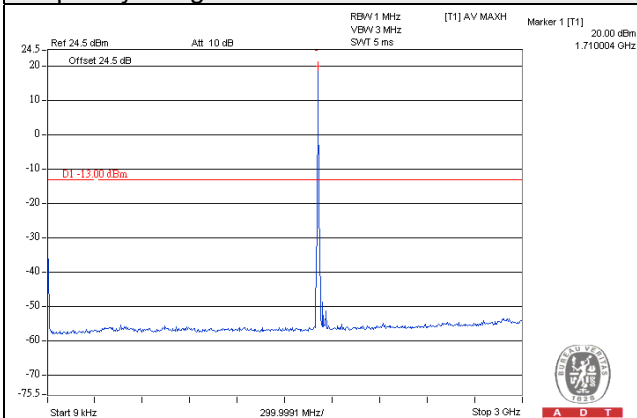

Frequency Range : 3GHz~10GHz

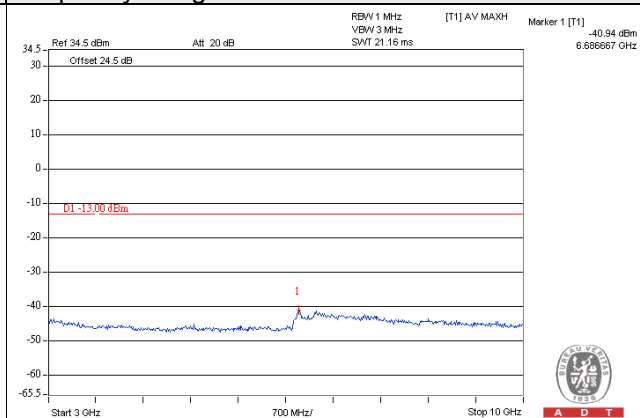


Frequency Range : 10GHz~20GHz

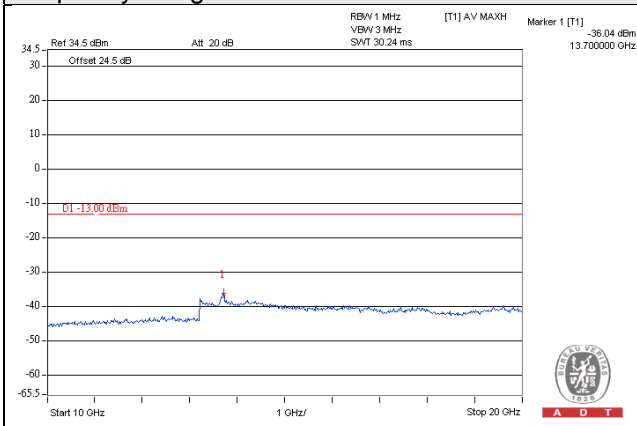


Channel Bandwidth: 5MHz

Channel 20175


Frequency Range : 9kHz~3GHz

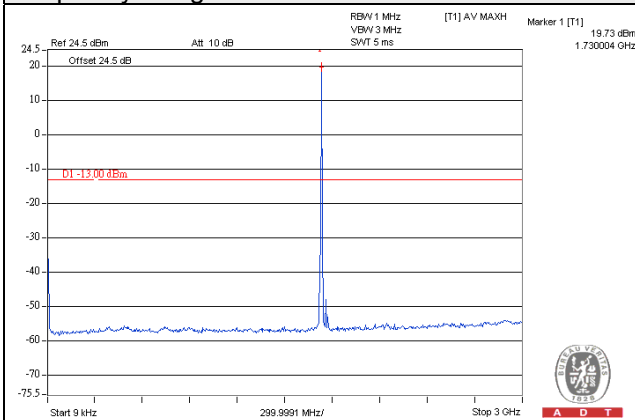

Frequency Range : 3GHz~10GHz

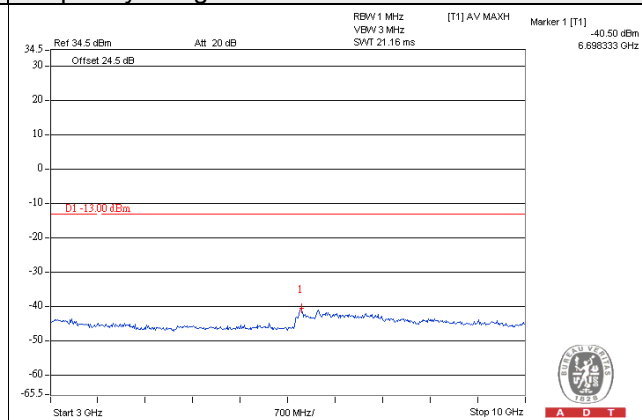


Frequency Range : 10GHz~20GHz

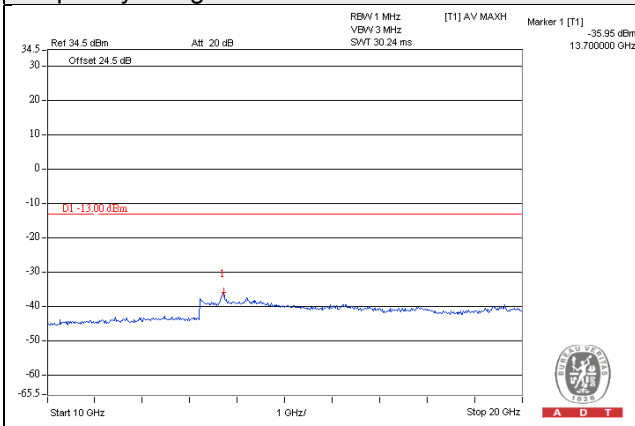


Channel Bandwidth: 5MHz

Channel 20375


Frequency Range : 9kHz~3GHz

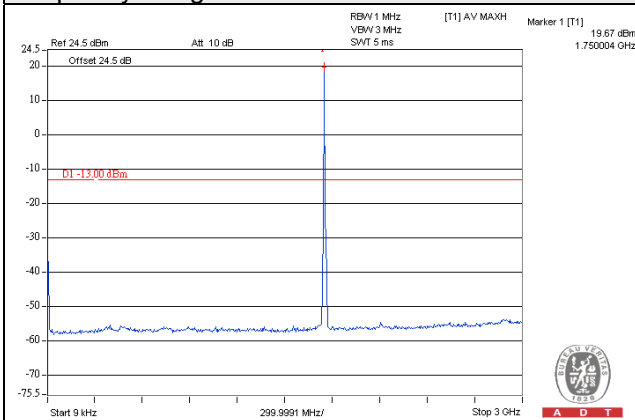

Frequency Range : 3GHz~10GHz

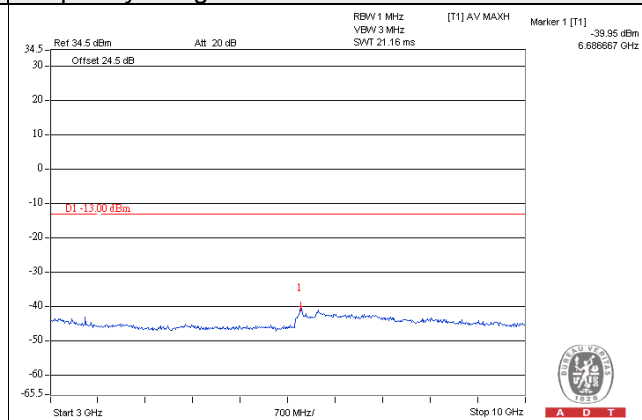


Frequency Range : 10GHz~20GHz

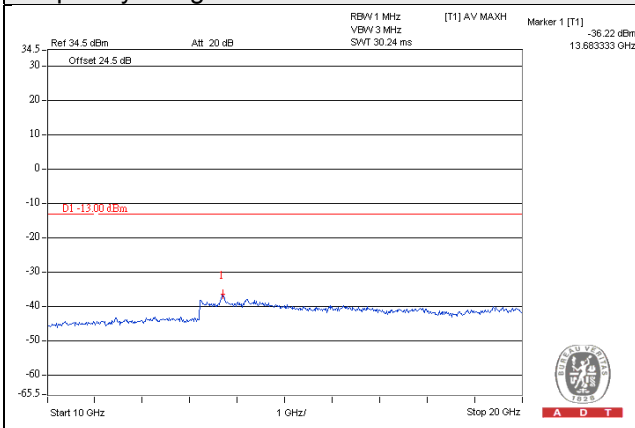


Channel Bandwidth: 10MHz

Channel 20000


Frequency Range : 9kHz~3GHz

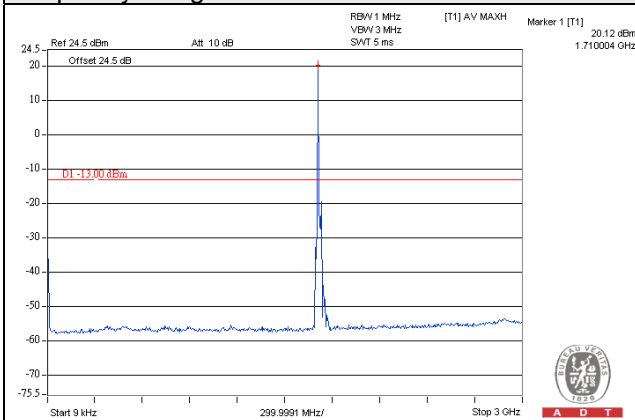

Frequency Range : 3GHz~10GHz

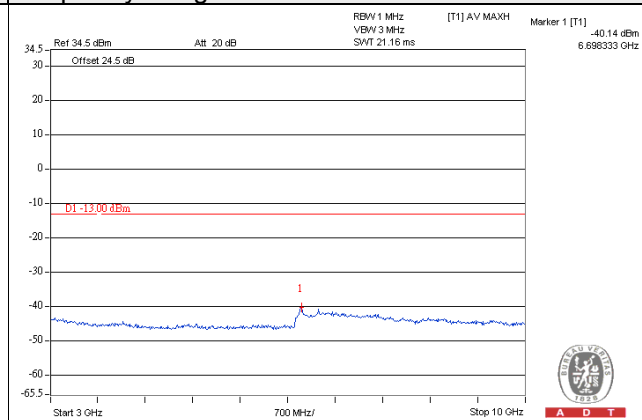


Frequency Range : 10GHz~20GHz

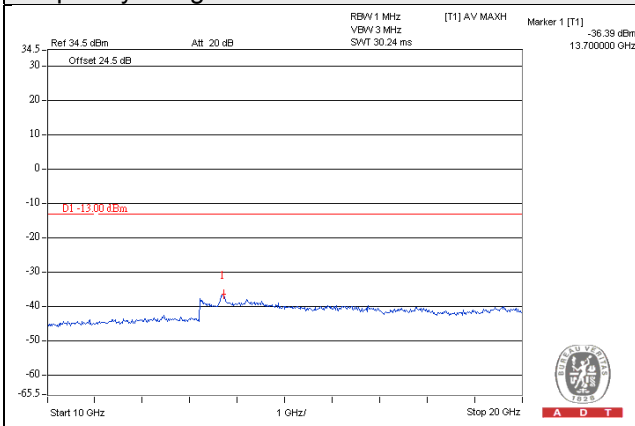


Channel Bandwidth: 10MHz

Channel 20175



Frequency Range : 9kHz~3GHz

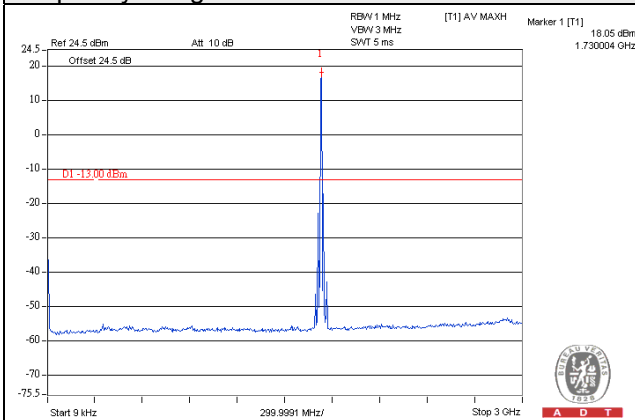

Frequency Range : 3GHz~10GHz

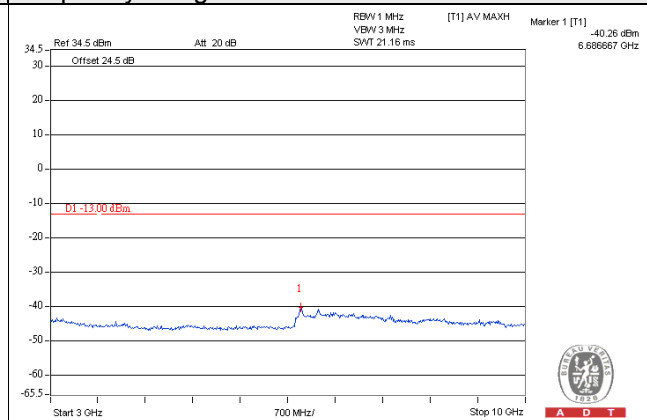


Frequency Range : 10GHz~20GHz

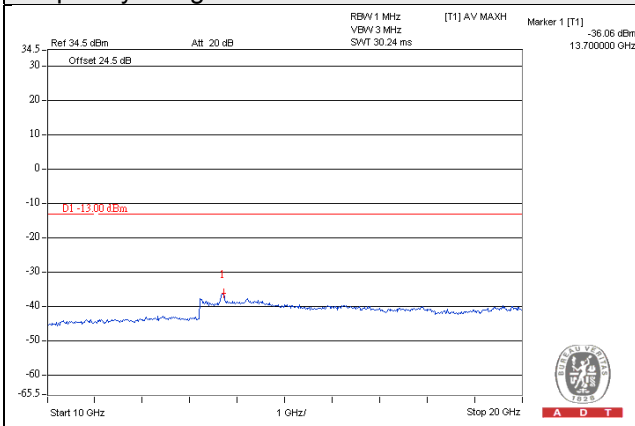


Channel Bandwidth: 10MHz

Channel 20350


Frequency Range : 9kHz~3GHz

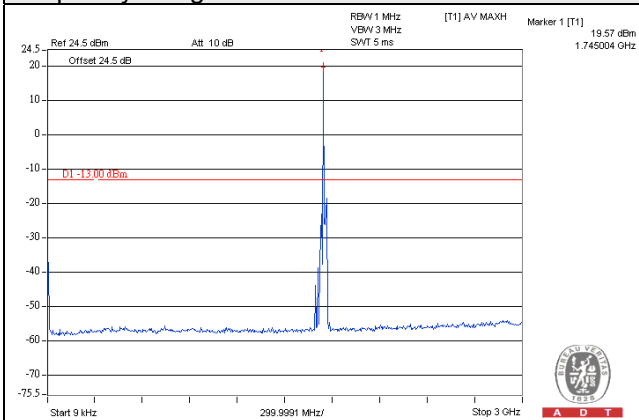

Frequency Range : 3GHz~10GHz

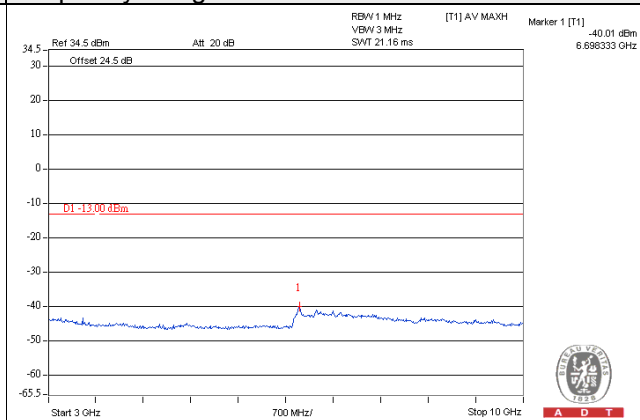


Frequency Range : 10GHz~20GHz

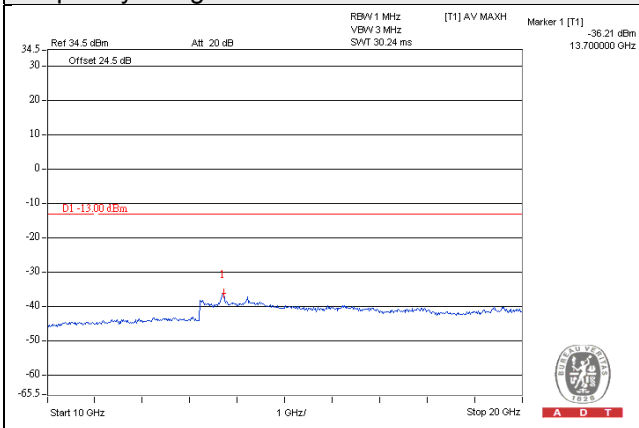


Channel Bandwidth: 15MHz

Channel 20025


Frequency Range : 9kHz~3GHz

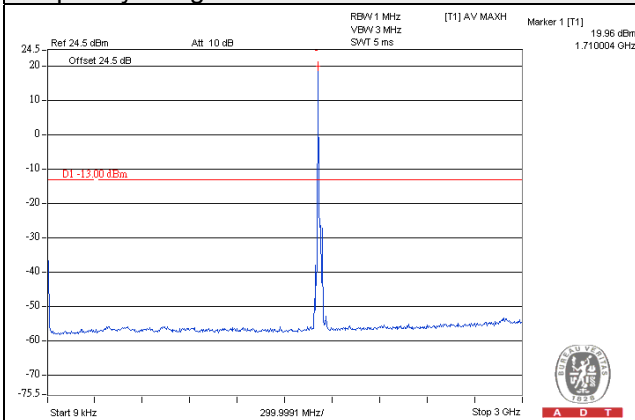

Frequency Range : 3GHz~10GHz

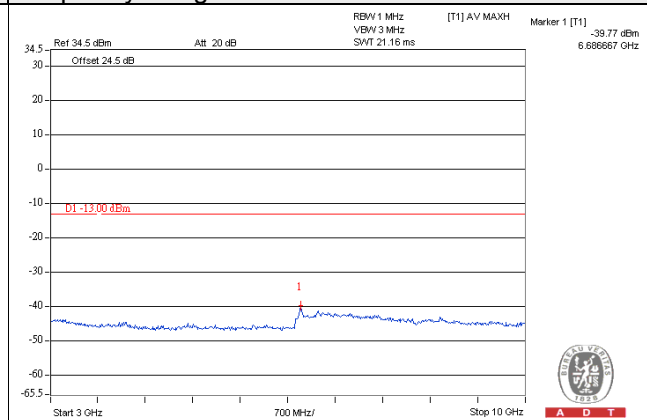


Frequency Range : 10GHz~20GHz

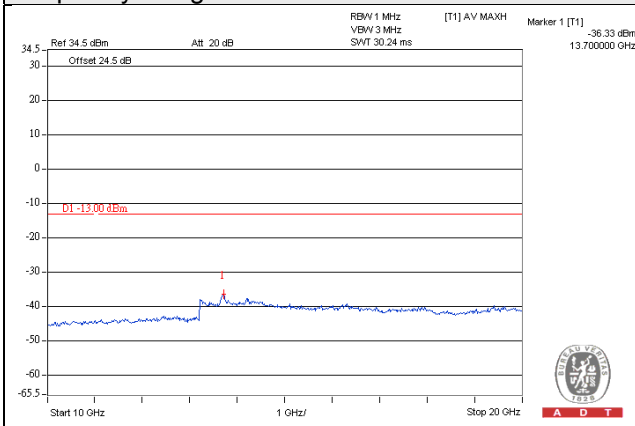


Channel Bandwidth: 15MHz

Channel 20175


Frequency Range : 9kHz~3GHz

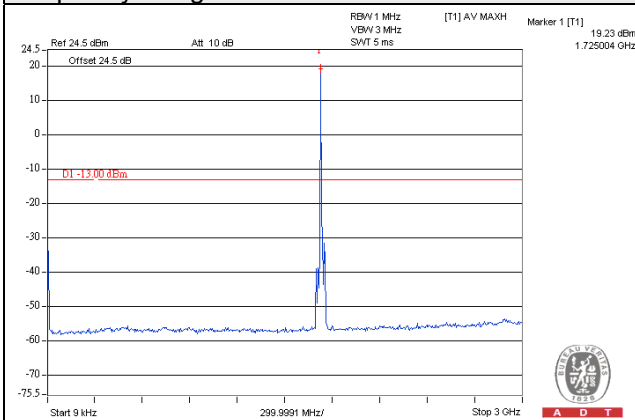

Frequency Range : 3GHz~10GHz

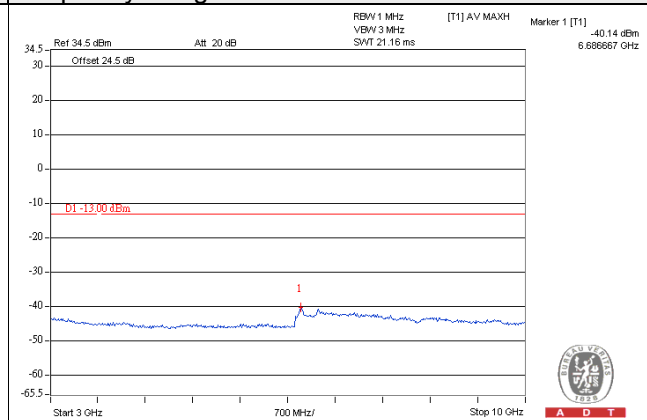


Frequency Range : 10GHz~20GHz

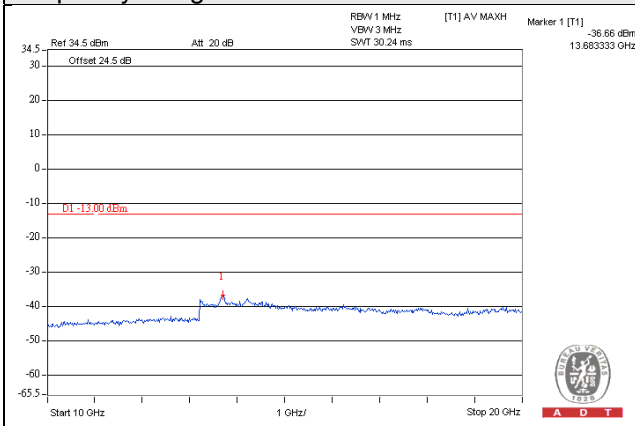


Channel Bandwidth: 15MHz

Channel 20325


Frequency Range : 9kHz~3GHz

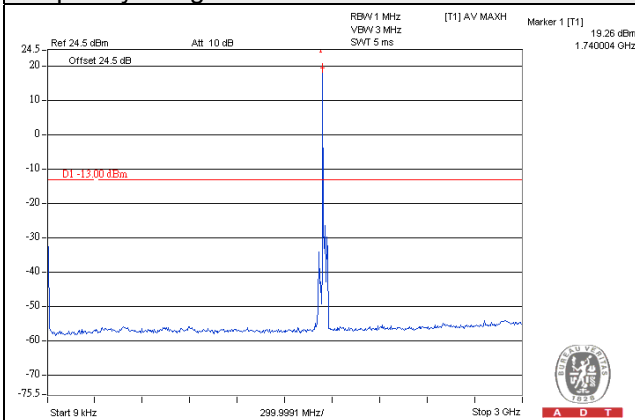

Frequency Range : 3GHz~10GHz

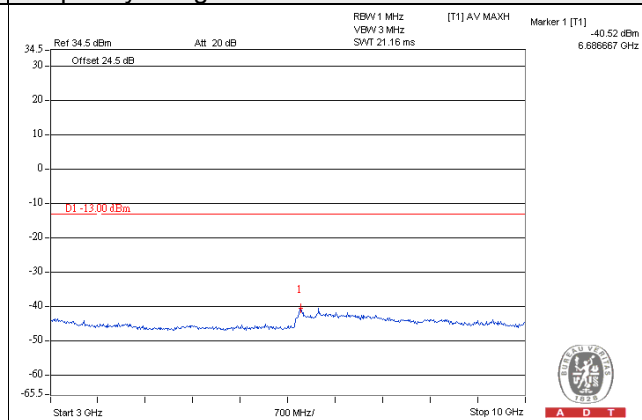


Frequency Range : 10GHz~20GHz

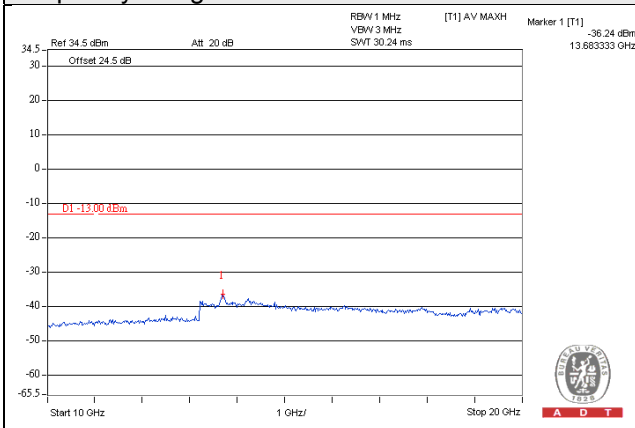


Channel Bandwidth: 20MHz

Channel 20050


Frequency Range : 9kHz~3GHz

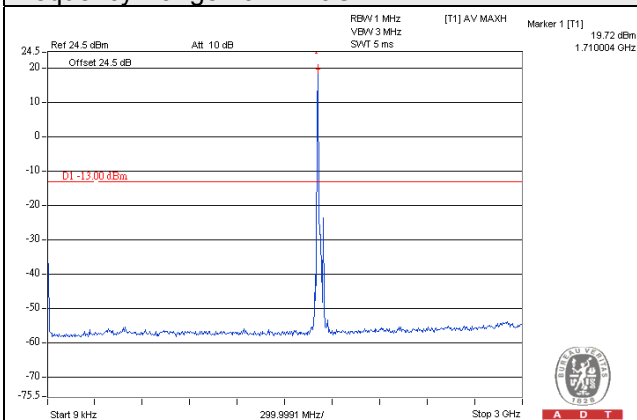

Frequency Range : 3GHz~10GHz

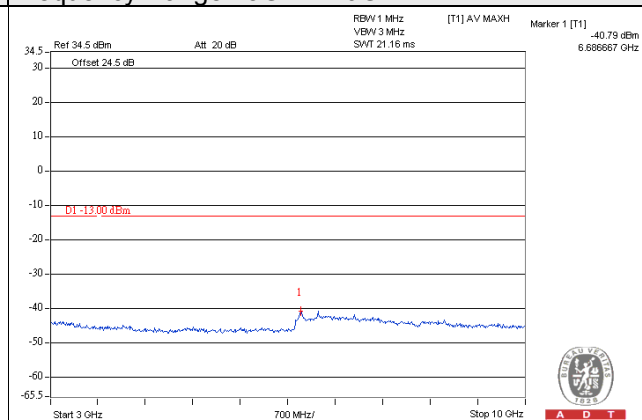


Frequency Range : 10GHz~20GHz

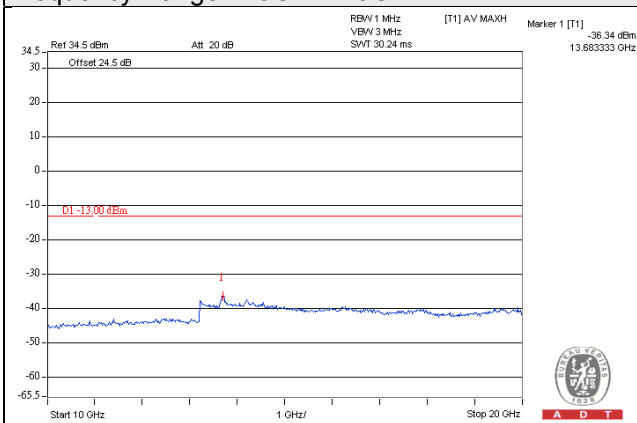


Channel Bandwidth: 20MHz

Channel 20175


Frequency Range : 9kHz~3GHz

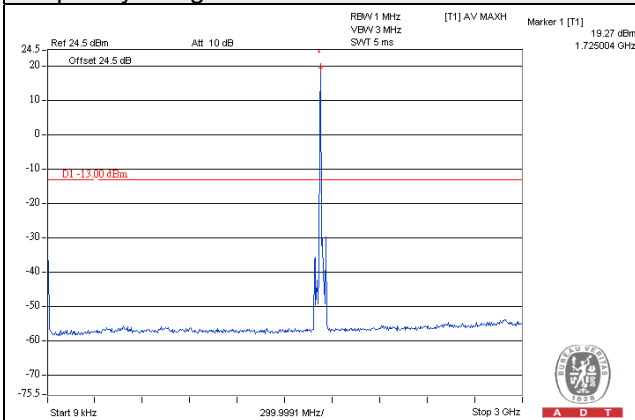

Frequency Range : 3GHz~10GHz

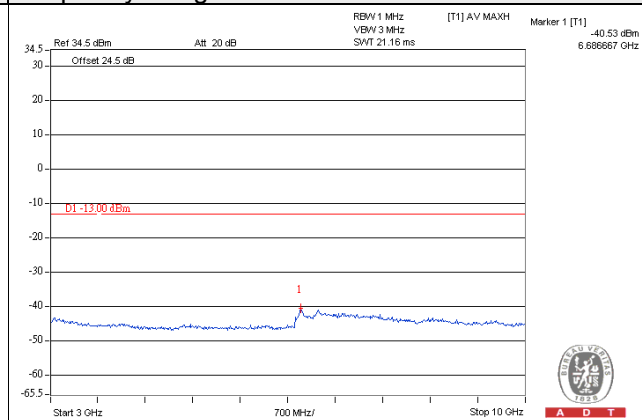


Frequency Range : 10GHz~20GHz

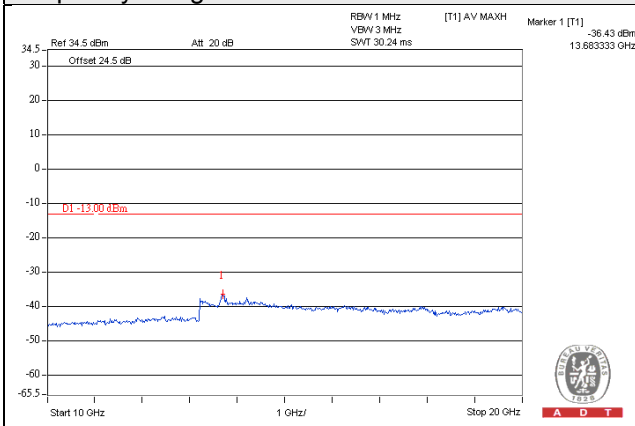


Channel Bandwidth: 20MHz

Channel 20300


Frequency Range : 9kHz~3GHz

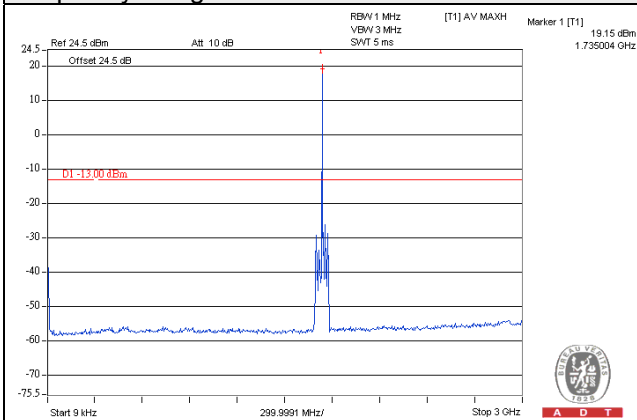

Frequency Range : 3GHz~10GHz

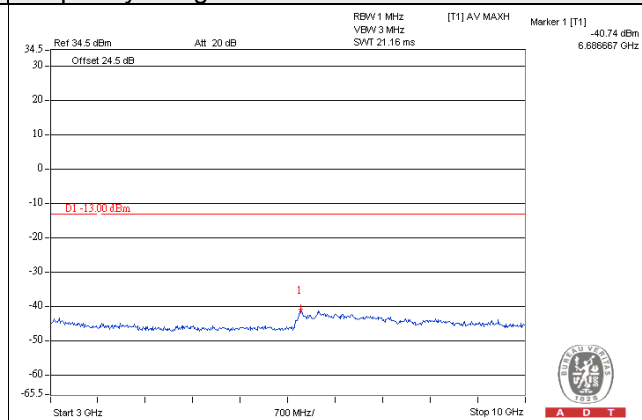

Frequency Range : 10GHz~20GHz

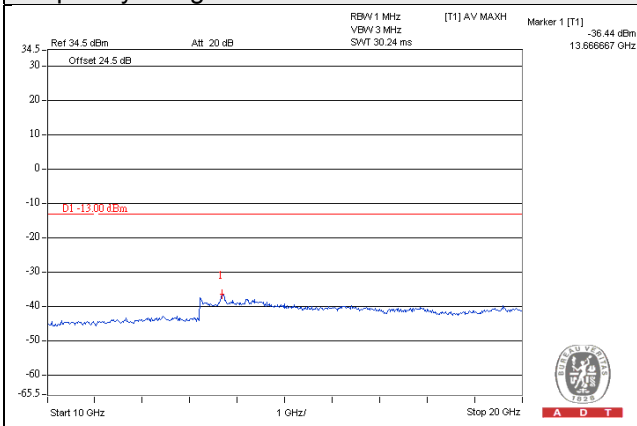


LTE Band 13


Channel Bandwidth: 5MHz

Channel 23205


Frequency Range : 9kHz~1GHz

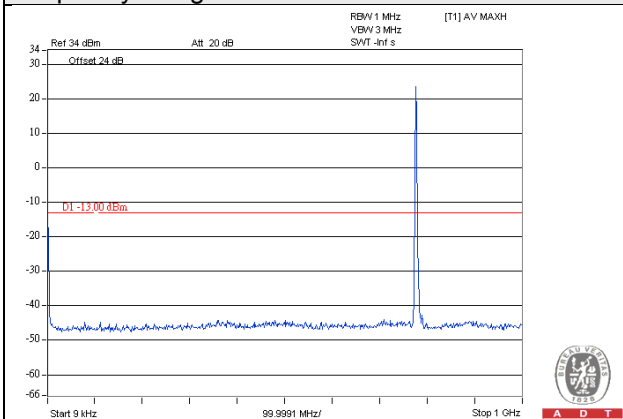


Frequency Range : 1GHz~4GHz

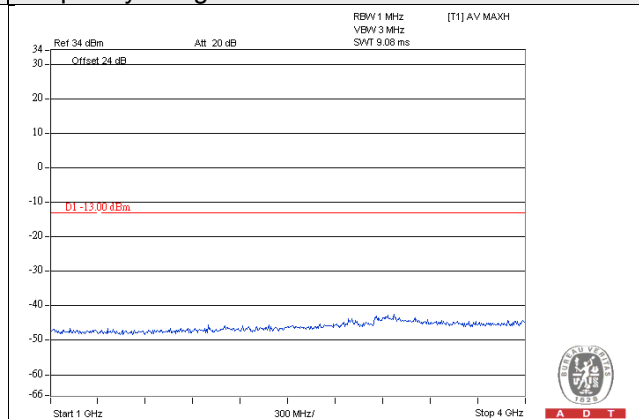

Frequency Range : 4GHz~7GHz

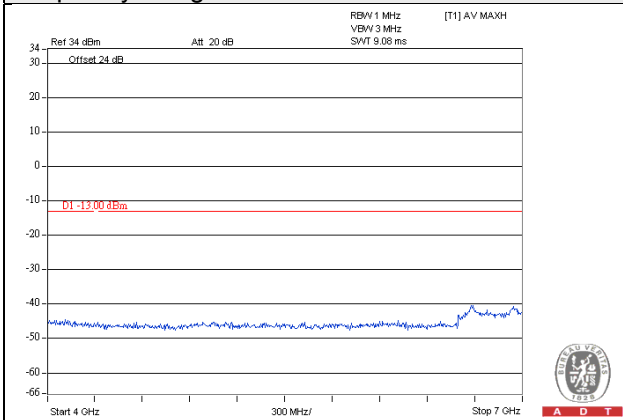


Frequency Range : 7GHz~9GHz

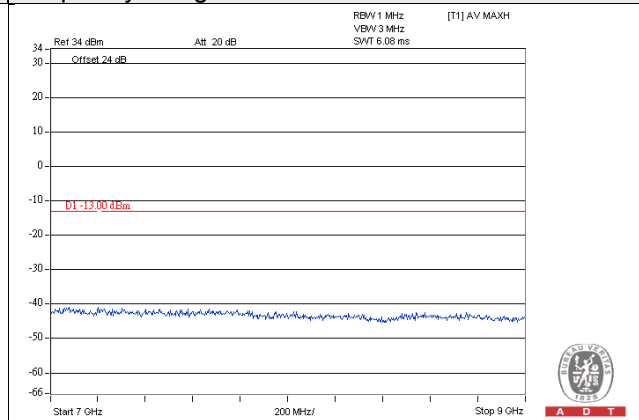

Channel Bandwidth: 5MHz


Channel 23230

Frequency Range : 9kHz~1GHz

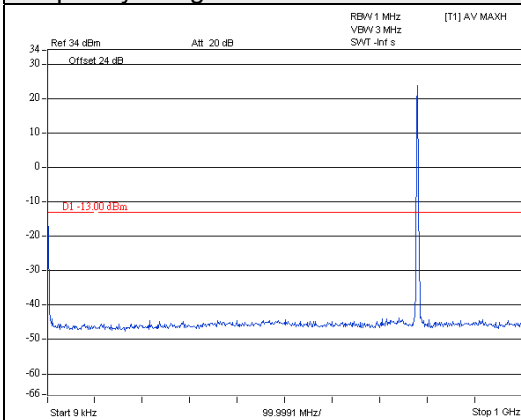


A D T

Frequency Range : 1GHz~4GHz

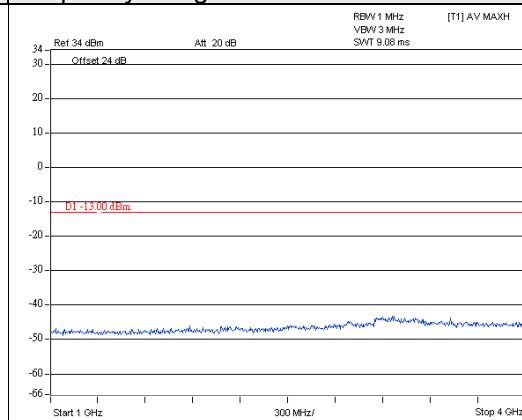


A D T

Frequency Range : 4GHz~7GHz

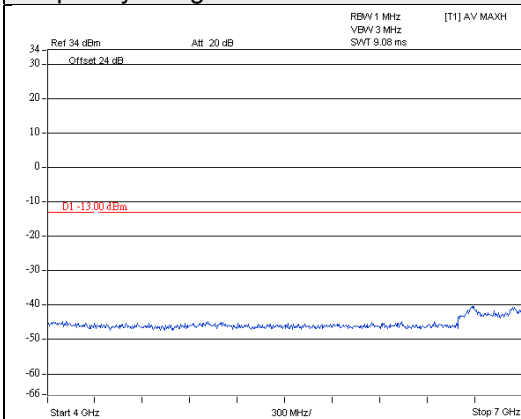

A D T

Frequency Range : 7GHz~9GHz

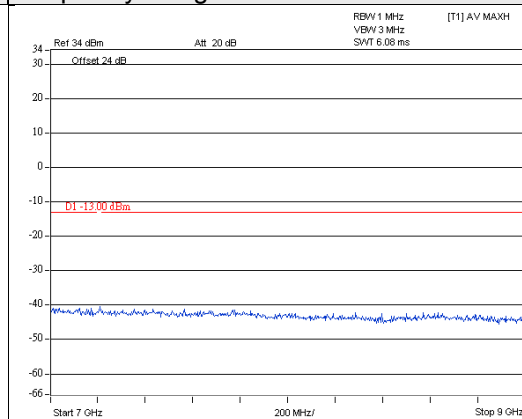


A D T


Channel Bandwidth: 5MHz

Channel 23255


Frequency Range : 9kHz~1GHz

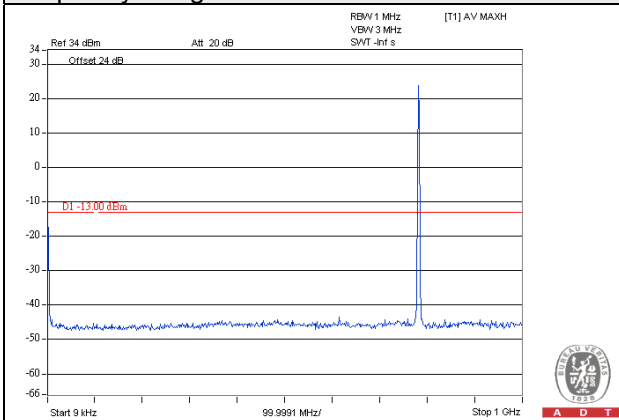


Frequency Range : 1GHz~4GHz

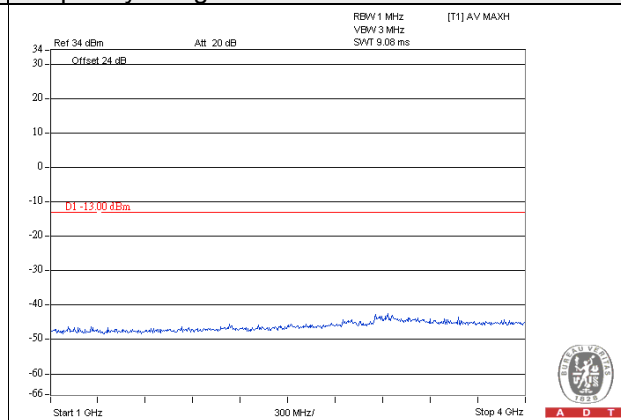

Frequency Range : 4GHz~7GHz

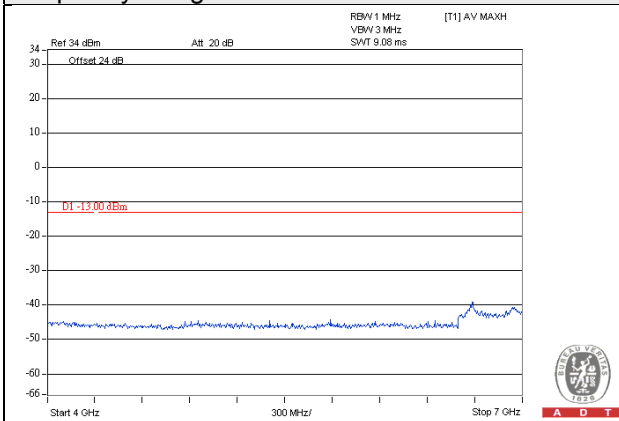


Frequency Range : 7GHz~9GHz

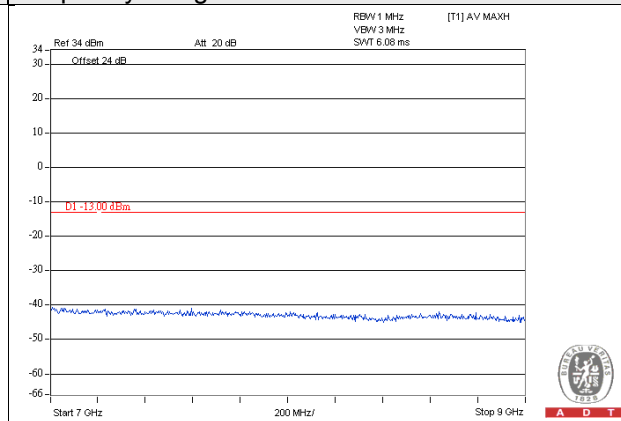


Channel Bandwidth: 10MHz

Channel 23230


Frequency Range : 9kHz~1GHz

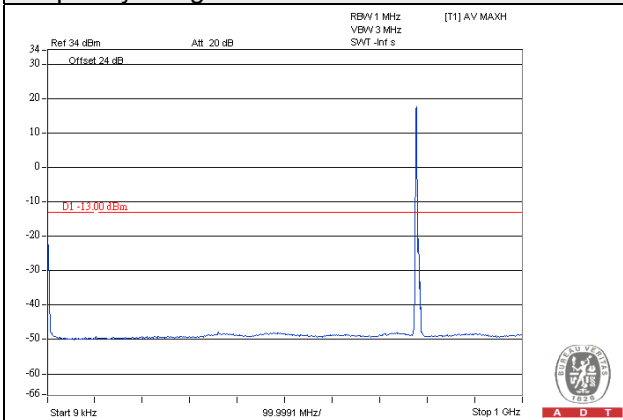


Frequency Range : 1GHz~4GHz

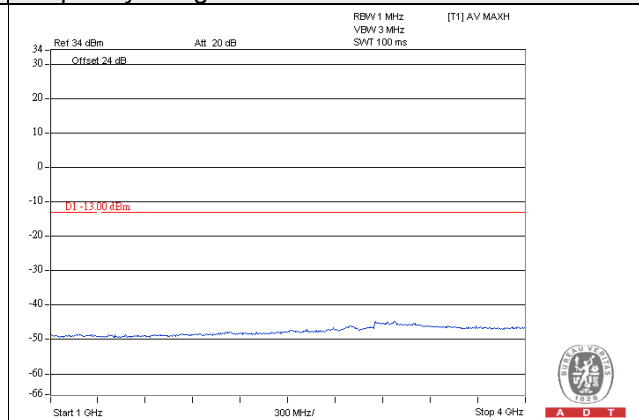

Frequency Range : 4GHz~7GHz

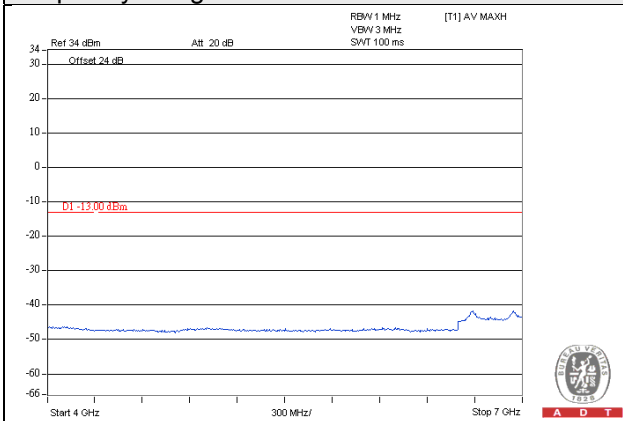

Frequency Range : 7GHz~9GHz

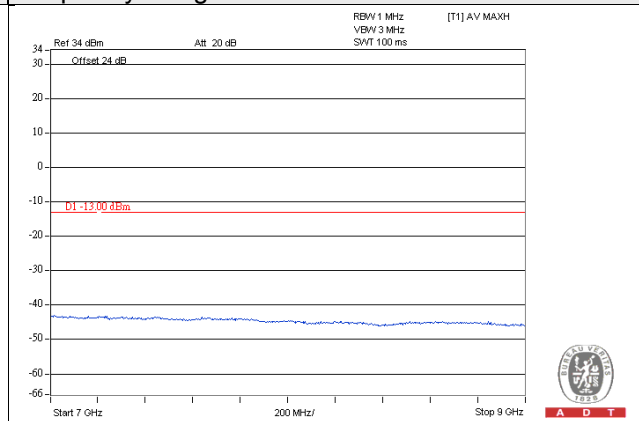


LTE Band 17


Channel Bandwidth: 5MHz

Channel 23775


Frequency Range : 9kHz~1GHz

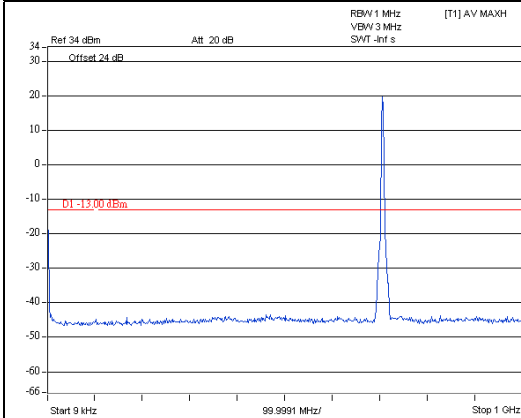


Frequency Range : 1GHz~4GHz

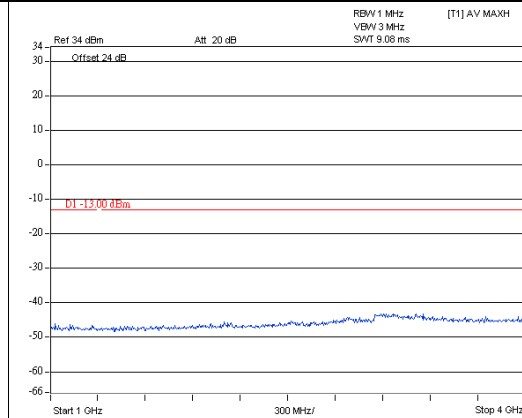

Frequency Range : 4GHz~7GHz

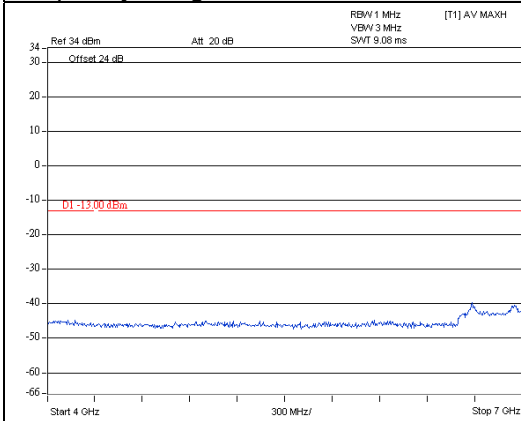


Frequency Range : 7GHz~9GHz

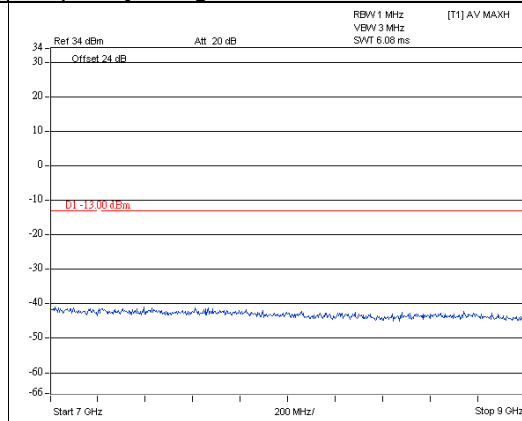


Channel Bandwidth: 5MHz

Channel 23790


Frequency Range : 9kHz~1GHz

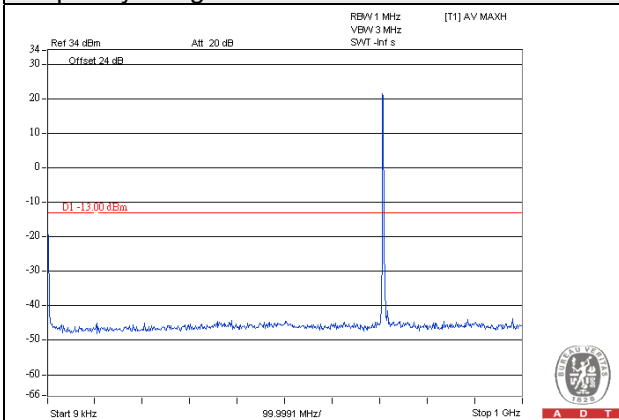


Frequency Range : 1GHz~4GHz

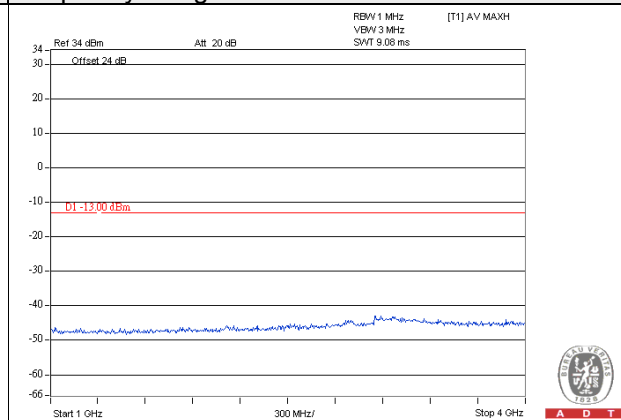

Frequency Range : 4GHz~7GHz

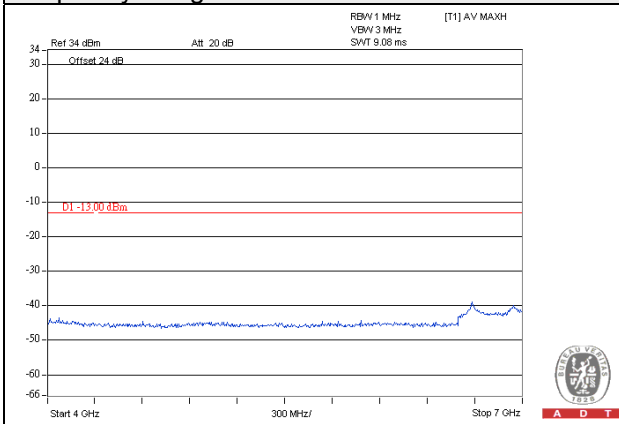


Frequency Range : 7GHz~9GHz

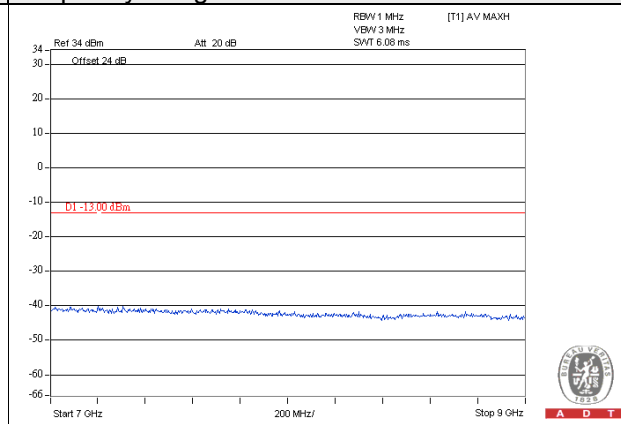


Channel Bandwidth: 5MHz

Channel 23825


Frequency Range : 9kHz~1GHz

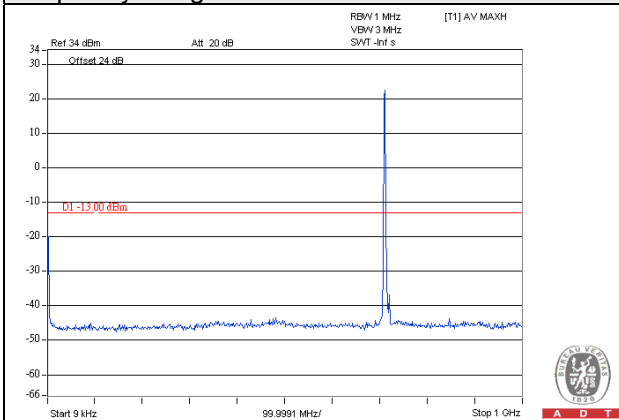


Frequency Range : 1GHz~4GHz

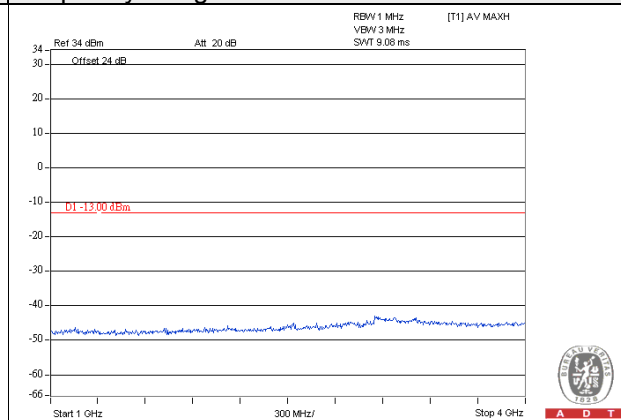

Frequency Range : 4GHz~7GHz

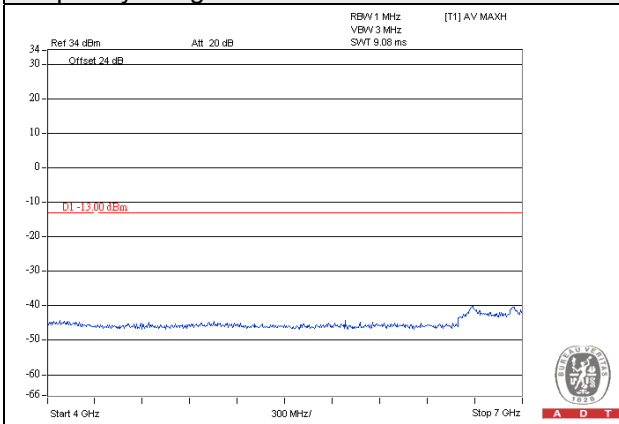


Frequency Range : 7GHz~9GHz

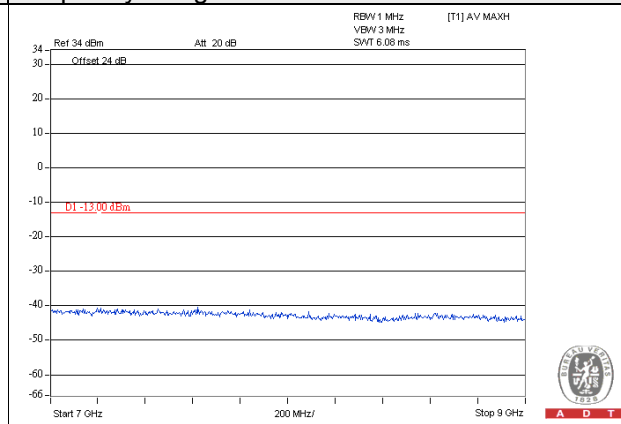


Channel Bandwidth: 10MHz

Channel 23780


Frequency Range : 9kHz~1GHz

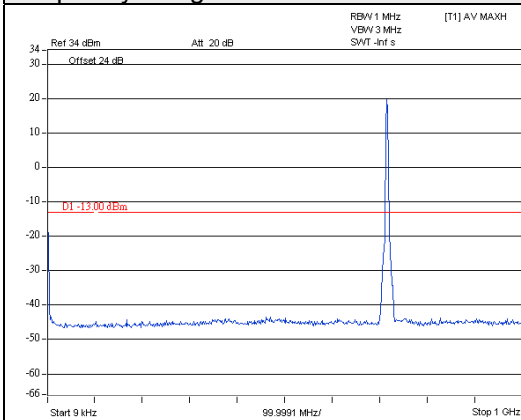


Frequency Range : 1GHz~4GHz

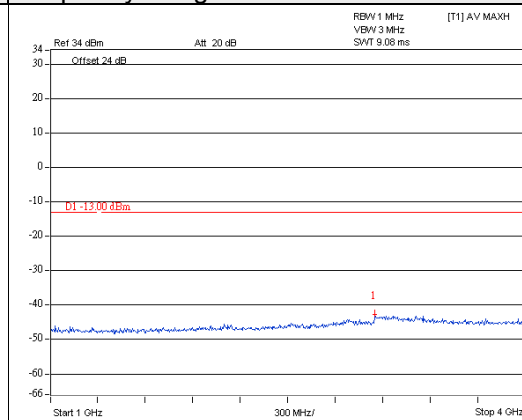

Frequency Range : 4GHz~7GHz

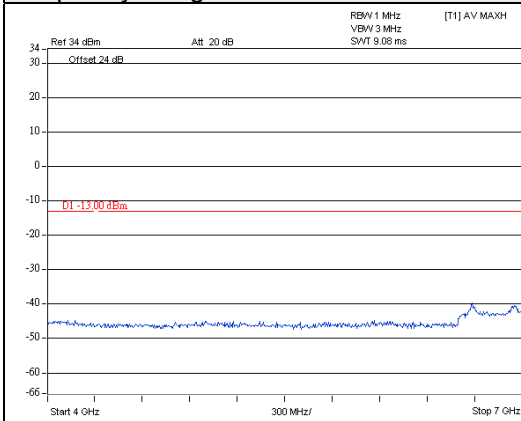


Frequency Range : 7GHz~9GHz

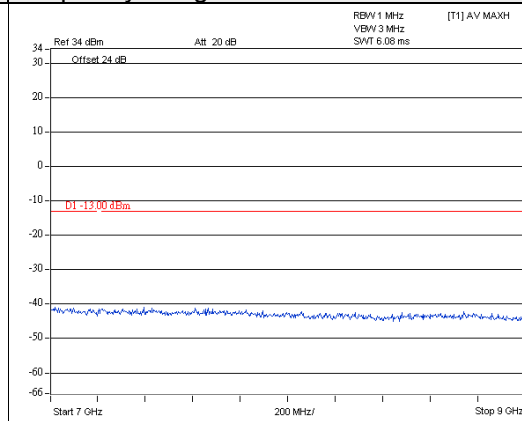


Channel Bandwidth: 10MHz

Channel 23790


Frequency Range : 9kHz~1GHz

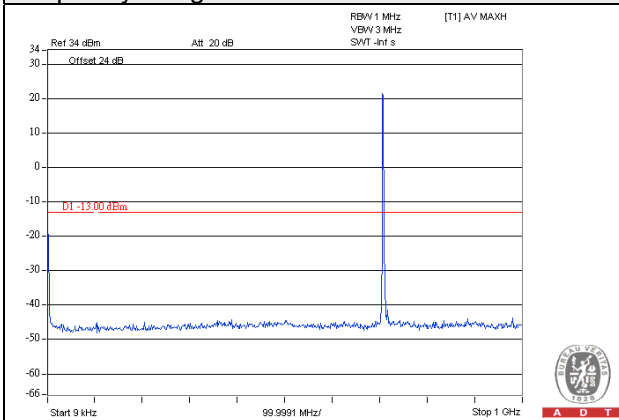


Frequency Range : 1GHz~4GHz

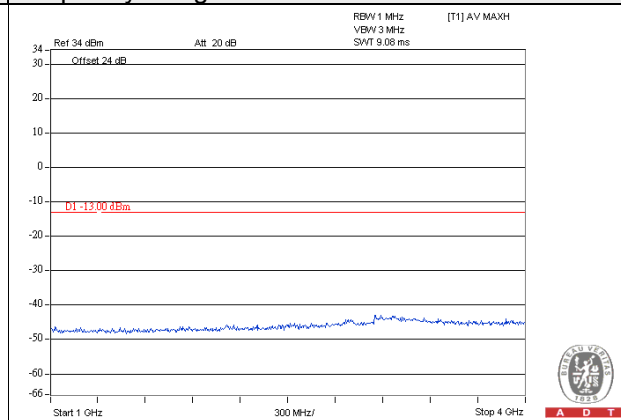

Frequency Range : 4GHz~7GHz

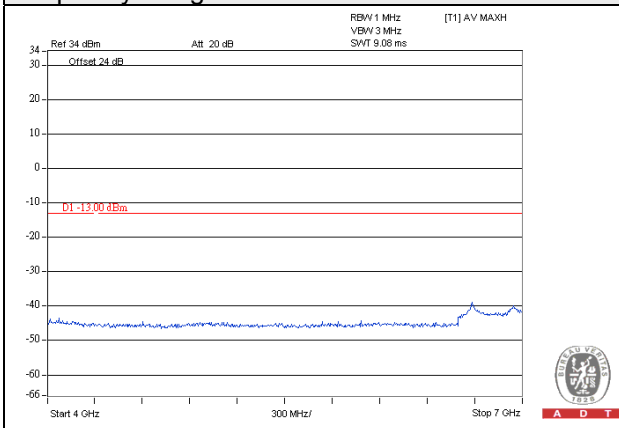


Frequency Range : 7GHz~9GHz

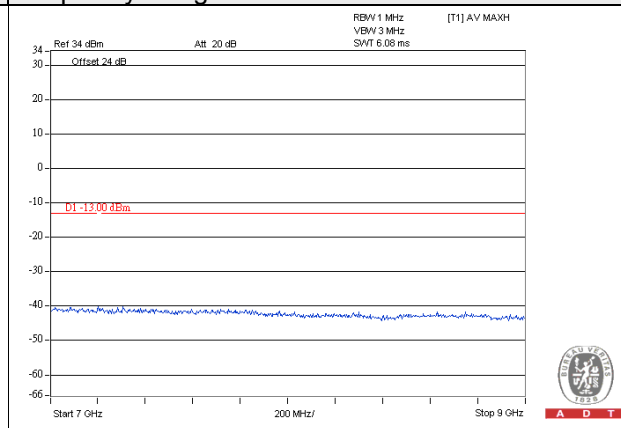


Channel Bandwidth: 10MHz

Channel 23800


Frequency Range : 9kHz~1GHz

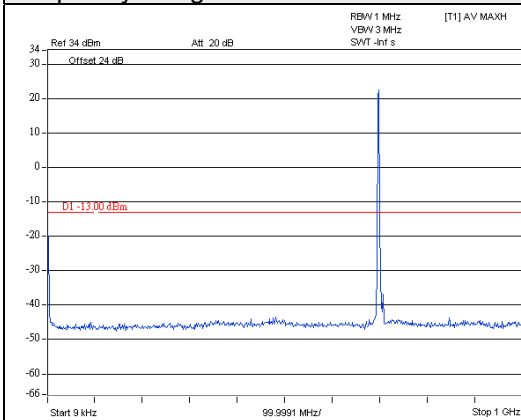


Frequency Range : 1GHz~4GHz

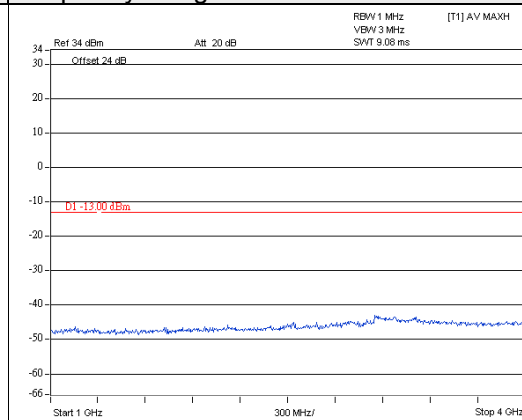

Frequency Range : 4GHz~7GHz

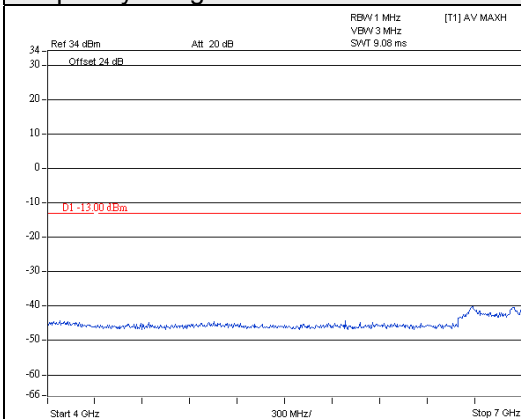

Frequency Range : 7GHz~9GHz

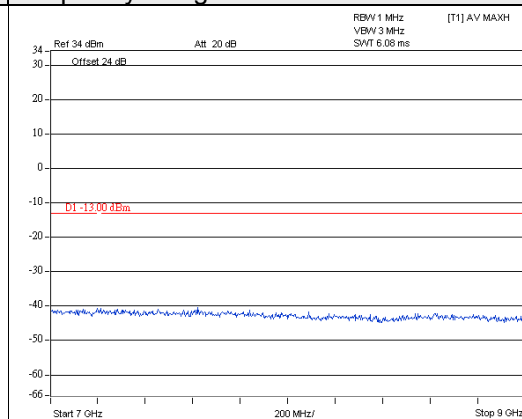

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

For LTE Band 4

According to FCC 27.53(h) for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

For LTE Band 13

According to FCC 27.53(c) (2) for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.

For LTE Band 17

According to FCC 27.53(g) for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

4.7.2 Test Procedure


- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna}$.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.3 Deviation from Test Standard

No deviation.

4.7.4 Test Setup

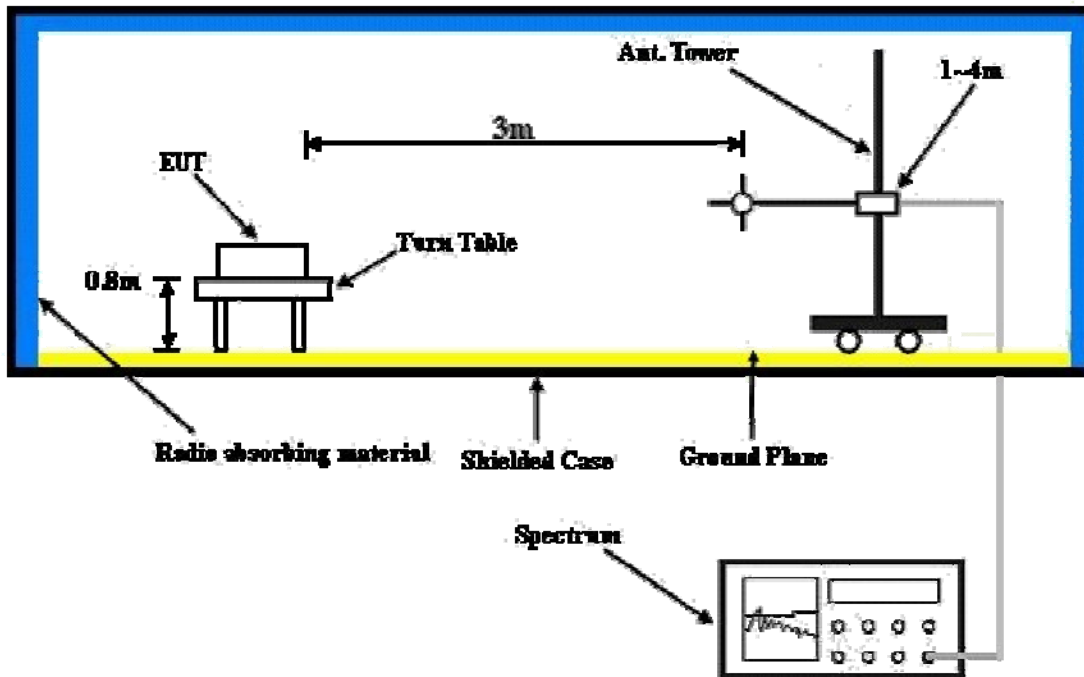

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results

Below 1GHz

LTE Band 4

Channel Bandwidth: 1.4MHz

Mode	TX channel 19957	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-38.90	-15.50	-19.40	-34.90	-13.00	-21.90
2	74.62	-53.00	-58.90	0.10	-58.80	-13.00	-45.80
3	295.78	-58.00	-59.10	-1.80	-60.90	-13.00	-47.90
4	429.64	-63.30	-67.30	3.50	-63.80	-13.00	-50.80
5	695.42	-59.00	-59.70	3.40	-56.30	-13.00	-43.30
6	786.60	-60.60	-59.40	4.00	-55.40	-13.00	-42.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-34.20	-24.70	-19.40	-44.10	-13.00	-31.10
2	105.66	-51.80	-58.10	-2.20	-60.30	-13.00	-47.30
3	297.72	-55.20	-53.80	-1.70	-55.50	-13.00	-42.50
4	363.68	-58.10	-62.30	3.90	-58.40	-13.00	-45.40
5	716.76	-53.70	-51.30	3.50	-47.80	-13.00	-34.80
6	778.84	-63.90	-60.70	4.00	-56.70	-13.00	-43.70

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 3MHz

Mode	TX channel 19965	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-47.10	-25.40	-18.30	-43.70	-13.00	-30.70
2	76.56	-53.60	-59.50	0.30	-59.20	-13.00	-46.20
3	295.78	-57.70	-58.80	-1.80	-60.60	-13.00	-47.60
4	495.60	-64.00	-68.00	3.80	-64.20	-13.00	-51.20
5	695.42	-58.00	-58.70	3.40	-55.30	-13.00	-42.30
6	782.72	-61.00	-59.90	4.00	-55.90	-13.00	-42.90

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-41.20	-33.40	-18.30	-51.70	-13.00	-38.70
2	107.60	-51.80	-57.80	-2.30	-60.10	-13.00	-47.10
3	194.90	-59.90	-58.40	-2.60	-61.00	-13.00	-48.00
4	297.72	-54.90	-53.50	-1.70	-55.20	-13.00	-42.20
5	429.64	-61.80	-65.70	3.50	-62.20	-13.00	-49.20
6	802.12	-63.60	-60.80	4.00	-56.80	-13.00	-43.80

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 5MHz

Mode	TX channel 19975	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-46.50	-24.80	-18.30	-43.10	-13.00	-30.10
2	74.62	-53.80	-59.70	0.10	-59.60	-13.00	-46.60
3	297.72	-57.90	-58.90	-1.70	-60.60	-13.00	-47.60
4	695.42	-58.70	-59.40	3.40	-56.00	-13.00	-43.00
5	730.34	-57.90	-57.70	3.60	-54.10	-13.00	-41.10
6	780.78	-61.70	-60.60	4.00	-56.60	-13.00	-43.60

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-34.40	-26.60	-18.30	-44.90	-13.00	-31.90
2	107.60	-52.10	-58.10	-2.30	-60.40	-13.00	-47.40
3	194.90	-59.00	-57.50	-2.60	-60.10	-13.00	-47.10
4	297.72	-54.20	-52.80	-1.70	-54.50	-13.00	-41.50
5	705.12	-65.10	-62.60	3.50	-59.10	-13.00	-46.10
6	800.18	-63.40	-60.70	4.00	-56.70	-13.00	-43.70

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 10MHz

Mode	TX channel 20000	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-42.10	-20.40	-18.30	-38.70	-13.00	-25.70
2	76.56	-54.10	-60.00	0.30	-59.70	-13.00	-46.70
3	97.90	-52.50	-59.80	-1.40	-61.20	-13.00	-48.20
4	297.72	-57.50	-58.50	-1.70	-60.20	-13.00	-47.20
5	722.58	-50.90	-51.10	3.60	-47.50	-13.00	-34.50
6	778.84	-61.20	-60.20	4.00	-56.20	-13.00	-43.20

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-36.30	-28.50	-18.30	-46.80	-13.00	-33.80
2	84.32	-54.20	-59.60	0.40	-59.20	-13.00	-46.20
3	107.60	-51.20	-57.20	-2.30	-59.50	-13.00	-46.50
4	297.72	-53.90	-52.50	-1.70	-54.20	-13.00	-41.20
5	802.12	-62.50	-59.70	4.00	-55.70	-13.00	-42.70
6	870.02	-64.30	-60.20	3.30	-56.90	-13.00	-43.90

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 15MHz

Mode	TX channel 20025	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-45.30	-21.90	-19.40	-41.30	-13.00	-28.30
2	76.56	-54.10	-60.00	0.30	-59.70	-13.00	-46.70
3	297.72	-58.10	-59.10	-1.70	-60.80	-13.00	-47.80
4	495.60	-64.30	-68.30	3.80	-64.50	-13.00	-51.50
5	724.52	-54.60	-54.70	3.60	-51.10	-13.00	-38.10
6	786.60	-61.20	-60.00	4.00	-56.00	-13.00	-43.00

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-33.60	-25.80	-18.30	-44.10	-13.00	-31.10
2	194.90	-58.50	-57.00	-2.60	-59.60	-13.00	-46.60
3	297.72	-54.70	-53.30	-1.70	-55.00	-13.00	-42.00
4	363.68	-59.90	-64.10	3.90	-60.20	-13.00	-47.20
5	714.82	-53.70	-51.20	3.50	-47.70	-13.00	-34.70
6	802.12	-63.80	-61.00	4.00	-57.00	-13.00	-44.00

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 20MHz

Mode	TX channel 20050	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-44.80	-23.10	-18.30	-41.40	-13.00	-28.40
2	76.56	-54.70	-60.60	0.30	-60.30	-13.00	-47.30
3	297.72	-57.70	-58.70	-1.70	-60.40	-13.00	-47.40
4	656.62	-59.40	-60.80	3.60	-57.20	-13.00	-44.20
5	722.58	-52.40	-52.60	3.60	-49.00	-13.00	-36.00
6	871.96	-61.70	-57.70	3.40	-54.30	-13.00	-41.30

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-35.50	-27.70	-18.30	-46.00	-13.00	-33.00
2	84.32	-52.00	-57.40	0.40	-57.00	-13.00	-44.00
3	194.90	-58.50	-57.00	-2.60	-59.60	-13.00	-46.60
4	297.72	-54.00	-52.60	-1.70	-54.30	-13.00	-41.30
5	802.12	-62.50	-59.70	4.00	-55.70	-13.00	-42.70
6	870.02	-63.00	-58.90	3.30	-55.60	-13.00	-42.60

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 13

Channel Bandwidth: 5MHz

Mode	TX channel 23205	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-46.50	-27.00	-18.30	-45.30	-13.00	-32.30
2	97.90	-47.40	-56.90	-1.40	-58.30	-13.00	-45.30
3	142.52	-53.10	-57.40	-3.10	-60.50	-13.00	-47.50
4	303.54	-57.20	-67.60	3.70	-63.90	-13.00	-50.90
5	363.68	-58.20	-66.80	3.90	-62.90	-13.00	-49.90
6	957.32	-70.30	-67.80	3.80	-64.00	-13.00	-51.00

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-40.00	-35.60	-17.10	-52.70	-13.00	-39.70
2	97.90	-45.20	-54.10	-1.40	-55.50	-13.00	-42.50
3	142.52	-54.60	-55.90	-3.10	-59.00	-13.00	-46.00
4	297.72	-55.30	-56.10	-1.70	-57.80	-13.00	-44.80
5	363.68	-54.80	-61.10	3.90	-57.20	-13.00	-44.20
6	802.12	-62.90	-62.30	4.00	-58.30	-13.00	-45.30

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 10MHz

Mode	TX channel 23230	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-46.90	-27.30	-18.30	-45.60	-13.00	-32.60
2	97.90	-47.00	-56.50	-1.40	-57.90	-13.00	-44.90
3	142.52	-52.80	-57.00	-3.10	-60.10	-13.00	-47.10
4	301.60	-58.80	-69.00	3.60	-65.40	-13.00	-52.40
5	363.68	-58.60	-67.10	3.90	-63.20	-13.00	-50.20
6	730.34	-63.50	-65.50	3.60	-61.90	-13.00	-48.90

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-39.50	-35.10	-17.10	-52.20	-13.00	-39.20
2	97.90	-43.10	-52.00	-1.40	-53.40	-13.00	-40.40
3	142.52	-52.60	-53.90	-3.10	-57.00	-13.00	-44.00
4	297.72	-54.60	-55.40	-1.70	-57.10	-13.00	-44.10
5	363.68	-53.80	-60.10	3.90	-56.20	-13.00	-43.20
6	802.12	-63.40	-62.80	4.00	-58.80	-13.00	-45.80

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 17

Channel Bandwidth: 5MHz

Mode	TX channel 23755	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-38.50	-17.20	-19.40	-36.60	-13.00	-23.60
2	97.90	-47.60	-57.10	-1.40	-58.50	-13.00	-45.50
3	142.52	-52.20	-56.50	-3.10	-59.60	-13.00	-46.60
4	301.60	-59.60	-69.80	3.60	-66.20	-13.00	-53.20
5	363.68	-57.90	-66.40	3.90	-62.50	-13.00	-49.50
6	745.86	-66.40	-68.40	3.80	-64.60	-13.00	-51.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-40.30	-33.00	-19.40	-52.40	-13.00	-39.40
2	97.90	-44.20	-53.10	-1.40	-54.50	-13.00	-41.50
3	142.52	-54.10	-55.40	-3.10	-58.50	-13.00	-45.50
4	297.72	-56.30	-57.10	-1.70	-58.80	-13.00	-45.80
5	363.68	-56.50	-62.90	3.90	-59.00	-13.00	-46.00
6	802.12	-63.00	-62.40	4.00	-58.40	-13.00	-45.40

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 10MHz

Mode	TX channel 23780	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-48.80	-27.50	-19.40	-46.90	-13.00	-33.90
2	97.90	-47.90	-57.30	-1.40	-58.70	-13.00	-45.70
3	142.52	-53.90	-58.20	-3.10	-61.30	-13.00	-48.30
4	297.72	-61.90	-65.10	-1.70	-66.80	-13.00	-53.80
5	363.68	-57.60	-66.10	3.90	-62.20	-13.00	-49.20
6	714.82	-56.80	-59.10	3.50	-55.60	-13.00	-42.60

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-39.50	-35.10	-17.10	-52.20	-13.00	-39.20
2	97.90	-44.90	-53.70	-1.40	-55.10	-13.00	-42.10
3	142.52	-54.50	-55.80	-3.10	-58.90	-13.00	-45.90
4	297.72	-55.80	-56.60	-1.70	-58.30	-13.00	-45.30
5	363.68	-55.30	-61.70	3.90	-57.80	-13.00	-44.80
6	802.12	-63.80	-63.10	4.00	-59.10	-13.00	-46.10

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Above 1GHz

Channel Bandwidth: 1.4MHz

Mode	TX channel 19957	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3421.40	-49.50	-40.90	1.30	-39.60	-13.00	-26.60
2	5132.10	-48.30	-36.10	1.40	-34.70	-13.00	-21.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3421.40	-48.20	-40.10	1.30	-38.80	-13.00	-25.80
2	5132.10	-49.80	-38.00	1.40	-36.60	-13.00	-23.60

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20175	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-50.80	-42.40	1.40	-41.00	-13.00	-28.00
2	5197.50	-47.00	-35.40	1.40	-34.00	-13.00	-21.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-49.60	-41.80	1.40	-40.40	-13.00	-27.40
2	5197.50	-50.20	-38.00	1.40	-36.60	-13.00	-23.60

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20393	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3508.60	-47.50	-39.20	1.40	-37.80	-13.00	-24.80
2	5262.90	-45.80	-34.00	1.50	-32.50	-13.00	-19.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3508.60	-45.70	-38.00	1.40	-36.60	-13.00	-23.60
2	5262.90	-47.90	-36.30	1.50	-34.80	-13.00	-21.80

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 3MHz

Mode	TX channel 19965	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3423.00	-48.60	-40.00	1.30	-38.70	-13.00	-25.70
2	5134.50	-47.00	-34.80	1.40	-33.40	-13.00	-20.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3423.00	-47.40	-39.30	1.30	-38.00	-13.00	-25.00
2	5134.50	-49.40	-37.60	1.40	-36.20	-13.00	-23.20

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20175	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-51.60	-43.20	1.40	-41.80	-13.00	-28.80
2	5197.50	-46.20	-34.60	1.40	-33.20	-13.00	-20.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-50.80	-43.00	1.40	-41.60	-13.00	-28.60
2	5197.50	-49.80	-37.60	1.40	-36.20	-13.00	-23.20

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20385	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3507.00	-46.30	-38.00	1.40	-36.60	-13.00	-23.60
2	5260.50	-45.90	-34.10	1.50	-32.60	-13.00	-19.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3507.00	-44.90	-37.20	1.40	-35.80	-13.00	-22.80
2	5260.50	-48.00	-36.40	1.50	-34.90	-13.00	-21.90

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 5MHz

Mode	TX channel 19975	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3425.00	-48.80	-40.20	1.30	-38.90	-13.00	-25.90
2	5137.50	-47.60	-35.40	1.40	-34.00	-13.00	-21.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3425.00	-47.40	-39.30	1.30	-38.00	-13.00	-25.00
2	5137.50	-49.60	-37.70	1.40	-36.30	-13.00	-23.30

Remarks:

- Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20175	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-50.20	-41.80	1.40	-40.40	-13.00	-27.40
2	5197.50	-45.50	-33.90	1.40	-32.50	-13.00	-19.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-49.10	-41.30	1.40	-39.90	-13.00	-26.90
2	5197.50	-50.00	-37.80	1.40	-36.40	-13.00	-23.40

Remarks:

- Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20375	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3505.00	-46.40	-38.20	1.50	-36.70	-13.00	-23.70
2	5257.50	-46.00	-34.20	1.50	-32.70	-13.00	-19.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3505.00	-44.90	-37.30	1.50	-35.80	-13.00	-22.80
2	5257.50	-48.10	-36.50	1.50	-35.00	-13.00	-22.00

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 10MHz

Mode	TX channel 20000	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3430.00	-48.20	-39.70	1.40	-38.30	-13.00	-25.30
2	5145.00	-50.50	-38.40	1.40	-37.00	-13.00	-24.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3430.00	-50.00	-42.00	1.40	-40.60	-13.00	-27.60
2	5145.00	-49.10	-37.20	1.40	-35.80	-13.00	-22.80

Remarks:

- Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20175	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-47.30	-38.90	1.40	-37.50	-13.00	-24.50
2	5197.50	-51.90	-40.30	1.40	-38.90	-13.00	-25.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-49.30	-41.50	1.40	-40.10	-13.00	-27.10
2	5197.50	-50.60	-38.40	1.40	-37.00	-13.00	-24.00

Remarks:

- Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20350	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3500.00	-44.20	-36.00	1.50	-34.50	-13.00	-21.50
2	5250.00	-49.20	-37.50	1.50	-36.00	-13.00	-23.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3500.00	-45.90	-38.30	1.50	-36.80	-13.00	-23.80
2	5250.00	-47.80	-36.10	1.50	-34.60	-13.00	-21.60

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 15MHz

Mode	TX channel 20025	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3435.00	-51.00	-42.40	1.30	-41.10	-13.00	-28.10
2	5152.50	-49.10	-37.10	1.40	-35.70	-13.00	-22.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3435.00	-52.70	-44.60	1.30	-43.30	-13.00	-30.30
2	5152.50	-47.40	-35.40	1.40	-34.00	-13.00	-21.00

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20175	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-46.60	-38.20	1.40	-36.80	-13.00	-23.80
2	5197.50	-53.80	-42.20	1.40	-40.80	-13.00	-27.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-47.90	-40.10	1.40	-38.70	-13.00	-25.70
2	5197.50	-52.30	-40.10	1.40	-38.70	-13.00	-25.70

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20325	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3495.00	-45.00	-36.80	1.50	-35.30	-13.00	-22.30
2	5242.50	-47.70	-35.90	1.40	-34.50	-13.00	-21.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3495.00	-46.10	-38.50	1.50	-37.00	-13.00	-24.00
2	5242.50	-46.40	-34.50	1.40	-33.10	-13.00	-20.10

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 20MHz

Mode	TX channel 20050	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3440.00	-51.00	-42.50	1.30	-41.20	-13.00	-28.20
2	5160.00	-47.90	-35.90	1.40	-34.50	-13.00	-21.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3440.00	-49.30	-41.30	1.30	-40.00	-13.00	-27.00
2	5160.00	-48.40	-36.40	1.40	-35.00	-13.00	-22.00

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20175	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-46.80	-38.40	1.40	-37.00	-13.00	-24.00
2	5197.50	-52.60	-41.00	1.40	-39.60	-13.00	-26.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3465.00	-46.30	-38.50	1.40	-37.10	-13.00	-24.10
2	5197.50	-53.20	-41.00	1.40	-39.60	-13.00	-26.60

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20300	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3490.00	-45.10	-36.90	1.50	-35.40	-13.00	-22.40
2	5235.00	-48.00	-36.20	1.40	-34.80	-13.00	-21.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3490.00	-43.10	-35.50	1.50	-34.00	-13.00	-21.00
2	5235.00	-48.50	-36.60	1.40	-35.20	-13.00	-22.20

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 13

Channel Bandwidth: 5MHz

Mode	TX channel 23205	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1559.00	-39.40	-31.60	1.30	-30.30	-13.00	-17.30
2	2338.50	-59.20	-53.40	0.00	-53.40	-13.00	-40.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1559.00	-37.50	-30.70	1.30	-29.40	-13.00	-16.40
2	2338.50	-59.00	-55.10	0.00	-55.10	-13.00	-42.10

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 23230	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1564.00	-40.50	-32.70	1.20	-31.50	-13.00	-18.50
2	2346.00	-57.80	-51.90	0.00	-51.90	-13.00	-38.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1564.00	-38.50	-31.50	1.20	-30.30	-13.00	-17.30
2	2346.00	-59.50	-55.50	0.00	-55.50	-13.00	-42.50

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 23255	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1569.00	-40.90	-33.00	1.20	-31.80	-13.00	-18.80
2	2353.50	-57.00	-51.00	0.00	-51.00	-13.00	-38.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1569.00	-39.60	-32.70	1.20	-31.50	-13.00	-18.50
2	2353.50	-57.70	-53.70	0.00	-53.70	-13.00	-40.70

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 10MHz

Mode	TX channel 23230	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1564.00	-40.10	-32.30	1.20	-31.10	-13.00	-18.10
2	2346.00	-57.20	-51.30	0.00	-51.30	-13.00	-38.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1564.00	-39.50	-32.50	1.20	-31.30	-13.00	-18.30
2	2346.00	-58.10	-54.10	0.00	-54.10	-13.00	-41.10

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 17

Channel Bandwidth: 5MHz

Mode	TX channel 23755	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1413.00	-43.60	-37.20	0.90	-36.30	-13.00	-23.30
2	2119.50	-45.40	-40.40	-0.30	-40.70	-13.00	-27.70
3	2826.00	-58.10	-52.30	0.30	-52.00	-13.00	-39.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1413.00	-46.00	-40.60	0.90	-39.70	-13.00	-26.70
2	2119.50	-42.20	-38.60	-0.30	-38.90	-13.00	-25.90
3	2826.00	-57.20	-52.40	0.30	-52.10	-13.00	-39.10

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 23790	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1420.00	-42.80	-36.10	0.90	-35.20	-13.00	-22.20
2	2130.00	-52.20	-47.20	-0.40	-47.60	-13.00	-34.60
3	2840.00	-58.40	-52.50	0.30	-52.20	-13.00	-39.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1420.00	-42.60	-37.10	0.90	-36.20	-13.00	-23.20
2	2130.00	-51.70	-47.80	-0.40	-48.20	-13.00	-35.20
3	2840.00	-57.20	-52.50	0.30	-52.20	-13.00	-39.20

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 23825	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1427.00	-37.80	-31.10	1.00	-30.10	-13.00	-17.10
2	2140.50	-42.80	-37.80	-0.30	-38.10	-13.00	-25.10
3	2854.00	-58.40	-52.40	0.30	-52.10	-13.00	-39.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1427.00	-46.30	-40.80	1.00	-39.80	-13.00	-26.80
2	2140.50	-44.90	-41.10	-0.30	-41.40	-13.00	-28.40
3	2854.00	-57.70	-52.90	0.30	-52.60	-13.00	-39.60

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Channel Bandwidth: 10MHz

Mode	TX channel 23780	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1418.00	-37.80	-31.20	0.90	-30.30	-13.00	-17.30
2	2127.00	-45.50	-40.50	-0.40	-40.90	-13.00	-27.90
3	2836.00	-58.40	-52.50	0.30	-52.20	-13.00	-39.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1418.00	-40.90	-35.40	0.90	-34.50	-13.00	-21.50
2	2127.00	-45.90	-42.00	-0.40	-42.40	-13.00	-29.40
3	2836.00	-57.50	-52.70	0.30	-52.40	-13.00	-39.40

Remarks:

- Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 23790	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1420.00	-38.40	-31.80	0.90	-30.90	-13.00	-17.90
2	2130.00	-43.80	-38.70	-0.40	-39.10	-13.00	-26.10
3	2840.00	-58.00	-52.20	0.30	-51.90	-13.00	-38.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1420.00	-42.80	-37.30	0.90	-36.40	-13.00	-23.40
2	2130.00	-45.20	-41.30	-0.40	-41.70	-13.00	-28.70
3	2840.00	-57.70	-52.90	0.30	-52.60	-13.00	-39.60

Remarks:

- Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 23800	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1422.00	-37.90	-31.30	1.00	-30.30	-13.00	-17.30
2	2133.00	-45.10	-40.10	-0.40	-40.50	-13.00	-27.50
3	2844.00	-58.40	-52.50	0.30	-52.20	-13.00	-39.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1422.00	-46.20	-40.80	1.00	-39.80	-13.00	-26.80
2	2133.00	-46.10	-42.20	-0.40	-42.60	-13.00	-29.60
3	2844.00	-57.00	-52.30	0.30	-52.00	-13.00	-39.00

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---