

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO

FCC PART 15 SUBPART C REQUIREMENT

	OF		
Product Name:	Bluetooth 4.1 low energy Asset Tag		
Brand Name:	Advantech		
Model No.:	WISE2200B, WISE-2200BXXXXXXXXXXXXXXXXX		
	(where "X" may be any alphanumeric charac- ter, "-" or blank)		
Model Difference:	For marketing purpose		
FCC ID:	M82-WISE-2200B		
Report No.:	E2/2016/30025		
Issue Date:	Apr. 01, 2016		
FCC Rule Part:	§15.247, Cat: DTS Advantech Co., Ltd		
Prepared for:	No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 11491, Taiwan, R.O.C.		
	SGS Taiwan Ltd.		
Prepared by:	Electronics & Communication Laboratory		
Frepared by.	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333		
	<i>Note:</i> This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS		
Testing Laboratory 0513	Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised and the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



VERIFICATION OF COMPLIANCE

Applicant:	Advantech Co., Ltd No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 11491, Taiwan, R.O.C.
Product Name:	Bluetooth 4.1 low energy Asset Tag
Brand Name:	Advantech
Model No.:	WISE2200B, WISE-2200BXXXXXXXXXXXXXXXXXX
	(where "X" may be any alphanumeric character, "-" or blank)
Model Difference:	For marketing purpose
FCC ID:	M82-WISE-2200B
Report Number:	E2/2016/30025
Date of test:	Mar. 10, 2016 ~ Apr. 01, 2016
Date of EUT Received:	Mar. 10, 2016

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Aken H	uang	Date	Apr. 01, 2016
Prepared By:	Aken Huang/ E		– Date	Apr. 01, 2016
	Yuri Tsai / C	Clerk	_	
Approved By:	Jim Chang / Asst	0	Date -	Apr. 01, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Revision History

Report Number	Revision	Description	Issue Date
E2/2016/30025 Rev.00		Initial creation of document	Apr. 01, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeindustict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Contents

1	GENE	ERAL INFORMATION	6
	1.1	Product Description	6
	1.2	Product Feature of Equipment Under Test	7
	1.3	Test Methodology of Applied Standards	8
	1.4	Test Facility	8
	1.5	Special Accessories	8
	1.6	Equipment Modifications	8
2	SYST	EM TEST CONFIGURATION	9
	2.1	EUT Configuration	9
	2.2	EUT Exercise	9
	2.3	Test Procedure	9
	2.4	Measurement Results Explanation Example	9
	2.5	Configuration of Tested System 1	0
3	SUMI	MARY OF TEST RESULTS1	.1
4	DESC	CRIPTION OF TEST MODES1	
	4.1	Operated in 2400 ~ 2483.5MHz Band1	1
	4.2	The Worst Test Modes and Channel Details 1	.2
5	MEAS	SUREMENT UNCERTAINTY1	.3
6	CONI	DUCTED EMISSION TEST1	4
	6.1	Standard Applicable:	
	6.2	Measurement Equipment Used:1	.4
	6.3	EUT Setup: 1	
	6.4	Test SET-UP (Block Diagram of Configuration) 1	
	6.5	Measurement Procedure:1	.5
	6.6	Measurement Result:1	5
7	PEAK	COUTPUT POWER MEASUREMENT1	.6
	7.1	Standard Applicable:	.6
	7.2	Measurement Equipment Used:1	
	7.3	Test Set-up: 1	
	7.4	Measurement Procedure:	.7
	7.5	Measurement Result:1	.8
8		BANDWIDTH MEASUREMENT1	
	8.1	Standard Applicable	9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeindustict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



	8.2	Measurement Equipment Used	19
	8.3	Test Set-up:	19
	8.4	Measurement Procedure:	20
	8.5	Measurement Result:	20
9	CON	DUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	
	9.1	Standard Applicable	
	9.2	Measurement Equipment Used:	
	9.3	Test SET-UP:	
	9.4	Measurement Procedure	
	9.5	Measurement Result	
10	RADI	ATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	
	10.1	Standard Applicable	29
	10.2	Measurement Equipment Used	30
	10.3	Test SET-UP	31
	10.4	Measurement Procedure	32
	10.5	Field Strength Calculation	33
	10.6	Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz	33
	10.7	Measurement Result:	33
11	PEAK	(POWER SPECTRAL DENSITY	
	11.1	Standard Applicable:	48
	11.2	Measurement Equipment Used:	48
	11.3	Test Set-up:	48
	11.4	Measurement Procedure:	48
	11.5	Measurement Result:	49
12	ANTE	ENNA REQUIREMENT	
	12.1	Standard Applicable:	52
	12.2	Antenna Connected Construction:	52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to Electronic be current to does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the context or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipei/IQX1640, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	Bluetooth 4.1 low energy Asset Tag
Brand Name:	Advantech
Model No.:	WISE2200B, WISE-2200BXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
Model Difference:	For marketing purpose
Product SW/HW version:	V16 / V12
Radio SW/HW version:	V16 / V12
Test SW Version:	N/A
RF power setting in TEST SW:	N/A
Power Supply:	3Vdc from CR2450 Battery*1

Bluetooth Low Energy:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V4.1
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	4.38 dBm
Antenna Designation:	Chip Antenna, Supplier: INPAQ, Gain:3dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.2 Product Feature of Equipment Under Test

The equipment under Test (Hereafter Called: EUT) is supporting Bluetooth features, and below is details of information:

Product Feature				
Product Name:	Bluetooth 4.1 low energy Asset Tag			
Brand Name:	Advantech			
Model No.:	WISE2200B, WISE-2200BXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX			
Model Difference:	For marketing purpose			
FCC ID:	M82-WISE-2200B			
Bluetooth Version	V4.1			

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for su days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is envolved except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-programes of this document is unlawful and differed rs may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Test Methodology of Applied Standards 1.3

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance

ANSI C63.10:2013

Note:

- 1. All test items have been performed and record as per the above standards.
- 2. The composite system is compliance with FCC Subpart B is authorized under a DoC procedure.

Test Facility 1.4

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan. (TAF code 0513)

FCC Registration Numbers are: 628985

1.5 Special Accessories

There are no special accessories used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



SYSTEM TEST CONFIGURATION 2

EUT Configuration 2.1

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

Test Procedure 2.3

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz.. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss 1dB and splitter 0dB splitter. Offset = RF cable loss (dB) + splitter(dB) = 1 + 0 = 1(dB)

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.5 Configuration of Tested System





Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	L430	R9-YYG88	Shielded	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is envolved except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-programes of this document is unlawful and differed rs may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth Power Emission Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES 4

Operated in 2400 ~ 2483.5MHz Band 4.1

40 channels are provided for Bluetooth LE

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
0	2402 MHz	14	2430 MHz	28	2458 MHz
1	2404 MHz	15	2432 MHz	29	2460 MHz
2	2406 MHz	16	2434 MHz	30	2462 MHz
3	2408 MHz	17	2436 MHz	31	2464 MHz
4	2410 MHz	18	2438 MHz	32	2466 MHz
5	2412 MHz	19	2440 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is envolved except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-programes of this document is unlawful and differed rs may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)							
MODE	AVAILABLE	TESTED	MODULATION	DATA RATE	ANTENNA		
NIODE	CHANNEL	CHANNEL	MODULATION	(Mbps)	PORT		
Bluetooth LE	0 to 39	0,20,39	GFSK	1	MAIN		
	RADIA	ED EMISSION	N TEST (ABOVE	1 GHz)			
MODE	AVAILABLE	TESTED	MODULATION	DATA RATE	ANTENNA		
MODE	CHANNEL	CHANNEL	MODULATION	(Mbps)	PORT		
Bluetooth LE	0 to 39	0,20,39	GFSK	1	MAIN		

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST							
MODE	AVAILABLE	TESTED	MODULATION	DATA RATE	ANTENNA		
NODE	CHANNEL	CHANNEL	WODULATION	(Mbps)	PORT		
Bluetooth LE	0 to 39	0,20,39	GFSK	1	MAIN		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained tor 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-programe of this document is unlawful and offanders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz-30MHz: +/-2.87dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz-30MHz: +/-2.87dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reporting of this document is unlawful and offanders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CONDUCTED EMISSION TEST 6

6.1 **Standard Applicable:**

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

_	Limits					
Frequency range	dB(uV)				
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				
Note						
1. The lower limit shall apply at the transition frequencies						

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2015	12/11/2016		
Coaxial Cables	N/A	N30N30-1042-150 cm	N/A	02/07/2016	02/06/2017		
LISN	Schwarzbeck	NSLK 8127	8127-648	06/09/2015	06/08/2016		
LISN	Rolf-Heine	NNB-2/16Z	99012	03/04/2015	03/03/2016		
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.		

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.



6.4 Test SET-UP (Block Diagram of Configuration)

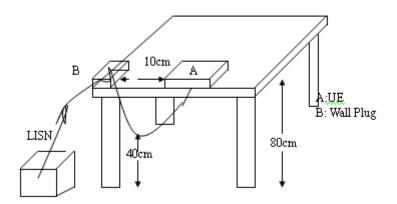

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

Measurement Result: 6.6

N/A, EUT powered by DC battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



PEAK OUTPUT POWER MEASUREMENT 7

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

7.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Power Meter	Anritsu	ML2496A	1326001	06/23/2015	06/22/2016	
Power Sensor	Anritsu	MA2411B	1315048	06/23/2015	06/22/2016	
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016	
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016	
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/12/2015	12/11/2016	
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016	

7.3 Test Set-up:



biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.

Duty Factor:

	Duty Cycle	Duty Fator (dB)
Bluetooth LE	100%	0

enter Freq 2.402		Fast Trig: Free R Low #Atten: 30 d	Avg	Type: Log-Pwr	01:50:22 PM Mar 16, 2016 TRADE 1 2 3 4 9 1 TYPE WHAT HAD TO P	Frequency
Ref Offset	t1 dB	Low motor. ov o				Auto Tun
						Center Fre 2.402000000 GH
(5D ((1) (0)						Start Fre 2.402000000 GH
49 D						Stop Fre 2.40200000 GH
Center 2.40200000 Res BW 8 MHz	0 GHz	#VBW 8.0 MHz	FUNCTION	Sweep :	Span 0 Hz 3.013 ms (401 pts)	CF Ste 9.000000 Mit Auto Mit
1234566789						Freq Offs 01
10			-			

Duty Cycle Factor: $10 * \log (1/100/100) = 0$

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.5 Measurement Result:

BT4.1 mode:

BLE mode:

СН	Frequency (MHz)	Peak Power Output(dBm)	Required Limit
0	2402	4.38	1 Watt = 30 dBm
20	2442	4.23	1 Watt = 30 dBm
39	2480	4.00	1 Watt = 30 dBm

СН	Frequency (MHz)	Average Power Output(dBm)	Required Limit
0	2402	4.34	1 Watt = 30 dBm
20	2442	4.19	1 Watt = 30 dBm
39	2480	3.96	1 Watt = 30 dBm

*Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter



6dB BANDWIDTH MEASUREMENT 8

8.1 Standard Applicable


The minimum 6 dB bandwidth shall be at least 500 kHz.

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

Measurement Equipment Used 8.2

Conducted Emission Test Site								
EQUIPMENT	MFR	MFR MODEL SERIAL		LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016			
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016			
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2015	12/11/2016			
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016			

8.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%~5%, VBW=3*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.

- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

Frequency (MHz)	6dB Bandwidth (MHz)	Bandwidth (MHz)	Result	
2402	0.7144	> 0.5	PASS	
2442	0.7168	> 0.5	PASS	
2480	0.7301	> 0.5	PASS	

8.5 **Measurement Result:**

BIF mode

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



BT4.1 mode 6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid

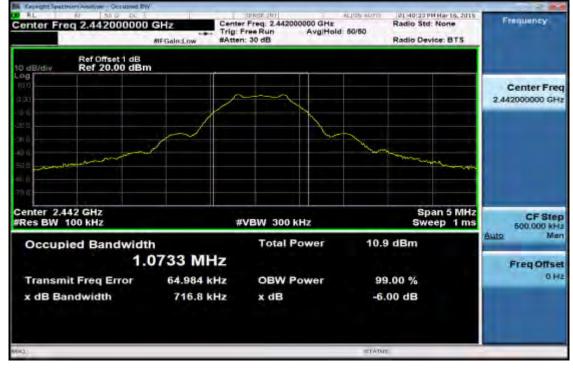


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-responses of this document is unautified and finderes may be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-High

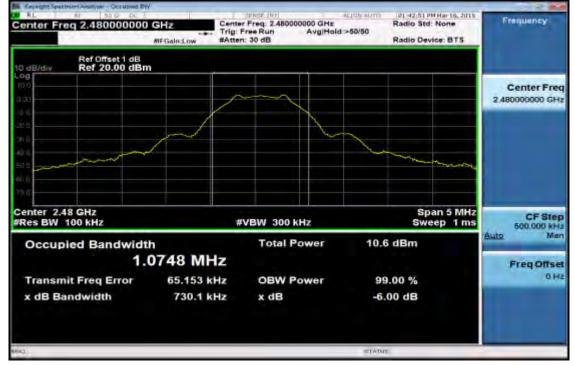

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction form exercising all their rights and obligations under the transaction documents. This document is unaveruent as the prove of the target extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 9


9.1 **Standard Applicable**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MFR MODEL SERIAL		LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016			
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016			
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2015	12/11/2016			
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016			

9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Since Statement is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



9.4 Measurement Procedure

Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:


- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law





BT4.1 mode **Band Edges Test Data CH-Low**

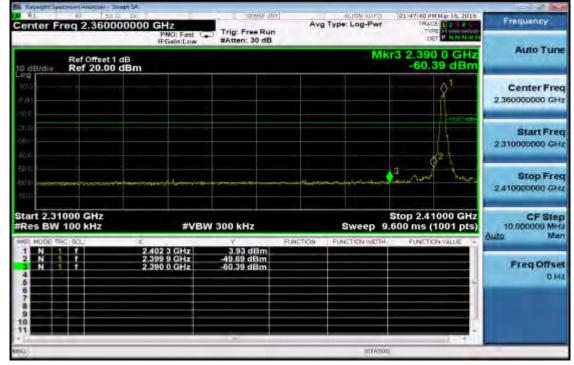

Band Edges Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-responses of this document is unautified and finderes may be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Conducted Spurious Emission Measurement Result CH-Low 30MHz - 3GHz

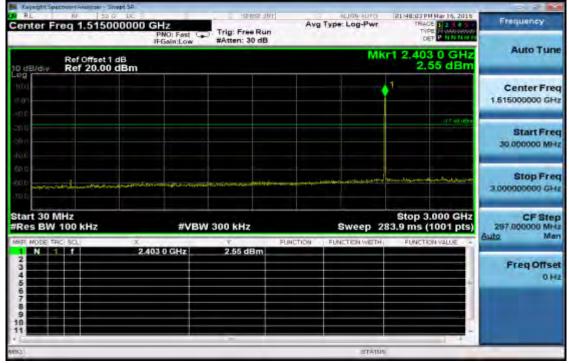

CH-Low 3GHz – 26.5GHz

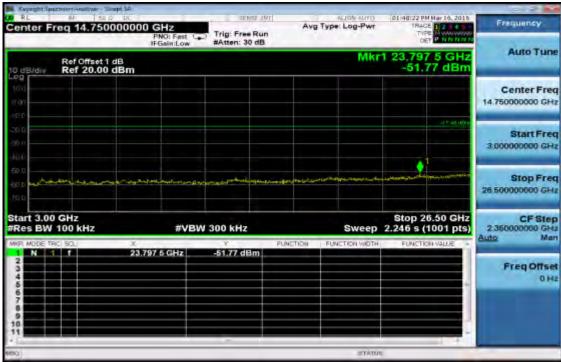

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Contensises otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CH-Mid 30MHz – 3GHz

Keynight Spectram Analyzer - Strapt SA			
Center Freq 1.515000000	PNO: Fast C. Trig: Free Run	Avg Type: Log-Pwr TRACE TRACE	Frequency
Ref Offset 1 dB	IFGain:Low #Atten: 30 dB	Mkr1 2.441 6 GHz 2.59 dBm	Auto Tune
101 101			Center Freq 1.515000000 GHz
-000 -2000 -2000 -2000		47.41.001	Start Freq 30,000000 MHz
60 0 60 0 78 0	an te mande a state and a state of the state	and by any adjust to the property of the state of the first state of t	Stop Freq 3,00000000 GHz
Start 30 MHz #Res BW 100 kHz	#VBW 300 kHz	Stop 3.000 GHz Sweep 283.9 ms (1001 pts)	CF Step 297,000000 MHz Auto Man
	441 6 GHz 2.59 dBm		Freq Offset 0 Hz
11	-	STATUS	

CH-Mid 3GHz – 26.5GHz

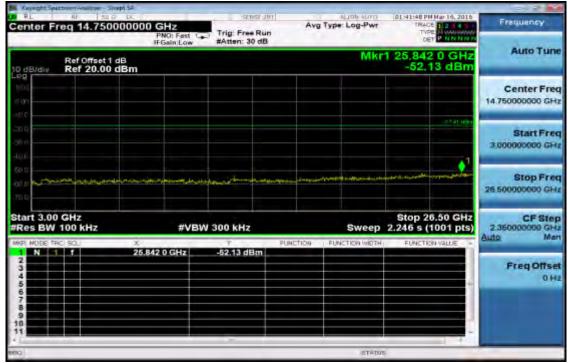

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction form exercising all their rights and obligations under the transaction documents. This document is unaveruent as the prove of the target extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



CH-High 30MHz – 3GHz

Keynight Spectreen Analyzer - Strept SA					100 M 100
Center Freq 1.515000000	PNO: Fast	Trig: Free Run	Avg Type: Log-Pwr	C1144:38 PM Mar 16, 2016 TRACE 1 2 3 4 3 Type Picture and OFT P 110 Mar 1	Frequency
Ref Offset 1 dB	IFGain:Low	#Atten: 30 dB	MK	r1 2,480 3 GHz 1.68 dBm	Auto Tune
1001 1 001				•1	Center Free 1.515000000 GH:
30 0 30 0 30 1				(11).32 d5m	Start Free 30,000000 MH4
50 U 60 D 70 D	مەنەبىلەنچىرىدىغەنىسىز	ta an	ىلىكەنلەرىرىيەرلە <mark>تىرلىرىسىيىرىيەر</mark>	and an and the the second second	Stop Fred 3,00000000 GH
Start 30 MHz #Res BW 100 kHz	#VBW	300 kHz		Stop 3.000 GHz 83.9 ms (1001 pts)	CF Step 297.000000 MHz Auto Man
MRR.NODE TRC: SC. X. 1 N 1 7 2, 2 3 4 5 6 6 7 8 9	480 3 GHz	1.68 dBm	NETION FUNCTION WETH	FUNCTION VALUE	Freq Offset 0 Hz
10 11		-	STÁTUS		_

CH- High 3GHz – 26.5GHz

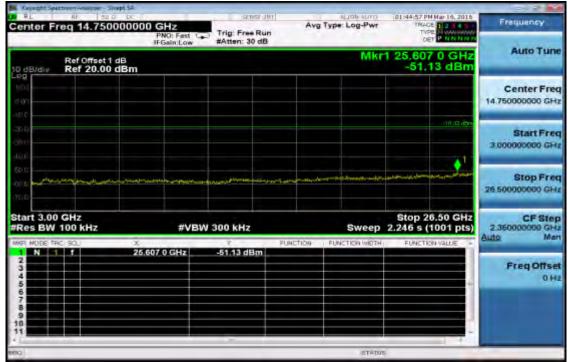

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction form exercising all their rights and obligations under the transaction documents. This document is unaveruent as the prove of the target extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the limit as below.

For an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.




10.2 Measurement Equipment Used

966 Chamber							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESU 40	100363	04/09/2015	04/08/2016		
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2015	12/08/2016		
Broadband Antenna	TESEQ	CBL 6112D	35240	10/28/2015	10/27/2016		
Horn Antenna	ETS-Lindgren	3117	00143272	12/08/2015	12/07/2016		
Horn Antenna	Schwarzbeck	BBHA9170	185	07/25/2015	07/24/2016		
Pre Amplifier	EMC Instruments	EMC330	980096	12/12/2015	12/11/2016		
Pre Amplifier	EMC Instruments	EMC001183 0	980199	12/12/2015	12/11/2016		
Pre Amplifier	R&S	SCU-18	10204	12/12/2015	12/11/2016		
Pre Amplifier	R&S	SCU-26	100780	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/12/2015	12/11/2016		
Attenuator	WOKEN	218FS-10	RF27	12/12/2015	12/11/2016		
Site NSA	SGS	966 Cham- ber C	SAC-C	03/04/2016	03/03/2017		
Site VSWR	SGS	966 Cham- ber C	SAC-C	03/04/2016	03/03/2017		
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2015	05/03/2016		
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.		
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.		
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.		
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.		




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

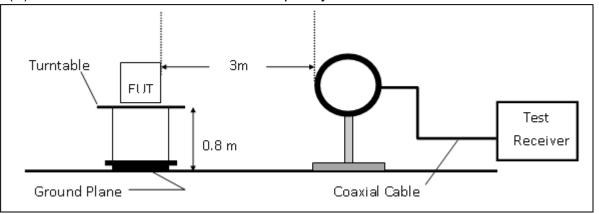

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

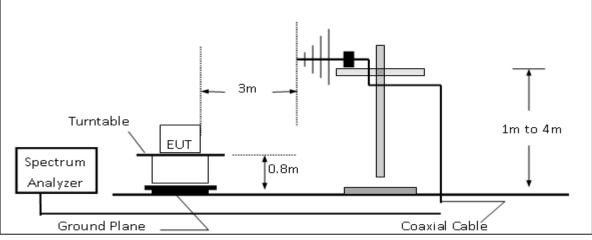

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

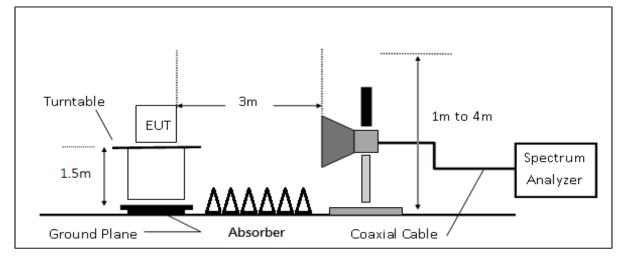

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction form exercising all their rights and obligations under the transaction documents. This document is unaveruent as the prove of the target extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequen-2. cy> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the 4. highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency 6. above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW \geq 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- When measurement procedures for electric field radiated emissions above 1 GHz the EUT 8. measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- Maximum procedure was performed on the six highest emissions to ensure EUT compli-9. ance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chicos Statement is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms/e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	5	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Band Edge Measurement Result (BT4.1 mode)

Fundamenta	peration Mode : BT4.0 Test Dat undamental Frequency : 2402 MHz Temp. / peration Band : BE CH Low Test Eng UT Pol. : E2 Measure		łumi. :	na Pol. :	2016/3/20 22.7deg_C Penny Vertical	2/57RH	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	54.45	-6.84	47.61	74	-26.39
2390.00	E	Average	40.57	-6.84	33.73	54	-20.27
Fundamenta	Operation Mode :BT4.0Test Date :Fundamental Frequency :2402 MHzTemp. / Humi. :Operation Band :BE CH LowTest Engineer :EUT Pol. :E2Measurement Antenna Pol. :				na Pol. :	2016/3/20 22.7deg_C Penny Horizontal	57RH
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	54.05	-6.84	47.21	74	-26.79
2390.00	E	Average	40.63	-6.84	33.79	54	-20.21
		·					



Operation M Fundamenta Operation Ba EUT Pol. :	I Frequency :	BT4.0 2480 N BE CH E2	Test Engi	Date : p. / Humi. : Engineer : surement Antenna Pol. :		2016/3/20 22.7deg_C/57RH Penny Vertical	
Freq.	Note	De tecto r Mode	 bectum ding Level	Factor	Actual FS	Limit @3m	Margin

		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	54.19	-6.38	47.80	74	-26.20
2483.50	E	Average	42.06	-6.38	35.68	54	-18.32
2483.58	S	Peak	66.19	-6.38	59.80	74	-14.20
2483.58	S	Average	41.86	-6.38	35.48	54	-18.52

Operation Mode :	BT4.0	Test Date :	2016/3/20
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	BE CH High	Test Engineer :	Penny
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµ V/m	dBµV/m	dB
2483.50	E	Peak	55.19	-6.38	48.81	74	-25.19
2483.50	E	Average	43.61	-6.38	37.23	54	-16.77
2483.55	S	Peak	73.49	-6.38	67.11	74	-6.89
2483.55	S	Average	43.42	-6.38	37.04	54	-16.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to Electronic be current to does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the context or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipei/IQX1640, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020, 2020



Radiated Spurious Emission Measurement Result (BT4.1 mode) For Frequency form 30MHz to 1000MHz

Operation Mode :	BT4.0	Test Date :	2016/3/22
Fundamental Frequency :	2402 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Penny
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

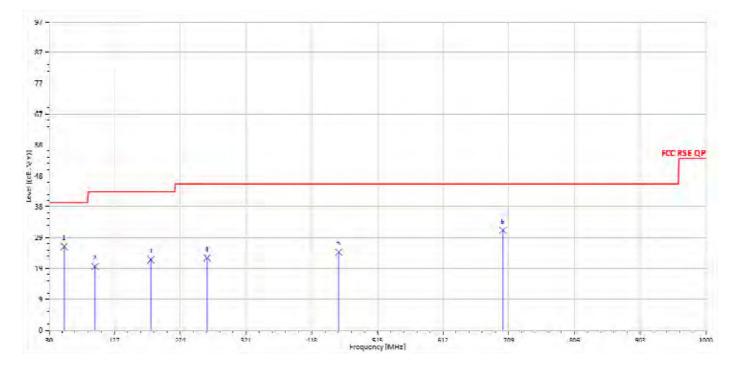



Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	S	Peak	43.70	-17.39	26.31	40	-13.69
97.90	S	Peak	41.82	-21.78	20.04	43.5	-23.46
180.35	S	Peak	40.21	-18.06	22.15	43.5	-21.35
263.77	S	Peak	39.54	-16.86	22.68	46	-23.32
457.77	S	Peak	35.98	-11.42	24.55	46	-21.45
700.27	S	Peak	38.81	-7.42	31.39	46	-14.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction form exercising all their rights and obligations under the transaction documents. This document is unaveruent as the prove of the target extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



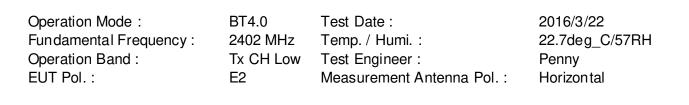


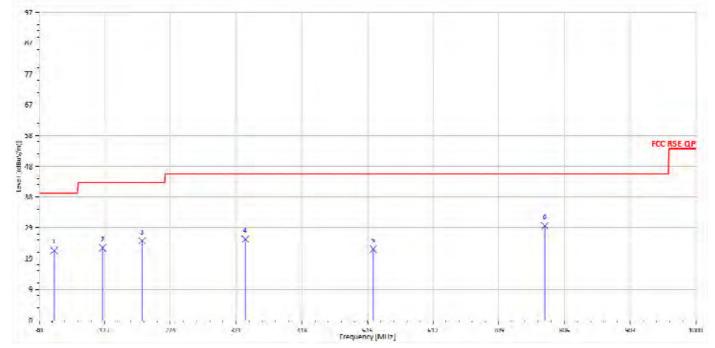

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	S	Peak	39.35	-17.39	21.96	40	-18.04
124.09	S	Peak	41.05	-18.27	22.79	43.5	-20.71
182.29	S	Peak	43.22	-18.20	25.02	43.5	-18.48
334.58	S	Peak	39.97	-14.41	25.56	46	-20.44
523.73	S	Peak	32.83	-10.42	22.41	46	-23.59
776.90	S	Peak	36.29	-6.55	29.74	46	-16.26





Operation Mode :	BT4.0	Test Date :	2016/3/22
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Penny
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

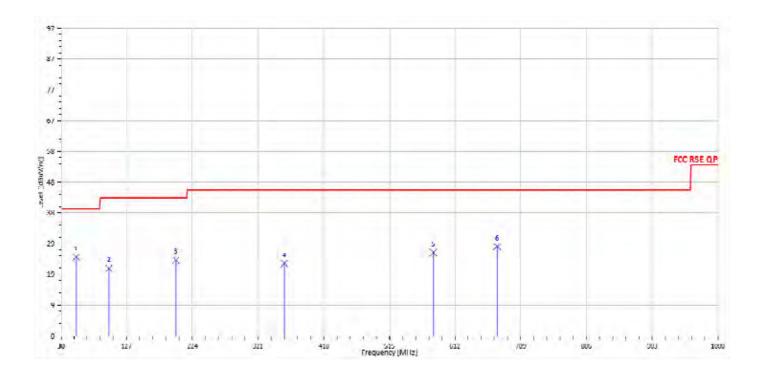

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	S	Peak	42.28	-17.39	24.89	40	-15.11
100.81	S	Peak	42.61	-21.34	21.27	43.5	-22.23
199.75	S	Peak	42.48	-18.64	23.83	43.5	-19.67
359.80	S	Peak	36.85	-14.03	22.82	46	-23.18
579.99	S	Peak	35.12	-8.89	26.23	46	-19.77
674.08	S	Peak	36.83	-8.67	28.16	46	-17.84







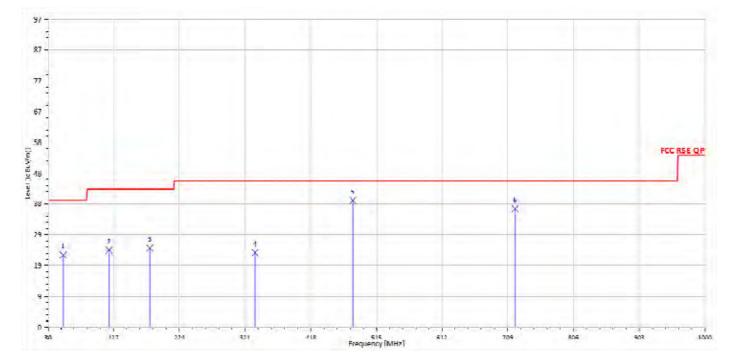

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	S	Peak	40.11	-17.39	22.72	40	-17.28
120.21	S	Peak	42.95	-18.70	24.25	43.5	-19.25
180.35	S	Peak	42.99	-18.06	24.92	43.5	-18.58
335.55	S	Peak	37.87	-14.39	23.47	46	-22.53
480.08	S	Peak	51.02	-11.10	39.93	46	-6.07
719.67	S	Peak	44.81	-7.53	37.28	46	-8.72







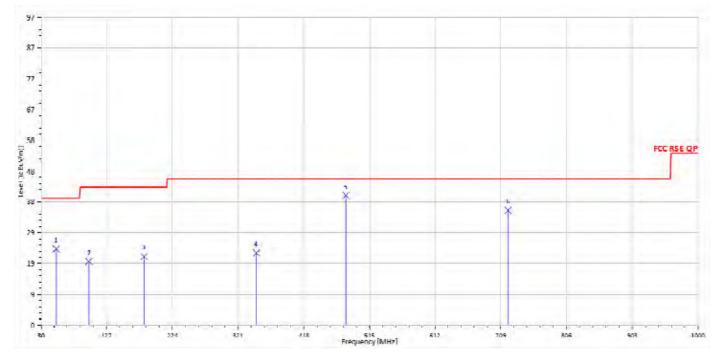

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	S	Peak	41.38	-17.39	23.99	40	-16.01
100.81	S	Peak	41.41	-21.34	20.07	43.5	-23.43
182.29	S	Peak	39.79	-18.20	21.59	43.5	-21.91
348.16	S	Peak	37.00	-14.27	22.73	46	-23.27
480.08	S	Peak	51.97	-11.10	40.87	46	-5.13
719.67	S	Peak	43.66	-7.53	36.13	46	-9.87





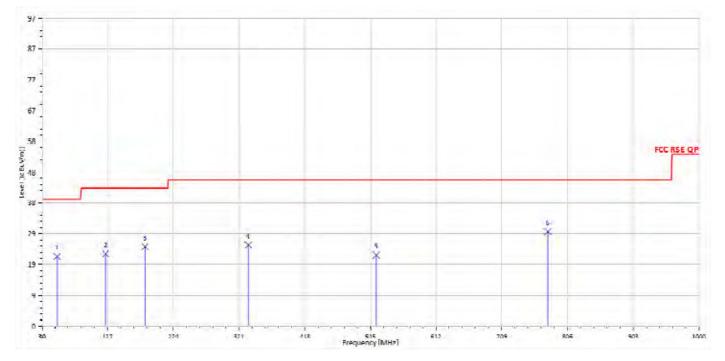


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	S	Peak	41.37	-17.39	23.98	40	-16.02
107.60	S	Peak	42.46	-19.90	22.57	43.5	-20.93
180.35	S	Peak	43.14	-18.06	25.08	43.5	-18.42
265.71	S	Peak	48.11	-16.71	31.40	46	-14.60
419.94	S	Peak	40.38	-12.04	28.34	46	-17.66
719.67	S	Peak	46.26	-7.53	38.74	46	-7.26



21

Radiated Spurious Emission Measurement Result (BT4.1 mode) For Frequency above 1GHz

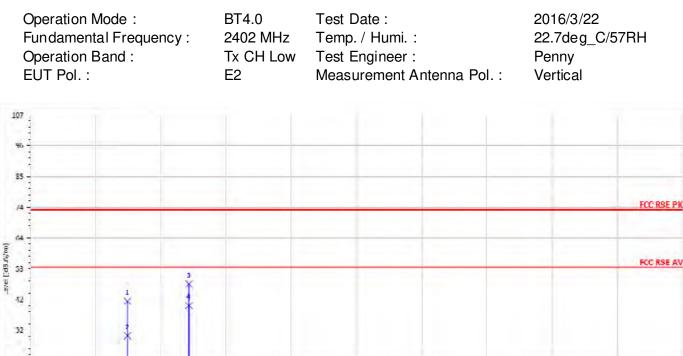


10 -								_		_
0										
1000	3550	6100	0050	11200	13750 Frequency [MI Iz]	10300	10050	21400	23050	20500

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Н	Peak	43.37	-1.16	42.22	74	-31.78
4804.00	Н	Average	31.30	-1.16	30.14	54	-23.86
7206.00	Н	Peak	42.79	5.41	48.20	74	-25.80
7206.00	Н	Average	35.24	5.41	40.65	54	-13.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Operation Mode :	BT4.0	Test Date :	2016/3/22
Fundamental Frequency :	2402 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Penny
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

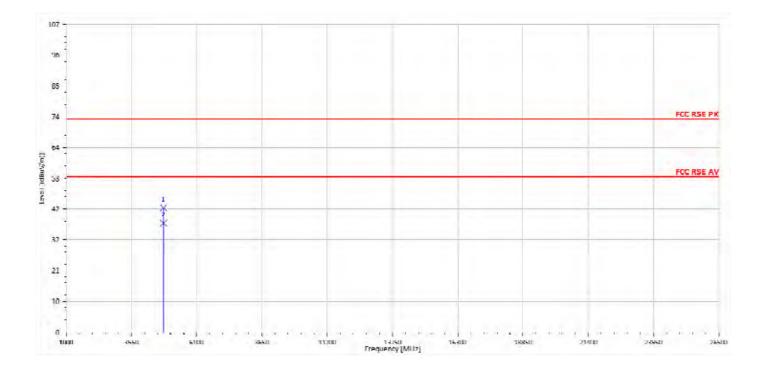

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµ V/m	dBµV/m	dB
4804.00	Н	Peak	44.41	-1.16	43.25	74	-30.75
4804.00	Н	Average	39.09	-1.16	37.93	54	-16.07




Operation Mode :	BT4.0	Test Date :	2016/3/22
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Penny
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

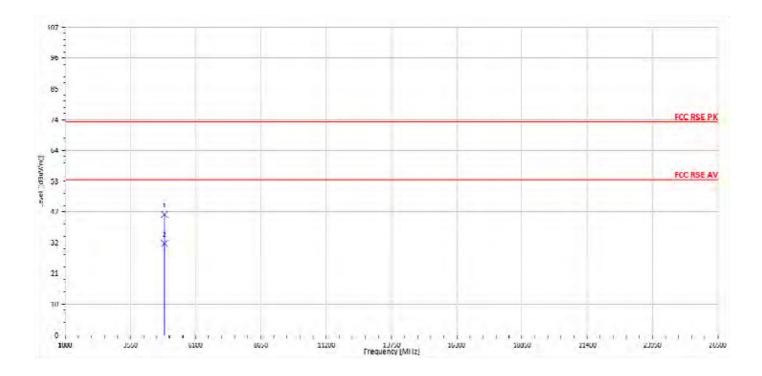

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4884.00	Н	Peak	42.65	-0.69	41.96	74	-32.04
4884.00	Н	Average	32.51	-0.69	31.82	54	-22.18



Operation Mode :	BT4.0	Test Date :	2016/3/22
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Penny
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

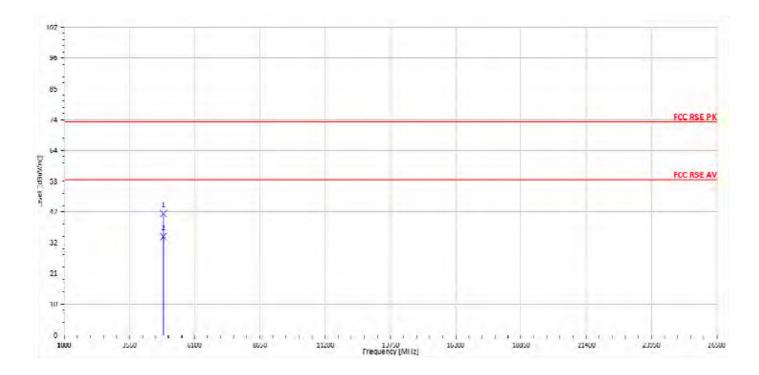


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4884.00	Н	Peak	42.92	-0.69	42.23	74	-31.77
4884.00	Н	Average	34.87	-0.69	34.18	54	-19.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is envolved except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-programes of this document is unlawful and differed rs may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.




Operation Mode :	BT4.0	Test Date :	2016/3/22
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Penny
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

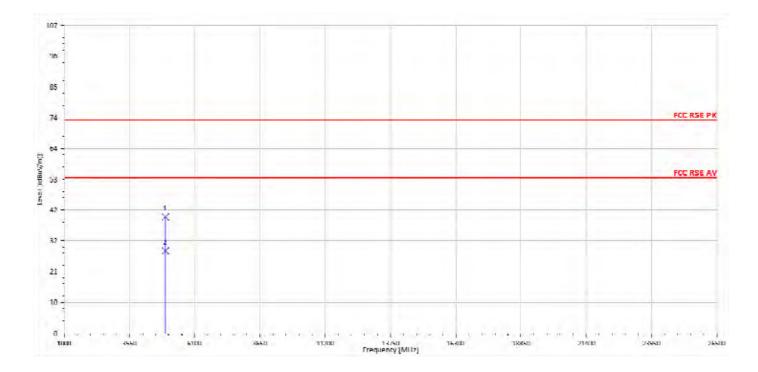

	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
-	4960.00	Н	Peak	41.04	-0.66	40.39	74	-33.61
	4960.00	Н	Average	29.33	-0.66	28.68	54	-25.33



Operation Mode :	BT4.0	Test Date :	2016/3/22
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Penny
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

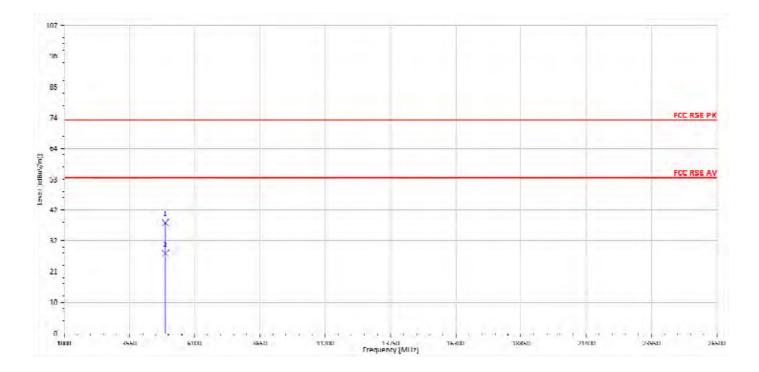

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Peak	39.10	-0.66	38.44	74	-35.56
4960.00	Н	Average	28.41	-0.66	27.75	54	-26.25



11 PEAK POWER SPECTRAL DENSITY


11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016		
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016		
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2015	12/11/2016		
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016		

11.3 Test Set-up:



11.4 Measurement Procedure:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the BBW = 3 kHz.
- 5. Set the VBW = 10 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



11.5 Measurement Result:

BT4.1 mode

BLE mode			
Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-8.31	8	PASS
2442	-7.31	8	PASS
2480	-8.82	8	PASS

Note: Refer to next page for plots.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



BT4.1 mode Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)

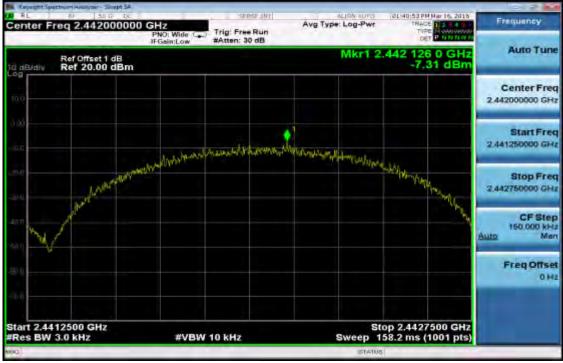

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Power Spectral Density Test Plot (CH-High)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the target of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

12.2 Antenna Connected Construction:

An embedded-in antenna design is used.

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law