

**Fego Precision Industrial Co., Ltd.**

# TEST REPORT

**Model:**

TP36RF433-152

**REPORT NUMBER**

240200072THC-001

**ISSUE DATE**

Mar. 19, 2024


**PAGES**

18

**DOCUMENT CONTROL NUMBER**

GFT-OP-10h (28-Nov-2018)

© 2020 Intertek

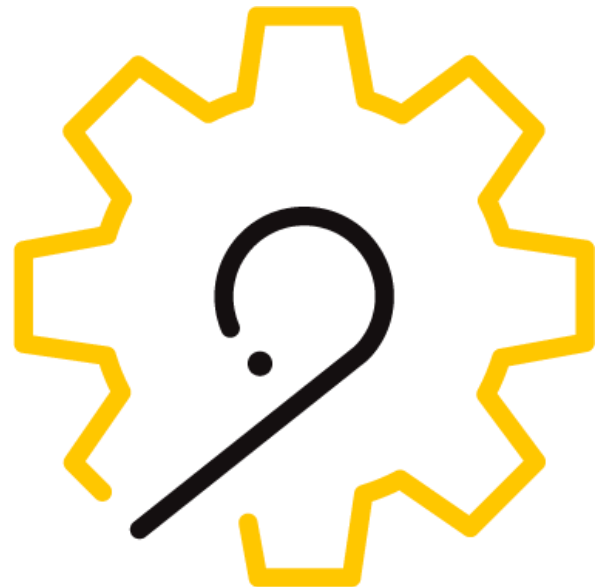

# Radio Spectrum TEST REPORT

<b>Applicant:</b>	<b>Fego Precision Industrial Co., Ltd. No 947 Lin-Sen Rd. Wu Fong Shiang, Taichung Hsien, Taiwan</b>
<b>Product:</b>	<b>Remote control transmitter</b>
<b>Model No.:</b>	<b>TP36RF433-152</b>
<b>FCC ID:</b>	<b>M8C-TP36RF433-152</b>
<b>Test Method/ Standard:</b>	<b>47 CFR FCC Part 15.231</b>
<b>Test By:</b>	<b>Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 17, Ln. 246, Niupu S. Rd., Xiangshan Dist, Hsinchu City 300075, Taiwan</b>



*Rich Nien*

Rich Nien  
Engineer

*Zero Chen*

Zero Chen  
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

### Revision History

Report No.	Issue Date	Revision Summary
240200072THC-001	Mar. 19, 2024	Original report

## Table of Contents

Summary of Test Data .....	4
1. General Information .....	5
1.1 Identification of the EUT .....	5
1.2 Antenna description .....	5
1.3 Operation mode .....	6
1.4 Peripherals equipment .....	6
2. Radiated emission test FCC 15.231 (b) .....	7
2.1.1 Radiated emission from 9kHz to 30MHz uses Loop Antenna: .....	7
2.1.2 Radiated emission below 1GHz using Bilog Antenna .....	8
2.1.3 Radiated emission above 1GHz using Horn Antenna .....	8
3. Measured bandwidth FCC 15.231(C) .....	14
4. Timing requirement of operated transmitter .....	15
5. Conducted emission FCC 15.207 .....	16
Appendix A: Test equipment list .....	17
Appendix B: Measurement Uncertainty .....	18

**Summary of Test Data**

Test Requirement	Applicable Rule	Result
Radiated Emission test	15.231(b), 15.209	Pass
Measured bandwidth	15.231(c)	Pass
Timing requirement of operated transmitter	15.231(b)	Pass
Conducted Emission test	15.207	N/A
Antenna Requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

## 1. General Information

### 1.1 Identification of the EUT

<b>Product:</b>	Remote control transmitter
<b>Model No.:</b>	TP36RF433-152
<b>Operating Frequency:</b>	433.92MHz
<b>Rated Power:</b>	DC 3V
<b>Power Cord:</b>	N/A
<b>Sample receiving date:</b>	2024/02/16
<b>Sample condition:</b>	Workable
<b>Test Date(s):</b>	2024/03/05 ~ 2024/03/07

### 1.2 Antenna description

Antenna Type : Printed Antenna

Connector Type : Fixed

### 1.3 Operation mode

The EUT was supplied with DC 3V from battery.

The EUT is set in engineer mode to transmit continuously.

The signal is maximized through rotation and placement in the three orthogonal axes.



**X axis**

**Y axis**

**Z axis**

After verifying three axes, we found the maximum electromagnetic field was occurred at Y axis. The final test data was executed under this configuration.

Frequency (MHz)	Signal on time (ms)	Signal on & off time (ms)	Duty Cycle	Duty Cycle factor
433.92	38.55	100.00	0.386	8.28


### 1.4 Peripherals equipment

Peripherals	Brand	Model No.	Serial No.	Data cable
Battery * 2	GP	R03	N/A	N/A

**2. Radiated emission test FCC 15.231 (b)**


**2.1 Test setup & procedure**

**2.1.1 Radiated emission from 9kHz to 30MHz uses Loop Antenna:**

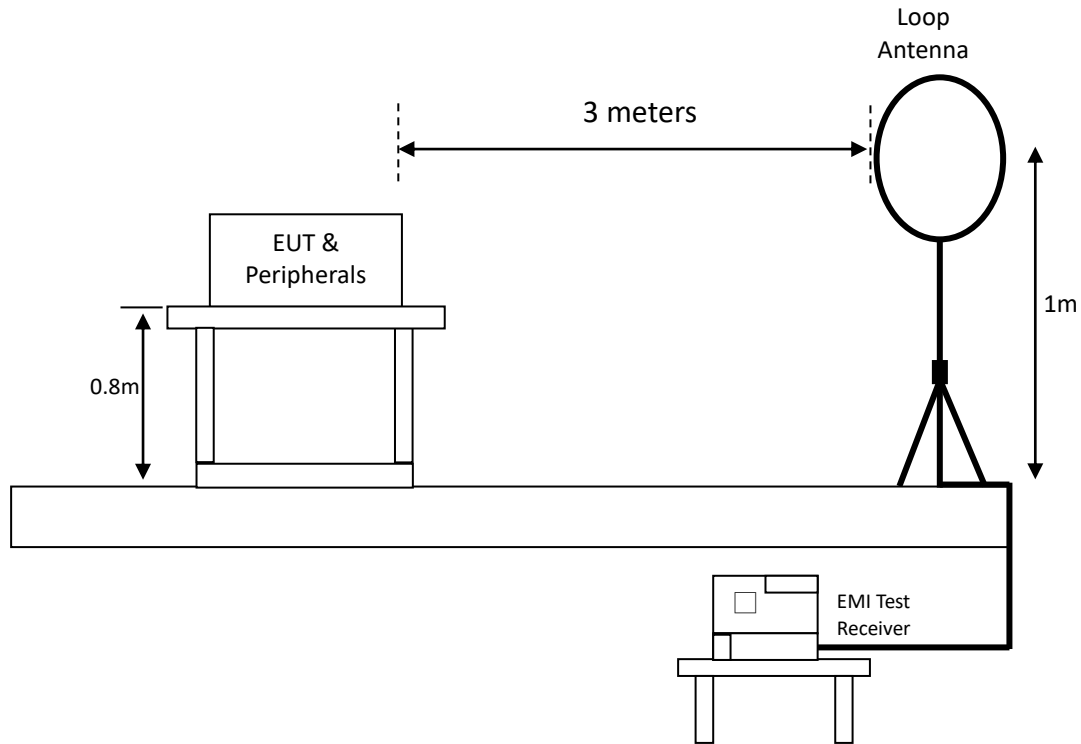




## 2.1.2 Radiated emission below 1GHz using Bilog Antenna

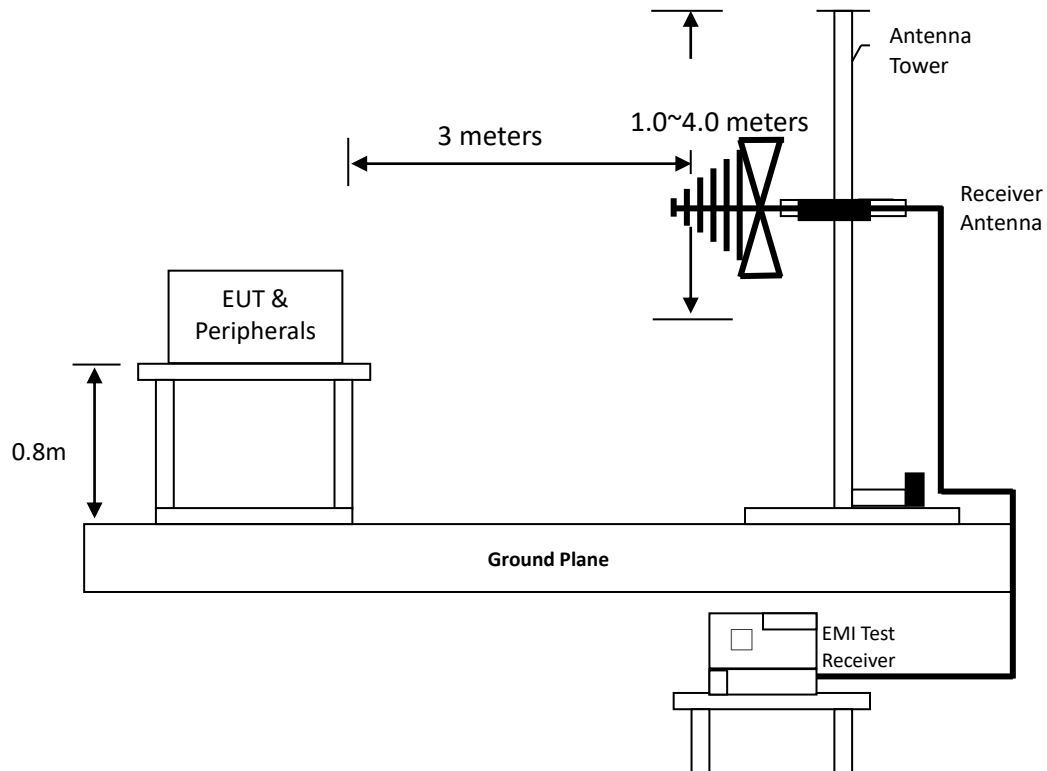

## 2.1.3 Radiated emission above 1GHz using Horn Antenna

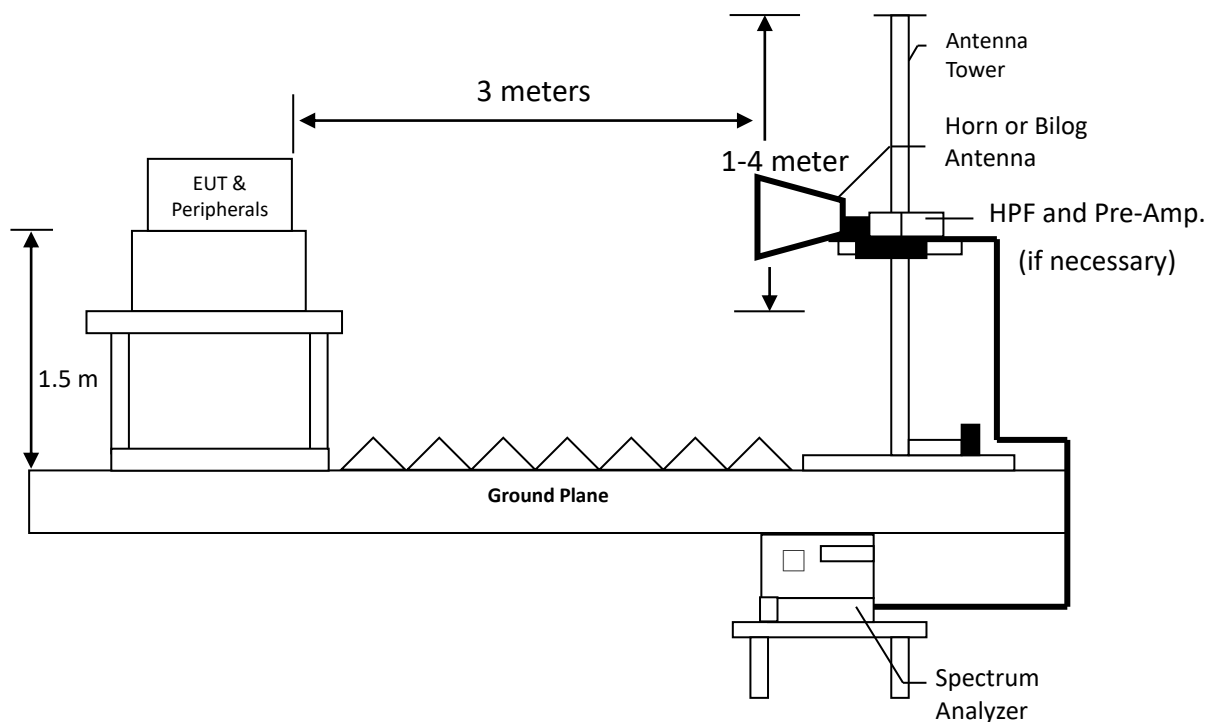

## 2.2 Radiated emission limit

### 2.2.1 Fundamental and harmonics emission limits

Frequency (MHz)	Field Strength of Fundamental		Field Strength of Harmonics	
	(uV/m@3 m)	(dBuV/m@3 m)	(uV/m@3 m)	(dBuV/m@3 m)
433.92	11002.71	80.83	1100.27	60.83

### 2.2.2 General radiated emission limit

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency MHz	15.209 Limits (dBµV/m@3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

**TEST REPORT**

**2.3 Radiated emission test data FCC 15.231**

**2.3.1 Measurement results: Fundamental emission**

Temperature: 23 °C  
 Relative Humidity: 79 %  
 Test date: 2024/03/05

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polarization	Correction Factor (dB/m)	Reading (dBµV)	Corrected Reading (dBµV/m)	Limit @ 3 m (dBµV/m)	Margin (dB)
433.92	PK	H	25.43	42.56	67.99	100.83	-32.84
433.92	AV	H	-	-	59.71	80.83	-21.12
433.92	PK	V	25.43	59.87	85.30	100.83	-15.53
433.92	AV	V	-	-	77.02	80.83	-3.81

Remark: 1. Correction Factor = Antenna Factor + Cable Loss

2. AV Corrected Reading = PK Corrected Reading +Duty cycle correction factor (-8.82)

## TEST REPORT

### 2.3.2 Measurement results: frequencies equal to or less than 1 GHz

Temperature: 23 °C  
 Relative Humidity: 79 %  
 Test date: 2024/03/05

#### 9kHz – 30MHz

Antenna Polarization	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.519	PK	17.92	24.88	42.80	73.30	-30.50
Perpendicular	1.419	PK	17.96	19.21	37.17	64.56	-27.39
Perpendicular	1.808	PK	17.92	17.13	35.05	69.54	-34.49
Perpendicular	3.458	PK	18.18	13.33	31.51	69.54	-38.03
Perpendicular	6.937	PK	19.89	12.07	31.96	69.54	-37.58
Perpendicular	8.496	PK	19.69	11.51	31.20	69.54	-38.34

Remark: Corr. Factor = Antenna Factor + Cable Loss

Antenna Polarization	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.519	PK	17.92	25.11	43.03	73.30	-30.27
Parallel	1.329	PK	17.97	18.86	36.83	65.13	-28.30
Parallel	1.808	PK	17.92	17.00	34.92	69.54	-34.62
Parallel	3.188	PK	18.08	14.39	32.47	69.54	-37.07
Parallel	3.818	PK	18.33	13.48	31.81	69.54	-37.73
Parallel	4.568	PK	18.57	13.45	32.02	69.54	-37.52

Remark: Corr. Factor = Antenna Factor + Cable Loss

Antenna Polarization	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Ground-parallel	0.519	PK	17.92	25.07	42.99	73.30	-30.31
Ground-parallel	1.419	PK	17.96	19.34	37.30	64.56	-27.26
Ground-parallel	1.868	PK	17.91	17.35	35.26	69.54	-34.28
Ground-parallel	2.888	PK	17.99	13.96	31.95	69.54	-37.59
Ground-parallel	3.578	PK	18.23	13.82	32.05	69.54	-37.49
Ground-parallel	4.148	PK	18.44	13.66	32.10	69.54	-37.44

Remark: Corr. Factor = Antenna Factor + Cable Loss

## TEST REPORT

Temperature: 23 °C  
 Relative Humidity: 79 %  
 Test date: 2024/03/05

### 30MHz – 1GHz

Antenna Polarization	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	419.94	PK	24.72	4.04	28.76	46.00	-17.24
Horizontal	447.10	PK	25.71	4.73	30.44	46.00	-15.56
Horizontal	682.81	PK	30.19	2.66	32.85	46.00	-13.15
Horizontal	731.31	PK	30.89	2.82	33.71	46.00	-12.29
Horizontal	810.85	PK	32.15	2.18	34.33	46.00	-11.67
Horizontal	867.84	QP	32.76	8.70	41.46	46.00	-4.54

Remark: Corr. Factor = Antenna Factor + Cable Loss

Antenna Polarization	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	406.36	PK	24.30	13.03	37.33	46.00	-8.67
Vertical	419.94	PK	24.72	16.35	41.07	46.00	-4.93
Vertical	447.10	PK	25.71	18.81	44.52	46.00	-1.48
Vertical	460.68	PK	25.79	18.05	43.84	46.00	-2.16
Vertical	474.26	PK	26.00	10.52	36.52	46.00	-9.48
Vertical	867.84	PK	32.76	7.06	39.82	46.00	-6.18

Remark: Corr. Factor = Antenna Factor + Cable Loss

**TEST REPORT**

**2.3.3 Measurement results: frequency above 1GHz**

Temperature: 21 °C  
 Relative Humidity: 73 %  
 Test date: 2024/03/06

Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBµV)	Corrected Reading (dBµV/m)	Limit @ 3 m (dBµV/m)	Margin (dB)
1301.76	PK	H	-20.50	66.76	46.26	74.00	-27.74
1735.68	PK	H	-20.48	74.80	54.32	80.83	-26.51
1735.68	AV	H	---	---	46.04	60.83	-14.79
2169.60	PK	H	-16.74	77.95	61.21	80.83	-19.62
2169.60	AV	H	---	---	52.93	60.83	-7.90
2603.52	PK	H	-16.48	74.37	57.89	80.83	-22.94
2603.52	AV	H	---	---	49.61	60.83	-11.22
3037.44	PK	H	-14.36	60.57	46.21	80.83	-34.62
3905.28	PK	H	-12.05	67.58	55.53	74.00	-18.47
3905.28	AV	H	---	---	47.25	54.00	-6.75
4339.20	PK	H	-9.76	56.38	46.62	74.00	-27.38
1301.76	PK	V	-20.50	68.65	48.15	74.00	-25.85
1735.68	PK	V	-20.48	76.80	56.32	80.83	-24.51
1735.68	AV	V	---	---	48.04	60.83	-12.79
2169.60	PK	V	-16.74	80.07	63.33	80.83	-17.50
2169.60	AV	V	---	---	55.05	60.83	-5.78
2603.52	PK	V	-16.48	74.32	57.84	80.83	-22.99
2603.52	AV	V	---	---	49.56	60.83	-11.27
3037.44	PK	V	-14.36	67.33	52.97	80.83	-27.86
3471.36	PK	V	-14.18	54.45	40.27	80.83	-40.56
3905.28	PK	V	-12.05	67.75	55.70	74.00	-18.30
3905.28	AV	V	---	---	47.42	54.00	-6.58
4339.20	PK	V	-9.76	57.54	47.78	74.00	-26.22

Remark: 1. Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre\_Amplifier Gain  
 2. AV Corrected Reading = PK Corrected Reading +Duty cycle correction factor (-8.28)

## TEST REPORT


### 3. Measured bandwidth FCC 15.231(C)

Temperature: 19 °C  
 Relative Humidity: 61 %  
 Test date: 2024/03/07

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

Frequency (MHz)	20dB Occupied Bandwidth (MHz)	Limit (MHz)	Result
433.92	0.735	1.085	Pass

### 20dB Occupied Bandwidth

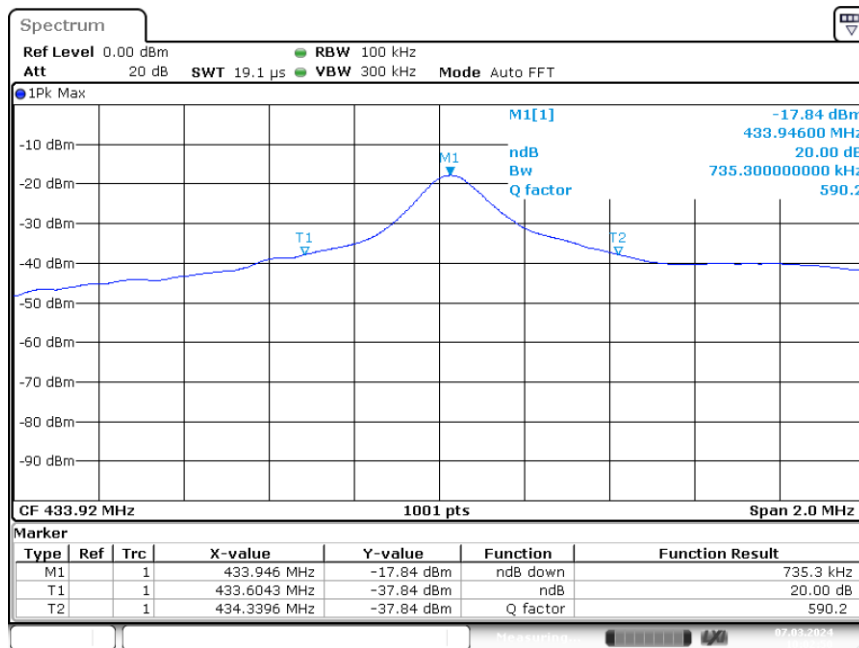

Date: 7.MAR.2024 10:02:50


### 4. Timing requirement of operated transmitter

Temperature: 19 °C  
 Relative Humidity: 61 %  
 Test date: 2024/03/07

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Frequency (MHz)	Transmission Time (s)	Limit (s)	Result
433.92	0.3500	< 5	Pass

### Transmitter Pulse Duration

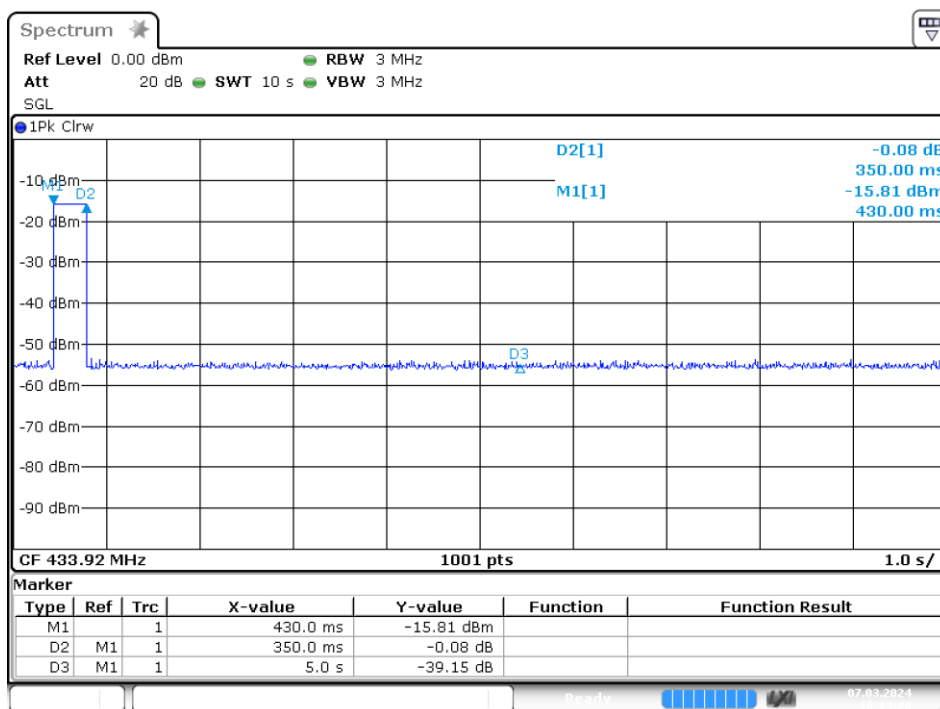

Date: 7.MAR.2024 10:14:20



**5. Conducted emission FCC 15.207**

Since the EUT is not connected to AC source, therefore, the test can be waived.

**Appendix A: Test equipment list**

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	R&S	ESR7	101822	2023/07/17	2024/07/16
Signal Analyzer	R&S	FSV40	101532	2023/08/03	2024/08/02
Singal Analyzer	Agilent	N9030A	MY51380492	2023/07/17	2024/07/16
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-067	2024/01/16	2025/01/15
Broadband Antenna	SCHWARZBECK	VULB 9168	9168-172	2024/01/02	2025/01/01
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-456	2023/12/27	2024/12/26
Pre-amplifier	SGH	SGH118(45dB)	20220105-1	2023/02/04	2024/02/03
966-2(A) Cable	SUHNER	SUCOFLEX 104	295105/4	2023/03/03	2024/03/01
966-2(B) Cable	SUHNER	SUCOFLEX 104P	CB0005	2023/03/03	2024/03/01
RF Cable	SUHNER	SUCOFLEX 104P	9403 / 4P	2023/11/24	2024/11/23
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2023/08/01	2024/07/31
Test software	Audix	e3	V9	NCR	NCR

Note: No Calibration Required (NCR).

**Appendix B: Measurement Uncertainty**

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of  $k=2$ .

<b>Item</b>	<b>Uncertainty</b>
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	2.73 dB
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	3.91 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	3.49 dB
Vertically polarized Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	3.71 dB
Horizontally polarized Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	3.71 dB
Conducted Measurement	0.69 dB
AC Conducted Emission	1.31 dB