



TEST REPORT

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0063
Page (1) of (15)



KCTL

1. Client

- Name : DT Systems Inc
- Address : 2872 Walnut Hill Lane, Dallas, Tx 75229, United States
- Date of Receipt : 2022-04-01

2. Use of Report : Certification

3. Name of Product / Model : Dog Training / DOGDirector700

4. Manufacturer / Country of Origin : EUNKI ELECTRONIC CO,LTD. / Korea



5. FCC ID : M8YDOG700

6. Date of Test : 2022-04-07

7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing (Address:65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

8. Test method used : FCC Part 15 Subpart C, 15.227



9. Test Result : Refer to the test result in the test report

| | | |
|-------------|---|---|
| Affirmation | Tested by | Technical Manager |
| | Name : Euijung Kim  (Signature) | Name : Heesu Ahn  (Signature) |

2022-05-03

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

| | | |
|---|---|---|
| KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr | Report No.: KR22-SRF0063 Page (2) of (15) |   |
|---|---|---|

REPORT REVISION HISTORY

| Date | Revision | Page No |
|------------|-------------------|---------|
| 2022-05-03 | Originally issued | - |
| | | |
| | | |
| | | |
| | | |

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

CONTENTS

| | | |
|------|---|----|
| 1. | General information | 4 |
| 2. | Device information | 4 |
| 2.1. | Information about derivative model..... | 5 |
| 2.2. | Frequency/channel operations..... | 5 |
| 3. | Antenna requirement | 5 |
| 4. | Summary of tests | 6 |
| 5. | Measurement uncertainty | 7 |
| 6. | Test results | 8 |
| 6.1. | 20 dB Bandwidth..... | 8 |
| 6.2. | Radiated spurious emissions..... | 10 |
| 7. | Measurement equipment..... | 15 |

1. General information

Client : DT Systems Inc
 Address : 2872 Walnut Hill Lane, Dallas, Tx 75229, United States
 Manufacturer : EUNKI ELECTRONIC CO.,LTD.
 Address : 80 Jomaru-ro 385gil, Bucheon-city, Gyeonggi-do, 14558, Chunui-Techno Tower Room #812, Korea
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
 CAB Identifier: KR0040, ISED Number: 8035A
 KOLAS No.: KT231

2. Device information

Equipment under test : Dog Training
 Model : DOGDirector700
 Derivative Model : DD700, FFH700, CC700
 Modulation technique : FSK
 Number of channels : 1 ch
 Frequency range : 27.095 MHz
 Power source : DC 9 V
 Antenna specification : Dipole antenna
 Antenna gain : N/A
 Software version : V2.00
 Hardware version : V1.1
 Test device serial No. : N/A
 Operation temperature : -20 °C ~ 50 °C

2.1. Information about derivative model

The difference between basic model and derivative models is:

The basic model is DOGDirector700, and simplified derivation based on model name of each buyers.

The variant models are DD700, FFH700, CC700. The H/W version and PCB design are same. And the other thing is the same.

The difference description between models is shown in the table below.

| Product name | Model name | Basic model | Derivative model | Difference |
|--------------|----------------|-------------|------------------|-----------------------|
| Dog Training | DOGDirector700 | O | - | - |
| | DD700 | - | O | Simplified derivation |
| | FFH700 | - | O | Simplified derivation |
| | CC700 | - | O | Simplified derivation |

2.2. Frequency/channel operations

This device contains the following capabilities:

NFC

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 01 | 27.095 |

Table 2.2.1. NFC

3. Antenna requirement

Requirement of FCC part section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitters use dipole antennas with unique antenna connector.
 (Refer to "External photos_DOGDirector700" 4~5 page)

4. Summary of tests

| FCC Part section(s) | Parameter | Test Condition | Test results |
|---------------------|------------------------|----------------|-----------------------|
| 15.227 15.209 | Radiated Emission | Radiated | Pass |
| 15.215(c) | 20 dB Bandwidth | Conducted | Pass |
| 15.207(a) | AC Conducted emissions | | NA ^(note2) |

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The conducted limits are not required for devices which only employ battery power for operation.
3. These tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
4. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation
5. The test procedure(s) in this report were performed in accordance as following.
 - ♦ ANSI C63.10-2013

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.


| Parameter | Expanded uncertainty (\pm) | |
|-----------------------------|--------------------------------|--------|
| Radiated spurious emissions | 9 kHz ~ 30 MHz | 2.4 dB |
| | 30 MHz ~ 1 000 MHz | 2.3 dB |
| Conducted emissions | 9 kHz ~ 150 kHz | 1.6 dB |
| | 150 kHz ~ 30 MHz | 1.7 dB |



6. Test results

6.1. 20 dB Bandwidth

Test setup



Limit

According to §15.215(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test procedure

ANSI C63.10 - Section 6.9.2

Test settings

The spectrum analyzer connected receive antenna and the EUT placed on near the receive antenna. The RBW is set to 10 kHz. The VBW is set to 3 times the RBW. The sweep time is coupled.

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0063
Page (9) of (15)



Test results


| Frequency [MHz] | 20 dB Bandwidth [MHz] | | Limit [MHz] | 20 dB Bandwidth [kHz] |
|-----------------|-----------------------|-----------|-------------|-----------------------|
| 27.095 | Lowest Frequency | 27.079 37 | 26.960 00 | 30.39 |
| | Highest Frequency | 27.109 76 | 27.280 00 | |

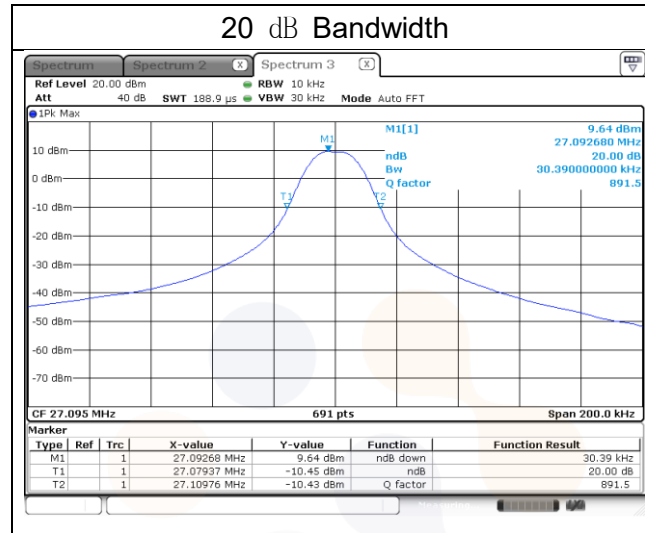


6.2. Radiated spurious emissions

Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

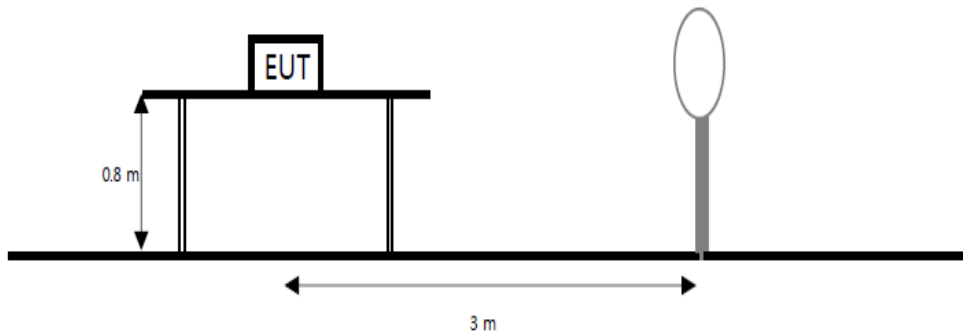

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

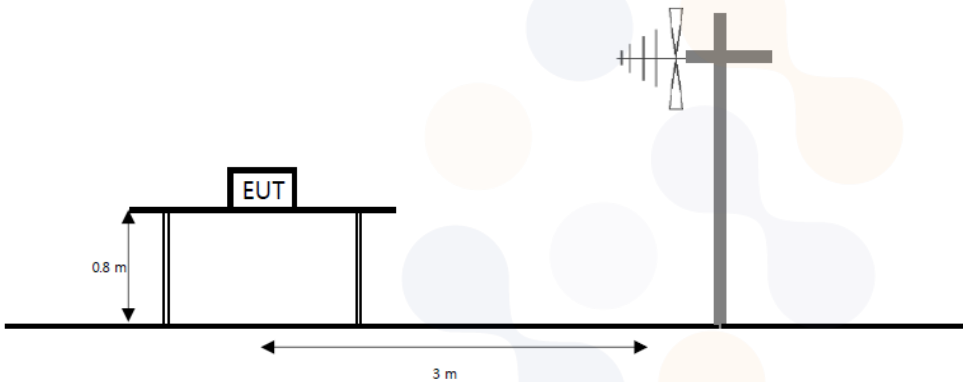

Limit

15.227 (a) The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in § 15.35 for limiting peak emissions apply.

15.227 (b) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in § 15.209.

| Frequency (MHz) | Field Strength ($\mu V/m$) | Measurement distance (meters) |
|-----------------|--------------------------------|-------------------------------|
| 0.009-0.490 | $2400/F(\text{kHz})$ | 300 |
| 0.490-1.705 | $24000/F(\text{kHz})$ | 30 |
| 1.705-30.0 | $30(29.54 \text{ dB}\mu V/m)$ | 30 |
| 30.0-88.0 | $100(40 \text{ dB}\mu V/m)$ | 3 |
| 88-216 | $150(43.5 \text{ dB}\mu V/m)$ | 3 |
| 216-960 | $200(46 \text{ dB}\mu V/m)$ | 3 |
| Above 960 | $500(53.98 \text{ dB}\mu V/m)$ | 3 |

Test procedure

ANSI C63.10-2013 - Section 6.4, 6.5

Test settings

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW $\geq 3 \times$ RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table. RBW as a function of frequency

| Frequency | RBW |
|---------------------|--------------------|
| 9 kHz to 150 kHz | 200 Hz to 300 Hz |
| 0.15 MHz to 30 MHz | 9 kHz to 10 kHz |
| 30 MHz to 1 000 MHz | 100 kHz to 120 kHz |
| > 1 000 MHz | 1 MHz |

Notes:

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
2. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in § 15.31(f)(2). Extrapolation Factor = $40 \log_{10}(30/3) = 40$ dB.
3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. Result = Reading + Cable loss + Amp gain + Ant. factor - Distance factor
5. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
6. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector.
7. Below 30 MHz frequency range, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported and the worse orientations of Face-on and Face-off were set for final test.
8. Face-on = Parallel, Face-off = Perpendicular
9. ¹⁾ means restricted band
10. ²⁾ means band edge


Test results for fundamental
15.227 (a) 26.96-27.28 MHz

[Face-on]

| Frequency | Reading | Antenna Factor | Amp. + Cable | Distance Factor | Result | Limit | Margin |
|---------------------|----------|----------------|--------------|-----------------|------------|------------|--------|
| (MHz) | (dB(μV)) | (dB) | (dB) | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB) |
| Peak data | | | | | | | |
| 27.10 | 88.20 | 20.51 | -30.51 | 40.00 | 38.20 | 100.00 | 61.80 |
| Average data | | | | | | | |
| 27.10 | 87.00 | 20.51 | -30.51 | 40.00 | 37.00 | 80.00 | 43.00 |

[Face-off]

| Frequency | Reading | Antenna Factor | Amp. + Cable | Distance Factor | Result | Limit | Margin |
|---------------------|----------|----------------|--------------|-----------------|------------|------------|--------|
| (MHz) | (dB(μV)) | (dB) | (dB) | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB) |
| Peak data | | | | | | | |
| 27.09 | 78.10 | 20.51 | -30.51 | 40.00 | 28.10 | 100.00 | 71.90 |
| Average data | | | | | | | |
| 27.09 | 77.30 | 20.51 | -30.51 | 40.00 | 27.30 | 80.00 | 52.70 |

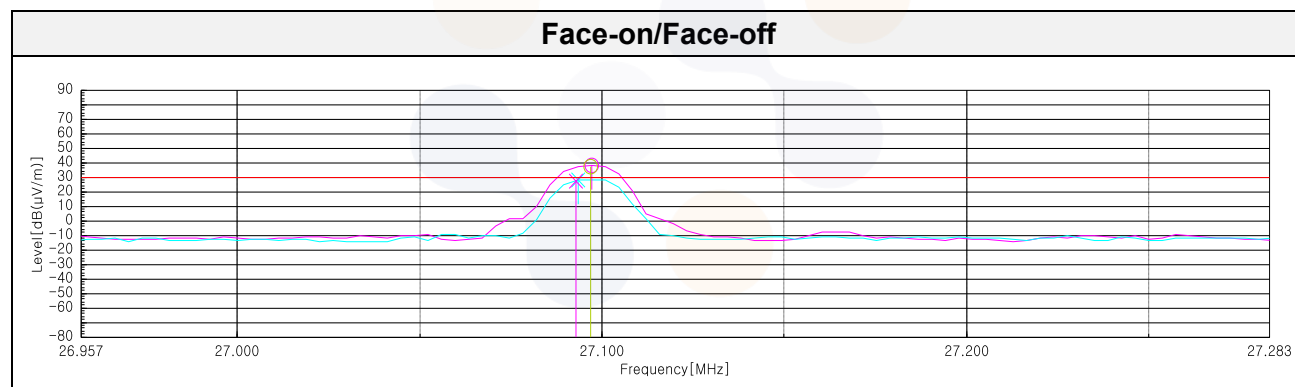

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0063
Page (13) of (15)



Test results (9 kHz to 30 MHz)

15.227 (b), 15.209 0.009-30 MHz


[Face-on]

| Frequency | Reading | Antenna Factor | Amp. + Cable | Distance Factor | Result | Limit | Margin |
|---------------------|----------|----------------|--------------|-----------------|------------|------------|--------|
| (MHz) | (dB(μV)) | (dB) | (dB) | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB) |
| Quasi peak data | | | | | | | |
| 24.52 | 58.30 | 20.78 | -30.61 | 40.00 | 8.47 | 29.50 | 21.03 |
| 25.81 | 54.10 | 20.69 | -30.52 | 40.00 | 4.27 | 29.50 | 25.23 |
| 26.86 ²⁾ | 33.10 | 20.54 | -30.52 | 40.00 | -16.88 | 29.50 | 46.38 |
| 27.35 ²⁾ | 30.10 | 20.47 | -30.49 | 40.00 | -19.92 | 29.50 | 49.42 |
| 29.68 | 44.10 | 20.14 | -30.41 | 40.00 | -6.17 | 29.50 | 35.67 |


[Face-off]

| Frequency | Reading | Antenna Factor | Amp. + Cable | Distance Factor | Result | Limit | Margin |
|---------------------|----------|----------------|--------------|-----------------|------------|------------|--------|
| (MHz) | (dB(μV)) | (dB) | (dB) | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB) |
| Quasi peak data | | | | | | | |
| 21.94 | 40.10 | 20.68 | -30.69 | 40.00 | -9.91 | 29.50 | 39.41 |
| 25.34 | 47.70 | 20.75 | -30.55 | 40.00 | -2.10 | 29.50 | 31.60 |
| 25.81 | 47.80 | 20.69 | -30.52 | 40.00 | -2.03 | 29.50 | 31.53 |
| 26.95 ²⁾ | 29.20 | 20.53 | -30.52 | 40.00 | -20.79 | 29.50 | 50.29 |
| 27.36 ²⁾ | 29.80 | 20.47 | -30.49 | 40.00 | -20.22 | 29.50 | 49.72 |

Face-on/Face-off (Band edge)

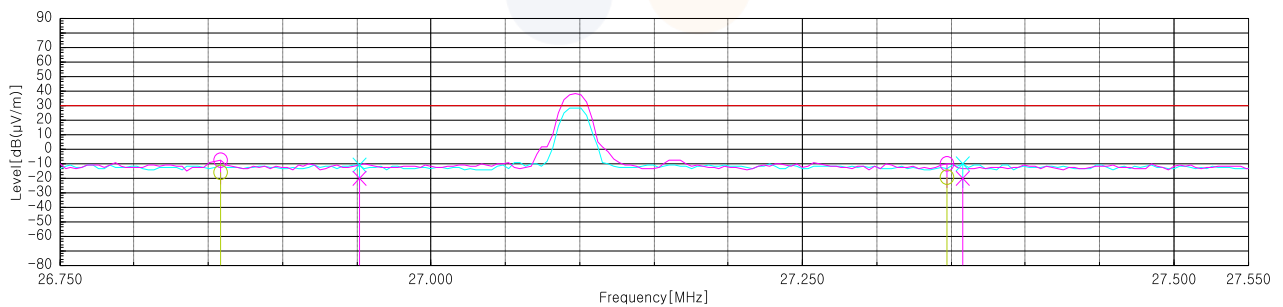

Face-on/Face-off

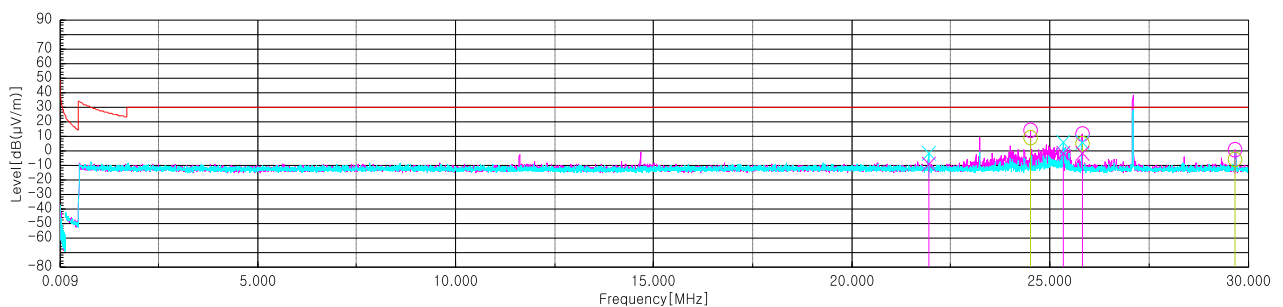


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0063
Page (14) of (15)

**Test results (Below 1 000 MHz)****15.227 (b), 15.209 30-1 000 MHz**

| Frequency | Pol. | Reading | Antenna Factor | Amp. + Cable | Distance Factor | Result | Limit | Margin |
|------------------------|-------|----------|----------------|--------------|-----------------|------------|------------|--------|
| (MHz) | (V/H) | (dB(μV)) | (dB) | (dB) | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB) |
| Quasi peak data | | | | | | | | |
| 54.13 | V | 42.20 | 12.79 | -29.82 | - | 25.17 | 40.00 | 14.83 |
| 81.29 | H | 35.30 | 13.16 | -29.14 | - | 19.32 | 40.00 | 20.68 |
| 243.76 ¹⁾ | H | 30.40 | 17.63 | -26.48 | - | 21.55 | 46.00 | 24.45 |
| 270.92 ¹⁾ | H | 30.70 | 18.84 | -26.18 | - | 23.36 | 46.00 | 22.64 |
| 325.12 ¹⁾ | H | 29.10 | 19.50 | -25.49 | - | 23.11 | 46.00 | 22.89 |
| 352.16 | H | 28.50 | 20.34 | -25.09 | - | 23.75 | 46.00 | 22.25 |
| 541.92 | H | 29.40 | 23.95 | -23.14 | - | 30.21 | 46.00 | 15.79 |
| 623.16 | V | 36.10 | 24.64 | -22.36 | - | 38.38 | 46.00 | 7.62 |
| 731.55 | V | 36.70 | 25.23 | -21.39 | - | 40.54 | 46.00 | 5.46 |
| 758.71 | V | 36.00 | 25.63 | -21.16 | - | 40.47 | 46.00 | 5.53 |
| 785.75 | V | 35.10 | 25.63 | -20.86 | - | 39.87 | 46.00 | 6.13 |
| 812.79 | V | 32.30 | 25.84 | -20.59 | - | 37.55 | 46.00 | 8.45 |

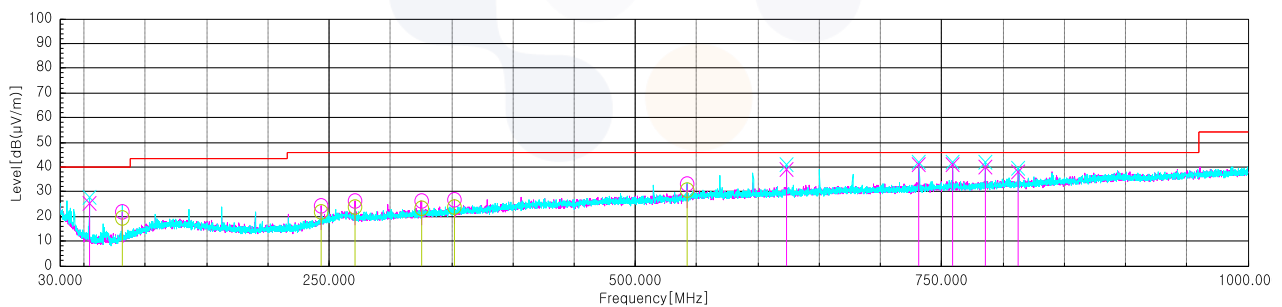Horizontal/Vertical

7. Measurement equipment

| Equipment Name | Manufacturer | Model No. | Serial No. | Next Cal. Date |
|----------------------------|----------------------|-----------|-----------------|----------------|
| Spectrum Analyzer | R&S | FSV40 | 100989 | 22.12.21 |
| EMI TEST RECEIVER | R&S | ESC17 | 100732 | 23.01.19 |
| Bi-Log Antenna | TESEQ | CBL 6112D | 55545 | 23.01.14 |
| Amplifier | SONOMA INSTRUMENT | 310N | 284608 | 22.08.19 |
| LOOP Antenna | R&S | HFH2-Z2 | 100355 | 22.08.21 |
| Antenna Mast | Innco Systems | MA4000-EP | 303 | N/A |
| Turn Table | Innco Systems | CO3000 | 1175/45850319/P | N/A |
| Vector Signal Generator | R&S | SMBV100A | 257566 | 22.07.09 |
| Signal Generator | R&S | SMB100A | 176206 | 23.01.19 |

End of test report