

Annex 3 Photo documentation

Picture no. 1

Measurement System DASY 4



Picture no. 2

DUT - front view



Picture no. 3

DUT - rear view



Picture no. 4

DUT - rear view (open)



Picture no. 5

DUT (side view)




Picture no. 6

battery



Picture no. 7

test position right hand touched

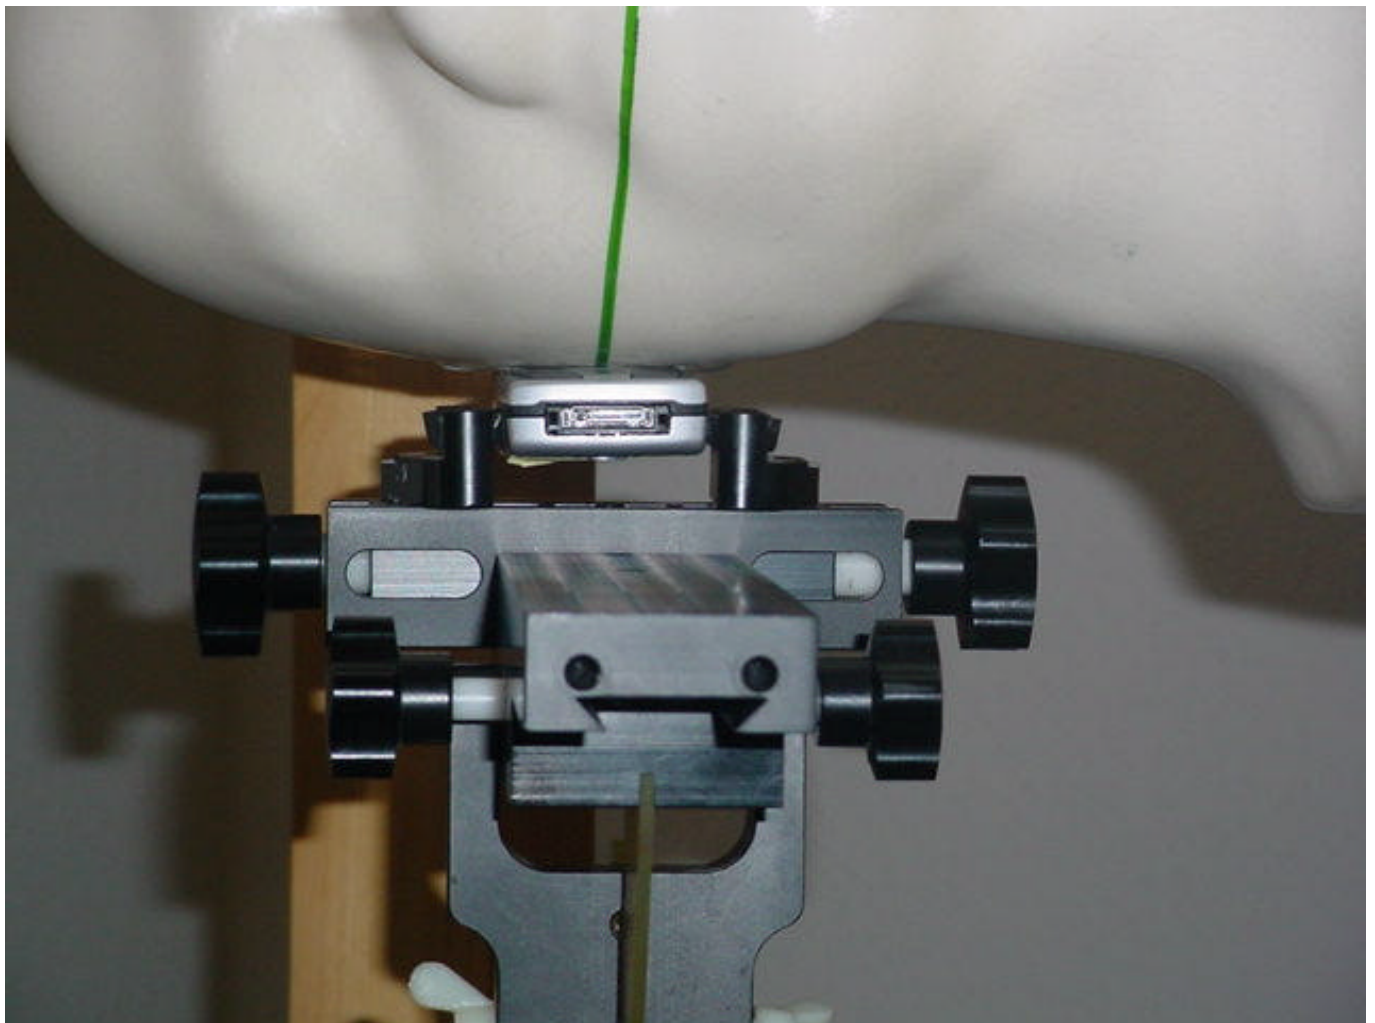

Picture no. 8

test position right hand touched




Picture no. 9

test position right hand touched



Picture no. 10

test position right hand tilted 15°

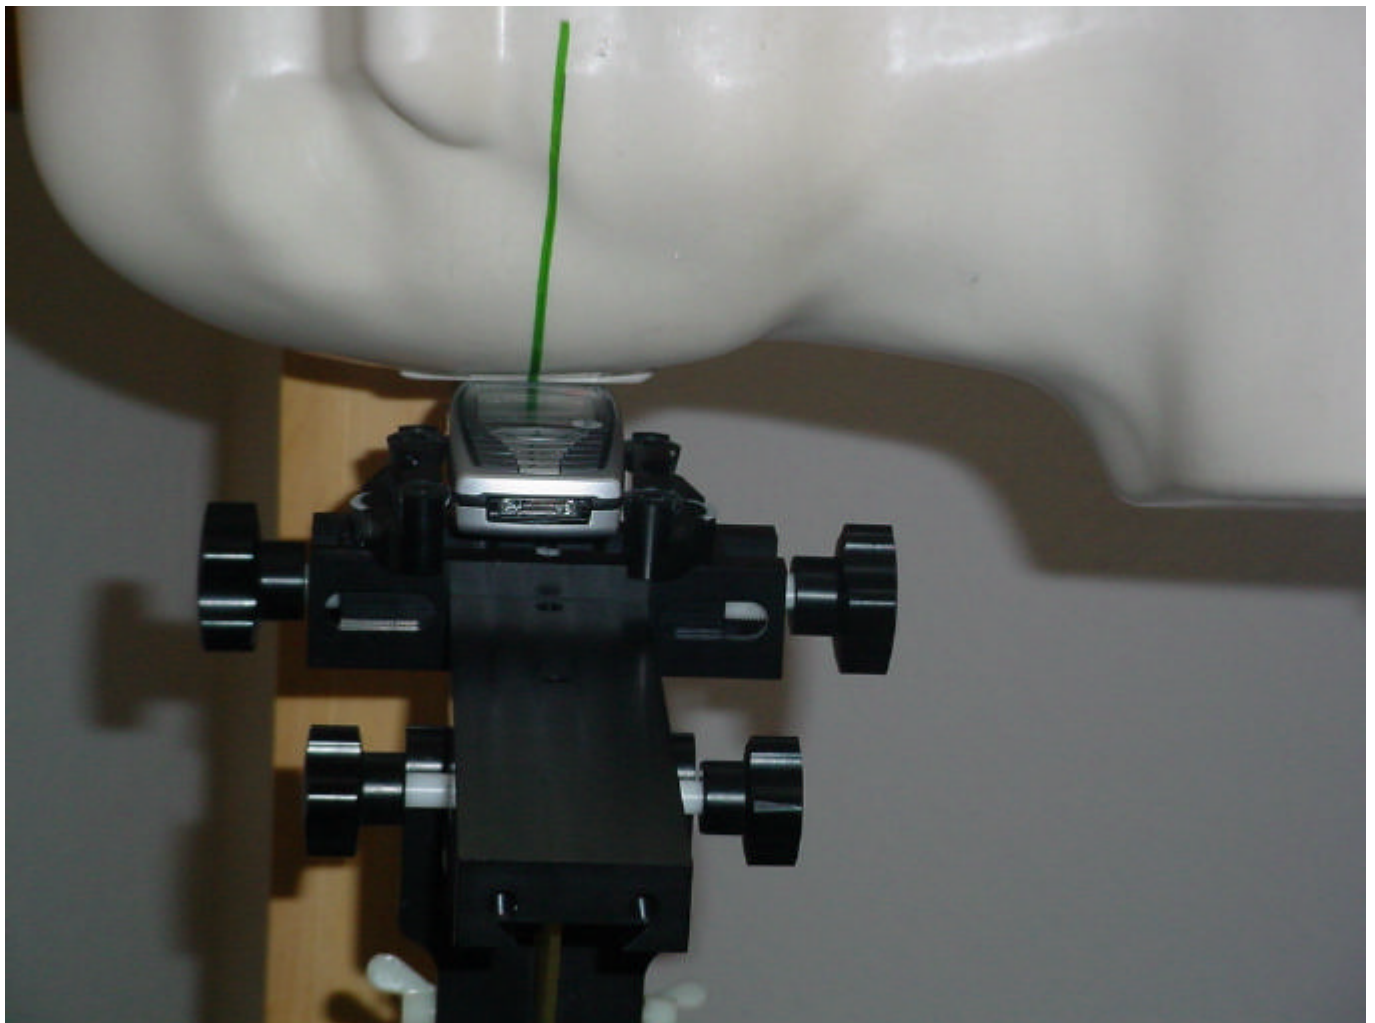


Picture no. 11

test position right hand tilted 15°



Picture no. 12

test position left hand touched

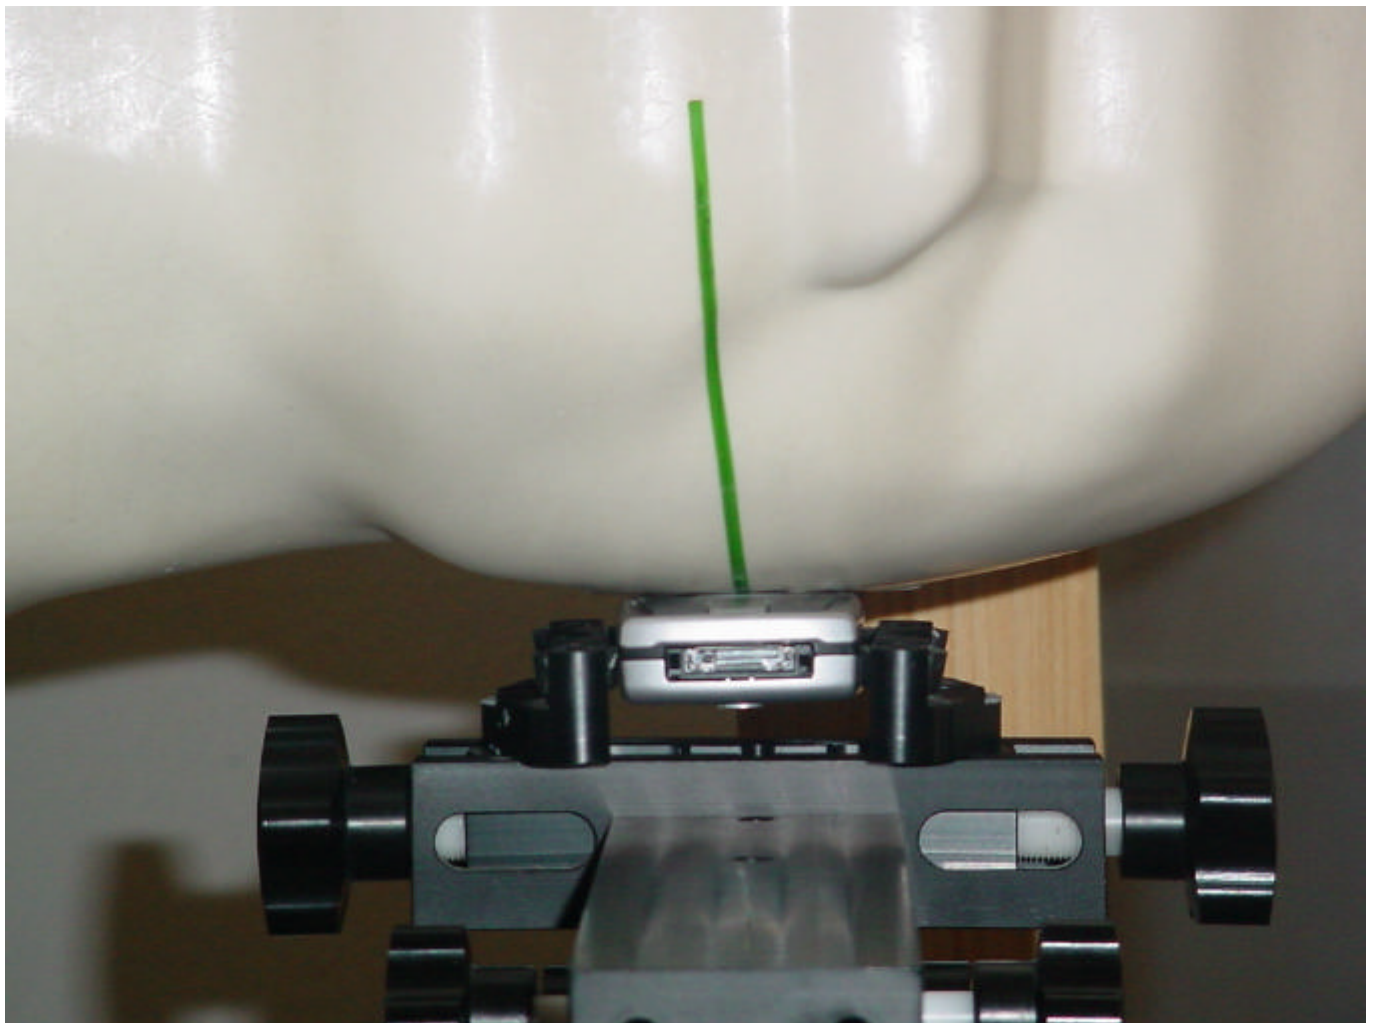

Picture no. 13

test position left hand touched




Picture no. 14

test position left hand touched



Picture no. 15

test position left hand tilted 15°

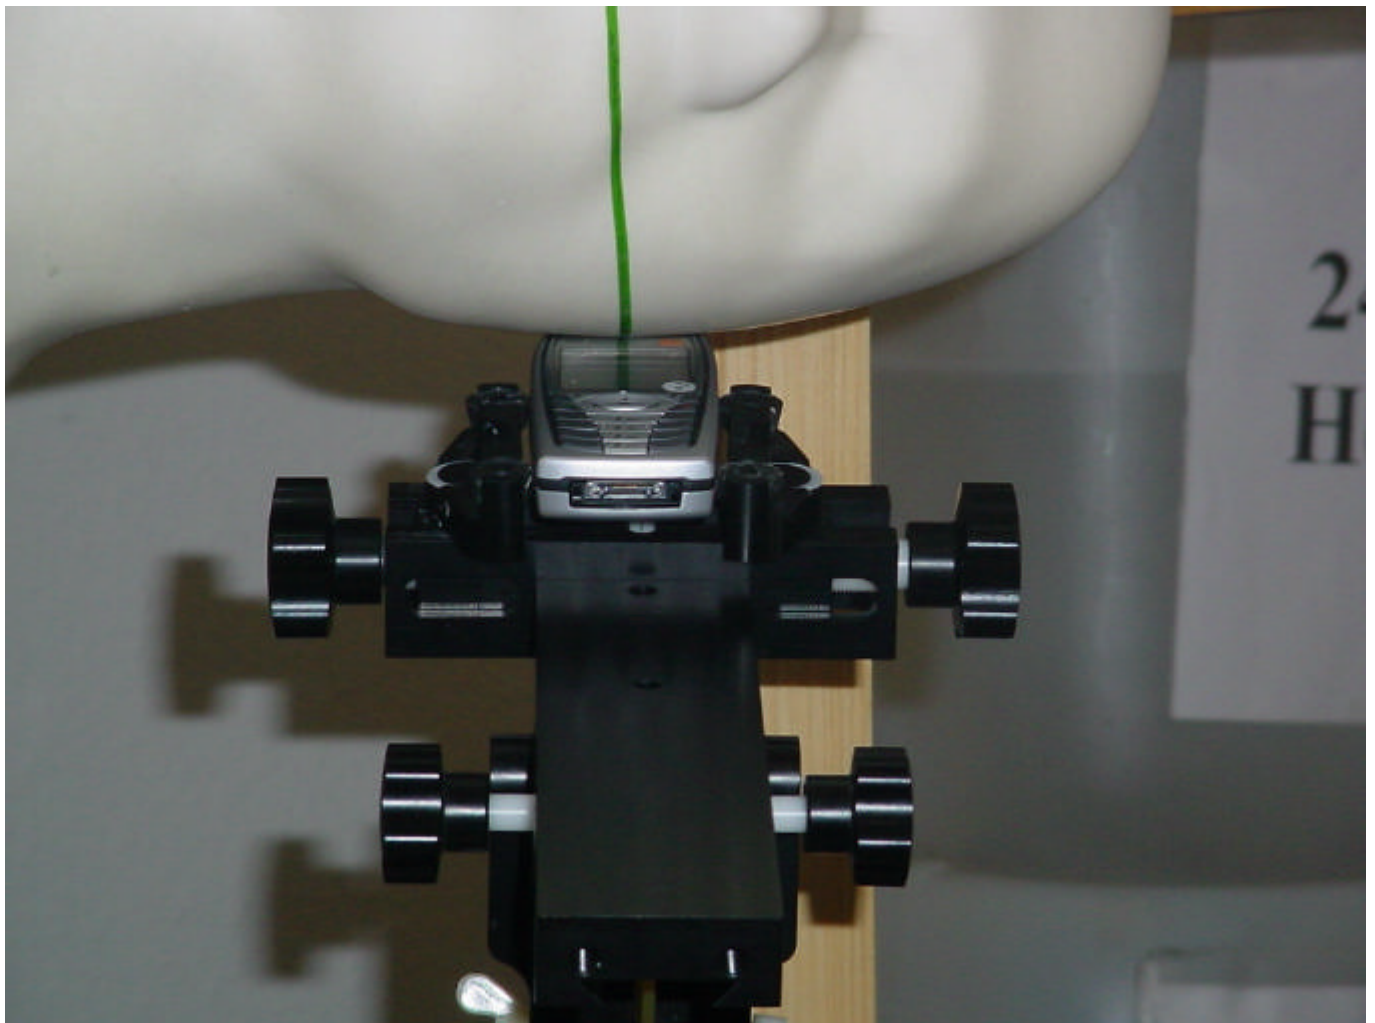


Picture no. 16

test position left hand tilted 15°



Picture no. 17

test position body worn - front side (15 mm distance)

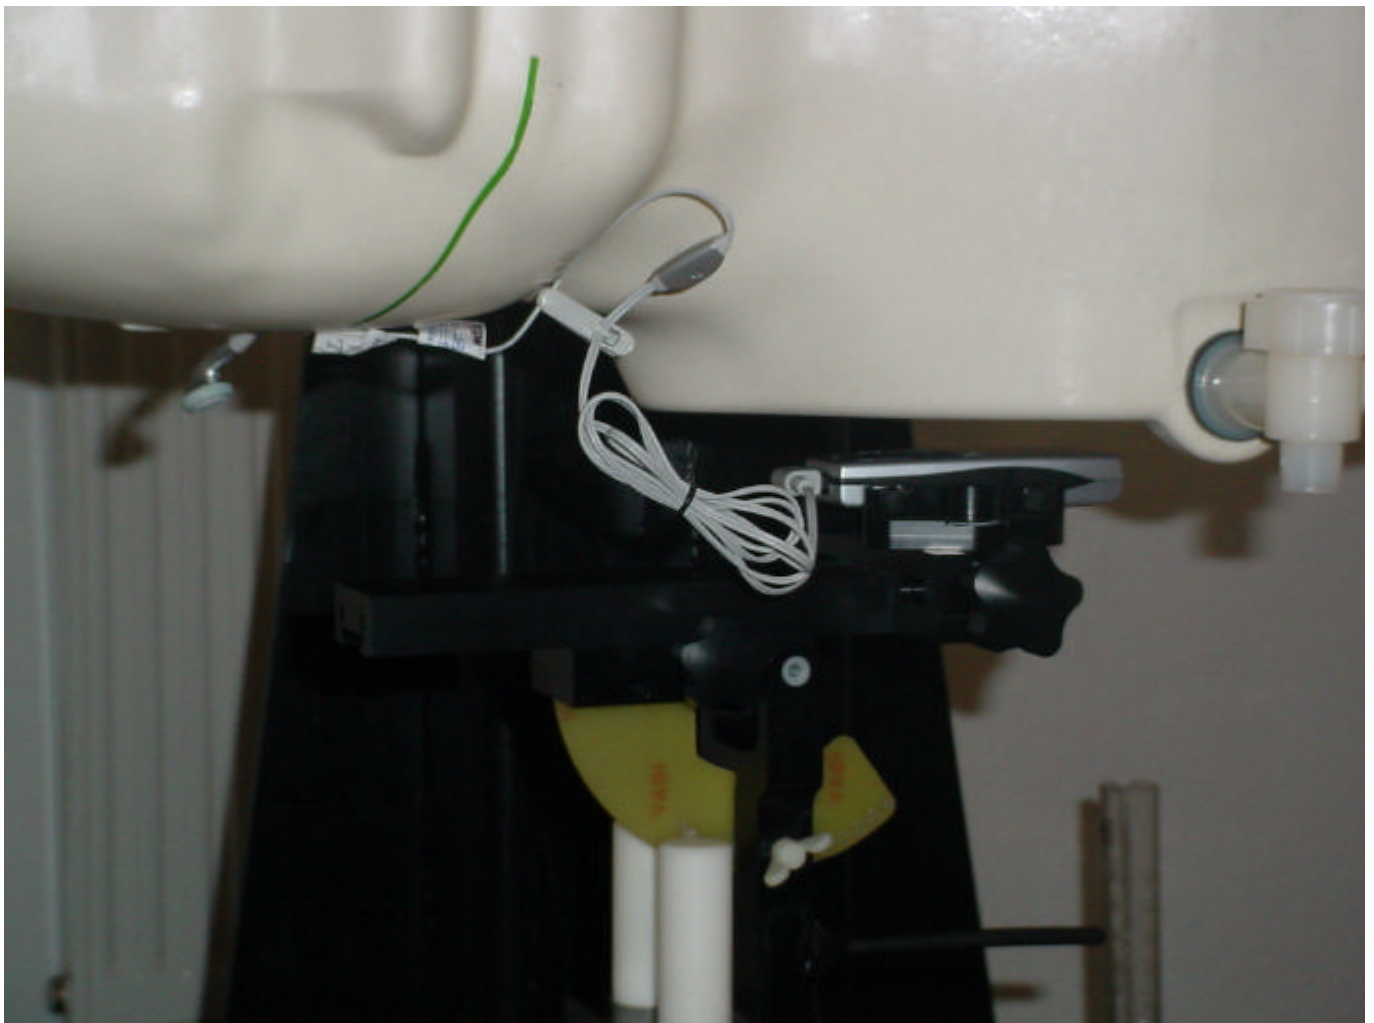


Picture no. 18

test position body worn - front side (15 mm distance), close view



Picture no. 19

test position body worn - front side (15 mm distance)

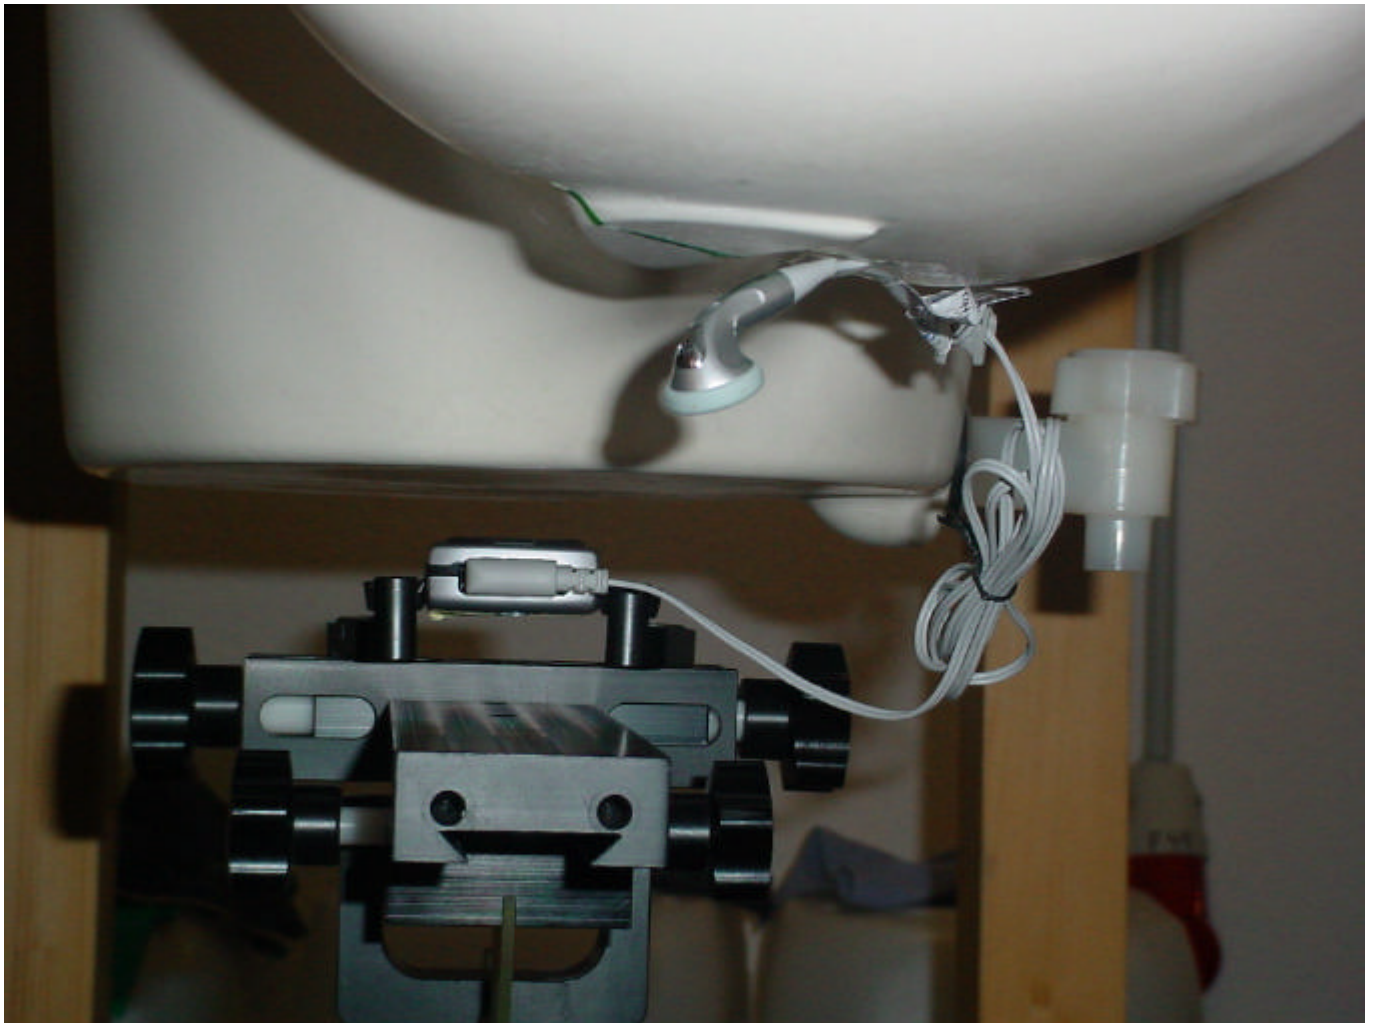


Picture no. 20

test position body worn - rear side (15 mm distance), close view




Picture no. 21

test position body worn - rear side (15 mm distance)

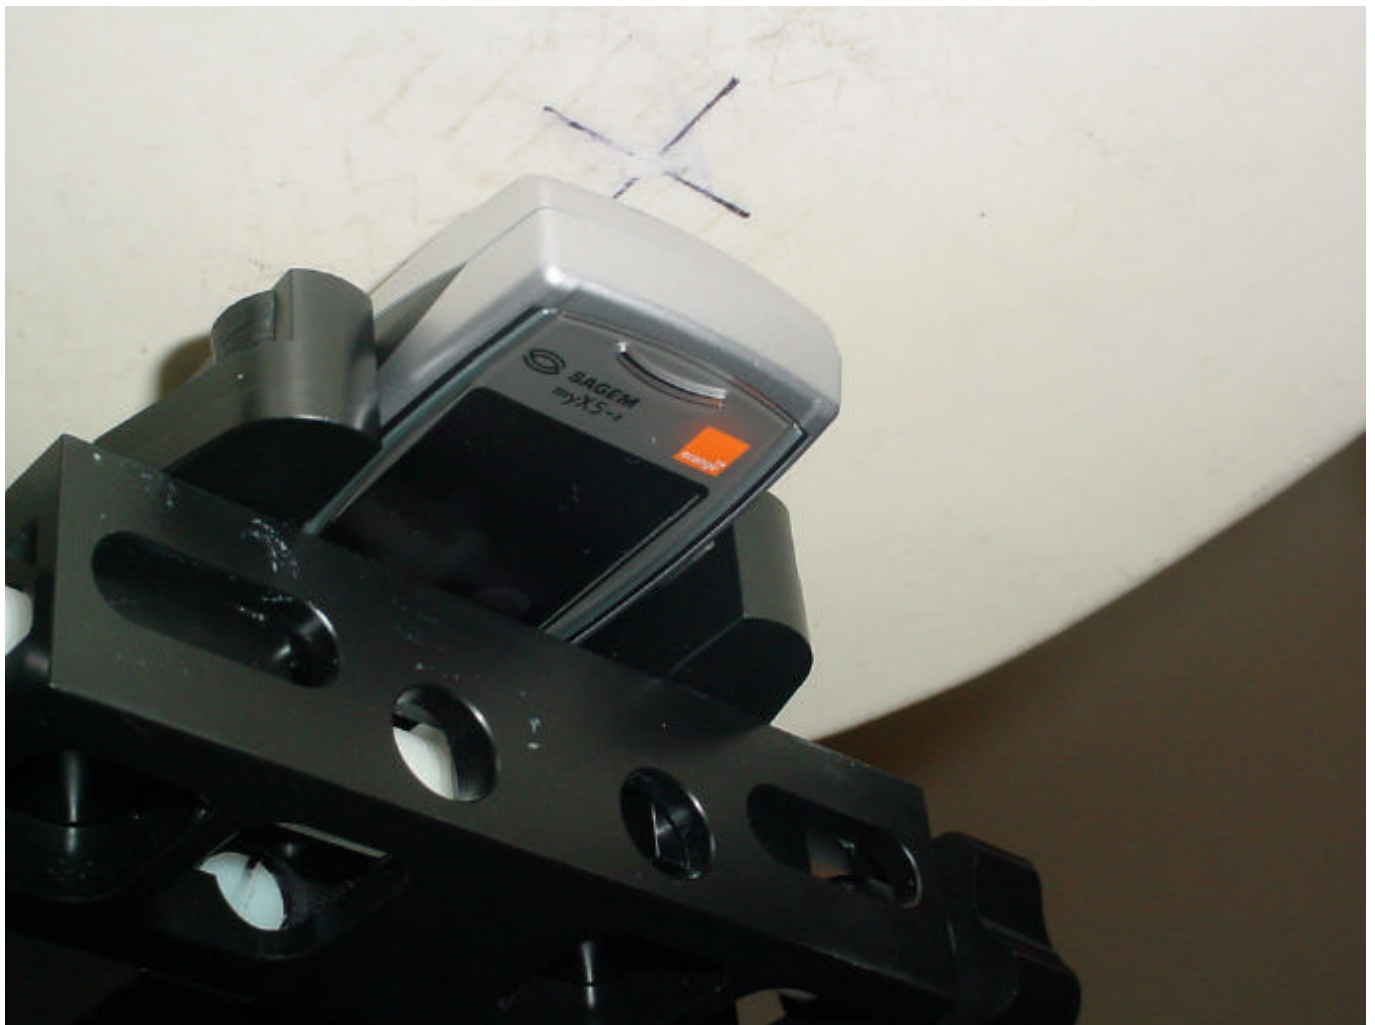


Picture no. 22

liquid depth 1900 MHz body simulating liquid

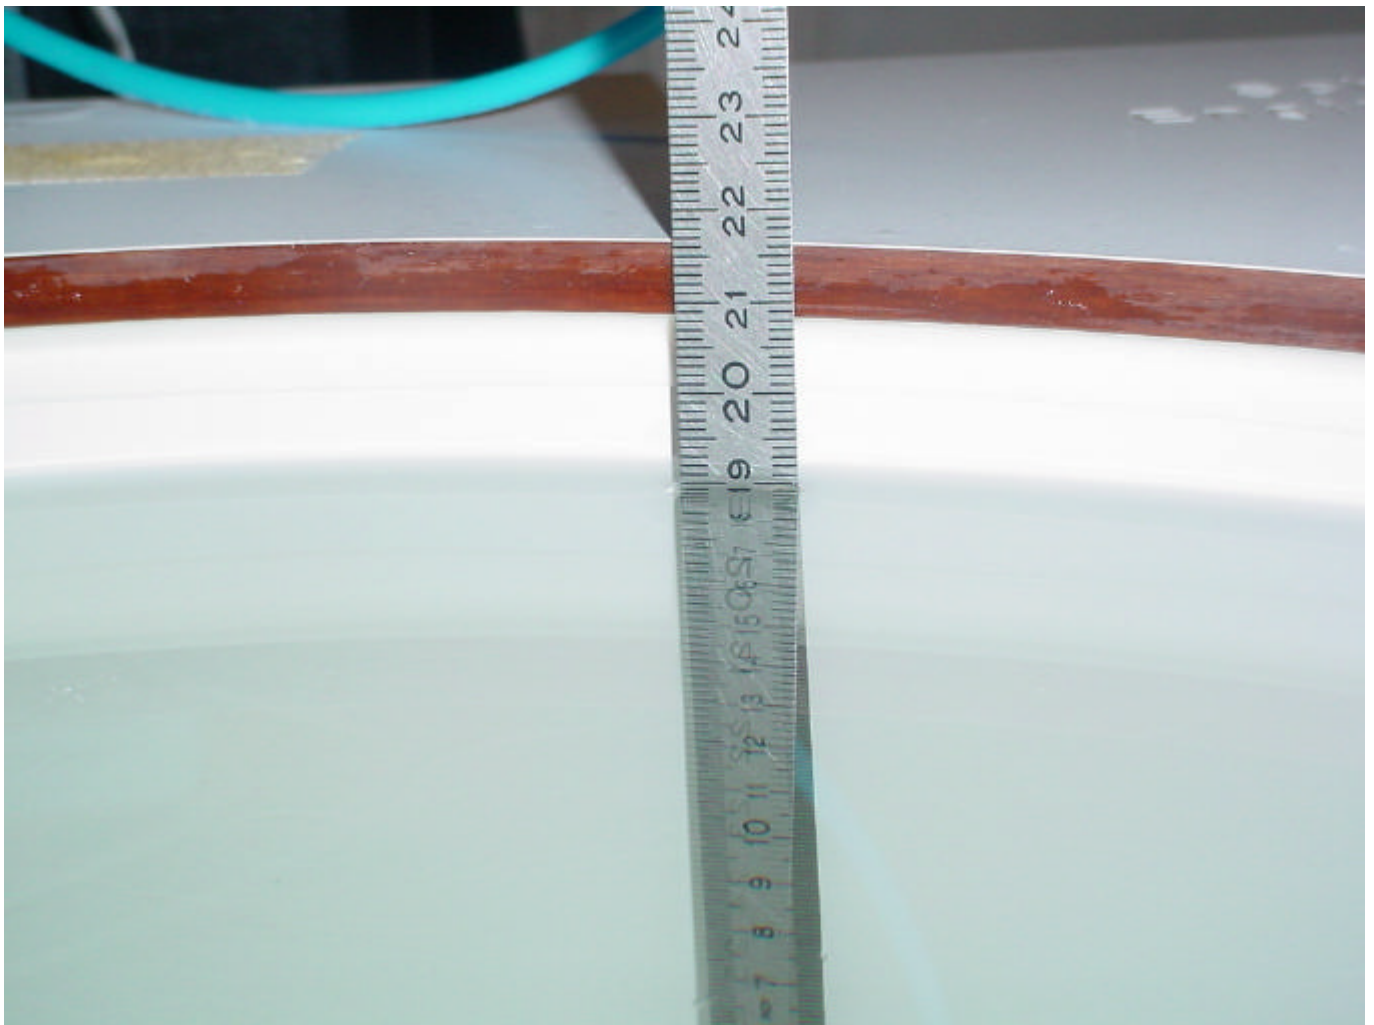


Picture no. 23

liquid depth 1900 MHz head simulating liquid

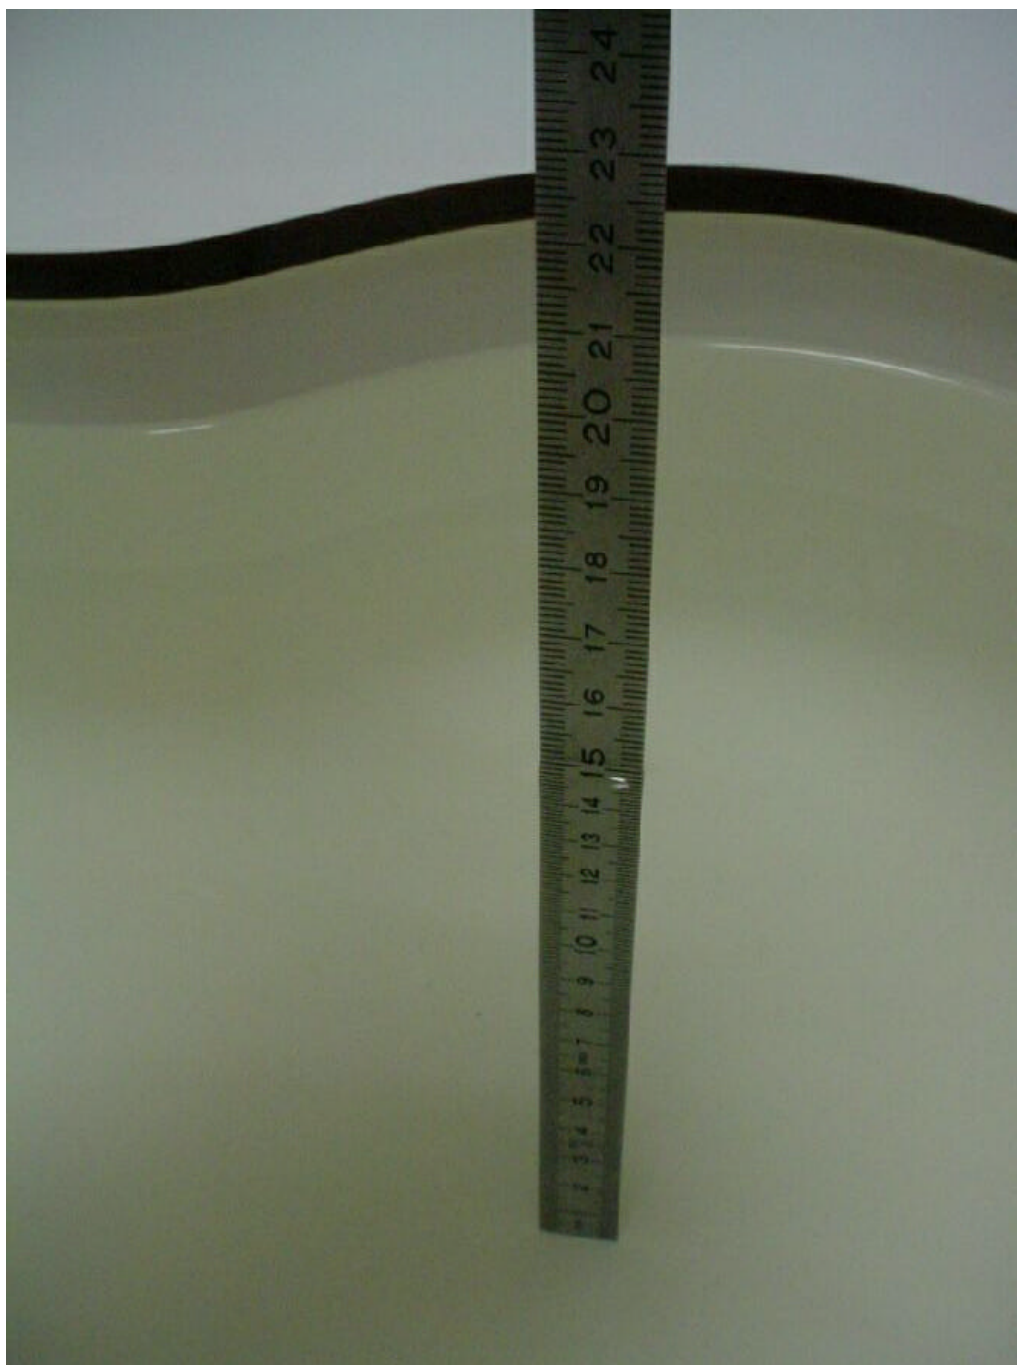


Picture no. 24

liquid depth 850 MHz body simulating liquid

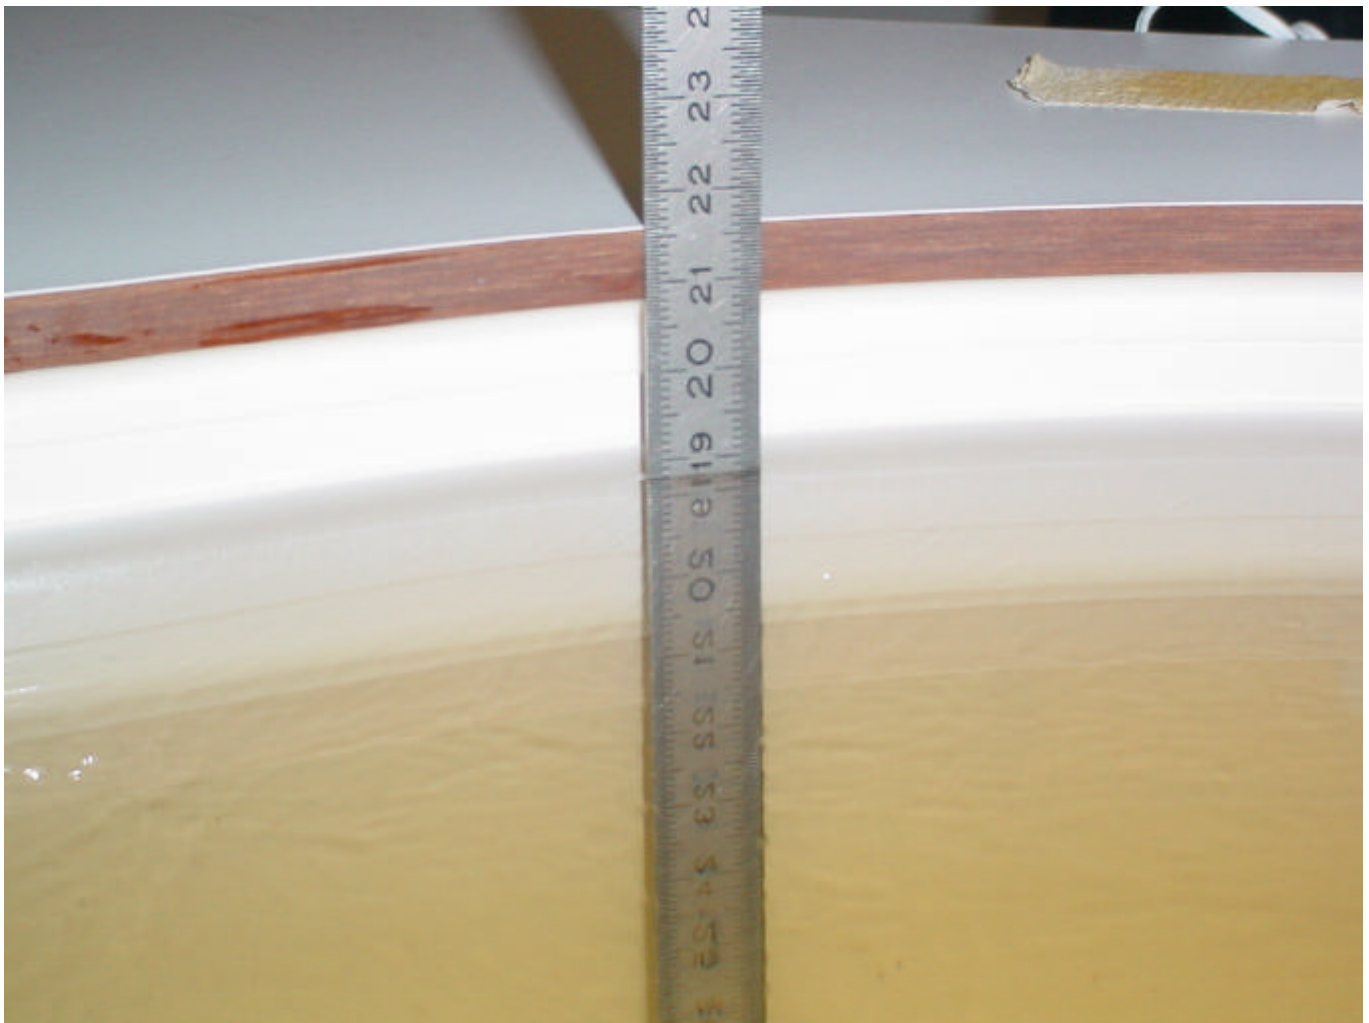

Picture no. 25

liquid depth 850 MHz head simulating liquid

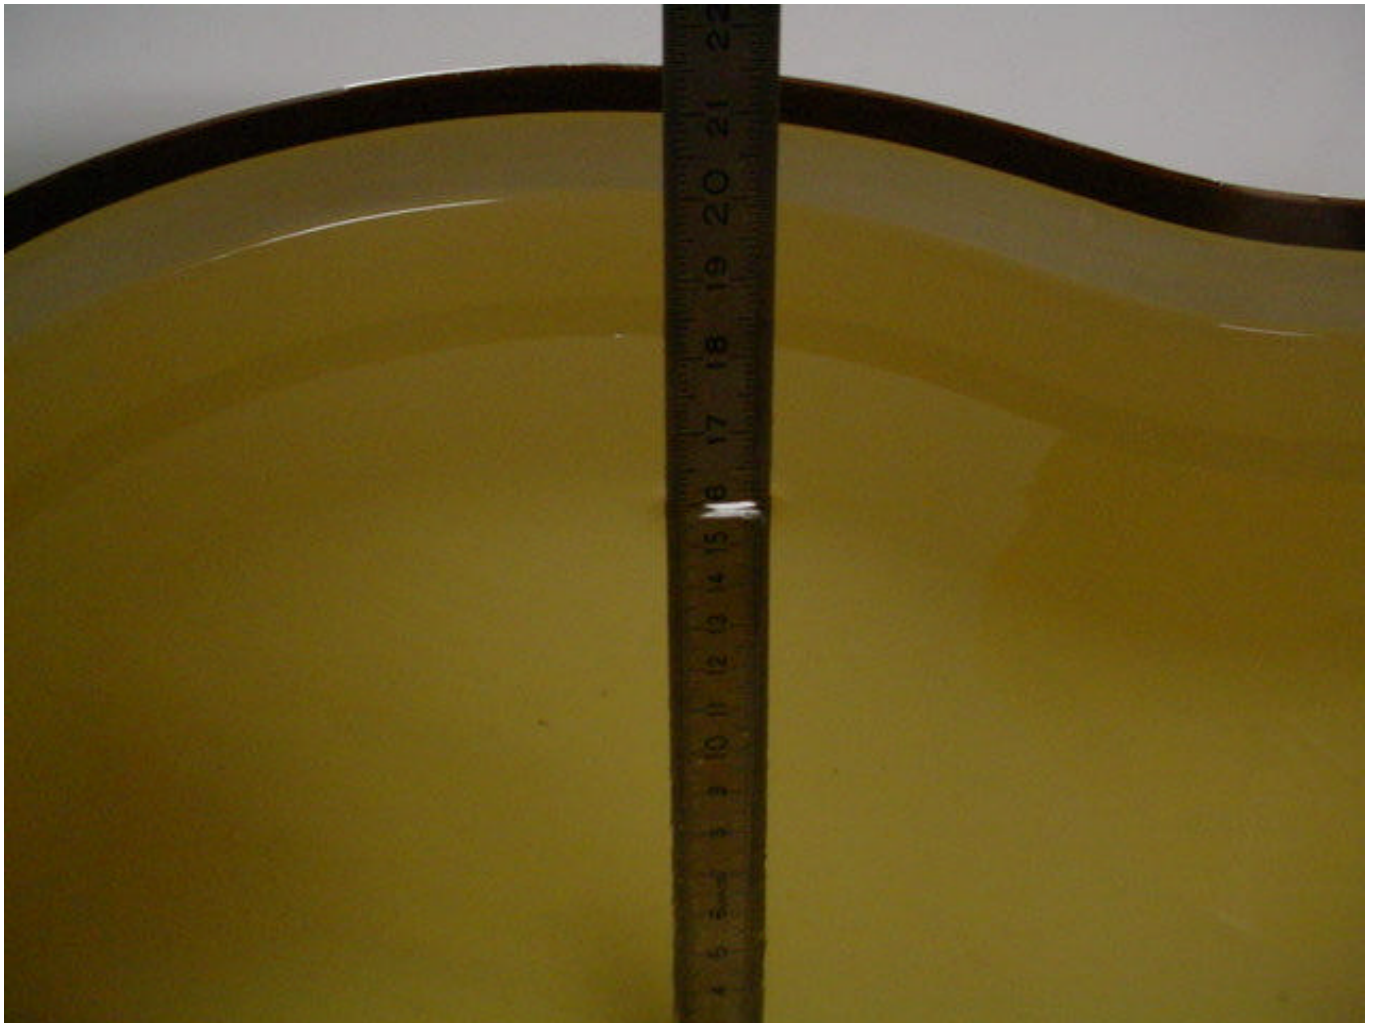

Annex 4 Calibration parameters of E-field probe

Calibration parameters are described in the additional document

**‘ Calibration data and Phantom information for test report no. 4-1220-02-02/04-C’,
provided together with this document.**