

Recognized by the  
Federal Communications Commission  
**Anechoic chamber registration no.: 90462 (FCC)**  
**Anechoic chamber registration no.: 3463 (IC)**  
TCB ID: DE 0001



Accredited by the  
German Accreditation Council  
DAR-Registration Number  
DAT-P-176/94-D1



Independent ETSI  
compliance test house



## Accredited Bluetooth® Test Facility (BQTF)

|                             |          |                            |
|-----------------------------|----------|----------------------------|
| <b>Test report no.</b>      | <b>:</b> | <b>4-1567-22-15/05</b>     |
| <b>Applicant</b>            | <b>:</b> | <b>Sagem Communication</b> |
| <b>Type</b>                 | <b>:</b> | <b>MU2005 Lesly</b>        |
| <b>Test Sta</b>             | <b>:</b> | <b>FCC Part 15.247</b>     |
|                             |          | <b>RSS210</b>              |
| <b>FCC ID</b>               | <b>:</b> | <b>M9HMU2005L</b>          |
| <b>Certification No. IC</b> | <b>:</b> |                            |

## **Table of contents**

|                                                                                       |           |
|---------------------------------------------------------------------------------------|-----------|
| <b>1. ADMINISTRATIVE DATA .....</b>                                                   | <b>3</b>  |
| 1.1. ADMINISTRATIVE DATA OF THE TEST FACILITY .....                                   | 3         |
| 1.1.1 Identification of the testing laboratory .....                                  | 3         |
| 1.1.2 Organizational items.....                                                       | 3         |
| 1.1.3 Applicant's details .....                                                       | 4         |
| 1.2 ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER .....                                | 4         |
| 1.3 DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT) .....                               | 5         |
| 1.3.1 EUT: Type, S/N etc. ....                                                        | 5         |
| 1.3.2 If RF component testing only, description of additional used HW/SW .....        | 5         |
| 1.3.3 Additional EUT information for IC Canada (appendix 2).....                      | 6         |
| 1.3.4 EUT operating modes .....                                                       | 7         |
| 1.3.5 Extreme conditions testing values.....                                          | 7         |
| <b>2. TESTSTANDARD &amp; SUMMARY LIST OF ALL PERFORMED TEST CASES .....</b>           | <b>8</b>  |
| <b>3. RF MEASUREMENT TESTING .....</b>                                                | <b>9</b>  |
| 3.1 DESCRIPTION OF TEST SET-UP .....                                                  | 9         |
| 3.1.1 Radiated measurements .....                                                     | 9         |
| 3.1.2 Conducted measurements .....                                                    | 9         |
| 3.2 REFERENCED DOCUMENTS.....                                                         | 10        |
| 3.3 ADDITIONAL COMMENTS .....                                                         | 10        |
| 3.4 ANTENNA GAIN .....                                                                | 10        |
| 3.5 CARRIER FREQUENCY SEPARATION §15.247(A)(1) .....                                  | 11        |
| 3.6 NUMBER OF HOPPING CHANNELS §15.247(A)(1).....                                     | 12        |
| 3.7 TIME OF OCCUPANCY (DWELL TIME) §15.247(A)(1)(III).....                            | 14        |
| 3.8 POWER SPECTRAL DENSITY (HYBRID SYSTEM IN INQUIRY MODE/PAGE SCAN) §15.247(G) ..... | 15        |
| 3.9 SPECTRUM BANDWIDTH OF A FHSS SYSTEM / 20dB BANDWIDTH §15.247(A)(1).....           | 16        |
| 3.10 MAXIMUM OUTPUT POWER (CONDUCTED) § 15.247 (B) (1) .....                          | 19        |
| 3.11 MAX. PEAK OUTPUT POWER (RADIATED) § 15.247 (B) (1).....                          | 22        |
| 3.12 BAND-EDGE COMPLIANCE OF CONDUCTED EMISSIONS §15.247 (D) .....                    | 23        |
| 3.13 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS §15.205 .....                         | 26        |
| 3.14 SPURIOUS EMISSIONS - CONDUCTED (TRANSMITTER) § 15.247 (D) .....                  | 29        |
| 3.15 SPURIOUS EMISSIONS > 30 MHz- RADIATED (TRANSMITTER) § 15.247 (D) .....           | 32        |
| 3.16 SPURIOUS EMISSIONS - RADIATED (RECEIVER) § 15.109 .....                          | 37        |
| 3.17 SPURIOUS EMISSIONS < 30 MHz - TRANSMITTER RADIATED § 15.209 .....                | 39        |
| 3.17 SPURIOUS EMISSIONS < 30 MHz - TRANSMITTER RADIATED § 15.209 .....                | 39        |
| 3.18 CONDUCTED EMISSIONS <30 MHz § 15.107/207 .....                                   | 40        |
| <b>4. PHOTOGRAPHS OF TEST SET-UP .....</b>                                            | <b>44</b> |
| <b>5. PHOTOGRAPHS OF EUT .....</b>                                                    | <b>47</b> |

## **ANNEX 1: TECHNICAL PRODUCT DESCRIPTION**

## 1. Administrative data

### 1.1. Administrative data of the test facility

#### 1.1.1 Identification of the testing laboratory

|                                     |                                                                                                |
|-------------------------------------|------------------------------------------------------------------------------------------------|
| Company name:                       | Cetecom ICT Services GmbH                                                                      |
| Address:                            | Untertürkheimerstr. 6-10<br>D-66117 Saarbrücken<br>Germany                                     |
| Laboratory accreditation:           | DAR-Registration No. DAT-P-176/94-D1<br>Bluetooth Qualification Test Facility (BQTF)           |
| Responsible for testing laboratory: | Dirk Hausknecht<br>Phone: +49 681 598 0<br>Fax: +49 681 598 9075<br>email: info@ict.cetecom.de |



Responsible for testing  
(Michael Berg)

#### 1.1.2 Organizational items

|                                  |                          |
|----------------------------------|--------------------------|
| Reference No.:                   | 4-1567-22-15/05          |
| Order No.:                       |                          |
| Receipt of EUT:                  | 2005-09-26               |
| Date(s) of test:                 | 2005-09-27 to 2005-09-29 |
| Date of report:                  | 2005-09-28               |
| Number of report pages:          | 56                       |
| Number of diagram pages (annex): |                          |
| Version of template:             | 1.8                      |



Responsible for laboratory  
(Dirk Hausknecht)

## Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

### 1.1.3 Applicant's details

|                   |                                                                                                         |
|-------------------|---------------------------------------------------------------------------------------------------------|
| Applicant's name: | Sagem Communication                                                                                     |
| Address:          | 2, rue du Petit Albi<br>F-95800 Cergy Saint-Christophe<br>France                                        |
| Contact person:   | Mr. Jean Marquet<br>Phone: +33 1 58 11 90 90<br>Fax: +33 1 30 73 16 60<br>email: Jean.Marquet@sagem.com |

### 1.2 Administrative data of manufacturer / member

|                      |                                                                  |
|----------------------|------------------------------------------------------------------|
| Manufacturer's name: | Sagem Communication                                              |
| Address:             | 2, rue du Petit Albi<br>F-95800 Cergy Saint-Christophe<br>France |

## 1.3 Description of the Equipment under test (EUT)

### 1.3.1 EUT: Type, S/N etc.

Product name : MU2005 Lesly  
Product ID : MU2005 Lesly  
Description : UMTS / 900/1800/1900 Mobile Phone with Bluetooth®  
S/N serial number : 35736500000015-6 (cond.); 35679400000971-0  
HW hardware status : UBV0X  
SW software status : L5.5A  
Frequency Band [MHz] : ISM 2.400 - 2483.5  
Type of Modulation : FHSS  
Number of channels : 79  
Antenna : Integrated antenna  
Power Supply : 3.9 V DC / 4.8 V DC Adapter  
Temperature Range : -10°C - +55°C

**Max. power radiated:** -9.77 dBm

**Max. power conducted:** -0.21 dBm

FCC ID: M9HMU2005L

IC: -.-

### 1.3.2 If RF component testing only, description of additional used HW/SW

|   | Product name | Product ID | Description | S/N<br>serial number | HW<br>hardware status | SW<br>software<br>status |
|---|--------------|------------|-------------|----------------------|-----------------------|--------------------------|
| 1 | none         |            |             |                      |                       |                          |
| 2 |              |            |             |                      |                       |                          |
| 3 |              |            |             |                      |                       |                          |
| 4 |              |            |             |                      |                       |                          |

## 1.3.3 Additional EUT information for IC Canada (appendix 2)

|                                                    |                                               |
|----------------------------------------------------|-----------------------------------------------|
| Company Number:                                    | -.-                                           |
| Model Number:                                      | MU2005 Lesly                                  |
| Product Name:                                      |                                               |
| Manufacturer:                                      | Sagem Communication                           |
| Tested to Radio Standards Specification (RSS) No.: | RSS-210                                       |
| Open Area Test Site Industry Canada Number:        | 3463                                          |
| Frequency Range (or fixed frequency) [MHz]:        | 2402 – 2480 MHz                               |
| RF: Power [W] (max):                               | Rad. EIRP: -9.77 dBm<br>Conducted : -0.21 dBm |
| Antenna Type:                                      | Chip antenna                                  |
| Field Strength [dBµV/m in 3m]:                     |                                               |
| Occupied Bandwidth (99% BW) [kHz]:                 | 918.4                                         |
| Type of Modulation:                                | FSK                                           |
| Emission Designator (TRC-43):                      | 919KFXD                                       |
| Transmitter Spurious (worst case) [µV/m in 3m]:    | 128.5 (noise floor)                           |
| Receiver Spurious (worst case) [µV/m in 3m]:       | 137.9 (noise floor)                           |
| IC No. :                                           |                                               |

ATTESTATION: I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all the applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Date: 2005-09-28

Testengineer: Michael Berg

**1.3.4 EUT operating modes**

| EUT operating mode no. *) | Description of operating modes | Additional information                                                                                          |
|---------------------------|--------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Op. 0                     | Normal mode                    | Normal temperature and power source conditions, all tests were done with Sagem with AC/DC Adapter Typ PS53/1640 |
| Op. 1                     |                                |                                                                                                                 |
| Op. 2                     |                                |                                                                                                                 |
| Op. 3                     |                                |                                                                                                                 |
| Op. 4                     |                                |                                                                                                                 |

\*) EUT operating mode no. is used to simplify the testplan

**1.3.5 Extreme conditions testing values**

| Description                    | Shortcut         | Unit   | Value    |
|--------------------------------|------------------|--------|----------|
| Nominal Temperature / humidity | T <sub>nom</sub> | °C / % | +23 / 56 |
|                                |                  |        |          |
| Nominal Power Source           | V <sub>nom</sub> | V      | 3.9      |
|                                |                  |        |          |
| Type of powersource: V DC      |                  |        |          |

Deviations from this values are reported in chapter 2

## 2. Teststandard & summary list of all performed test cases

| TC identifier | Description                                   | verdict | date       | Remark |
|---------------|-----------------------------------------------|---------|------------|--------|
| RF-Testing    | FCC Part 15 §15.247<br>CANADA RSS-210 Issue 6 | PASS    | 2005-09-28 |        |

| Test Specification Clause | Test Case                                                        | Pass | Fail | Not applicable | Not performed |
|---------------------------|------------------------------------------------------------------|------|------|----------------|---------------|
| None                      | Antenna Gain                                                     | Yes  |      |                |               |
| §15.247(a)(1)             | Carrier frequency separation                                     | Yes  |      |                |               |
| §15.247(a)(1)             | Number of hopping channels                                       | Yes  |      |                |               |
| §15.247(a)(1)( iii)       | Time of occupancy (dwell time)                                   | Yes  |      |                |               |
| §15.247(e)                | Power Spectral density (Hybrid system in Inquiry mode/Page scan) | Yes  |      |                |               |
| §15.247(a)(1)             | Spectrum Bandwidth of a FHSS System / 20dB Bandwidth             | Yes  |      |                |               |
| § 15.247 (b) (1)          | Maximum output power (conducted)                                 | Yes  |      |                |               |
| § 15.247 (b) (1)          | Max. peak output power (radiated)                                | Yes  |      |                |               |
| §15.247 (d)               | Band-edge compliance of conducted emissions                      | Yes  |      |                |               |
| §15.205                   | Band-edge compliance of radiated emissions                       | Yes  |      |                |               |
| § 15.247 (d)              | Spurious Emission - conducted (Transmitter)                      | Yes  |      |                |               |
| § 15.247 (d)              | Spurious Emission - radiated (Transmitter) >30 MHz               | Yes  |      |                |               |
| § 15.109                  | Spurious Emissions - radiated (Receiver)                         | Yes  |      |                |               |
| § 15.209                  | Spurious Emissions - radiated (Transmitter) <30 MHz              | Yes  |      |                |               |
| § 15.107/207              | Conducted Emissions <30 MHz                                      | Yes  |      |                |               |



### 3. RF measurement testing

#### 3.1 Description of test set-up

##### 3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 150 MHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna


1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn

All measurements are done in accordance with the Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA 00-705 and Appendix A "BLUETOOTH APPROVALS"

The EUT is powered by an external power supply with nominal voltage. The signaling is performed from outside the chamber with a signaling unit (CMU200 or other) by airlink using signaling antenna.

##### 3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal path is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signaling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

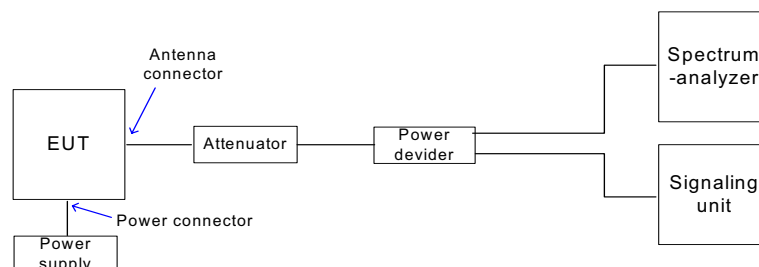

### 3.2 Referenced documents

none

### 3.3 Additional comments

Hardware / software changes during testing (only for pretesting)

| Setup revision | Description of change | Change referenced to setup revision | Already perf. testcases influenced yes (reapeted) / no |
|----------------|-----------------------|-------------------------------------|--------------------------------------------------------|
| 1.0            | Start setup           | -                                   | -                                                      |
|                |                       |                                     |                                                        |
|                |                       |                                     |                                                        |
|                |                       |                                     |                                                        |
|                |                       |                                     |                                                        |
|                |                       |                                     |                                                        |
|                |                       |                                     |                                                        |
|                |                       |                                     |                                                        |
|                |                       |                                     |                                                        |
|                |                       |                                     |                                                        |


### 3.4 Antenna gain

The antenna gain of the complete system is calculated by the difference of conducted power of the module and the radiated power in EIRP.

|                       | low channel | mid channel | high channel |
|-----------------------|-------------|-------------|--------------|
| Conducted power [dBm] | -0.55       | -0.21       | -0.64        |
| Radiated power [dBm]  | -9.77       | -10.42      | -10.81       |
| Gain [dB]             | -9.22       | -10.21      | -10.17       |

## 3.5 Carrier frequency separation §15.247(a)(1)

Plot 1 of 1:

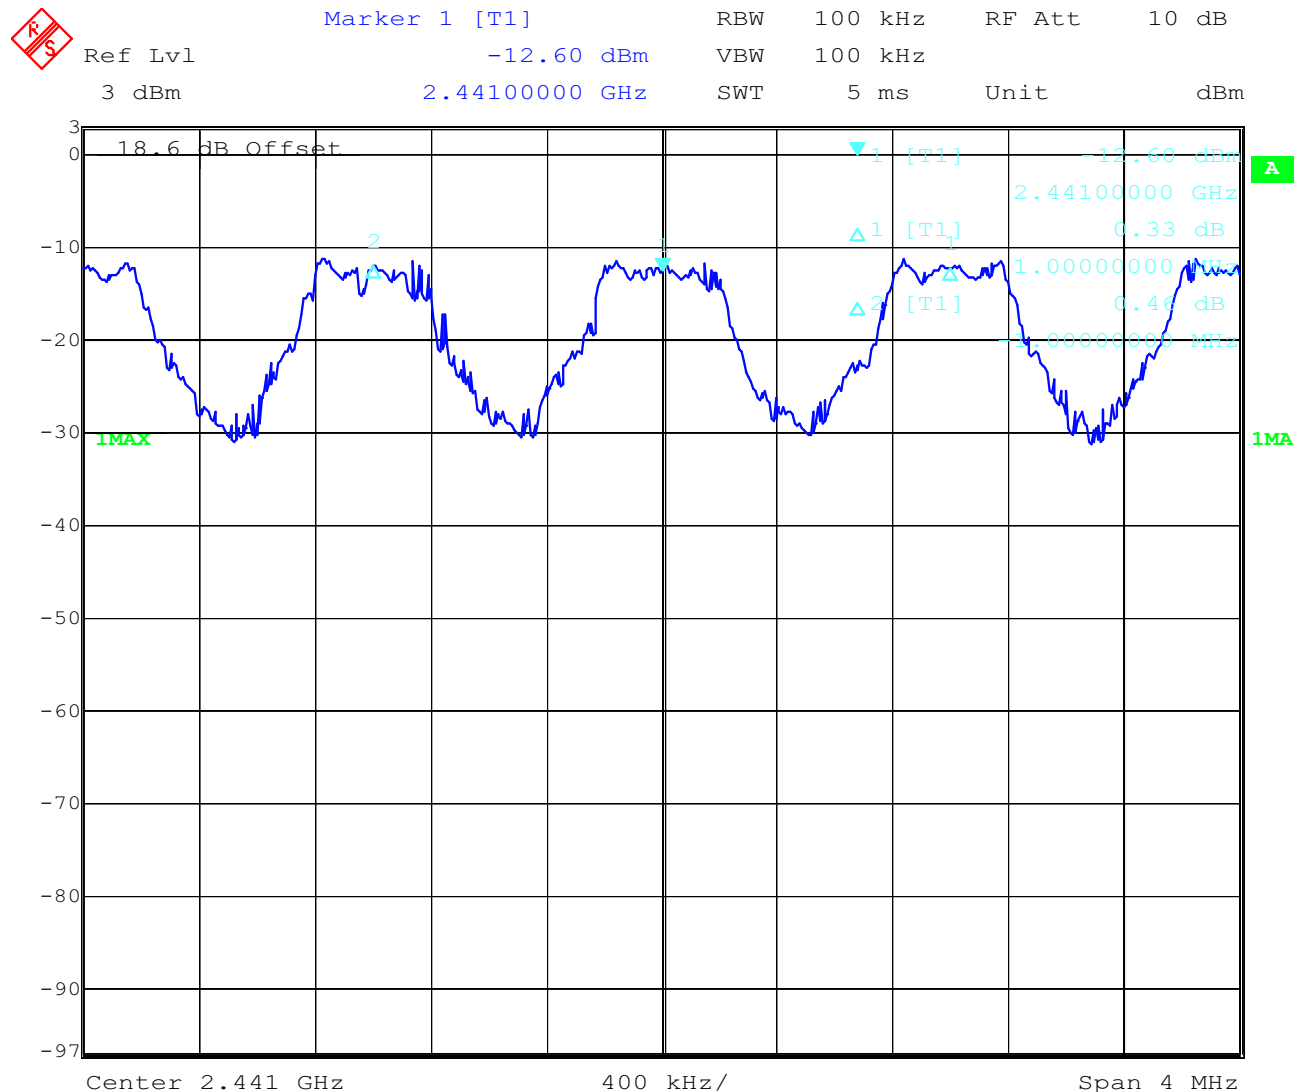

Date: 28.SEP.2005 13:38:29


Result : Channel separation is: ~ 1 MHz

Limits :

|                                   |                                                         |
|-----------------------------------|---------------------------------------------------------|
| Under normal test conditions only | Minimum 25 kHz or 20 dB Bandwidth of the hopping system |
|-----------------------------------|---------------------------------------------------------|


## 3.6 Number of hopping channels §15.247(a)(1)

Plot 1 of 2:

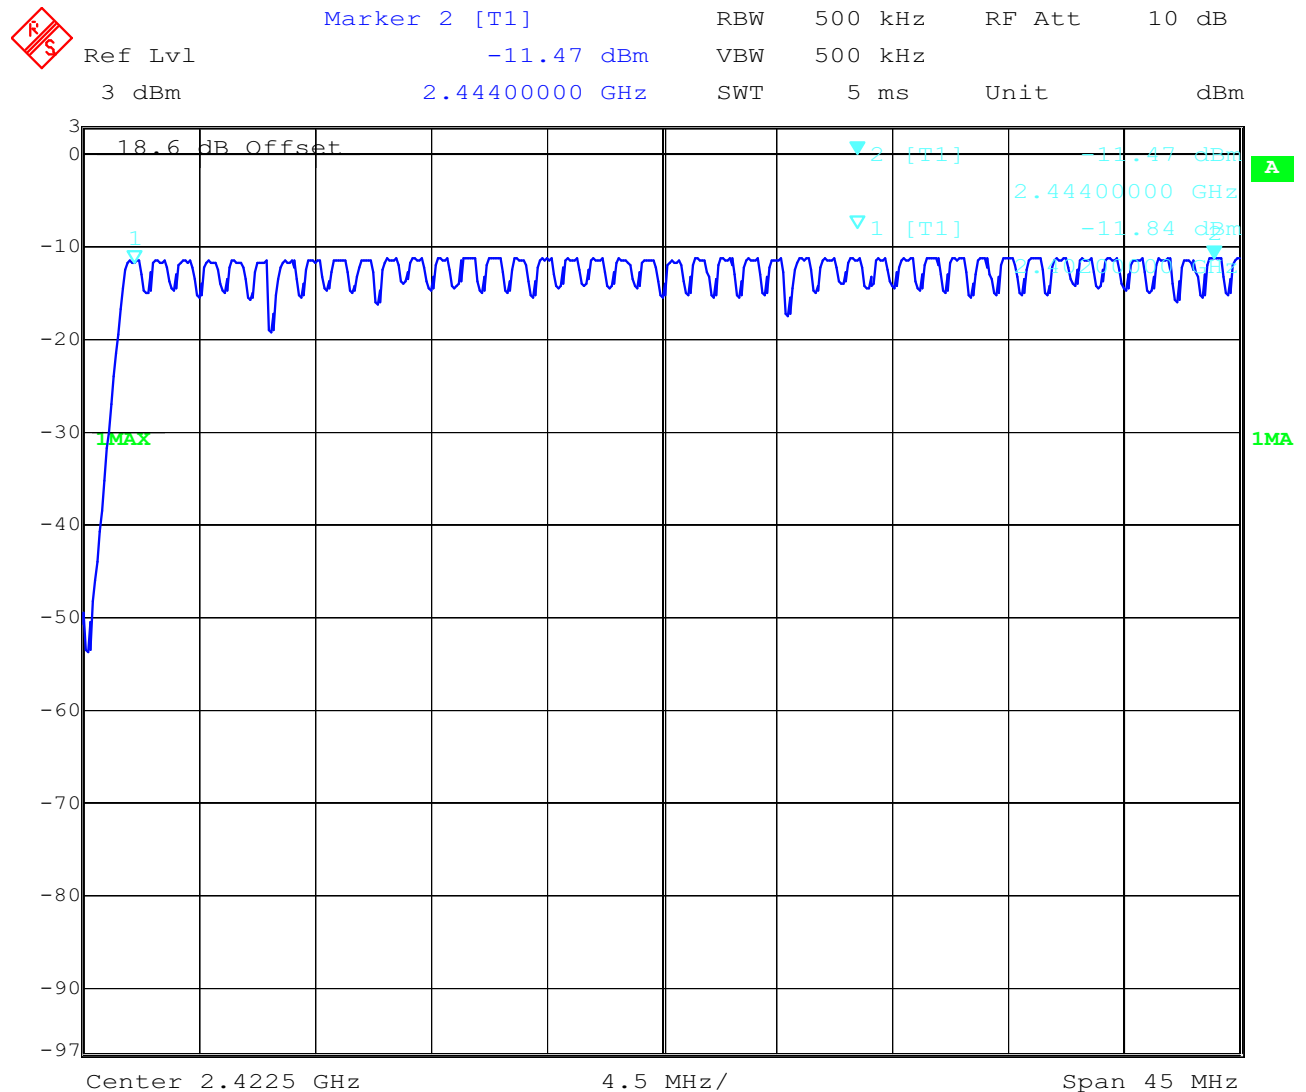

Date: 28.SEP.2005 13:40:26

Plot 2 of 2:

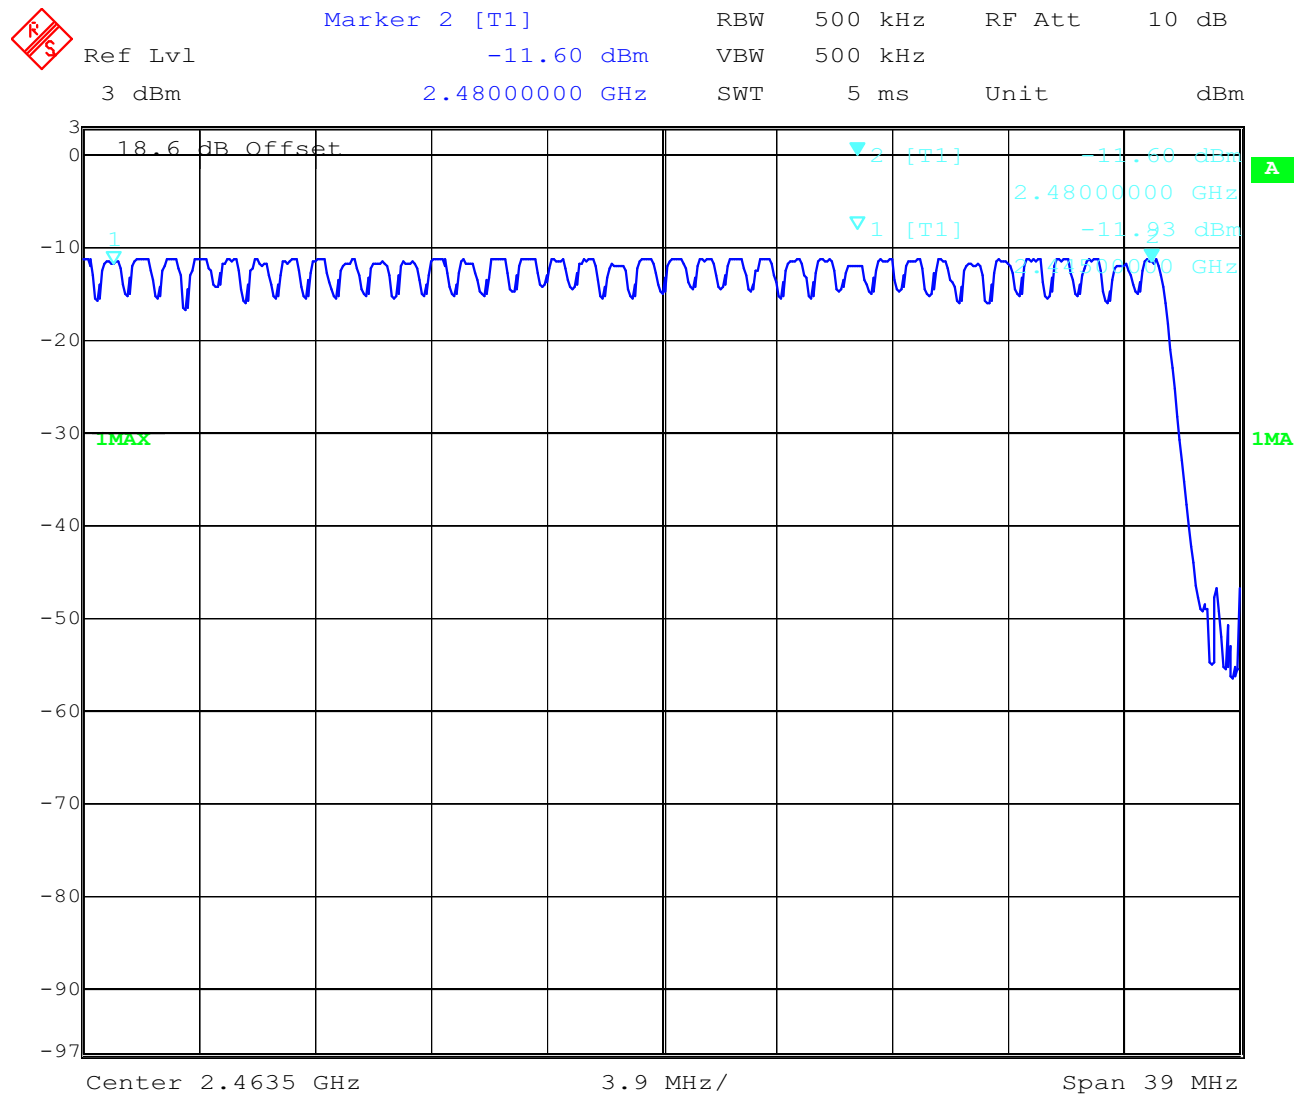

Date: 28.SEP.2005 13:42:05

Result : The number of hopping channels is: 79

Limits :

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Under normal test conditions only | at least 15 non-overlapping channels |
|-----------------------------------|--------------------------------------|

### 3.7 Time of occupancy (dwell time) §15.247(a)(1)(iii)

For Bluetooth devices:

The dwell time of 0.4 s within a 31.6 second period in data mode is independent from the packet type (packet length). The calculation for a 31.6 second period is as follows:

Dwell time = time slot length \* hop rate / number of hopping channels \* 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time =  $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time =  $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/s / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

This is according to the Bluetooth Core Specification V 1.1 & V 1.2 (+ critical errata) for all Bluetooth devices.


Therefore, all Bluetooth devices comply with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

## 3.8 Power Spectral density (Hybrid system in Inquiry mode/Page scan) §15.247(e)

Plot 1 of 1:

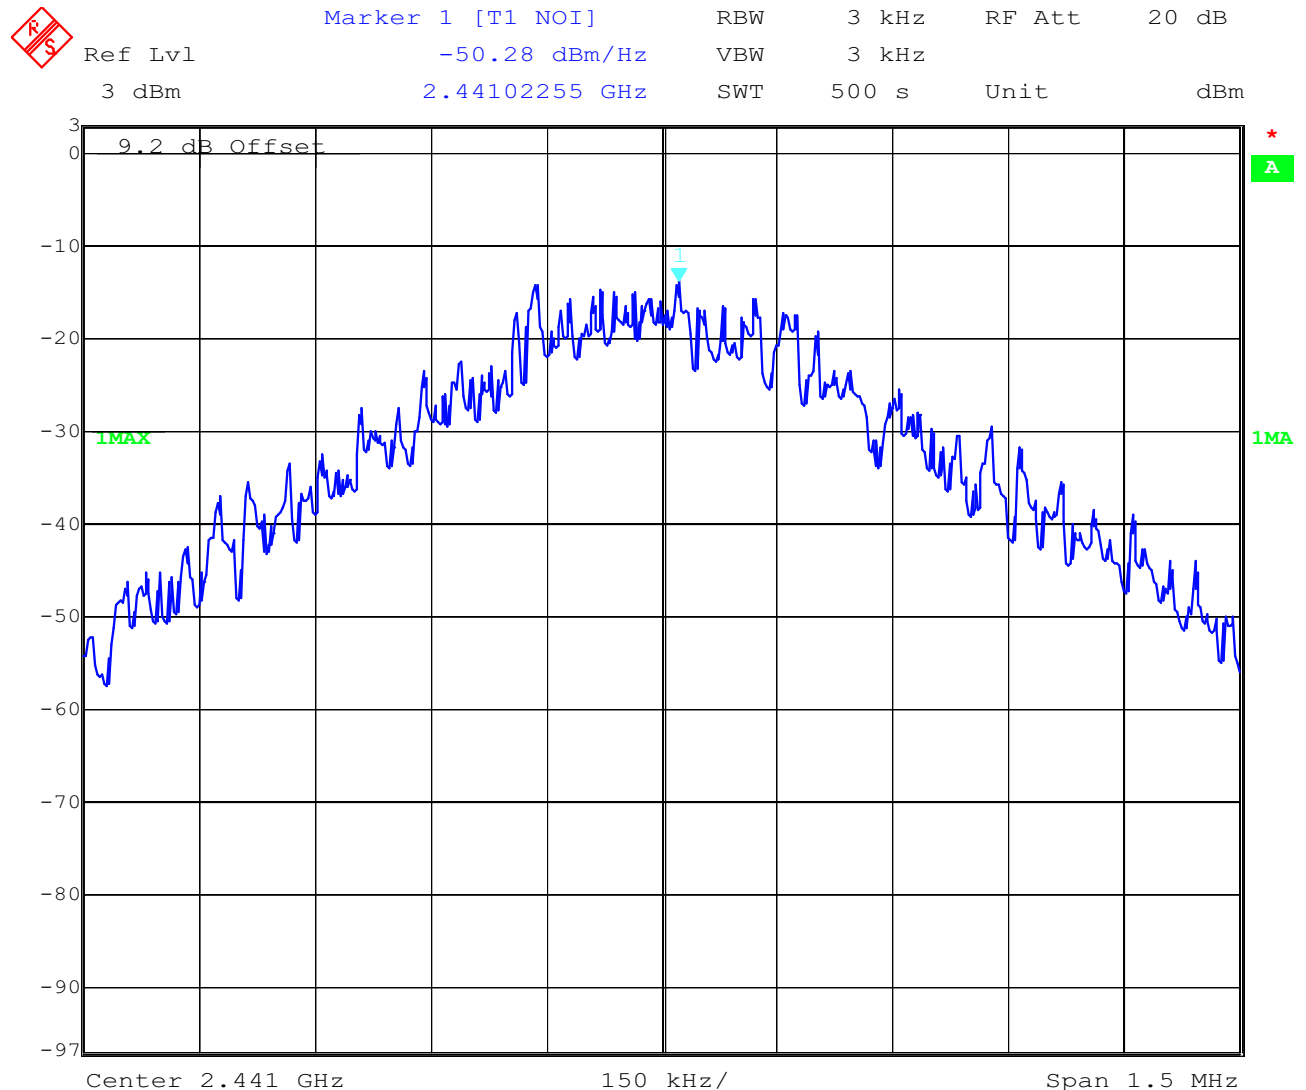

Date: 28.SEP.2005 14:16:54


Result: Power density : -50.28 dBm/Hz = -15.48 dBm / 3 KHz  
 Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

Limits :

|                                   |                                                                                                                                                                                                                               |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Under normal test conditions only | For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 3.9 Spectrum Bandwidth of a FHSS System / 20dB Bandwidth §15.247(a)(1)


Plot 1 of 3

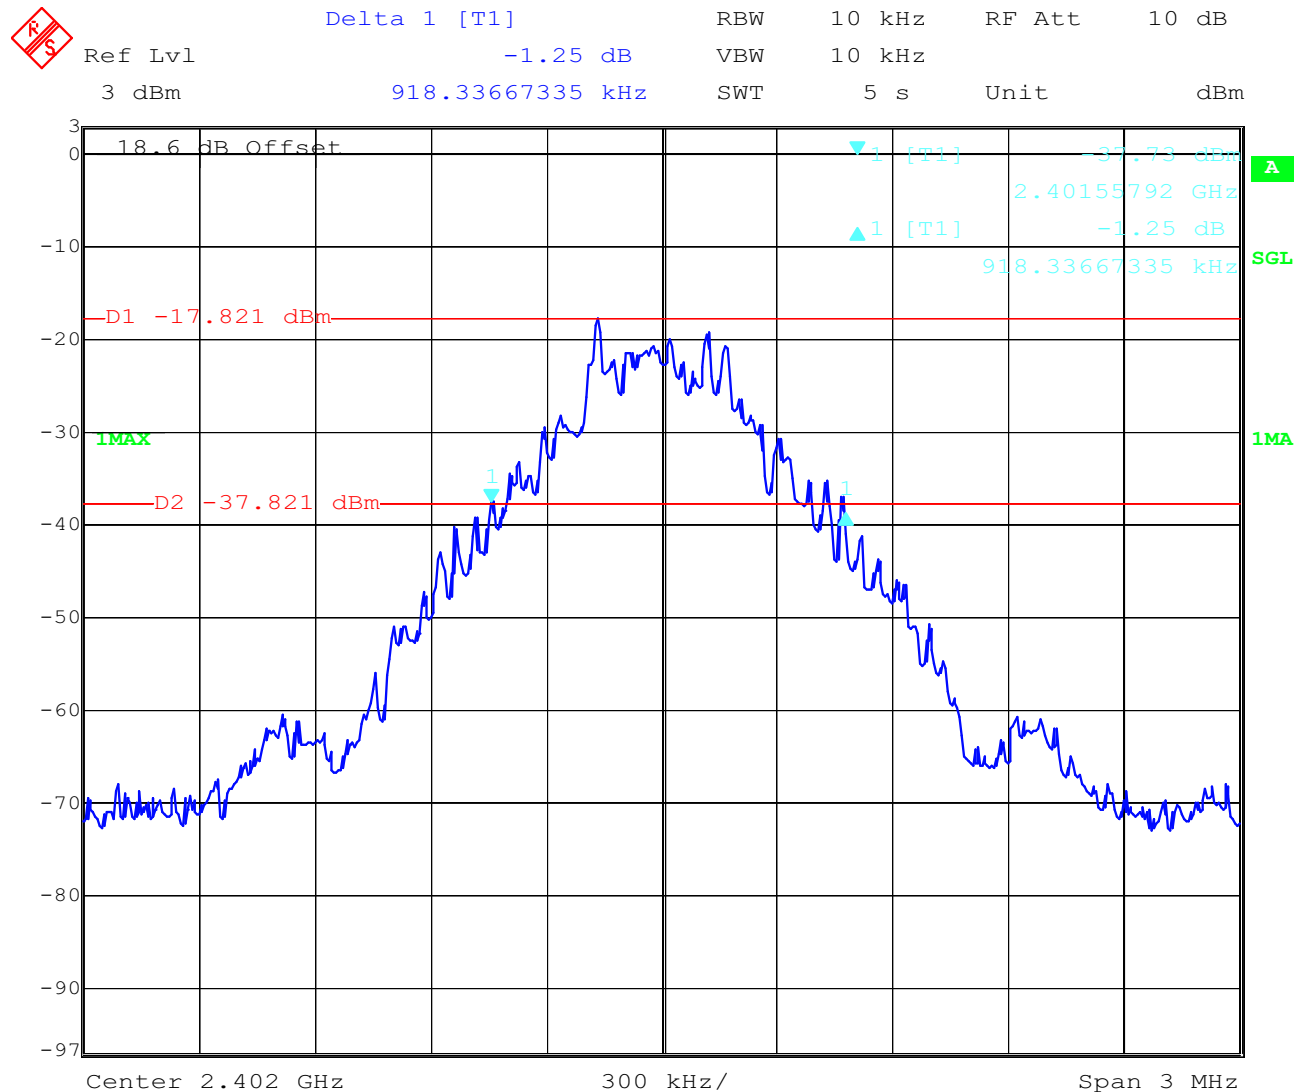

Date: 28.SEP.2005 13:56:32




Plot 2 of 3

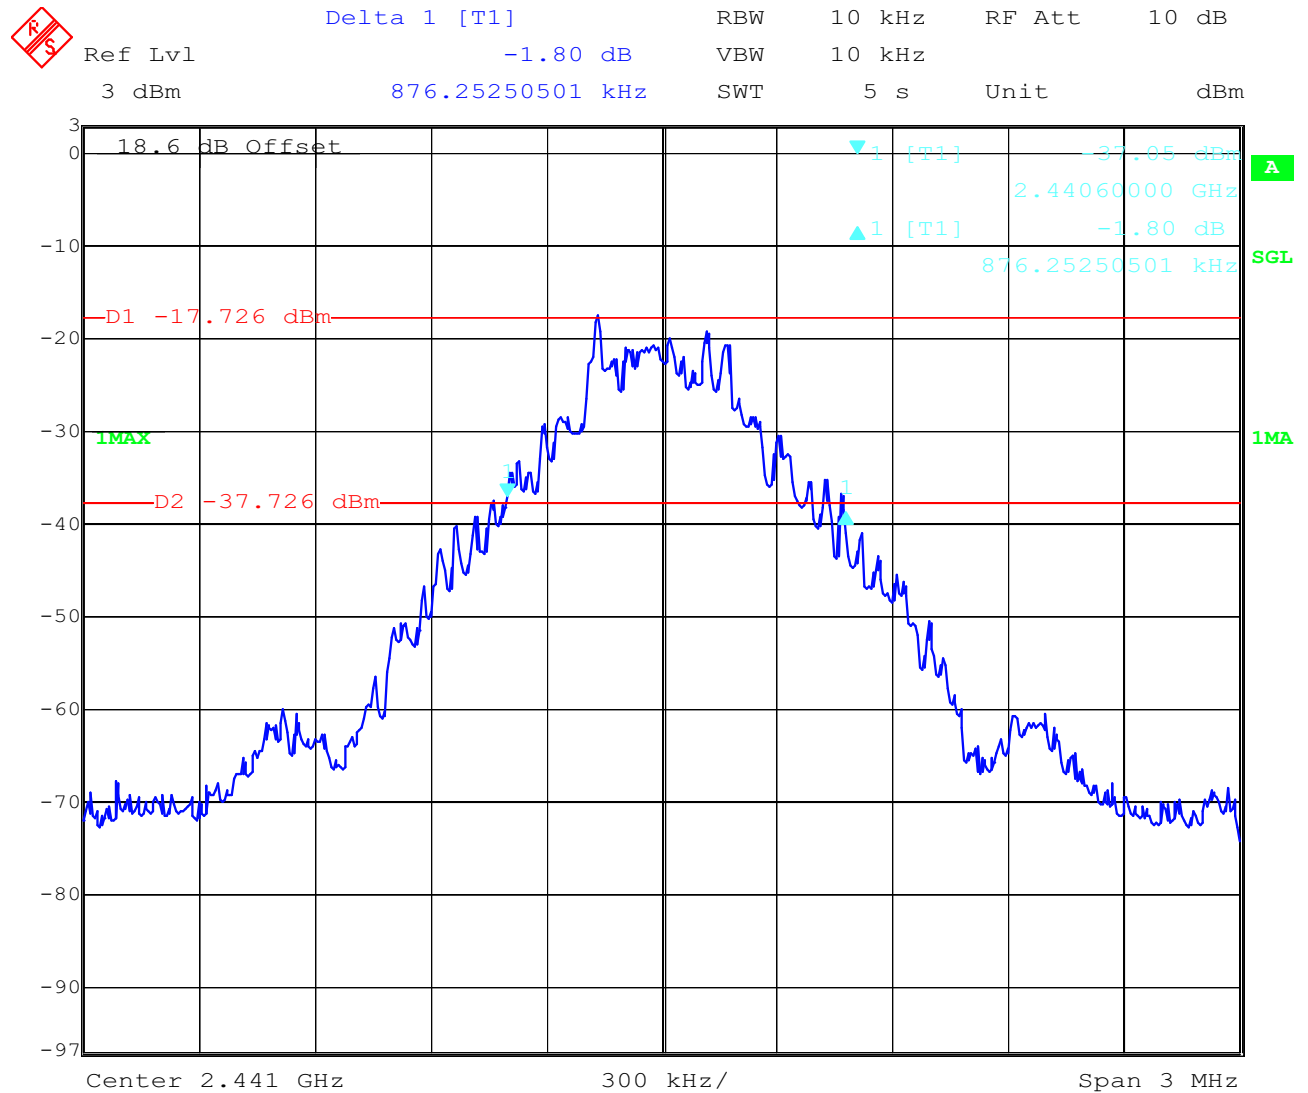

Date: 28.SEP.2005 13:54:27

Plot 3 of 3

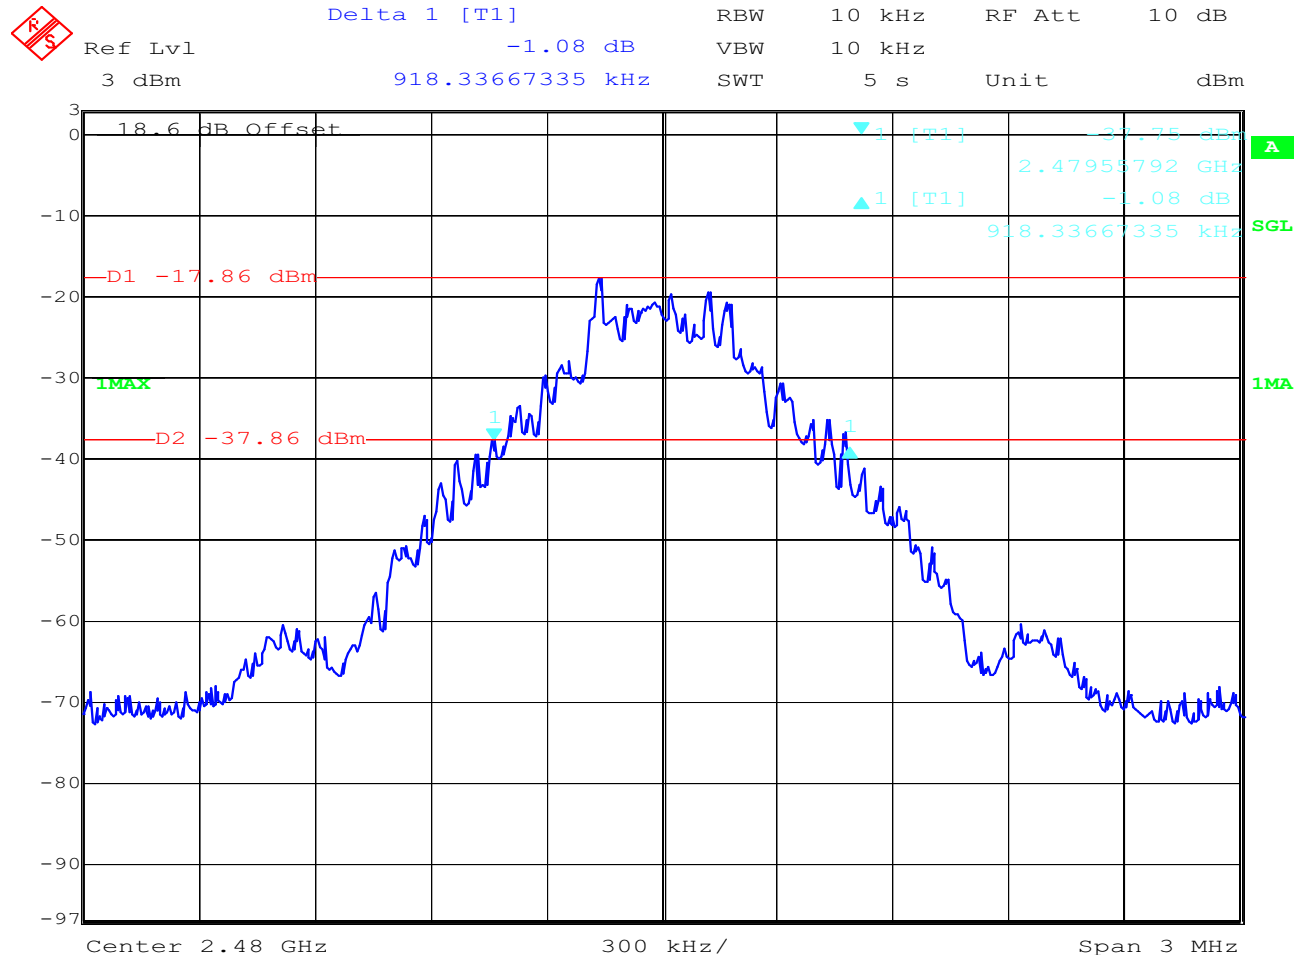

Date: 28.SEP.2005 13:59:15

Results:

| Test conditions         |                  | 20 dB BANDWIDTH [KHz] |         |         |
|-------------------------|------------------|-----------------------|---------|---------|
| Frequency [MHz]         |                  | 2402                  | 2441    | 2480    |
| T <sub>nom</sub>        | V <sub>nom</sub> | 918.337               | 876.253 | 918.337 |
| Measurement uncertainty |                  | ±1kHz                 |         |         |

RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)


RBW: 10 kHz / VBW 100 kHz

Limits :

|                                   |            |
|-----------------------------------|------------|
| Under normal test conditions only | < 1000 KHz |
|-----------------------------------|------------|


## 3.10 Maximum output power (conducted) § 15.247 (b) (1)

Plot 1 of 3

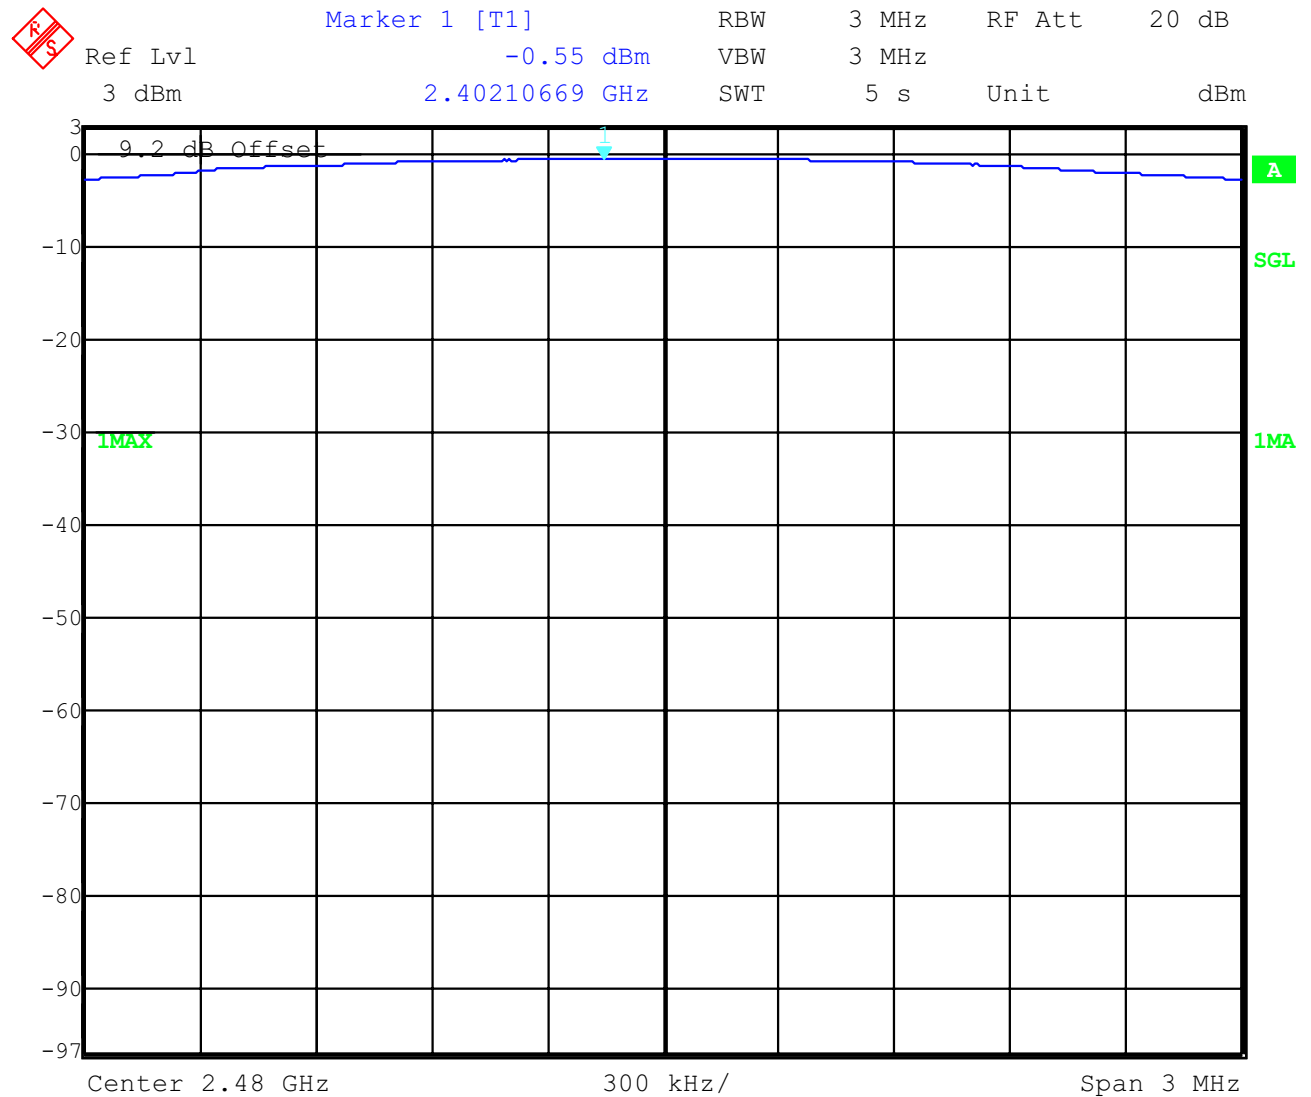


Date: 28.SEP.2005 14:01:03

Plot 2 of 3

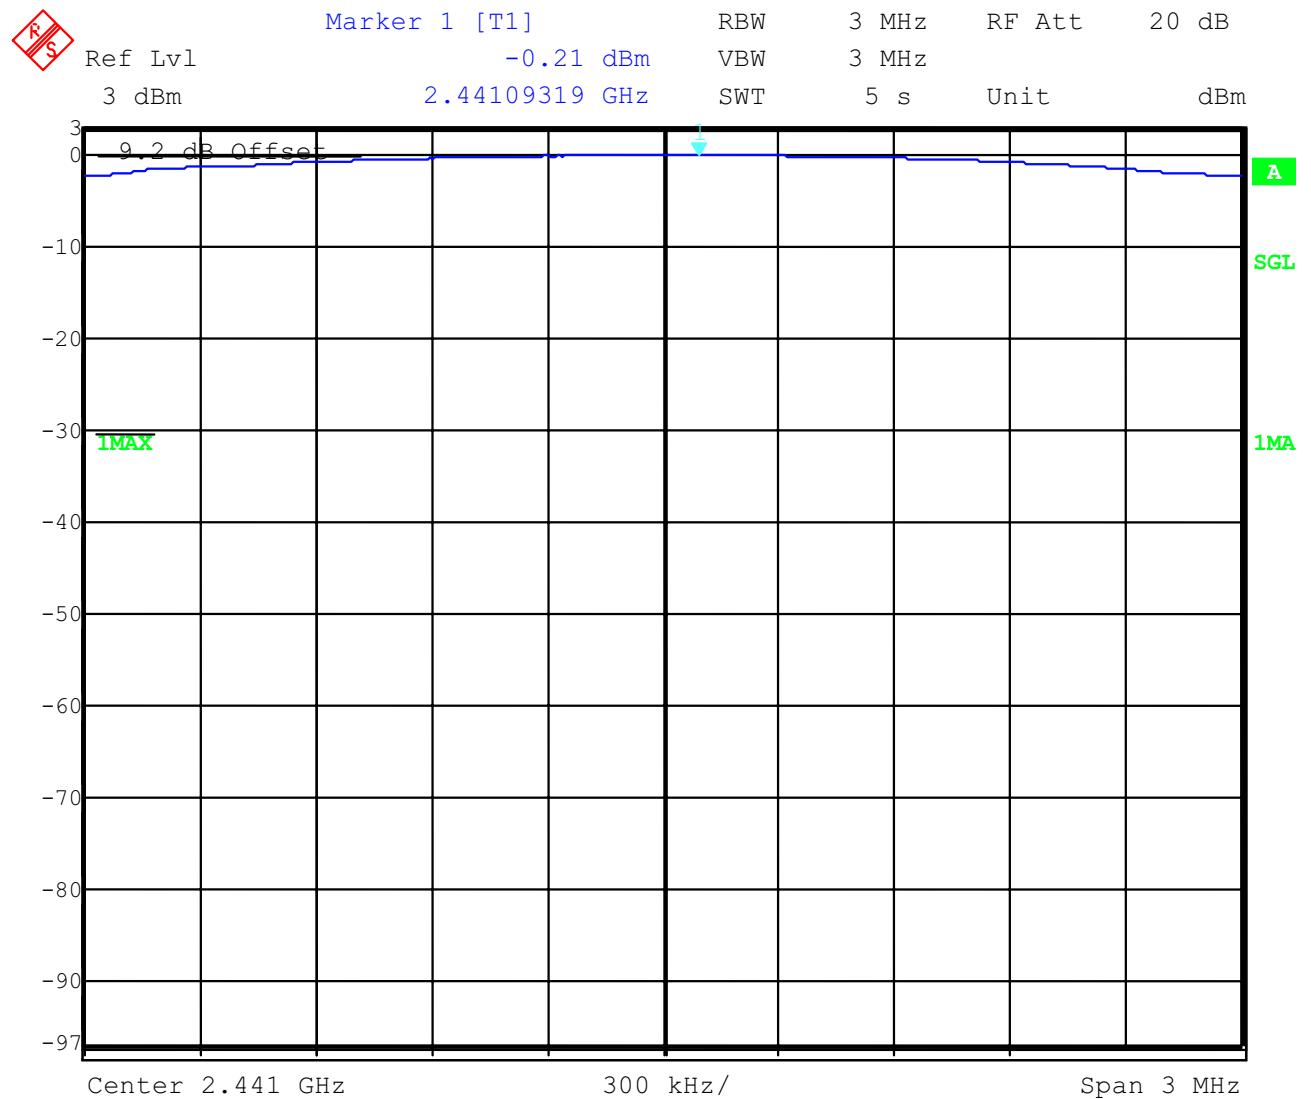

Date: 28.SEP.2005 14:06:48

Plot 3 of 3

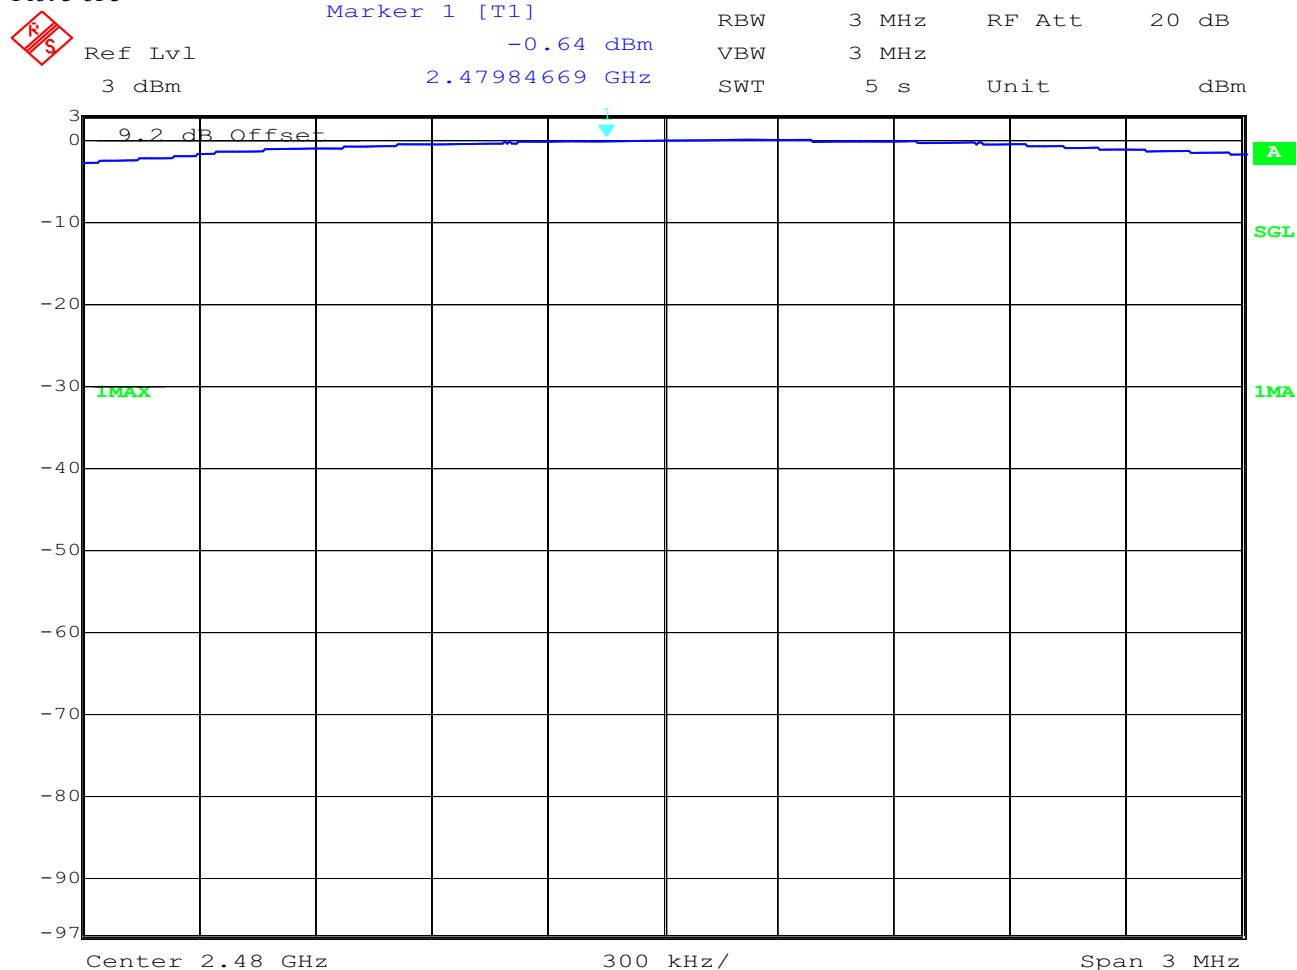

Date: 28.SEP.2005 14:06:03

Results:

| Test conditions         |                  | Max. peak output power [dBm] |       |      |       |      |       |
|-------------------------|------------------|------------------------------|-------|------|-------|------|-------|
| Frequency [MHz]         |                  | 2402                         |       | 2442 |       | 2480 |       |
| T <sub>nom</sub>        | V <sub>nom</sub> | PK                           | -0.55 | PK   | -0.21 | PK   | -0.64 |
| Measurement uncertainty |                  | ±3dB                         |       |      |       |      |       |

RBW / VBW : 3 MHz

Limits:

|                                                                        |                       |
|------------------------------------------------------------------------|-----------------------|
| Under normal test conditions only, for frequency range 2400-2483.5 MHz | Max. 1.0 Watt (30dBm) |
|------------------------------------------------------------------------|-----------------------|

## 3.11 Max. peak output power (radiated) § 15.247 (b) (1)

Results:

| Test conditions         |                  | Max. peak output power EIRP [dBm] |        |        |
|-------------------------|------------------|-----------------------------------|--------|--------|
| Frequency [MHz]         |                  | 2402                              | 2442   | 2480   |
| T <sub>nom</sub>        | V <sub>nom</sub> | -9.77                             | -10.21 | -10.27 |
| Measurement uncertainty |                  | ±3dB                              |        |        |

RBW / VBW : 3 MHz


Measured at a distance of 3m

Limits:

|                                                                        |                        |
|------------------------------------------------------------------------|------------------------|
| Under normal test conditions only, for frequency range 2400-2483.5 MHz | Max. 1.0 Watt / 30 dBm |
|------------------------------------------------------------------------|------------------------|


## 3.12 Band-edge compliance of conducted emissions §15.247 (d)

Plot 1 of 4 (hopping off, lowest frequency):

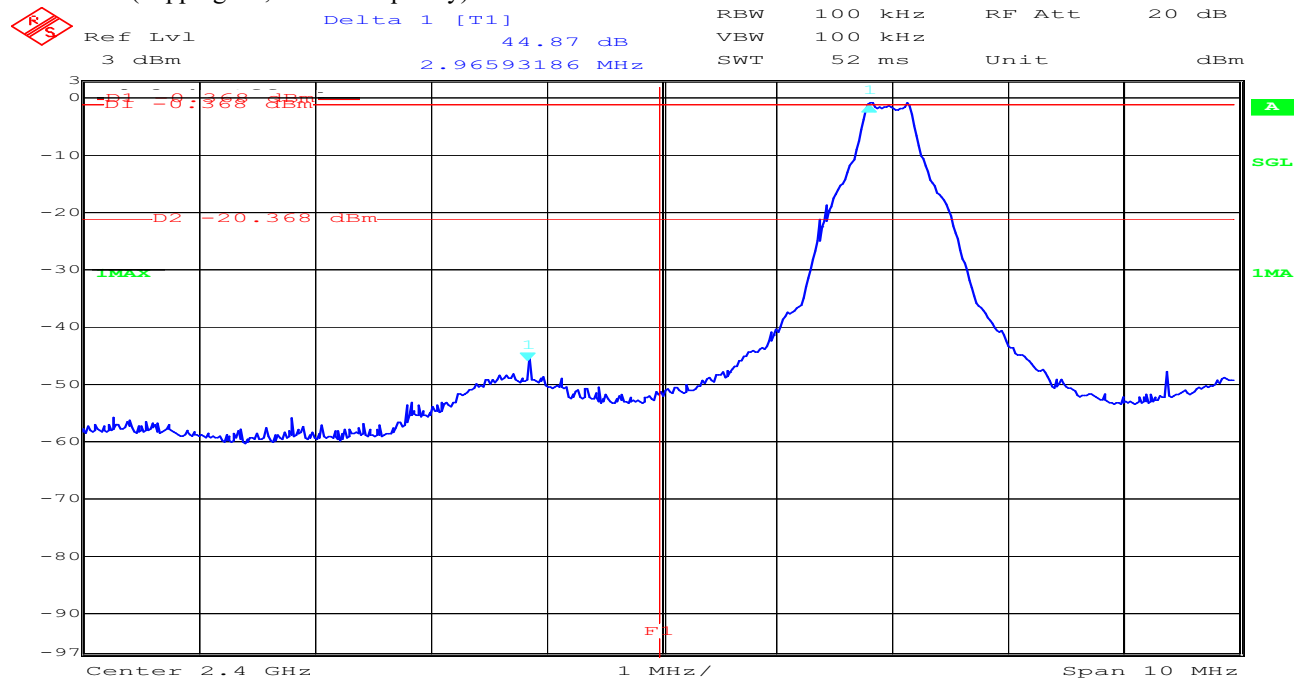

Date: 28.SEP.2005 14:18:40

Plot 2 of 4 (hopping on, lowest frequency):

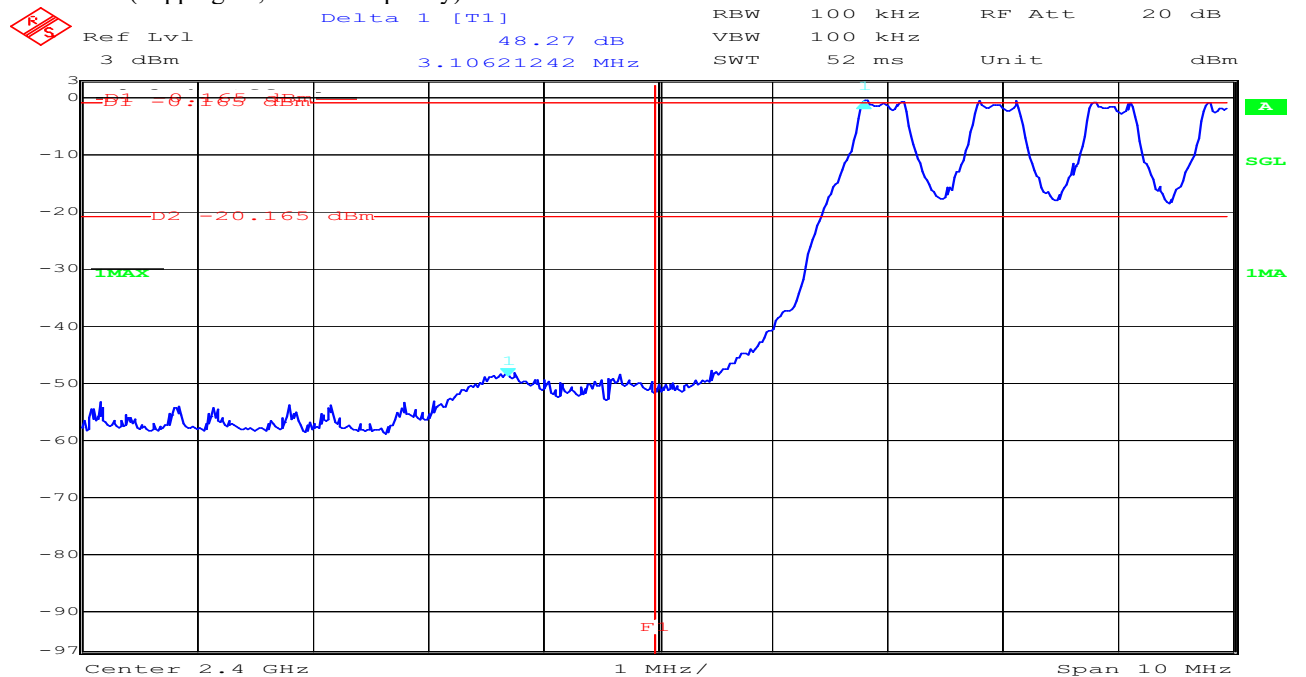

Date: 28.SEP.2005 14:22:17





## Results:


| SZENARIO                       | DELTA VALUE [DB] |
|--------------------------------|------------------|
| hopping off, lowest frequency  | 44.87            |
| hopping on, lowest frequency   | 48.27            |
| hopping off, highest frequency | 50.88            |
| hopping on, highest frequency  | 53.16            |
| Measurement uncertainty        | ±1,5dB           |

## Limits:

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)). |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|


## 3.13 Band-edge compliance of radiated emissions §15.205

Plot 1 : Max field strength in 3m distance (single frequency)

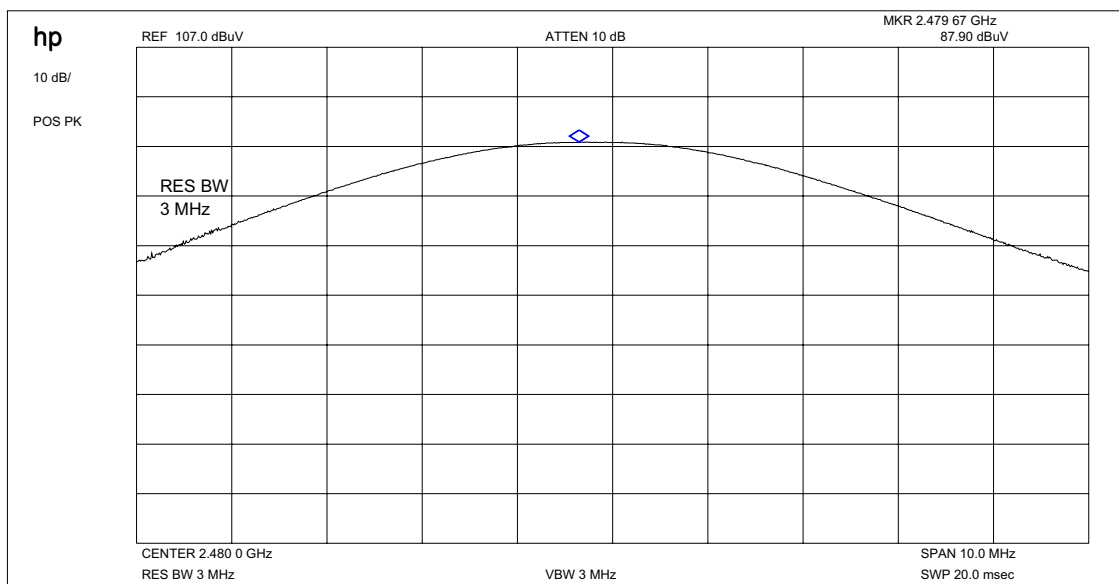

Result:  $87.90 \text{ dB}\mu\text{V/m} + \text{Systemloss of } (-10.86 \text{ dB}) = 77.04 \text{ dB}\mu\text{V/m}$  in 3m distance


Plot 2: Marker-Delta Method (single carrier)

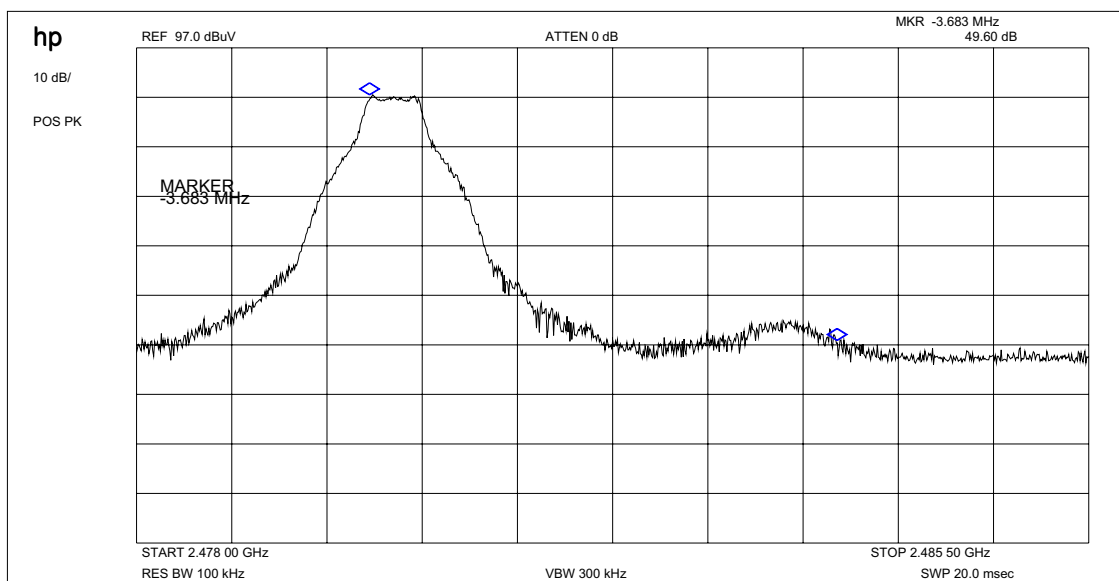

Result:  
Marker-Delta-Value : 49.60 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

## Plot 3: Marker-Delta Method (hopping)

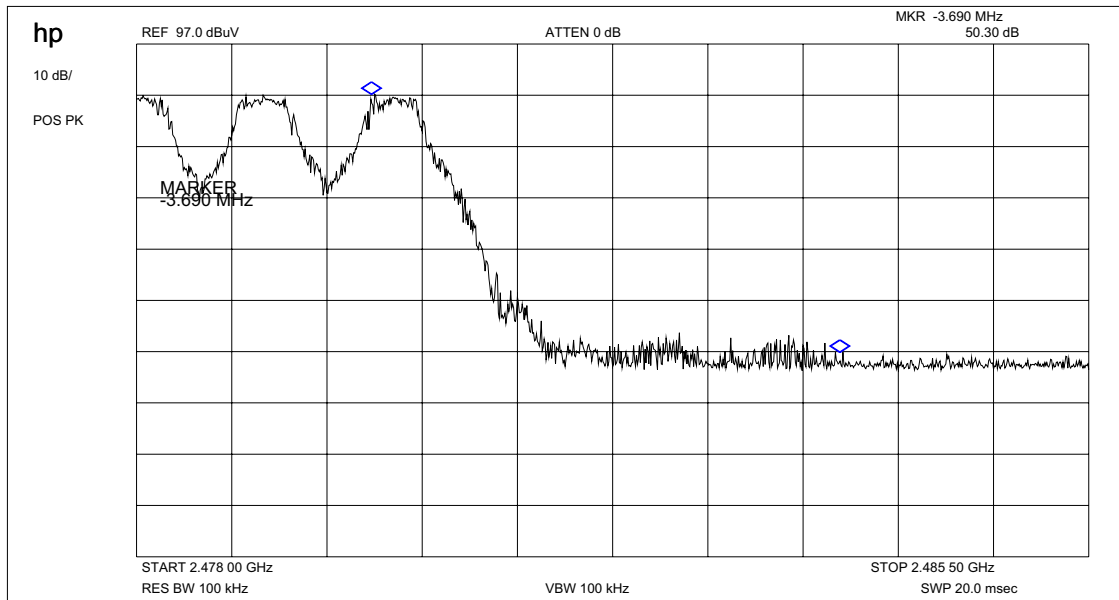


## Result:


Marker-Delta-Value : 50.30 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

## Plot 4: Restricted Bands low

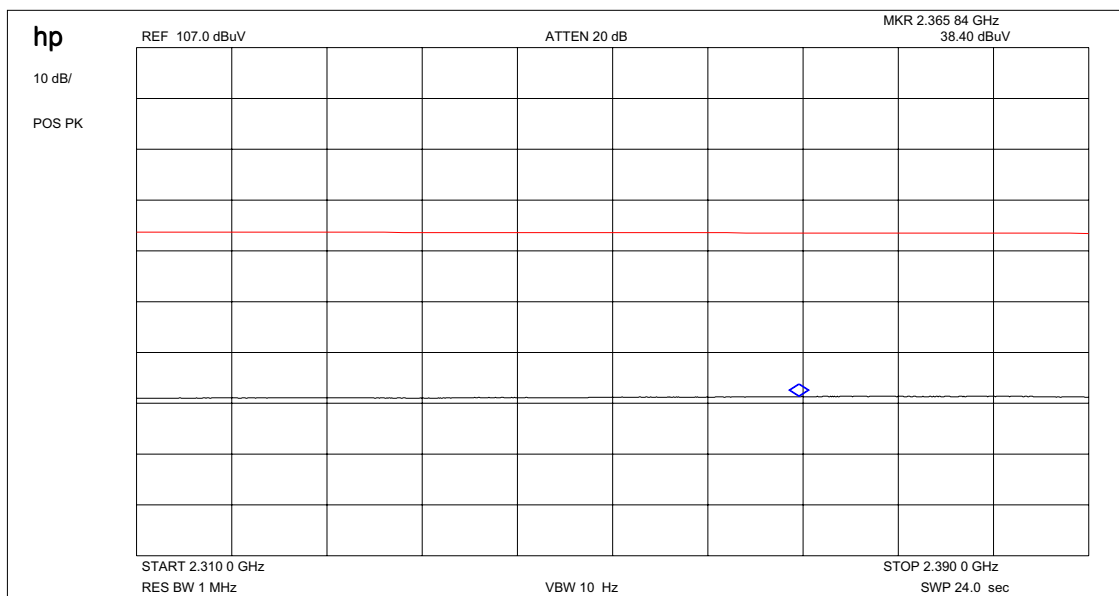

## Plot 5: Restricted Bands high

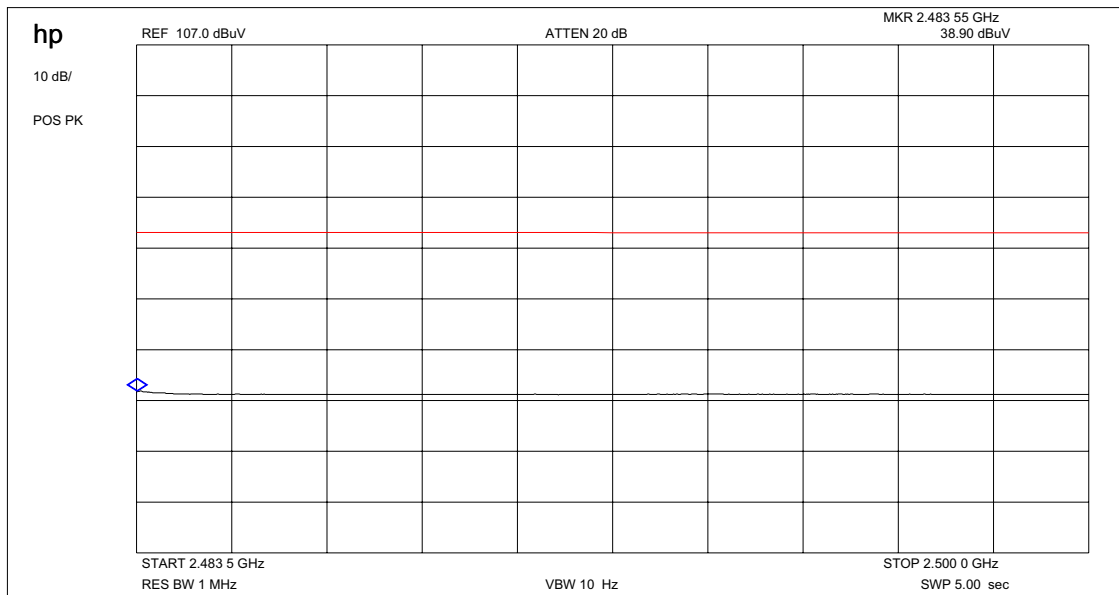

## Results & Limits:


### Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

| high channel       | setup                                        | measured value (3m)                                 | correction factor (3m)                                   | calculated value (3m)                                                   |
|--------------------|----------------------------------------------|-----------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------------------|
| Max. peak value    | 1 MHz RBW<br>1 MHz VBW                       | 87.90dB $\mu$ V/m                                   | -10.86 dB                                                | 77.04 dB $\mu$ V/m                                                      |
| Max. average value | Calculated with duty cycle correction factor | dB $\mu$ V/m peak                                   | -1,07dB<br>duty cycle correction factor (worst case DH5) | 75.97 dB $\mu$ V/m                                                      |
| Delta value        | Peak<br>100 kHz<br>RBW/VBW                   | 49.60 dB (single carrier)<br>50.30dB (hopping mode) | -                                                        | -                                                                       |
| Value at band edge | limit 54 dB $\mu$ V/m                        |                                                     |                                                          | 26.37dB $\mu$ V/m (single carrier)<br>25.67 dB $\mu$ V/m (hopping mode) |
| Statement:         |                                              |                                                     |                                                          | Complies                                                                |


## 3.14 Spurious Emissions - conducted (Transmitter) § 15.247 (c) (1)

Plot 1 of 3: lowest channel

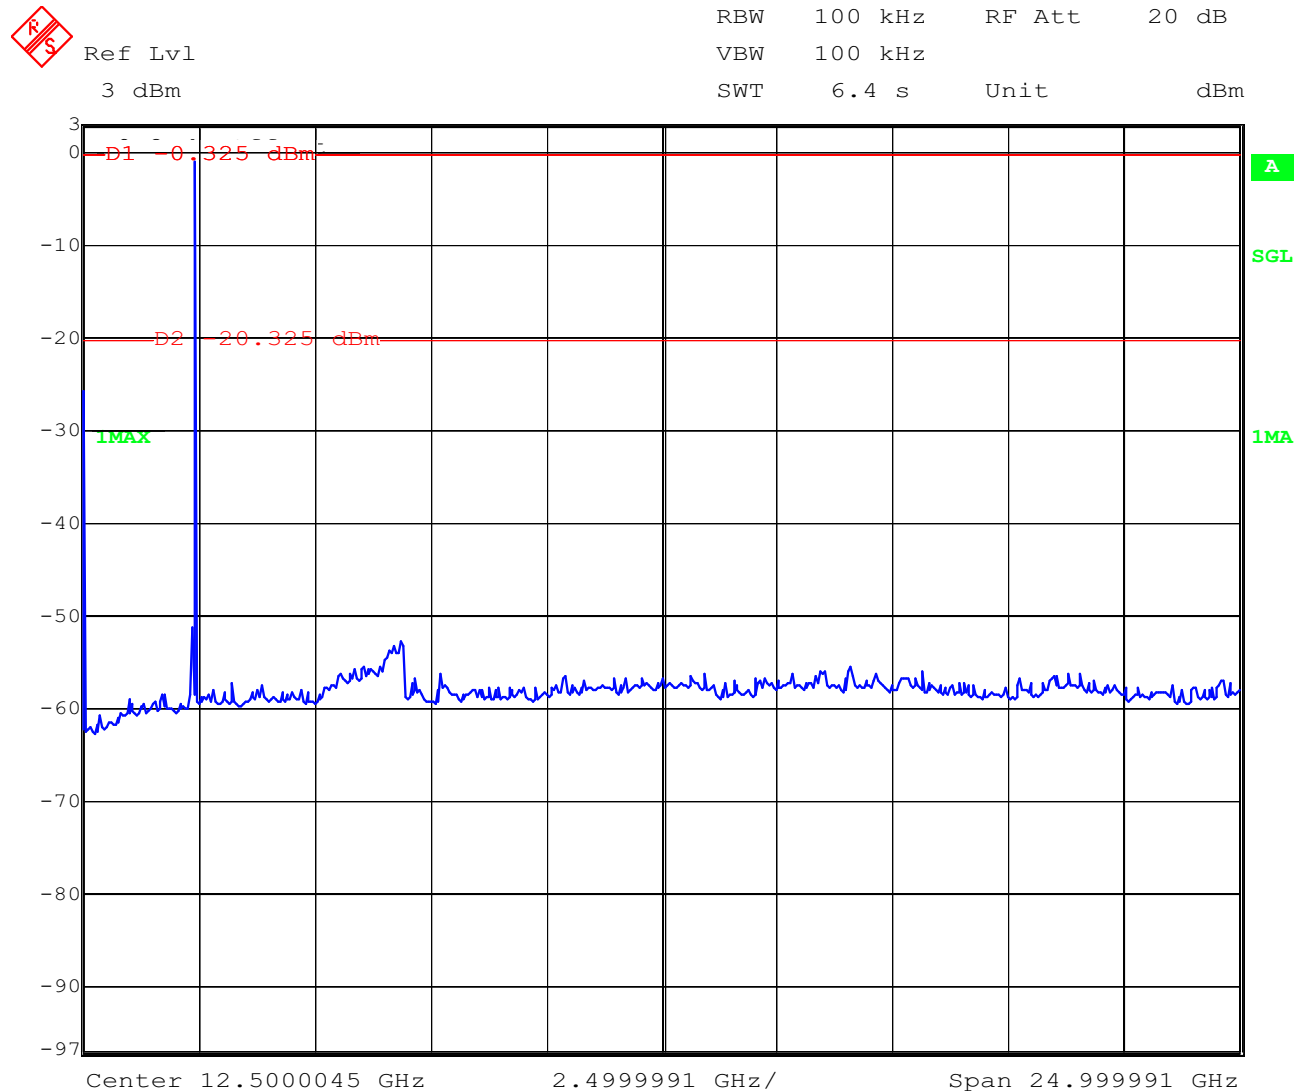


Date: 28.SEP.2005 14:40:13

Plot 2 of 3: middle channel

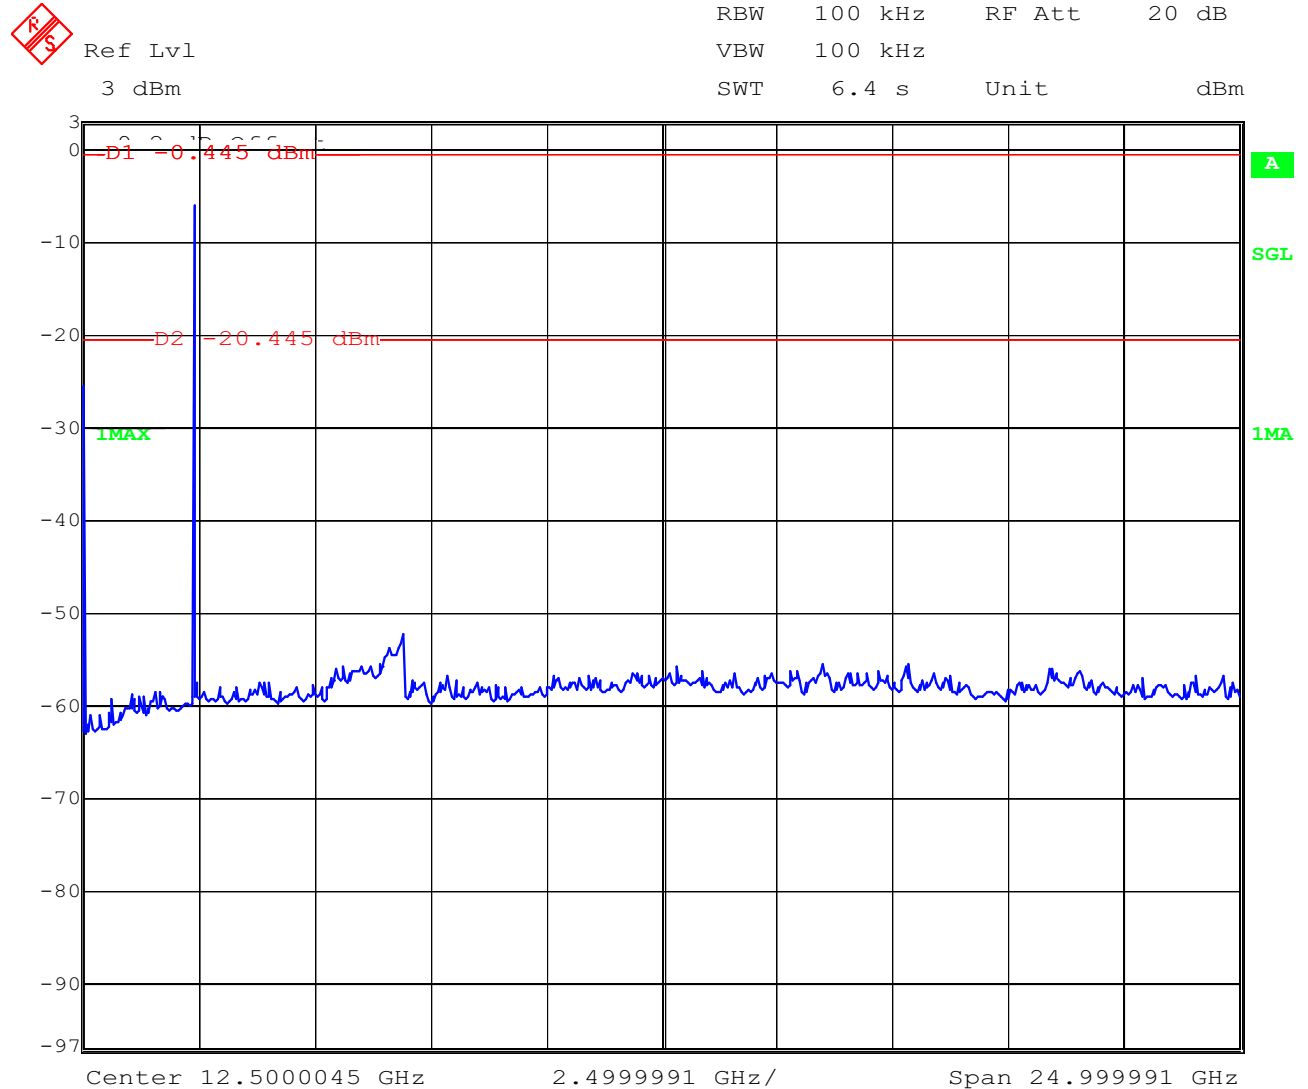

Date: 28.SEP.2005 14:37:50

Plot 3 of 3: highest channel

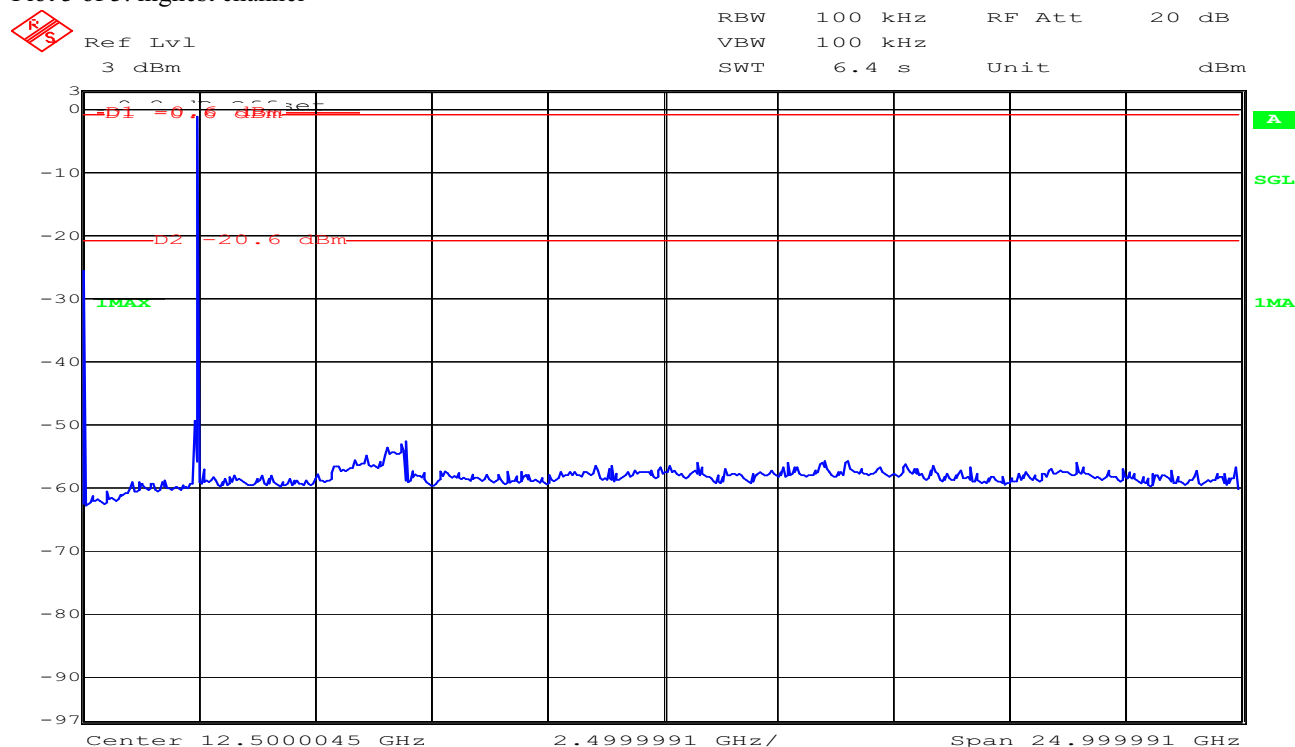

Date: 28.SEP.2005 14:35:16

Result & Limits:

| Emission Limitations             |  |                             |                                   |                                                      |                     |
|----------------------------------|--|-----------------------------|-----------------------------------|------------------------------------------------------|---------------------|
| f [MHz]                          |  | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results             |
| 2402                             |  |                             | 30 dBm                            |                                                      | Operating frequency |
| All peaks >20 dB below the limit |  |                             | -20 dBc                           |                                                      | complies            |
| 2441                             |  |                             | 30 dBm                            |                                                      | Operating frequency |
| All peaks >20 dB below the limit |  |                             | -20 dBc                           |                                                      | complies            |
| 2480                             |  |                             | 30 dBm                            |                                                      | Operating frequency |
| All peaks >20 dB below the limit |  |                             | -20 dBc                           |                                                      | complies            |
| Measurement uncertainty          |  | ± 3dB                       |                                   |                                                      |                     |

RBW : 100 kHz VBW: 100 kHz


|                                   |                                                                                                                                                                                                                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Note: For emissions that fall into restricted bands you find the radiated emissions see chapter 3.13


## 3.15 Spurious Emissions > 30 MHz- radiated (Transmitter) § 15.247 (c) (1)

The carrier is suppressed by a band rejection filter

Plot : 0.03 - 4 GHz vertical/horizontal (lowest channel)

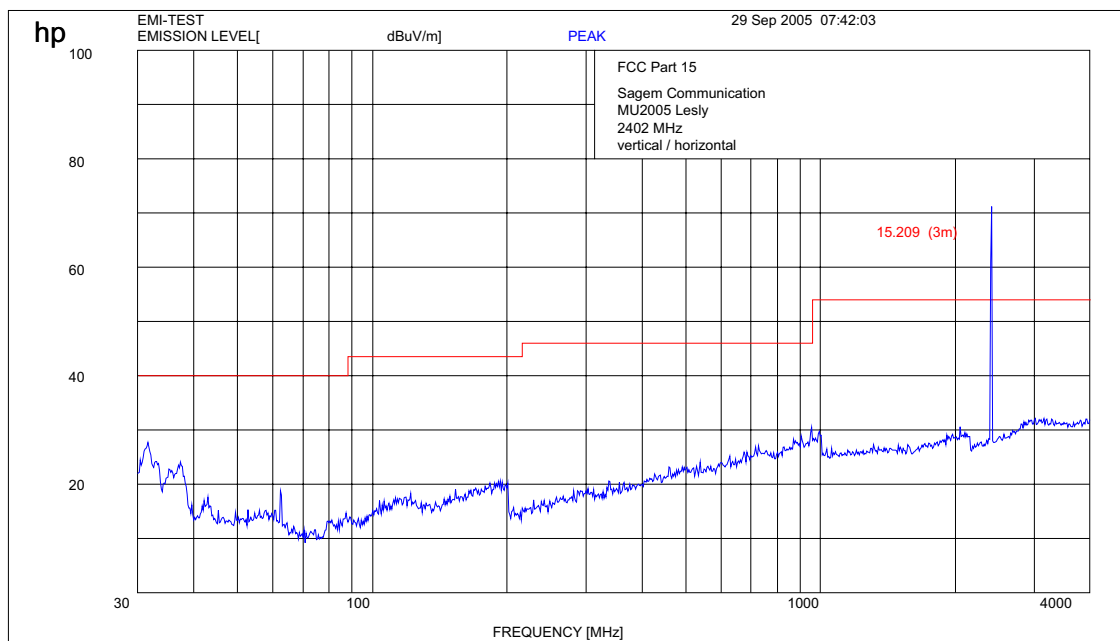


Plot : 4- 12 GHz vertical/horizontal (lowest channel)

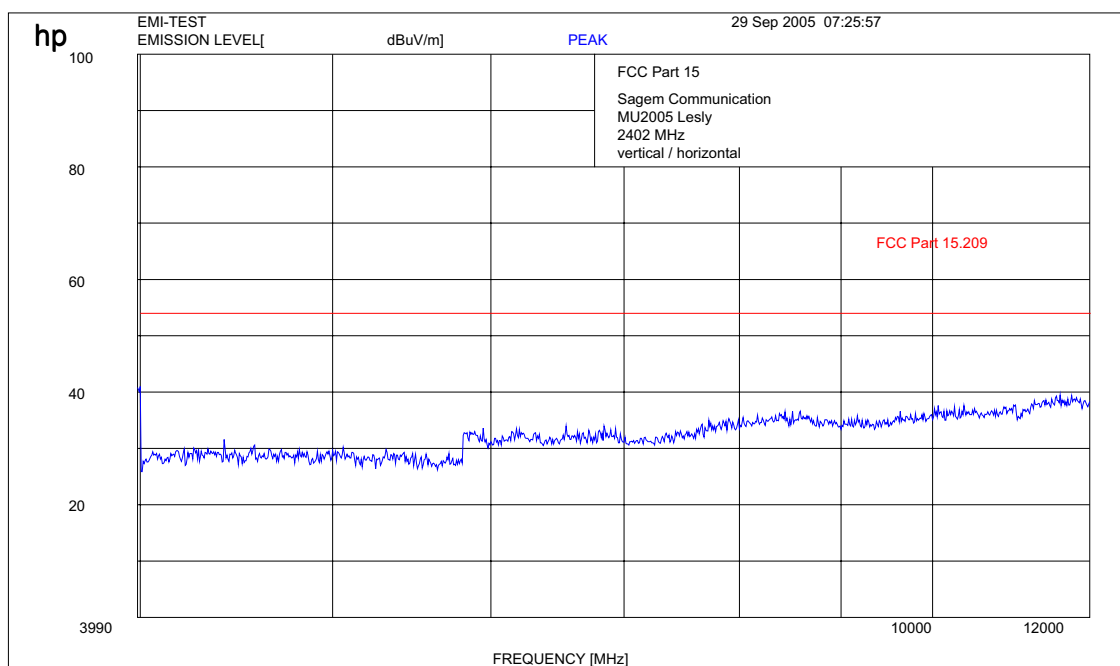




Plot : 12- 25 GHz vertical/horizontal (valid for all channels)

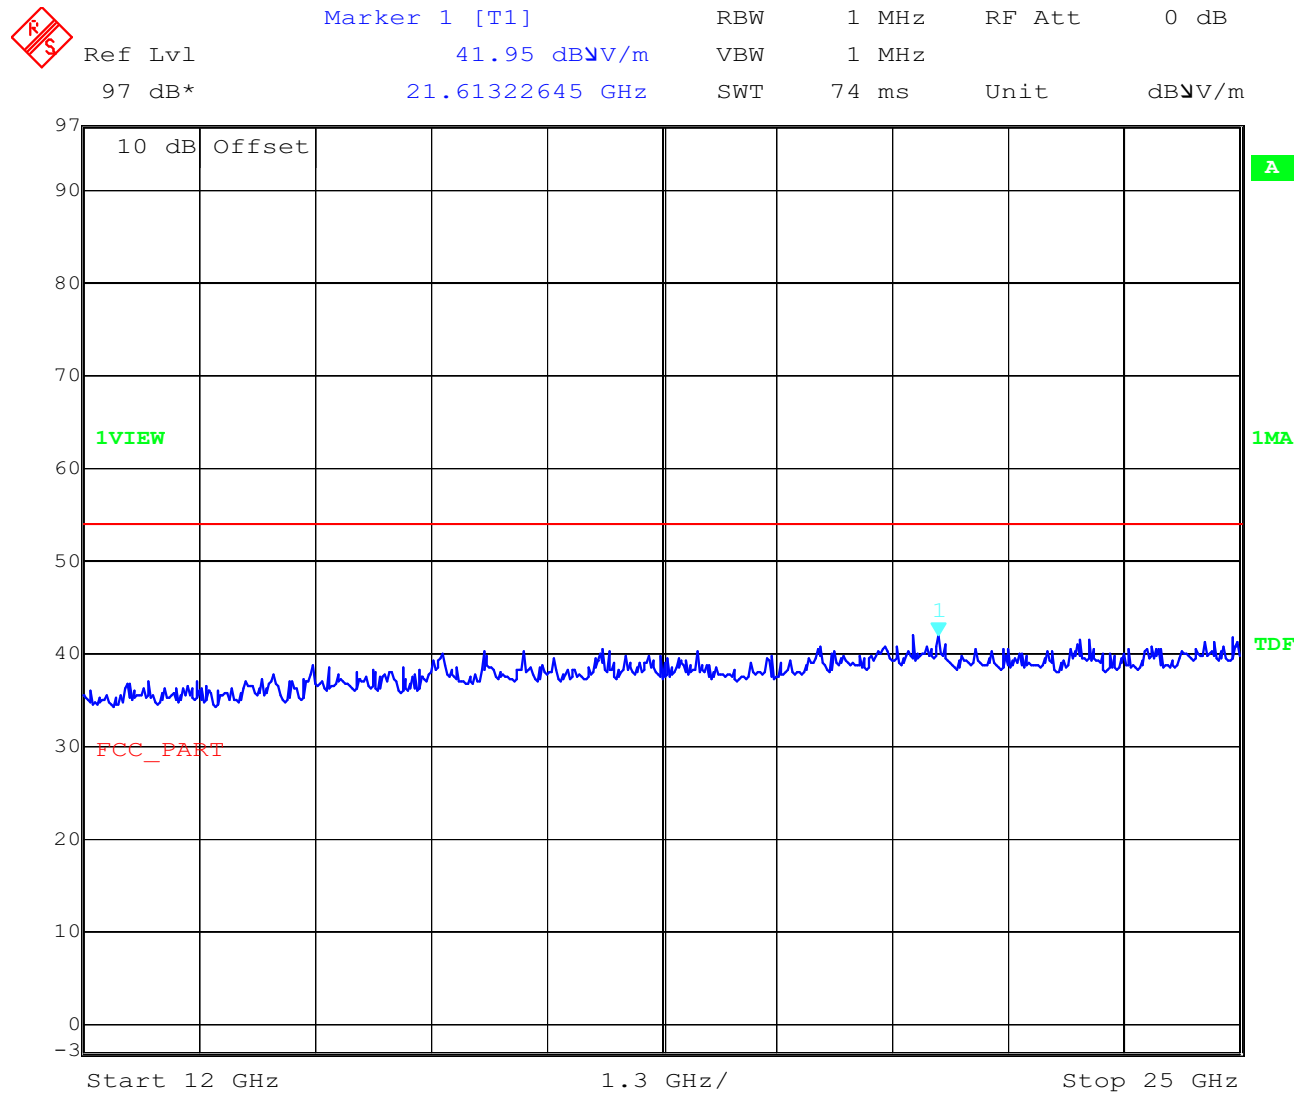


Date: 28.SEP.2005 13:12:08


The carrier is suppressed by a band rejection filter  
Plot : 0.03 - 4 GHz vertical/horizontal (middle channel)

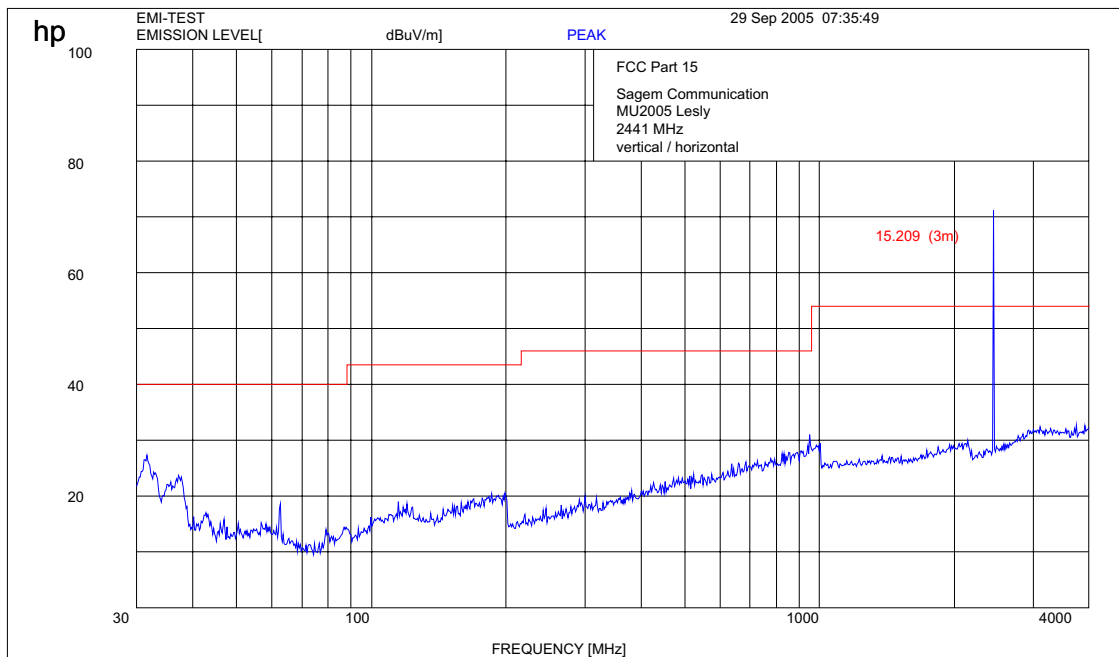


Plot : 4- 12 GHz vertical/horizontal (middle channel)

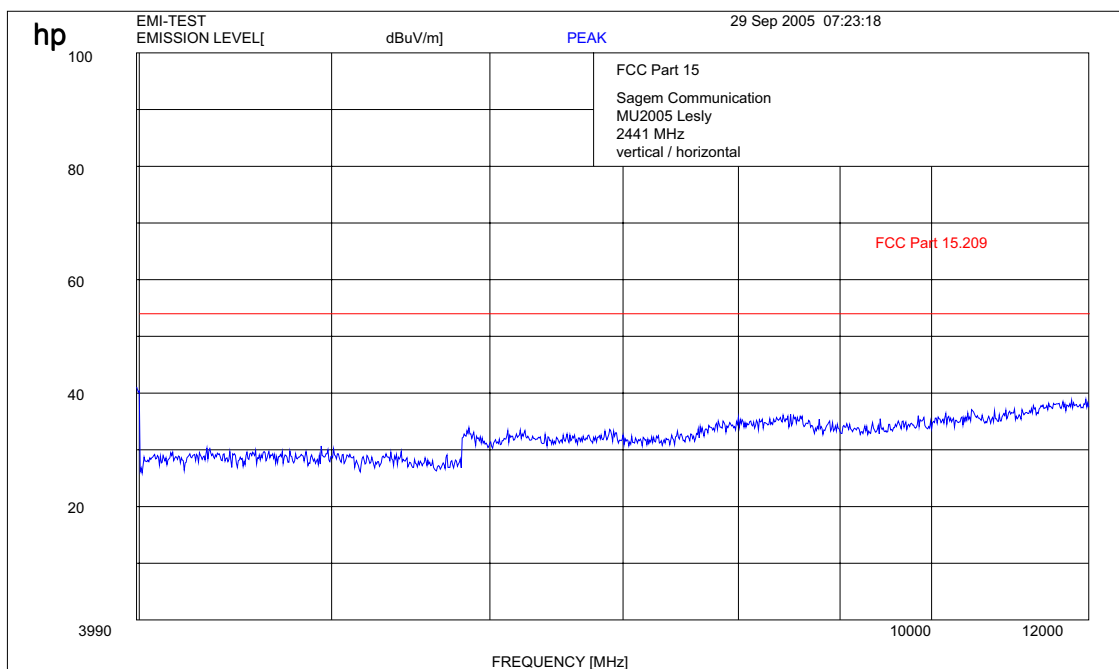

The carrier is suppressed by a band rejection filter  
Plot : 0.03 - 4 GHz vertical/horizontal (highest channel)

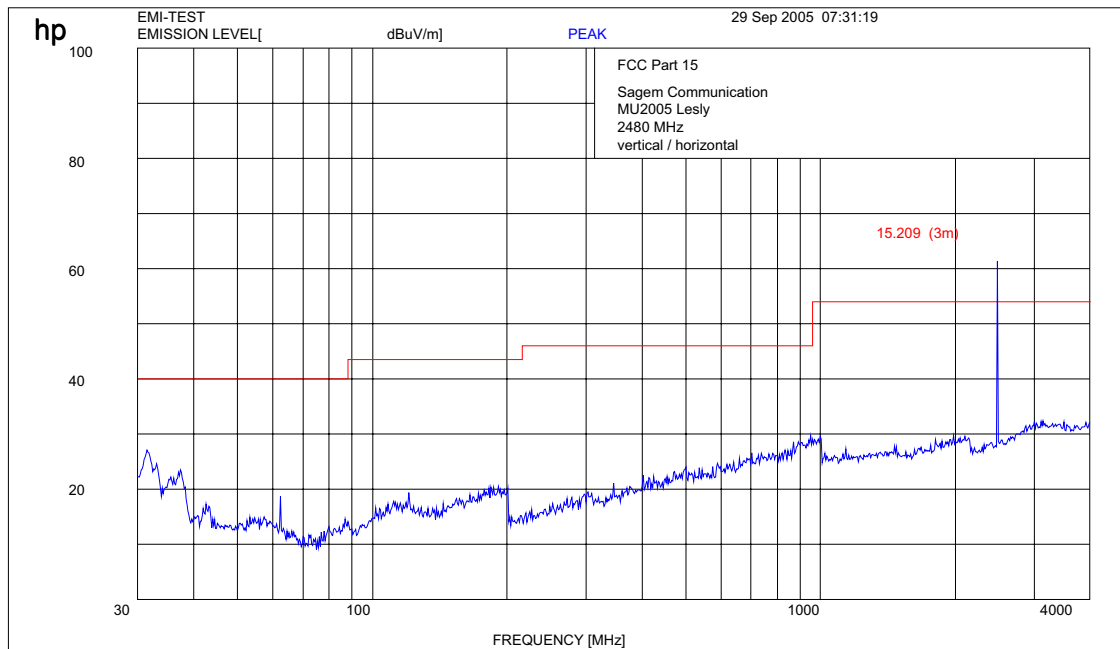


Plot : 4- 12 GHz vertical/horizontal (highest channel)

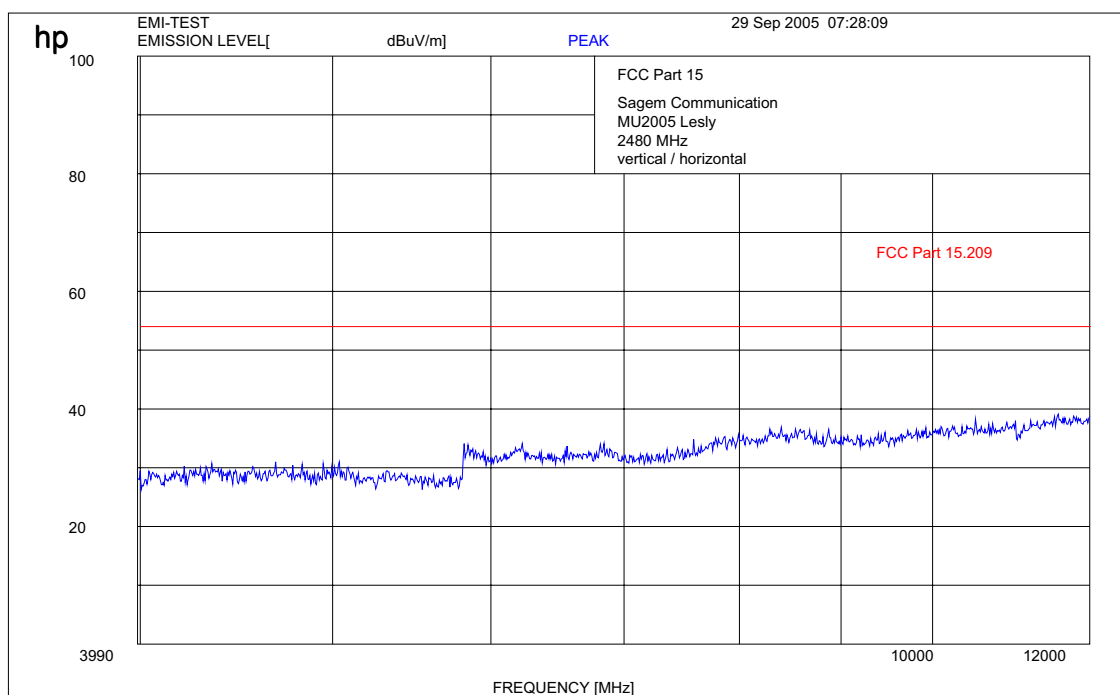


| Frequency [MHz] | Field strength [ $\mu\text{V/m}$ ] | Measurement distance (m) |
|-----------------|------------------------------------|--------------------------|
| 30 - 88         | 100 (40 dB $\mu\text{V/m}$ )       | 3                        |
| 88 - 216        | 150 (43.5 dB $\mu\text{V/m}$ )     | 3                        |
| 216 - 960       | 200 (46 dB $\mu\text{V/m}$ )       | 3                        |
| above 960       | 500 (54 dB $\mu\text{V/m}$ )       | 3                        |

## 3.16 Spurious Emissions - radiated (Receiver) § 15.109

Plot : 0.03 - 4 GHz vertical/horizontal (receiver)

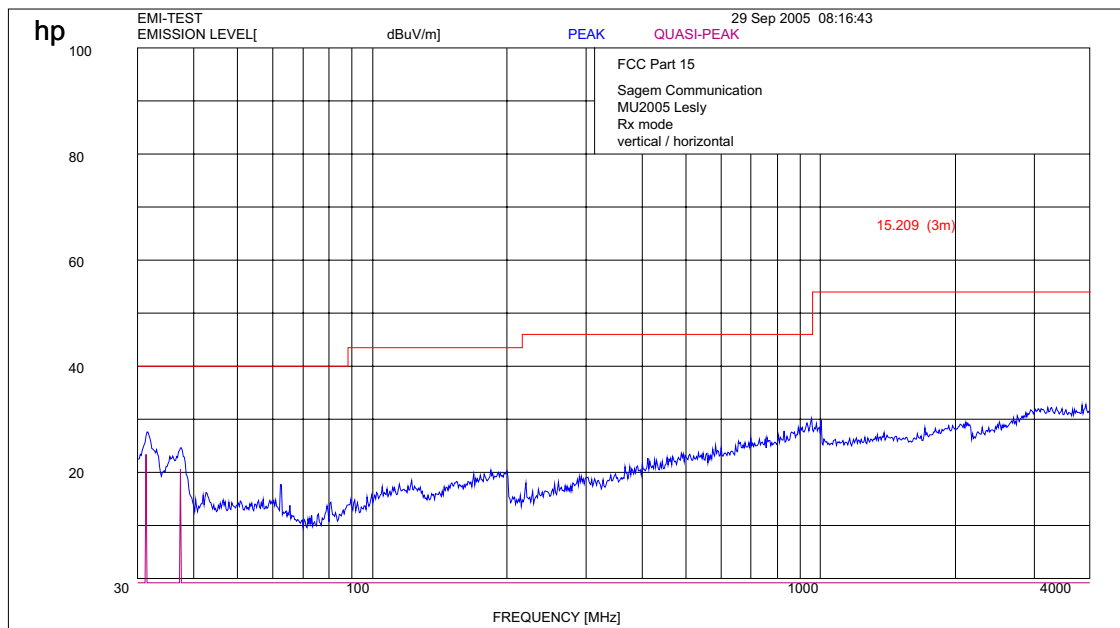

Plot : 4- 12 GHz vertical/horizontal (receiver)

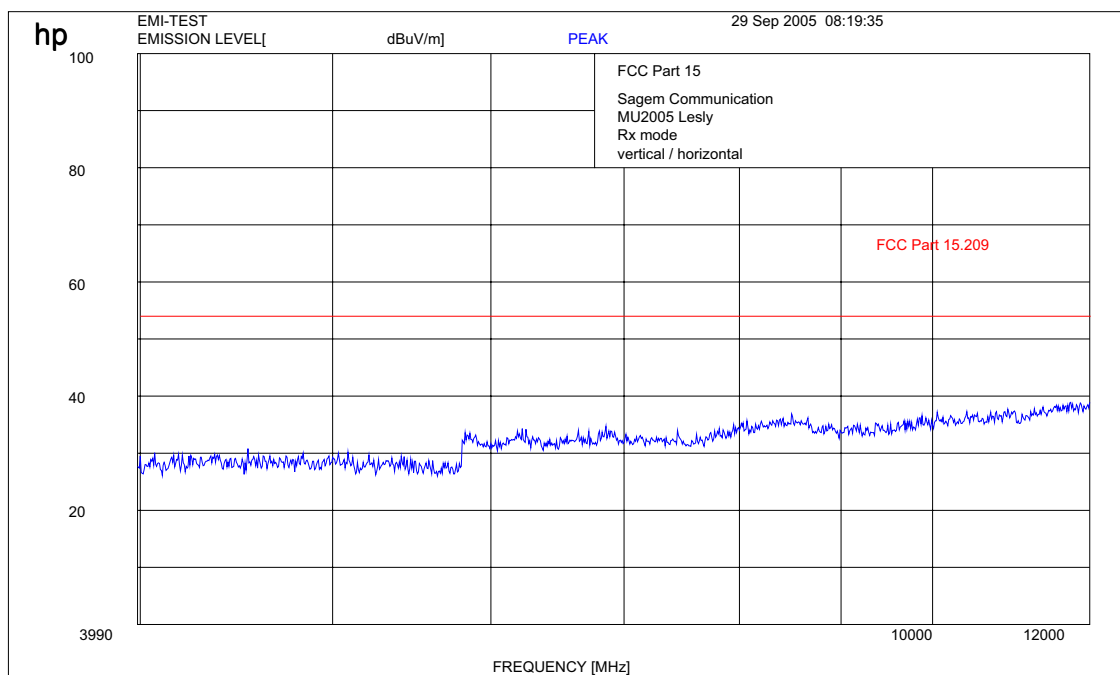




## 3.17 Spurious Emissions < 30 MHz - Transmitter radiated § 15.209

Measured at 10 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

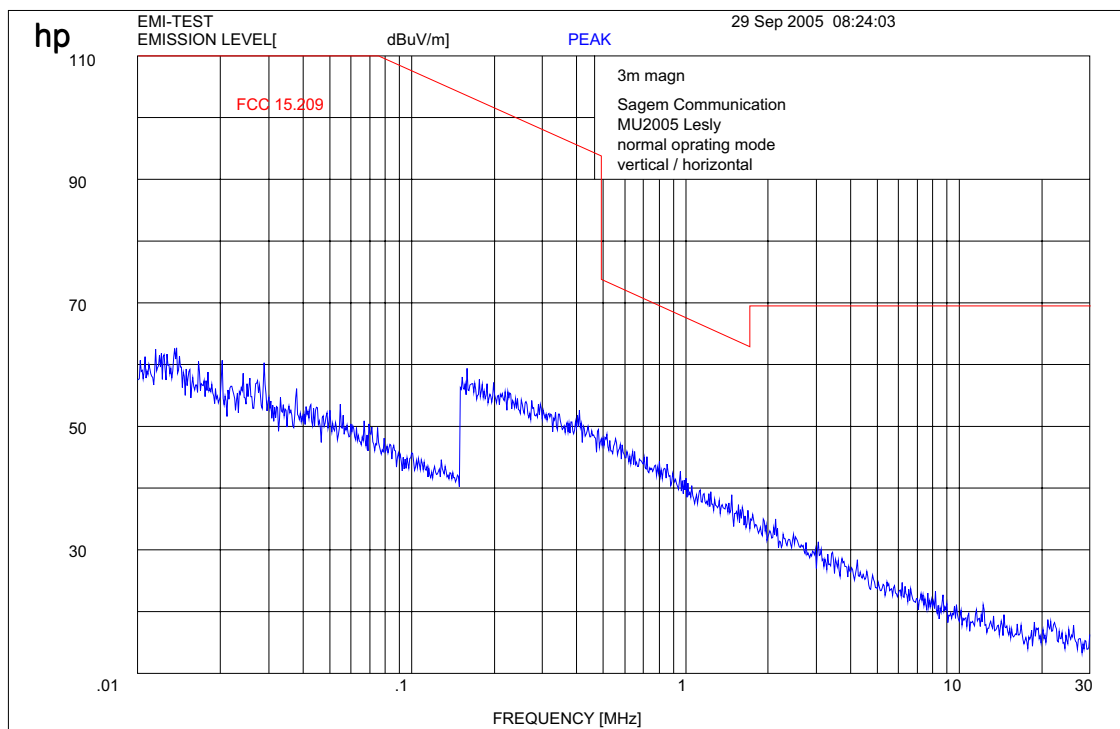

Limits:

| Frequency (MHz) | Field strength ( $\mu\text{V/m}$ ) | Measurement distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 – 0.490   | 2400/F(kHz)                        | 300                      |
| 0.490 – 1.705   | 24000/F(kHz)                       | 30                       |
| 1.705 – 30.0    | 30 / 29.5 dB $\mu\text{V/m}$       | 30                       |


## 3.18 Conducted Emissions <30 MHz § 15.107/207

### CISPR 22

EUT: MU2005 Lesly with AC/DC Adapter Typ PS53/1640  
 Manufacturer: Sagem Communication  
 Operating Condition: Tx mode  
 Test Site: CETECOM ICT Services Room 006  
 Operator: Berg  
 Power Supply: 115V / 60 Hz  
 Comment: EN 55022  
 Start of Test: 29.09.2005 / 08:38:22

### SCAN TABLE: "EN 55022 V"

|                    |           |         |                    |          |        |                 |
|--------------------|-----------|---------|--------------------|----------|--------|-----------------|
| Short Description: |           |         | Voltage Mains 1.60 |          |        |                 |
| Start              | Stop      | Step    | Detector           | Meas.    | IF     | Transducer      |
| Frequency          | Frequency | Width   |                    | Time     | Bandw. |                 |
| 150.0 kHz          | 30.0 MHz  | 7.5 kHz | MaxPeak            | 100.0 ms | 10 kHz | ESH3-Z5 L1 1458 |
|                    |           |         | Average            |          |        |                 |

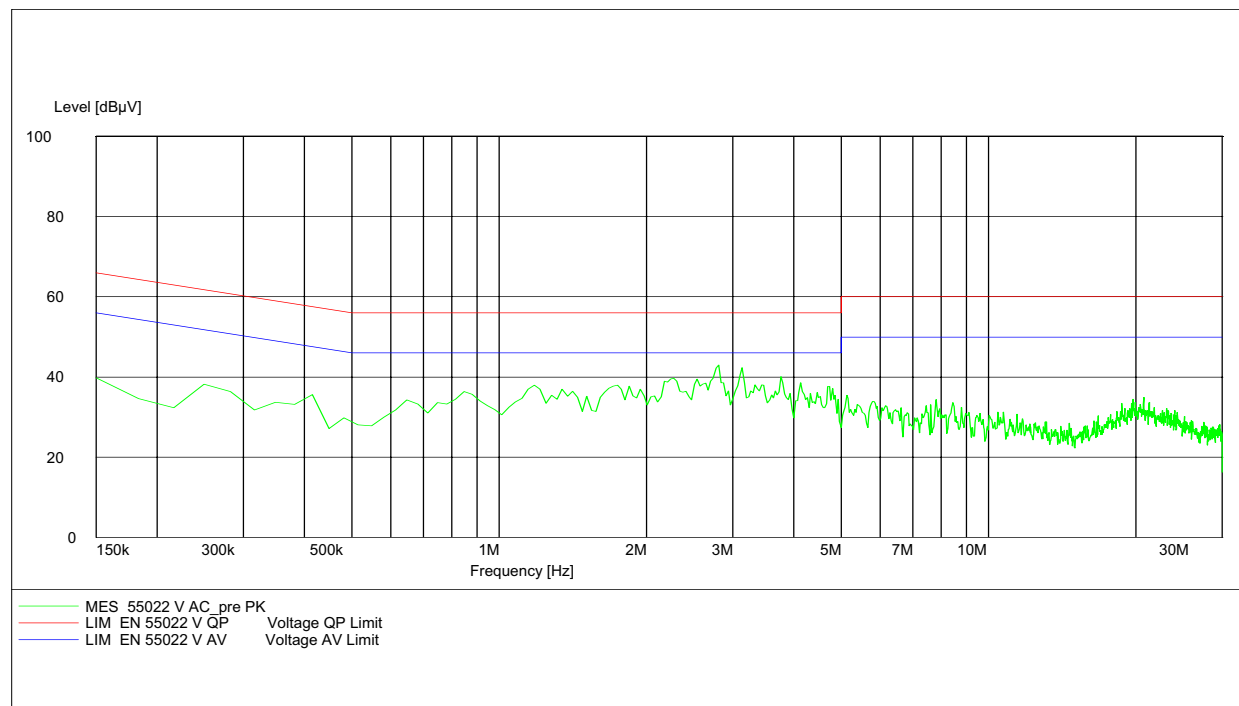

Limits :

|                                   |           |
|-----------------------------------|-----------|
| Under normal test conditions only | See plots |
|-----------------------------------|-----------|




## CISPR 22

EUT: MU2005 Lesly with AC/DC Adapter Typ PS53/1640  
 Manufacturer: Sagem Communication  
 Operating Condition: Rx mode  
 Test Site: CETECOM ICT Services Room 006  
 Operator: Berg  
 Power Supply: 115V / 60 Hz  
 Comment: EN 55022  
 Start of Test: 29.09.2005 / 08:48:47

## SCAN TABLE: "EN 55022 V"

|                    |           |         |                    |          |        |                 |
|--------------------|-----------|---------|--------------------|----------|--------|-----------------|
| Short Description: |           |         | Voltage Mains 1.60 |          |        |                 |
| Start              | Stop      | Step    | Detector           | Meas.    | IF     | Transducer      |
| Frequency          | Frequency | Width   |                    | Time     | Bandw. |                 |
| 150.0 kHz          | 30.0 MHz  | 7.5 kHz | MaxPeak            | 100.0 ms | 10 kHz | ESH3-Z5 L1 1458 |
|                    |           |         | Average            |          |        |                 |

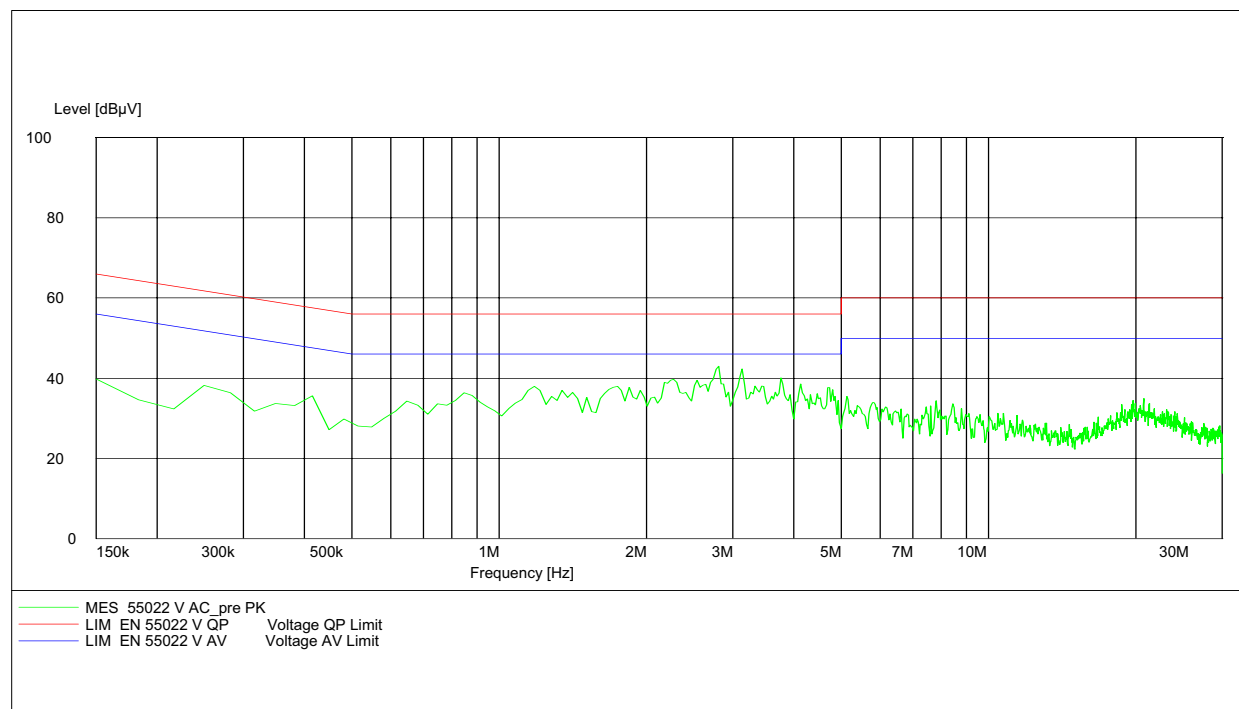

Limits :

|                                   |           |
|-----------------------------------|-----------|
| Under normal test conditions only | See plots |
|-----------------------------------|-----------|

## 3.19 Used Testequipment

### Anechoic chamber C:

| Device                    | Manufacturer | Type      | S/N Number | Inv. No. Cetecom |
|---------------------------|--------------|-----------|------------|------------------|
| Spektrum Analyser         | HP           | 8566B     | 2747A05306 | 300001000        |
| Spektrum Analyser Display | HP           | 85662A    | 2816A16541 | 300002297        |
| Quasi-Peak-Adapter        | HP           | 85650A    | 2811A01131 | 300000999        |
| Power Supply              | HP           | 6032A     | 2818A03450 | 300001040        |
| Power Attenuator          | Byrd         | 8325      | 1530       | 300001595        |
| Biconical Antenna         | EMCO         | 3104      | 3758       | 300001602        |
| Log. Period. Antenna      | EMCO         | 3146      | 2130       | 300001603        |
| Double Ridged Antenna     | EMCO         | HP 3115P  | 3088       | 300001032        |
| Active Loop Antenna       | EMCO         | 6502      | 2210       | 300001015        |
| Antenna VDE/FCC           |              | HP11965B  |            | 300002298        |
| SRM-Drive                 | HP           | 9144A     | 2823e46556 | 300001044        |
| Software                  | HP           | EMI       |            | 300000983        |
| Busisolator               | Kontron      |           |            | 300001056        |
| Absorberhalle             | MWB          |           | 87400/02   | 300000996        |
| Salzsäule                 | Kontron      |           |            | 300001055        |
| Antenna                   | R&S          | HMO20     | 832211/003 | 300002243        |
| Indukt. Tast Antenna      | R&S          | HFH 2 Z4  | 881468/026 | 300001464        |
| System-Rack               | HP I.V.      | 85900     | *          | 300000222        |
| Spectrum Analyzer         | HP           | 8566B     | 2747A05275 | 300000219        |
| Quasi-Peak-Adapter        | HP           | 85650A    | 2811A01135 | 300000216        |
| RF-Preselector            | HP           | 85685A    | 2837A00779 | 300000218        |
| Rahmen Antenne            | R&S          | HFH2-Z2   | 891847-35  | 300001169        |
| Leitungsteiler            | HP           | 11850C    |            | 300000997        |
| Breitband-Hornantenne EMI | HP           | 35155P    |            | 300002300        |
| PC                        | HP           | Vectra VL |            | 300001688        |
| VHF Meßantenne            | Schwarzbeck  | VHA 9103  |            | 300001778        |
| Spectrum Analyzer Display | HP           | 85662A    | 2816A16497 | 300001690        |
| VHF Meßantenna            | Schwarzbeck  | VHA 9103  |            | 300001780        |
| Biconical Antenna         | EMCO         | 3104 C    | 9909-4868  | 300002590        |

SRD Laboratory: (Bluetooth System)

| No | Equipment/Type                  | Manufact. | Serial Nr.    | Inv. No. Cetecom |
|----|---------------------------------|-----------|---------------|------------------|
| 1  | System Controller PSM 12        | R&S       | 835259/007    | 3000002681       |
| 2  | Memory Extension PSM-K10        | R&S       | To 1          | 3000002681       |
| 3  | Operating Software PSM-B2       | R&S       | To 1          | 3000002681       |
| 4  | 19" Monitor                     |           | 22759020-ED   | 3000002681       |
| 5  | Mouse                           |           | LZE 0095/6639 | 3000002681       |
| 6  | Keyboard                        |           | G00013834L461 | 3000002681       |
| 7  | Spectrum Analyser FSIQ 26       | R&S       | 835540/018    | 3000002681       |
| 8  | Tracking Generator FSIQ-B10     | R&S       | 835107/015    | 3000002681       |
| 10 | RF-Generator SMIQ03 (B1 Signal) | R&S       | 835541/056    | 3000002681       |
| 11 | Modulation Coder SMIQ-B20       | R&S       | To 10         | 3000002681       |
| 12 | Data Generator SMIQ-B11         | R&S       | To 10         | 3000002681       |
| 13 | RF Rear Connection SMIQ-B19     | R&S       | To 10         | 3000002681       |
| 14 | Fast CPU SM-B50                 | R&S       | To 10         | 3000002681       |
| 15 | FM Modulator SM-B5              | R&S       | 835676/033    | 3000002681       |
| 16 | RF-Generator SMIQ03 (B2 Signal) | R&S       | 835541/055    | 3000002681       |

|    |                                             |     |                |            |
|----|---------------------------------------------|-----|----------------|------------|
| 17 | Modulation Coder SMIQ-B20                   | R&S | To 16          | 3000002681 |
| 18 | Data Generator SMIQ-B11                     | R&S | To 16          | 3000002681 |
| 19 | RF Rear Connection SMIQ-B19                 | R&S | To 16          | 3000002681 |
| 20 | Fast CPU SM-B50                             | R&S | To 16          | 3000002681 |
| 21 | FM Modulator SM-B5                          | R&S | 836061/022     | 3000002681 |
| 22 | RF-Generator SMP03 (B3 Signal)              | R&S | 835133/011     | 3000002681 |
| 23 | Attenuator SMP-B15                          | R&S | 835136/014     | 3000002681 |
| 24 | RF Rear Connection SMP-B19                  | R&S | 834745/007     | 3000002681 |
| 25 | Power Meter NRVD                            | R&S | 835430/044     | 3000002681 |
| 26 | Power Sensor NRVD-Z1                        | R&S | 833894/012     | 3000002681 |
| 27 | Power Sensor NRVD-Z1                        | R&S | 833894/011     | 3000002681 |
| 28 | Rubidium Standard RUB                       | R&S | 6197           | 3000002681 |
| 29 | Switching and Signal Conditioning Unit SSCU | R&S | 338864/003     | 3000002681 |
| 30 | Laser Printer HP Deskjet 2100               | HP  | N/A            | 3000002681 |
| 31 | 19'' Rack                                   | R&S | 11138363000004 | 3000002681 |
| 32 | RF-cable set                                | R&S | N/A            | 3000002681 |
| 33 | IEEE-cables                                 | R&S | N/A            | 3000002681 |
| 34 | Sampling System FSIQ-B70                    | R&S | 835355/009     | 3000002681 |
| 35 | RSP programmable attenuator                 | R&S | 834500/010     | 3000002681 |
| 36 | Signalling Unit                             | R&S | 838312/011     | 3000002681 |
| 37 | NGPE programmable Power Supply for EUT      | R&S | 192.033.41     | 3000002681 |

**SRD Laboratory:**

| Device         | Manufacturer   | Type             | S/N Number  | Inv. No. Cetecom |
|----------------|----------------|------------------|-------------|------------------|
| Climatic box   | Heraeus Vötsch | VT 4002          | --          | 300003019        |
| Signaling Unit | R&S            | CMU200           | 832221/0055 | 300002862        |
| Power Splitter | Inmet Corp.    | 6005-3           | none        | 300002841        |
| SMA Cables     | Insulated Wire | SPS-1151-985-SPS | different   | different        |

## 4 Photographs of Test Set-up

Photo 1: Radiated Emissions


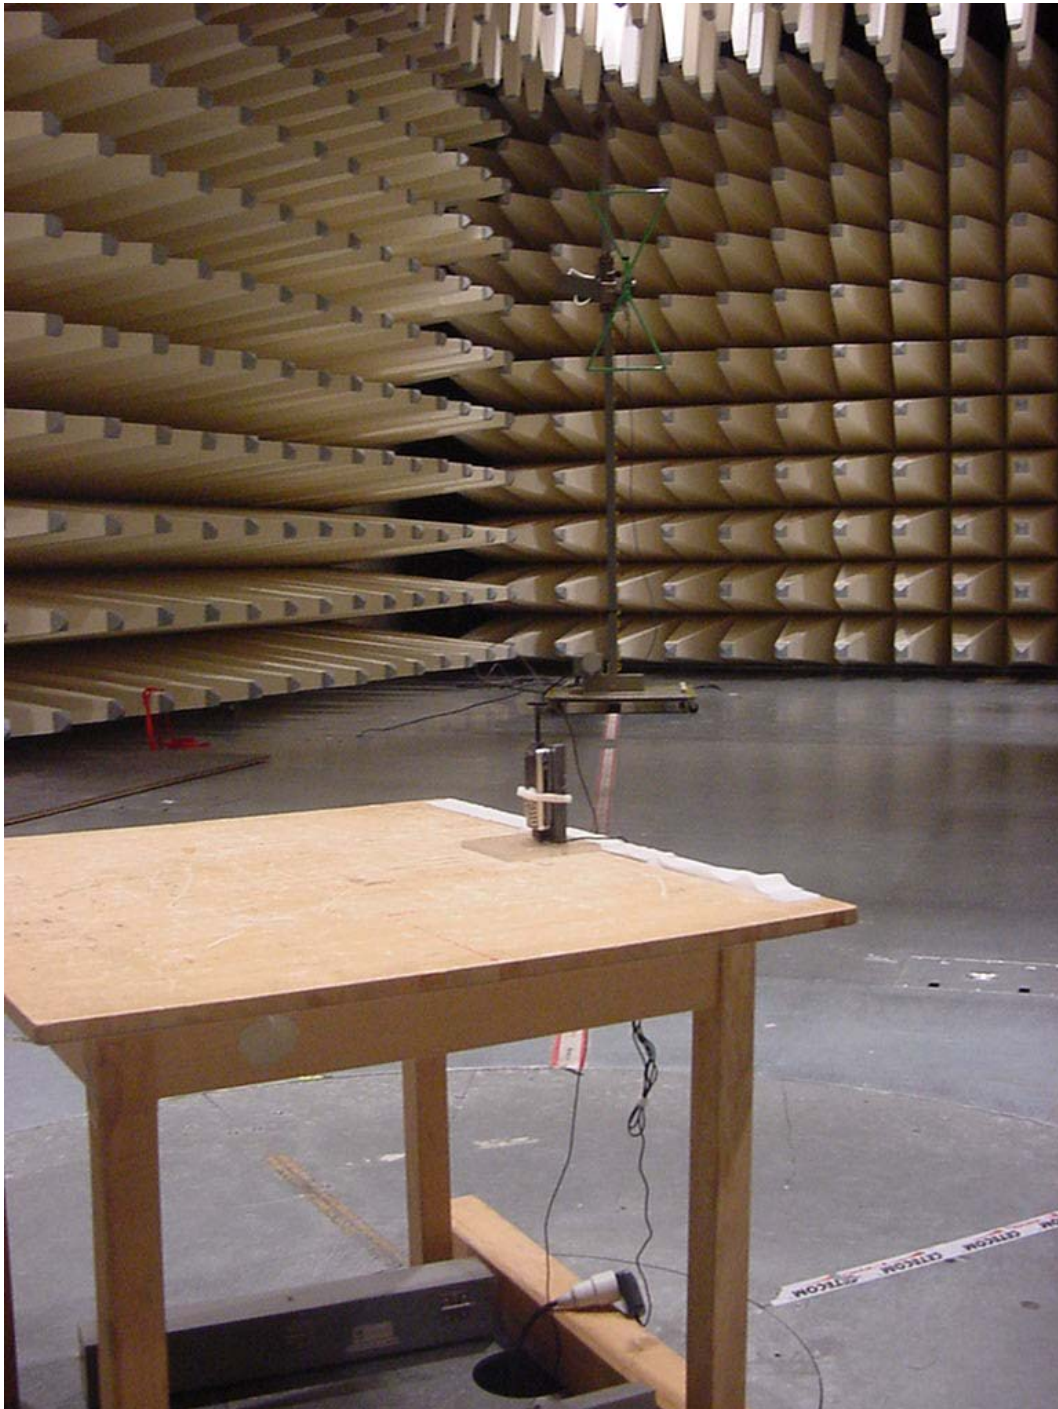




Photo 2: Radiated Emissions



Photo 3: Conducted Emissions

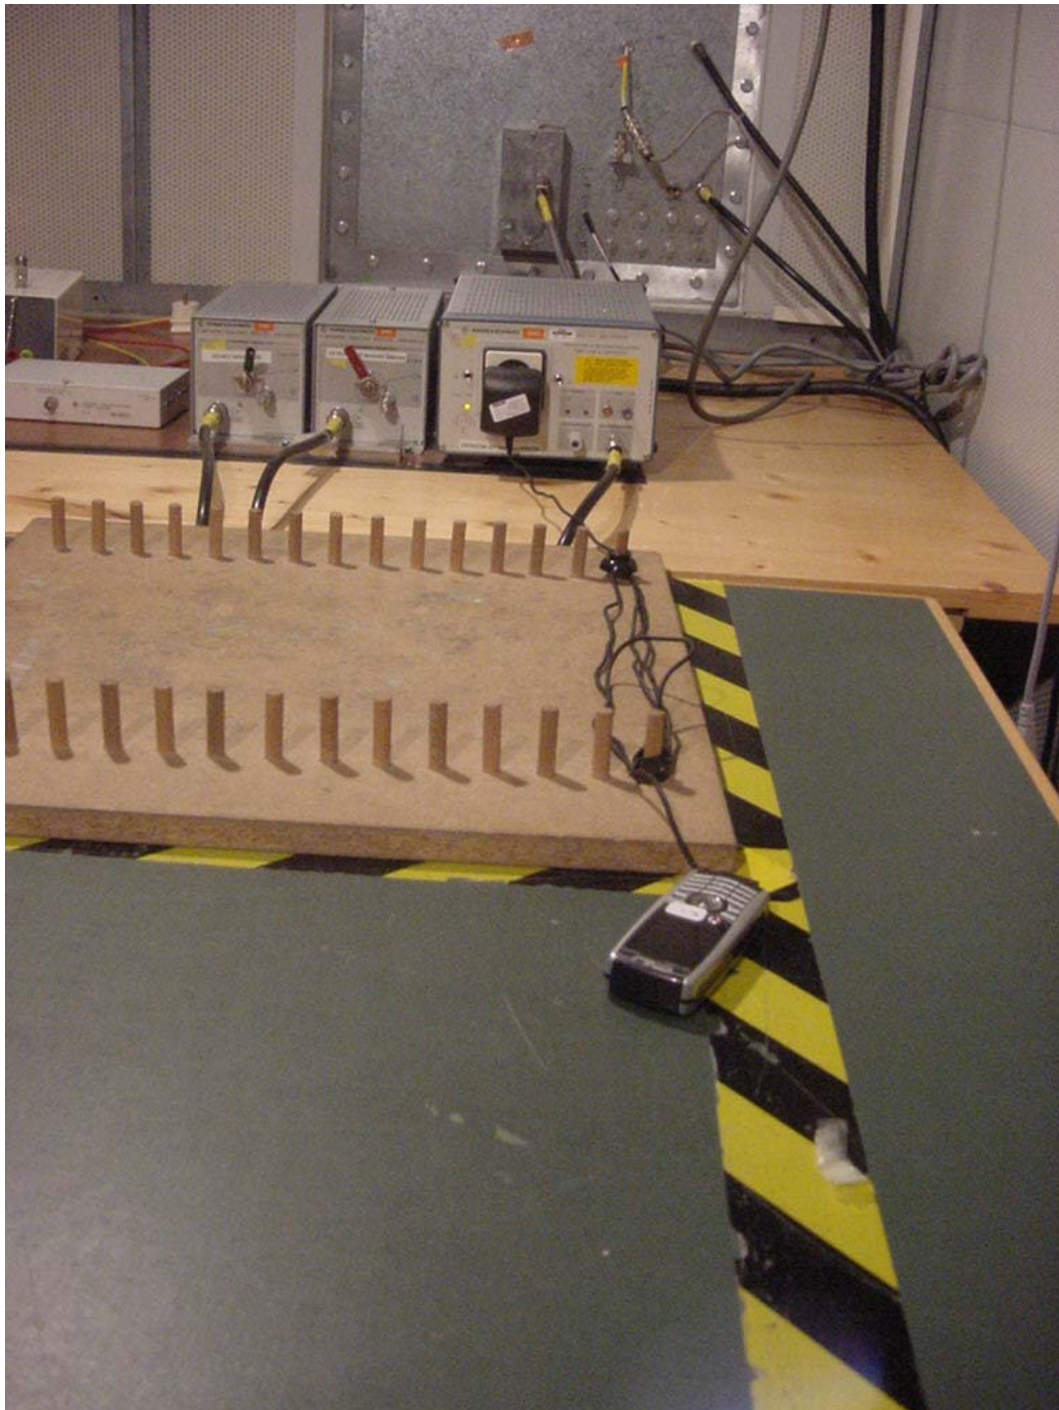



## 5 Photographs of EUT

Photo 1:



Photo 2:





Photo 3:



Photo 4:





Photo 5:



Photo 6:

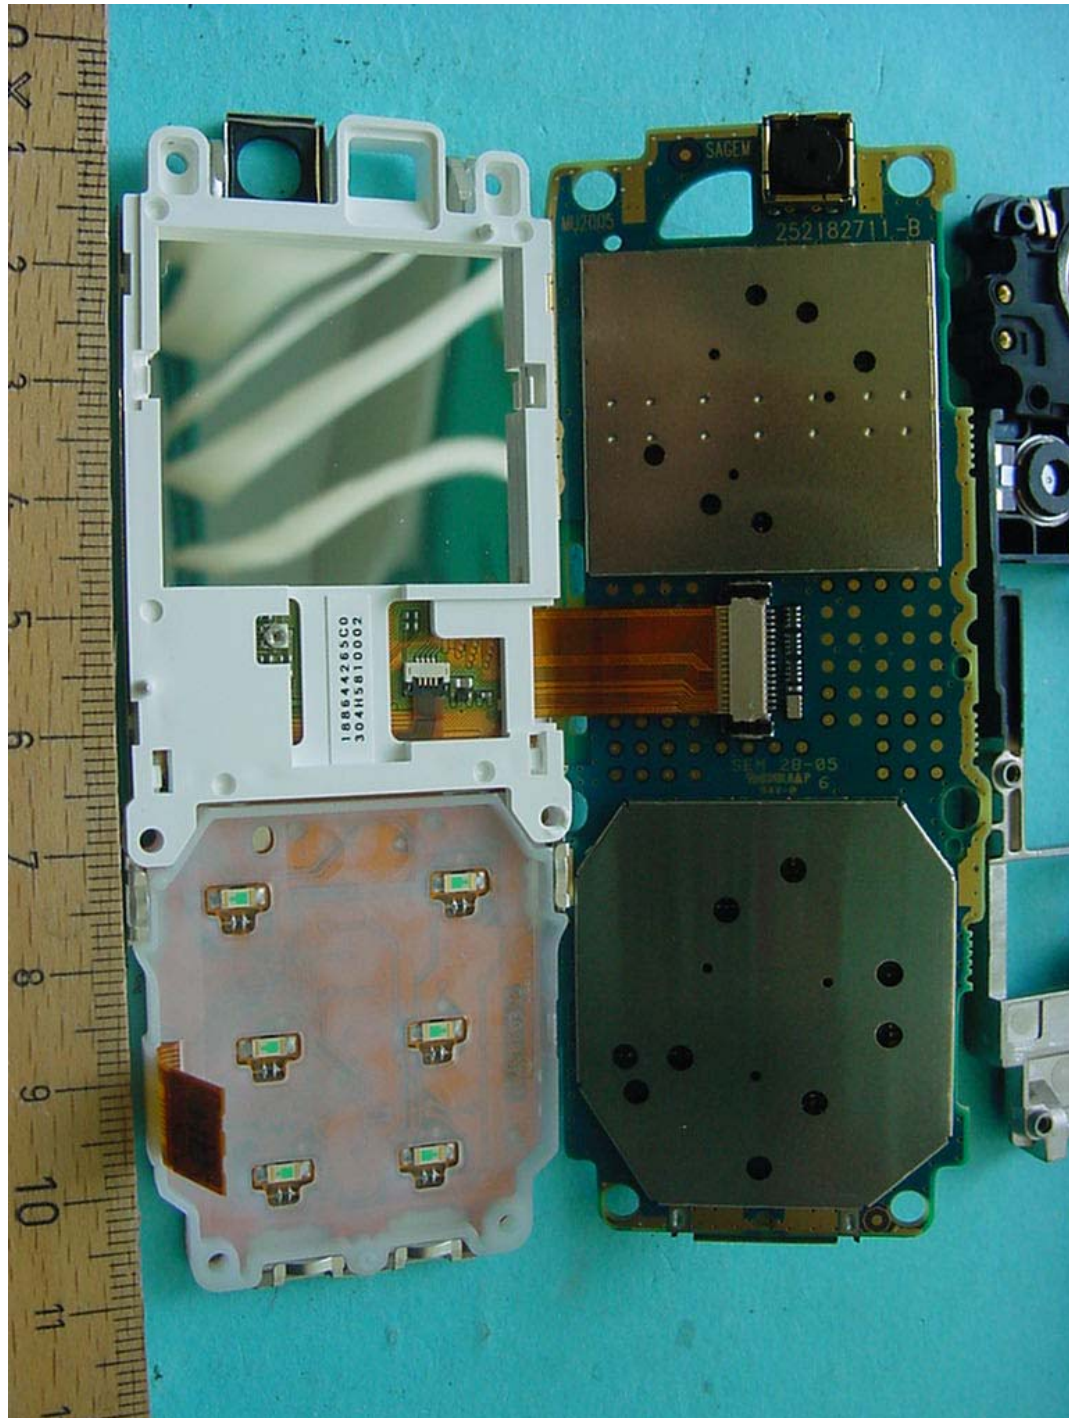




Photo 7:

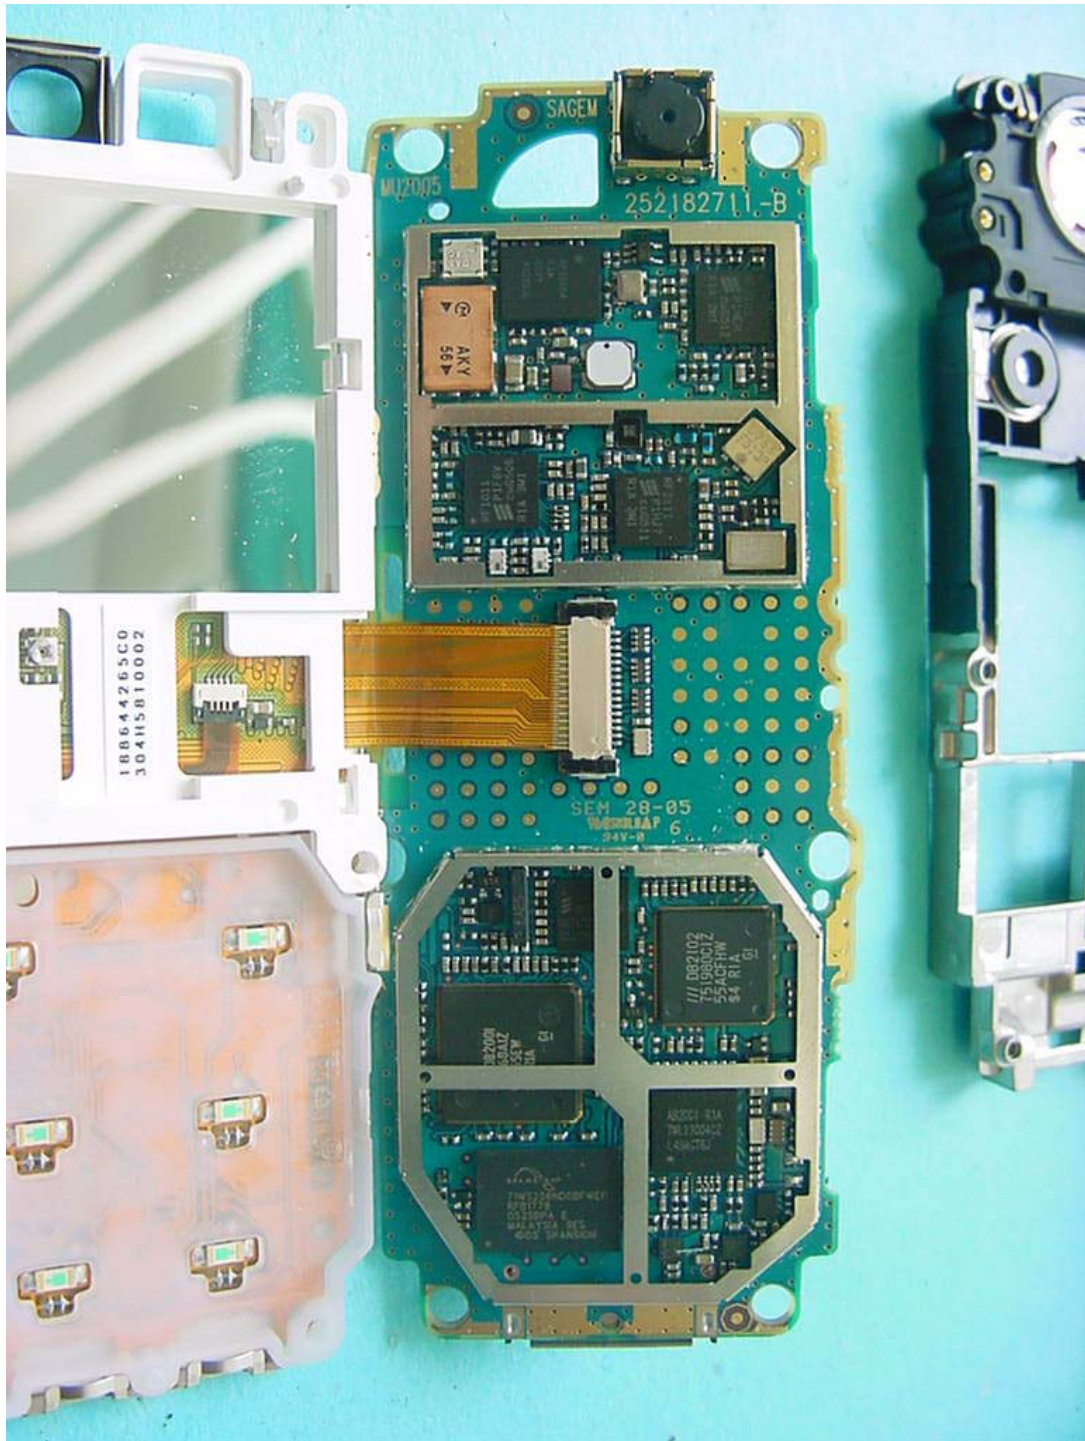


Photo 8:

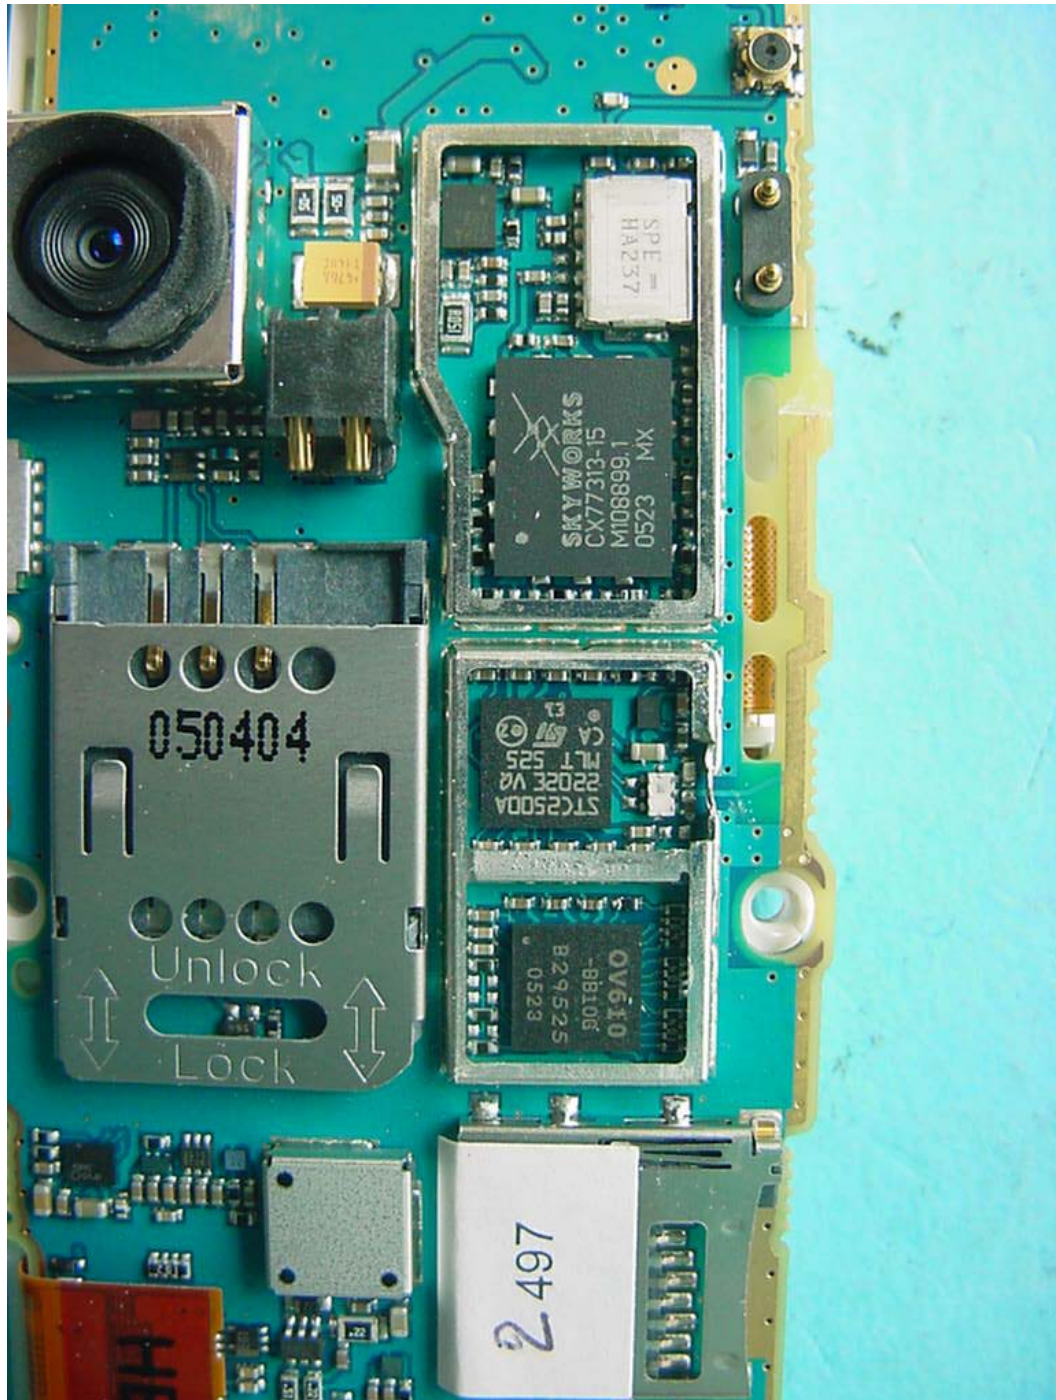




Photo 9:



Photo 10:

