



Electromagnetic Compatibility Test Report

Tests Performed on RF IDEas, Inc.

RFID Card Readers, Model RDR-7011AKU & RDR-7511AKU

Radiometrics Document RP-8291A



<i>Product Detail:</i>			
FCC ID: M9MLC7X11U			
IC: 6571A-LC7X11U			
Equipment type: RFID Card Readers			
<i>Test Standards:</i>			
US CFR Title 47, Chapter I, FCC Part 15.209			
FCC Part 15 CFR Title 47: 2016			
Innovation, Science, and Economic Development Canada RSS-210, Issue 9: 2016 as required for Category I Equipment			
This report concerns: Original Equipment			
<i>Tests Performed For:</i>		<i>Test Facility:</i>	
RF IDEas, Inc.		Radiometrics Midwest Corporation	
4020 Winnetka Av.		12 East Devonwood	
Rolling Meadows, IL 60008		Romeoville, IL 60446	
<i>Test Date(s): (Month-Day-Year)</i>			
July 6 thru August 30, 2016			
Document RP-8291A Revisions:			
Rev.	Issue Date	Affected Sections	Revised By
0	September 12, 2016		
1	September 20, 2016	Cover, 5, 10.2.2, 10.3.1	Joseph Strzelecki
2	September 27, 2016	Cover, 10.3.1	Joseph Strzelecki

Table of Contents



1 ADMINISTRATIVE DATA	3
2 TEST SUMMARY AND RESULTS	3
2.1 RF Exposure Compliance Requirements	3
3 EQUIPMENT UNDER TEST (EUT) DETAILS	4
3.1 EUT Description	4
3.1.1 FCC Section 15.203 & RSS-GEN Antenna Requirements	4
3.2 Related Submittals	4
4 TESTED SYSTEM DETAILS	4
4.1 Tested System Configuration	4
4.2 Special Accessories	4
4.3 Equipment Modifications	5
5 TEST SPECIFICATIONS AND RELATED DOCUMENTS	5
6 RADIOMETRICS' TEST FACILITIES	5
7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS	5
8 CERTIFICATION	6
9 TEST EQUIPMENT TABLE	6
10 TEST SECTIONS	6
10.1 AC Conducted Emissions	6
10.2 Radiated RF Emissions	14
10.2.1 Field Strength Calculation	15
10.2.2 Radiated Emissions Test Results	15
10.3 Magnetic Field Measurements and Decay Factor Calculations	21
10.3.1 Magnetic Field Radiated Emissions Results (0.009 to 30 MHz)	22
10.4 Occupied Bandwidth Data	22
11 MEASUREMENT INSTRUMENTATION UNCERTAINTY	23

Notice: This report must not be reproduced (except in full) without the written approval of Radiometrics Midwest Corporation.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

1 ADMINISTRATIVE DATA

<i>Equipment Under Test:</i> An RF IDEas, Inc., RFID Card Reader Models: RDR-7011AKU, RDR-7511AKU Serial Numbers: N7D000099, N8D000074 These will be referred to as the EUT in this Report	
<i>Date EUT Received at Radiometrics: (Month-Day-Year)</i> January 27, 2016	<i>Test Date(s): (Month-Day-Year)</i> July 6 thru August 30, 2016
<i>Test Report Written By:</i> Joseph Strzelecki Senior EMC Engineer	<i>Test Witnessed By:</i> The tests were not witnessed by RF IDEas, Inc.
<i>Radiometrics' Personnel Responsible for Test:</i>  Joseph Strzelecki Senior EMC Engineer NARTE EMC-000877-NE	<i>Test Report Approved By</i>  Chris W. Carlson Director of Engineering NARTE EMC-000921-NE

2 TEST SUMMARY AND RESULTS

The EUT (Equipment Under Test) is a RFID Card Readers, Models RDR-7011AKU and RDR-7511AKU, manufactured by RF IDEas, Inc. The detailed test results are presented in a separate section. The following is a summary of the test results.

Emissions Tests Results

Environmental Phenomena	Frequency Range	Basic Standard	Test Result
RF Radiated Emissions	30-1000 MHz	RSS-210 & FCC Part 15	Pass
Conducted Emissions, AC Mains	0.15 - 30 MHz	RSS-210 & FCC Part 15	Pass
RF Radiated Emissions H-Field	0.009 – 30 MHz	RSS-210 & FCC Part 15	Pass

Note: The RSS-210 specification is not currently covered in Radiometrics' Scope of Accreditation. This is technically very similar to FCC, CFR 47 Part 15 which is on Radiometrics scope.

2.1 RF Exposure Compliance Requirements

Since the effective power output is less than 1 mW, the EUT meets the FCC requirement for RF exposure and is exempt from RSS-102. There are no power level adjustments and the antenna is permanently attached. The detailed calculations for RF Exposure are presented in a separate document.

3 EQUIPMENT UNDER TEST (EUT) DETAILS

3.1 EUT Description

The EUT is an RFID Card Reader, Models RDR-7011AKU and RDR-7511AKU, manufactured by RF IDEas, Inc. The EUT was in good working condition during the tests, with no known defects.

3.1.1 FCC Section 15.203 & RSS-GEN Antenna Requirements

The antenna is permanently attached to the PCB. The antenna is internal to the EUT and it is not readily available to be modified by the end user.

3.2 Related Submittals

RF IDEas, Inc. is not submitting any other products simultaneously for equipment authorization related to the EUT.

4 TESTED SYSTEM DETAILS

4.1 Tested System Configuration

The system was configured for testing in a typical fashion. The EUT was placed on an 80-cm high, nonconductive test stand. The testing was performed in conditions as close as possible to installed conditions. Wiring was consistent with manufacturer's recommendations. Power was supplied at 115 VAC, 60 Hz single-phase to the host computer. The EUT was powered from either the USB or PS/2 port.

The identification for all equipment, plus descriptions of all cables used in the tested system, are:

Tested System Configuration List

Item	Description	Type*	Manufacturer	Model Number	Serial Number
1	RFID Card Reader	E	RF IDEas	RDR-7011AKU	N7D000099
2	RFID Card Reader	E	RF IDEas	RDR-7511AKU	N8D000074
3	Desktop computer	H	HP	KR675UT#ABA	2UA9150PSR
4	12-inch LCD Monitor	P	Dell	E156FP1	CN0Y999872872-5BN1KET
5	Keyboard	P	HP	KB0016	BC2AA0FBBVW57A
6	Mouse	P	Microsoft	XMP1	02200090

*Type: E = EUT, P = Peripheral, S = Support Equipment; H = Host Computer

List of Cables

QTY	Length (m)	Cable Description	Shielded?
1	1.85	USB Cable to Card Reader	Yes
1	1.5	VGA Cable to LCD monitor	Yes
1	1.1	Serial Cable from modem to computer	Yes
1	1.8	AC input Cord to Computer	No
1	1.5	DC Cord to Modem	No

4.2 Special Accessories

No special accessories were used during the tests in order to achieve compliance.

4.3 Equipment Modifications

No modifications were made at Radiometrics in order to meet the requirements listed in this report.

5 TEST SPECIFICATIONS AND RELATED DOCUMENTS

Document	Date	Title
FCC CFR Title 47	2016	Code of Federal Regulations Title 47, Chapter 1, Federal Communications Commission, Part 15 - Radio Frequency Devices
ANSI C63.10-2013	2013	American National Standard for Testing Unlicensed Wireless Devices
IC RSS-210 Issue 9	2016	Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands) Category I Equipment
IC RSS-Gen Issue 4	2014	General Requirements and Information for the Certification of Radiocommunication Equipment (RSS-Gen)

The test procedures used are in accordance with the Industry Canada RSS-Gen and ANSI document C63.10-2013. The specific procedures are described herein.

6 RADIOMETRICS' TEST FACILITIES

The results of these tests were obtained at Radiometrics Midwest Corp. in Romeoville, Illinois, USA. Radiometrics is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025: 2005 "General Requirements for the Competence of Calibration and Testing Laboratories". Radiometrics' Lab Code is 121191 and Certification Number is 1495.01. Radiometrics' scope of accreditation includes all of the test methods listed herein. A copy of the accreditation can be accessed on our web site (www.radiomet.com). Radiometrics accreditation status can be verified at A2LA's web site (www.a2la2.org).

The following is a list of shielded enclosures located in Romeoville, Illinois used during the tests:

Chamber E: Is a custom made anechoic chamber that measures 52' L X 30' W X 18' H. The walls and ceiling are fully lined with RF absorber. Pro-shield of Collinsville, Oklahoma manufactured the chamber.

Test Station F: Is an area that measures 10' D X 12' W X 10' H. The floor and back wall are metal shielded. This area is used for conducted emissions measurements.

A separate ten-foot long, brass plated, steel ground rod attached via a 6 inch copper braid grounds each of the above chambers. Each enclosure is also equipped with low-pass power line filters.

The FCC has accepted these sites as test site number US1065. The FCC test site Registration Number is 732175. Details of the site characteristics are on file with the Industry Canada as site number IC8727A-1.

A complete list of the test equipment is provided herein. The calibration due dates are indicated on the equipment list. The equipment is calibrated in accordance to ANSI/NCSL Z540-1 with traceability to the National Institute of Standards and Technology (NIST).

7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS

There were no deviations or exclusions from the test specifications.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

8 CERTIFICATION

Radiometrics Midwest Corporation certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specification. The results relate only to the EUT listed herein. Any modifications made to the EUT subsequent to the indicated test date will invalidate the data and void this certification.

9 TEST EQUIPMENT TABLE

RMC ID	Manufacturer	Description	Model No.	Serial No.	Frequency Range	Cal Period	Cal Date
AMP-22	Anritsu	Pre-amplifier	MH648A	M23969	0.1-1200MHz	12 Mo.	01/05/16
ANT-03	Tensor	Biconical Antenna	4104	2231	20-250MHz	24 Mo.	12/07/15
ANT-04	Tensor	Biconical Antenna	4104	2246	20-250MHz	24 Mo.	05/16/16
ANT-06	EMCO	Log-Periodic Ant.	3146	1248	200-1000MHz	24 Mo.	11/25/15
ANT-08	RMC	Log-Periodic Ant.	LP1000	1002	200-1000MHz	24 Mo.	08/26/14
ANT-53	EMCO	Loop Antenna	6507	1453	1 kHz-30 MHz	24 Mo.	12/17/15
LSN-01	Electrometrics	50 uH LISN	FCC/VDE 50/2	1001	0.01-30MHz	24 Mo.	06/23/15
LSN-03	Farnell	50 uH LISN	1EXLSN30B	000314	0.15-30MHz	24 Mo.	06/23/15
REC-20	HP / Agilent	Spectrum Analyzer	85460A/84562A	33330A00135 3410A00178	30Hz-6GHz	24 Mo.	06/26/15
REC-21	Agilent	Spectrum Analyzer	E7405A	MY45118341	9kHz-26.5 GHz	12 Mo.	12/22/15
REC-43	Adventest	Spectrum Analyzer	U3772	150800305	9kHz-43GHz	12 Mo.	03/07/16
THM-03	Fluke	Temp/Humid Meter	971	95850465	N/A	12 Mo.	01/11/16
PSA-02	Calf. Instruments	AC Power/ Analyzer	5001ix--208-164-411	58403	DC-5kHz	24 Mo.	11/24/15

Note: All calibrated equipment is subject to periodic checks.

10 TEST SECTIONS

10.1 AC Conducted Emissions

The tests and limits are in accordance with FCC section 15.207 and RSS Gen section 8.8.

A computer-controlled analyzer was used to perform the conducted emissions measurements. The frequency range was divided into 500 subranges equally spaced on a logarithmic scale. The computer recorded the peak of each subrange. This data was then plotted on a semi-log graph generated by the computer. Adjusting the positions of the cables and orientation of the test system then maximizes the highest emissions.

Mains Conducted emission measurements were performed using a 50 Ohm/50 uH Line Impedance Stabilization Network (LISN) as the pick-up device. Measurements were repeated on both leads within the power cord. If the EUT power cord exceeded 80 cm in length, the excess length of the power cord was made into a 30 to 40 cm bundle near the center of the cord. The LISN was placed on the floor at the base of the test platform and electrically bonded to the ground plane.

FCC/IC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dBuV)	
	Quasi-Peak	Average
0.150 - 0.50*	66 - 56	56 - 46
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of the frequency in this range.

The initial step in collecting conducted data is a peak detector scan and the plotting of the measurement range. Significant peaks are then marked as shown on the following table, and these signals are then measured with the quasi-peak detector. The following represents the worst case emissions from the host computer (with the EUT connected) power cord, after testing all modes of operation.

In accordance with the FCC rules regarding transmitters below 30 MHz.

The transmitter was tested with a dummy load under the following conditions:

- 1) First, the AC line conducted tests with the antenna attached were performed to determine if the EUT complies with the 15.207 limits outside of the transmitter's fundamental emission band.
- 2) The AC line conducted emissions were retested with a dummy load to make sure the device complies with the 15.207 limits inside the transmitter's fundamental emission band. Only the fundamental TX emission band needs to be retested. The load was 100 Ohm. This is the characteristic impedance of the antenna.

Test Date : August 19, 2016


QP readings are quasi-peak with a 9 kHz bandwidth and no video filter.

Judgment: Passed by at least 10 dB at 13.56 MHz with Resistive Load in place of standard Loop antenna.

Judgment: Passed by at least 6 dB at all frequencies, except 13.56 MHz, with standard Loop antenna installed.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

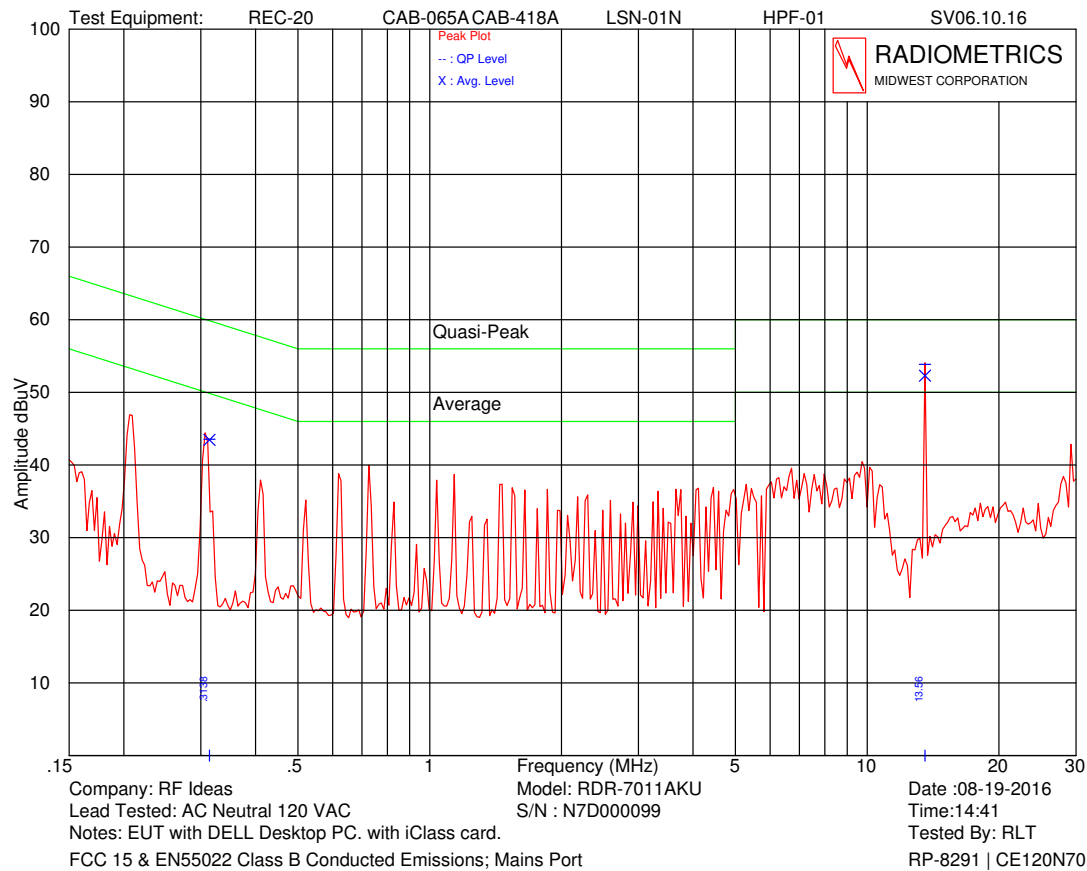


Model: RDR-7011AKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.314	43.5	59.9	43.5	49.9	6.4
13.560	53.9	60.0	52.3	50.0	-2.3

The emission at 13.56 MHz was re-measured with a resistive load in place of the antenna and was fully compliant.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

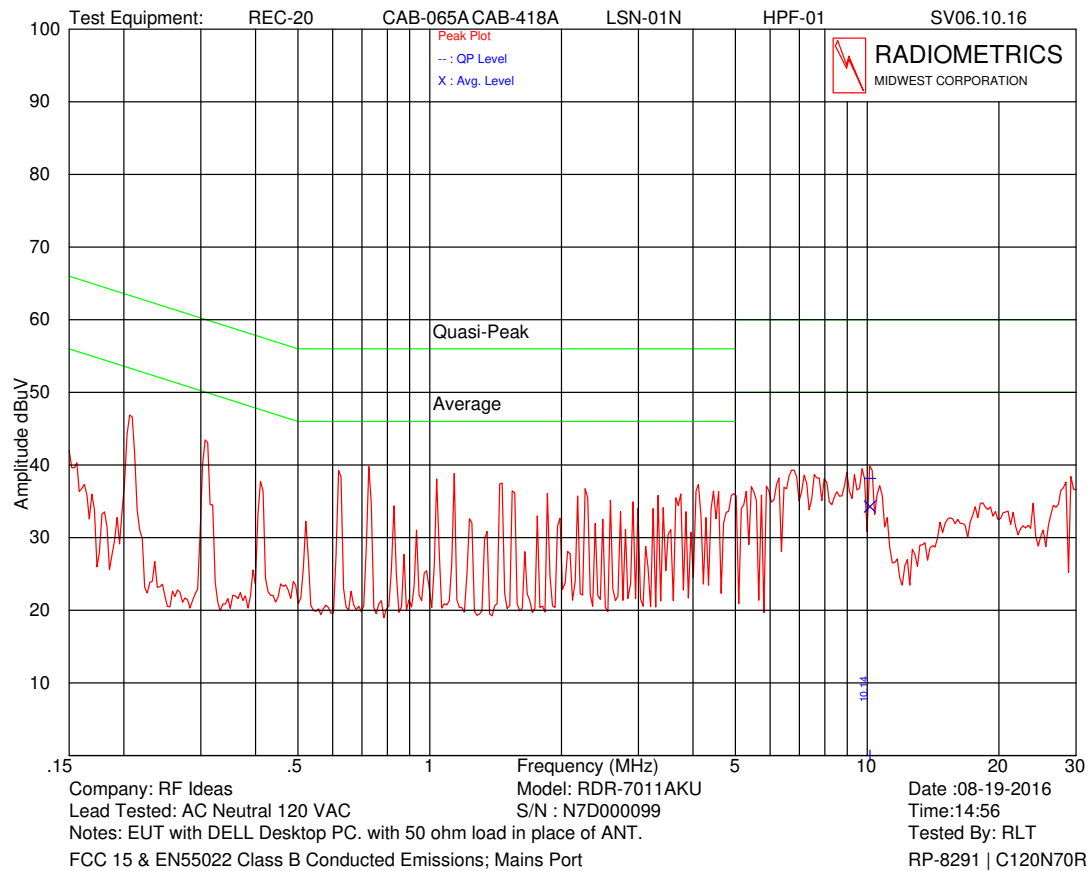


Model: RDR-7011AKU; With Load in place of antenna

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
10.142	38.2	60	34.3	50	15.7

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

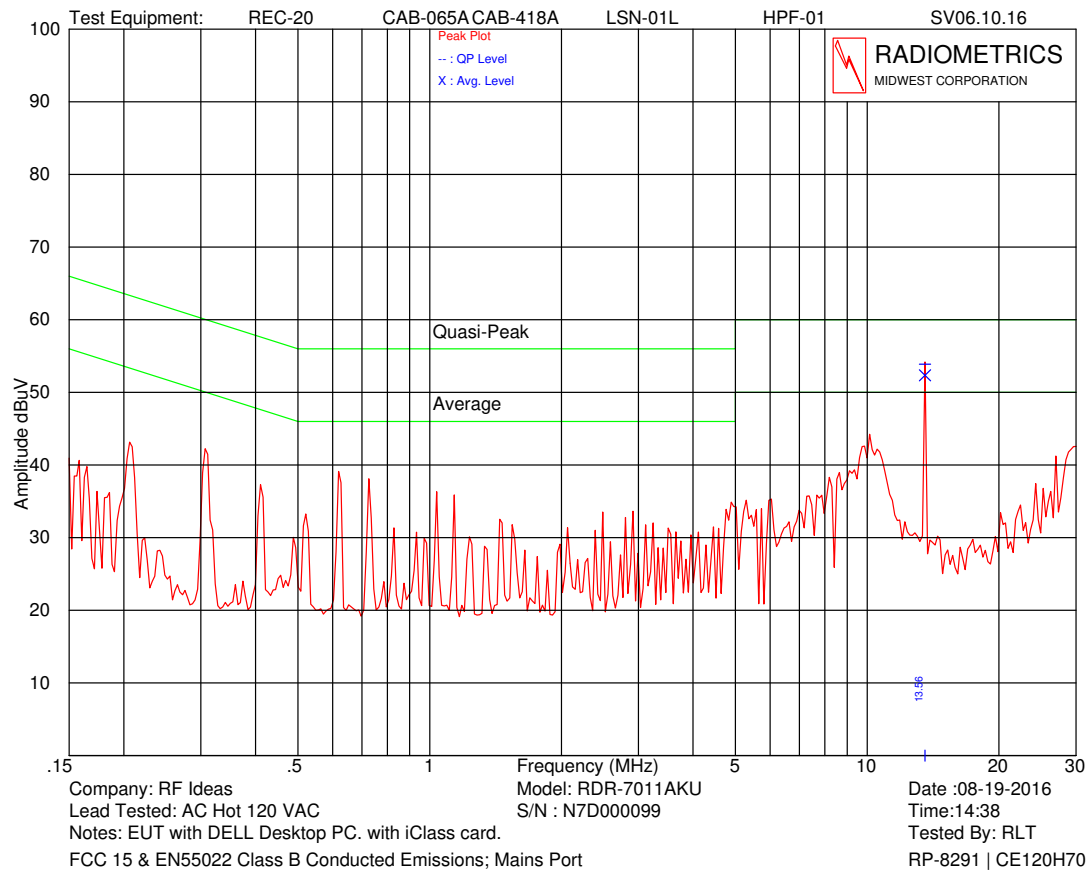


Model: RDR-7011AKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
13.560	53.9	60.0	52.3	50	-2.3

The emission at 13.56 MHz was re-measured with a resistive load in place of the antenna and was fully compliant.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

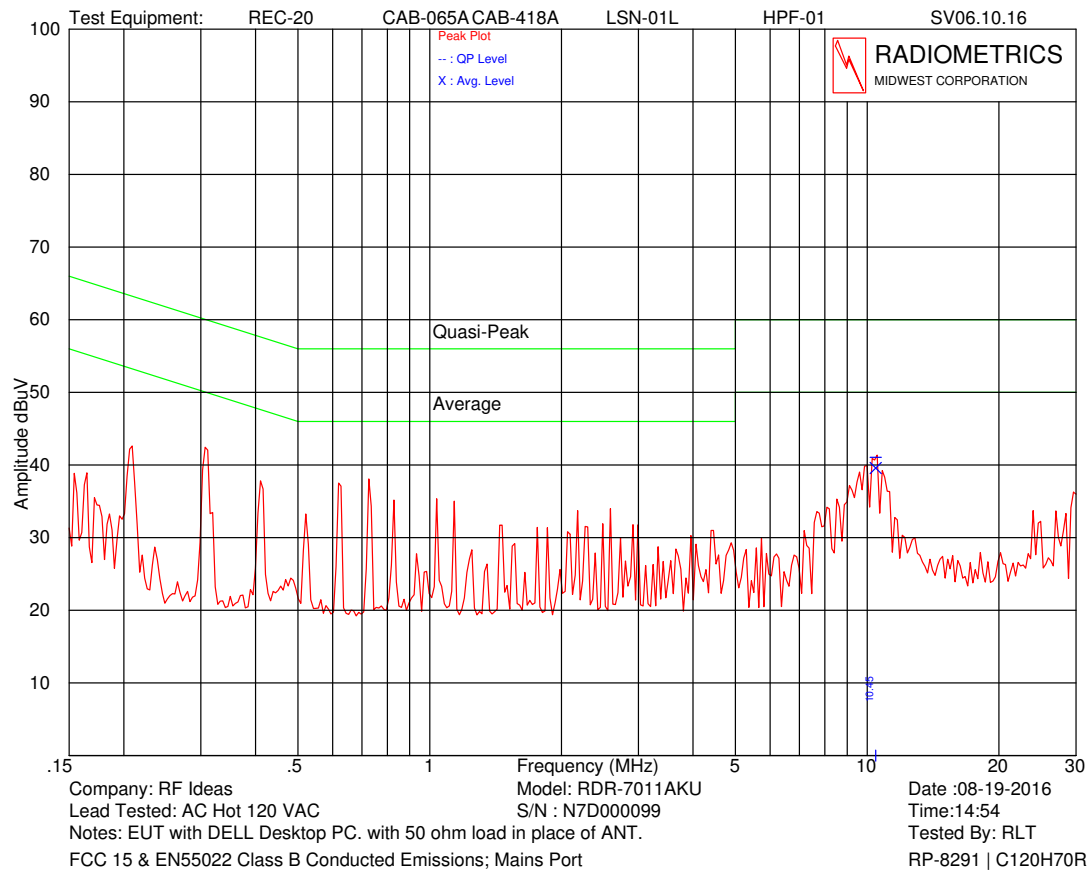


Model: RDR-7011AKU; With Load in place of antenna

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
10.456	41.1	60	39.6	50	10.4

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

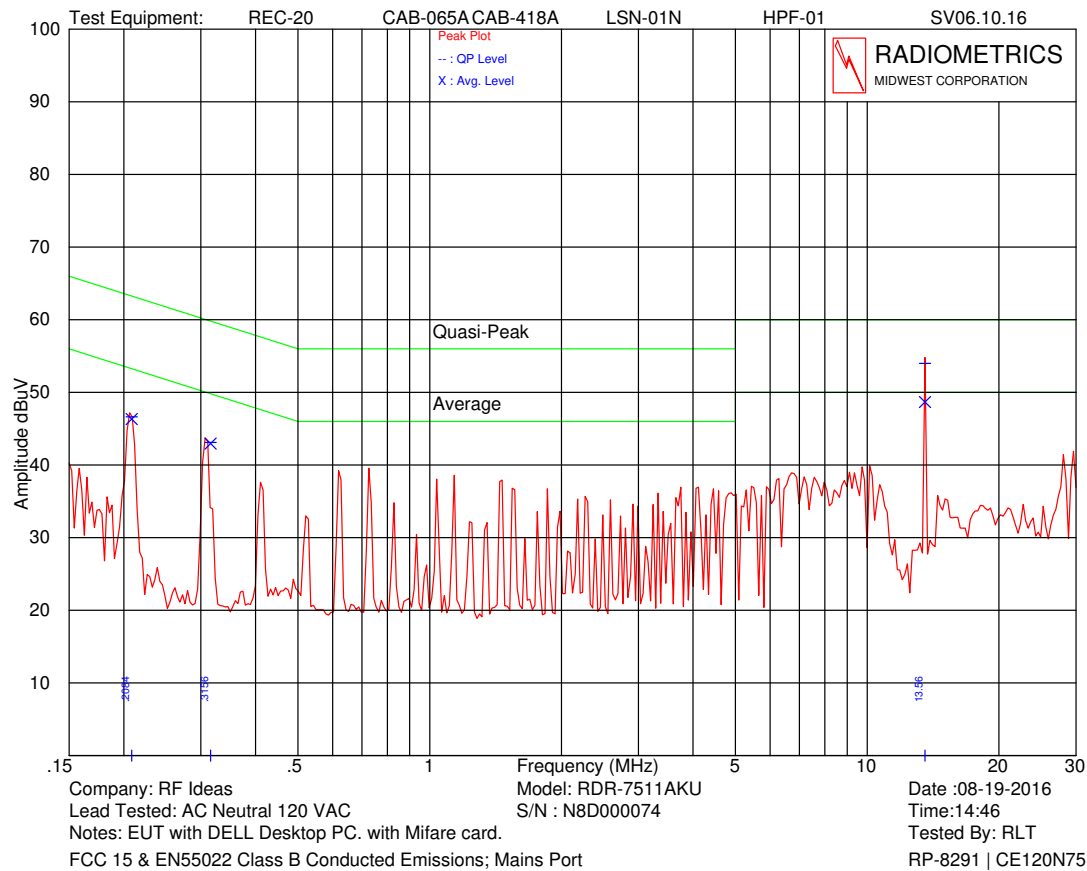


Model: RDR-7511AKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.208	46.6	63.3	46.3	53.3	6.9
0.316	43.1	59.8	42.9	49.8	6.9
13.561	54.0	60.0	48.7	50.0	1.3


RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

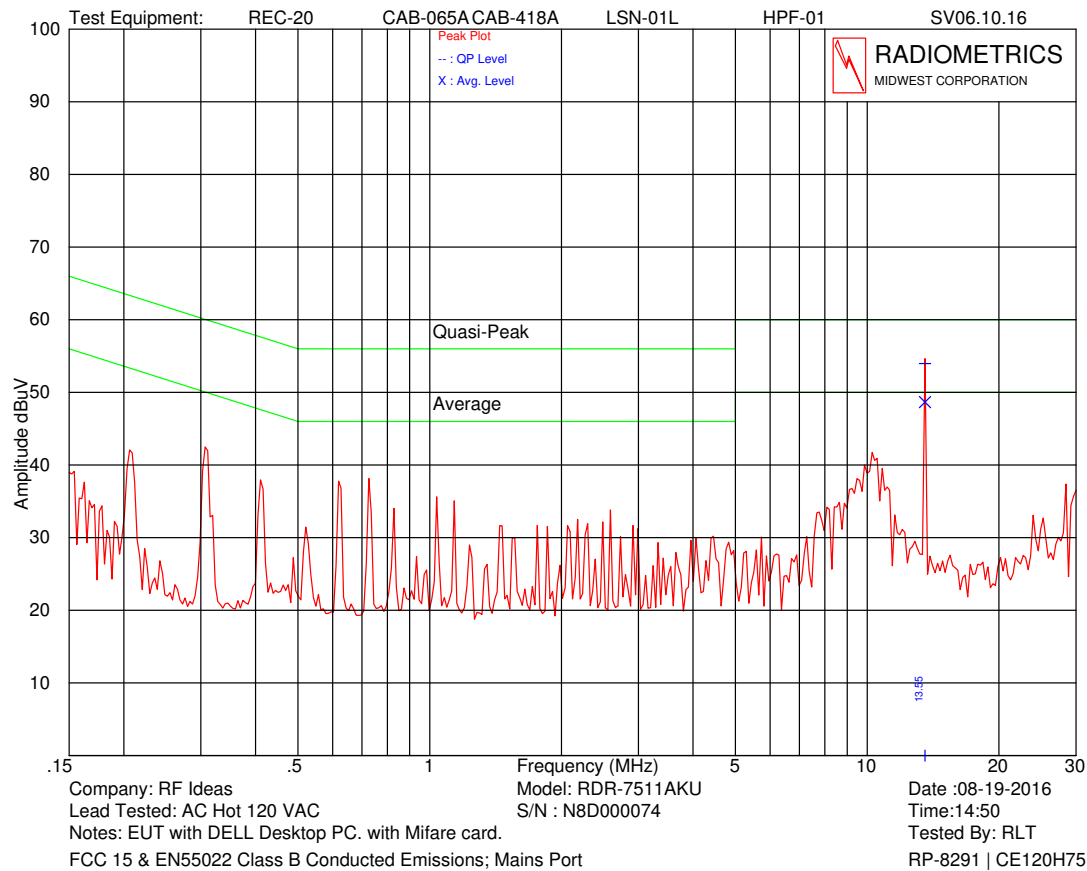

Model: RDR-7011AKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
13.560	54.0	60.0	48.7	50.0	1.3

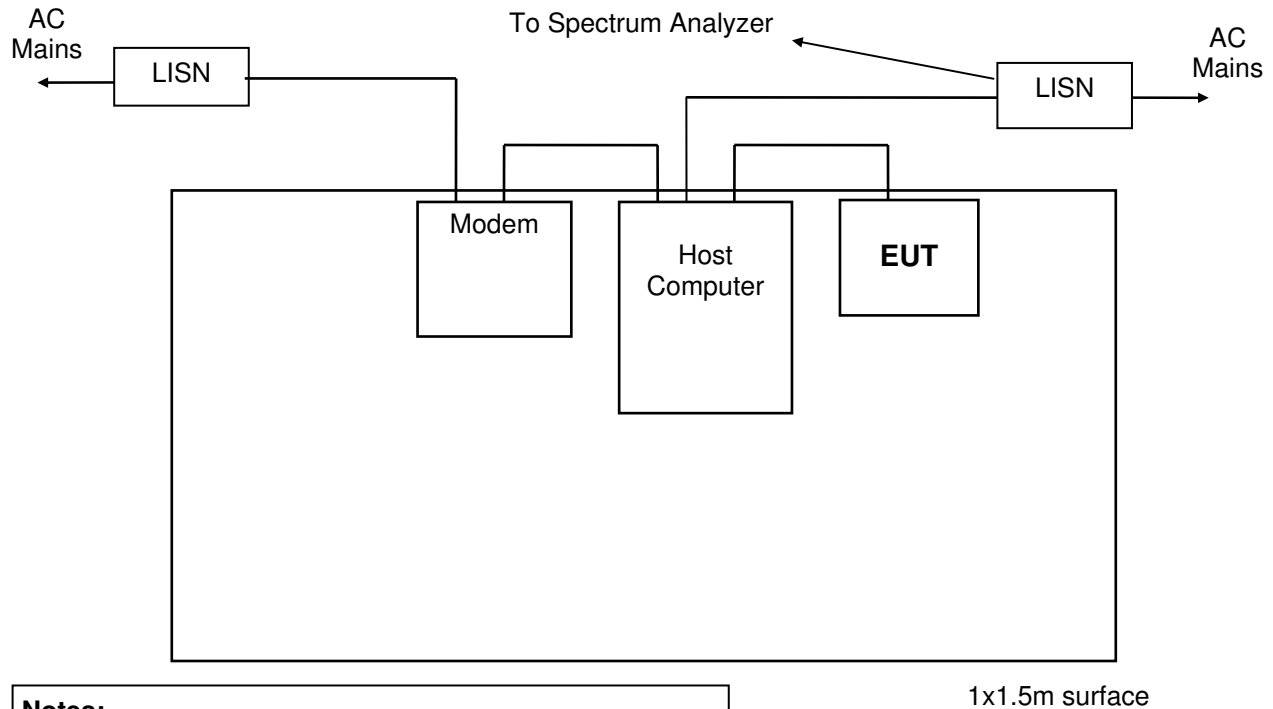Figure 1. Conducted Emissions Test Setup**Notes:**

- LISN's at least 80 cm from EUT chassis
- Vertical conductive plane 40 cm from rear of table top
- EUT power cord bundled

10.2 Radiated RF Emissions

Radiated emission measurements were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. The radiated emission measurements were performed with a spectrum analyzer. The bandwidth used from 150 kHz to 30 MHz is 9 or 10 kHz and the bandwidth from 30 MHz to 1000 MHz is 100 or 120 kHz. Above 1 GHz, a 1 MHz bandwidth is used. A 10 dB linearity check is performed prior to start of testing in order to determine if an overload condition exists. Figure 4 herein lists the details of the test equipment used during radiated emissions tests.

Final radiated emissions measurements were performed inside of an anechoic chamber at a test distance of 3 meters. The anechoic chamber is designated as Chamber E. This Chamber meets the Site Attenuation requirements of ANSI C63.4 and CISPR 16-1. Chamber E is located at 12 East Devonwood Ave. Romeoville, Illinois EMI test lab.

The entire frequency range from 30 to 1000 MHz was slowly scanned with particular attention paid to those frequency ranges which appeared high. Measurements were performed using two antenna polarizations, (vertical and horizontal). The worst case emissions were recorded. All measurements may be performed using either the peak, average or quasi-peak detector functions. If the peak detector data exceeds or is marginally close to the limits, the measurements are repeated using a quasi-peak detector or average function as required by the specification for final determination of compliance.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

The detected emission levels were maximized by rotating the EUT, adjusting the positions of all cables, and by scanning the measurement antenna from 1 to 4 meters above the ground.

Radiated Emissions Field Strength Limits

Frequency Range (MHz)	Test Distance (meters)	Class B Limits (uV/m)		
		QP	Average	Peak
0.009-0.490	300	2400/F(kHz)	N/A	N/A
0.490-1.705	30	24000/F(kHz)	N/A	N/A
1.705-30.0	30	30	N/A	N/A
30 - 230	10	30	N/A	N/A
230 - 1000	10	37	N/A	N/A
1000 - 3000	3	N/A	50	70
>3000	3	N/A	54	74

An Average detector can be used for 9-90 kHz and 110-490 kHz.

10.2.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

Note: The actual FCC limits are in uV/m. The data in the table below covered the limit to dBuV/m.

100 uV/m = 40.0 dBuV/m

150 uV/m = 43.5 dBuV/m

200 uV/m = 46.0 dBuV/m

500 uV/m = 54.0 dBuV/m

10.2.2 Radiated Emissions Test Results

Company	RF IDEas	Specification	FCC Part 15 Subpart C & RSS-GEN Table 4
Model	RDR-7011AKU	Test Date	August 19, 2016
Serial Number	N7D000099	Test Distance	3 Meters
Test Personnel	Chris Dalessio	Test Location	Chamber E
Abbreviations	Pol = Antenna Polarization; V = Vertical; H = Horizontal Det.= Detector setting; A = Average; P = peak; Q = QP;		
Notes	No card on reader		

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
34.4	47.5	P	H	11.5	-28.3	0.0	30.7	40.0	9.3	
60.3	50.9	P	H	9.0	-28.2	0.0	31.7	40.0	8.3	
77.8	47.1	P	H	6.5	-28.0	0.0	25.6	40.0	14.4	
89.9	44.2	P	H	9.8	-27.9	0.0	26.1	43.5	17.4	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
119.7	46.3	P	H	12.4	-27.8	0.0	30.9	43.5	12.6	
149.4	43.0	P	H	13.1	-27.7	0.0	28.4	43.5	15.1	
170.3	37.9	P	H	16.1	-27.6	0.0	26.4	43.5	17.1	
209.3	41.6	P	H	15.4	-27.5	0.0	29.5	43.5	14.0	
237.9	39.5	P	H	15.4	-27.4	0.0	27.5	46.0	18.5	
278.8	44.0	P	H	13.4	-27.3	0.0	30.1	46.0	15.9	
298.8	39.7	P	H	14.3	-27.2	0.0	26.8	46.0	19.2	
348.8	45.9	P	H	14.0	-27.2	0.0	32.7	46.0	13.3	
365.0	42.2	P	H	14.3	-27.0	0.0	29.5	46.0	16.5	
392.5	49.5	P	H	15.0	-27.2	0.0	37.3	46.0	8.7	
433.8	45.2	P	H	15.6	-27.0	0.0	33.8	46.0	12.2	
461.3	42.3	P	H	16.2	-27.0	0.0	31.5	46.0	14.5	
488.1	42.1	P	H	17.4	-26.8	0.0	32.7	46.0	13.3	
516.3	39.9	P	H	17.8	-26.8	0.0	30.9	46.0	15.1	
583.8	39.7	P	H	18.6	-26.5	0.0	31.8	46.0	14.2	
625.0	47.1	P	H	18.8	-26.5	0.0	39.4	46.0	6.6	
665.0	37.6	P	H	19.6	-26.1	0.0	31.1	46.0	14.9	
692.5	37.2	P	H	21.1	-26.2	0.0	32.1	46.0	13.9	
833.8	35.9	P	H	22.0	-25.5	0.0	32.4	46.0	13.6	
922.5	33.9	P	H	22.8	-24.8	0.0	31.9	46.0	14.1	
977.5	33.1	P	H	22.8	-24.4	0.0	31.5	54.0	22.5	
31.1	45.6	Q	V	11.2	-28.3	0.0	28.5	40.0	11.5	
39.3	49.1	Q	V	11.9	-28.3	0.0	32.7	40.0	7.3	
54.2	50.2	P	V	10.6	-28.2	0.0	32.6	40.0	7.4	
77.8	51.5	P	V	6.5	-28.0	0.0	30.0	40.0	10.0	
89.9	45.3	P	V	9.8	-27.9	0.0	27.2	43.5	16.3	
133.9	45.3	P	V	11.6	-27.7	0.0	29.2	43.5	14.3	
149.4	42.2	P	V	13.1	-27.7	0.0	27.6	43.5	15.9	
176.3	37.9	P	V	16.7	-27.6	0.0	27.0	43.5	16.5	
209.9	39.6	P	V	15.3	-27.5	0.0	27.4	43.5	16.1	
223.6	37.1	P	V	14.4	-27.4	0.0	24.1	46.0	21.9	
242.9	36.1	P	V	16.0	-27.3	0.0	24.8	46.0	21.2	
261.3	41.5	P	V	11.9	-27.3	0.0	26.1	46.0	19.9	
305.6	37.9	P	V	14.9	-27.1	0.0	25.7	46.0	20.3	
315.0	38.9	P	V	14.1	-27.2	0.0	25.8	46.0	20.2	
338.1	45.1	P	V	13.8	-27.3	0.0	31.6	46.0	14.4	
365.6	42.5	P	V	14.3	-27.1	0.0	29.7	46.0	16.3	
401.3	39.7	P	V	14.8	-27.2	0.0	27.3	46.0	18.7	
415.0	42.1	P	V	15.2	-27.0	0.0	30.3	46.0	15.7	
432.5	42.3	P	V	15.7	-26.9	0.0	31.1	46.0	14.9	
466.3	39.7	P	V	16.8	-26.9	0.0	29.6	46.0	16.4	
488.1	39.9	P	V	17.4	-26.8	0.0	30.5	46.0	15.5	
532.5	42.7	P	V	16.8	-26.5	0.0	33.0	46.0	13.0	
600.0	43.5	P	V	18.2	-26.2	0.0	35.5	46.0	10.5	
637.5	44.3	P	V	19.2	-26.4	0.0	37.1	46.0	8.9	
692.5	36.0	P	V	21.1	-26.2	0.0	30.9	46.0	15.1	
787.5	35.9	P	V	20.7	-25.8	0.0	30.8	46.0	15.2	
833.8	36.8	P	V	22.0	-25.5	0.0	33.3	46.0	12.7	
922.5	38.1	P	V	22.8	-24.8	0.0	36.1	46.0	9.9	
950.0	39.0	P	V	23.2	-24.6	0.0	37.6	46.0	8.4	
977.5	38.2	P	V	22.8	-24.4	0.0	36.6	54.0	17.4	
Notes		With Card on Reader								
35.0	45.3	P	H	11.5	-28.3	0.0	28.5	40.0	11.5	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
36.0	44.5	P	H	11.6	-28.3	0.0	27.8	40.0	12.2	
61.3	51.1	P	H	8.7	-28.2	0.0	31.6	40.0	8.4	
77.8	47.5	P	H	6.5	-28.0	0.0	26.0	40.0	14.0	
89.9	44.1	P	H	9.8	-27.9	0.0	26.0	43.5	17.5	
99.3	43.4	P	H	11.6	-27.9	0.0	27.1	43.5	16.4	
121.3	45.1	P	H	12.3	-27.8	0.0	29.6	43.5	13.9	
133.4	44.5	P	H	11.7	-27.7	0.0	28.5	43.5	15.0	
149.4	38.9	P	H	13.1	-27.7	0.0	24.3	43.5	19.2	
162.6	39.7	P	H	15.3	-27.6	0.0	27.4	43.5	16.1	
200.5	40.8	P	H	16.3	-27.5	0.0	29.6	43.5	13.9	
209.3	42.0	P	H	15.4	-27.5	0.0	29.9	43.5	13.6	
239.6	41.3	P	H	15.6	-27.4	0.0	29.5	46.0	16.5	
280.6	44.2	P	H	13.5	-27.3	0.0	30.4	46.0	15.6	
298.1	51.0	P	H	14.2	-27.2	0.0	38.0	46.0	8.0	
350.0	47.4	P	H	14.0	-27.1	0.0	34.3	46.0	11.7	
365.0	42.2	P	H	14.3	-27.0	0.0	29.5	46.0	16.5	
380.0	39.5	P	H	15.0	-27.2	0.0	27.3	46.0	18.7	
406.9	43.0	P	H	14.9	-27.1	0.0	30.8	46.0	15.2	
431.9	44.8	P	H	15.7	-26.9	0.0	33.6	46.0	12.4	
433.8	44.1	P	H	15.6	-27.0	0.0	32.7	46.0	13.3	
461.3	41.2	P	H	16.2	-27.0	0.0	30.4	46.0	15.6	
488.1	41.1	P	H	17.4	-26.8	0.0	31.7	46.0	14.3	
532.5	41.1	P	H	16.8	-26.5	0.0	31.4	46.0	14.6	
570.0	40.5	P	H	18.3	-26.7	0.0	32.1	46.0	13.9	
625.0	48.9	P	H	18.8	-26.5	0.0	41.2	46.0	4.8	
665.0	37.1	P	H	19.6	-26.1	0.0	30.6	46.0	15.4	
692.5	37.2	P	H	21.1	-26.2	0.0	32.1	46.0	13.9	
746.3	33.6	P	H	20.5	-26.1	0.0	28.0	46.0	18.0	
833.8	36.4	P	H	22.0	-25.5	0.0	32.9	46.0	13.1	
897.5	34.2	P	H	21.5	-25.0	0.0	30.7	46.0	15.3	
950.0	33.7	P	H	23.2	-24.6	0.0	32.3	46.0	13.7	
977.5	34.1	P	H	22.8	-24.4	0.0	32.5	54.0	21.5	
37.2	49.0	Q	V	11.9	-28.3	0.0	32.6	40.0	7.4	
39.9	40.2	Q	V	12.0	-28.3	0.0	23.9	40.0	16.1	
54.2	54.0	Q	V	10.6	-28.2	0.0	36.4	40.0	3.6	
77.8	51.9	P	V	6.5	-28.0	0.0	30.4	40.0	9.6	
99.8	44.2	P	V	11.7	-27.9	0.0	28.0	43.5	15.5	
133.9	44.0	P	V	11.6	-27.7	0.0	27.9	43.5	15.6	
149.4	39.2	P	V	13.1	-27.7	0.0	24.6	43.5	18.9	
170.3	37.7	P	V	16.1	-27.6	0.0	26.2	43.5	17.3	
200.5	40.8	P	V	16.3	-27.5	0.0	29.6	43.5	13.9	
209.3	39.9	P	V	15.4	-27.5	0.0	27.8	43.5	15.7	
239.0	38.4	P	V	15.6	-27.4	0.0	26.6	46.0	19.4	
270.0	46.4	P	V	12.6	-27.3	0.0	31.7	46.0	14.3	
280.0	43.1	P	V	13.5	-27.3	0.0	29.3	46.0	16.7	
342.5	42.0	P	V	13.9	-27.3	0.0	28.6	46.0	17.4	
348.8	45.5	P	V	14.0	-27.2	0.0	32.3	46.0	13.7	
363.1	41.0	P	V	14.3	-27.0	0.0	28.3	46.0	17.7	
365.0	42.5	P	V	14.3	-27.0	0.0	29.8	46.0	16.2	
401.3	41.4	P	V	14.8	-27.2	0.0	29.0	46.0	17.0	
406.9	41.4	P	V	14.9	-27.1	0.0	29.2	46.0	16.8	
431.9	43.5	P	V	15.7	-26.9	0.0	32.3	46.0	13.7	
465.6	42.3	P	V	16.7	-26.9	0.0	32.1	46.0	13.9	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
488.8	43.6	P	V	17.4	-26.8	0.0	34.2	46.0	11.8	
489.4	39.5	P	V	17.3	-26.8	0.0	30.0	46.0	16.0	
532.5	42.9	P	V	16.8	-26.5	0.0	33.2	46.0	12.8	
625.0	44.6	P	V	18.8	-26.5	0.0	36.9	46.0	9.1	
665.0	37.5	P	V	19.6	-26.1	0.0	31.0	46.0	15.0	
721.3	34.7	P	V	20.9	-26.0	0.0	29.6	46.0	16.4	
833.8	41.4	P	V	22.0	-25.5	0.0	37.9	46.0	8.1	
841.3	36.3	P	V	21.8	-25.4	0.0	32.7	46.0	13.3	
898.8	36.0	P	V	21.6	-25.0	0.0	32.6	46.0	13.4	
922.5	39.1	P	V	22.8	-24.8	0.0	37.1	46.0	8.9	
950.0	38.9	P	V	23.2	-24.6	0.0	37.5	46.0	8.5	
977.5	38.5	P	V	22.8	-24.4	0.0	36.9	54.0	17.1	

Model	RDR-7511AKU	Serial Number	N8D000074
Notes	No Card on Reader		

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
36.6	44.8	P	H	11.7	-28.3	0.0	28.2	40.0	11.8	
62.5	49.9	P	H	8.5	-28.2	0.0	30.2	40.0	9.8	
77.8	47.4	P	H	6.5	-28.0	0.0	25.9	40.0	14.1	
89.9	43.7	P	H	9.8	-27.9	0.0	25.6	43.5	17.9	
119.7	44.9	P	H	12.4	-27.8	0.0	29.5	43.5	14.0	
133.4	42.8	P	H	11.7	-27.7	0.0	26.8	43.5	16.7	
149.4	39.8	P	H	13.1	-27.7	0.0	25.2	43.5	18.3	
162.6	39.6	P	H	15.3	-27.6	0.0	27.3	43.5	16.2	
200.5	40.6	P	H	16.3	-27.5	0.0	29.4	43.5	14.1	
209.3	41.7	P	H	15.4	-27.5	0.0	29.6	43.5	13.9	
239.6	41.1	P	H	15.6	-27.4	0.0	29.3	46.0	16.7	
271.9	42.9	P	H	12.8	-27.3	0.0	28.4	46.0	17.6	
348.8	46.4	P	H	14.0	-27.2	0.0	33.2	46.0	12.8	
365.0	41.7	P	H	14.3	-27.0	0.0	29.0	46.0	17.0	
406.9	38.7	P	H	14.9	-27.1	0.0	26.5	46.0	19.5	
433.8	44.4	P	H	15.6	-27.0	0.0	33.0	46.0	13.0	
461.3	40.7	P	H	16.2	-27.0	0.0	29.9	46.0	16.1	
488.1	41.4	P	H	17.4	-26.8	0.0	32.0	46.0	14.0	
532.5	39.9	P	H	16.8	-26.5	0.0	30.2	46.0	15.8	
625.0	46.2	P	H	18.8	-26.5	0.0	38.5	46.0	7.5	
665.0	38.0	P	H	19.6	-26.1	0.0	31.5	46.0	14.5	
833.8	38.0	P	H	22.0	-25.5	0.0	34.5	46.0	11.5	
30.5	51.6	P	V	11.1	-28.4	0.0	34.3	40.0	5.7	
36.0	43.5	Q	V	11.6	-28.3	0.0	26.8	40.0	13.2	
54.2	55.6	Q	V	10.6	-28.2	0.0	38.0	40.0	2.0	
77.8	52.2	P	V	6.5	-28.0	0.0	30.7	40.0	9.3	
118.0	44.4	P	V	12.4	-27.8	0.0	29.0	43.5	14.5	
133.9	46.0	P	V	11.6	-27.7	0.0	29.9	43.5	13.6	
149.4	41.4	P	V	13.1	-27.7	0.0	26.8	43.5	16.7	
200.5	37.8	P	V	16.3	-27.5	0.0	26.6	43.5	16.9	
209.9	39.7	P	V	15.3	-27.5	0.0	27.5	43.5	16.0	
220.9	39.5	P	V	14.3	-27.4	0.0	26.4	46.0	19.6	
242.9	39.8	P	V	16.0	-27.3	0.0	28.5	46.0	17.5	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
279.4	41.3	P	V	13.4	-27.3	0.0	27.4	46.0	18.6	
327.5	42.8	P	V	13.7	-27.3	0.0	29.2	46.0	16.8	
350.0	42.4	P	V	14.0	-27.1	0.0	29.3	46.0	16.7	
365.6	40.4	P	V	14.3	-27.1	0.0	27.6	46.0	18.4	
407.5	39.8	P	V	14.9	-27.1	0.0	27.6	46.0	18.4	
431.9	41.9	P	V	15.7	-26.9	0.0	30.7	46.0	15.3	
466.3	41.5	P	V	16.8	-26.9	0.0	31.4	46.0	14.6	
497.5	43.0	P	V	17.5	-26.9	0.0	33.6	46.0	12.4	
533.8	44.0	P	V	16.8	-26.5	0.0	34.3	46.0	11.7	
625.0	42.1	P	V	18.8	-26.5	0.0	34.4	46.0	11.6	
692.5	35.8	P	V	21.1	-26.2	0.0	30.7	46.0	15.3	
833.8	36.3	P	V	22.0	-25.5	0.0	32.8	46.0	13.2	
922.5	38.1	P	V	22.8	-24.8	0.0	36.1	46.0	9.9	
977.5	37.7	P	V	22.8	-24.4	0.0	36.1	54.0	17.9	
Notes		With card on reader								
31.6	46.9	P	H	11.2	-28.3	0.0	29.8	40.0	10.2	
35.5	45.3	P	H	11.6	-28.3	0.0	28.6	40.0	11.4	
36.0	47.9	P	H	11.6	-28.3	0.0	31.2	40.0	8.8	
61.9	50.1	P	H	8.6	-28.2	0.0	30.5	40.0	9.5	
72.3	47.4	P	H	6.5	-28.0	0.0	25.9	40.0	14.1	
75.1	47.0	P	H	6.2	-28.0	0.0	25.2	40.0	14.8	
77.8	47.3	P	H	6.5	-28.0	0.0	25.8	40.0	14.2	
89.9	44.4	P	H	9.8	-27.9	0.0	26.3	43.5	17.2	
99.3	44.8	P	H	11.6	-27.9	0.0	28.5	43.5	15.0	
119.7	44.7	P	H	12.4	-27.8	0.0	29.3	43.5	14.2	
133.4	43.2	P	H	11.7	-27.7	0.0	27.2	43.5	16.3	
149.4	39.6	P	H	13.1	-27.7	0.0	25.0	43.5	18.5	
162.6	39.9	P	H	15.3	-27.6	0.0	27.6	43.5	15.9	
180.7	35.8	P	H	16.9	-27.5	0.0	25.2	43.5	18.3	
200.5	41.7	P	H	16.3	-27.5	0.0	30.5	43.5	13.0	
209.9	41.1	P	H	15.3	-27.5	0.0	28.9	43.5	14.6	
251.3	49.2	P	H	11.2	-27.3	0.0	33.1	46.0	12.9	
275.6	42.3	P	H	13.2	-27.3	0.0	28.2	46.0	17.8	
303.1	44.8	P	H	14.7	-27.1	0.0	32.4	46.0	13.6	
322.5	47.6	P	H	13.7	-27.3	0.0	34.0	46.0	12.0	
333.1	43.9	P	H	13.8	-27.3	0.0	30.4	46.0	15.6	
340.6	47.0	P	H	13.8	-27.3	0.0	33.5	46.0	12.5	
348.8	47.8	P	H	14.0	-27.2	0.0	34.6	46.0	11.4	
365.0	42.0	P	H	14.3	-27.0	0.0	29.3	46.0	16.7	
375.0	41.7	P	H	14.5	-27.1	0.0	29.1	46.0	16.9	
406.9	41.2	P	H	14.9	-27.1	0.0	29.0	46.0	17.0	
433.8	45.3	P	H	15.6	-27.0	0.0	33.9	46.0	12.1	
443.1	43.3	P	H	16.0	-27.1	0.0	32.2	46.0	13.8	
461.3	41.8	P	H	16.2	-27.0	0.0	31.0	46.0	15.0	
488.1	41.8	P	H	17.4	-26.8	0.0	32.4	46.0	13.6	
516.3	40.0	P	H	17.8	-26.8	0.0	31.0	46.0	15.0	
546.3	47.0	P	H	18.3	-26.4	0.0	38.9	46.0	7.1	
570.0	38.8	P	H	18.3	-26.7	0.0	30.4	46.0	15.6	
625.0	47.4	P	H	18.8	-26.5	0.0	39.7	46.0	6.3	
651.3	37.7	P	H	20.4	-26.2	0.0	31.9	46.0	14.1	
675.0	40.5	P	H	20.8	-26.1	0.0	35.2	46.0	10.8	
692.5	36.0	P	H	21.1	-26.2	0.0	30.9	46.0	15.1	
721.3	34.5	P	H	20.9	-26.0	0.0	29.4	46.0	16.6	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report


Testing of RF IDEas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
746.3	33.5	P	H	20.5	-26.1	0.0	27.9	46.0	18.1	
833.8	38.0	P	H	22.0	-25.5	0.0	34.5	46.0	11.5	
906.3	35.4	P	H	22.1	-24.9	0.0	32.6	46.0	13.4	
950.0	34.0	P	H	23.2	-24.6	0.0	32.6	46.0	13.4	
39.3	49.8	Q	V	11.9	-28.3	0.0	33.4	40.0	6.6	
59.2	50.0	P	V	9.3	-28.2	0.0	31.1	40.0	8.9	
66.8	50.6	P	V	7.4	-28.1	0.0	29.9	40.0	10.1	
77.8	51.8	P	V	6.5	-28.0	0.0	30.3	40.0	9.7	
89.9	44.5	P	V	9.8	-27.9	0.0	26.4	43.5	17.1	
106.4	44.9	P	V	12.3	-27.8	0.0	29.4	43.5	14.1	
116.3	44.9	P	V	12.5	-27.8	0.0	29.6	43.5	13.9	
117.4	44.6	P	V	12.5	-27.8	0.0	29.3	43.5	14.2	
133.4	44.0	P	V	11.7	-27.7	0.0	28.0	43.5	15.5	
135.6	45.4	P	V	11.6	-27.7	0.0	29.3	43.5	14.2	
140.0	43.3	P	V	11.7	-27.7	0.0	27.3	43.5	16.2	
153.2	39.0	P	V	13.8	-27.6	0.0	25.2	43.5	18.3	
168.6	39.3	P	V	15.9	-27.6	0.0	27.6	43.5	15.9	
170.3	37.0	P	V	16.1	-27.6	0.0	25.5	43.5	18.0	
224.1	39.5	P	V	14.4	-27.4	0.0	26.5	46.0	19.5	
235.1	41.2	P	V	15.0	-27.4	0.0	28.8	46.0	17.2	
242.3	38.7	P	V	15.9	-27.3	0.0	27.3	46.0	18.7	
266.9	41.5	P	V	12.3	-27.3	0.0	26.5	46.0	19.5	
281.9	43.5	P	V	13.5	-27.3	0.0	29.7	46.0	16.3	
338.1	44.8	P	V	13.8	-27.3	0.0	31.3	46.0	14.7	
341.3	44.6	P	V	13.8	-27.3	0.0	31.1	46.0	14.9	
355.0	45.7	P	V	14.2	-27.1	0.0	32.8	46.0	13.2	
365.6	42.5	P	V	14.3	-27.1	0.0	29.7	46.0	16.3	
401.3	39.1	P	V	14.8	-27.2	0.0	26.7	46.0	19.3	
433.1	45.1	P	V	15.6	-27.0	0.0	33.7	46.0	12.3	
446.9	38.2	P	V	16.1	-27.1	0.0	27.2	46.0	18.8	
465.0	47.7	P	V	16.6	-26.9	0.0	37.4	46.0	8.6	
487.5	41.9	P	V	17.4	-26.8	0.0	32.5	46.0	13.5	
490.0	41.1	P	V	17.3	-26.8	0.0	31.6	46.0	14.4	
531.3	42.7	P	V	16.7	-26.5	0.0	32.9	46.0	13.1	
532.5	47.0	P	V	16.8	-26.5	0.0	37.3	46.0	8.7	
557.5	48.8	P	V	19.0	-26.6	0.0	41.2	46.0	4.8	
558.8	44.5	P	V	18.9	-26.6	0.0	36.8	46.0	9.2	
611.3	40.9	P	V	18.6	-26.3	0.0	33.2	46.0	12.8	
625.0	44.0	P	V	18.8	-26.5	0.0	36.3	46.0	9.7	
637.5	41.4	P	V	19.2	-26.4	0.0	34.2	46.0	11.8	
665.0	35.7	P	V	19.6	-26.1	0.0	29.2	46.0	16.8	
678.8	37.2	P	V	21.2	-26.1	0.0	32.3	46.0	13.7	
746.3	35.1	P	V	20.5	-26.1	0.0	29.5	46.0	16.5	
760.0	35.2	P	V	20.2	-26.1	0.0	29.3	46.0	16.7	
813.8	36.1	P	V	21.0	-25.6	0.0	31.5	46.0	14.5	
833.8	41.3	P	V	22.0	-25.5	0.0	37.8	46.0	8.2	
895.0	36.8	P	V	21.3	-25.0	0.0	33.1	46.0	12.9	
922.5	38.9	P	V	22.8	-24.8	0.0	36.9	46.0	9.1	
950.0	39.0	P	V	23.2	-24.6	0.0	37.6	46.0	8.4	
977.5	38.7	P	V	22.8	-24.4	0.0	37.1	54.0	16.9	

Judgment: Passed by 2.0 dB

Figure 2. Drawing of Radiated Emissions Test Setup

Chamber E, anechoic

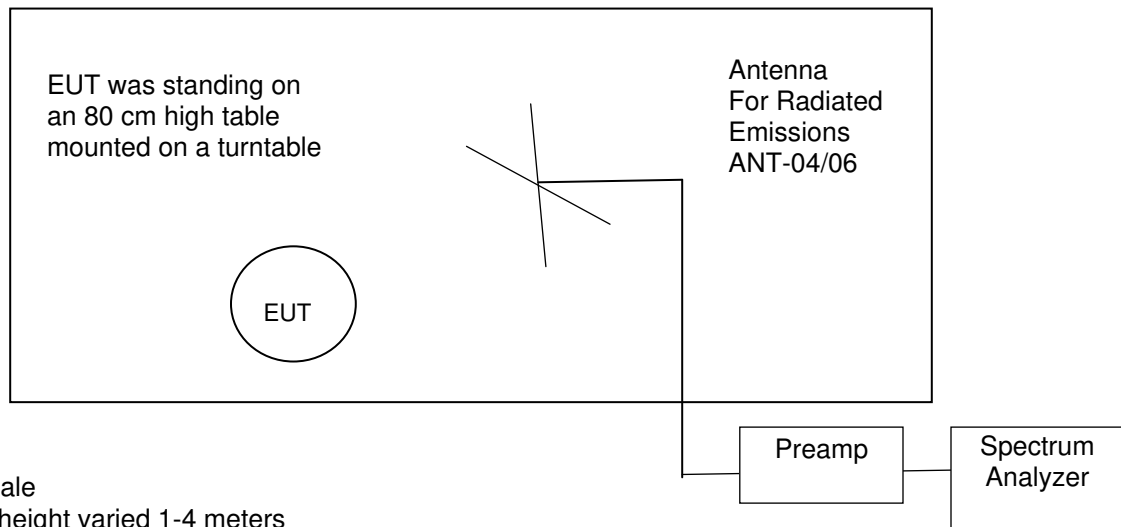**Notes:**

- Not to Scale
- Antenna height varied 1-4 meters
- Distance from antenna to tested system is 3 meters
- AC cords not shown. They are connected to AC outlet with low-pass filter on turntable

Frequency Range	Receive Antenna	Pre-Amplifier	Spectrum Analyzer
0.01 to 30 MHz	ANT-53	None	REC-21
30 to 200 MHz	ANT-04	AMP-22	REC-21
200 to 1000 MHz	ANT-06	AMP-22	REC-21

10.3 Magnetic Field Measurements and Decay Factor Calculations

Radiated emission measurements are performed with an EMCO shielded loop antenna. The antenna was rotated in order to find the maximize readings.

The distance correction factor is calculated as follows:

The distance factor in (dB) = $DE \cdot 20 \cdot \log(TD/SD)$

Where: DE = Decay Exponent (2.0 is used for this)

TD = Test distance in meters. This is 3 meters

SD = Specifciation Distance in meters

From 9 kHz to 490 kHz, the Specifcation Distance is 300m therefore the distance factor is $2 \cdot 20 \cdot \log(300/3) = 80$ dB.

From 490 kHz to 30 MHz, the Specifcation Distance is 30m therefore the distance factor is $2 \cdot 20 \cdot \log(30/3) = 40$ dB.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-7011AKU and RDR-7511AKU, RFID Card Readers

10.3.1 Magnetic Field Radiated Emissions Results (0.009 to 30 MHz)

Test Date	August 19, 2016
Test Distance	3 Meters
Tested by	Chris Dalessio
Specification	FCC 15.209 & RSS-GEN (Table 5) limits
Notes	A shielded Loop Antenna was used for this test.
Model	RDR-7011AKU; Serial # N7D000099 RDR-7511AKU; Serial # N8D000074

13.56 MHz Frequencies

Freq (MHz)	meter reading dBuV	Loop Ant Factor	Dist (m)	Decay exp	Cable Loss dB	FCC Distance factor dB	Field Strength dBuV/m	RSS & FCC Limit dBuV/m	Margin under limit	EUT tested
13.560	45.8	16.8	3.0	2.0	0.4	-40.0	23.0	29.5	6.5	7511
27.120	27.5	16.0	3.0	2.0	0.5	-40.0	4.0	29.5	25.5	7511
13.560	45.3	16.8	3.0	2.0	0.4	-40.0	22.5	29.5	7.0	7011
27.120	29.5	16.0	3.0	2.0	0.5	-40.0	6.0	29.5	23.5	7011

The limit shown at 13.56 MHz in the above table is the general limit from 15.209.

No other emissions were detected from 10 kHz to 30 MHz within 10 dB of the 15.209 or the RSS-GEN limits.

Judgement: Passed by 6.5 dB.

Additional information for field strength calculations:

Field strength in dBuV/m (at 3 meters) = Reading (dBuV) + Ant Factor (dB/m) + Cable Loss (dB) =
 $45.8 + 16.8 + 0.4 = 63$ dBuV/m.

10.4 Occupied Bandwidth Data

The occupied bandwidth of the RF output was measured using a spectrum analyzer. The bandwidth was measured using the peak detector function and a narrow resolution bandwidth.

A broadband antenna was used to receive the modulated signal. The spectrum analyzer was set to the MAX HOLD mode to record the worst case of the modulation. The spectrum analyzer display was digitized and plotted. A limit was drawn on the plots based on the level of the modulated carrier. The plots of the occupied bandwidth for the EUT are supplied on the following page.


99% EBW at 13.56 MHz Signal
1.725 kHz

The 99% bandwidth was measured using the procedures of RSS-GEN section 6.6.

Judgement: Pass

The bandwidth test was performed only on the RDR-7011AKU, since the RF sections of the two products are identical.

Figure 3. Occupied Bandwidth Plot: 13.56 MHz

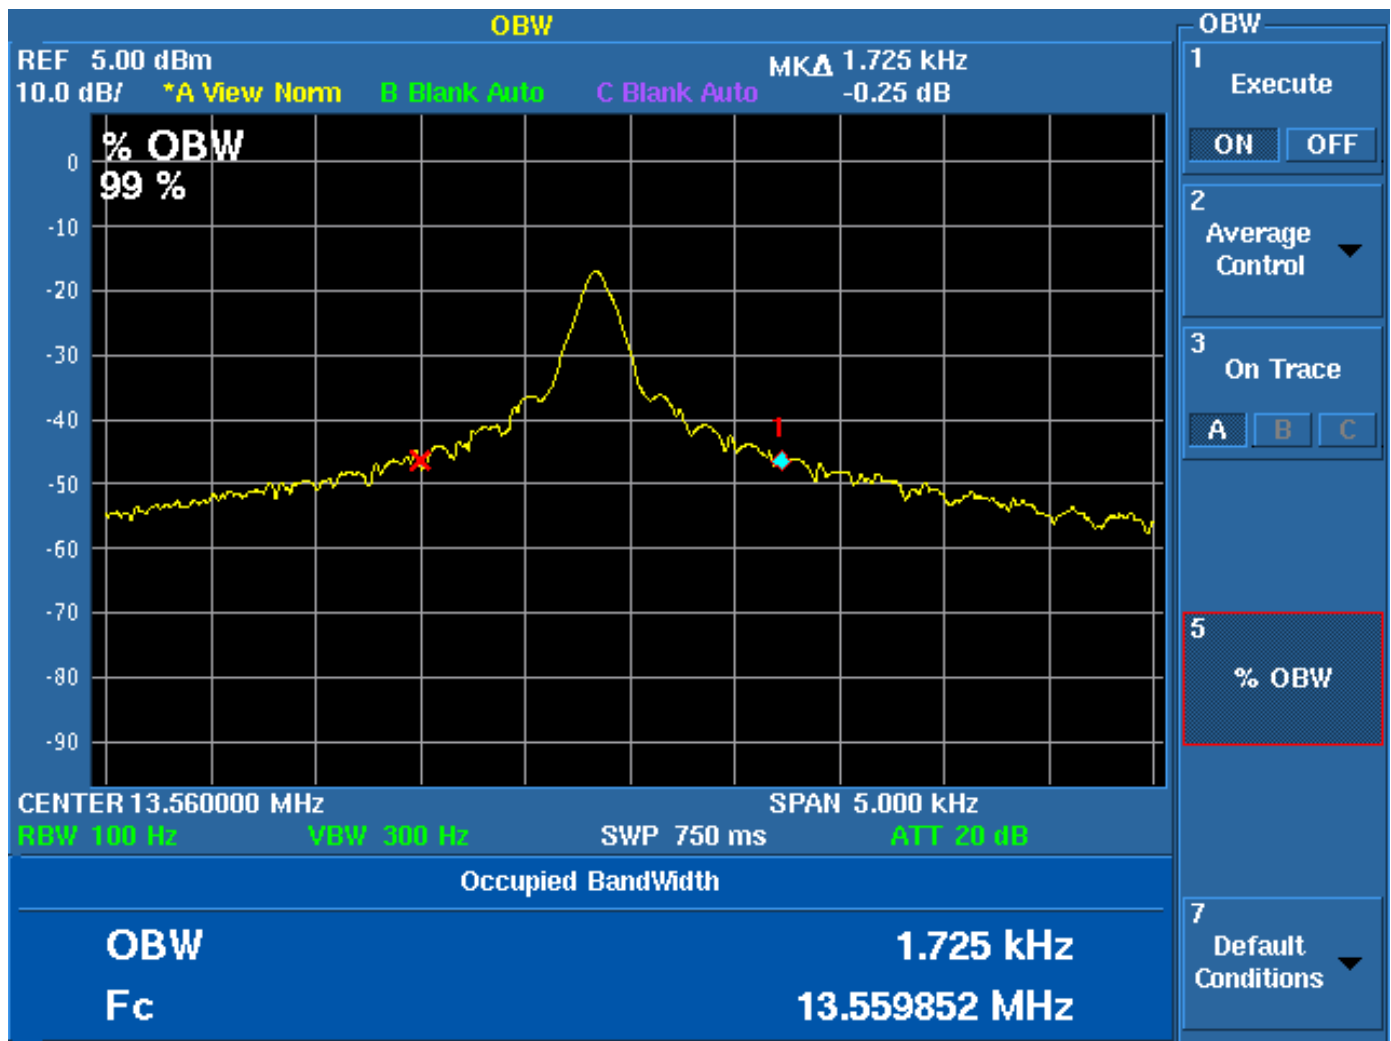

99% Bandwidth = 1.725 kHz

11 MEASUREMENT INSTRUMENTATION UNCERTAINTY

The uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k=2$ in accordance with CISPR 16-4-2.

Measurement	Uncertainty
Conducted Emissions, LISN method, 150 kHz to 30 MHz	2.7 dB
Radiated Emissions, H-field, 3 meters, 9 kHz to 30 MHz	2.7 dB
Radiated Emissions, E-field, 3 meters, 30 to 200 MHz	3.3 dB
Radiated Emissions, E-field, 3 meters, 200 to 1000 MHz	4.9 dB
Frequency counter at 13.56 MHz; REC-21	136 Hz
99% Occupied Bandwidth using REC-43	1% of frequency span
Temperature THM-03	0.6 Deg C