



FCC TEST REPORT

REPORT NO.: RF930507H07

MODEL NO.: AP5822, AP5822E

RECEIVED: May 08, 2004

TESTED: May 12 to Jun. 24, 2004

APPLICANT: Microelectronics Technology Inc.

ADDRESS: 1, Innovation Road II, Hsinchu Science-based
Industrial Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 177 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced, except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, or any government agencies. The test results in the report only apply to the tested sample.



0536

ILAC MRA



Table of Contents

1.	CERTIFICATION.....	6
2.	SUMMARY OF TEST RESULTS.....	7
3.	GENERAL INFORMATION	10
3.1	GENERAL DESCRIPTION OF EUT.....	10
3.2	DESCRIPTION OF TEST MODES.....	13
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4	DESCRIPTION OF SUPPORT UNITS.....	15
3.5	CONFIGURATION OF SYSTEM UNDER TEST	15
4.	TEST TYPES AND RESULTS (FOR PART 802.11B)	16
4.1	CONDUCTED EMISSION MEASUREMENT	16
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	16
4.1.2	TEST INSTRUMENTS.....	16
4.1.3	TEST PROCEDURES	17
4.1.4	DEVIATION FROM TEST STANDARD	17
4.1.5	TEST SETUP.....	18
4.1.6	EUT OPERATING CONDITIONS.....	18
4.1.7	TEST RESULTS	19
4.2	RADIATED EMISSION MEASUREMENT	21
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	21
4.2.2	TEST INSTRUMENTS.....	22
4.2.3	TEST PROCEDURES	23
4.2.4	DEVIATION FROM TEST STANDARD	23
4.2.5	TEST SETUP.....	24
4.2.6	EUT OPERATING CONDITIONS.....	24
4.2.7	TEST RESULTS	25
4.2.8	TEST RESULTS - DSSS.....	26
4.2.9	TEST RESULTS - OFDM.....	29
4.3	6DB BANDWIDTH MEASUREMENT.....	32
4.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	32
4.3.2	TEST INSTRUMENTS.....	32
4.3.3	TEST PROCEDURE.....	33
4.3.4	DEVIATION FROM TEST STANDARD	33
4.3.5	TEST SETUP.....	33
4.3.6	EUT OPERATING CONDITIONS.....	33
4.3.7	TEST RESULTS -DSSS.....	34
4.3.8	TEST RESULTS -OFDM.....	38
4.4	MAXIMUM PEAK OUTPUT POWER	42
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	42
4.4.2	INSTRUMENTS.....	42



4.4.3 TEST PROCEDURES43

4.4.4 TEST SETUP.....43

4.4.5 EUT OPERATING CONDITIONS.....43

4.4.6 TEST RESULTS -DSSS.....44

4.4.7 TEST RESULTS -OFDM.....45

4.5 POWER SPECTRAL DENSITY MEASUREMENT46

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....46

4.5.2 TEST INSTRUMENTS.....46

4.5.3 TEST PROCEDURE.....47

4.5.4 DEVIATION FROM TEST STANDARD47

4.5.5 TEST SETUP.....47

4.5.6 EUT OPERATING CONDITION.....47

4.5.7 TEST RESULTS-DSSS.....48

4.5.8 TEST RESULTS-OFDM.....52

4.6 BAND EDGES MEASUREMENT.....56

4.6.1 LIMITS OF BAND EDGES MEASUREMENT.....56

4.6.2 TEST INSTRUMENTS.....56

4.6.3 TEST PROCEDURE.....56

4.6.4 DEVIATION FROM TEST STANDARD56

4.6.5 EUT OPERATING CONDITION.....56

4.6.6 TEST RESULTS –DSSS.....57

4.6.7 TEST RESULTS –OFDM.....60

4.7 ANTENNA REQUIREMENT.....63

4.7.1 STANDARD APPLICABLE.....63

4.7.2 ANTENNA CONNECTED CONSTRUCTION.....63

5. TEST TYPES AND RESULTS (FOR PART 802.11A)64

5.1 CONDUCTED EMISSION MEASUREMENT64

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....64

5.1.2 TEST INSTRUMENTS.....64

5.1.3 TEST PROCEDURES65

5.1.4 DEVIATION FROM TEST STANDARD65

5.1.5 TEST SETUP.....66

5.1.6 EUT OPERATING CONDITIONS.....66

5.1.7 TEST RESULTS67

5.2 RADIATED EMISSION MEASUREMENT69

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT.....69

5.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....70

5.2.3 TEST INSTRUMENTS.....71

5.2.4 TEST PROCEDURES72

5.2.5 DEVIATION FROM TEST STANDARD72

5.2.6 TEST SETUP.....73

5.2.7 EUT OPERATING CONDITIONS.....73



5.2.8 TEST RESULTS (ANTENNA 1) 74

5.2.9 TEST RESULTS (ANTENNA 2) 80

5.2.10 TEST RESULTS (ANTENNA 3) 84

FOR FREQUENCY 5.15~5.35GHZ 90

5.3 PEAK TRANSMIT POWER MEASUREMENT 90

5.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT 90

5.3.2 TEST INSTRUMENTS 90

5.3.3 TEST PROCEDURE 91

5.3.4 TEST SETUP 91

5.3.5 EUT OPERATING CONDITIONS 91

5.3.6 TEST RESULTS (ANTENNA 2) 92

5.4 PEAK POWER EXCURSION MEASUREMENT 100

5.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT 100

5.4.2 TEST INSTRUMENTS 100

5.4.3 TEST PROCEDURE 101

5.4.4 DEVIATION FROM TEST STANDARD 101

5.4.5 TEST SETUP 101

5.4.6 EUT OPERATING CONDITIONS 101

5.4.7 TEST RESULTS (ANTENNA 2) 102

5.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT 107

5.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT 107

5.5.2 TEST INSTRUMENTS 107

5.5.3 TEST PROCEDURES 108

5.5.4 DEVIATION FROM TEST STANDARD 108

5.5.5 TEST SETUP 108

5.5.6 EUT OPERATING CONDITIONS 108

5.5.7 TEST RESULTS (ANTENNA 2) 109

5.6 FREQUENCY STABILITY 114

5.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT 114

5.6.2 TEST INSTRUMENTS 114

5.6.3 TEST PROCEDURE 114

5.6.4 DEVIATION FROM TEST STANDARD 114

5.6.5 TEST SETUP 115

5.6.6 EUT OPERATING CONDITION 115

5.6.7 TEST RESULTS 116

5.7 BAND EDGES MEASUREMENT 117

5.7.1 TEST INSTRUMENTS 117

5.7.2 TEST PROCEDURE 117

5.7.3 EUT OPERATING CONDITION 117

5.7.4 TEST RESULTS (ANTENNA 2) 118

FOR FREQUENCY 5.725~5.850GHZ 121

5.8 6DB BANDWIDTH MEASUREMENT 121



5.8.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	121
5.8.2	TEST INSTRUMENTS.....	121
5.8.3	TEST PROCEDURE.....	122
5.8.4	DEVIATION FROM TEST STANDARD	122
5.8.5	TEST SETUP.....	122
5.8.6	EUT OPERATING CONDITIONS.....	122
5.8.7	TEST RESULTS (ANTENNA 1)	123
5.8.8	TEST RESULTS (ANTENNA 3)	130
5.9	MAXIMUM PEAK OUTPUT POWER.....	137
5.9.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	137
5.9.2	TEST INSTRUMENTS.....	137
5.9.3	TEST PROCEDURE.....	138
5.9.4	TEST SETUP.....	138
5.9.5	EUT OPERATING CONDITIONS.....	138
5.9.6	TEST RESULTS (ANTENNA 1)	139
5.9.7	TEST RESULTS (ANTENNA 3)	140
5.10	POWER SPECTRAL DENSITY MEASUREMENT	141
5.10.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	141
5.10.2	TEST INSTRUMENTS.....	141
5.10.3	TEST PROCEDURE.....	142
5.10.4	DEVIATION FROM TEST STANDARD	142
5.10.5	TEST SETUP.....	142
5.10.6	EUT OPERATING CONDITION.....	142
5.10.7	TEST RESULTS (ANTENNA 1)	143
5.10.8	TEST RESULTS (ANTENNA 3)	150
5.11	BAND EDGES MEASUREMENT.....	157
5.11.1	LIMITS OF BAND EDGES MEASUREMENT.....	157
5.11.2	TEST INSTRUMENTS.....	157
5.11.3	TEST PROCEDURE.....	157
5.11.4	DEVIATION FROM TEST STANDARD	157
5.11.5	EUT OPERATING CONDITION.....	158
5.11.6	TEST RESULTS (ANTENNA 1)	158
5.11.7	TEST RESULTS (ANTENNA 3)	163
5.12	ANTENNA REQUIREMENT.....	168
5.12.1	STANDARD APPLICABLE.....	168
5.12.2	ANTENNA CONNECTED CONSTRUCTION.....	168
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	169
7.	INFORMATION ON THE TESTING LABORATORIES	177



1. CERTIFICATION

PRODUCT : 802.11a+b/g Outdoor AP/Bridge With Internal Antenna,
802.11a+b/g Outdoor AP/Bridge With External Antenna

BRAND NAME : MTI

MODEL NO. : AP5822, AP5822E

TESTED: May 12 to Jun. 24, 2004

APPLICANT : Microelectronics Technology Inc.

TEST ITEM: ENGINEERING SAMPLE

STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
Subpart E (Section 15.407), ANSI C63.4-1992

The above equipment (Model: AP5822, AP5822E) have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: Carol Liao , **DATE:** Jun. 30, 2004
(Carol Liao)

APPROVED BY: Eric Lin , **DATE:** Jun. 30, 2004
(Eric Lin, Manager)



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -12.08dBuV at 0.345MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions FCC Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.40dBuV at 2390.0MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



for freq. 5.15~5.35GHz :

APPLIED STANDARD: 47 CFR Part 15, Subpart E			
Standard Section	Test Type	Result	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -12.27dBuV at 4.262MHz
15.407(b)(1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit Minimum passing margin is -1.50dBuV at 5350.00MHz
15.407(a)(1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit



for freq. 5.725~5.850GHz :

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -12.27dBuV at 4.262MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions FCC Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -0.50dBuV at 5450.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna, 802.11a+b/g Outdoor AP/Bridge With External Antenna
MODEL NO.	AP5822, AP5822E
POWER SUPPLY	48VDC from AC Adapter
MODULATION	DSSS, OFDM
TRANSFER RATE	802.11b and draft 802.11g: 1/2/5.5/6/9/11/12/18/24/36/48/54Mbps 802.11a:6 to 54Mbps (Turbo mode: up to 108Mbps *see note 1)
FREQUENCY RANGE	802.11b and draft 802.11g: 2400MHz ~ 2483.5MHz 802.11a: 5.15~5.35GHz and 5.725~5.850GHz
NUMBER OF CHANNEL	802.11b and draft 802.11g: 11 802.11a: 9 for Normal mode / 3 for Turbo mode
CHANNEL SPACING	802.11b and draft 802.11g: 5MHz 802.11a: 20MHz for Normal mode / 40MHz for Turbo mode
Max. OUTPUT POWER	802.11b: 17.86dBm / draft 802.11g: 18.73dBm 802.11a: 18.72dBm(*see note 6)
DATA CABLE	NA
ANTENNA TYPE	See Note 3
I/O PORTS	RJ 45 Port x 1
ASSOCIATED DEVICES	NA

NOTE:

1. This EUT is capable of providing data rates of up to 108Mbps in Turbo Mode depending upon reception quality.



2. The EUT has two model names which are identical to each other in all aspects except for the followings:

Brand Name	Model Name	Product Name	Description
MTI	AP5822	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	Internal Antenna
	AP5822E	802.11a+b/g Outdoor AP/Bridge With External Antenna	External Antenna

3. There are four antennas provided to this EUT, please refer to the following table:

For 2.4GHz				
No.	Model No.	Gain (dBi)	Antenna Type	Antenna Connector
1	R0305-164	8.0dBi	Dipole, Omni (External Antenna)	N (Plug)
For 5GHz				
No.	Model No.	Gain (dBi)	Antenna Type	Antenna Connector
1	ANT05535	17.0dBi	Directional, Patch Panel (Internal Antenna)	Probe Pin
2	R0420-058	8.0dBi	Dipole, Omni (External Antenna)	N (Plug)
3	MTI09009 (4C10021)	23.0dBi	Directional, Patch Panel (External Antenna)	N (Jack)

4. Frequency Range of each Antennas are as followings:

For 2.4GHz	
Antenna No.	Frequency Range
No. 1	2400MHz ~ 2483.5MHz
For 5GHz	
Antenna No.	Frequency Range
No. 1	5.725GHz ~ 5.850GHz (ISM Band)
No. 2	5.25GHz~5.35GHz (UNII)
No. 3	5.725GHz ~ 5.850GHz (ISM Band)

5. The EUT was powered by the following adapter:

Brand:	MICROELECTRONICS TECH. INC.
Model No.:	TR60A-POE-L(0640-0086)
Input power :	INPUT: 100-240V~ 1.5A 47-63Hz
Output power :	OUTPUT: 48V, 1.2A



6. Peak output power (Unit : dBm) :

For 5GHz			
No.	Model No.	Operating Frequency (MHz)	
		5250~5350	5725~5850
1	ANT05535	NA	13.50
2	R0420-058	18.72	NA
3	MTI09009 (4C10021)	NA	15.42

7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

For 802.11b: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

For 802.11a: Channel 5 to 13 are provided to this EUT for Normal mode.

Channel	Frequency	Channel	Frequency
1	5180 MHz	8	5320 MHz
2	5200 MHz	9	5745MHz
3	5220 MHz	10	5765MHz
4	5240 MHz	11	5785MHz
5	5260 MHz	12	5805MHz
6	5280 MHz	13	5825MHz
7	5300 MHz		

Channel 3-5 are provided to this EUT for Turbo Mode.

Channel	Frequency	Channel	Frequency
1	5210 MHz	4	5760MHz
2	5250 MHz	5	5800MHz
3	5290 MHz		

NOTE:

- 1..The EUT was tested in both normal mode (channel bandwidth of approximately 20MHz) and turbo mode (channel bandwidth of approximately 40MHz).
2. "Normal Mode" allows data rates of up to 54Mbps. The device was, therefore, tested in Normal mode at the data rate that produced the highest output power for normal mode (6Mbps).
3. "Turbo Mode" allows data rates of up to 108Mbps. At data rates higher than 12Mbps the PA gain is reduced to improve signal fidelity. The device was, therefore, tested in turbo mode at the data rate that produced the highest output power for turbo mode (12Mbps).
4. For Antenna 1 & 3: Channel 9, 11 and 13 are the closest frequencies to the band edge, were chosen for final test of Normal Mode. Channel 4 & 5 were chosen for final test of turbo mode.
5. For Antenna 2: Channel 5 & 8 are the closest frequencies to the band edge, were chosen for final test of Normal Mode. Channel 3 were chosen for final test of turbo mode.



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 802.11a+b/g Outdoor AP/Bridge With Internal Antenna According to the specifications of the manufacturer; it must comply with the requirements of the following standards:

**47 CFR Part 15, Subpart C. (15.247),
Subpart E (15.407). ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.



3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK	DELL	C600	6DRV601	FCC DoC

No.	Signal cable description
1	NA

Note: 1. All power cords of the above support units are unshielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

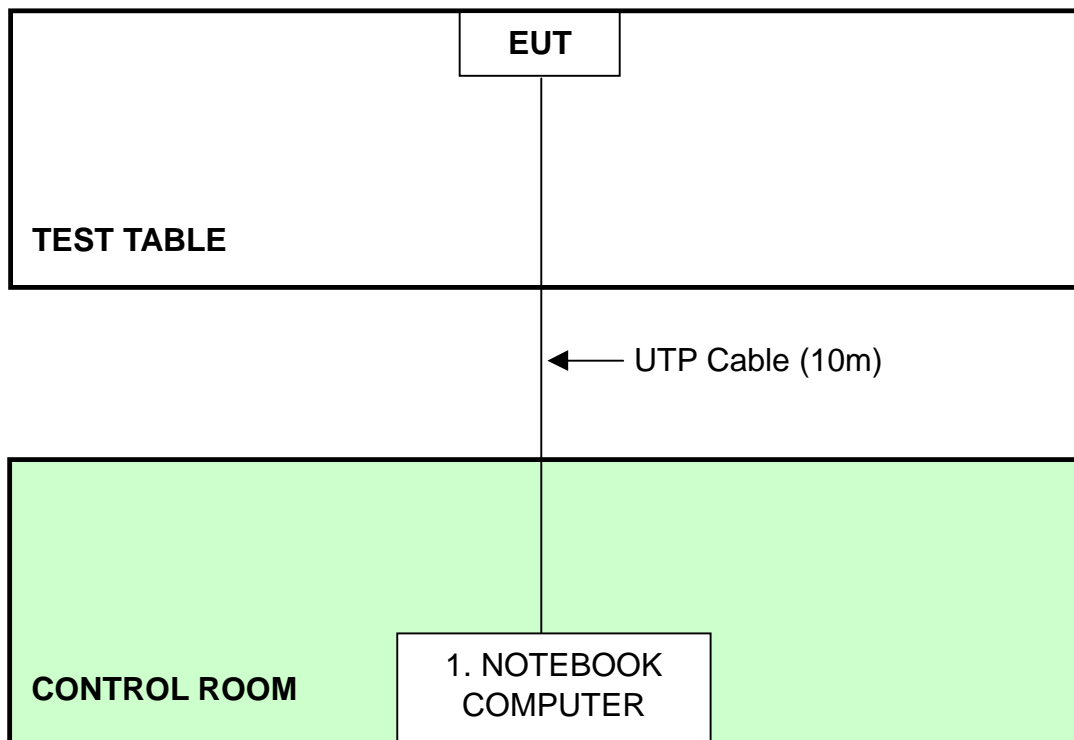

NOTE: 1. Support unit 1 was kept in the control room during the test.
 2. Please refer to the photos of test configuration in Item 6 also.



4. TEST TYPES AND RESULTS (FOR PART 802.11b)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
- (1) The lower limit shall apply at the transition frequencies.
 - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Dec. 04, 2004
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 04, 2004
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 27, 2004
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 03, 2004
Terminator(for KYORITSU)	50	3	May 10, 2005
Software	Cond-V2e	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. A.
 3. The VCCI Con A Registration No. is C-817.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

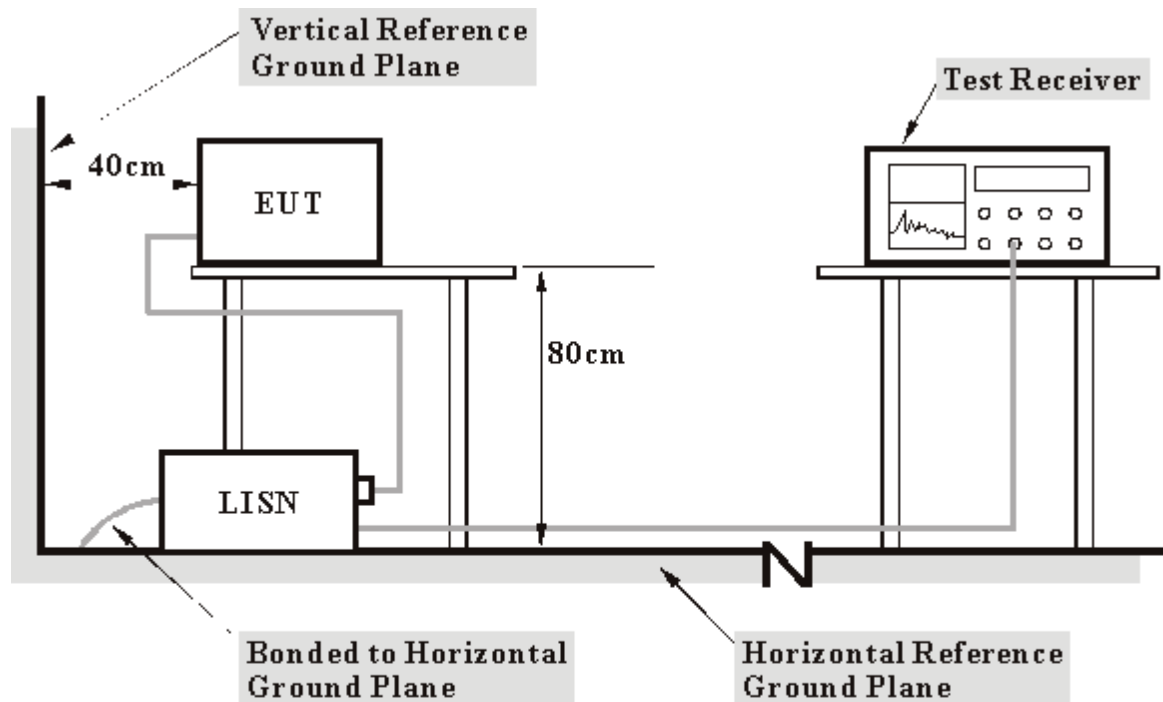

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program “ART 485” to enable EUT under transmission/receiving condition continuously at specific channel frequency via RJ 45 cable and wireless.
- d. The communication partner sent data to EUT by command "PING".




4.1.7 TEST RESULTS

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
MODEL	AP5822E		
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	27deg. C, 59%RH, 963 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.22	41.35	-	41.57	-	65.58	55.58	-24.01	-
2	0.345	0.23	41.25	-	41.48	-	59.07	49.07	-17.60	-
3	0.623	0.24	41.23	-	41.47	-	56.00	46.00	-14.53	-
4	3.527	0.38	35.86	-	36.24	-	56.00	46.00	-19.76	-
5	4.109	0.41	41.49	-	41.90	-	56.00	46.00	-14.10	-
6	13.422	1.07	43.38	-	44.45	-	60.00	50.00	-15.55	-

- NOTES:** (1) "-": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

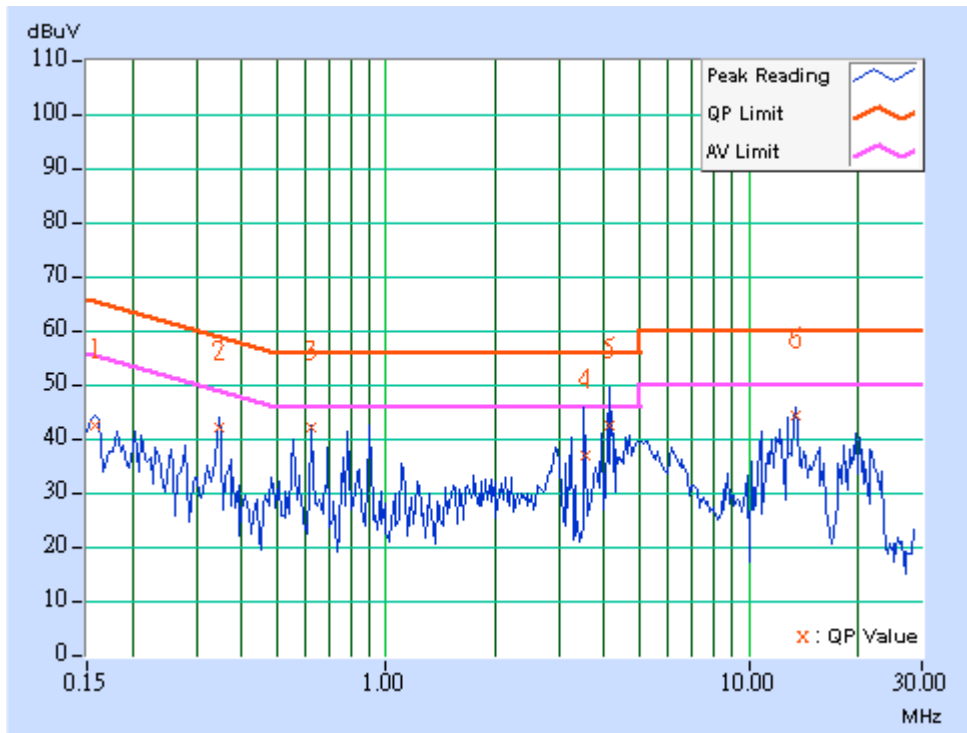




EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
MODEL	AP5822E		
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	27deg. C, 59%RH, 963 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.22	42.56	-	42.78	-	65.58	55.58	-22.80	-
2	0.345	0.23	46.77	-	47.00	-	59.07	49.07	-12.08	-
3	0.623	0.24	39.74	-	39.98	-	56.00	46.00	-16.02	-
4	4.184	0.41	41.67	-	42.08	-	56.00	46.00	-13.92	-
5	13.480	0.98	42.80	-	43.78	-	60.00	50.00	-16.22	-
6	20.258	1.20	37.88	-	39.08	-	60.00	50.00	-20.92	-

- NOTES:** (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

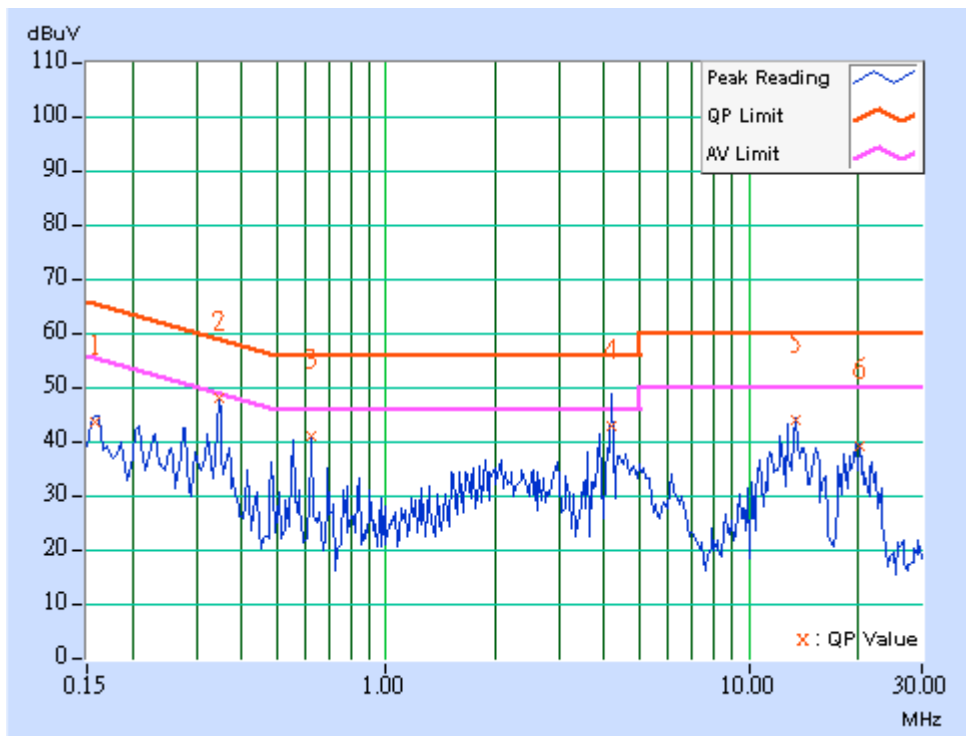



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594ER	3829U04676	Aug. 30, 2004
ADVANTEST Spectrum Analyzer	R3271A	85060311	Jun. 16, 2005
CHASE RF Pre_Amplifier	CPA9232	1057	May. 10, 2005
HP Pre_Amplifier	8449B	3008A01922	Oct. 13, 2004
ROHDE & SCHWARZ Test Receiver	ESVS 10	849231 /019	Sep. 30, 2004
CHASE Broadband Antenna	CBL6111c	2730	Jul 30, 2004
Schwarzbeck Horn_Antenna	3115	5619	Jul. 17, 2004
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170192	Feb. 16, 2005
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
RF Switches (ARNITSU)	CS-201	1565157	Dec. 01, 2004
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Feb. 10. 2005
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Dec. 01, 2004
Software	AS60P8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. C.
5. The FCC Site Registration No. is 656396.
6. The VCCI Site Registration No. is R-1626.
7. The CANADA Site Registration No. is IC 4824-3.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

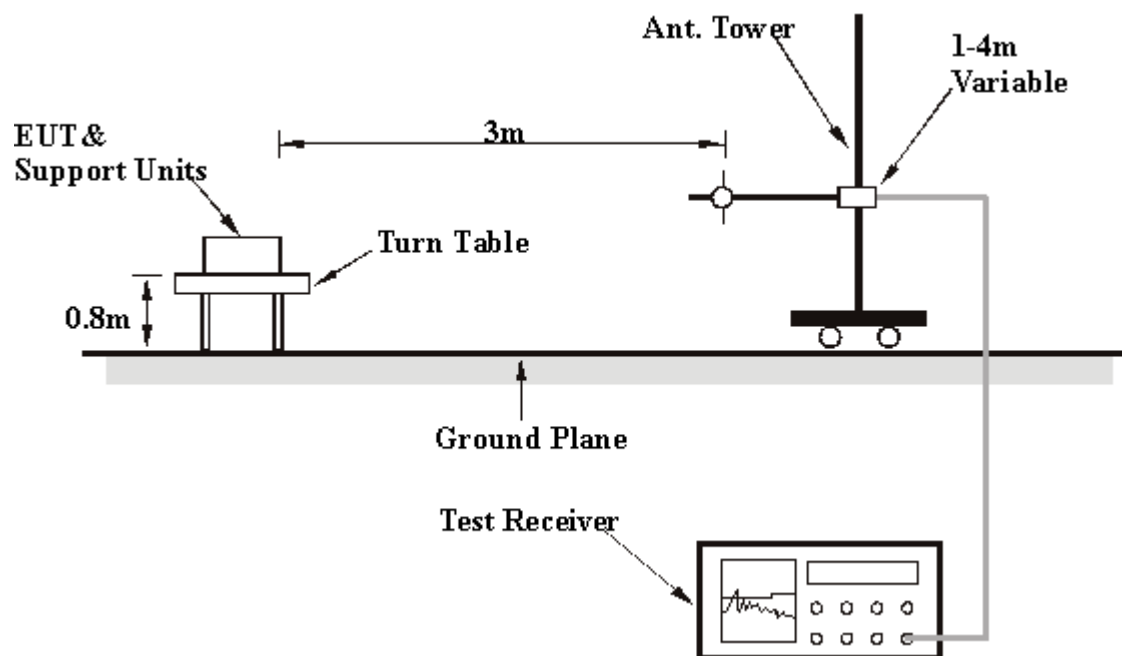

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 963 hPa	TESTED BY	Larry Peng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.01	27.40 QP	43.50	-16.10	1.69 H	249	15.30	12.10
2	250.01	25.50 QP	46.00	-20.50	1.29 H	241	12.20	13.20
3	280.00	36.10 QP	46.00	-9.90	1.08 H	241	21.60	14.50
4	400.00	32.40 QP	46.00	-13.60	2.17 H	18	14.30	18.10
5	499.99	38.20 QP	46.00	-7.80	1.73 H	246	17.30	20.90
6	520.00	37.40 QP	46.00	-8.60	1.46 H	5	16.10	21.30
7	600.00	39.20 QP	46.00	-6.80	1.31 H	3	16.30	23.00
8	640.00	38.60 QP	46.00	-7.40	1.07 H	5	14.80	23.80
9	720.00	34.40 QP	46.00	-11.60	1.53 H	351	9.60	24.80
10	920.00	36.40 QP	46.00	-9.60	1.45 H	14	8.50	27.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.81	32.50 QP	40.00	-7.50	1.00 V	330	20.60	11.90
2	74.25	30.10 QP	40.00	-9.90	1.00 V	290	18.80	11.30
3	125.00	34.60 QP	43.50	-8.90	1.00 V	133	22.40	12.10
4	144.80	27.00 QP	43.50	-16.50	1.00 V	3	13.60	13.40
5	250.00	28.70 QP	46.00	-17.30	1.00 V	5	15.50	13.20
6	280.00	41.60 QP	46.00	-4.40	1.00 V	2	27.10	14.50
7	400.00	33.00 QP	46.00	-13.00	1.00 V	310	14.90	18.10
8	520.00	41.10 QP	46.00	-4.90	1.15 V	349	19.90	21.30
9	640.00	40.80 QP	46.00	-5.20	1.68 V	343	17.10	23.80
10	680.00	37.50 QP	46.00	-8.50	1.63 V	323	13.20	24.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2.8 TEST RESULTS - DSSS

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	Model	AP5822E
MODE	Channel 1	FREQUENCY RANGE	1000MHz~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28deg. C, 55%RH, 963 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	39.40 PK	74.00	-34.60	1.26 H	348	9.00	30.30
2	2390.00	36.50 PK	74.00	-37.50	1.49 H	209	6.10	30.40
3	*2412.00	89.00 PK			1.48 H	208	58.50	30.50
3	*2412.00	82.50 AV			1.48 H	208	51.90	30.50
4	4824.00	42.90 PK	74.00	-31.10	1.43 H	201	6.70	36.20
5	7236.00	48.50 PK	74.00	-25.50	1.34 H	147	6.80	41.70
6	9648.00	49.00 PK	74.00	-25.00	1.25 H	106	4.10	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	55.70 PK	74.00	-18.30	1.62 V	15	25.40	30.30
1	2360.00	44.70 AV	54.00	-9.30	1.62 V	15	14.40	30.30
2	2390.00	59.50 PK	74.00	-14.50	1.54 V	332	29.00	30.40
2	2390.00	52.60 AV	54.00	-1.40	1.54 V	332	22.20	30.40
3	*2412.00	112.10 PK			1.53 V	331	81.60	30.50
3	*2412.00	105.30 AV			1.53 V	331	74.70	30.50
4	4824.00	42.40 PK	74.00	-31.60	1.35 V	146	6.20	36.20
5	7236.00	47.90 PK	74.00	-26.10	1.18 V	93	6.20	41.70
6	9648.00	49.70 PK	74.00	-24.30	1.11 V	59	4.80	44.90

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Channel 6	FREQUENCY RANGE	1000MHz~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28deg. C, 55%RH, 963 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	40.40 PK	74.00	-33.60	1.27 H	346	10.00	30.30
2	*2437.00	95.40 PK			1.39 H	224	64.70	30.70
2	*2437.00	88.30 AV			1.39 H	224	57.70	30.70
3	4874.00	42.00 PK	74.00	-32.00	1.18 H	287	5.50	36.50
4	7311.00	47.60 PK	74.00	-26.40	1.08 H	249	5.80	41.80
5	9748.00	48.70 PK	74.00	-25.30	1.25 H	202	4.10	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	61.10 PK	74.00	-12.90	1.29 V	83	30.80	30.30
1	2360.00	50.70 AV	54.00	-3.30	1.29 V	83	20.40	30.30
2	*2437.00	117.10 PK			1.36 V	320	86.40	30.70
2	*2437.00	109.90 AV			1.36 V	320	79.20	30.70
3	4874.00	41.60 PK	74.00	-32.40	1.47 V	139	5.20	36.50
4	7311.00	47.50 PK	74.00	-26.50	1.25 V	79	5.70	41.80
5	9748.00	48.80 PK	74.00	-25.20	1.39 V	132	4.20	44.60

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Channel 11	FREQUENCY RANGE	1000MHz~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28deg. C, 55%RH, 963 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	91.60 PK			1.39 H	202	60.80	30.80
1	*2462.00	83.60 AV			1.39 H	202	52.80	30.80
2	2483.50	39.10 PK	74.00	-34.90	1.40 H	203	8.20	31.00
3	4924.00	42.70 PK	74.00	-31.30	1.34 H	267	6.00	36.70
4	7386.00	47.50 PK	74.00	-26.50	1.21 H	222	5.60	41.80
5	9848.00	50.20 PK	74.00	-23.80	1.26 H	263	5.80	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.50 PK			1.36 V	323	82.70	30.80
1	*2462.00	104.50 AV			1.36 V	323	73.70	30.80
2	2483.50	59.20 PK	74.00	-14.80	1.37 V	324	28.30	31.00
2	2483.50	52.30 AV	54.00	-1.70	1.37 V	324	21.30	31.00
3	4924.00	41.70 PK	74.00	-32.30	1.55 V	281	5.00	36.70
4	7386.00	47.50 PK	74.00	-26.50	1.45 V	337	5.70	41.80
5	9848.00	50.30 PK	74.00	-23.70	1.34 V	305	5.90	44.40

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.2.9 TEST RESULTS - OFDM

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Channel 1	FREQUENCY RANGE	1000MHz~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28deg. C, 55%RH, 963 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	39.20 PK	74.00	-34.80	1.08 H	76	8.80	30.30
2	2390.00	38.70 PK	74.00	-35.30	1.36 H	226	8.30	30.40
3	*2412.00	85.80 PK			1.35 H	225	55.20	30.50
3	*2412.00	78.20 AV			1.35 H	225	47.70	30.50
4	4824.00	42.50 PK	74.00	-31.50	1.50 H	181	6.30	36.20
5	7236.00	48.50 PK	74.00	-25.50	1.24 H	225	6.80	41.70
6	9648.00	50.50 PK	74.00	-23.50	1.46 H	285	5.60	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	57.40 PK	74.00	-16.60	1.17 V	19	27.10	30.30
1	2360.00	46.90 AV	54.00	-7.10	1.17 V	19	16.60	30.30
2	2390.00	61.20 PK	74.00	-12.80	1.50 V	330	30.80	30.40
2	2390.00	52.60 AV	54.00	-1.40	1.50 V	330	22.20	30.40
3	*2412.00	108.40 PK			1.49 V	331	77.80	30.50
3	*2412.00	99.70 AV			1.49 V	331	69.20	30.50
4	4824.00	42.20 PK	74.00	-31.80	1.38 V	165	5.90	36.20
5	7236.00	48.00 PK	74.00	-26.00	1.30 V	290	6.30	41.70
6	9648.00	49.70 PK	74.00	-24.30	1.18 V	347	4.80	44.90

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Channel 6	FREQUENCY RANGE	1000MHz~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28deg. C, 55%RH, 963 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	39.20 PK	74.00	-34.80	1.58 H	298	8.80	30.30
2	*2437.00	91.90 PK			1.41 H	228	61.20	30.70
2	*2437.00	84.00 AV			1.41 H	228	53.30	30.70
3	4874.00	42.70 PK	74.00	-31.30	1.16 H	144	6.20	36.50
4	7311.00	47.40 PK	74.00	-26.60	1.28 H	184	5.70	41.80
5	9748.00	49.20 PK	74.00	-24.80	1.53 H	224	4.60	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	62.00 PK	74.00	-12.00	1.43 V	16	31.70	30.30
1	2360.00	52.20 AV	54.00	-1.80	1.43 V	16	21.90	30.30
2	*2437.00	113.60 PK			1.54 V	321	82.90	30.70
2	*2437.00	105.30 AV			1.54 V	321	74.60	30.70
3	4874.00	42.20 PK	74.00	-31.80	1.49 V	10	5.80	36.50
4	7311.00	48.50 PK	74.00	-25.50	1.32 V	283	6.80	41.80
5	9748.00	49.70 PK	74.00	-24.30	1.24 V	244	5.10	44.60

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Channel 11	FREQUENCY RANGE	1000MHz~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28deg. C, 55%RH, 963 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	86.30 PK			1.41 H	216	55.50	30.80
1	*2462.00	78.10 AV			1.41 H	216	47.20	30.80
2	2483.50	38.00 PK	74.00	-36.00	1.42 H	217	7.10	31.00
3	4924.00	42.80 PK	74.00	-31.20	1.23 H	199	6.10	36.70
4	7386.00	47.20 PK	74.00	-26.80	1.60 H	79	5.40	41.80
5	9848.00	49.90 PK	74.00	-24.10	1.48 H	128	5.50	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.60 PK			1.42 V	322	77.80	30.80
1	*2462.00	100.30 AV			1.42 V	322	69.40	30.80
2	2483.50	60.40 PK	74.00	-13.60	1.43 V	323	29.40	31.00
2	2483.50	52.00 AV	54.00	-2.00	1.43 V	323	21.00	31.00
3	4924.00	42.90 PK	74.00	-31.10	1.59 V	281	6.30	36.70
4	7386.00	48.30 PK	74.00	-25.70	1.39 V	215	6.50	41.80
5	9848.00	49.60 PK	74.00	-24.40	1.33 V	174	5.20	44.40

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2004

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS -DSSS

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
MODEL	AP5822E	ENVIRONMENTAL CONDITIONS	21deg. C, 65%RH, 963 hPa
INPUT POWER (SYSTEM)	120Vac, 60Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.13	0.5	PASS
6	2437	10.43	0.5	PASS
11	2462	10.22	0.5	PASS




CH1

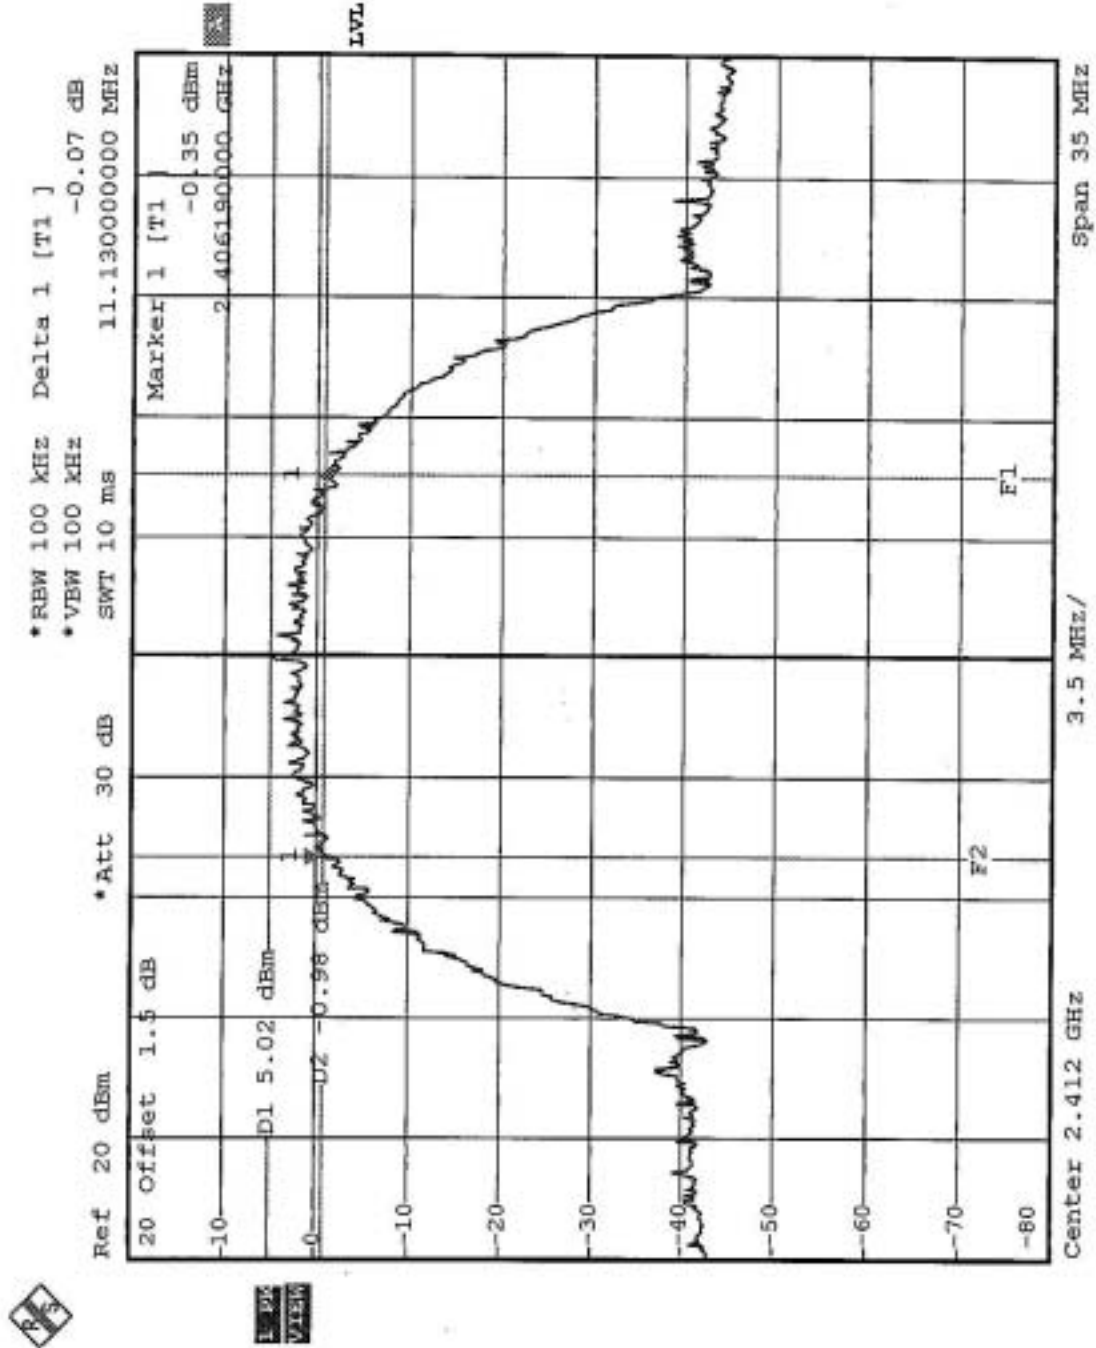




CH6

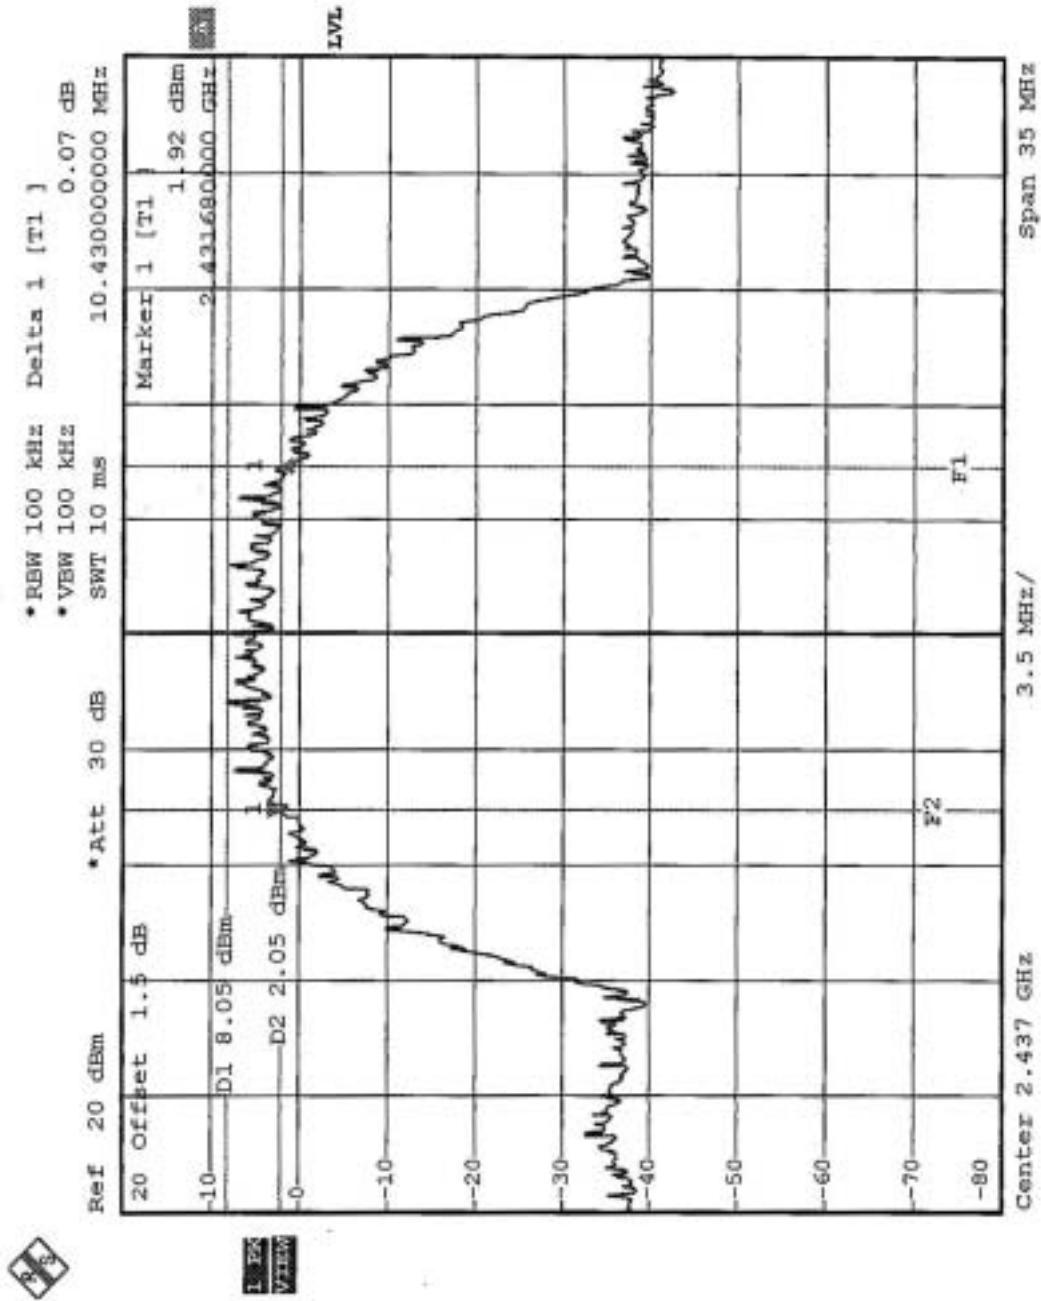



CH11

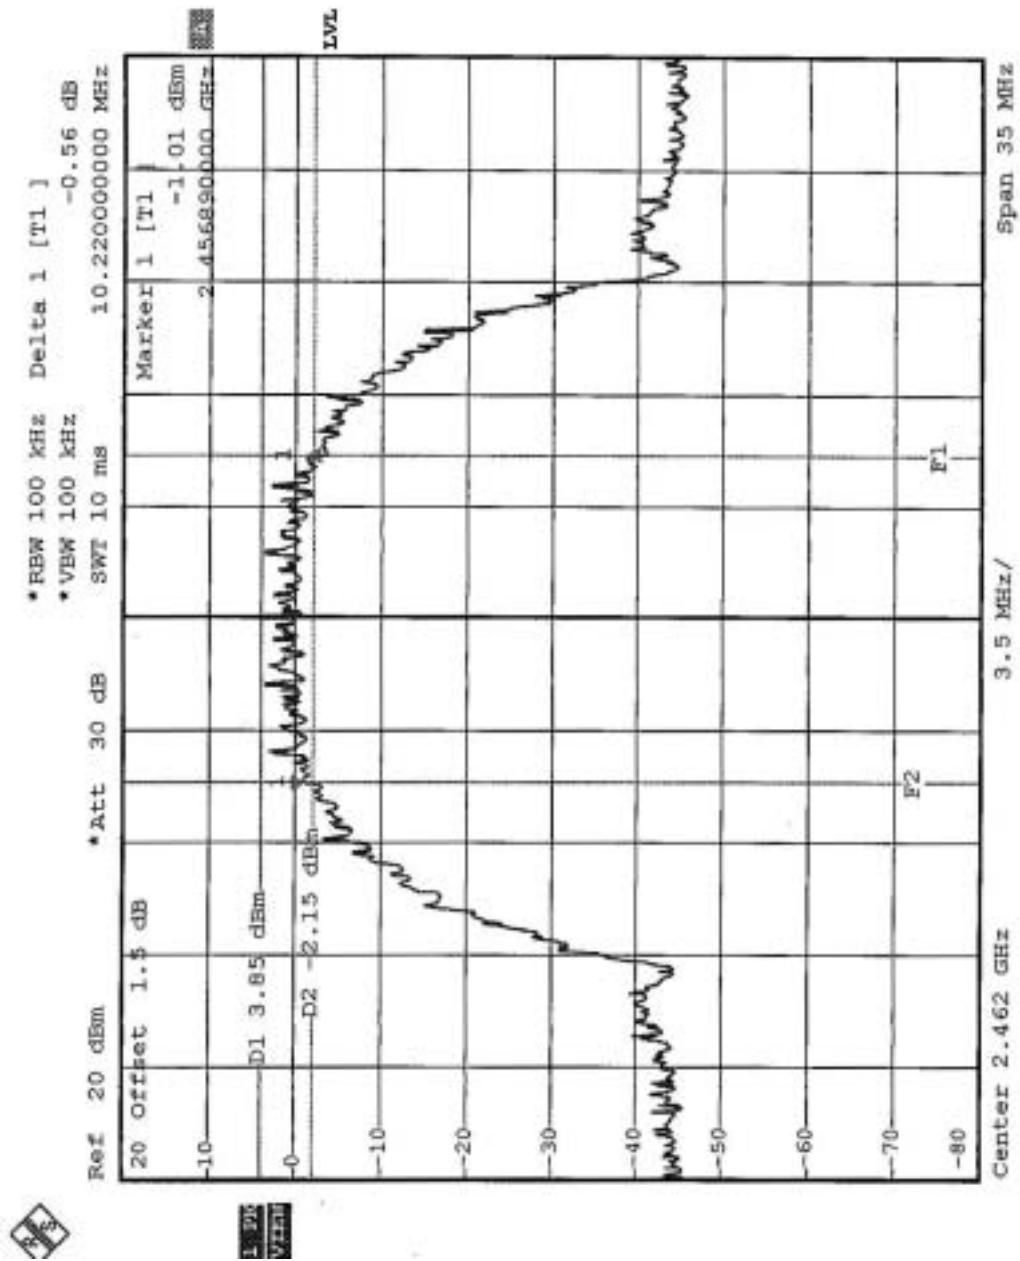




4.3.8 TEST RESULTS -OFDM

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
MODEL	AP5822E	ENVIRONMENTAL CONDITIONS	21deg. C, 65%RH, 963 hPa
INPUT POWER (SYSTEM)	120Vac, 60Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.45	0.5	PASS
6	2437	16.38	0.5	PASS
11	2462	16.59	0.5	PASS




CH1

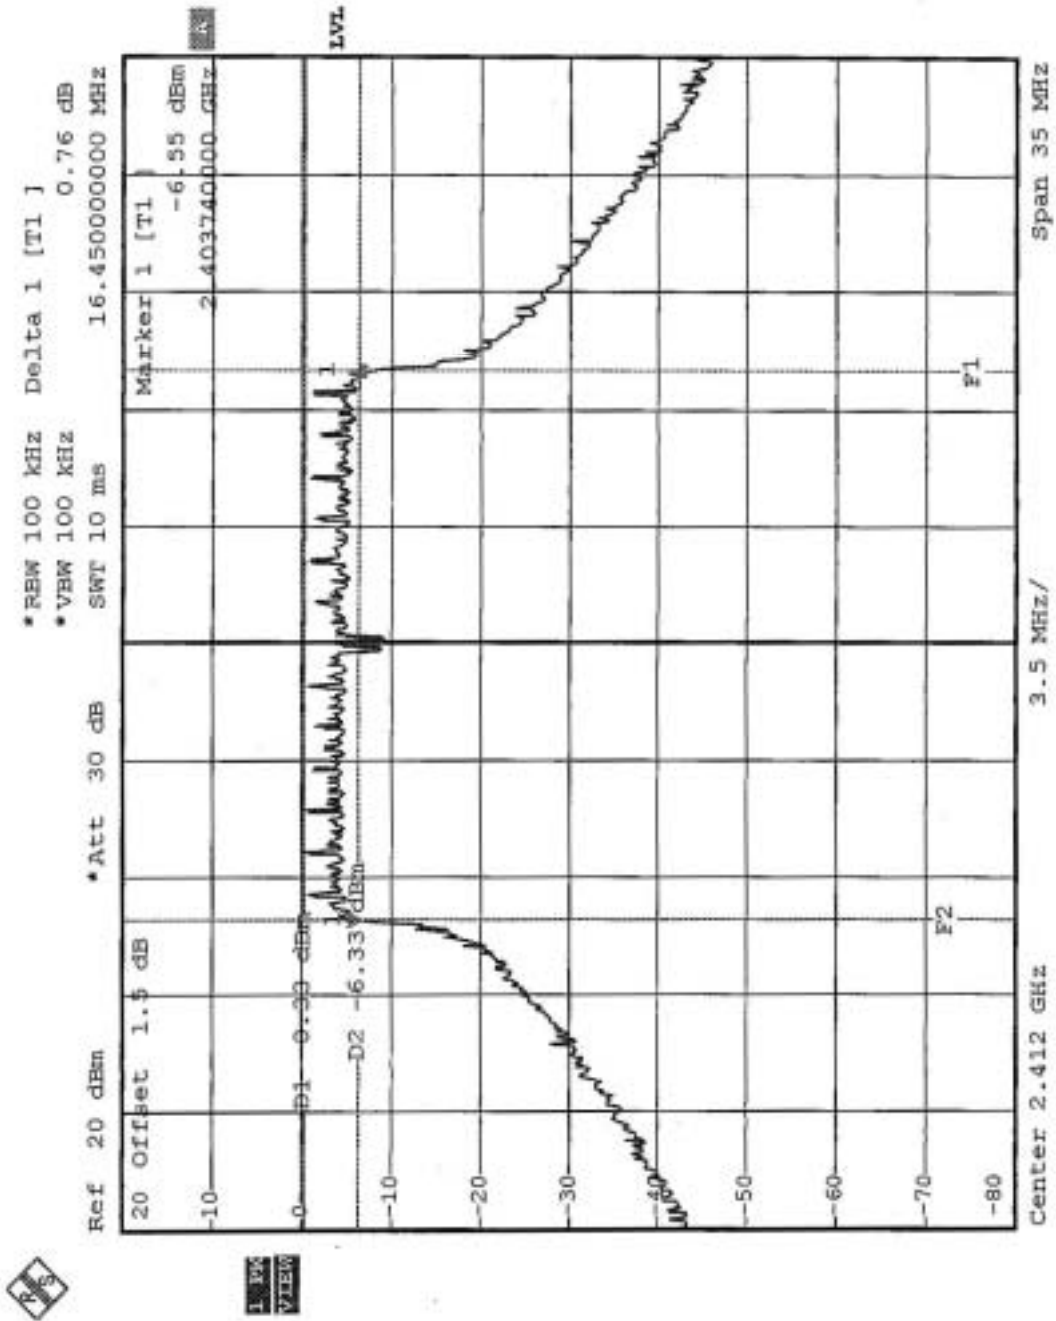




CH6

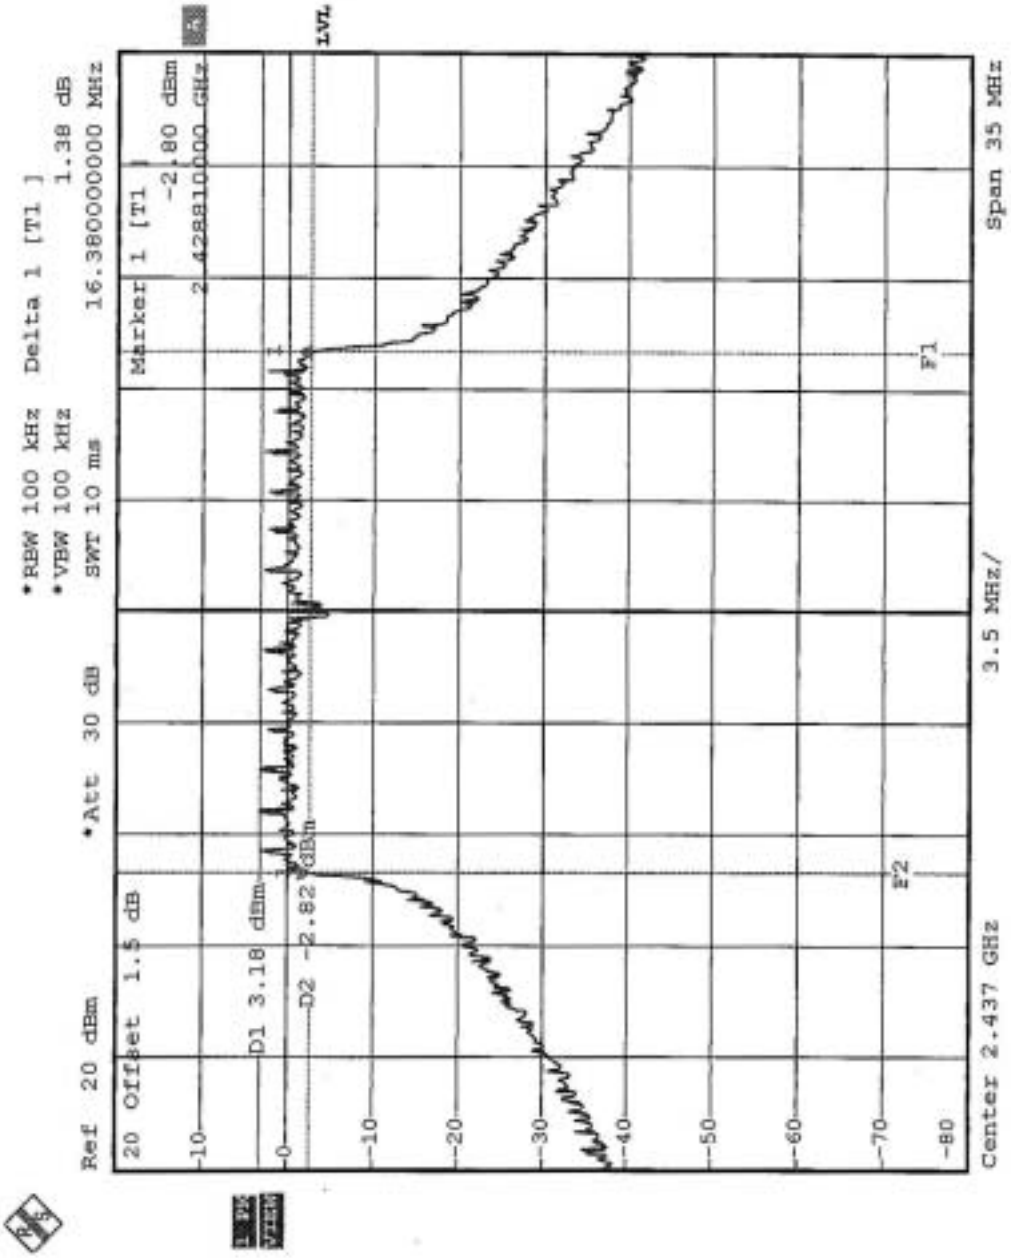



CH11

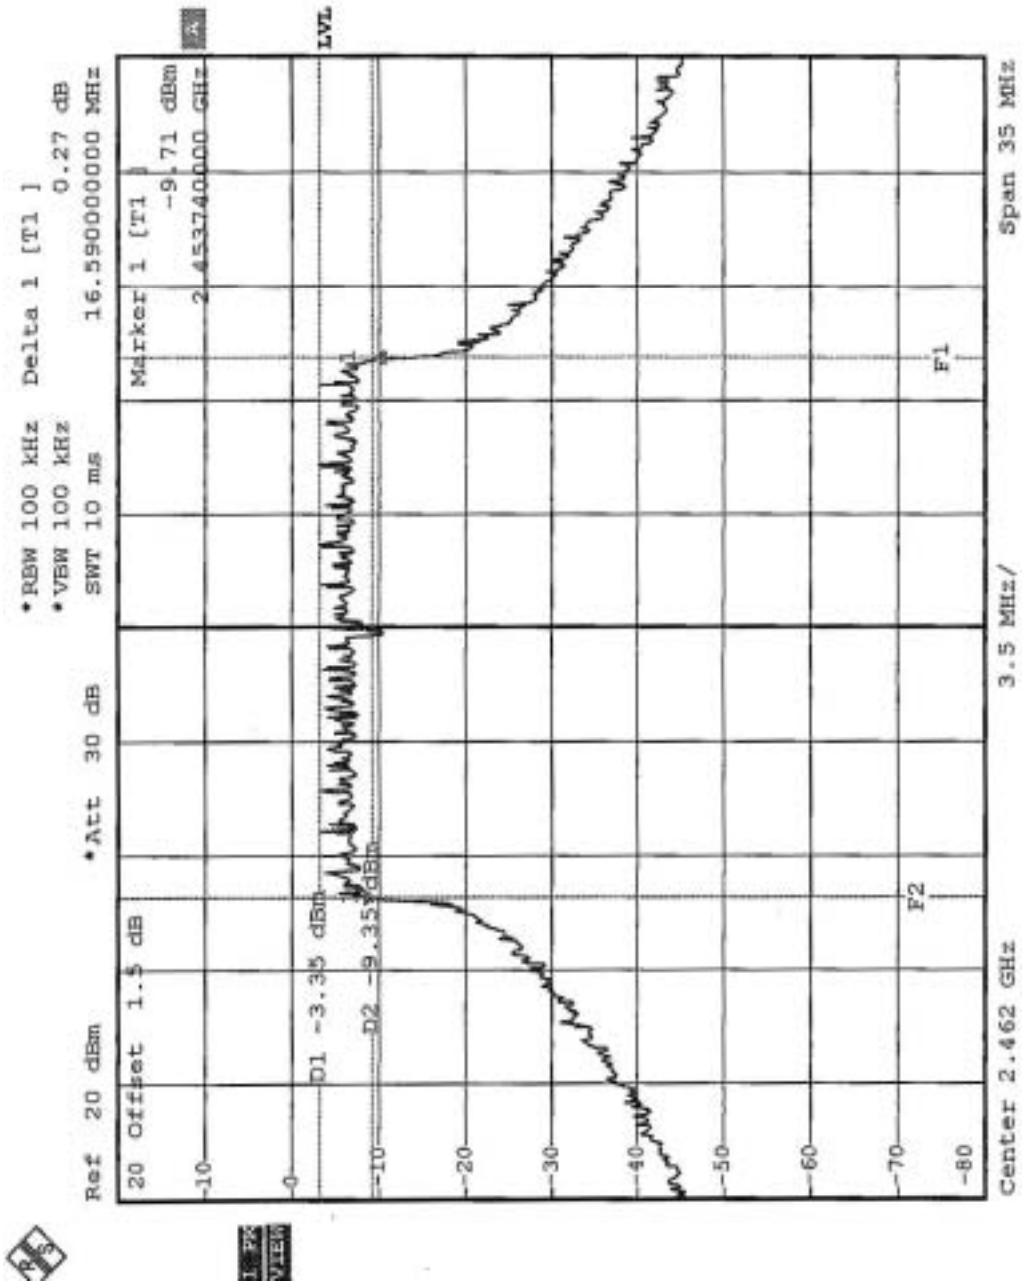



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

Note:

1. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 27, 2004
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Jan. 1, 2005
TEKTRONIX OSCILLOSCOPE	TDS 220	B027241	Jun. 30, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:


The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.6 TEST RESULTS -DSSS

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
INPUT POWER (SYSTEM)	120Vac, 60Hz	MODEL	AP5822E
TESTED BY	Wen Yu	ENVIRONMENTAL CONDITIONS	21deg. C, 65%RH, 963 hPa

Antenna 1 (Gain 8.0 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.38	28	PASS
6	2437	17.86	28	PASS
11	2462	13.43	28	PASS



4.4.7 TEST RESULTS -OFDM

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
INPUT POWER (SYSTEM)	120Vac, 60Hz	MODEL	AP5822E
TESTED BY	Wen Yu	ENVIRONMENTAL CONDITIONS	21deg. C, 65%RH, 963 hPa

Antenna 1 (Gain 8.0 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.01	28	PASS
6	2437	18.73	28	PASS
11	2462	12.71	28	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2004

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS-DSSS

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
INPUT POWER (SYSTEM)	120Vac, 60Hz	MODEL	AP5822E
TESTED BY	Wen Yu	ENVIRONMENTAL CONDITIONS	21deg. C, 65%RH, 963 hPa

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-0.67	8	PASS
6	2437	4.37	8	PASS
11	2462	-0.97	8	PASS




CH1

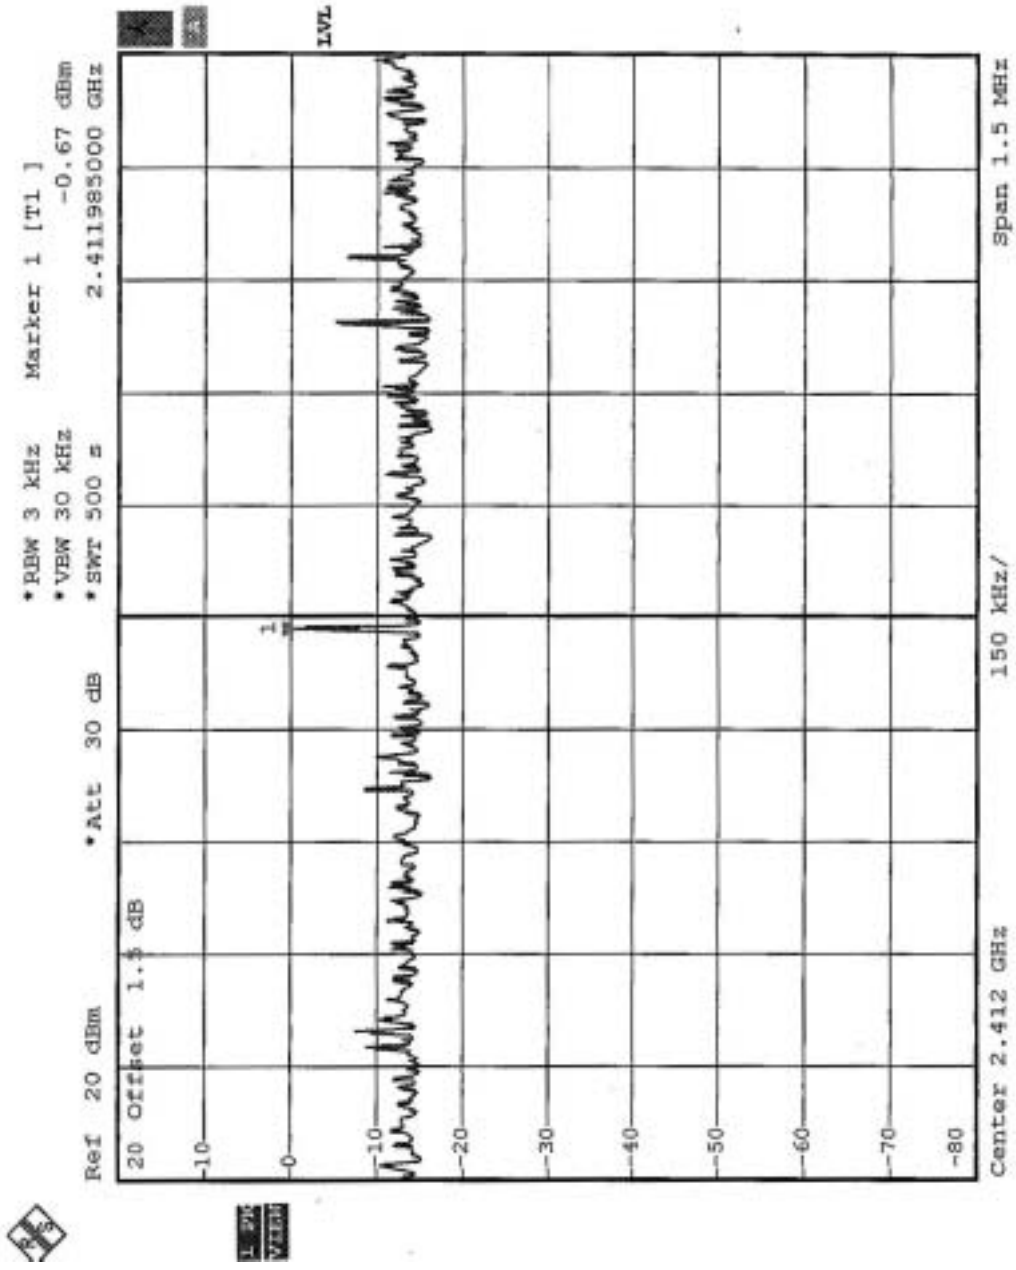




CH6

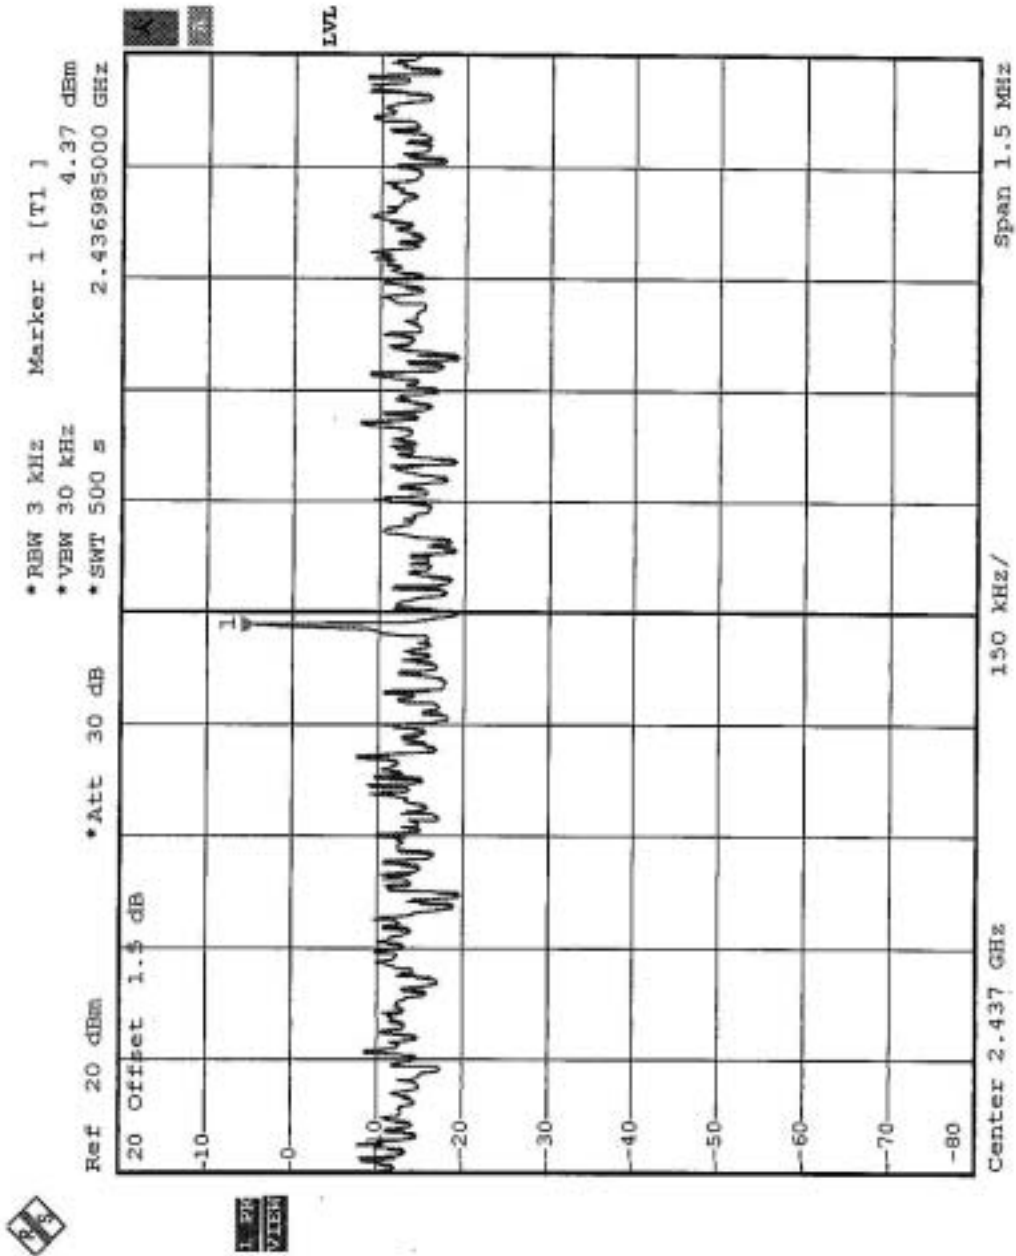



CH11

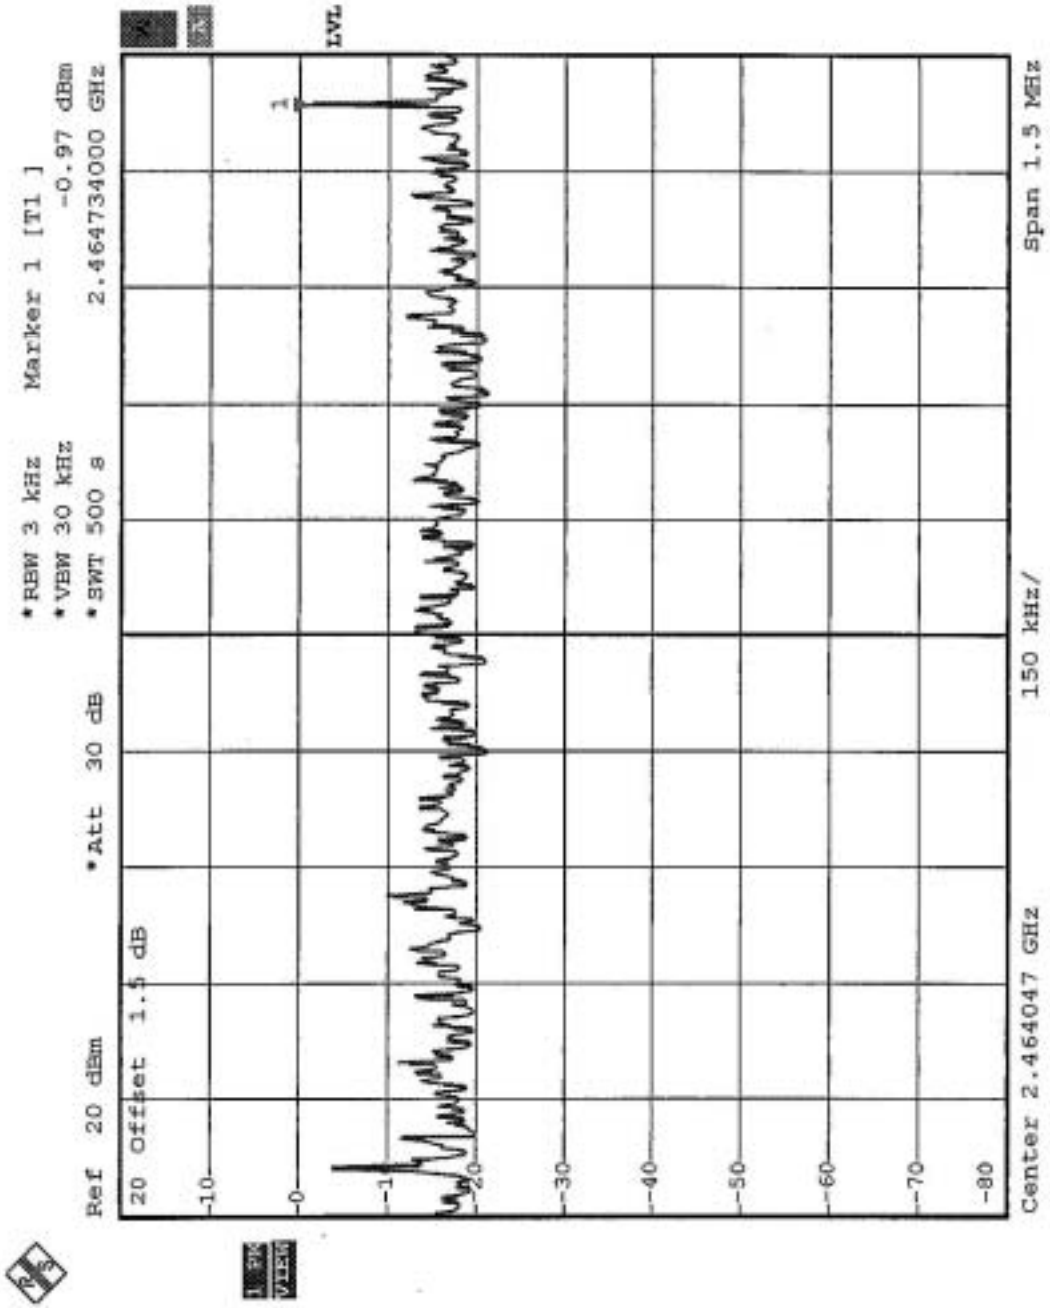




4.5.8 TEST RESULTS-OFDM

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
INPUT POWER (SYSTEM)	120Vac, 60Hz	MODEL	AP5822E
TESTED BY	Wen Yu	ENVIRONMENTAL CONDITIONS	21deg. C, 65%RH, 963 hPa

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-4.19	8	PASS
6	2437	-1.05	8	PASS
11	2462	-6.71	8	PASS




CH1

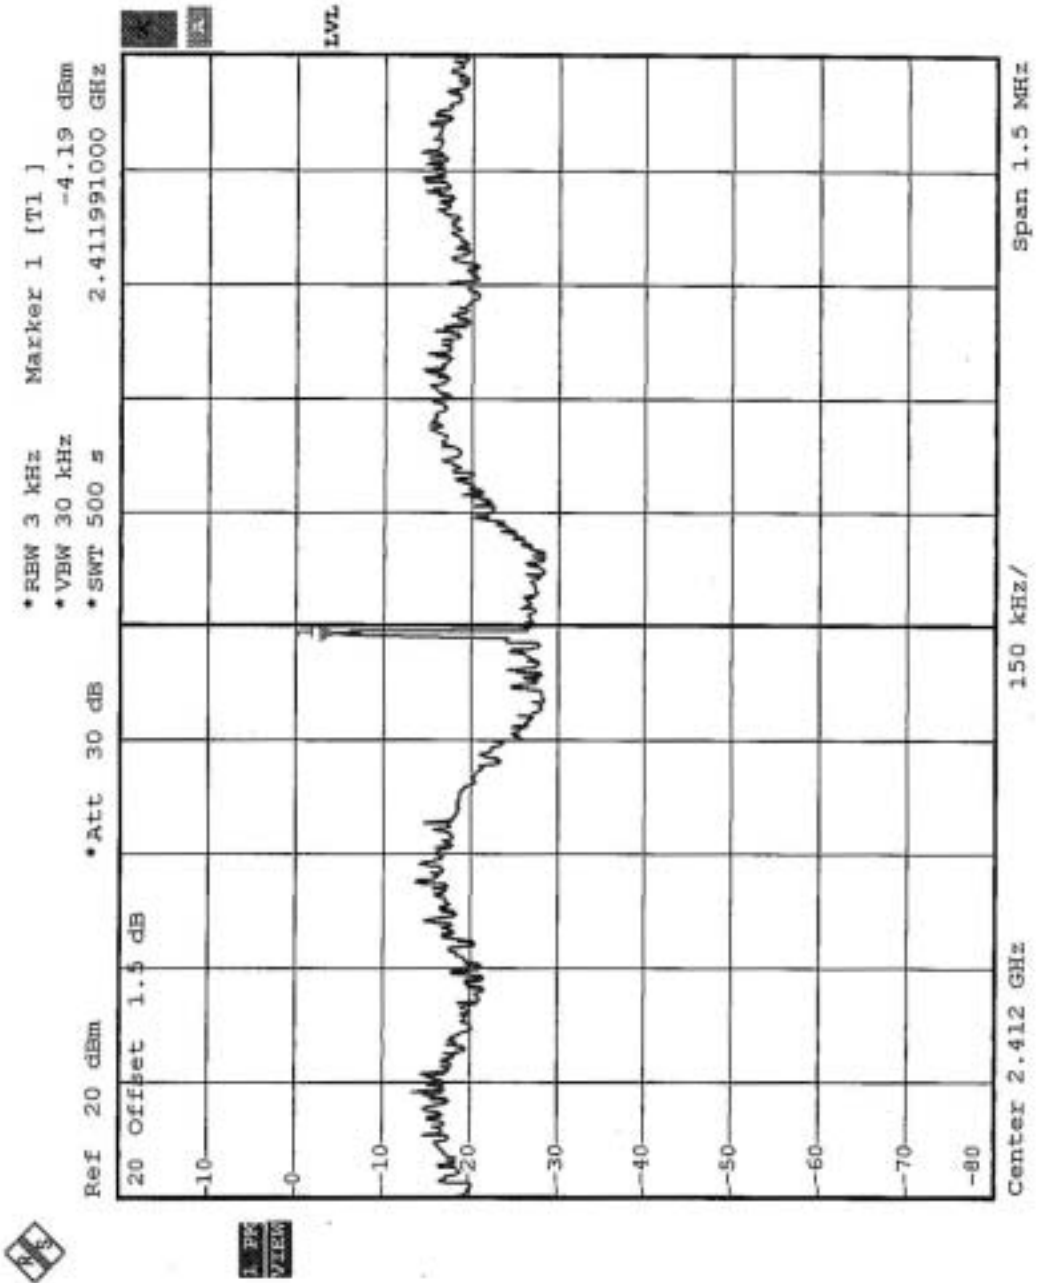




CH6

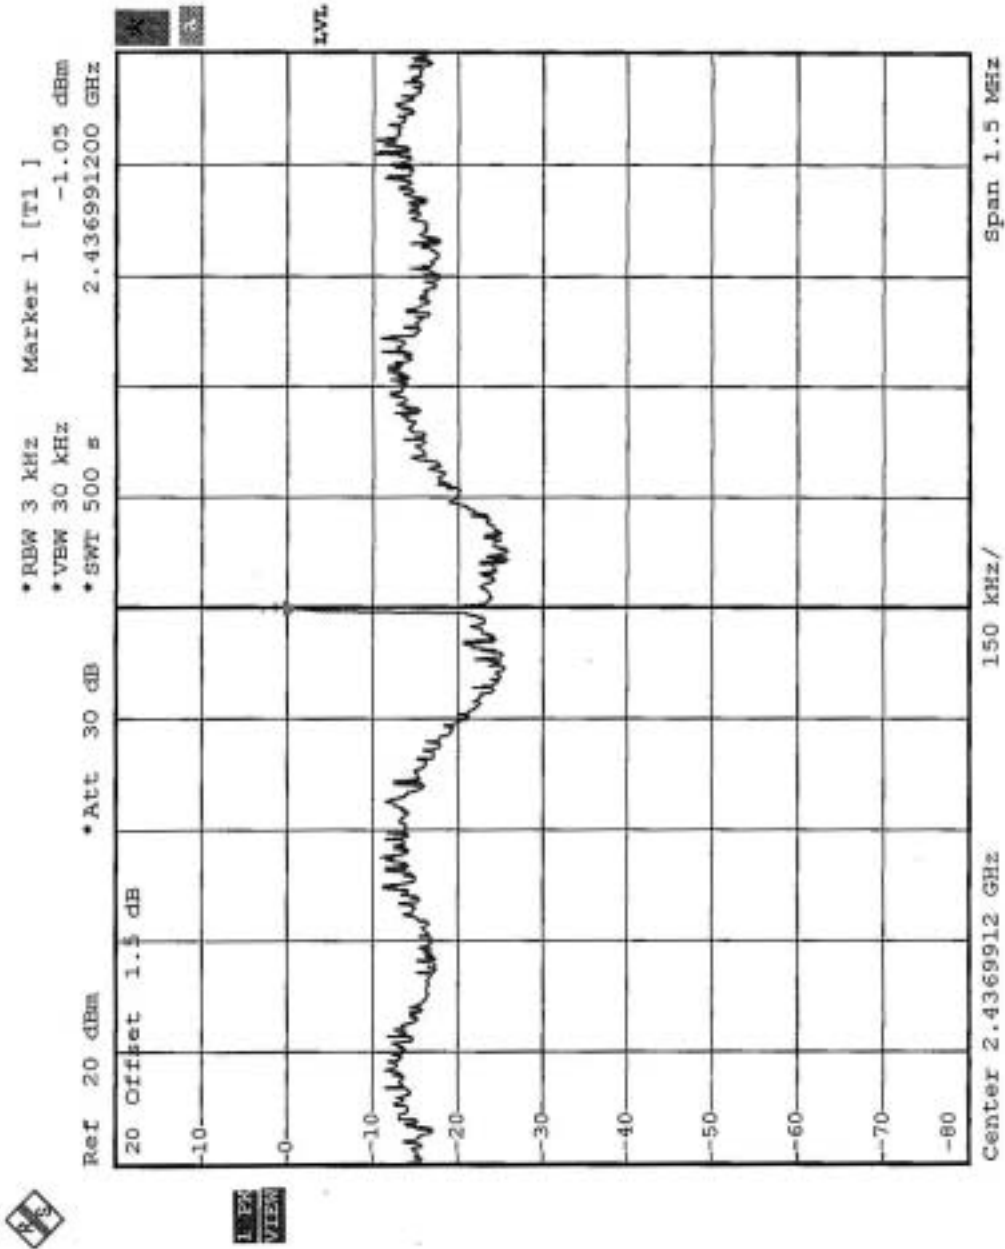



CH11

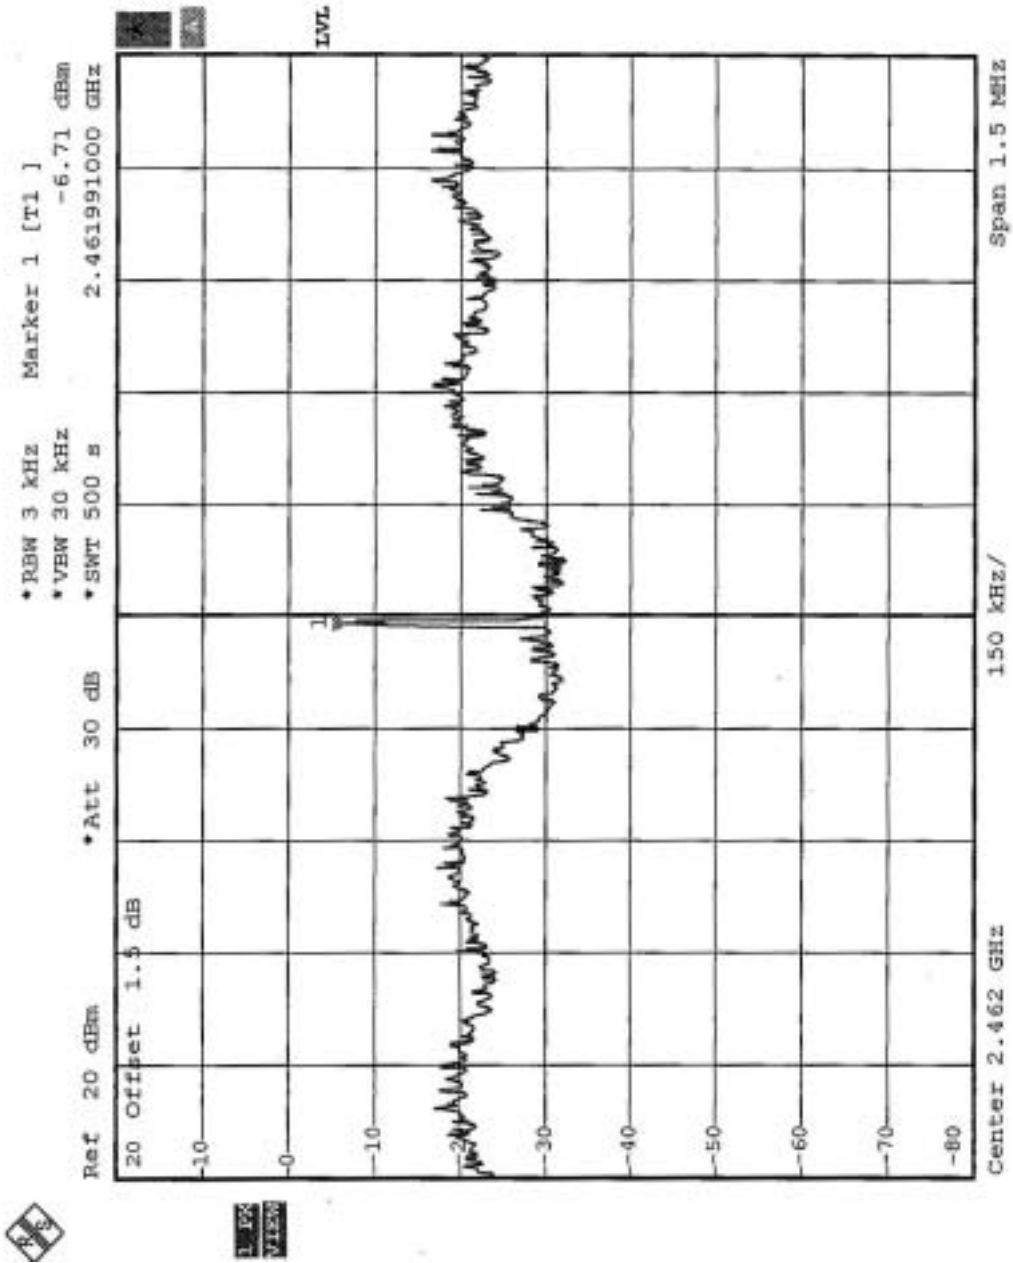



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2004

NOTE:

- 1.The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6




4.6.6 TEST RESULTS –DSSS


The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (1): The band edge emission plot on the following first page shows 52.68dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 105.3dBuV/m, so the maximum field strength in restrict band is $105.3-52.68=52.62$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 52.08 dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 104.5dBuV/m, so the maximum field strength in restrict band is $104.5-52.08=52.42$ dBuV/m which is under 54 dBuV/m limit.

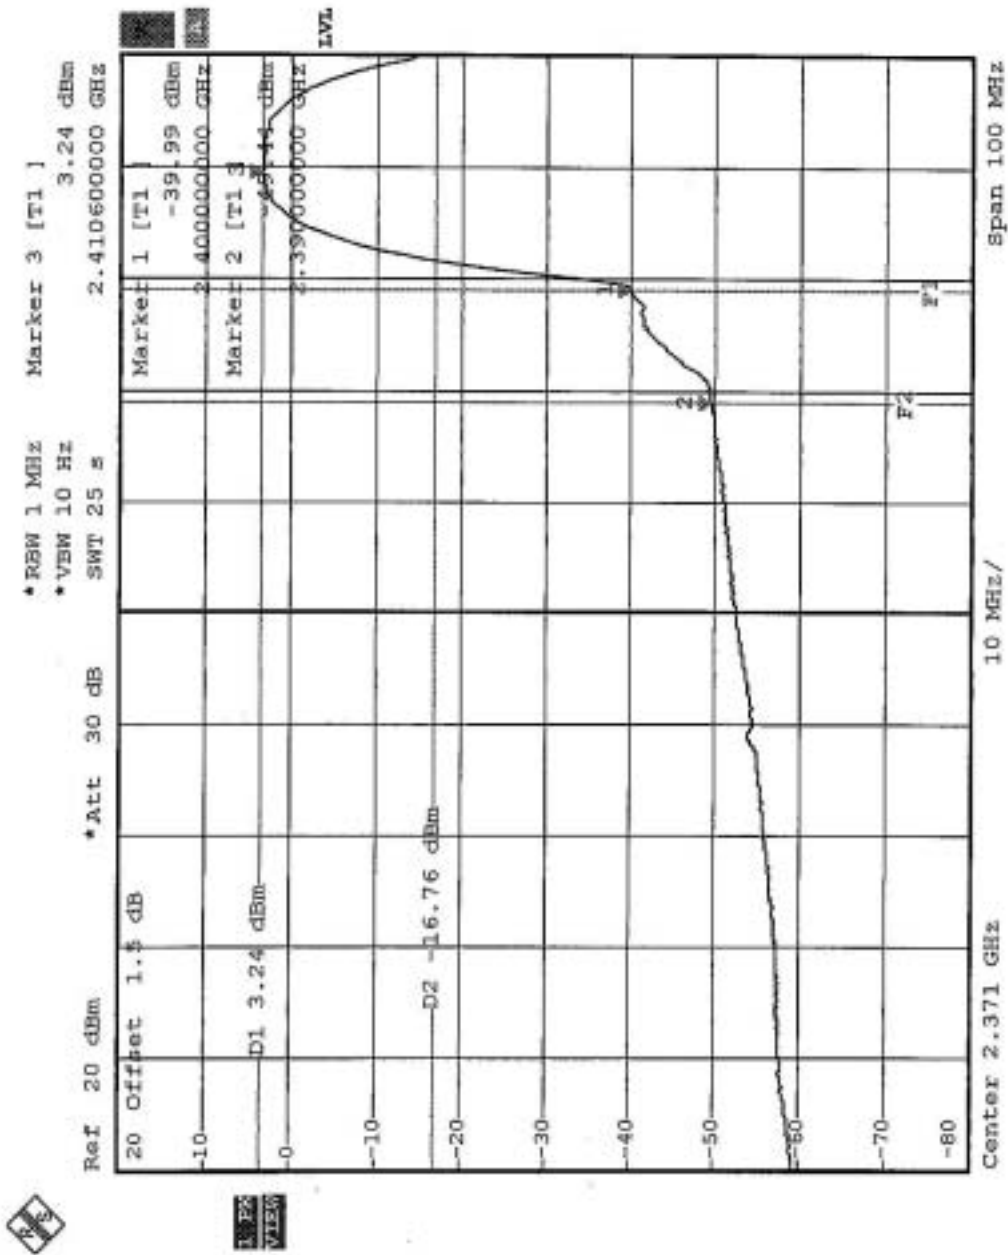

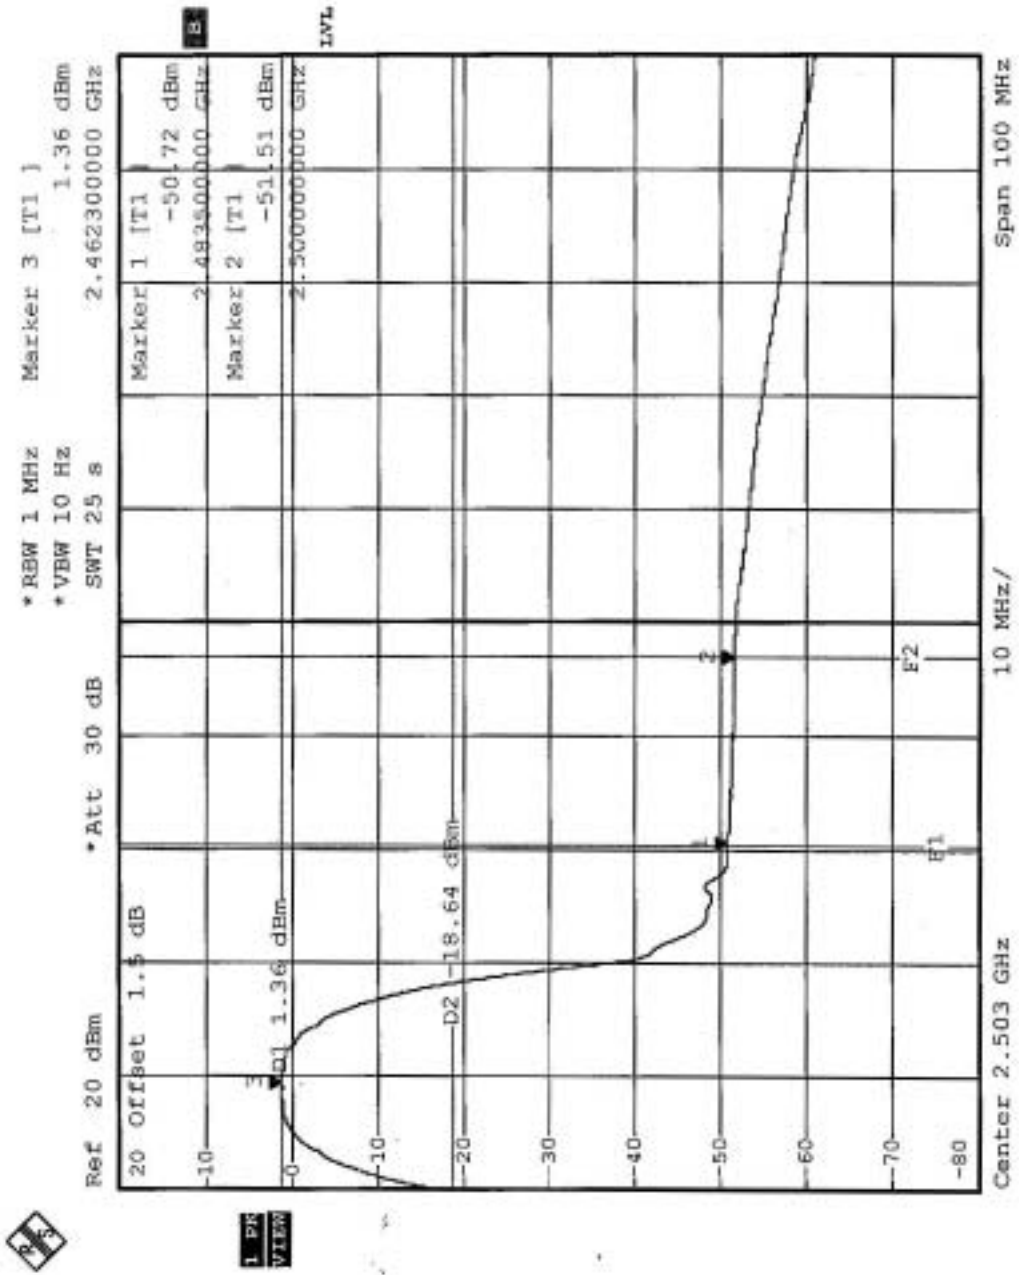




4.6.7 TEST RESULTS –OFDM


The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (1): The band edge emission plot on the following first page shows 48.0dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 99.70dBuV/m, so the maximum field strength in restrict band is $99.70-48.0=51.70$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 47.82 dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 100.3dBuV/m, so the maximum field strength in restrict band is $100.3-47.82=52.48$ dBuV/m which is under 54 dBuV/m limit.

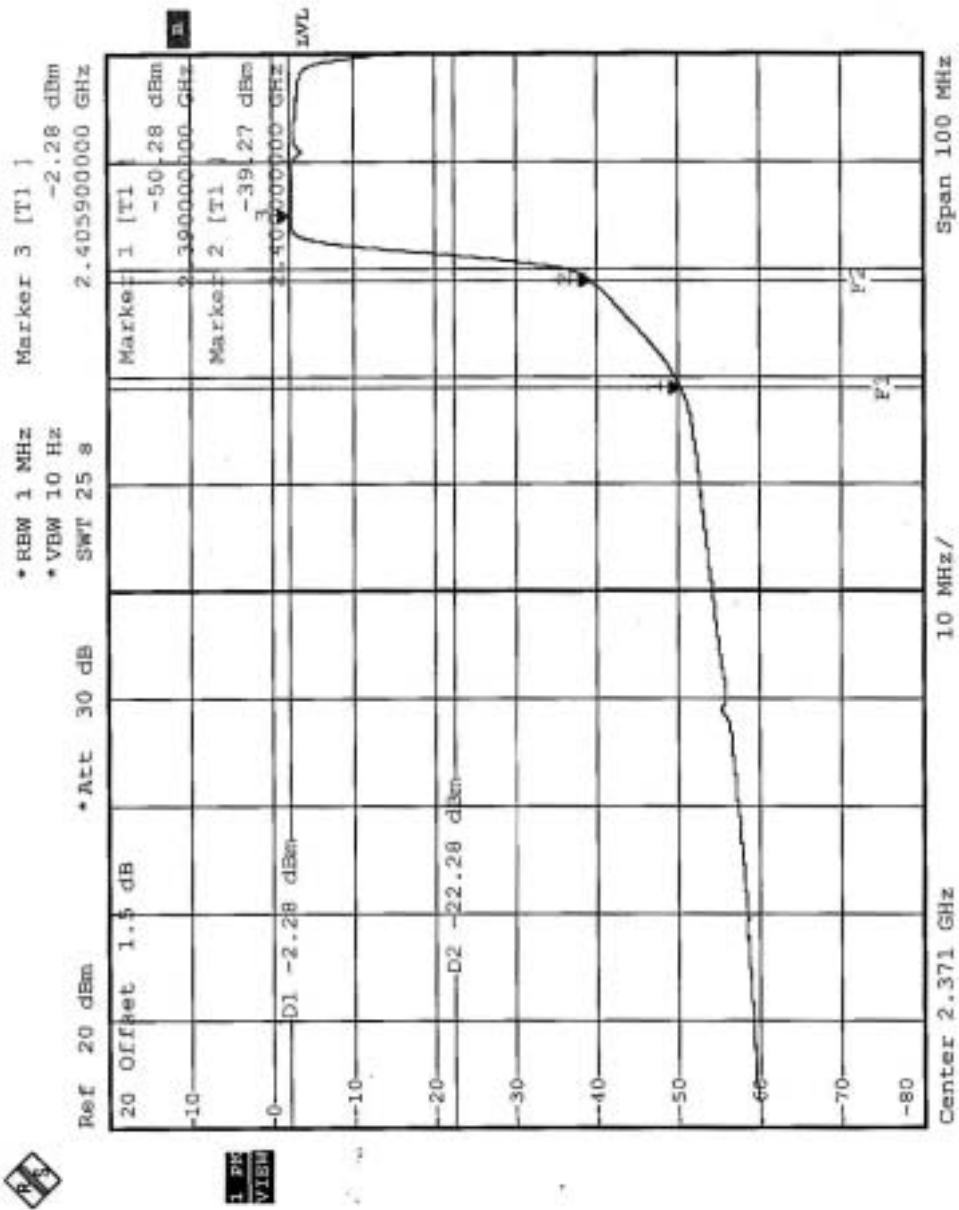

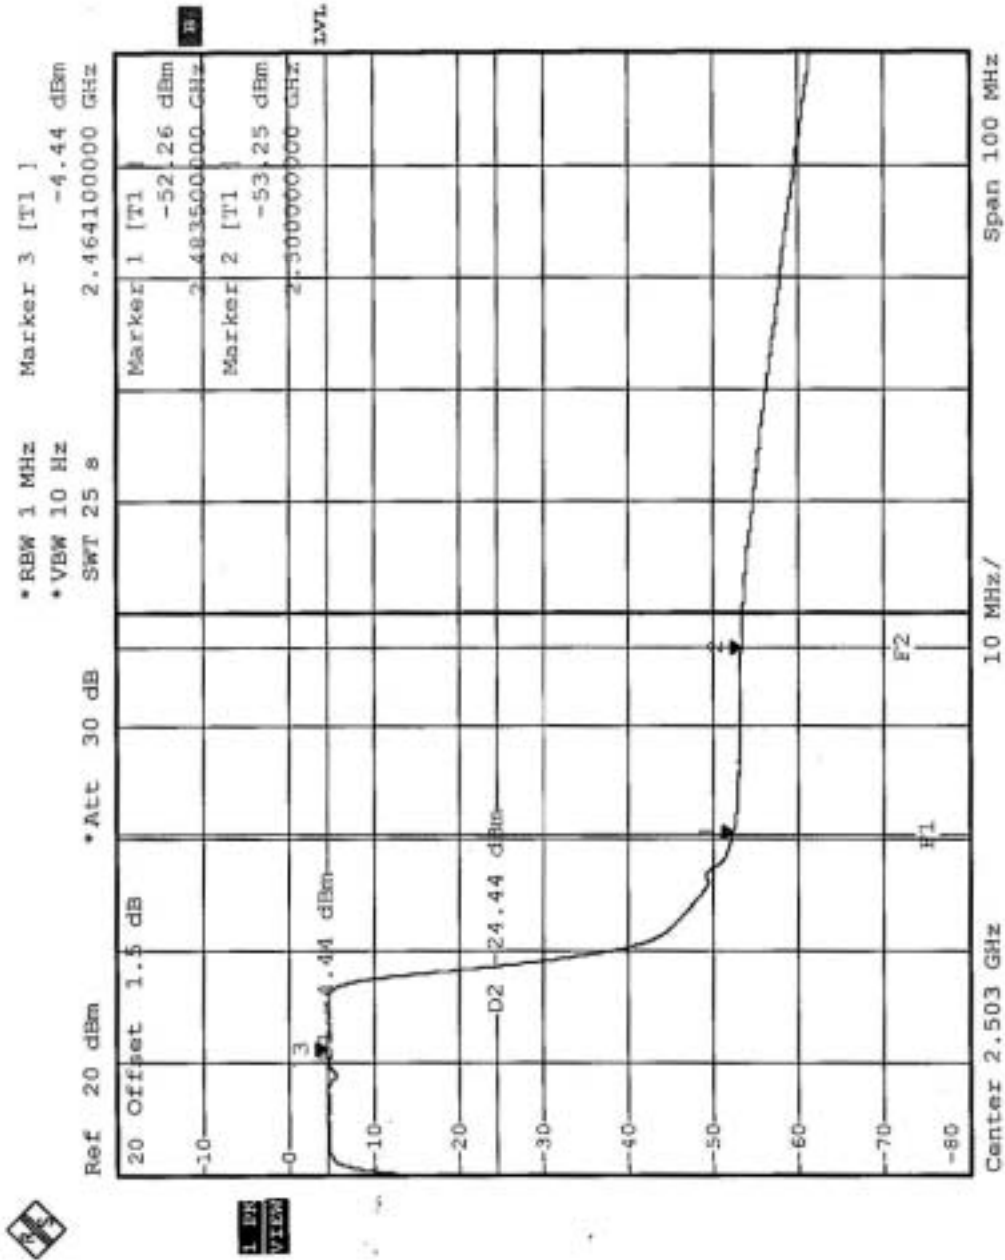



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203 and RSS-210 section 6.2.2(o)(e2), an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole Antenna with N (Plug) connector. The maximum Gain of the antenna is 8.0dBi.



5. TEST TYPES AND RESULTS (FOR PART 802.11a)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Dec. 04, 2004
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 04, 2004
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 27, 2004
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 03, 2004
Terminator(for KYORITSU)	50	3	May 10, 2005
Software	Cond-V2e	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.




5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

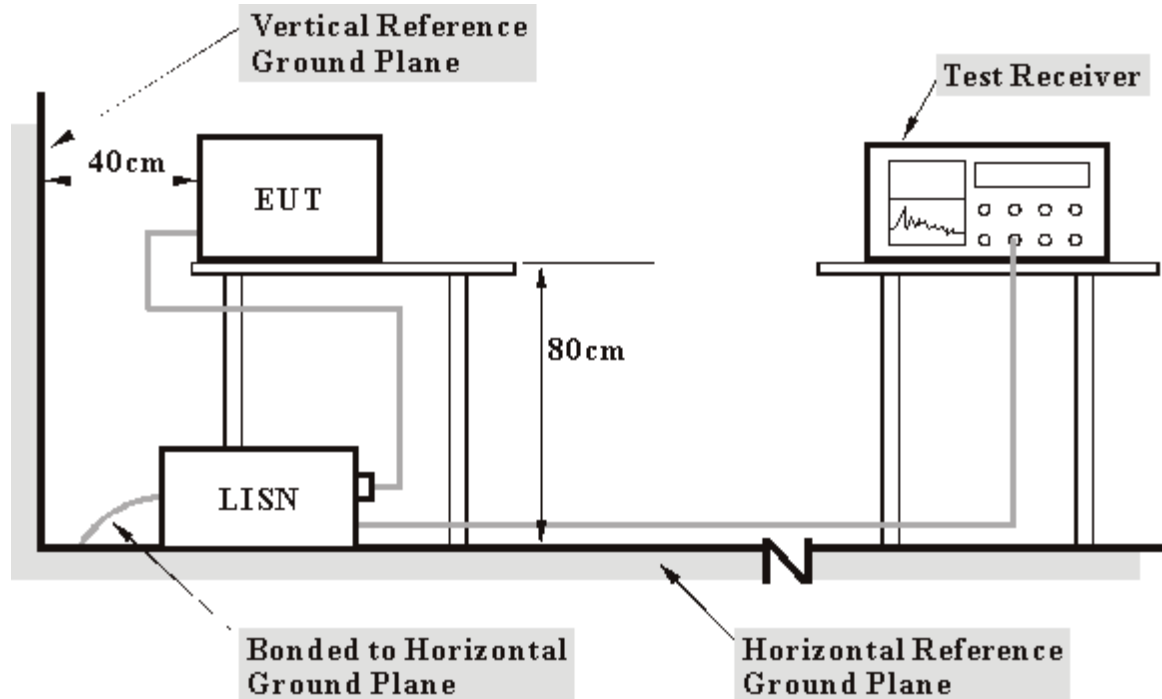

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program “ART 485” to enable EUT under transmission/receiving condition continuously at specific channel frequency via RJ 45 cable and wireless.
- d. The communication partner sent data to EUT by command "PING".




5.1.7 TEST RESULTS

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
MODEL	AP5822E	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	27deg. C, 59%RH, 963 hPa	TESTED BY	Tony Chen
TEST MODE	802.11a		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.30	44.85	-	45.15	-	63.26	53.26	-18.12	-
2	0.552	0.23	40.54	-	40.77	-	56.00	46.00	-15.23	-
3	3.383	0.37	35.85	-	36.22	-	56.00	46.00	-19.78	-
4	3.867	0.39	42.06	-	42.45	-	56.00	46.00	-13.55	-
5	4.262	0.42	43.31	-	43.73	-	56.00	46.00	-12.27	-
6	13.359	1.07	43.03	-	44.10	-	60.00	50.00	-15.90	-

- NOTES:** (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

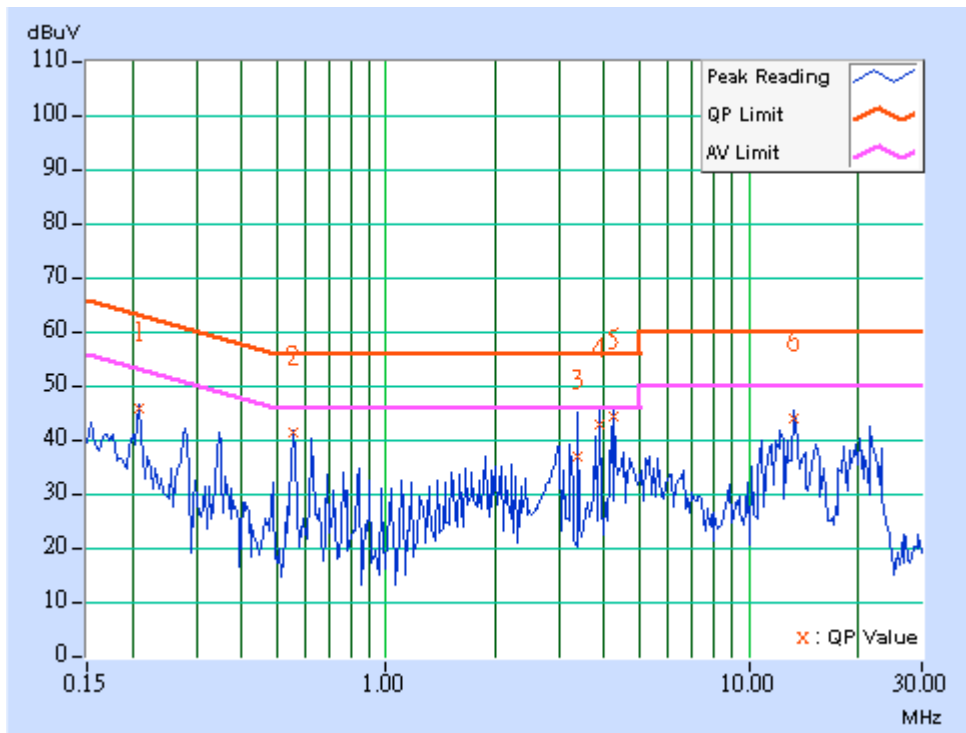




EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
MODEL	AP5822E	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	27deg. C, 59%RH, 963 hPa	TESTED BY	Tony Chen
TEST MODE	802.11a		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.30	45.03	-	45.33	-	63.26	53.26	-17.94	-
2	0.345	0.23	45.90	-	46.13	-	59.07	49.07	-12.95	-
3	0.552	0.23	39.66	-	39.89	-	56.00	46.00	-16.11	-
4	2.216	0.31	35.30	-	35.61	-	56.00	46.00	-20.39	-
5	13.418	0.97	42.34	-	43.31	-	60.00	50.00	-16.69	-
6	21.664	1.20	39.61	-	40.81	-	60.00	50.00	-19.19	-

- NOTES:** (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

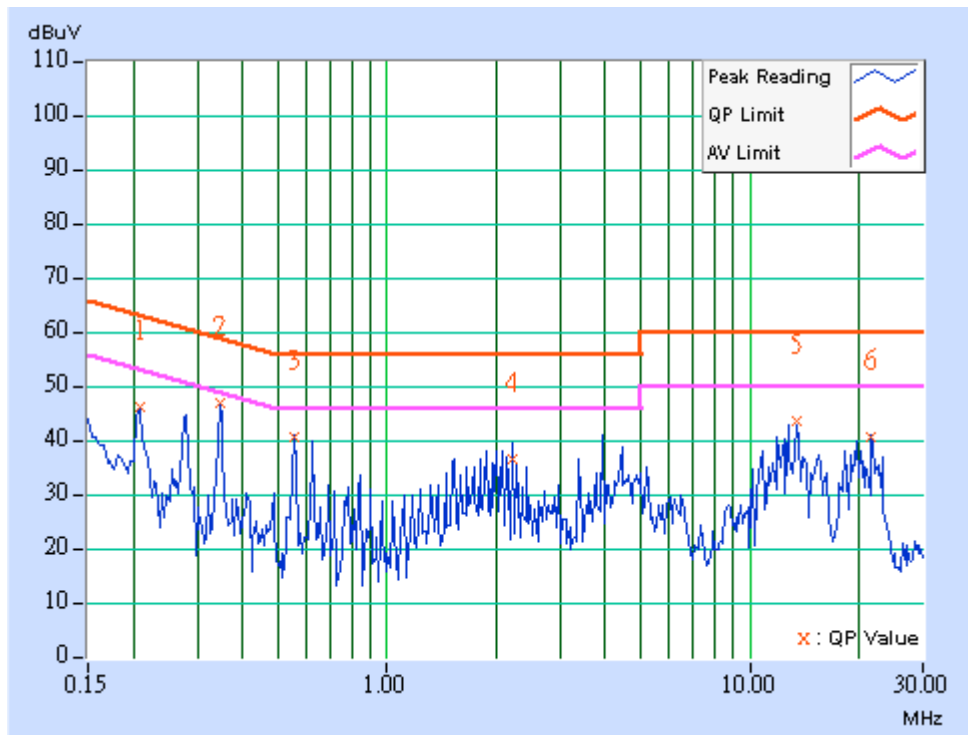



5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



5.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \quad \text{where P is the eirp (Watts)}$$



5.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594ER	3829U04676	Aug. 30, 2004
ADVANTEST Spectrum Analyzer	R3271A	85060311	Jun 16, 2005
CHASE RF Pre_Amplifier	CPA9232	1057	May. 10, 2005
HP Pre_Amplifier	8449B	3008A01922	Oct. 13, 2004
ROHDE & SCHWARZ Test Receiver	ESVS 10	849231 /019	Sep. 30, 2004
CHASE Broadband Antenna	CBL6111c	2730	Jul 30, 2004
Schwarzbeck Horn_Antenna	3115	5619	Jun 16, 2005
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170192	Feb. 16, 2005
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
RF Switches (ARNITSU)	CS-201	1565157	Dec. 01, 2004
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Feb. 10. 2005
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Dec. 01, 2004
Software	AS60P8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. C.
5. The FCC Site Registration No. is 656396.
6. The VCCI Site Registration No. is R-1626.
7. The CANADA Site Registration No. is IC 4824-3.



5.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

5.2.5 DEVIATION FROM TEST STANDARD

No deviation

5.2.6 TEST SETUP

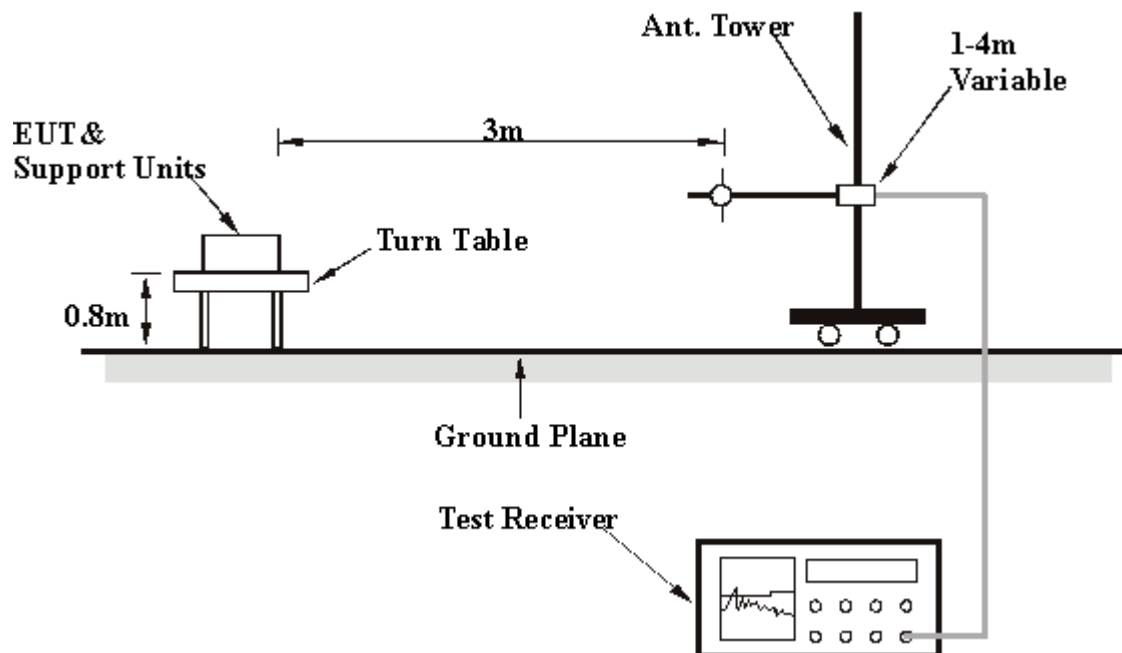

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.7 EUT OPERATING CONDITIONS

Same as 4.1.6.



5.2.8 TEST RESULTS (ANTENNA 1)

EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna		
MODEL	AP5822	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
FREQUENCY RANGE	30 - 1000MHz	INPUT POWER (SYSTEM)	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	24 deg. C, 69%RH, 963 hPa	TESTED BY	Larry Peng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	30.90 QP	43.50	-12.60	1.72 H	330	18.70	12.10
2	250.00	25.40 QP	46.00	-20.60	1.20 H	341	12.20	13.20
3	280.00	21.80 QP	46.00	-24.20	1.08 H	298	7.30	14.50
4	320.00	27.40 QP	46.00	-18.60	1.59 H	15	11.60	15.80
5	360.00	26.80 QP	46.00	-19.20	1.03 H	358	9.80	16.90
6	400.00	30.80 QP	46.00	-15.20	1.00 H	6	12.70	18.10
7	480.00	29.20 QP	46.00	-16.80	2.34 H	198	8.90	20.30
8	500.00	35.50 QP	46.00	-10.50	1.64 H	212	14.60	20.90
9	600.00	39.80 QP	46.00	-6.20	1.41 H	4	16.80	23.00
10	720.00	33.40 QP	46.00	-12.60	1.47 H	15	8.50	24.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	35.30 QP	43.50	-8.20	1.00 V	224	23.10	12.10
2	160.00	26.30 QP	43.50	-17.20	1.00 V	14	11.90	14.40
3	250.00	28.80 QP	46.00	-17.20	1.00 V	23	15.60	13.20
4	320.00	24.60 QP	46.00	-21.40	1.00 V	251	8.80	15.80
5	375.00	32.50 QP	46.00	-13.50	1.00 V	276	15.10	17.40
6	400.00	27.40 QP	46.00	-18.60	1.00 V	352	9.30	18.10
7	480.00	28.10 QP	46.00	-17.90	1.00 V	35	7.80	20.30
8	500.00	33.60 QP	46.00	-12.40	1.50 V	279	12.70	20.90
9	600.00	33.90 QP	46.00	-12.10	1.89 V	354	10.90	23.00
10	720.00	31.90 QP	46.00	-14.10	2.33 V	74	7.10	24.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



STANDARD SECTION 15.247

EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
MODE	Normal Mode	CHANNEL	9
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5360.00	43.80 PK	74.00	-30.20	1.15 H	309	6.80	37.00
2	*5745.00	98.60 PK			1.00 H	309	61.10	37.60
2	*5745.00	90.10 AV			1.00 H	309	52.60	37.60
3	#11490.00	58.90 PK	74.00	-15.10	1.43 H	316	7.50	51.30
3	#11490.00	47.80 AV	54.00	-6.20	1.43 H	316	-3.50	51.30
4	17235.00	59.80 PK	68.30	-8.50	1.00 H	118	8.10	51.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5360.00	62.90 PK	74.00	-11.10	1.10 V	1	25.90	37.00
1	#5360.00	51.90 AV	54.00	-2.10	1.10 V	1	14.90	37.00
2	*5745.00	114.80 PK			1.10 V	1	77.30	37.60
2	*5745.00	107.50 AV			1.10 V	1	69.90	37.60
3	#11490.00	59.40 PK	74.00	-14.60	1.00 V	310	8.00	51.30
3	#11490.00	47.90 AV	54.00	-6.10	1.00 V	310	-3.50	51.30
4	17235.00	59.20 PK	68.30	-9.10	1.13 V	319	7.50	51.70

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



STANDARD SECTION 15.247

EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
MODE	Normal Mode	CHANNEL	11
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5360.00	44.70 PK	74.00	-29.30	1.17 H	310	7.70	37.00
2	*5785.00	100.90 PK			1.00 H	309	63.30	37.60
2	*5785.00	92.50 AV			1.00 H	309	54.90	37.60
3	#11570.00	61.10 PK	74.00	-12.90	1.43 H	307	10.00	51.10
3	#11570.00	50.30 AV	54.00	-3.70	1.43 H	307	-0.80	51.10
4	17355.00	60.10 PK	68.30	-8.20	1.00 H	120	7.20	52.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5360.00	64.10 PK	74.00	-9.90	1.10 V	360	27.10	37.00
1	#5360.00	53.00 AV	54.00	-1.00	1.10 V	360	16.00	37.00
2	*5785.00	118.20 PK			1.04 V	1	80.60	37.60
2	*5785.00	109.30 AV			1.04 V	1	71.70	37.60
3	#11570.00	57.80 PK	74.00	-16.20	1.00 V	307	6.70	51.10
3	#11570.00	47.80 AV	54.00	-6.20	1.00 V	307	-3.40	51.10
4	17355.00	59.00 PK	68.30	-9.30	1.11 V	23	6.00	52.90

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



STANDARD SECTION 15.247

EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
MODE	Normal Mode	CHANNEL	13
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5360.00	44.00 PK	74.00	-30.00	1.18 H	306	6.90	37.00
2	*5825.00	99.60 PK			1.00 H	316	61.80	37.70
2	*5825.00	91.30 AV			1.00 H	316	53.50	37.70
3	#11650.00	58.60 PK	74.00	-15.40	1.42 H	311	7.80	50.80
3	#11650.00	47.50 AV	54.00	-6.50	1.42 H	311	-3.30	50.80
4	17475.00	61.60 PK	68.30	-6.70	1.00 H	333	7.40	54.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5360.00	64.20 PK	74.00	-9.80	1.10 V	1	27.20	37.00
1	#5360.00	52.70 AV	54.00	-1.30	1.10 V	1	15.70	37.00
2	*5825.00	117.60 PK			1.09 V	1	79.80	37.70
2	*5825.00	108.50 AV			1.09 V	1	70.80	37.70
3	#11650.00	58.60 PK	74.00	-15.40	1.00 V	319	7.80	50.80
3	#11650.00	47.60 AV	54.00	-6.40	1.00 V	319	-3.20	50.80
4	17475.00	61.50 PK	68.30	-6.80	1.10 V	26	7.40	54.20

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



STANDARD SECTION 15.247

EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
MODE	Turbo Mode	CHANNEL	4
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 63%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Tony Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5360.00	46.50 PK	74.00	-27.50	1.56 H	14	9.50	37.00
2	*5760.00	96.30 PK			1.22 H	301	58.70	37.60
2	*5760.00	88.20 AV			1.22 H	301	50.60	37.60
3	#11520.00	60.20 PK	74.00	-13.80	1.15 H	284	8.90	51.30
3	#11520.00	49.00 AV	54.00	-5.00	1.15 H	284	-2.30	51.30
4	17280.00	58.20 PK	68.30	-10.10	1.40 H	360	6.10	52.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5360.00	63.20 PK	74.00	-10.80	1.65 V	355	26.20	37.00
1	#5360.00	52.80 AV	54.00	-1.20	1.65 V	355	15.80	37.00
2	*5760.00	112.20 PK			2.00 V	355	74.70	37.60
2	*5760.00	103.60 AV			2.00 V	355	66.00	37.60
3	#11520.00	53.90 PK	74.00	-20.10	1.93 V	319	2.60	51.30
3	#11520.00	44.40 AV	54.00	-9.60	1.93 V	319	-6.90	51.30
4	17272.00	59.70 PK	68.30	-8.60	1.63 V	336	7.60	52.10

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



STANDARD SECTION 15.247

EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
MODE	Turbo Mode	CHANNEL	5
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 63%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Tony Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5356.00	49.40 PK	74.00	-24.60	1.83 H	41	12.30	37.00
2	*5800.00	95.10 PK			1.92 H	14	57.40	37.70
2	*5800.00	87.10 AV			1.92 H	14	49.40	37.70
3	#11600.00	58.90 PK	74.00	-15.10	1.24 H	50	7.90	51.00
3	#11600.00	47.60 AV	54.00	-6.40	1.24 H	50	-3.40	51.00
4	17400.00	60.90 PK	68.30	-7.40	1.14 H	57	7.60	53.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5351.00	62.40 PK	74.00	-11.60	1.62 V	3	25.40	37.00
1	#5351.00	51.90 AV	54.00	-2.10	1.62 V	3	14.90	37.00
2	*5800.00	113.70 PK			2.00 V	3	76.00	37.70
2	*5800.00	105.20 AV			2.00 V	3	67.50	37.70
3	#11600.00	58.00 PK	74.00	-16.00	1.46 V	62	7.00	51.00
3	#11600.00	47.20 AV	54.00	-6.80	1.46 V	62	-3.80	51.00
4	17400.00	61.20 PK	68.30	-7.10	1.07 V	29	7.80	53.40

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



5.2.9 TEST RESULTS (ANTENNA 2)

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
MODEL	AP5822E	DETECTOR FUNCTION	Quasi-Peak
FREQUENCY RANGE	30 - 1000MHz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	24 deg. C, 69%RH, 963 hPa	TESTED BY	Larry Peng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.01	28.10 QP	43.50	-15.40	1.70 H	294	16.00	12.10
2	200.00	20.90 QP	43.50	-22.60	1.91 H	264	9.60	11.20
3	250.02	27.70 QP	46.00	-18.30	1.72 H	300	14.50	13.20
4	320.00	29.20 QP	46.00	-16.80	1.15 H	5	13.40	15.80
5	375.02	23.90 QP	46.00	-22.10	1.54 H	281	6.60	17.40
6	440.00	25.90 QP	46.00	-20.10	1.82 H	15	6.80	19.10
7	499.99	34.20 QP	46.00	-11.80	1.73 H	258	13.30	20.90
8	600.00	38.50 QP	46.00	-7.50	1.67 H	291	15.50	23.00
9	640.01	31.40 QP	46.00	-14.60	1.24 H	338	7.70	23.80
10	720.00	32.80 QP	46.00	-13.20	1.10 H	270	7.90	24.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.67	28.50 QP	40.00	-11.50	1.00 V	316	16.60	11.90
2	125.01	34.00 QP	43.50	-9.50	1.00 V	169	21.80	12.10
3	200.00	24.10 QP	43.50	-19.40	1.00 V	295	12.90	11.20
4	250.02	28.60 QP	46.00	-17.40	1.00 V	219	15.40	13.20
5	320.00	25.40 QP	46.00	-20.60	1.00 V	312	9.60	15.80
6	374.99	31.60 QP	46.00	-14.40	1.00 V	216	14.20	17.40
7	399.99	27.50 QP	46.00	-18.50	1.00 V	12	9.40	18.10
8	500.00	33.60 QP	46.00	-12.40	1.29 V	228	12.60	20.90
9	600.00	37.90 QP	46.00	-8.10	1.63 V	10	14.90	23.00
10	719.99	33.50 QP	46.00	-12.50	1.94 V	258	8.60	24.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



STANDARD SECTION 15.407

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Normal Mode	CHANNEL	5
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	93.40 PK			1.07 H	352	56.40	37.00
1	*5260.00	85.40 AV			1.07 H	352	48.40	37.00
2	10520.00	52.90 PK	68.30	-15.40	1.52 H	108	7.70	45.20
3	#15780.00	53.80 PK	74.00	-20.20	1.35 H	57	6.00	47.90
3	#15780.00	42.60 AV	54.00	-11.40	1.35 H	57	-5.30	47.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	114.30 PK			1.43 V	354	77.30	37.00
1	*5260.00	105.90 AV			1.43 V	354	68.80	37.00
2	10520.00	53.60 PK	68.30	-14.70	1.13 V	133	8.50	45.20
3	#15780.00	54.60 PK	74.00	-19.40	1.21 V	136	6.70	47.90
3	#15780.00	42.80 AV	54.00	-11.20	1.21 V	136	-5.00	47.90

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



STANDARD SECTION 15.407

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Normal Mode	CHANNEL	8
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	92.50 PK			1.00 H	325	55.50	37.00
1	*5320.00	84.20 AV			1.00 H	325	47.20	37.00
2	#5350.00	40.10 PK	74.00	-33.90	1.01 H	326	3.00	37.00
3	#10640.00	55.00 PK	74.00	-19.00	1.24 H	277	8.70	46.30
3	#10640.00	43.80 AV	54.00	-10.20	1.24 H	277	-2.50	46.30
4	#15960.00	52.00 PK	74.00	-22.00	1.15 H	210	4.70	47.30
4	#15960.00	41.90 AV	54.00	-12.10	1.15 H	210	-5.40	47.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.80 PK			1.44 V	355	75.80	37.00
1	*5320.00	104.80 AV			1.44 V	355	67.80	37.00
2	#5350.00	60.30 PK	74.00	-13.70	1.45 V	356	23.30	37.00
2	#5350.00	52.30 AV	54.00	-1.70	1.45 V	356	15.30	37.00
3	#10640.00	55.10 PK	74.00	-18.90	1.34 V	23	8.80	46.30
3	#10640.00	43.90 AV	54.00	-10.10	1.34 V	23	-2.40	46.30
4	#15960.00	53.20 PK	74.00	-20.80	1.18 V	139	5.90	47.30
4	#15960.00	41.70 AV	54.00	-12.30	1.18 V	139	-5.60	47.30

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



STANDARD SECTION 15.407

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Turbo Mode	CHANNEL	3
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	90.90 PK			1.56 H	306	53.90	37.00
1	*5290.00	82.60 AV			1.56 H	306	45.50	37.00
2	#5350.00	39.80 PK	74.00	-34.20	1.57 H	307	2.80	37.00
3	10580.00	53.40 PK	68.30	-14.90	1.53 H	282	7.60	45.70
4	#15870.00	52.90 PK	74.00	-21.10	1.43 H	255	5.40	47.60
4	#15870.00	42.50 AV	54.00	-11.50	1.43 H	255	-5.10	47.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	111.70 PK			1.44 V	357	74.70	37.00
1	*5290.00	103.60 AV			1.44 V	357	66.60	37.00
2	#5350.00	60.60 PK	74.00	-13.40	1.45 V	358	23.60	37.00
2	#5350.00	52.50 AV	54.00	-1.50	1.45 V	358	15.50	37.00
3	10580.00	53.10 PK	68.30	-15.20	1.34 V	349	7.40	45.70
4	#15870.00	53.10 PK	74.00	-20.90	1.38 V	336	5.50	47.60
4	#15870.00	42.60 AV	54.00	-11.40	1.38 V	336	-5.00	47.60

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



5.2.10 TEST RESULTS (ANTENNA 3)

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna		
MODEL	AP5822E	DETECTOR FUNCTION	Quasi-Peak
FREQUENCY RANGE	30 - 1000MHz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	24 deg. C, 69%RH, 963 hPa	TESTED BY	Larry Peng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.02	29.40 QP	43.50	-14.10	2.23 H	289	17.20	12.20
2	200.00	22.30 QP	43.50	-21.20	2.76 H	23	11.00	11.20
3	250.03	25.10 QP	46.00	-20.90	1.90 H	202	11.90	13.20
4	360.00	26.40 QP	46.00	-19.60	2.83 H	17	9.50	16.90
5	400.00	28.80 QP	46.00	-17.20	2.29 H	7	10.60	18.10
6	440.00	28.70 QP	46.00	-17.30	1.06 H	244	9.60	19.10
7	480.00	30.30 QP	46.00	-15.70	1.72 H	325	10.00	20.30
8	500.03	33.20 QP	46.00	-12.80	1.74 H	278	12.30	21.00
9	600.00	35.40 QP	46.00	-10.60	1.31 H	314	12.40	23.00
10	720.00	33.80 QP	46.00	-12.20	1.01 H	6	9.00	24.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	56.40	30.40 QP	40.00	-9.60	1.00 V	35	18.50	11.90
2	68.20	30.50 QP	40.00	-9.50	1.00 V	102	19.00	11.50
3	124.99	35.30 QP	43.50	-8.20	1.00 V	135	23.10	12.10
4	160.03	26.70 QP	43.50	-16.80	1.00 V	225	12.30	14.40
5	200.00	25.10 QP	43.50	-18.40	1.00 V	23	13.80	11.20
6	249.99	29.20 QP	46.00	-16.80	1.00 V	333	16.00	13.20
7	320.00	25.50 QP	46.00	-20.50	1.00 V	285	9.70	15.80
8	360.02	24.20 QP	46.00	-21.80	1.00 V	232	7.30	16.90
9	480.02	28.80 QP	46.00	-17.20	1.00 V	208	8.50	20.30
10	600.02	34.80 QP	46.00	-11.20	1.53 V	279	11.80	23.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



STANDARD SECTION 15.247

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Normal Mode	CHANNEL	9
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5456.00	49.70 PK	74.00	-24.30	1.07 H	3	12.70	37.00
2	*5745.00	105.50 PK			1.59 H	66	67.90	37.60
2	*5745.00	96.70 AV			1.59 H	66	59.20	37.60
3	#11490.00	58.40 PK	74.00	-15.60	1.44 H	283	7.10	51.30
3	#11490.00	47.40 AV	54.00	-6.60	1.44 H	283	-3.90	51.30
4	17235.00	59.20 PK	68.30	-9.10	1.19 H	1	7.50	51.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5456.00	64.40 PK	74.00	-9.60	1.06 V	2	27.40	37.00
1	#5456.00	53.20 AV	54.00	-0.80	1.06 V	2	16.20	37.00
2	*5745.00	121.80 PK			1.11 V	3	84.20	37.60
2	5745.00	113.60 AV			1.11 V	3	76.10	37.60
3	#11490.00	60.10 PK	74.00	-13.90	1.24 V	305	8.70	51.30
3	#11490.00	48.50 AV	54.00	-5.50	1.24 V	305	-2.80	51.30
4	17235.00	59.30 PK	68.30	-9.00	1.23 V	346	7.60	51.70

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



STANDARD SECTION 15.247

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Normal Mode	CHANNEL	11
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5457.00	49.30 PK	74.00	-24.70	1.10 H	351	12.30	37.00
2	*5785.00	104.70 PK			1.60 H	67	67.10	37.60
2	*5785.00	96.00 AV			1.60 H	67	58.40	37.60
3	#11570.00	58.50 PK	74.00	-15.50	1.28 H	6	7.30	51.10
3	#11570.00	47.40 AV	54.00	-6.60	1.28 H	6	-3.70	51.10
4	17355.00	61.60 PK	68.30	-6.70	1.18 H	330	8.70	52.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5457.00	63.90 PK	74.00	-10.10	1.16 V	1	26.90	37.00
1	#5457.00	53.30 AV	54.00	-0.70	1.16 V	1	16.20	37.00
2	*5785.00	121.40 PK			1.11 V	4	83.80	37.60
2	*5785.00	112.90 AV			1.11 V	4	75.30	37.60
3	#11570.00	59.60 PK	74.00	-14.40	1.41 V	314	8.50	51.10
3	#11570.00	48.50 AV	54.00	-5.50	1.41 V	314	-2.70	51.10
4	17355.00	61.30 PK	68.30	-7.00	1.13 V	6	8.40	52.90

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



STANDARD SECTION 15.247

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Normal Mode	CHANNEL	13
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5457.00	50.10 PK	74.00	-23.90	1.31 H	20	13.00	37.00
2	*5825.00	101.90 PK			1.61 H	69	64.10	37.70
2	*5825.00	93.20 AV			1.61 H	69	55.50	37.70
3	#11650.00	58.80 PK	74.00	-15.20	1.19 H	41	8.00	50.80
3	#11650.00	47.80 AV	54.00	-6.20	1.19 H	41	-3.00	50.80
4	17475.00	62.40 PK	68.30	-5.90	1.26 H	60	8.20	54.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5457.00	63.80 PK	74.00	-10.20	1.08 V	4	26.80	37.00
1	#5457.00	53.10 AV	54.00	-0.90	1.08 V	4	16.00	37.00
2	*5825.00	119.60 PK			1.13 V	3	81.90	37.70
2	*5825.00	110.90 AV			1.13 V	3	73.20	37.70
3	#11650.00	59.90 PK	74.00	-14.10	1.15 V	7	9.10	50.80
3	#11650.00	48.70 AV	54.00	-5.30	1.15 V	7	-2.20	50.80
4	17475.00	63.10 PK	68.30	-5.20	1.33 V	35	8.90	54.20

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



STANDARD SECTION 15.247

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Turbo Mode	CHANNEL	4
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5452.00	49.80 PK	74.00	-24.20	1.15 H	32	12.80	37.00
2	*5760.00	100.10 PK			1.42 H	73	62.50	37.60
2	*5760.00	91.80 AV			1.42 H	73	54.20	37.60
3	#11520.00	57.80 PK	74.00	-16.20	1.49 H	52	6.50	51.30
3	#11520.00	48.20 AV	54.00	-5.80	1.49 H	52	-3.10	51.30
4	17280.00	61.00 PK	68.30	-7.30	1.10 H	62	8.80	52.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5452.00	63.60 PK	74.00	-10.40	1.20 V	2	26.60	37.00
1	#5452.00	53.20 AV	54.00	-0.80	1.20 V	2	16.20	37.00
2	*5760.00	119.20 PK			1.14 V	3	81.60	37.60
2	*5760.00	110.60 AV			1.14 V	3	73.00	37.60
3	#11520.00	58.20 PK	74.00	-15.80	1.32 V	58	6.90	51.30
3	#11520.00	47.00 AV	54.00	-7.00	1.32 V	58	-4.30	51.30
4	17280.00	59.40 PK	68.30	-8.90	1.21 V	34	7.20	52.20

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



STANDARD SECTION 15.247

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Turbo Mode	CHANNEL	5
FREQUENCY RANGE	1000MHz~40000MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 963 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5450.00	50.40 PK	74.00	-23.60	1.65 H	37	13.40	37.00
2	*5800.00	97.90 PK			1.47 H	20	60.20	37.70
2	*5800.00	89.50 AV			1.47 H	20	51.80	37.70
3	#11600.00	60.20 PK	74.00	-13.80	1.55 H	215	9.20	51.00
3	#11600.00	47.70 AV	54.00	-6.30	1.55 H	215	-3.30	51.00
4	17400.00	61.50 PK	68.30	-6.80	1.28 H	31	8.10	53.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5450.00	65.60 PK	74.00	-8.40	1.21 V	2	28.50	37.00
1	#5450.00	53.50 AV	54.00	-0.50	1.21 V	2	16.50	37.00
2	*5800.00	116.60 PK			1.13 V	2	78.90	37.70
2	*5800.00	108.10 AV			1.13 V	2	70.40	37.70
3	#11600.00	59.80 PK	74.00	-14.20	1.12 V	318	8.80	51.00
3	#11600.00	48.00 AV	54.00	-6.00	1.12 V	318	-3.00	51.00
4	17400.00	61.10 PK	68.30	-7.20	1.06 V	239	7.80	53.40

NOTE:

1. Emission level = Raw value + Correction Factor
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



FOR FREQUENCY 5.15~5.35GHZ

5.3 PEAK TRANSMIT POWER MEASUREMENT

5.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35 GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB

Note:

1. Where B is the 26dB emission bandwidth in MHz.
2. Limit follows whichever is lower.
3. 5.15-5.25GHz: In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
4. 5.25-5.35GHz: In addition, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP30	100019	Dec. 19, 2004

NOTE:


The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



5.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

5.3.4 TEST SETUP



5.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



5.3.6 TEST RESULTS (ANTENNA 2)


EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Normal	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa	TESTED BY	Wen Yu

ANTENNA 2 (Gain 8 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
5	5260	18.72	22.00	25.9	PASS
8	5320	17.23	22.00	26.2	PASS




CHANNEL 5

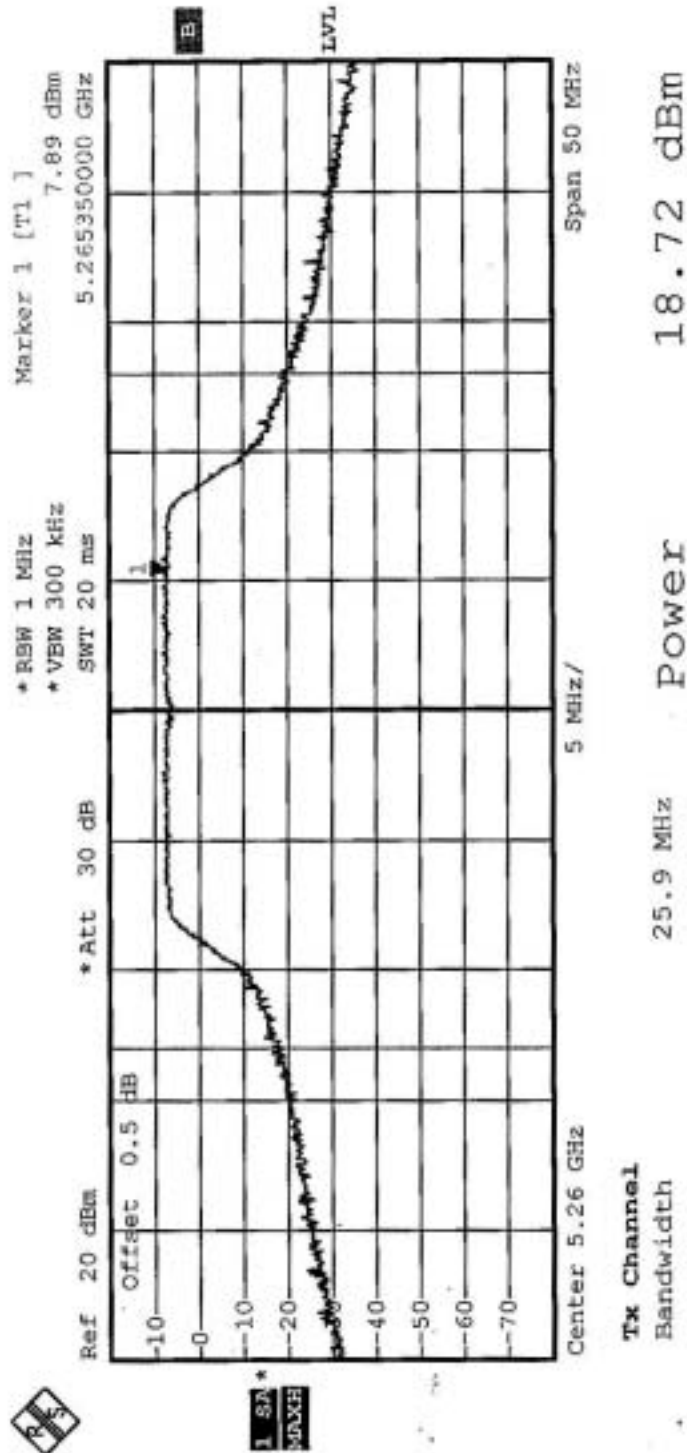




CHANNEL 8

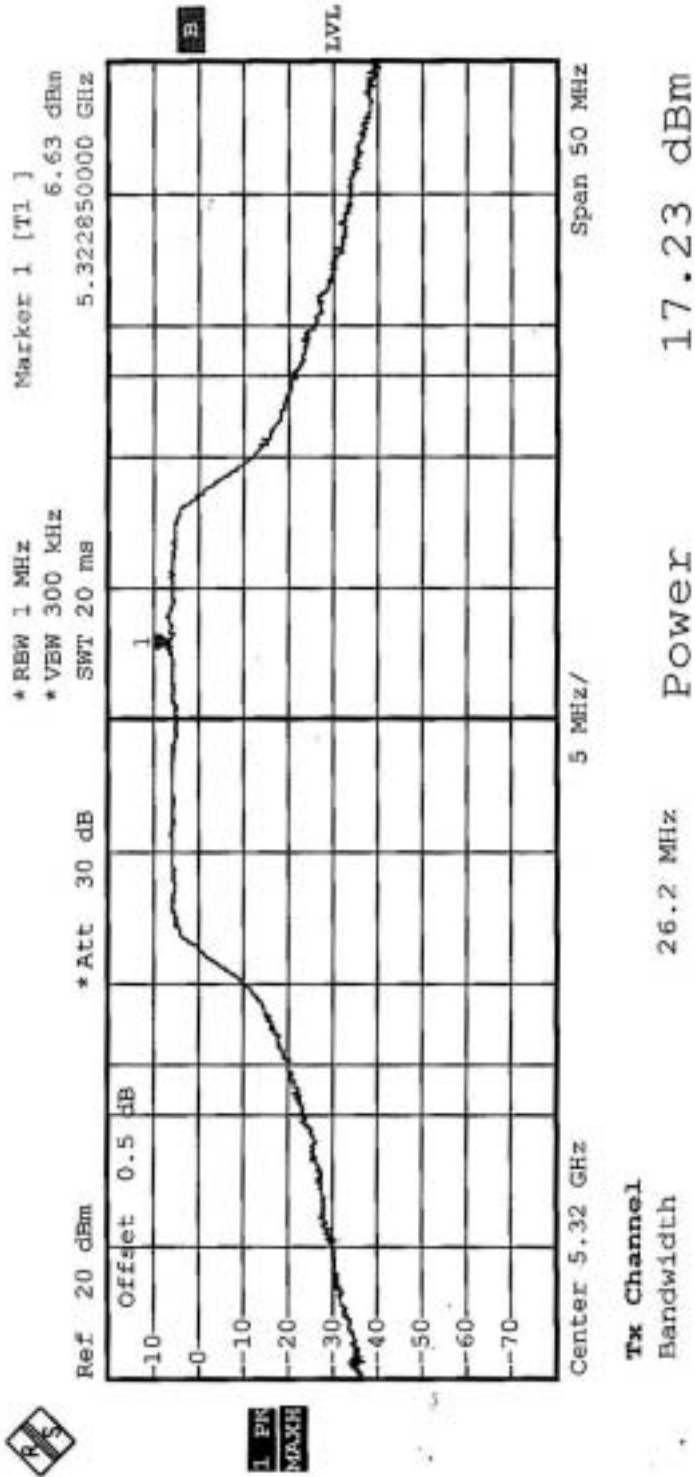




CHANNEL 5

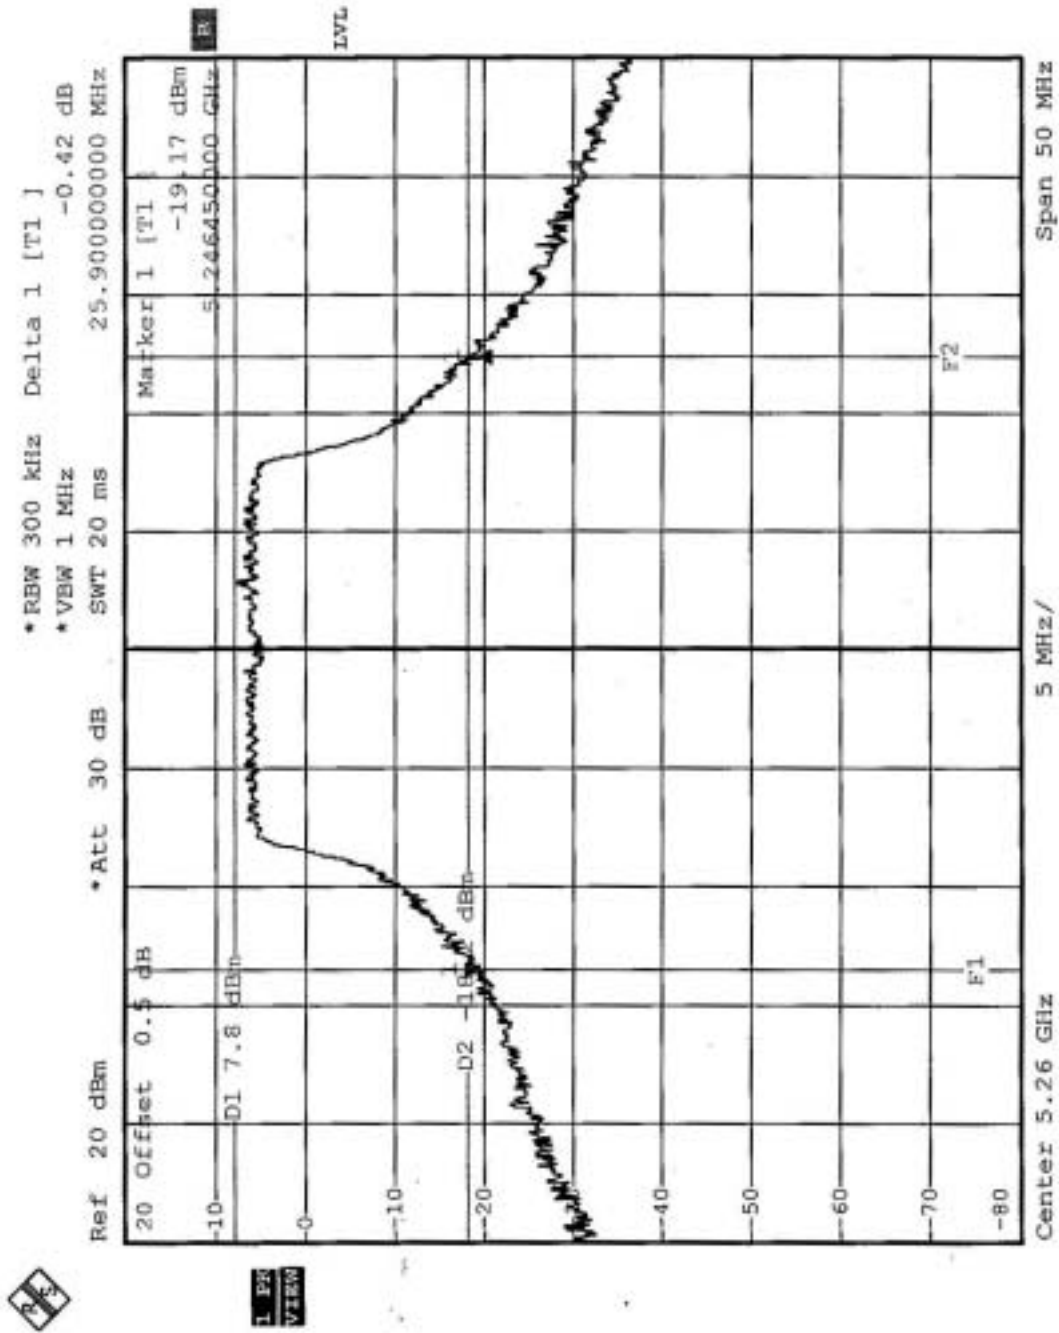



CHANNEL 8

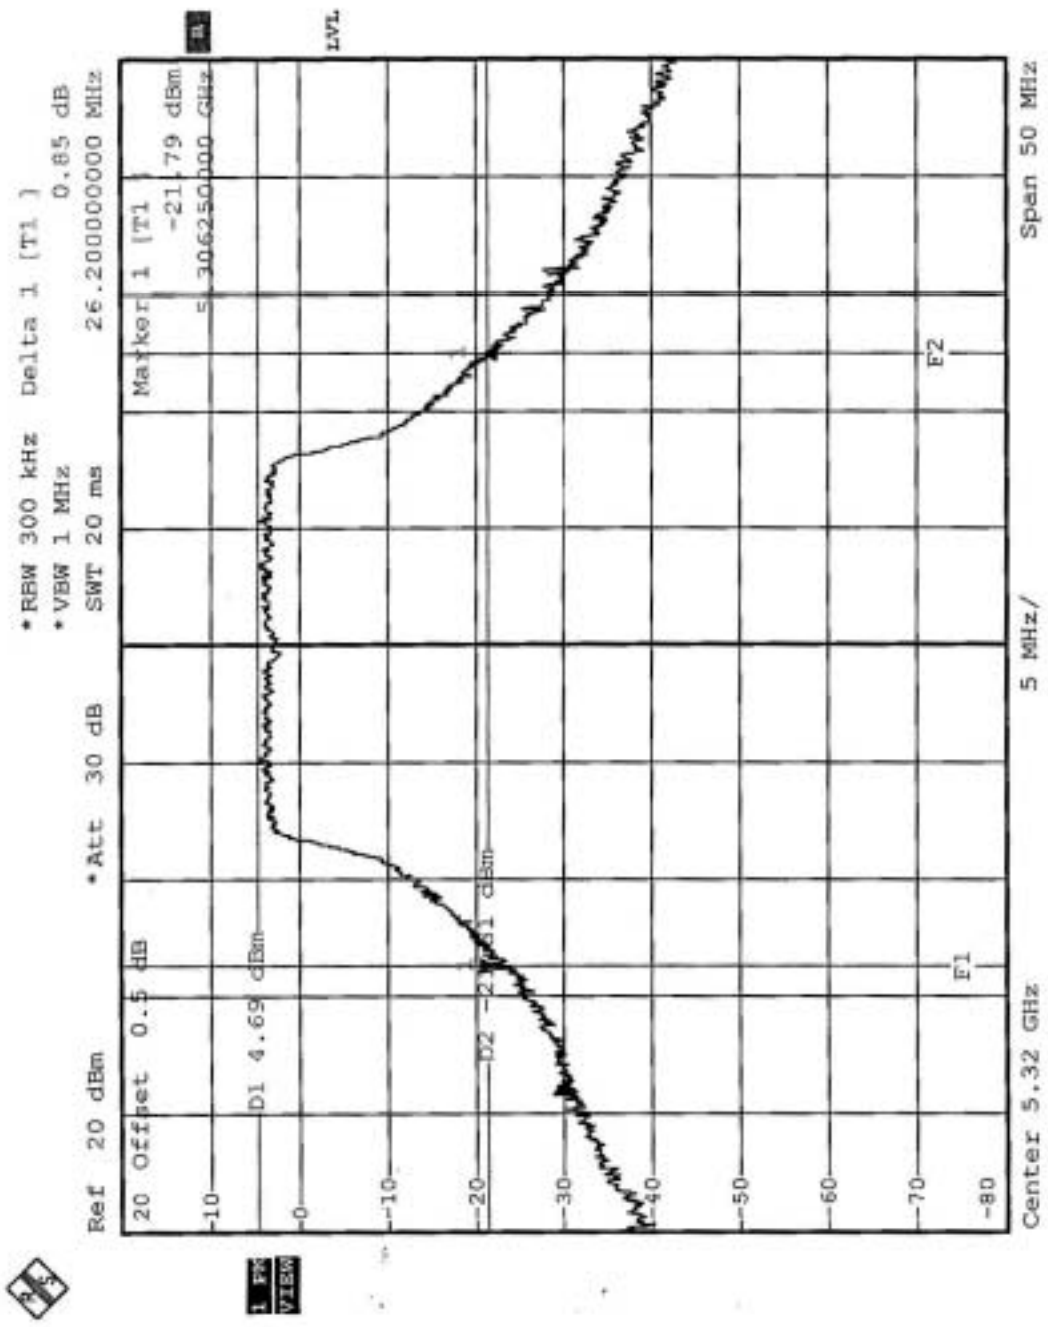




EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Turbo	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa	TESTED BY	Wen Yu

ANTENNA 2 (Gain 8 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
3	5290	18.51	22.00	50.56	PASS




CHANNEL 3

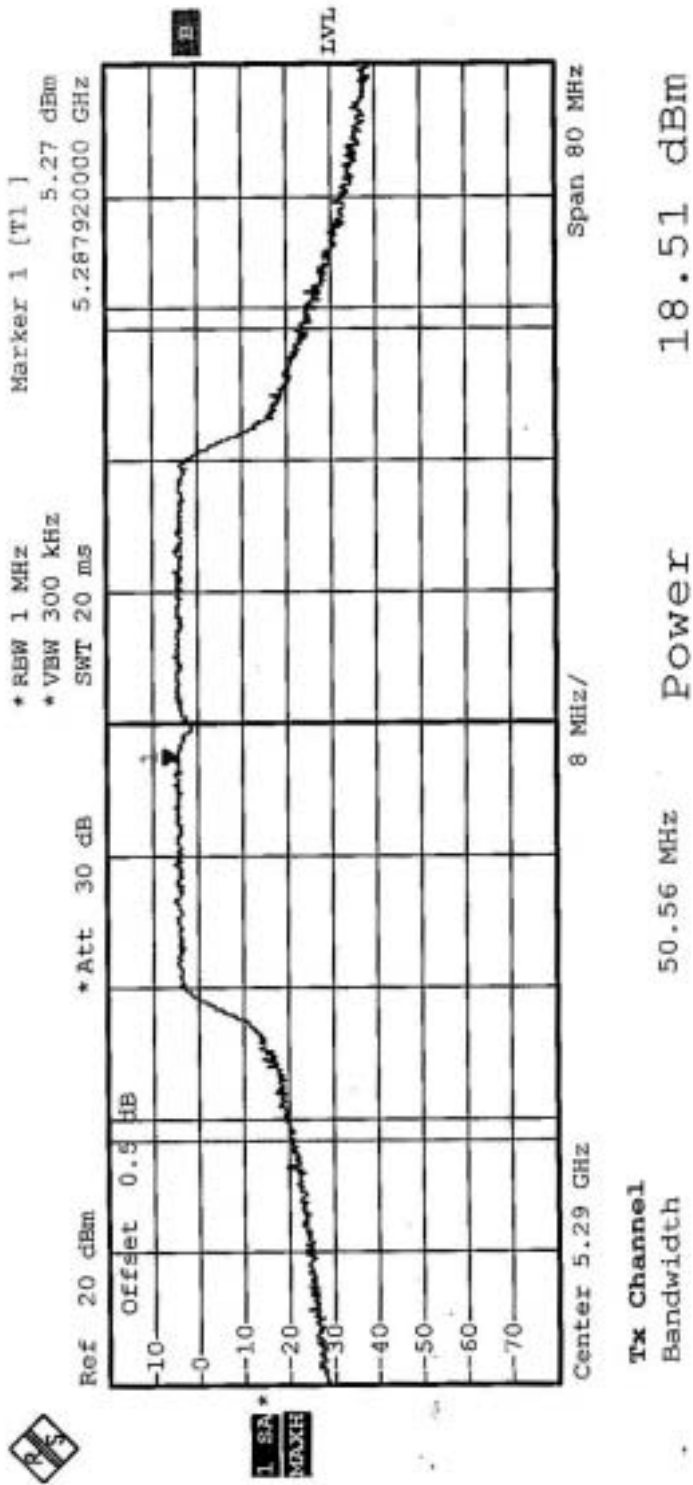



CHANNEL 3

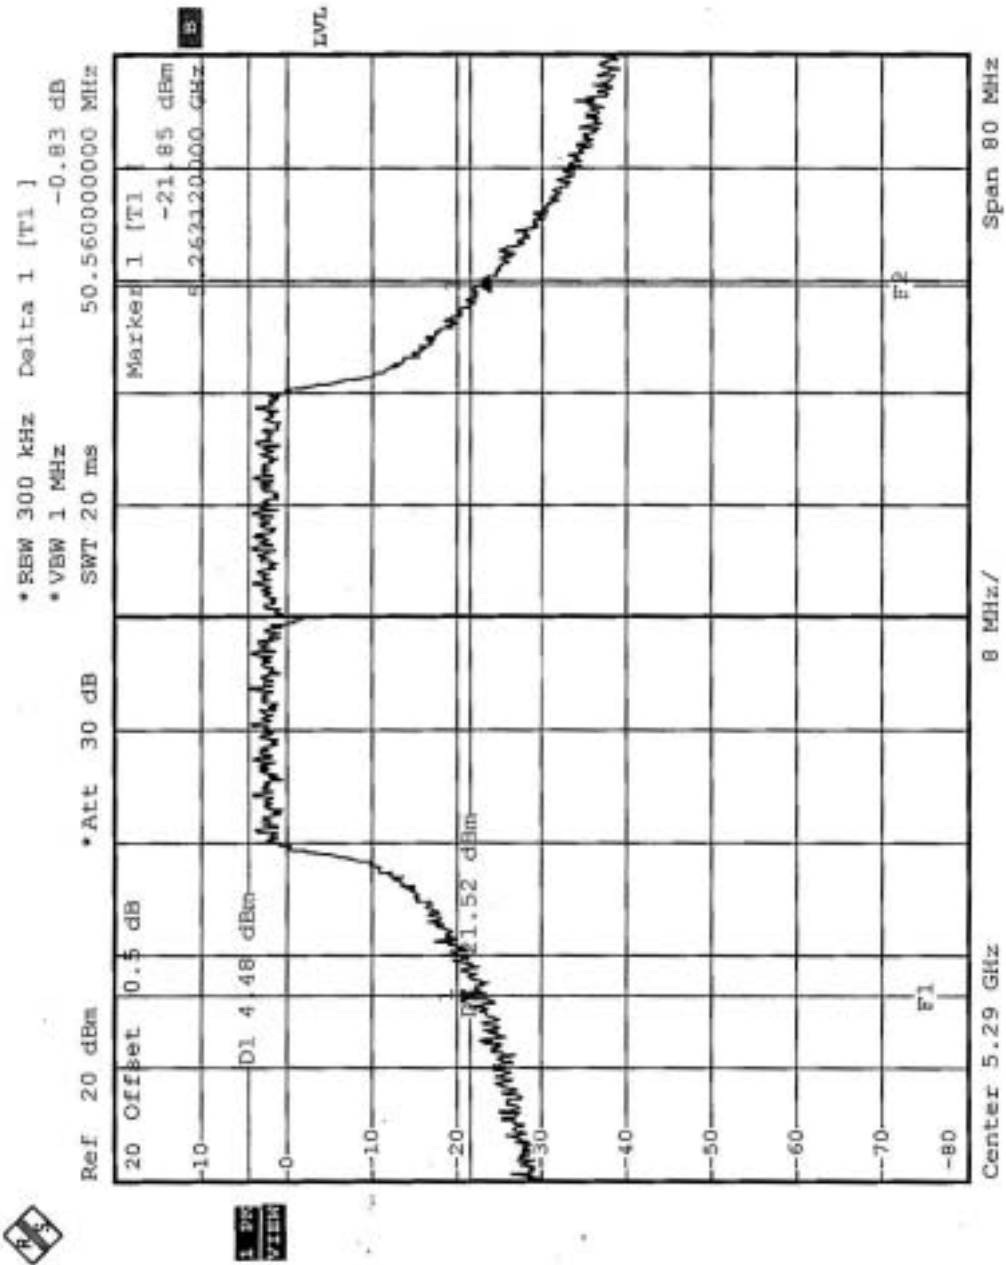



5.4 PEAK POWER EXCURSION MEASUREMENT

5.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.725 – 5.825 GHz	13dB

5.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP30	100019	Dec. 19, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




5.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.




5.4.7 TEST RESULTS (ANTENNA 2)

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Normal	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
5	5260	6.97	13	PASS
8	5320	8.02	13	PASS




CHANNEL 5

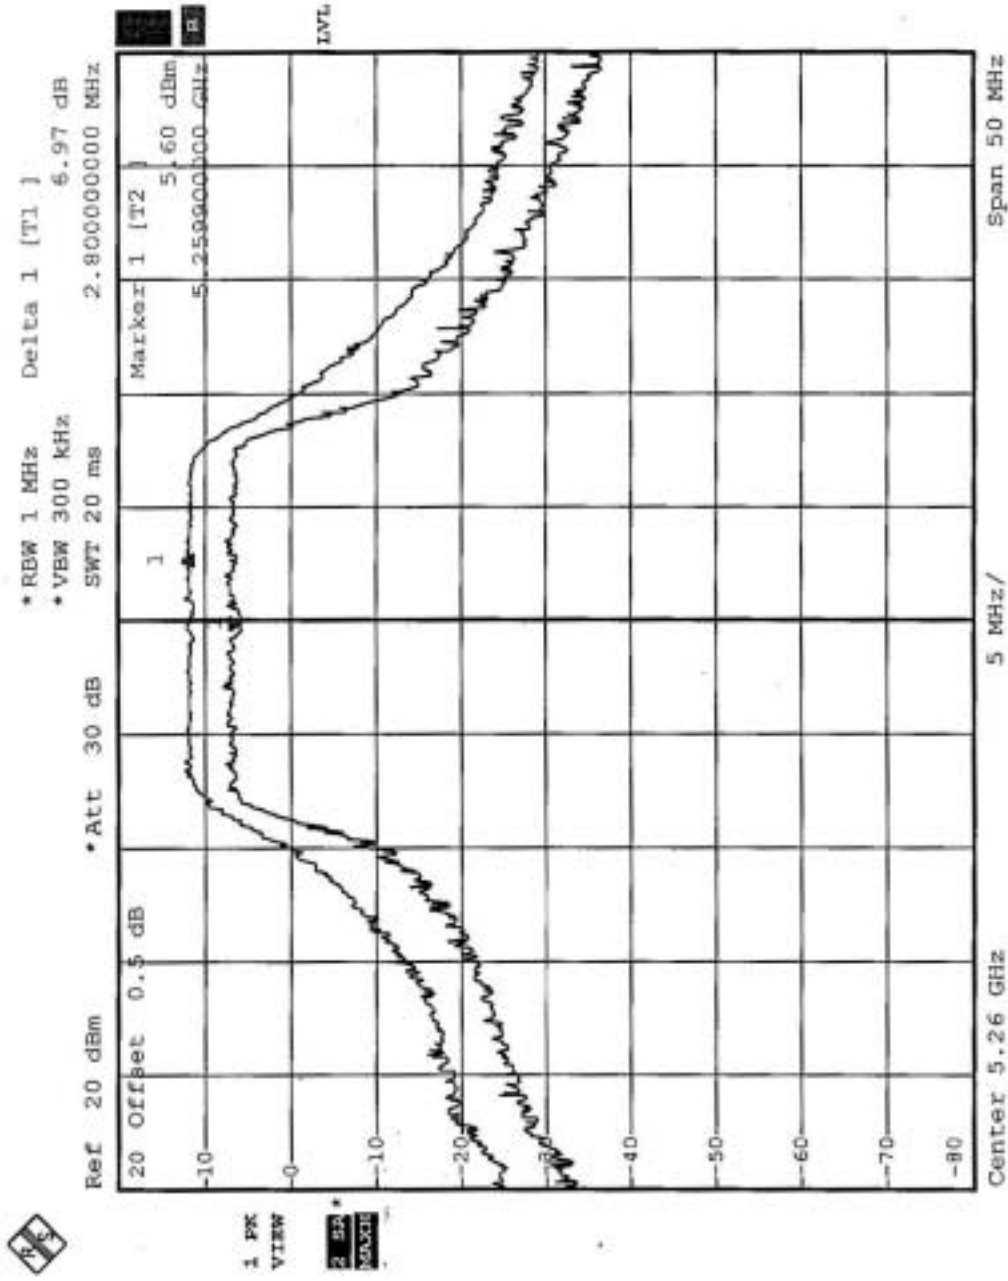



CHANNEL 8

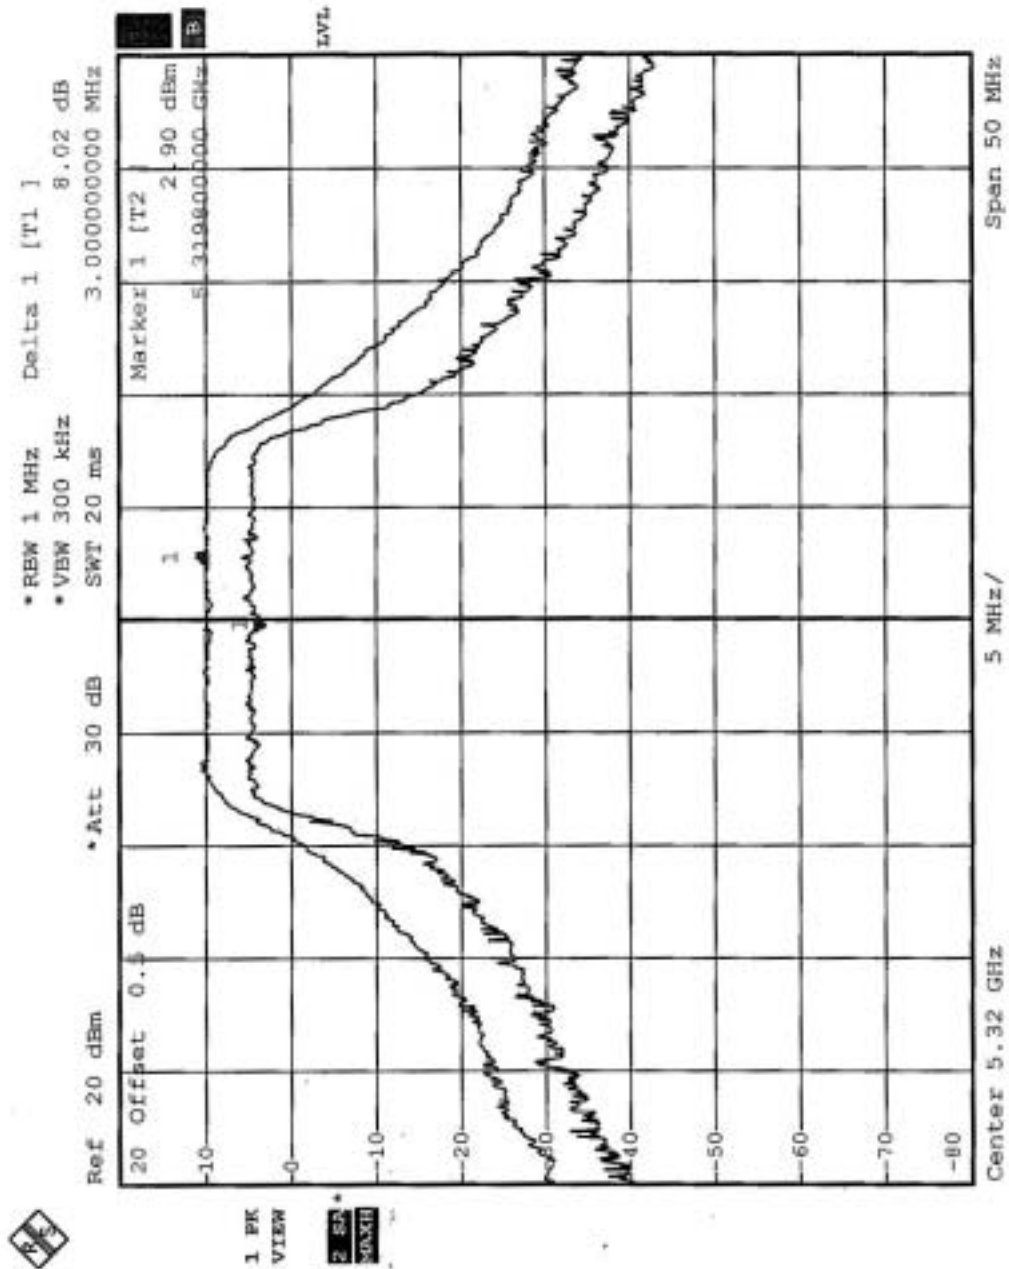




EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Turbo	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
3	5290	8.60	13	PASS



CHANNEL 3

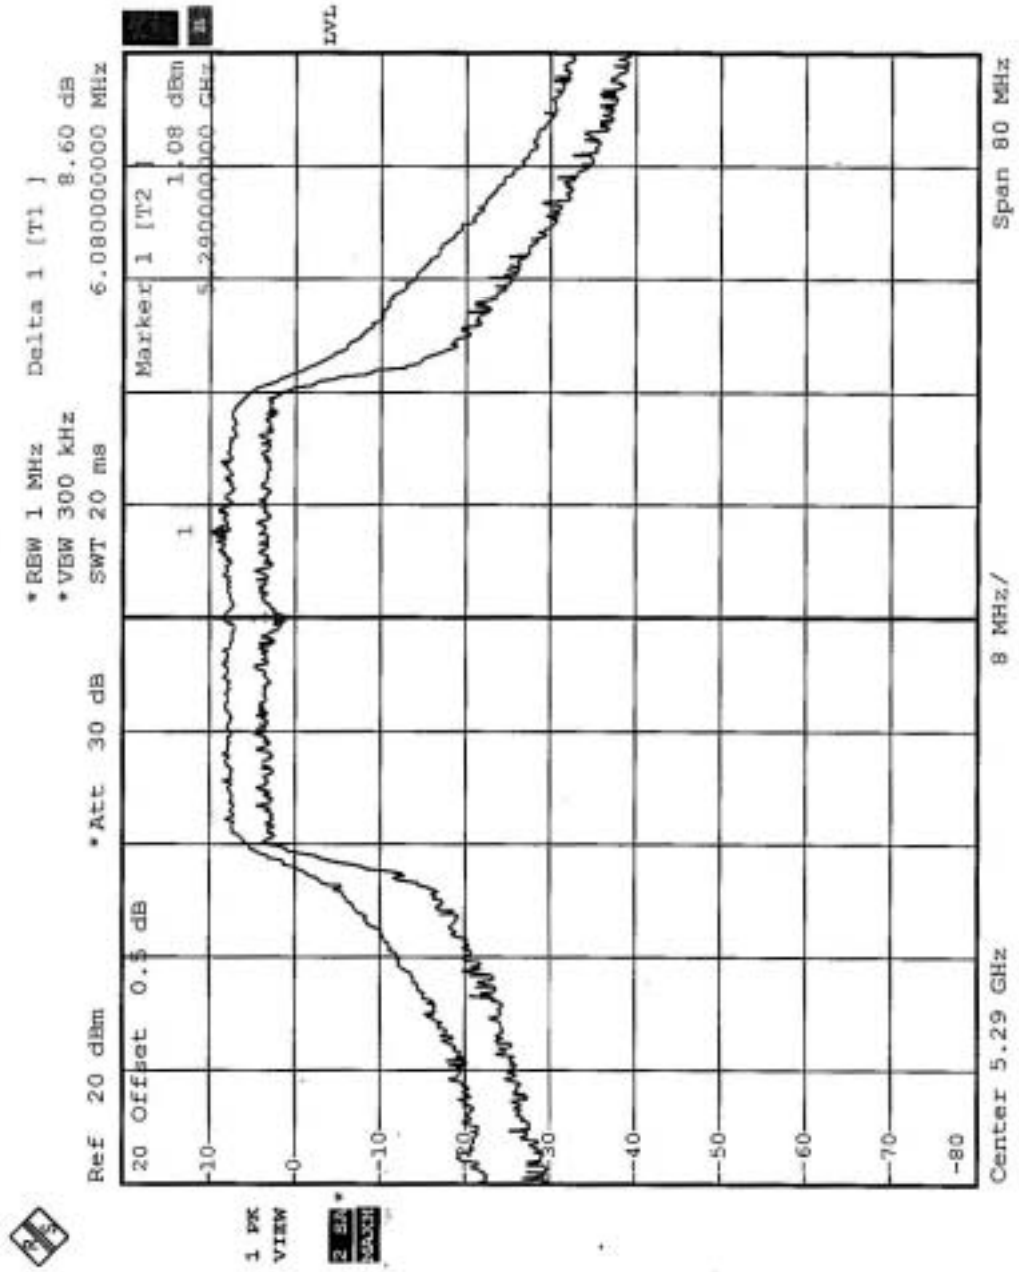



5.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	4dBm
5.25 – 5.35 GHz	11dBm
5.725 – 5.825 GHz	17dBm

5.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP30	100019	Dec. 19, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



5.5.3 TEST PROCEDURES

The transmitter output was connected to the spectrum analyzer.
Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITIONS

Same as 5.3.6




5.5.7 TEST RESULTS (ANTENNA 2)

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Normal	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa	TESTED BY	Wen Yu

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1 MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
5	5260	1.64	11	PASS
8	5320	-0.61	11	PASS




CHANNEL 5

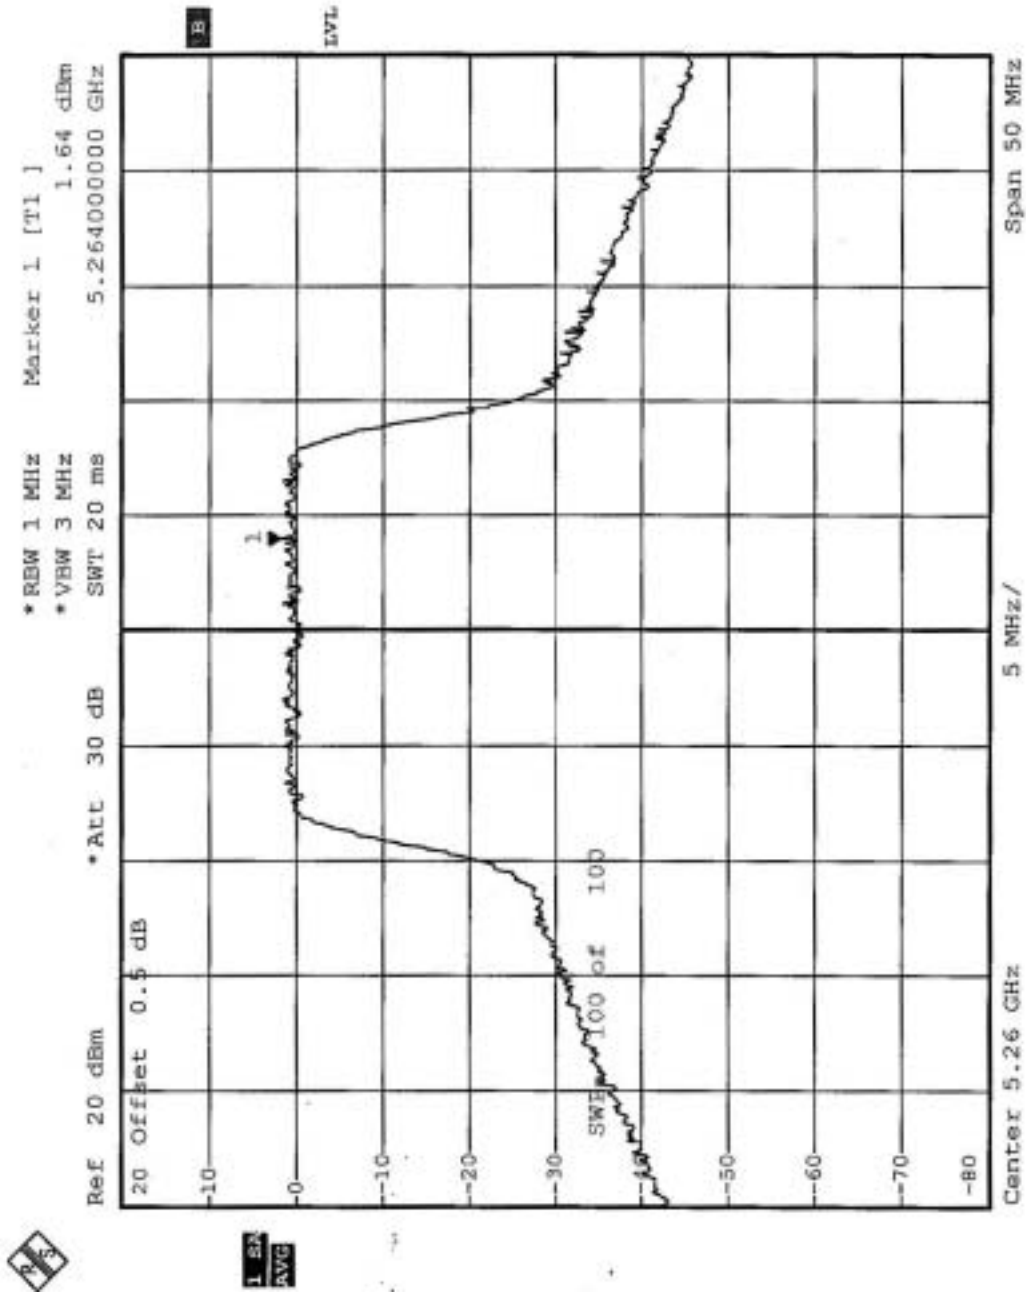



CHANNEL 8

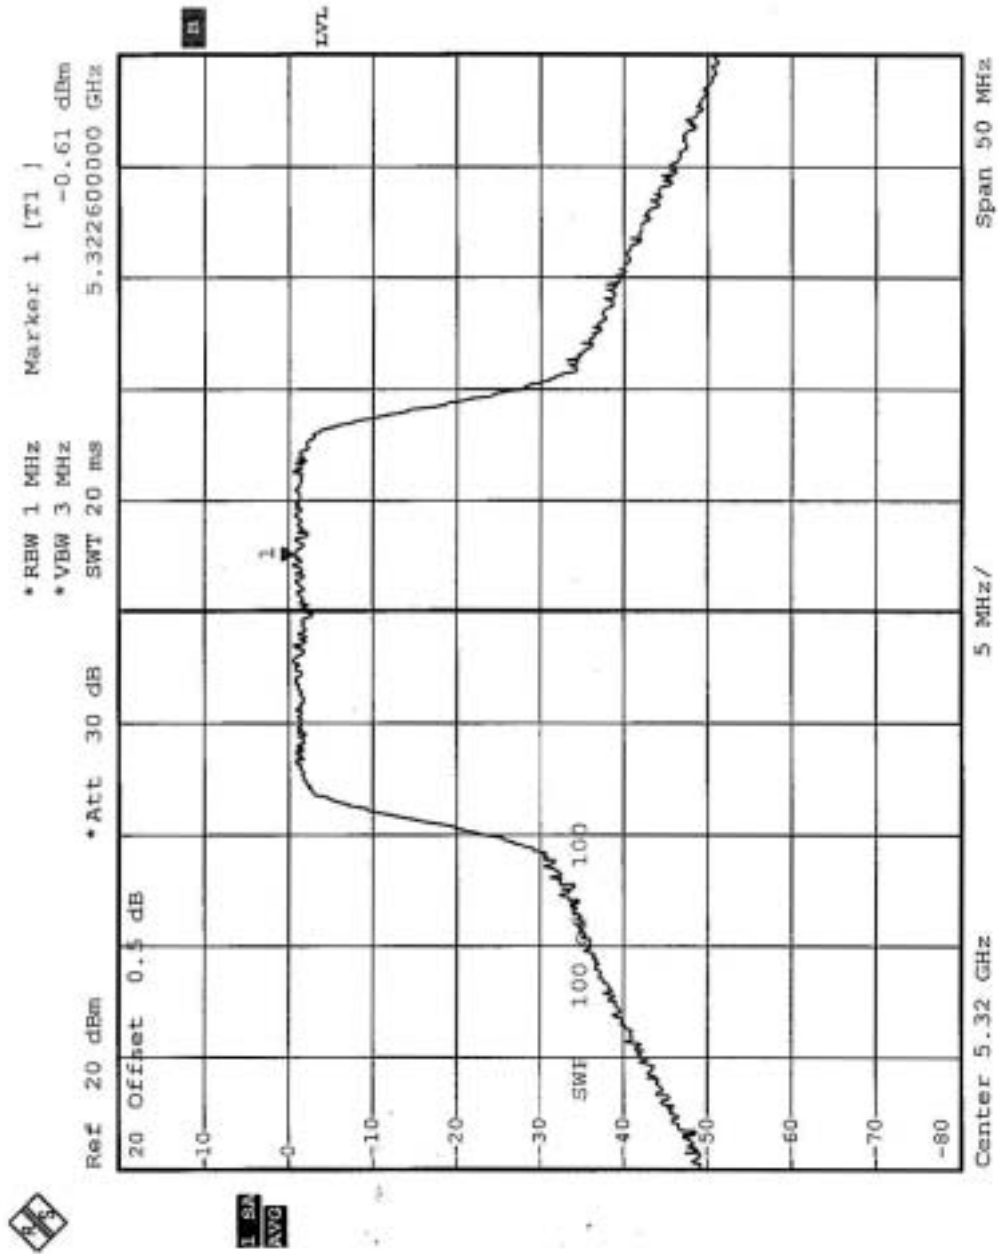




EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
MODE	Turbo	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa	TESTED BY	Wen Yu

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1 MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
3	5290	-2.75	11	PASS



CHANNEL 3

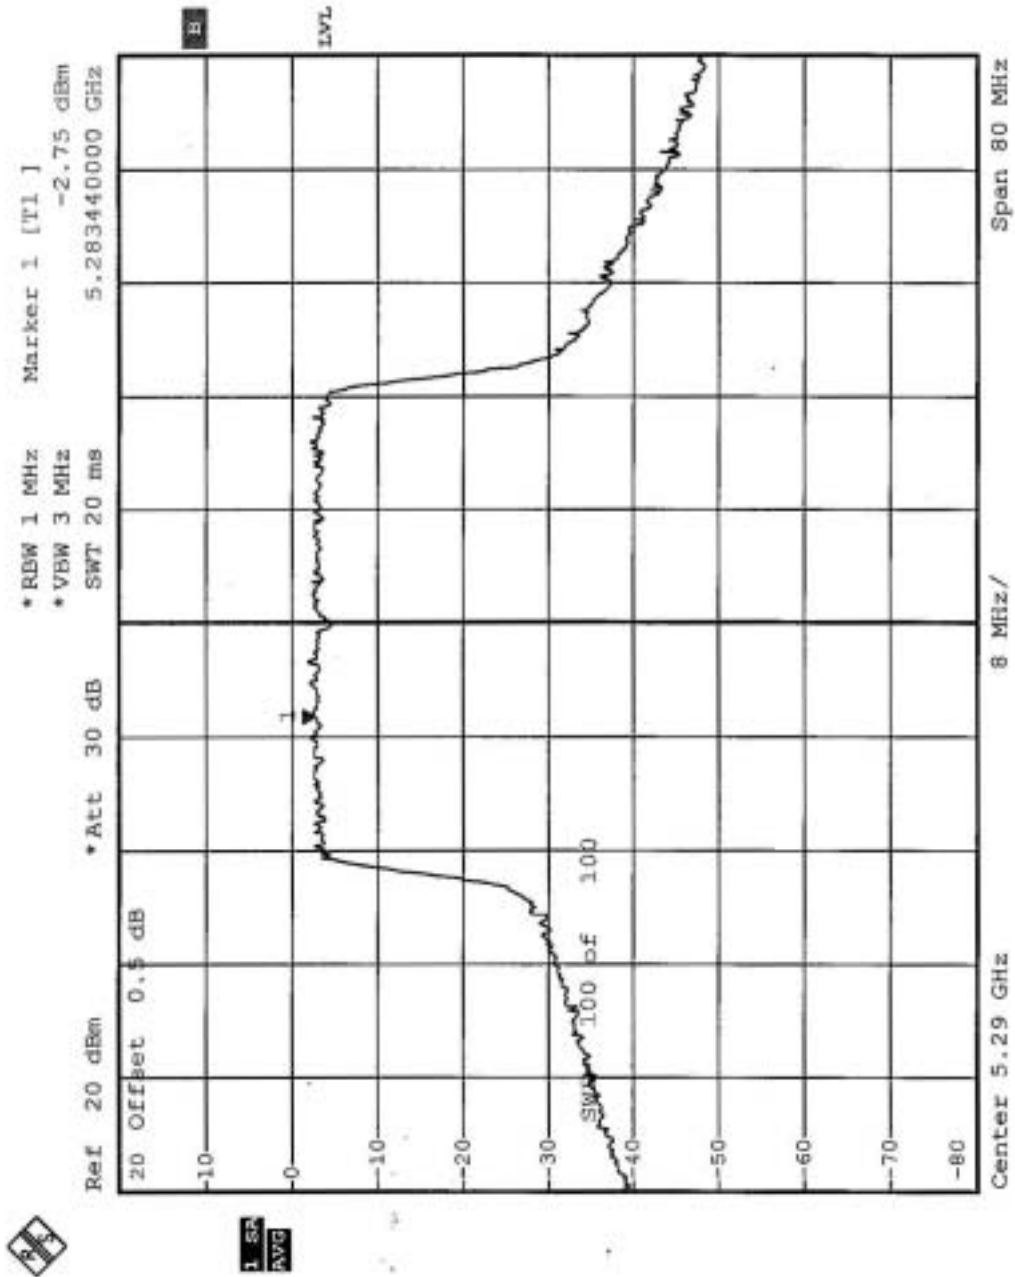



5.6 FREQUENCY STABILITY

5.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

5.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP30	100019	Dec. 19, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 TEST SETUP

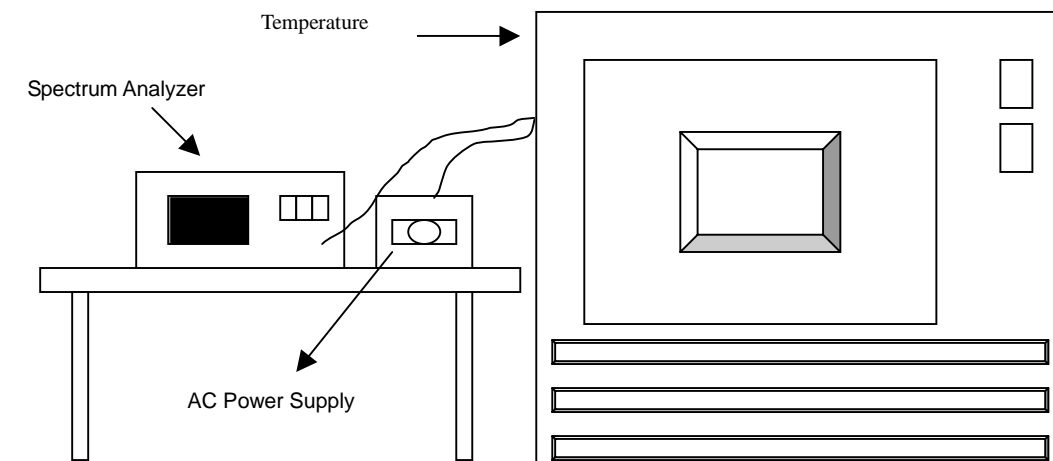

5.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6



5.6.7 TEST RESULTS

		Operating frequency: 5320MHz				Limit : ± 0.02%	
Temp. ()	Power supply (VAC)	2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	126.5	5319.956	-0.000827%	5319.956	-0.000827%	5319.9570	-0.000808%
	110	5319.9574	-0.000801%	5319.9552	-0.000842%	5319.9571	-0.000806%
	93.5	5319.9583	-0.000784%	5319.9551	-0.000844%	5319.9578	-0.000793%
40	126.5	5319.9527	-0.000889%	5319.9543	-0.000859%	5319.9530	-0.000883%
	110	5319.9534	-0.000876%	5319.9545	-0.000855%	5319.9547	-0.000852%
	93.5	5319.9522	-0.000898%	5319.9541	-0.000863%	5319.9540	-0.000865%
30	126.5	5319.959	-0.000771%	5319.9593	-0.000765%	5319.9573	-0.000803%
	110	5319.9588	-0.000774%	5319.9587	-0.000776%	5319.9586	-0.000778%
	93.5	5319.9586	-0.000778%	5319.9585	-0.000780%	5319.9584	-0.000782%
20	126.5	5319.981	-0.000357%	5319.98	-0.000376%	5319.9790	-0.000395%
	110	5319.9892	-0.000203%	5319.9891	-0.000205%	5319.9790	-0.000395%
	93.5	5319.9891	-0.000205%	5319.989	-0.000207%	5319.9789	-0.000397%
10	126.5	5319.9657	-0.000645%	5319.9647	-0.000664%	5319.9660	-0.000639%
	110	5319.9667	-0.000626%	5319.9657	-0.000645%	5319.9640	-0.000677%
	93.5	5319.9653	-0.000652%	5319.9662	-0.000635%	5319.9650	-0.000658%
0	126.5	5319.971	-0.000545%	5319.9710	-0.000545%	5319.9707	-0.000551%
	110	5319.972	-0.000526%	5319.9720	-0.000526%	5319.9717	-0.000532%
	93.5	5319.9715	-0.000536%	5319.9710	-0.000545%	5319.9717	-0.000532%
-10	126.5	5319.975	-0.000470%	5319.9750	-0.000470%	5320.0028	0.000053%
	110	5319.979	-0.000395%	5319.9760	-0.000451%	5320.0025	0.000047%
	93.5	5319.978	-0.000414%	5319.9755	-0.000461%	5320.0022	0.000041%
-20	126.5	5319.9777	-0.000419%	5319.9760	-0.000451%	5319.9747	-0.000476%
	110	5319.9780	-0.000414%	5319.9766	-0.000440%	5319.9744	-0.000481%
	93.5	5319.9775	-0.000423%	5319.9762	-0.000447%	5319.9738	-0.000492%
-30	126.5	5319.9743	-0.000483%	5319.9743	-0.000483%	5319.9740	-0.000489%
	110	5319.9753	-0.000464%	5319.9742	-0.000485%	5319.9746	-0.000477%
	93.5	5319.9755	-0.000461%	5319.9739	-0.000491%	5319.9754	-0.000462%



5.7 BAND EDGES MEASUREMENT

5.7.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2004

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW of spectrum analyzer to 1MHz and VBW of spectrum analyzer to 300Hz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

5.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



5.7.4 TEST RESULTS (Antenna 2)


For signals in the restricted bands above and below the 5.15 to 5.35 GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Average RBW=1MHz, VBW=300Hz) are attached on the following 2 pages.



Normal Mode: Channel 8 (5320 MHz)


The band edge emission plot on the following page shows 52.99dBc (Average) between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 8 (normal mode) is 104.8dBuV/m, so the maximum field strength in restrict band is $104.8 - 52.99 = 51.81$ dBuV/m which is under 54 dBuV/m limit.

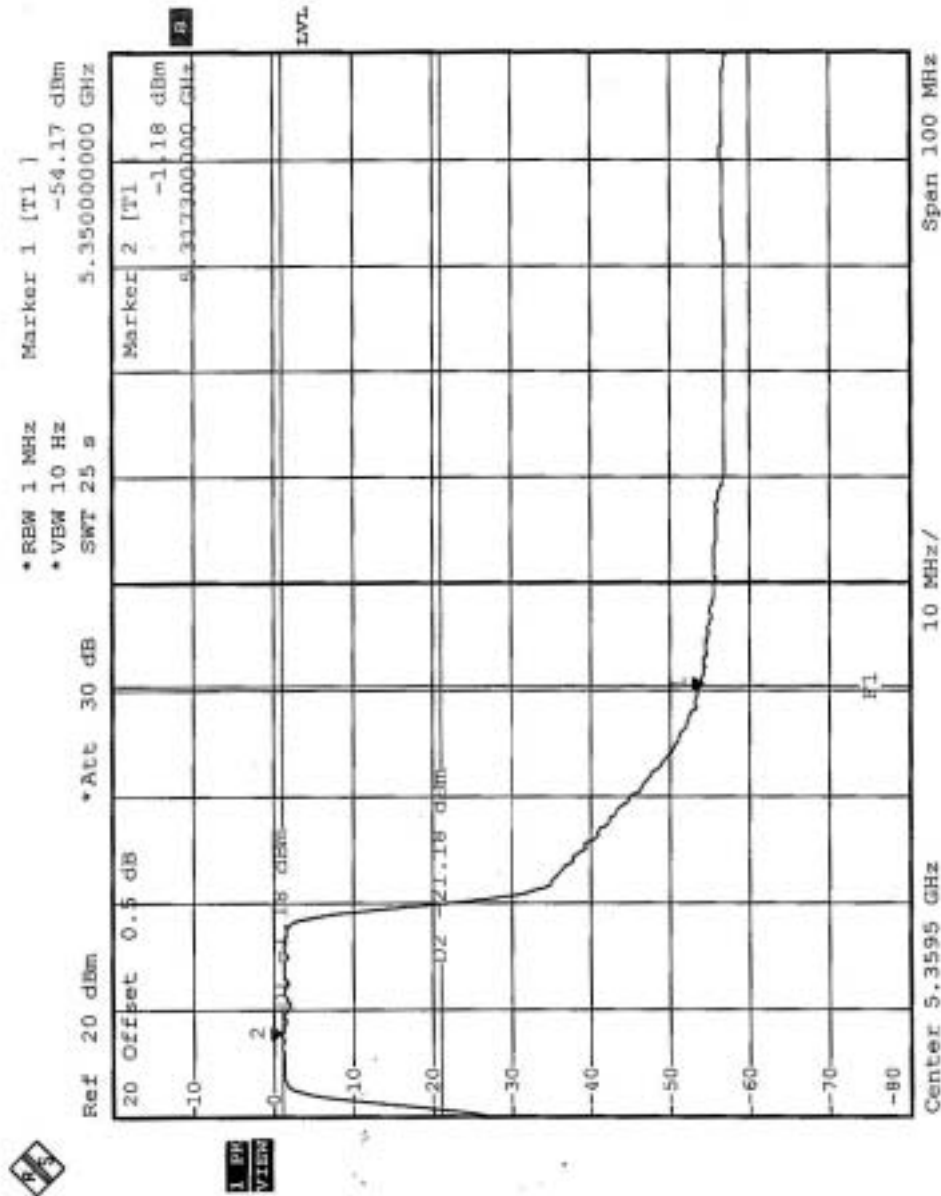



Turbo Mode: Channel 3 (5290 MHz)

The band edge emission plot on the following page shows 50.05dBc (Average) between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 8 (turbo mode) is 103.6dBuV/m, so the maximum field strength in restrict band is $103.6 - 50.05 = 53.55$ dBuV/m which is under 54dBuV/m limit.

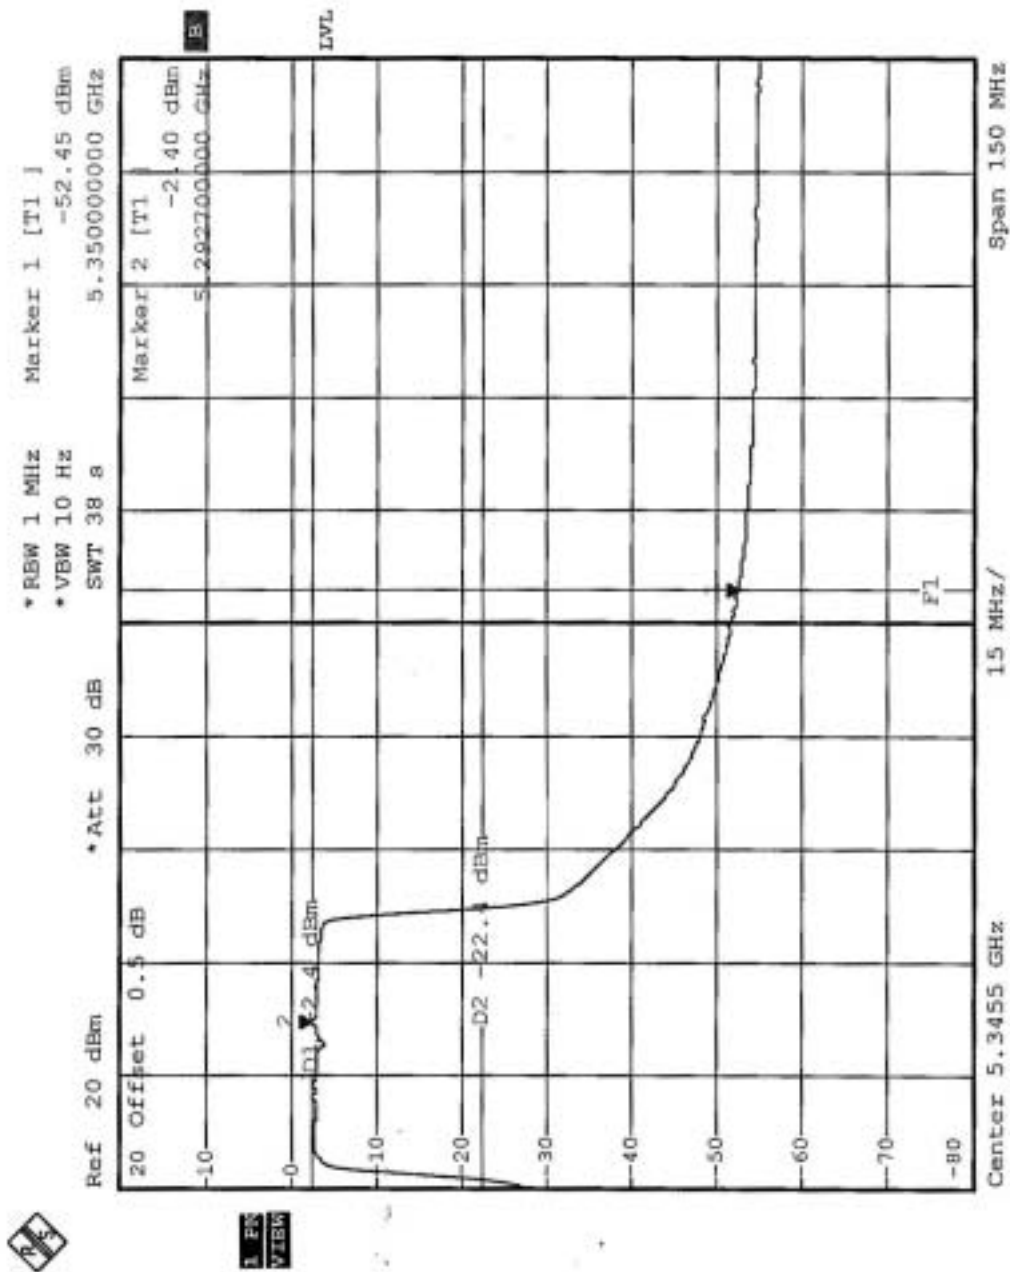



FOR FREQUENCY 5.725~5.850GHZ

5.8 6DB BANDWIDTH MEASUREMENT

5.8.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2004

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

5.8.4 DEVIATION FROM TEST STANDARD

No deviation

5.8.5 TEST SETUP



5.8.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




5.8.7 TEST RESULTS (ANTENNA 1)

EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa
TEST MODE	Normal	TEST BY	Tony Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
9	5745	16.38	0.5	PASS
11	5785	16.38	0.5	PASS
13	5825	16.45	0.5	PASS




CH9

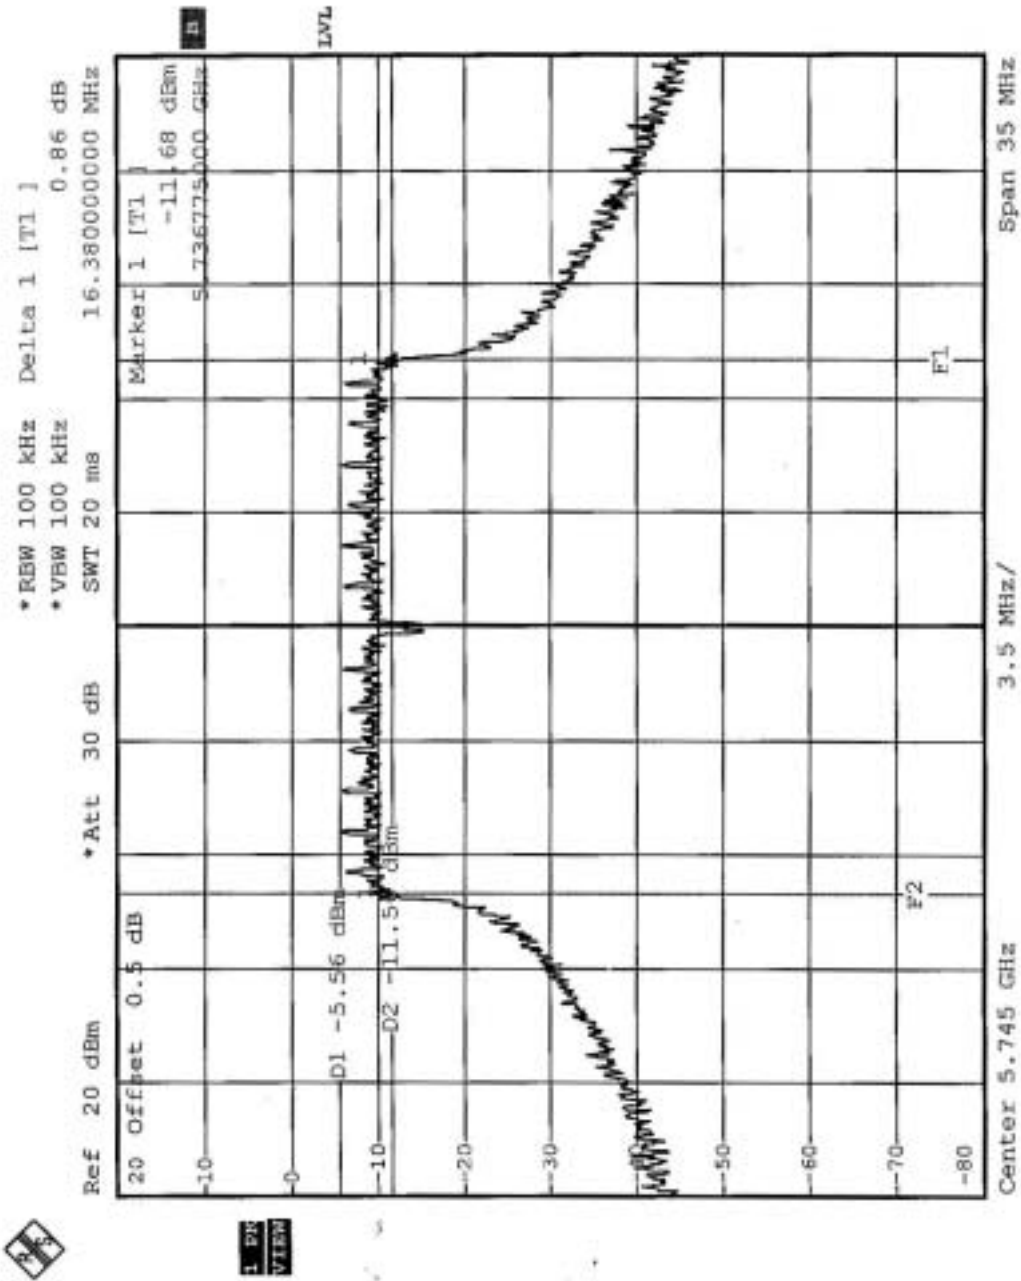




CH11

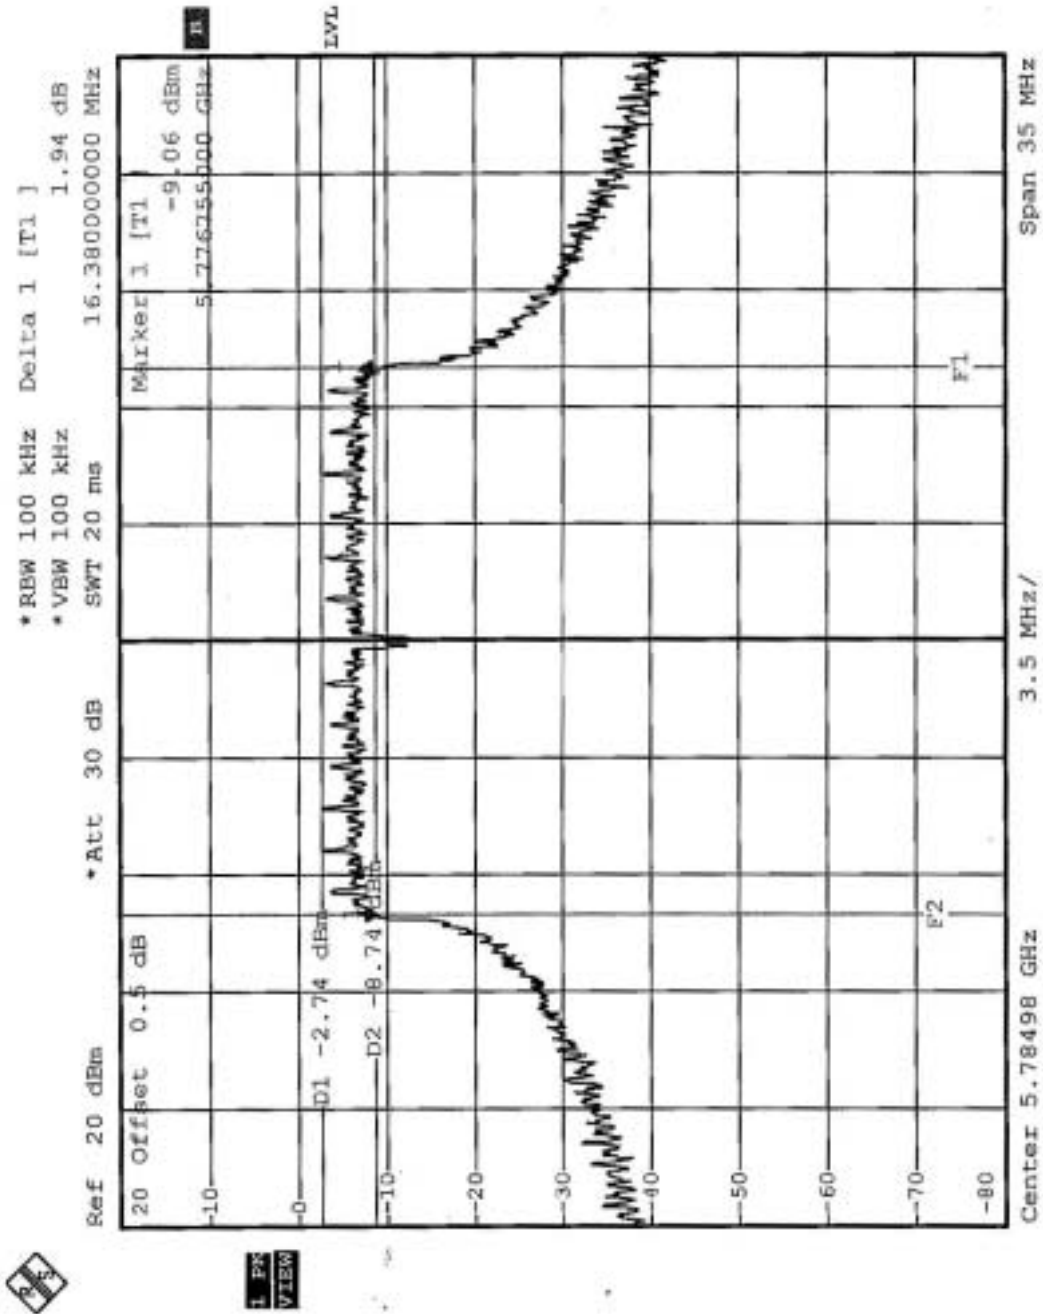



CH13

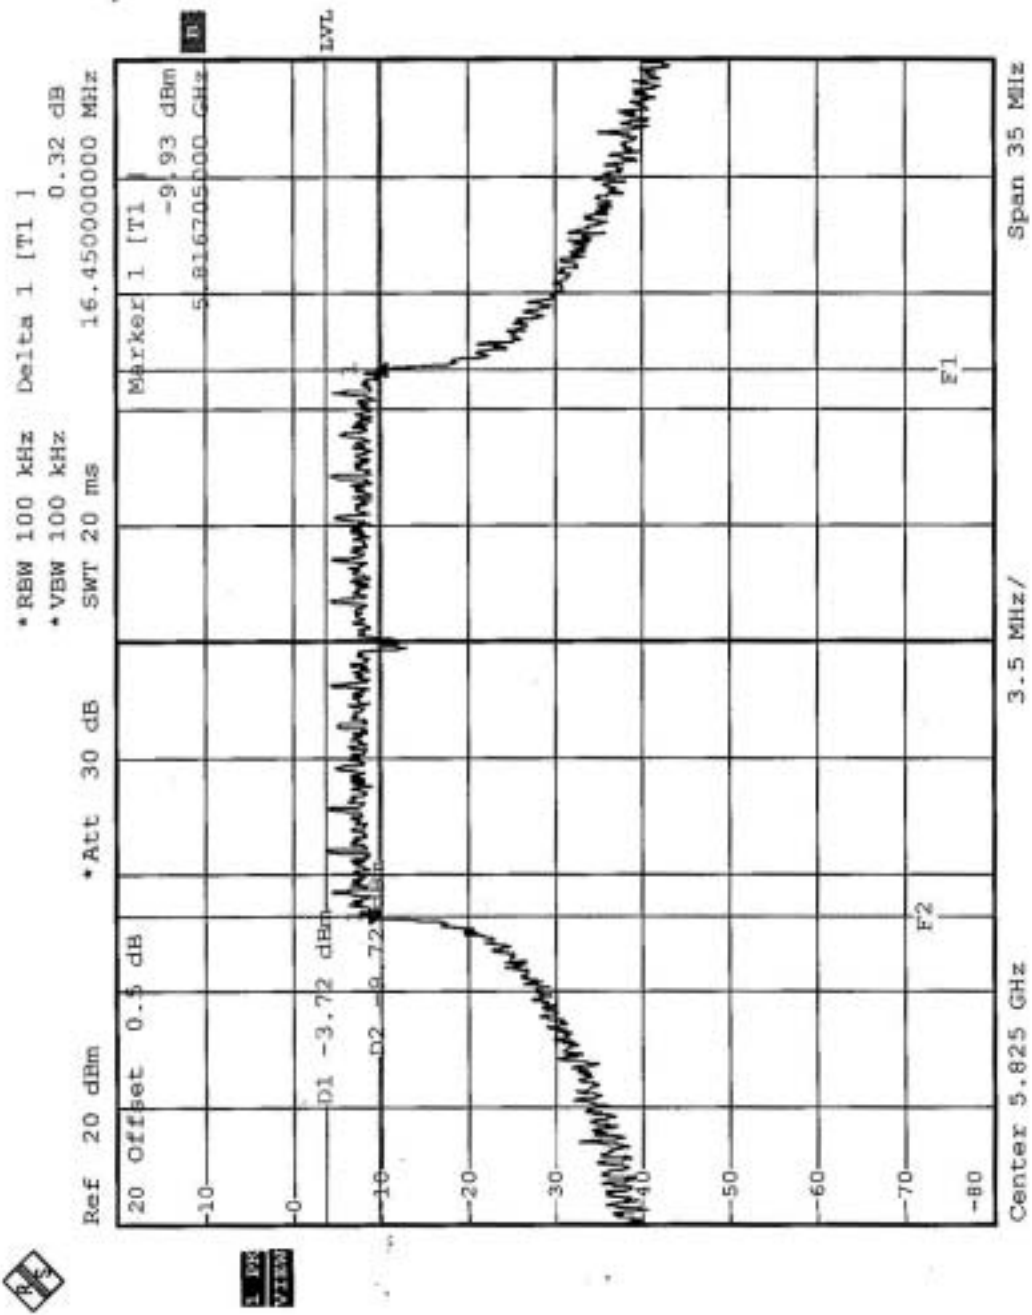




EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa
TEST MODE	Turbo	TEST BY	Tony Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
4	5760	32.48	0.5	PASS
5	5800	32.64	0.5	PASS




CH4

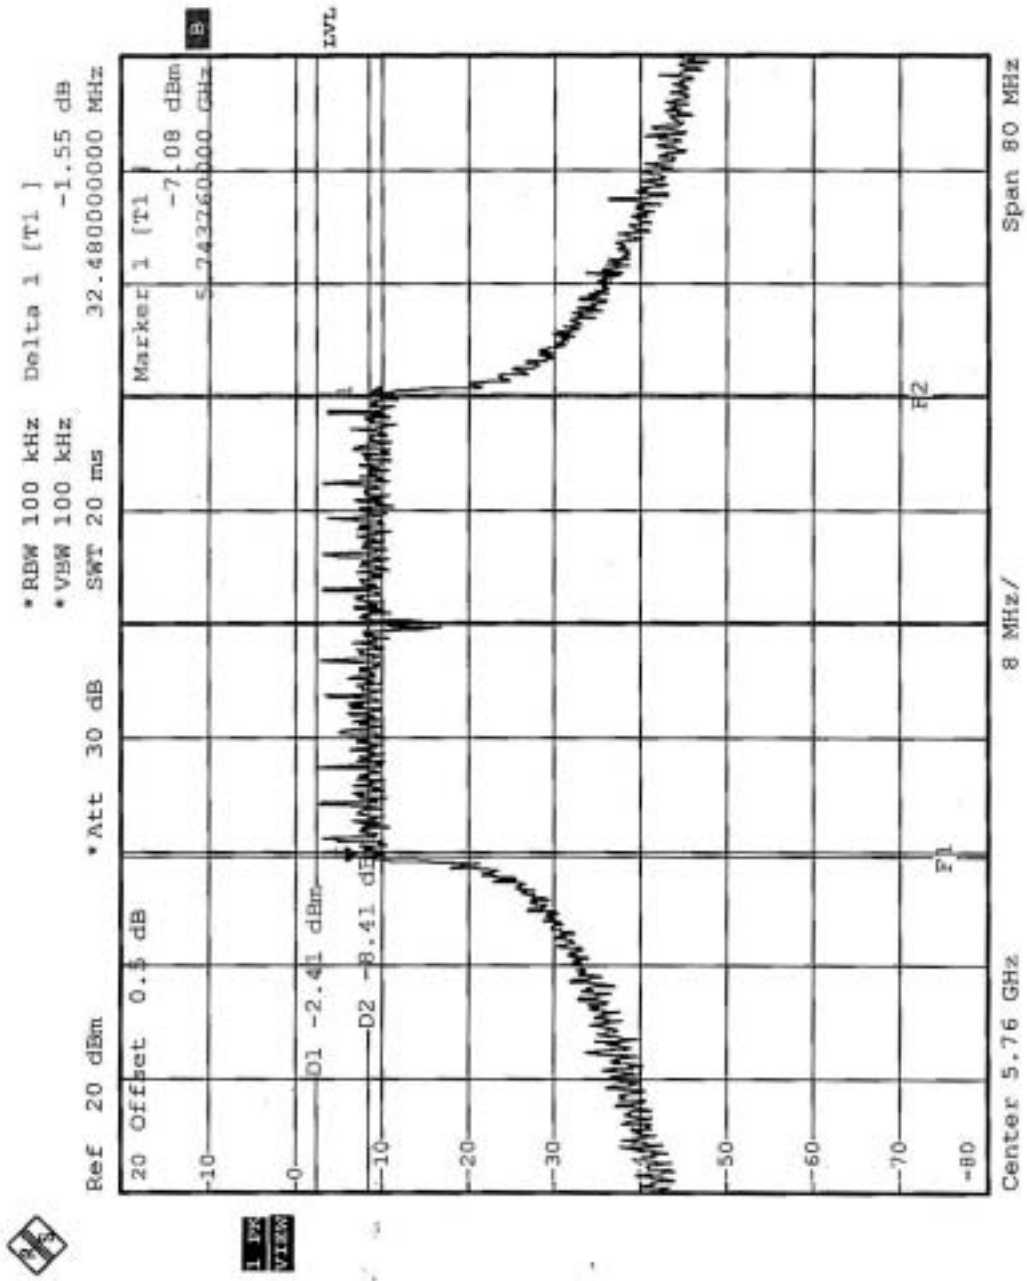



CH5

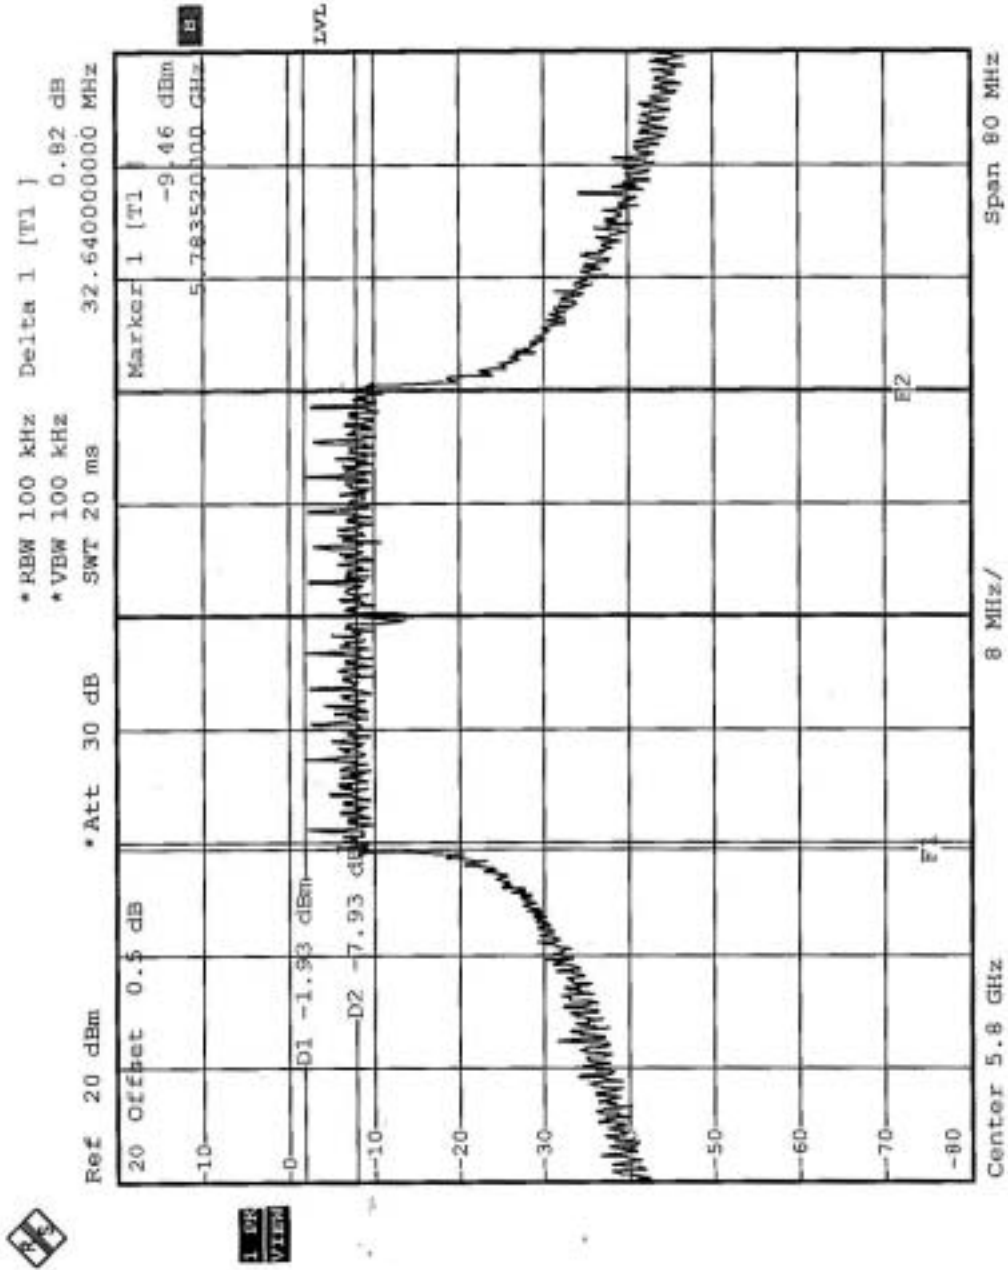




5.8.8 TEST RESULTS (ANTENNA 3)

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa
TEST MODE	Normal	TEST BY	Tony Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
9	5745	16.45	0.5	PASS
11	5785	16.45	0.5	PASS
13	5825	16.45	0.5	PASS




CH9

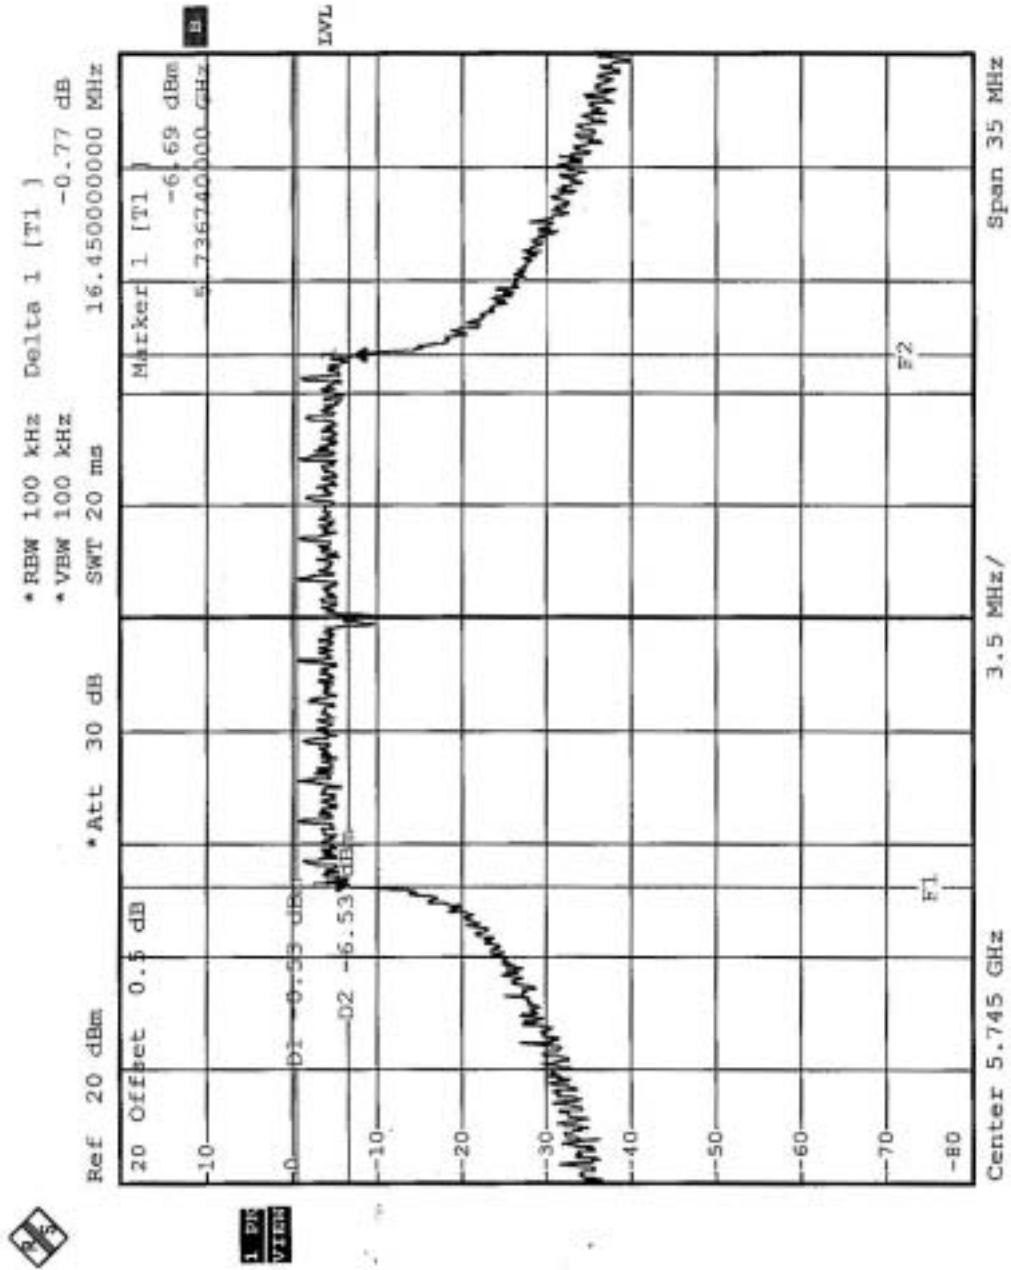




CH11

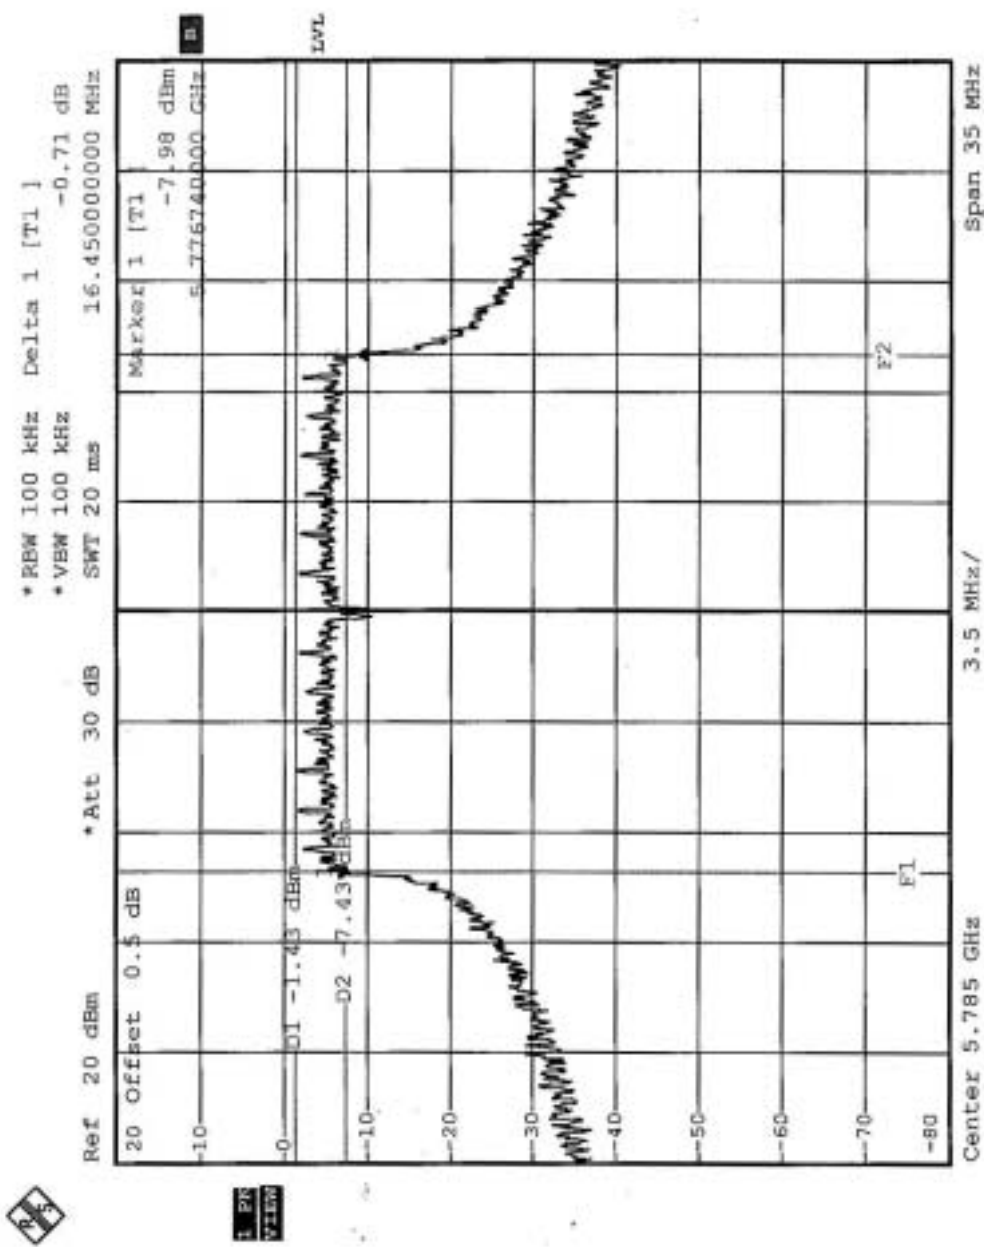



CH13

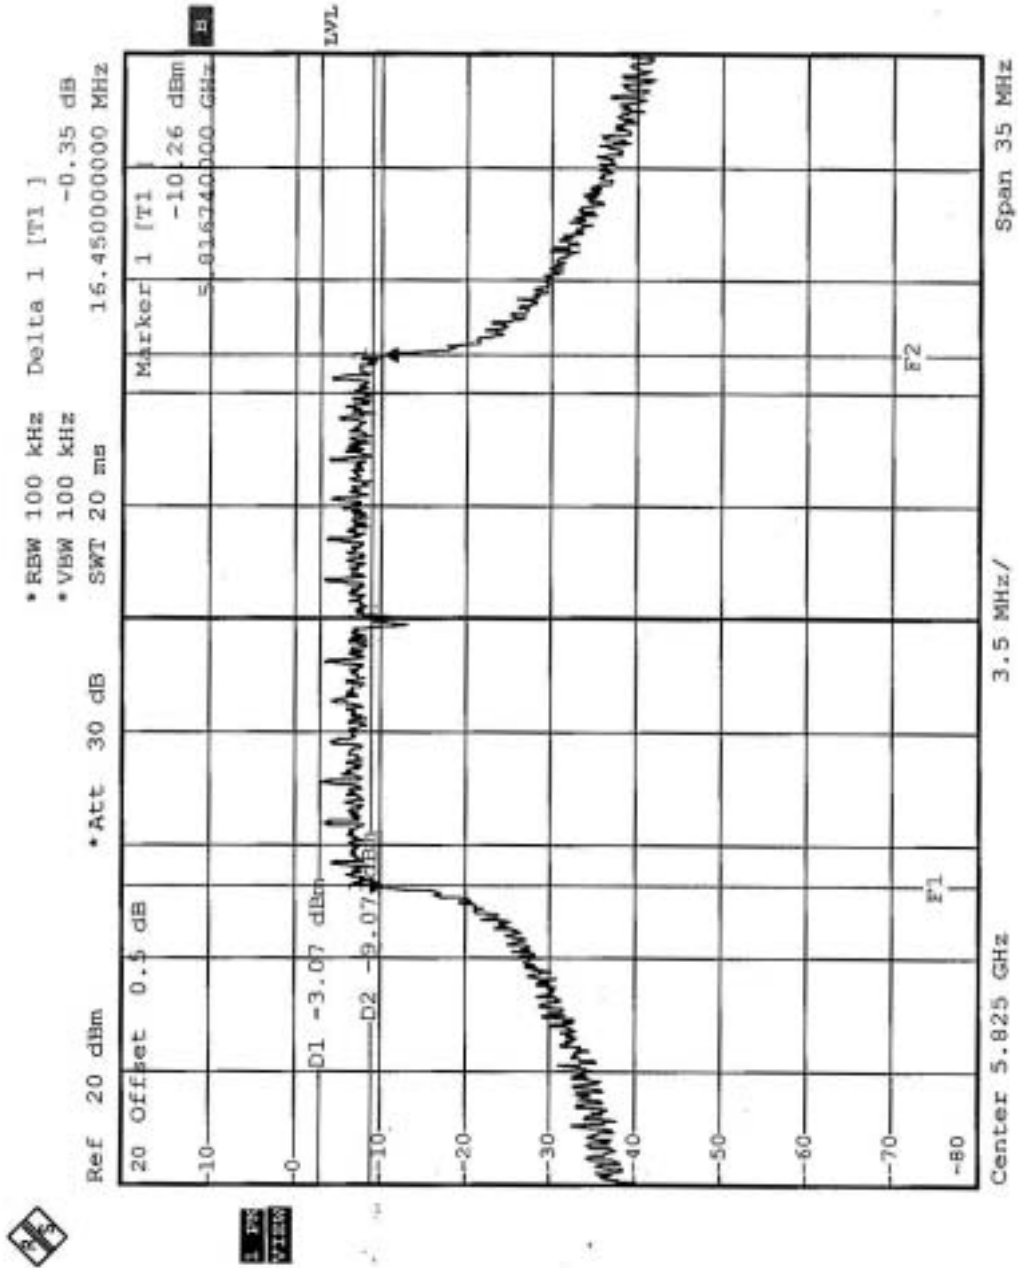




EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa
TEST MODE	Turbo	TEST BY	Tony Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
4	5760	32.64	0.5	PASS
5	5800	32.48	0.5	PASS




CH4

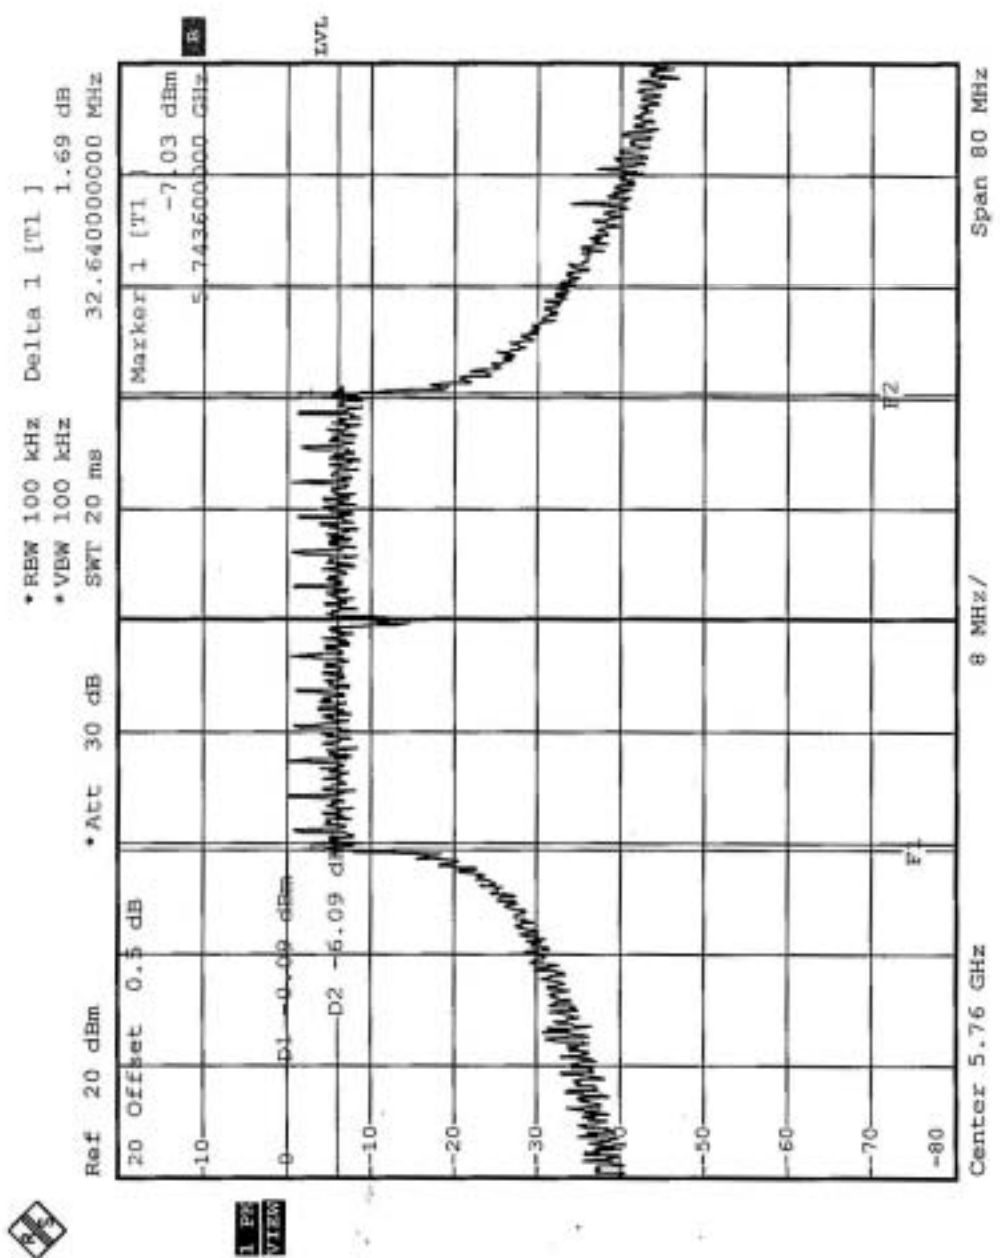



CH5

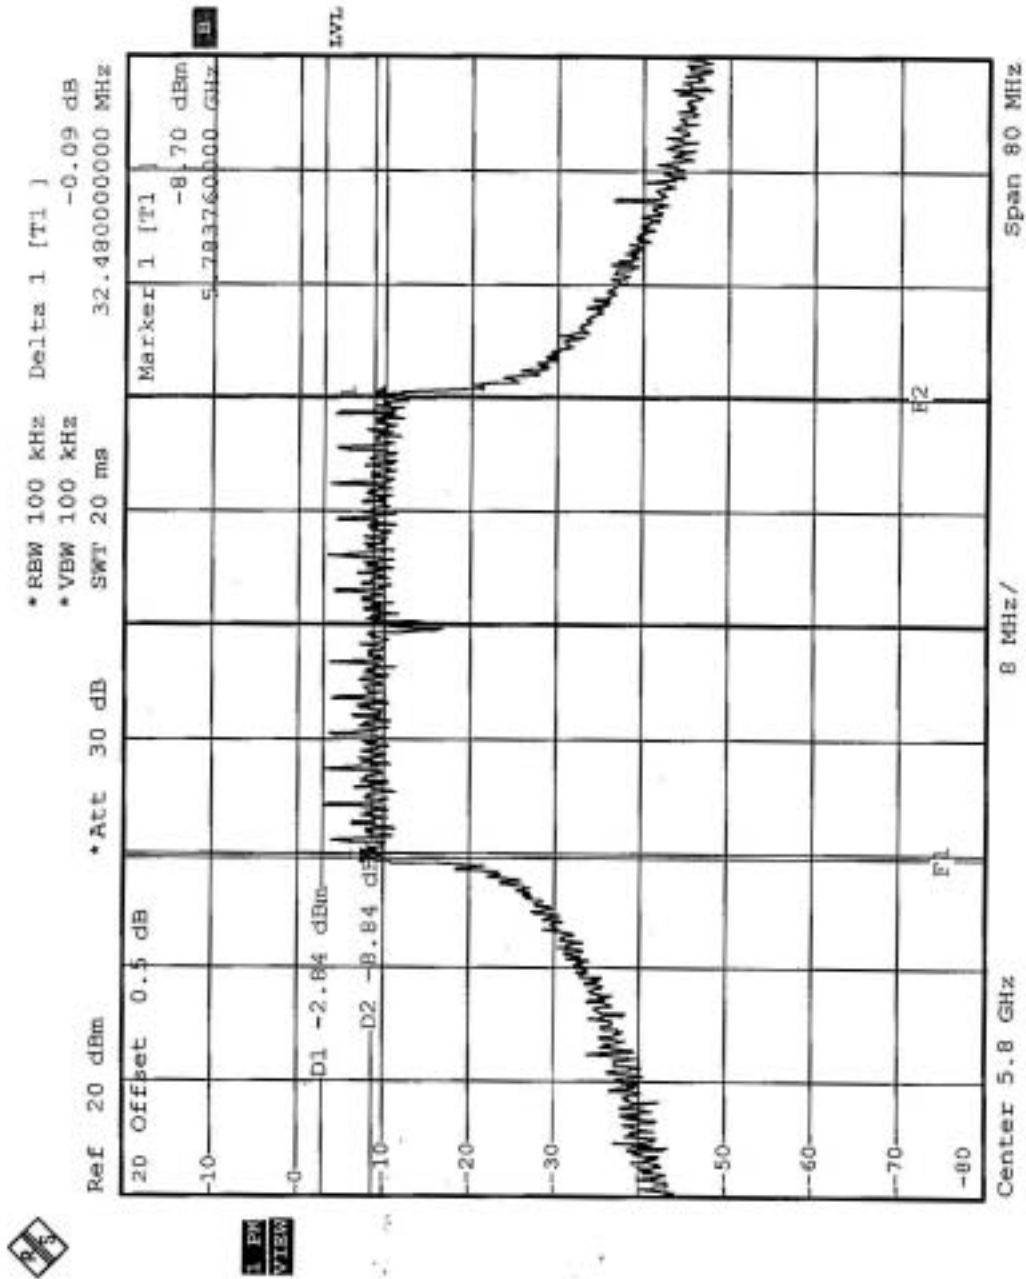



5.9 MAXIMUM PEAK OUTPUT POWER

5.9.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

Note:

1. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

5.9.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP30	100019	Dec. 19, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.9.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer.

Set the spectrum bandwidth span to view the entire spectrum.

Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=30KHz).

The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

5.9.4 TEST SETUP



5.9.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



5.9.6 TEST RESULTS (ANTENNA 1)

EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa
TEST MODE	Normal	TEST BY	Wen Yu

Antenna 1 (Gain 17dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
9	5745	10.5	30	PASS
11	5785	12.76	30	PASS
13	5825	12.07	30	PASS

EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa
TEST MODE	Turbo	TEST BY	Wen Yu

Antenna 1 (Gain 17dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
4	5760	12.5	30	PASS
5	5800	13.5	30	PASS



5.9.7 TEST RESULTS (ANTENNA 3)

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24eg. C, 64RH, 963 hPa
TEST MODE	Normal	TEST BY	Tony Chen

Antenna 3 (Gain 23dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
9	5745	15.42	30	PASS
11	5785	14.47	30	PASS
13	5825	12.01	30	PASS

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24eg. C, 64RH, 963 hPa
TEST MODE	Turbo	TEST BY	Tony Chen

Antenna 3 (Gain 23dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
4	5760	14.31	30	PASS
5	5800	11.78	30	PASS



5.10 POWER SPECTRAL DENSITY MEASUREMENT

5.10.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.10.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2004

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.10.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

5.10.4 DEVIATION FROM TEST STANDARD

No deviation

5.10.5 TEST SETUP



5.10.6 EUT OPERATING CONDITION

Same as Item 4.3.6




5.10.7 TEST RESULTS (ANTENNA 1)

EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa
TEST MODE	Normal	TEST BY	Tony Chen

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
9	5745	-16.44	8	PASS
11	5785	-13.49	8	PASS
13	5825	-14.81	8	PASS




CH9

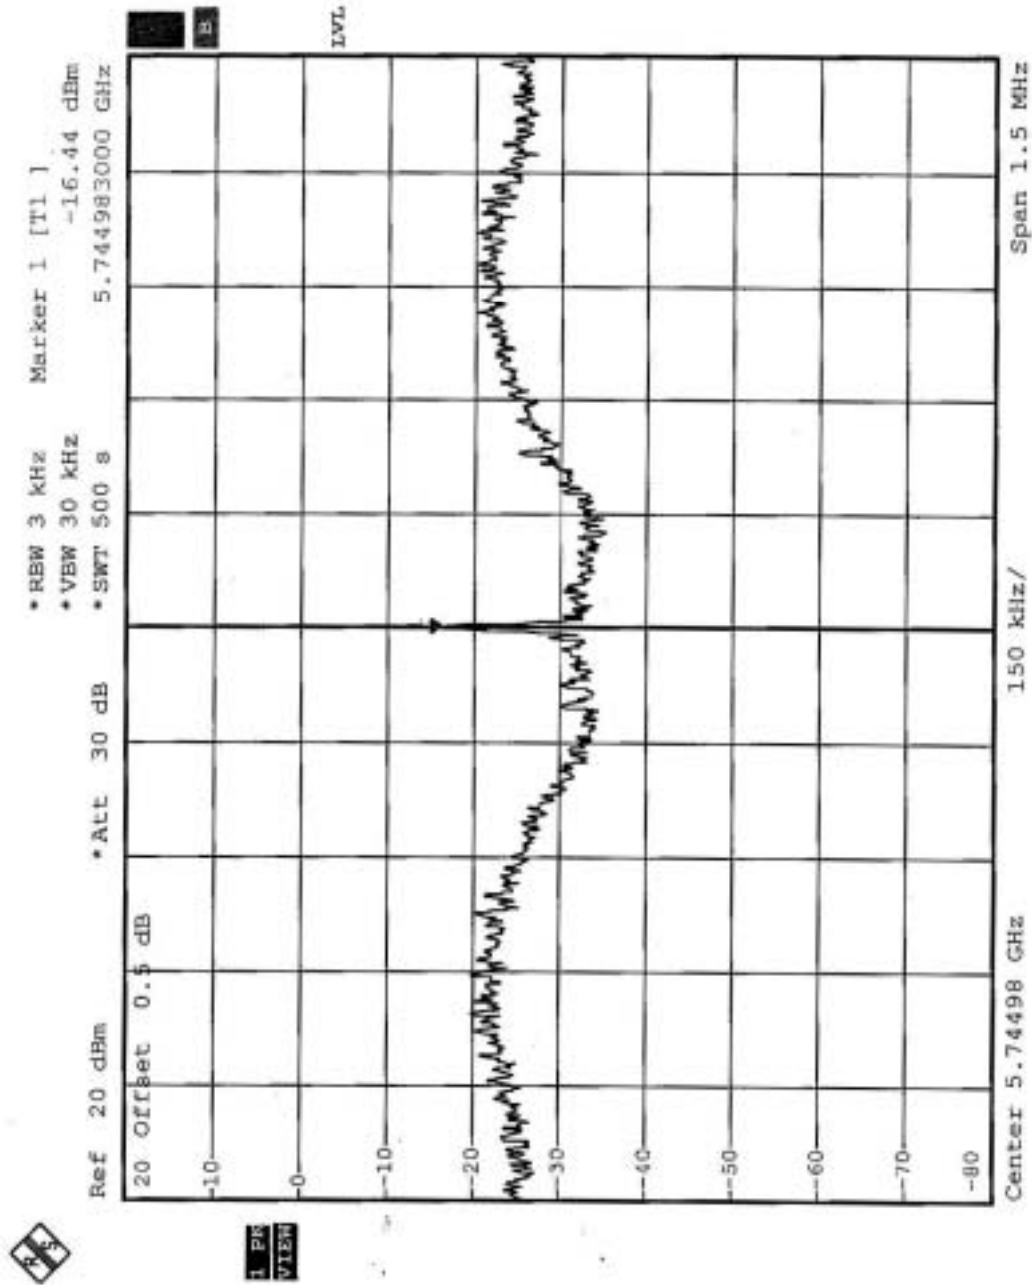




CH11

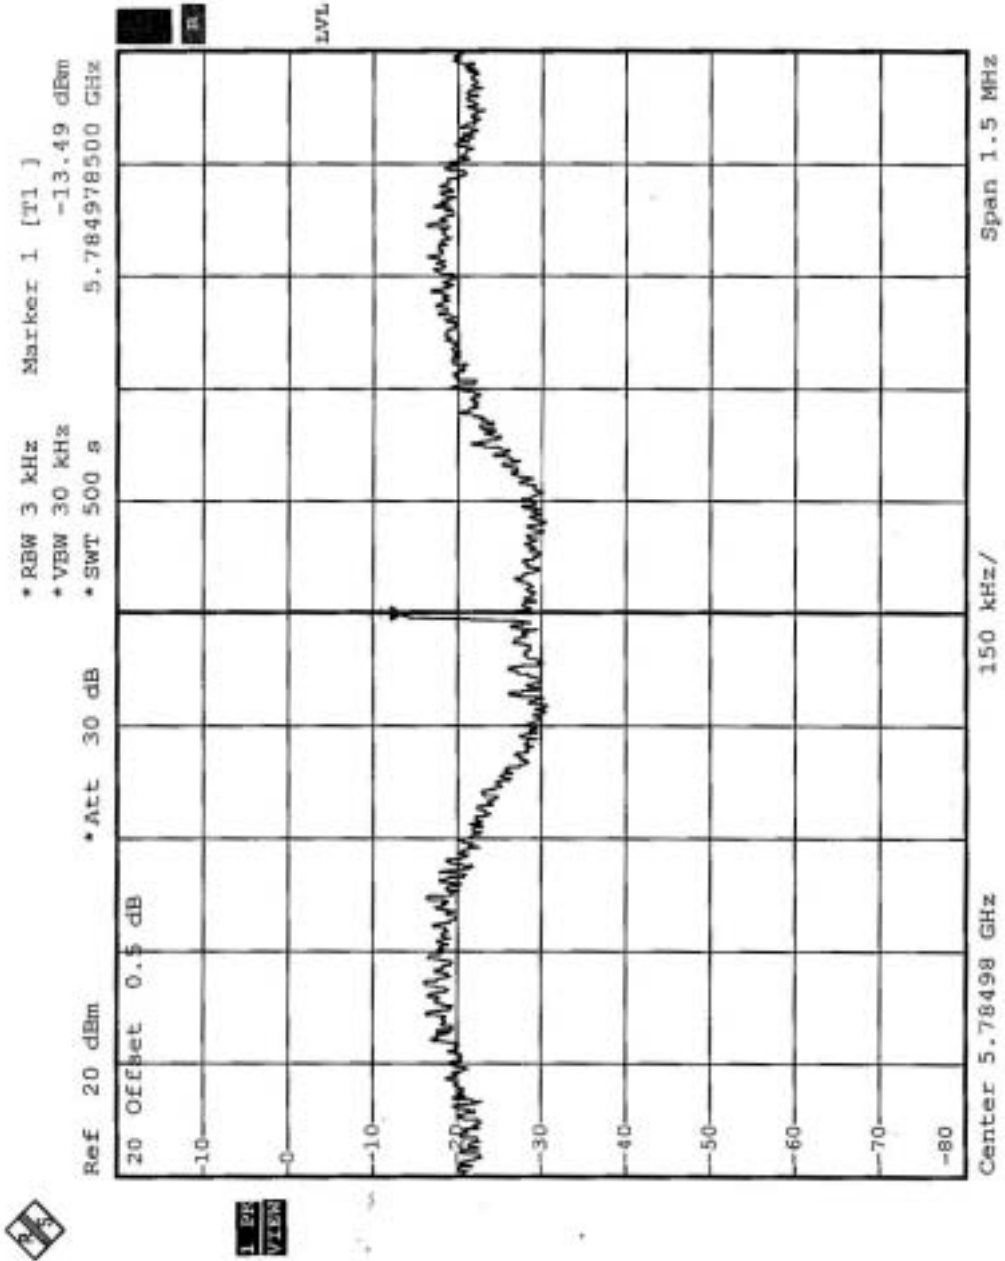



CH13

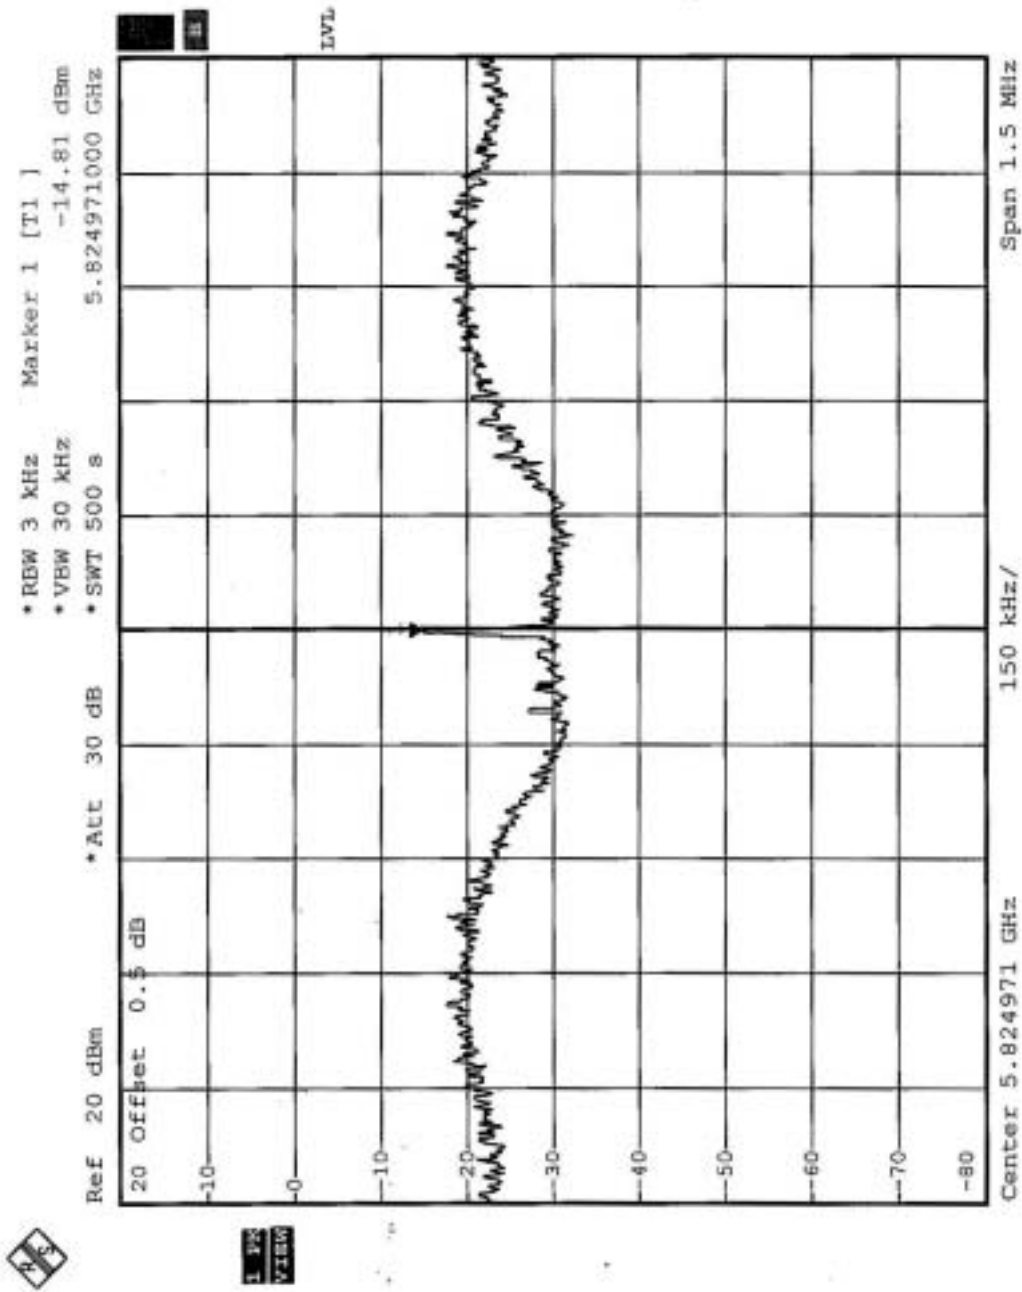




EUT	802.11a+b/g Outdoor AP/Bridge With Internal Antenna	MODEL	AP5822
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa
TEST MODE	Turbo	TEST BY	Tony Chen

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
4	5760	-14.37	8	PASS
5	5800	-11.99	8	PASS




CH4

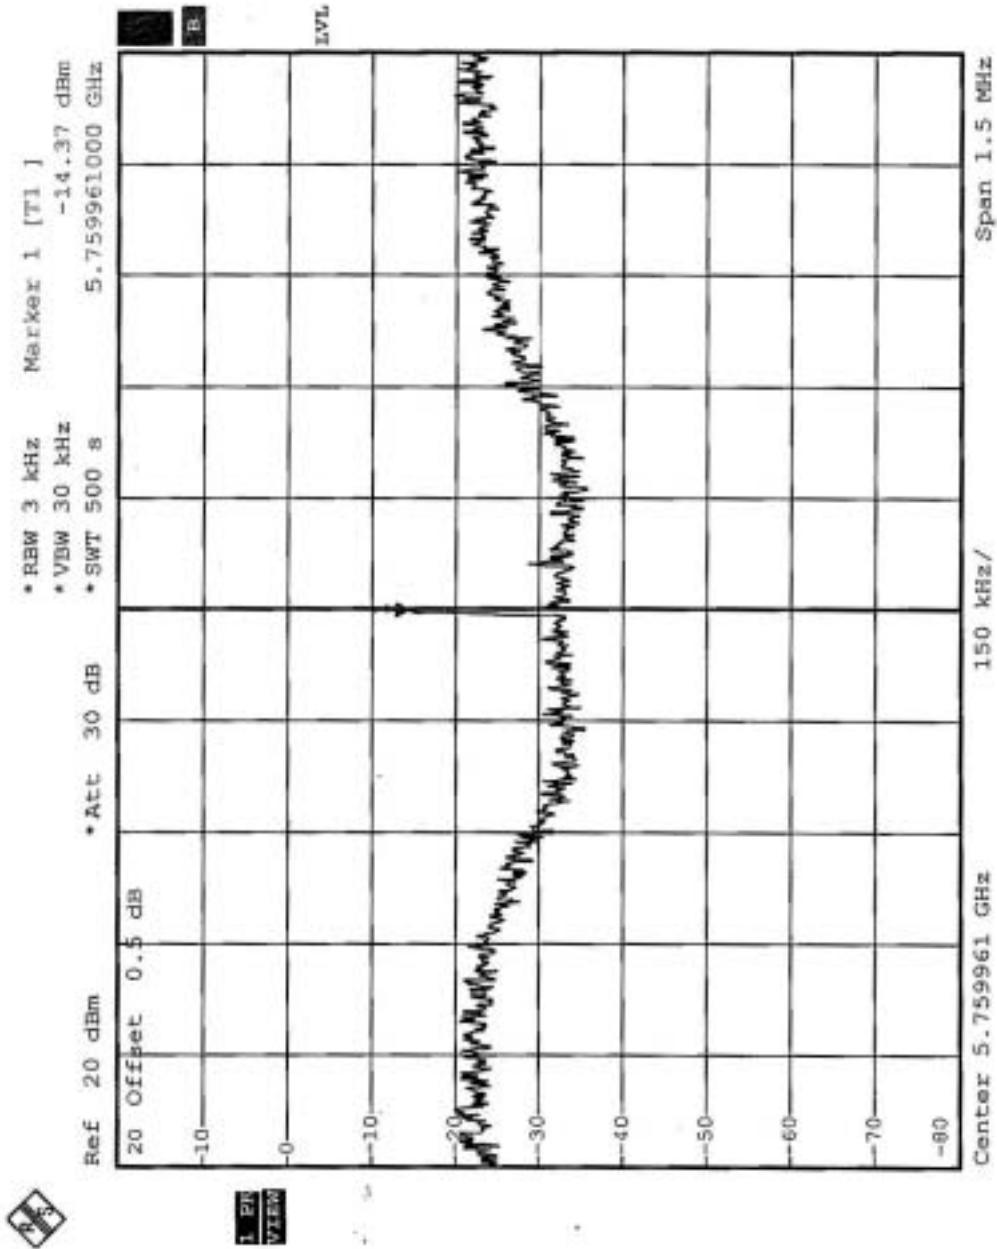



CH5

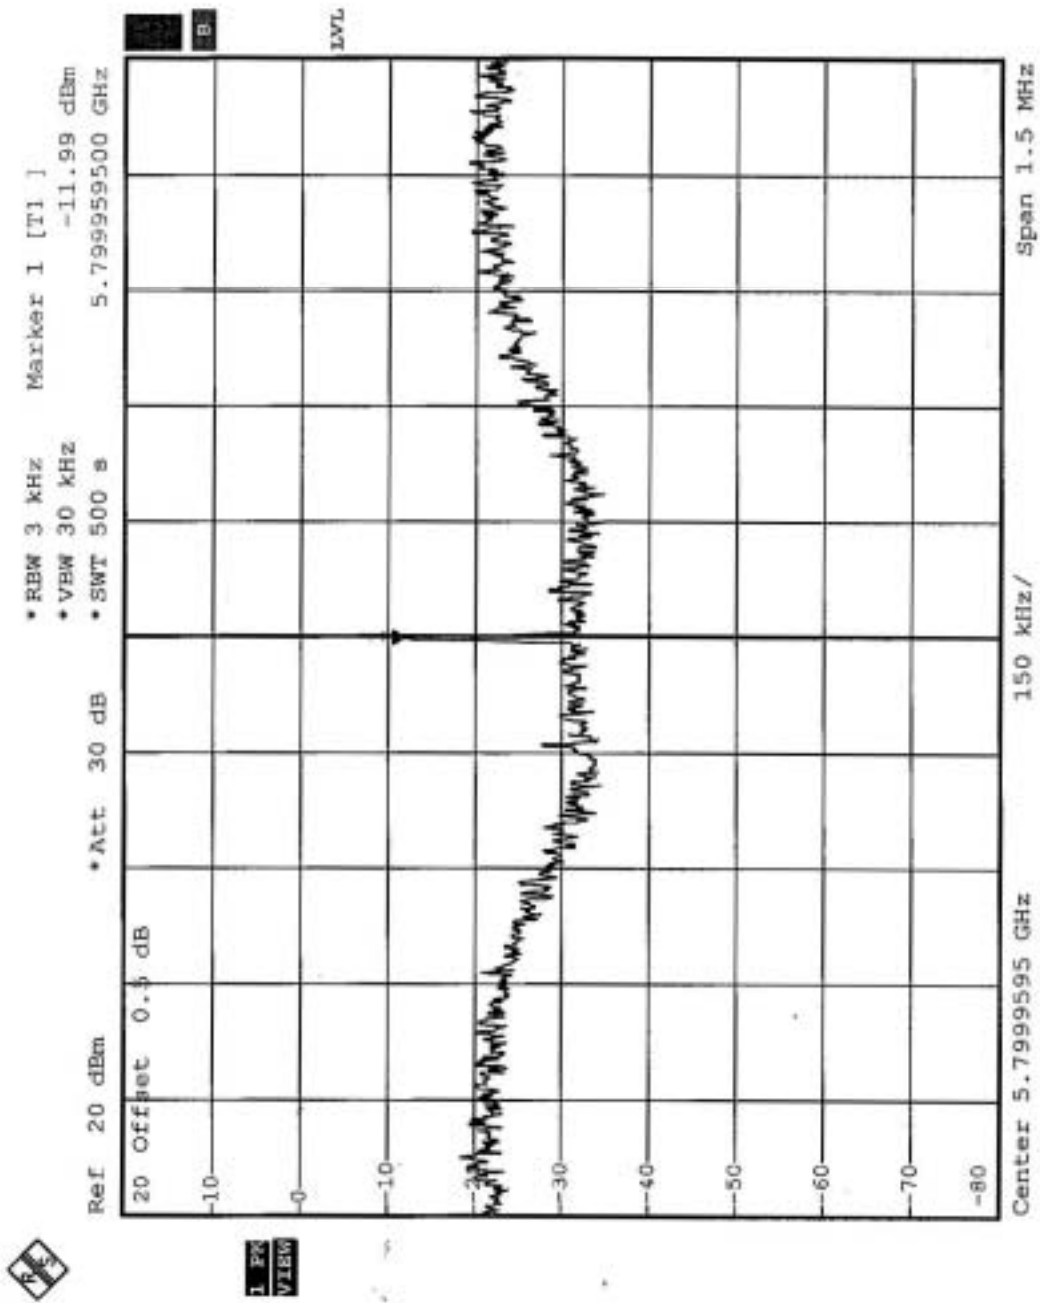




5.10.8 TEST RESULTS (ANTENNA 3)

EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa
TEST MODE	Normal	TEST BY	Tony Chen

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
9	5745	-11.02	8	PASS
11	5785	-12.12	8	PASS
13	5825	-14.33	8	PASS




CH9

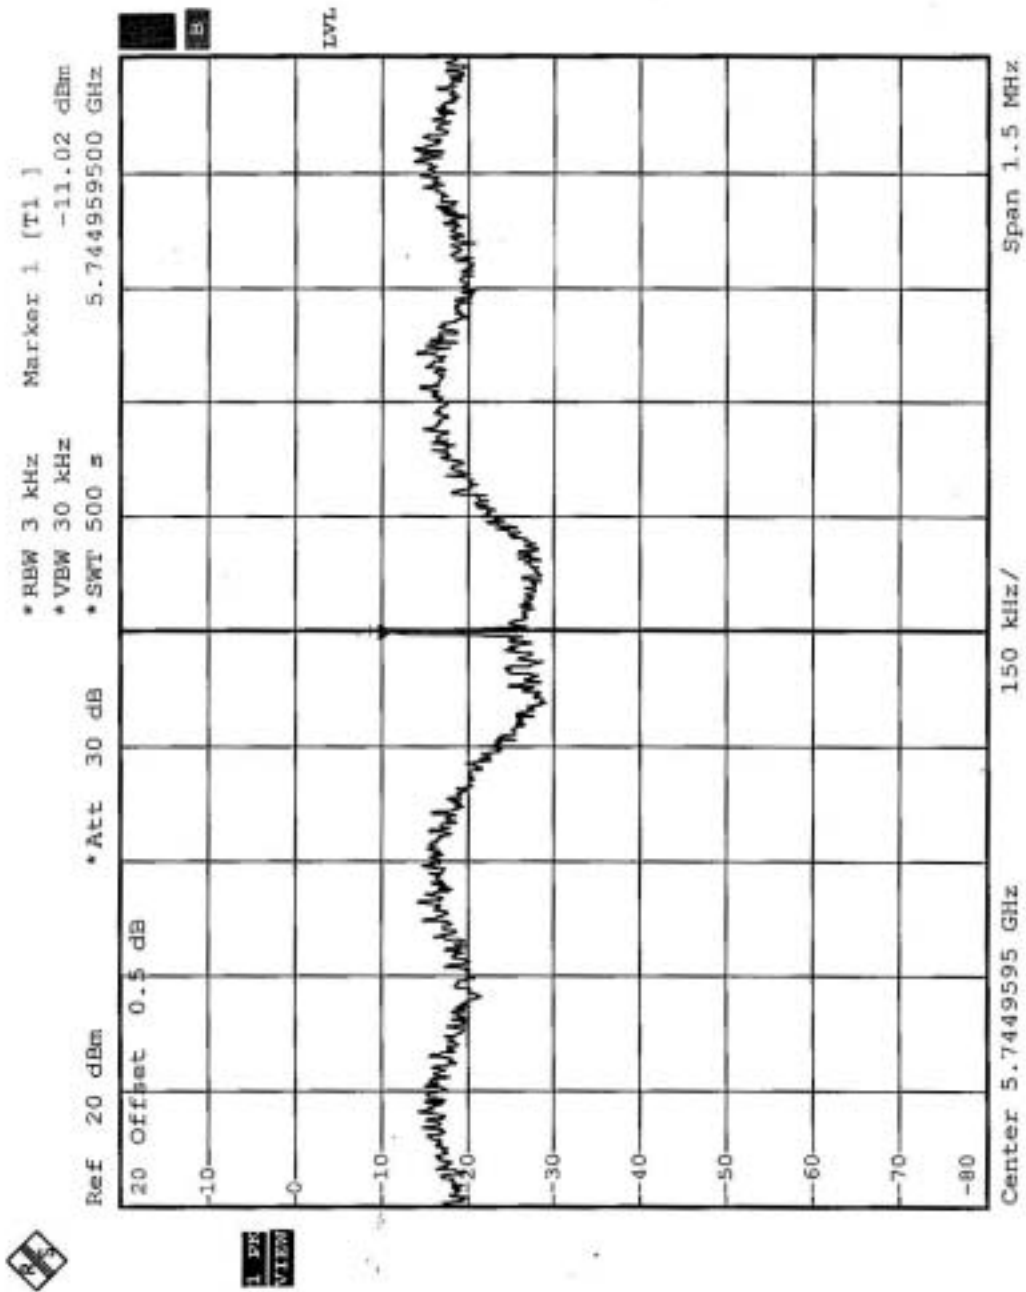




CH11

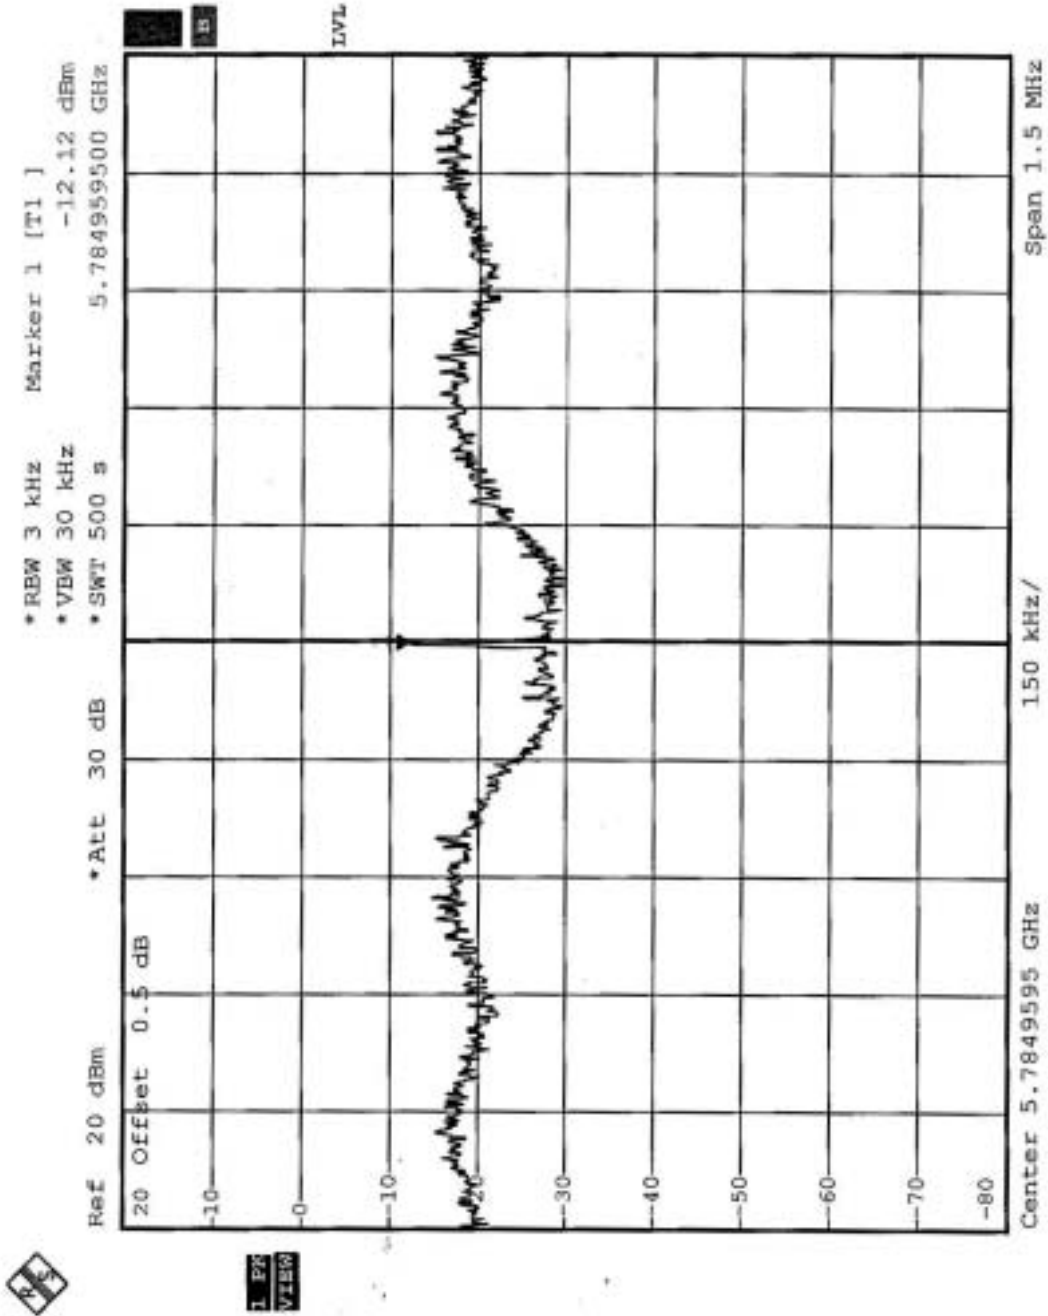



CH13

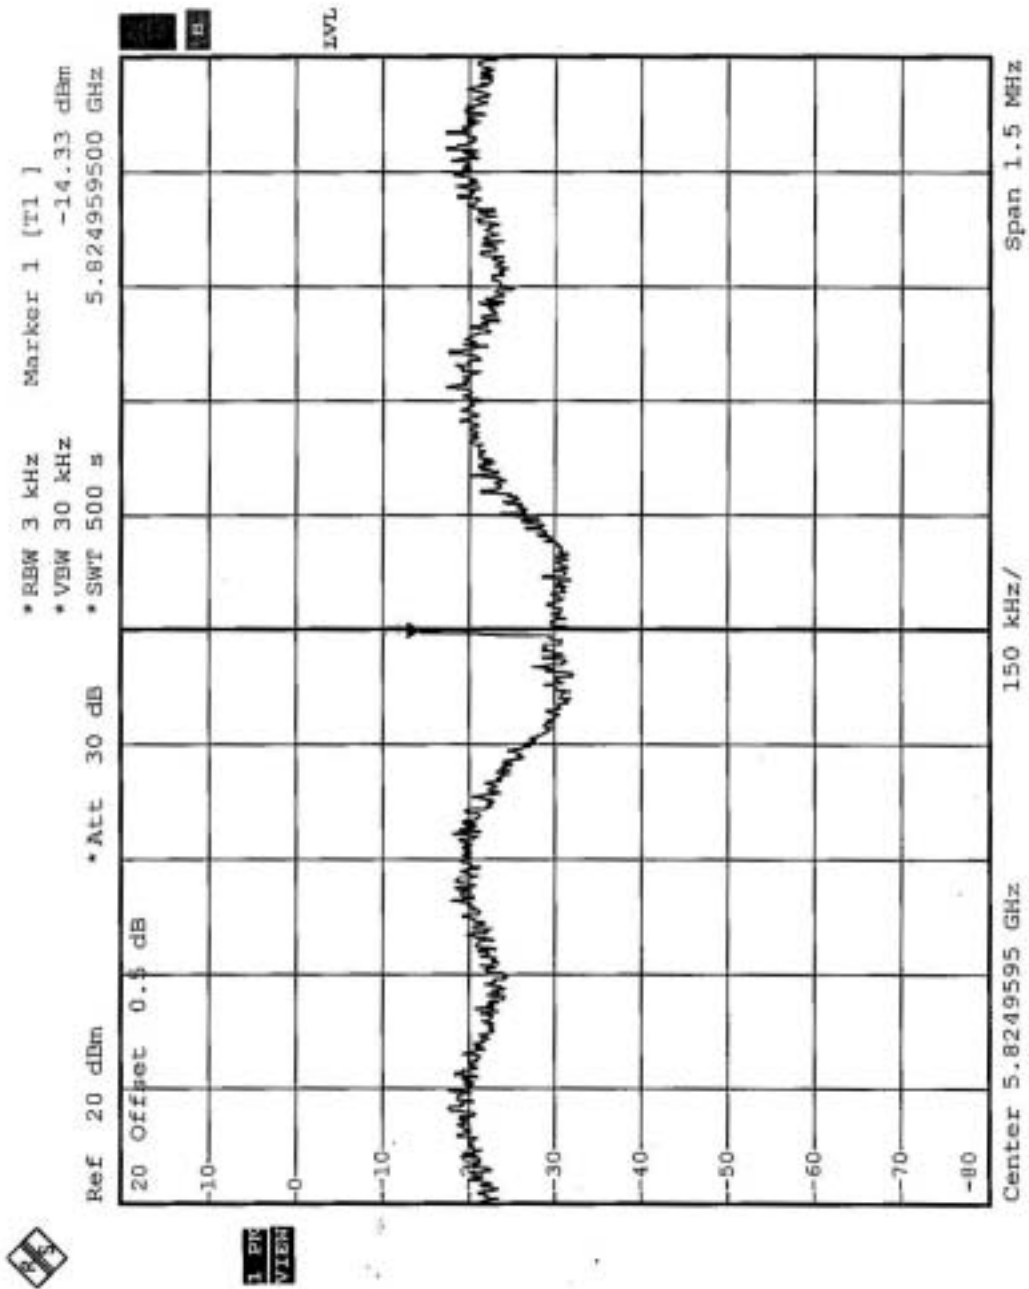




EUT	802.11a+b/g Outdoor AP/Bridge With External Antenna	MODEL	AP5822E
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27eg. C, 59RH, 963 hPa
TEST MODE	Turbo	TEST BY	Tony Chen

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
4	5760	-11.95	8	PASS
5	5800	-19.18	8	PASS




CH4

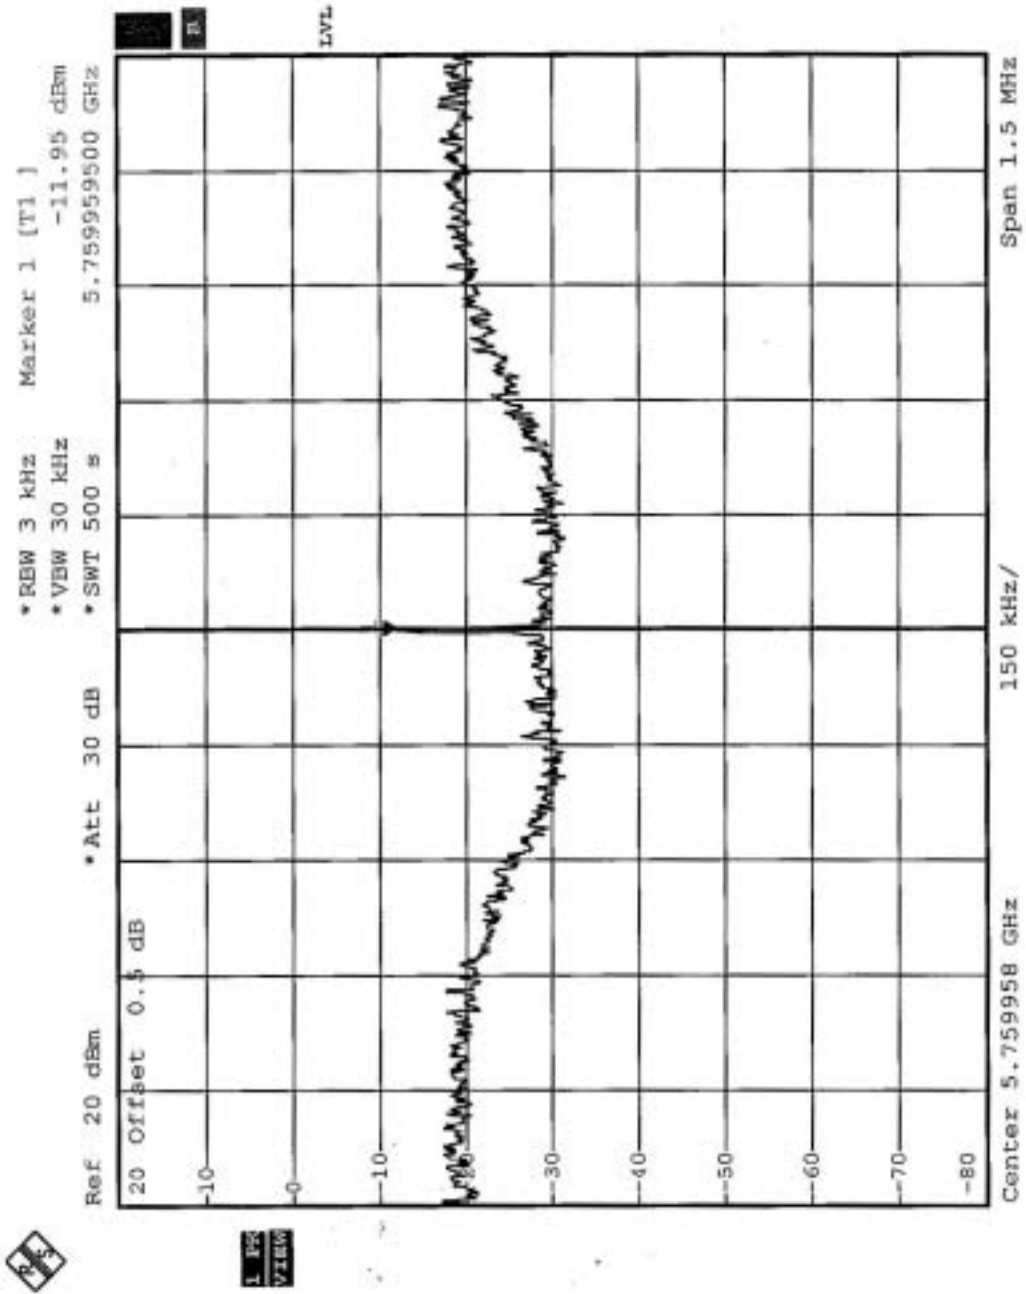



CH5

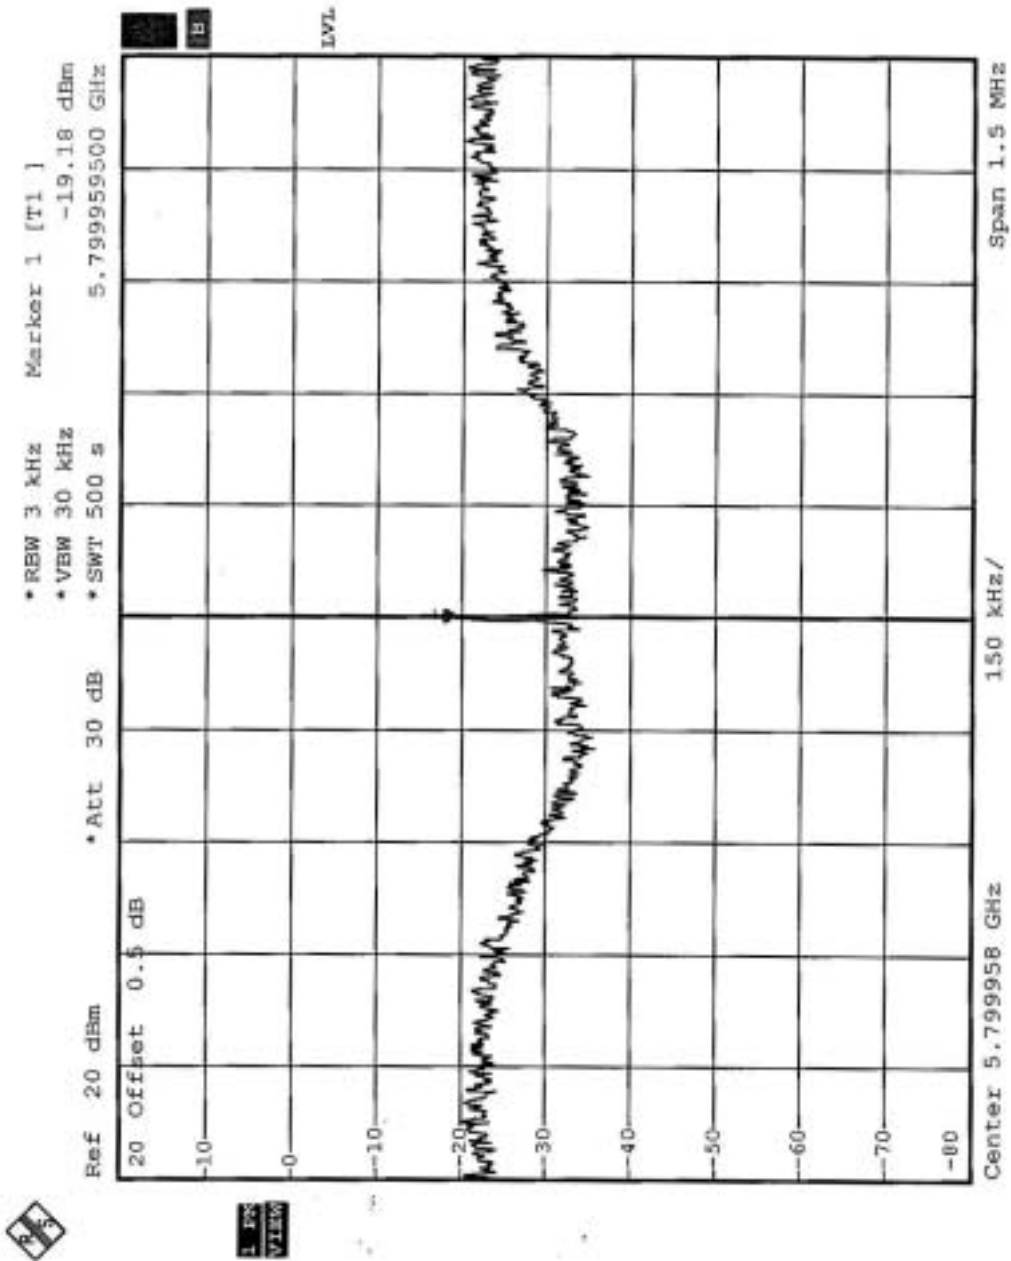



5.11 BAND EDGES MEASUREMENT

5.11.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

5.11.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2004

NOTE:

- 1.The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.11.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

5.11.4 DEVIATION FROM TEST STANDARD

No deviation



5.11.5 EUT OPERATING CONDITION


Same as Item 4.3.6


5.11.6 TEST RESULTS (Antenna 1)

The spectrum plots are attached on the following pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).




Normal Mode

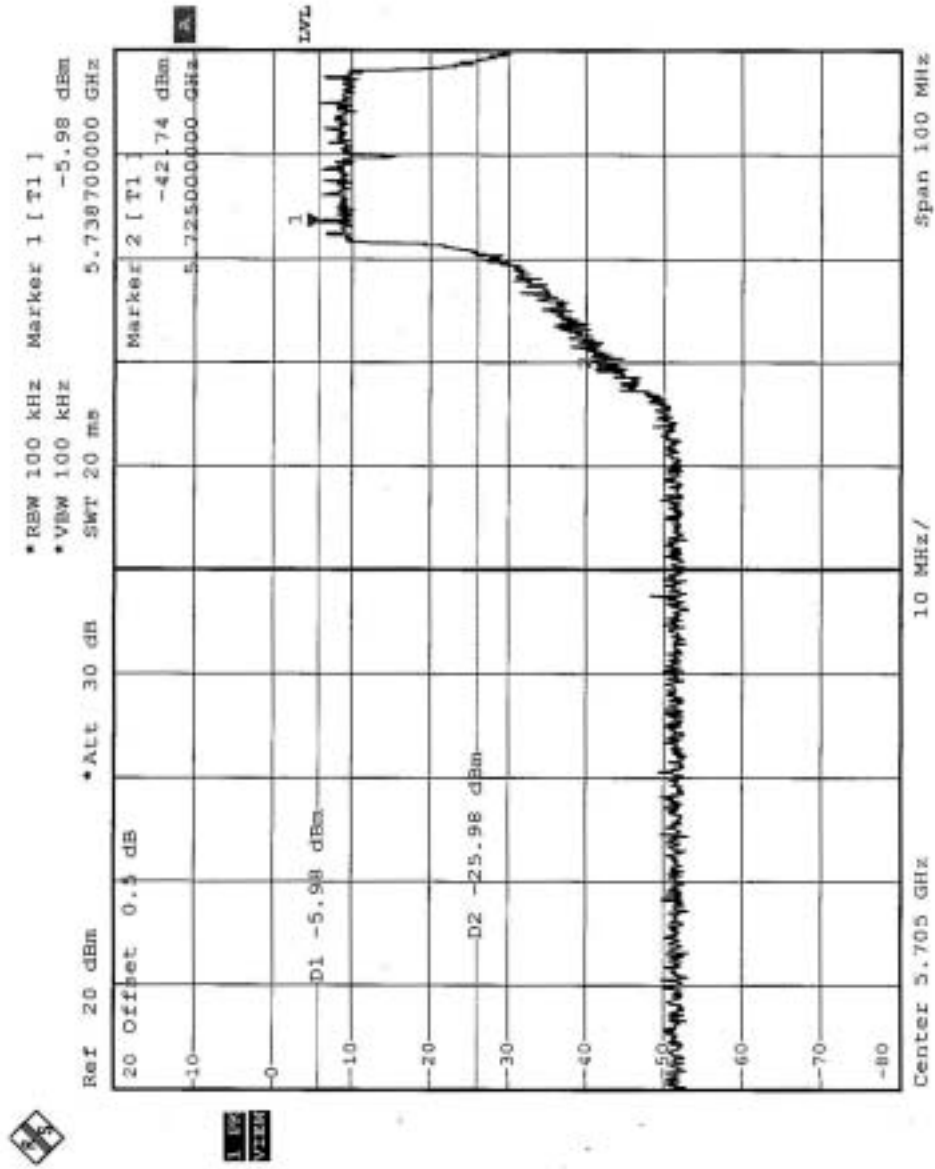


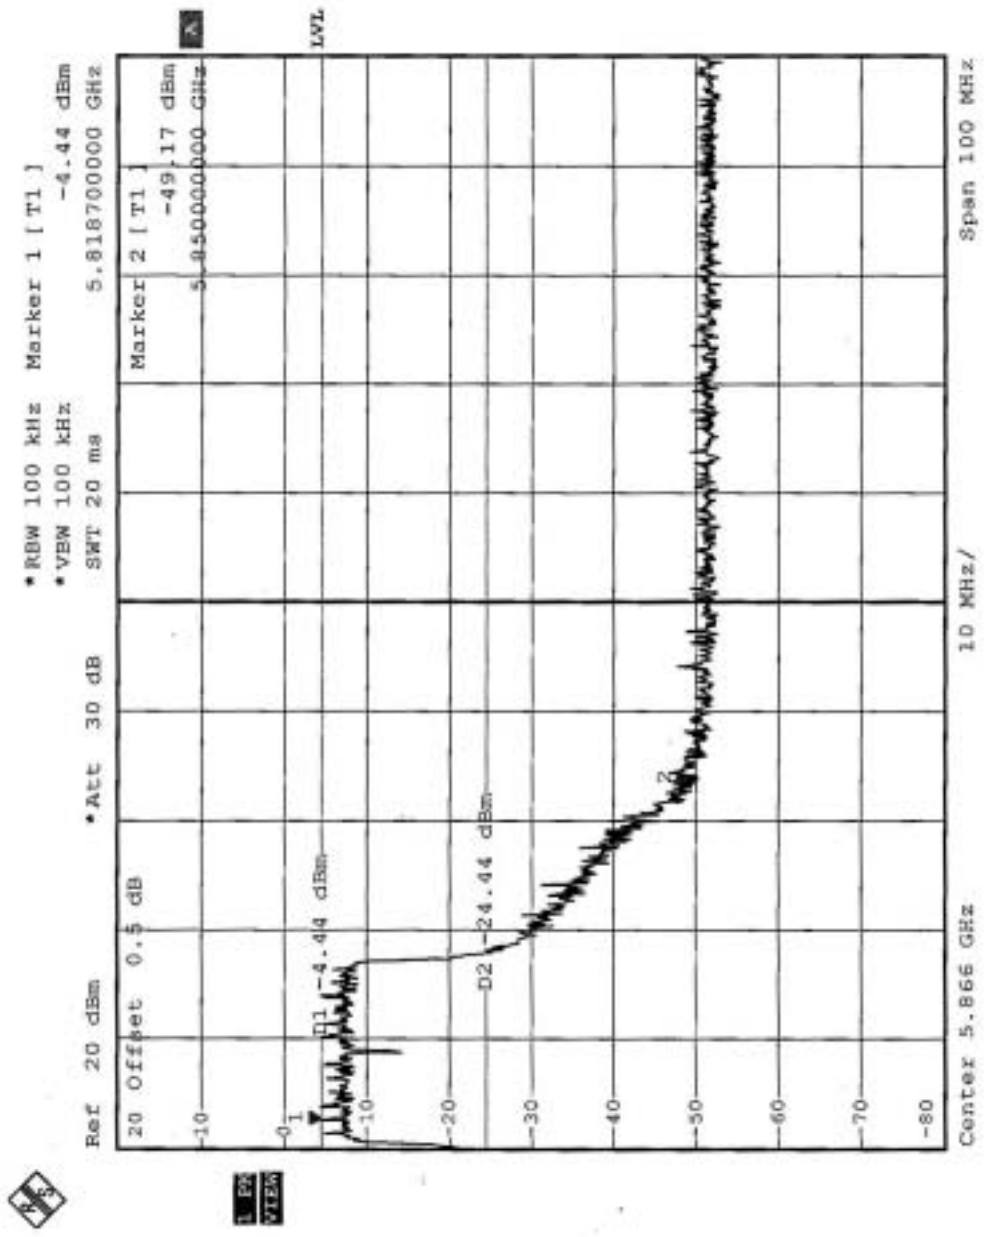



Turbo Mode

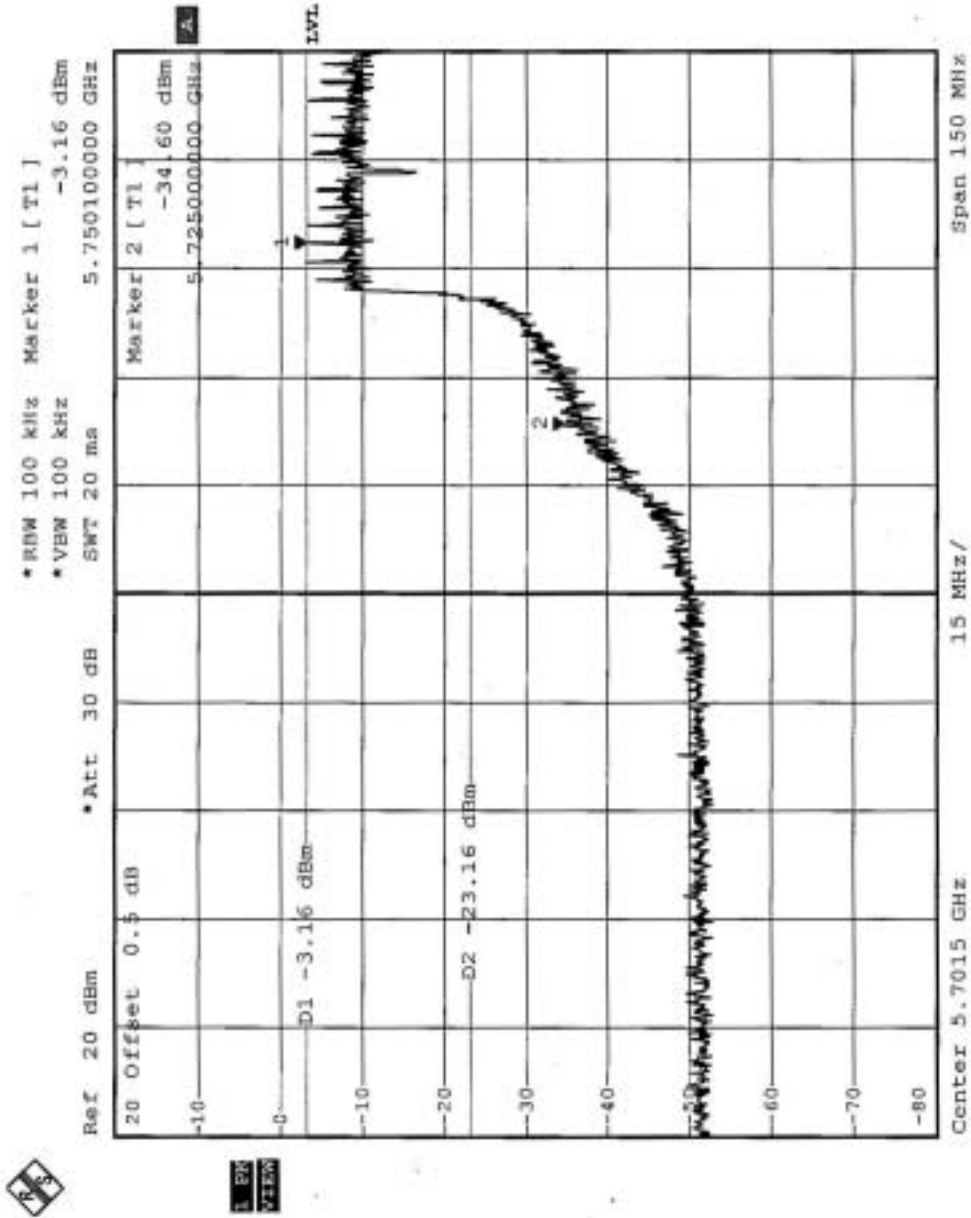

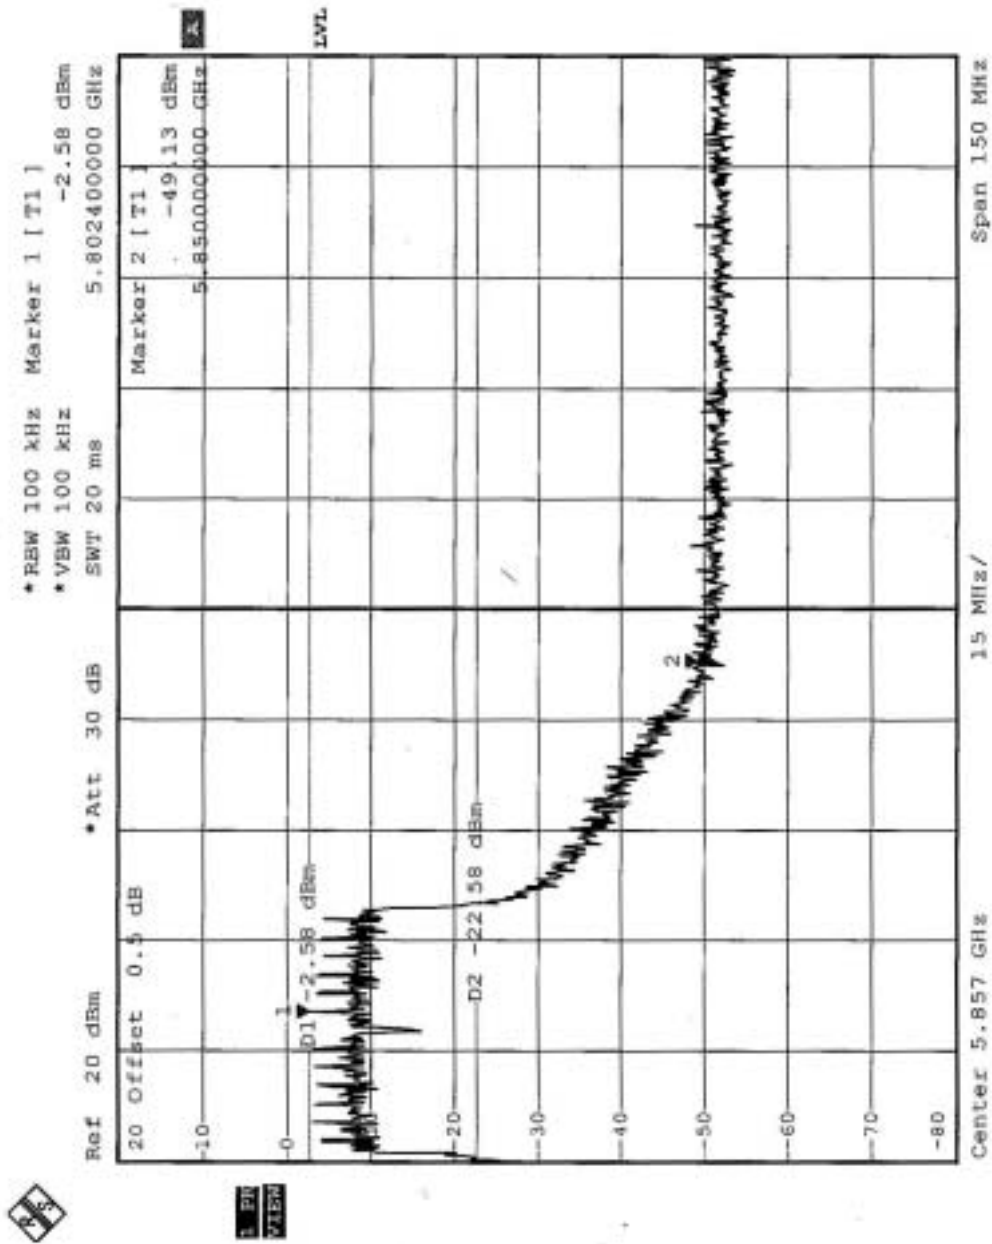





5.11.7 TEST RESULTS (Antenna 3)

The spectrum plots are attached on the following pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).




Normal Mode

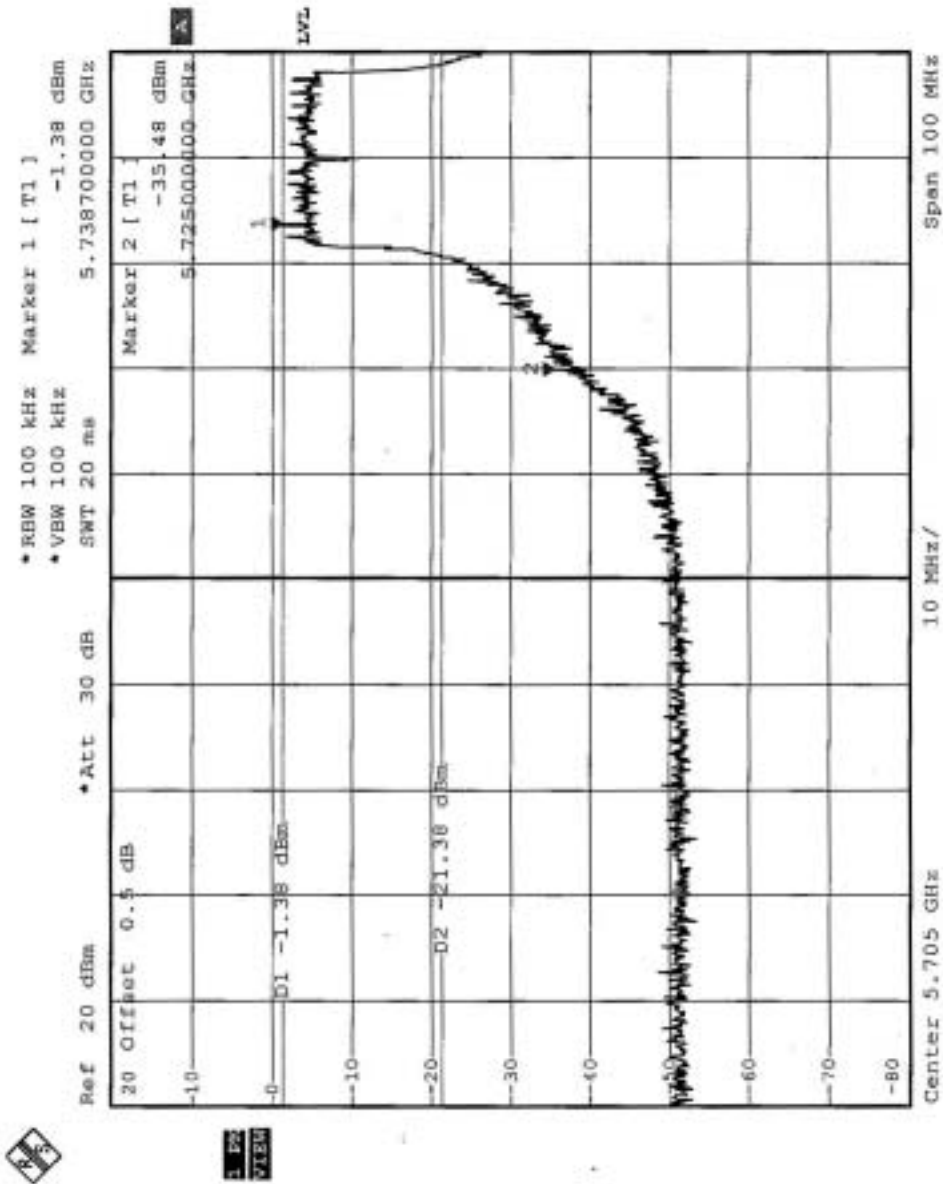


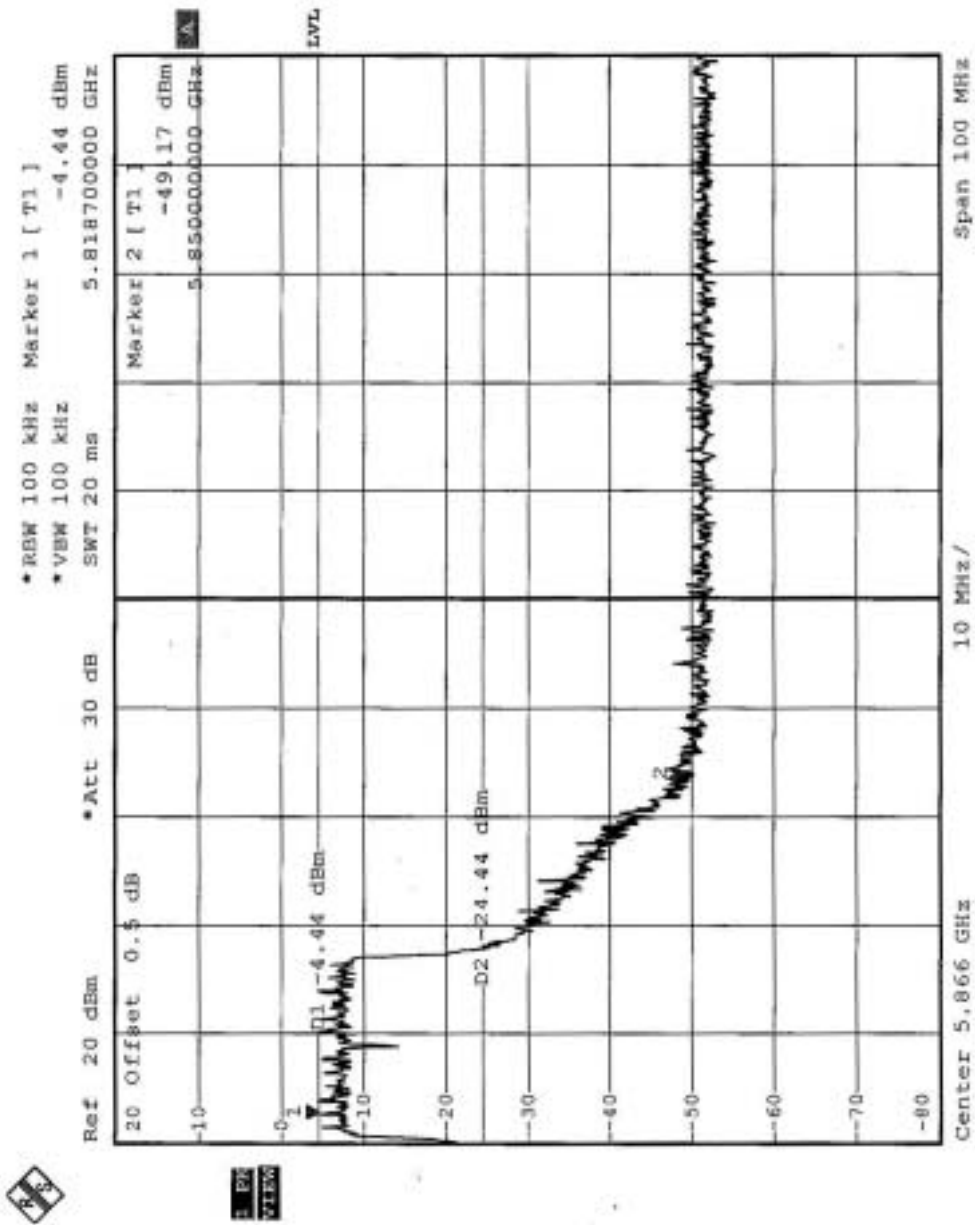



Turbo Mode

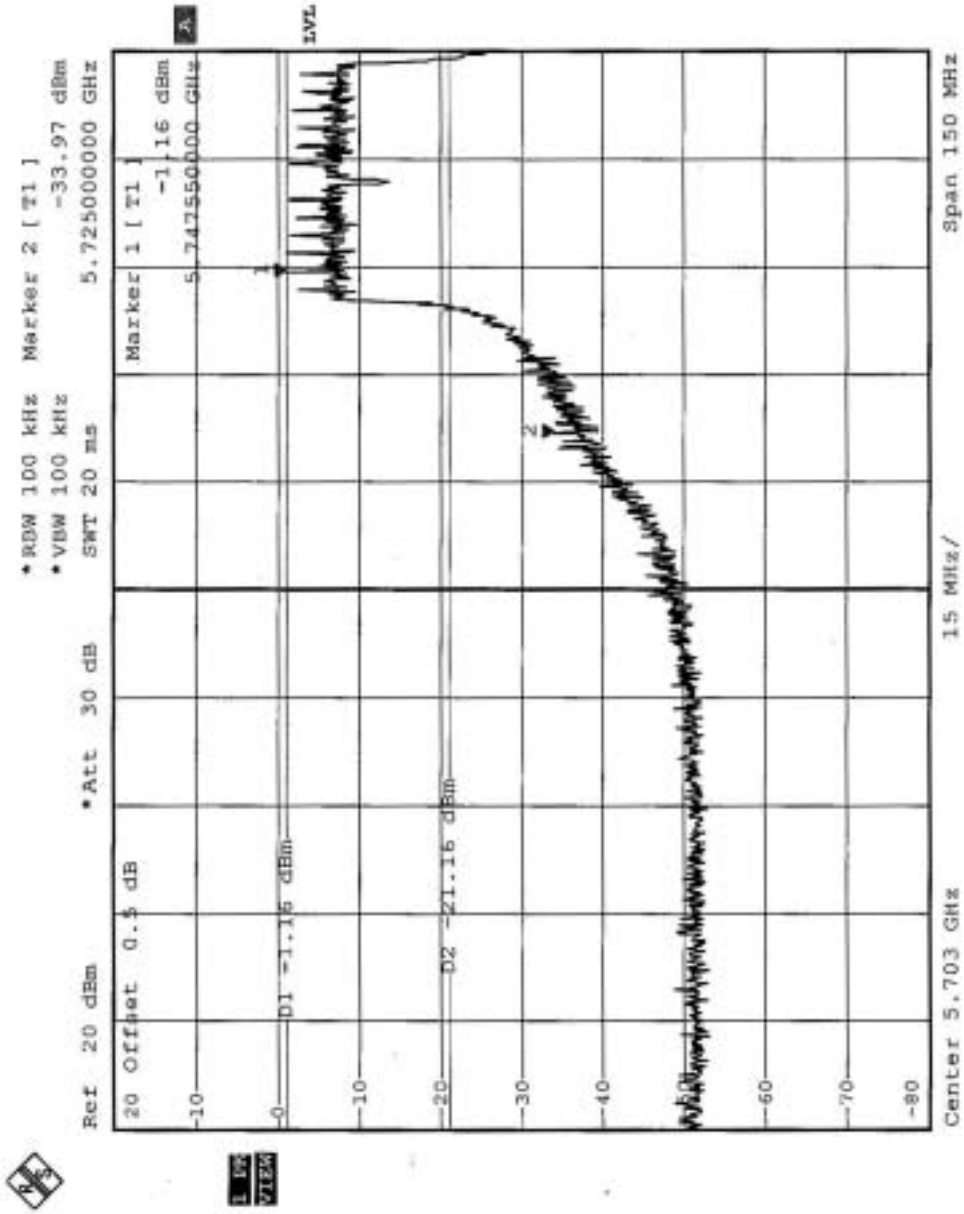

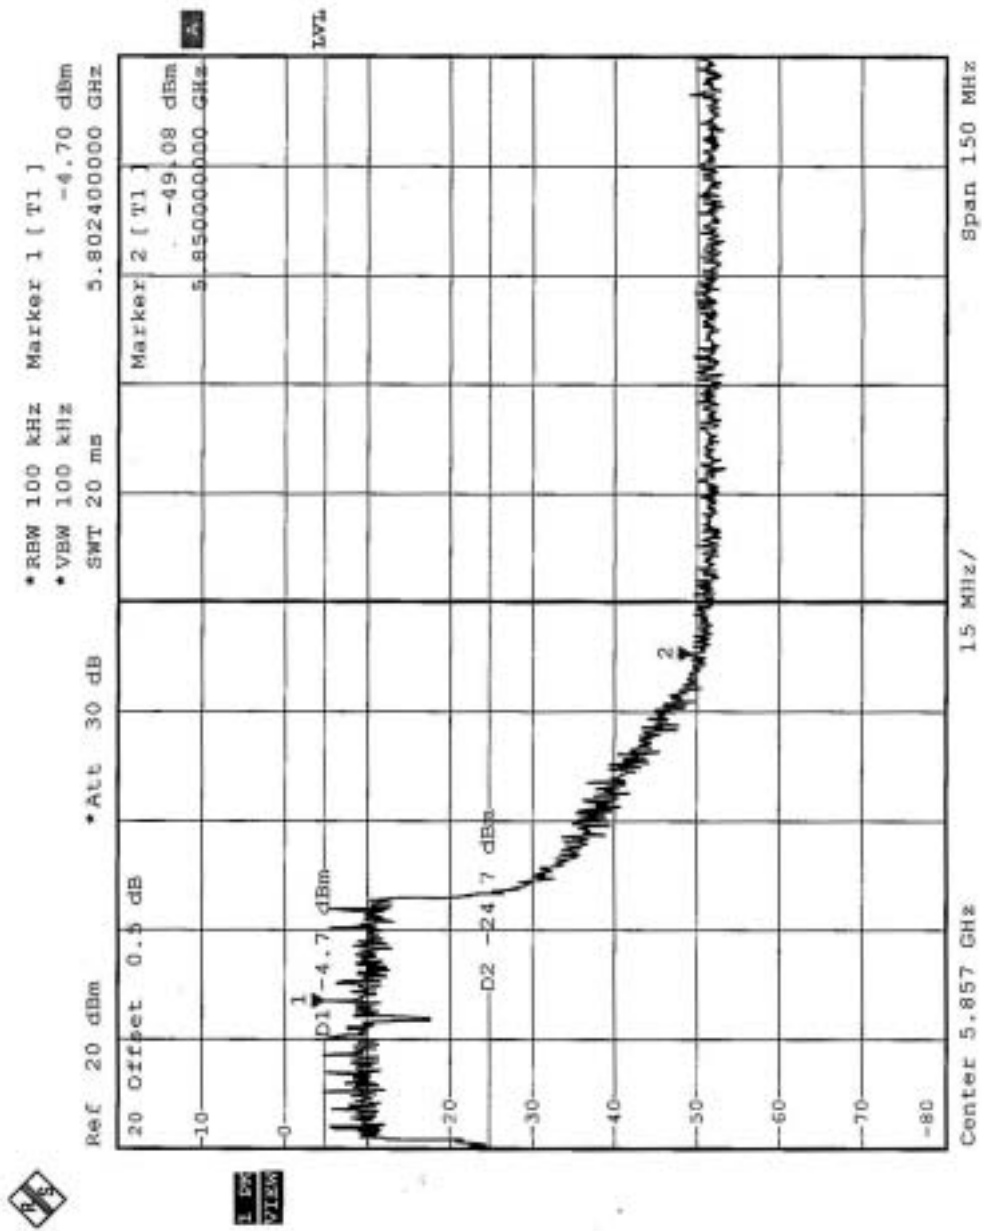



5.12 ANTENNA REQUIREMENT

5.12.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.12.2 ANTENNA CONNECTED CONSTRUCTION

The antennas used in this product are irectional, Patch Panel Antenna with Probe Pin connector and Dipole, Omni Antenna with N (Plug) connector and Directional, Patch Panel Antennas with female N (Jack) connectors.

Antenna 1: The maximum Gain of the antenna is 17.0dBi.

Antenna 2: The maximum Gain of the antenna is 8.0dBi.

Antenna 3: The maximum Gain of the antenna is 23.0dBi.


6. PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST (For 2.4GHz)




Antenna 1 (For 5GHz)



Antenna 2 (For 5GHz)

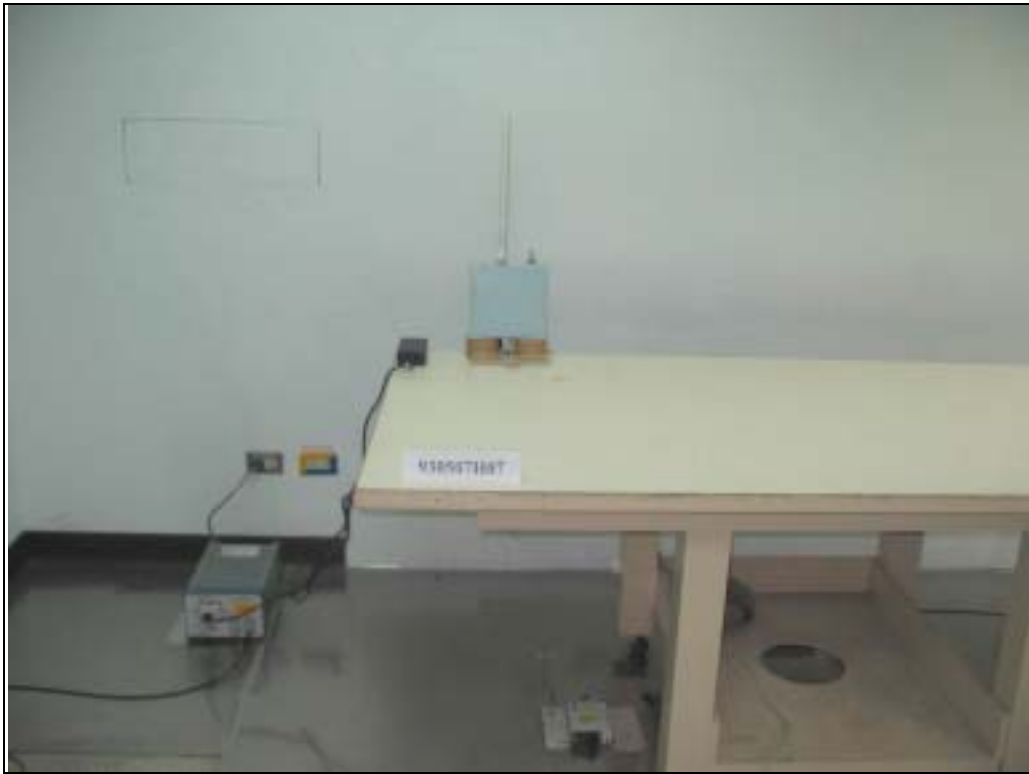

Antenna 3 (For 5GHz)

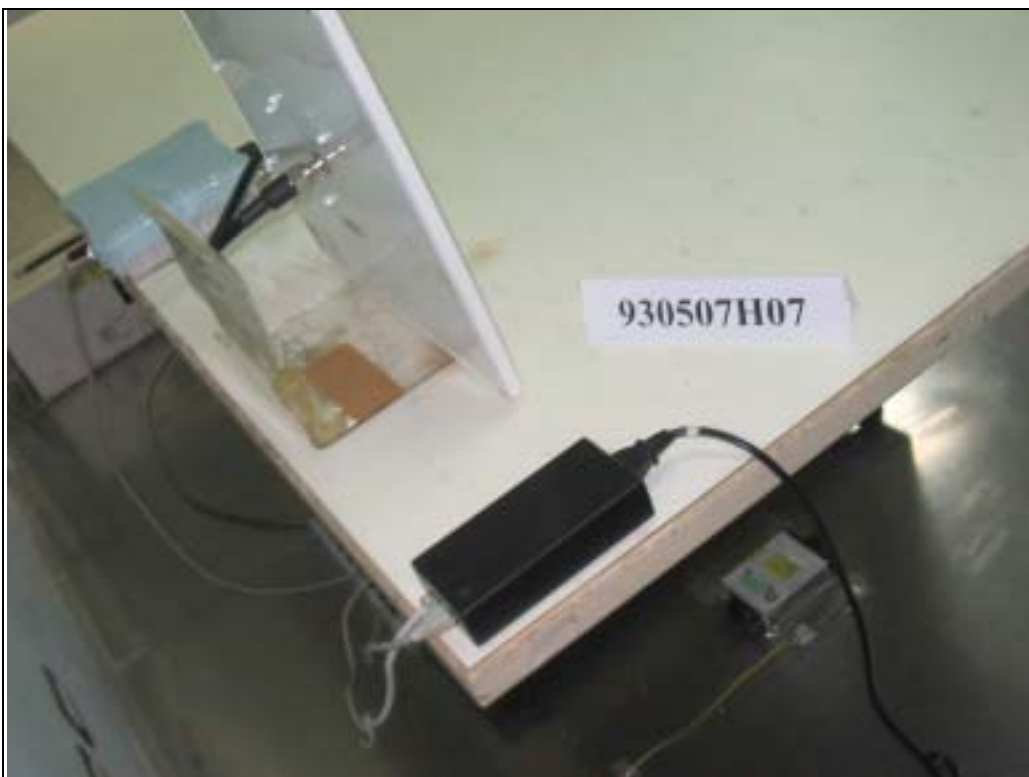

RADIATED EMISSION TEST (For 2.4GHz)



Antenna 1 (For 5GHz)



Antenna 2 (For 5GHz)



Antenna 3 (For 5GHz)





7. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.