



FCC TEST REPORT

REPORT NO.: RF140806E01
MODEL NO.: RU-835, RU-835-XXXX(X :0~9 , A~Z , Configuration Code)
FCC ID: MAD-RU-835
RECEIVED: Aug. 06, 2014
TESTED: Aug. 07 to 19, 2014
TESTEFFD: Nov. 13, 2014

APPLICANT: Microelectronics Technology Inc.

ADDRESS: 1, Innovation Road II, Hsinchu Science-based Industrial Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	7
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	10
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.5 DESCRIPTION OF SUPPORT UNITS.....	13
3.6 CONFIGURATION OF SYSTEM UNDER TEST	13
4 TEST PROCEDURES AND RESULTS	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	14
4.1.2 TEST INSTRUMENTS.....	14
4.1.3 TEST PROCEDURES	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	16
4.1.6 EUT OPERATING CONDITIONS.....	16
4.1.7 TEST RESULTS	17
4.2 NUMBER OF HOPPING FREQUENCY USED.....	19
4.2.1 LIMIT OF HOPPING FREQUENCY USED	19
4.2.2 TEST INSTRUMENTS.....	19
4.2.3 TEST PROCEDURES	19
4.2.4 DEVIATION FROM TEST STANDARD	19
4.2.5 TEST SETUP	20
4.2.6 TEST RESULTS	20
4.3 DWELL TIME ON EACH CHANNEL.....	21
4.3.1 LIMIT OF DWELL TIME USED	21
4.3.2 TEST INSTRUMENTS.....	21
4.3.3 TEST PROCEDURES	22
4.3.4 DEVIATION FROM TEST STANDARD	22
4.3.5 TEST SETUP	22
4.3.6 TEST RESULTS	23
4.4 CHANNEL BANDWIDTH	24
4.4.1 TEST INSTRUMENTS.....	24
4.4.2 TEST PROCEDURE.....	24
4.4.3 DEVIATION FROM TEST STANDARD	25
4.4.4 TEST SETUP	25
4.4.5 EUT OPERATING CONDITION.....	25
4.4.6 TEST RESULTS	26
4.5 HOPPING CHANNEL SEPARATION.....	27



A D T

4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION	27
4.5.2	TEST INSTRUMENTS	27
4.5.3	TEST PROCEDURES	27
4.5.4	DEVIATION FROM TEST STANDARD	27
4.5.5	TEST SETUP	27
4.5.6	TEST RESULTS	28
4.6	MAXIMUM PEAK OUTPUT POWER	29
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	29
4.6.2	INSTRUMENTS	29
4.6.3	TEST PROCEDURES	29
4.6.4	DEVIATION FROM TEST STANDARD	30
4.6.5	TEST SETUP	30
4.6.6	EUT OPERATING CONDITION	30
4.6.7	TEST RESULTS	30
4.7	RADIATED EMISSION AND BANDEDGE MEASUREMENT	31
4.7.1	LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	31
4.7.2	TEST INSTRUMENTS	32
4.7.3	TEST PROCEDURES	33
4.7.4	DEVIATION FROM TEST STANDARD	33
4.7.5	TEST SETUP	34
4.7.6	EUT OPERATING CONDITION	34
4.7.7	TEST RESULTS (MODE 1)	35
4.7.8	TEST RESULTS (MODE 2)	41
4.8	CONDUCTED OUT-BAND EMISSION MEASUREMENT	47
4.8.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	47
4.8.2	TEST INSTRUMENTS	47
4.8.3	TEST PROCEDURE	47
4.8.4	DEVIATION FROM TEST STANDARD	47
4.8.5	TEST SETUP	47
4.8.6	EUT OPERATING CONDITION	47
4.8.7	TEST RESULTS	48
5	INFORMATION ON THE TESTING LABORATORIES	49
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	50



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140806E01	Original release	Nov. 13, 2014



A D T

1 CERTIFICATION

PRODUCT : MINI ME II
BRAND NAME : MTI
MODEL NO. : RU-835, RU-835-XXXX(X :0~9 , A~Z , Configuration Code)
APPLICANT : Microelectronics Technology Inc.
TESTED DATE: Aug. 07 to 19, 2014
TEST SAMPLE : ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2009

The above equipment (Model: RU-835) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Nov. 13, 2014
(Elsie Hsu, Specialist)

APPROVED BY :  , **DATE:** Nov. 13, 2014
(May Chen, Manager)



A D T

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -12.51dB at 0.49766 MHz
15.247(a)(1) (i)	Number of Hopping Frequency Used Spec.:	PASS	Meet the requirement of limit
15.247(a)(1) (i)	Dwell Time on Each Channel Spec. : Max. 0.4 second	PASS	Meet the requirement of limit
15.247(a)(1)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, which ever is greater	PASS	Meet the requirement of limit
15.247(a)(1)(i)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System Spec.: Max. 0.5 MHz	PASS	Meet the requirement of limit
15.247(b)(2)	Maximum Peak Output Power	PASS	Meet the requirement of limit
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -6.2dB at 9147.50MHz
15.247(d)	Conducted Out-Band Emission Measurement	PASS	Meet the requirement of limit
15.203	Antenna Requirement	-	Antenna connector is MMCX not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz ~6GHz)	3.65 dB
Radiated emissions (6GHz ~18GHz)	3.88 dB



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	MINI ME II
MODEL NO.	RU-835, RU-835-XXXX(X :0~9 , A~Z , Configuration Code)
POWER SUPPLY	DC 5V
MODULATION TYPE	ASK
MODULATION TECHNOLOGY	FHSS
FREQUENCY RANGE	902.75MHz ~ 927.25MHz
NUMBER OF CHANNEL	50
OUTPUT POWER	70.632mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

- The EUT has below model names which are identical to each other in all aspects except for the following table:

Brand	Model No.	Difference
MTI	RU-835	For marketing requirement
	RU-835-XXXX (X :0~9 , A~Z , Configuration Code)	

From the above models, model: **RU-835** was selected as representative model for the test and their data were recorded in this report.

- The antennas provided to the EUT, please refer to the following table:

Ant. No.	Antenna Type	Gain(dBi) (Include cable loss)	Antenna Connector	Cable Loss(dB)	Frequency range (MHz to MHz)
1	Patch	6	MMCX	NA	902~928
2	Dipole	0	MMCX	NA	902~928

- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

50 channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	902.75	21	913.25	42	923.75
1	903.25	22	913.75	43	924.25
2	903.75	23	914.25	44	924.75
3	904.25	24	914.75	45	925.25
4	904.75	25	915.25	46	925.75
5	905.25	26	915.75	47	926.25
6	905.75	27	916.25	48	926.75
7	906.25	28	916.75	49	927.25
8	906.75	29	917.25		
9	907.25	30	917.75		
10	907.75	31	918.25		
11	908.25	32	918.75		
12	908.75	33	919.25		
13	909.25	34	919.75		
14	909.75	35	920.25		
15	910.25	36	920.75		
16	910.75	37	921.25		
17	911.25	38	921.75		
18	911.75	39	922.25		
19	912.25	40	922.75		
20	912.75	41	923.25		



3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
1	√	√	√	√	√	Antenna No.: 1 (Patch Antenna)
2	-	√	√	-	-	Antenna No.: 2 (Dipole Antenna)

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

Power Line Conducted Emission:

- Pre-Scan to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 49	24	FHSS	ASK

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 49	0, 24, 49	FHSS	ASK

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 49	0, 24, 49	FHSS	ASK



A D T

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 49	0, 24, 49	FHSS	ASK

Conducted Out-Band Emission Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 49	0, 49	FHSS	ASK

※ **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	30deg. C, 70%RH	120Vac, 60 Hz	Mike Hsieh
RE ³ 1G	26deg. C, 67%RH	120Vac, 60 Hz	Andy Ho
RE<1G	26deg. C, 72%RH	120Vac, 60 Hz	Andy Ho
	22deg. C, 69%RH		
	20deg. C, 66%RH		
APCM	25deg. C, 60%RH	120Vac, 60 Hz	James Chan
OB	25deg. C, 60%RH	120Vac, 60 Hz	James Chan



A D T

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	NOTEBOOK COMPUTER	DELL	E6420	H62T3R1	FCC DoC	Provided by Lab
B	USB to micro USB connector	NA	NA	NA	NA	Supplied by Client
C	iPod shuffle	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab

NOTE:


1. All power cords of the above support units are non-shielded (1.8 m).

No.	Cable	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Number)	Remark
1	USB	1	1.8	Yes	2	Provided by Lab

NOTE:

1. The core(s) is(are) originally attached to the cable(s).

3.6 CONFIGURATION OF SYSTEM UNDER TEST





A D T

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 12, 2013	Sep. 11, 2014
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100071	Nov. 13, 2013	Nov. 12, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10, 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 24, 2013	Sep. 23, 2014
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2013	Sep. 30, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Aug. 14, 2014



A D T

4.1.3 TEST PROCEDURES

- a. The EUT/HOST placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

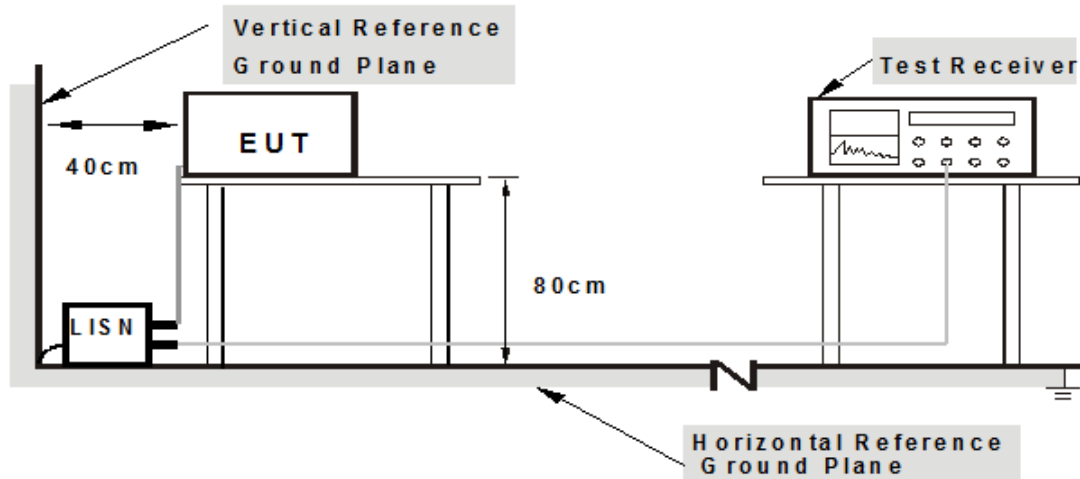

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on the testing table.
2. The support unit 1 (NB) ran test program “MTI RFID ME Setup v1.0.19” to enable EUT under transmission condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.49766	0.10	33.67	32.84	33.77	32.94	56.04	46.04	-22.27	-13.10
2	0.94297	0.13	19.66	13.55	19.79	13.68	56.00	46.00	-36.21	-32.32
3	1.60547	0.15	22.66	15.40	22.81	15.55	56.00	46.00	-33.19	-30.45
4	4.60938	0.28	20.60	11.41	20.88	11.69	56.00	46.00	-35.12	-34.31
5	8.08594	0.39	18.82	11.10	19.21	11.49	60.00	50.00	-40.79	-38.51
6	13.00000	0.53	24.45	17.78	24.98	18.31	60.00	50.00	-35.02	-31.69

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually
2. The emission levels of other frequencies were very low against the limit
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

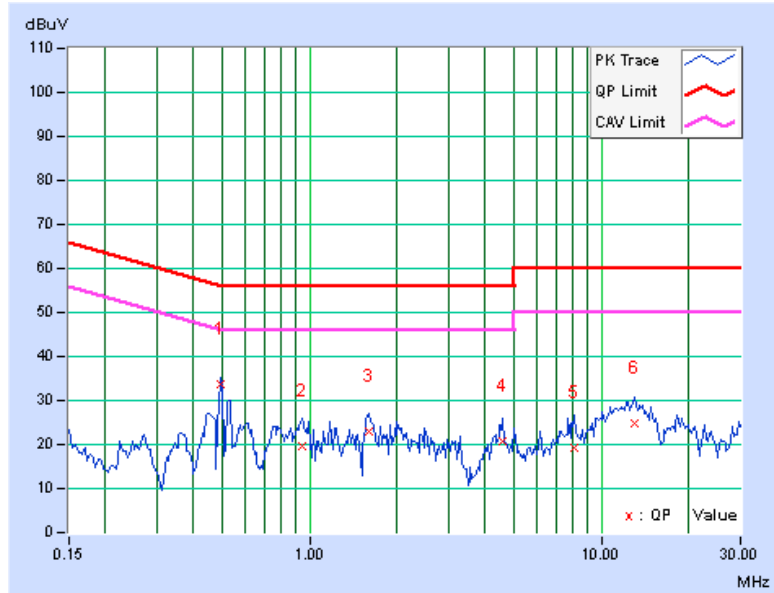




A D T

PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.49766	0.10	34.84	33.43	34.94	33.53	56.04	46.04	-21.10	-12.51
2	0.93516	0.13	23.88	17.78	24.01	17.91	56.00	46.00	-31.99	-28.09
3	1.83984	0.17	19.88	13.77	20.05	13.94	56.00	46.00	-35.95	-32.06
4	7.63672	0.38	22.35	13.30	22.73	13.68	60.00	50.00	-37.27	-36.32
5	12.71484	0.52	25.38	17.90	25.90	18.42	60.00	50.00	-34.10	-31.58
6	18.62891	0.67	23.09	16.22	23.76	16.89	60.00	50.00	-36.24	-33.11

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually
2. The emission levels of other frequencies were very low against the limit
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

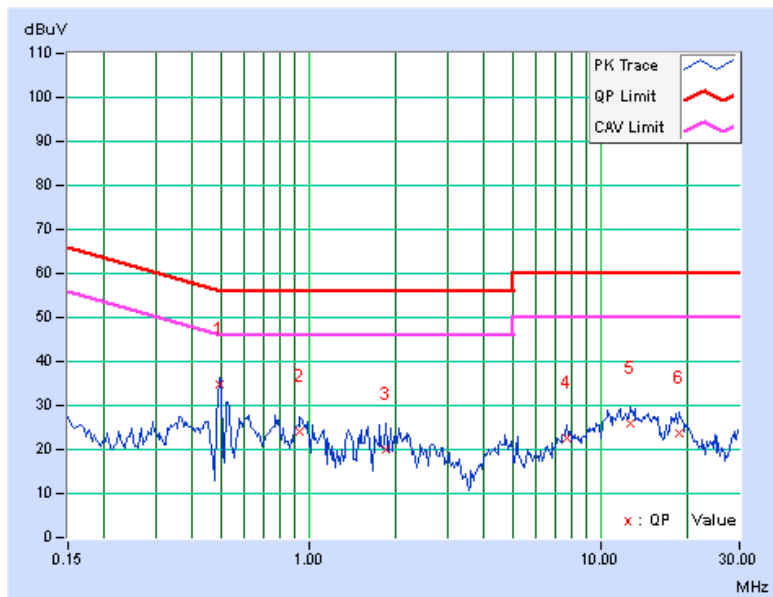

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

CONDITION	HOPPING FREQUENCY USED	APPLICATION
20dB Bandwidth <250kHz	hopping channels ≥ 50	v
20dB Bandwidth >250kHz	hopping channels ≥ 25	x

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 14, 2014


4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP



4.2.6 TEST RESULTS

There are 50 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

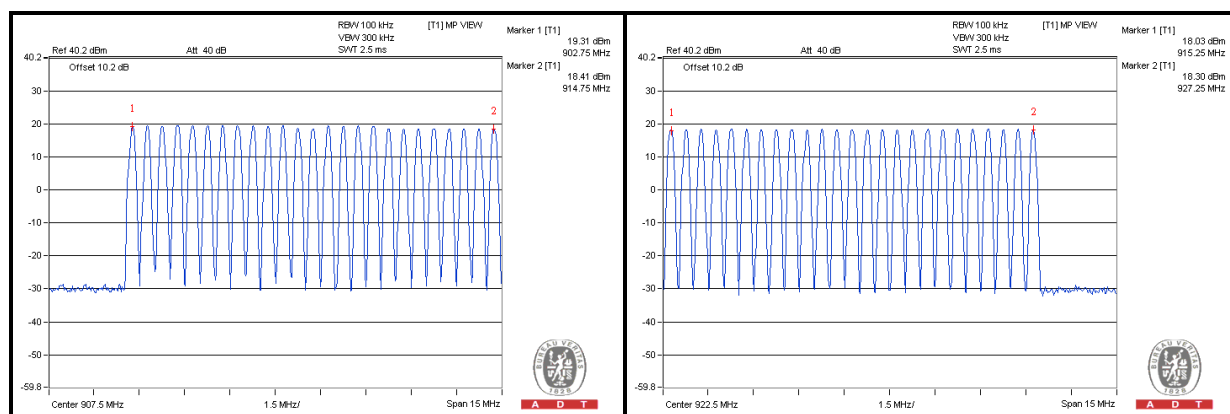

4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than as below:

CONDITION	DWELL TIME	APPLICATION
20dB Bandwidth <250kHz (hopping channels ≥ 50)	0.4 seconds within a 20 second period	v
20dB Bandwidth >250kHz (hopping channels ≥ 25)	0.4 seconds within a 10 second period	x

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 14, 2014


4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD


No deviation

4.3.5 TEST SETUP



4.3.6 TEST RESULTS

Number of transmission in a 20 s	Length of transmission time (msec)	Result (msec)	Limit (msec)
7 time	16	112	400

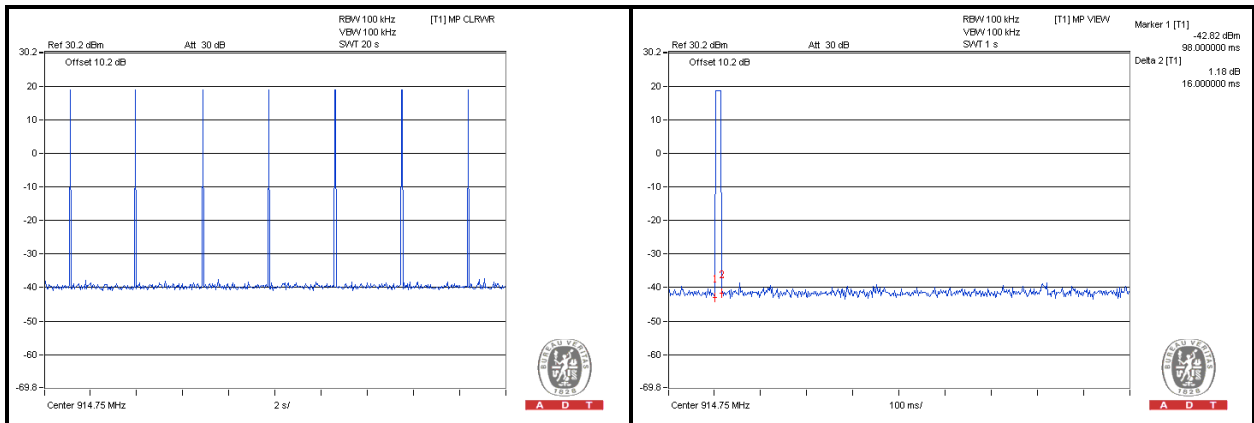



4.4 CHANNEL BANDWIDTH

For frequency hopping system operating in the 902-928MHz, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

CONDITION	APPLICATION
20dB Bandwidth <250kHz (hopping channels ≥ 50)	V
20dB Bandwidth >250kHz (hopping channels ≥ 25)	X

4.4.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 14, 2014


4.4.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



A D T

4.4.6 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	902.75	0.15
24	914.75	0.14
49	927.25	0.13

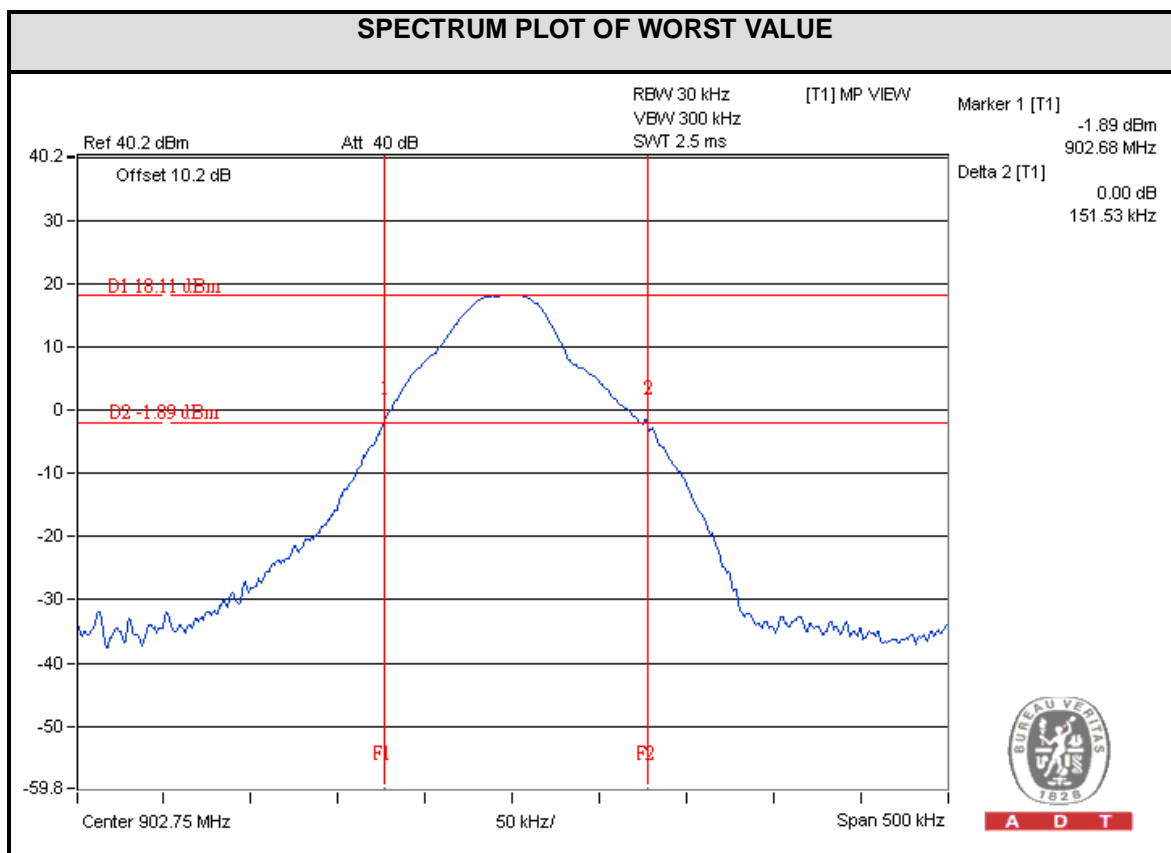

A D T

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or 20dB hopping channel bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 14, 2014


4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP






A D T

4.5.6 TEST RESULTS

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)	Pass / Fail
0	902.75	0.50	0.15	PASS
24	914.75	0.51	0.14	PASS
49	927.25	0.51	0.13	PASS

The minimum limit is 20dB bandwidth.

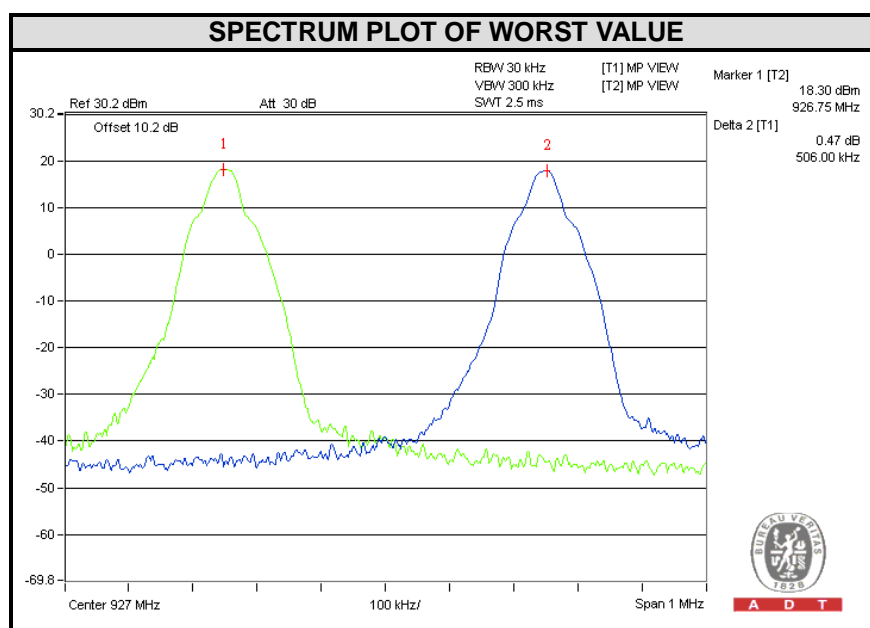



A D T

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement as below:

CONDITION	OUTPUT POWER	APPLICATION
hopping channels ≥ 50	1 W	v
hopping channels ≥ 25 & ≤ 50	0.25W	x

4.6.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 14, 2014


4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 10 MHz VBW.
4. Measure the captured power within the band and recording the plot.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITION

The software (MTI RFID ME Setup v1.0.19) provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	902.75	70.307	18.47	1000	PASS
24	914.75	70.632	18.49	1000	PASS
49	927.25	69.984	18.45	1000	PASS

4.7 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21,2014	July 20,2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Aug. 07 to 08, 2014

4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

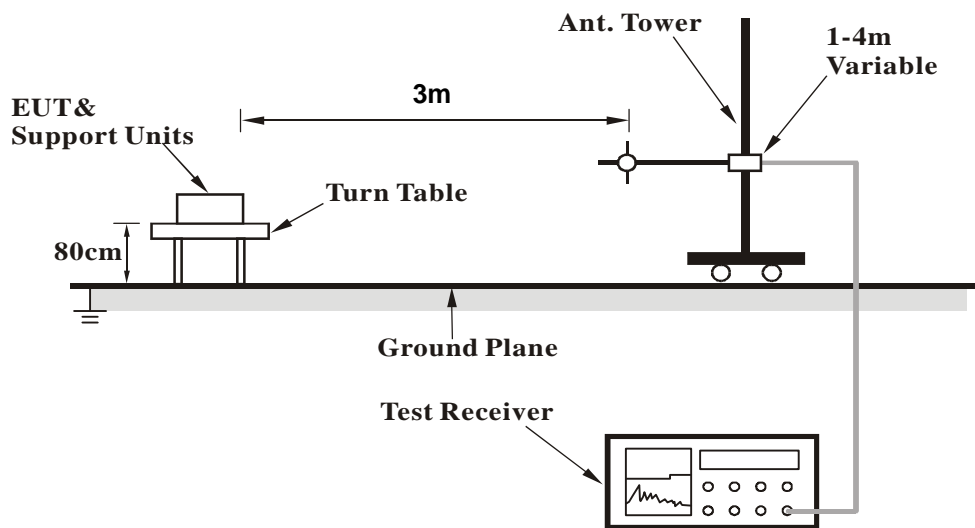

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITION

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.



4.7.7 TEST RESULTS (MODE 1)

BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	156.50	29.0 QP	43.5	-14.5	1.50 H	160	42.16	-13.15
2	166.29	32.0 QP	43.5	-11.5	1.50 H	116	45.48	-13.51
3	240.01	33.5 QP	46.0	-12.5	1.00 H	179	48.29	-14.77
4	283.85	32.2 QP	46.0	-13.9	1.00 H	236	45.00	-12.85
5	335.99	29.4 QP	46.0	-16.6	1.00 H	273	40.71	-11.34
6	608.00	32.5 QP	46.0	-13.5	1.00 H	59	37.09	-4.63
7	902.00	45.80 QP	98.42	-52.62	1.24 H	1	18.13	27.67
8	*902.75	118.42 QP	-	-	1.24 H	1	90.74	27.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.22	32.9 QP	40.0	-7.1	1.50 V	12	46.83	-13.90
2	115.94	26.1 QP	43.5	-17.4	1.50 V	193	41.82	-15.68
3	165.99	35.7 QP	43.5	-7.8	1.00 V	174	49.18	-13.49
4	335.40	25.3 QP	46.0	-20.7	1.50 V	148	36.69	-11.36
5	608.37	31.2 QP	46.0	-14.8	1.00 V	325	35.85	-4.61
6	618.50	31.6 QP	46.0	-14.4	1.00 V	347	36.01	-4.44
7	902.00	47.74 QP	100.56	-52.82	1.00 V	360	20.07	27.67
8	*902.75	120.56 QP	-	-	1.00 V	360	92.87	27.69

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 24	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	156.50	29.0 QP	43.5	-14.5	1.50 H	160	42.19	-13.15
2	166.22	32.1 QP	43.5	-11.4	1.00 H	211	45.63	-13.51
3	240.00	32.5 QP	46.0	-13.6	1.00 H	182	47.22	-14.77
4	283.83	32.2 QP	46.0	-13.8	1.00 H	233	45.08	-12.85
5	335.88	29.3 QP	46.0	-16.7	1.00 H	214	40.64	-11.34
6	608.00	32.4 QP	46.0	-13.6	1.00 H	332	37.04	-4.63
7	*914.76	118.89 QP	-	-	1.16 H	345	90.86	28.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.20	32.2 QP	40.0	-7.8	1.50 V	341	46.10	-13.90
2	115.36	25.7 QP	43.5	-17.8	1.00 V	202	41.46	-15.76
3	166.02	37.2 QP	43.5	-6.3	1.00 V	307	50.70	-13.49
4	335.41	26.1 QP	46.0	-19.9	1.50 V	344	37.47	-11.35
5	607.32	31.2 QP	46.0	-14.8	1.00 V	220	35.88	-4.66
6	618.45	31.1 QP	46.0	-14.9	1.00 V	341	35.56	-4.44
7	*914.75	119.15 QP	-	-	1.00 V	356	91.12	28.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 49	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	156.51	29.1 QP	43.5	-14.5	1.50 H	160	42.20	-13.15
2	166.21	32.7 QP	43.5	-10.8	1.00 H	331	46.20	-13.51
3	240.00	32.4 QP	46.0	-13.6	1.00 H	170	47.19	-14.77
4	284.02	32.7 QP	46.0	-13.3	1.00 H	211	45.58	-12.85
5	335.88	29.4 QP	46.0	-16.6	1.00 H	214	40.71	-11.34
6	608.03	31.8 QP	46.0	-14.2	1.00 H	211	36.41	-4.63
7	*927.25	121.13 QP	-	-	1.15 H	351	92.87	28.26
8	928.00	48.17 QP	101.13	-52.96	1.15 H	351	19.88	28.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.27	32.0 QP	40.0	-8.0	1.00 V	23	45.92	-13.90
2	115.93	26.3 QP	43.5	-17.2	1.00 V	322	42.01	-15.68
3	165.91	35.2 QP	43.5	-8.3	1.00 V	214	48.71	-13.48
4	335.40	25.2 QP	46.0	-20.8	1.50 V	123	36.56	-11.36
5	608.36	32.7 QP	46.0	-13.3	1.00 V	211	37.33	-4.61
6	618.50	31.5 QP	46.0	-14.5	1.00 V	24	35.94	-4.44
7	*927.25	120.57 QP	-	-	1.00 V	356	92.31	28.26
8	928.00	48.96 QP	100.57	-51.61	1.00 V	356	20.67	28.29

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

ABOVE 1GHz DATA

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 10GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2708.25	40.2 PK	74.0	-33.8	1.00 H	326	41.98	-1.78
2	2708.25	27.7 AV	54.0	-26.3	1.00 H	326	29.48	-1.78
3	3611.00	42.8 PK	74.0	-31.2	1.16 H	231	42.08	0.72
4	3611.00	29.5 AV	54.0	-24.5	1.16 H	231	28.78	0.72
5	4513.75	45.5 PK	74.0	-28.5	1.05 H	224	41.39	4.11
6	4513.75	32.3 AV	54.0	-21.7	1.05 H	224	28.19	4.11
7	5416.50	48.1 PK	74.0	-25.9	1.12 H	254	40.81	7.29
8	5416.50	35.0 AV	54.0	-19.0	1.12 H	254	27.71	7.29
9	8124.75	53.5 PK	74.0	-20.5	1.13 H	105	41.35	12.15
10	8124.75	40.2 AV	54.0	-13.8	1.13 H	105	28.05	12.15
11	9027.50	53.5 PK	74.0	-20.5	1.00 H	213	41.76	11.74
12	9027.50	40.4 AV	54.0	-13.60	1.00 H	213	28.66	11.74

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2708.25	40.7 PK	74.0	-33.3	1.00 V	254	42.48	-1.78
2	2708.25	28.3 AV	54.0	-25.7	1.00 V	254	30.08	-1.78
3	3611.00	42.9 PK	74.0	-31.1	1.10 V	302	42.18	0.72
4	3611.00	29.5 AV	54.0	-24.5	1.10 V	302	28.78	0.72
5	4513.75	45.6 PK	74.0	-28.4	1.05 V	284	41.49	4.11
6	4513.75	32.5 AV	54.0	-21.5	1.05 V	284	28.39	4.11
7	5416.50	48.2 PK	74.0	-25.8	1.00 V	242	40.91	7.29
8	5416.50	35.1 AV	54.0	-18.9	1.00 V	242	27.81	7.29
9	8124.75	53.5 PK	74.0	-20.5	1.21 V	312	41.35	12.15
10	8124.75	40.2 AV	54.0	-13.8	1.21 V	312	28.05	12.15
11	9027.50	54.0 PK	74.0	-20.0	1.22 V	256	42.26	11.74
12	9027.50	40.4 AV	54.0	-13.60	1.22 V	256	28.66	11.74

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 24	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 10GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2744.25	40.8 PK	74.0	-33.2	1.10 H	338	42.49	-1.69
2	2744.25	28.2 AV	54.0	-25.8	1.10 H	338	29.89	-1.69
3	3659.00	42.3 PK	74.0	-31.7	1.13 H	239	41.35	0.95
4	3659.00	29.3 AV	54.0	-24.7	1.13 H	239	28.35	0.95
5	4573.75	45.5 PK	74.0	-28.5	1.04 H	226	41.23	4.27
6	4573.75	32.2 AV	54.0	-21.8	1.04 H	226	27.93	4.27
7	7318.00	48.4 PK	74.0	-25.6	1.10 H	225	35.69	12.71
8	7318.00	35.6 AV	54.0	-18.4	1.10 H	225	22.89	12.71
9	8232.75	53.2 PK	74.0	-20.8	1.15 H	111	41.14	12.06
10	8232.75	40.3 AV	54.0	-13.7	1.15 H	111	28.24	12.06
11	9147.50	54.1 PK	74.0	-19.9	1.00 H	224	42.46	11.64
12	9147.50	40.5 AV	54.0	-13.5	1.00 H	224	28.86	11.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2744.25	40.9 PK	74.0	-33.1	1.03 V	245	42.59	-1.69
2	2744.25	27.8 AV	54.0	-26.2	1.03 V	245	29.49	-1.69
3	3659.00	42.5 PK	74.0	-31.5	1.05 V	312	41.55	0.95
4	3659.00	29.1 AV	54.0	-24.9	1.05 V	312	28.15	0.95
5	4573.75	45.6 PK	74.0	-28.4	1.02 V	292	41.33	4.27
6	4573.75	32.5 AV	54.0	-21.5	1.02 V	292	28.23	4.27
7	7318.00	48.6 PK	74.0	-25.4	1.03 V	252	35.89	12.71
8	7318.00	35.4 AV	54.0	-18.6	1.03 V	252	22.69	12.71
9	8232.75	53.6 PK	74.0	-20.4	1.22 V	301	41.54	12.06
10	8232.75	40.3 AV	54.0	-13.7	1.22 V	301	28.24	12.06
11	9147.50	54.2 PK	74.0	-19.8	1.21 V	243	42.56	11.64
12	9147.50	40.5 AV	54.0	-13.5	1.21 V	243	28.86	11.64

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 49	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 10GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2781.75	39.7 PK	74.0	-34.3	1.03 H	335	41.30	-1.60
2	2781.75	27.4 AV	54.0	-26.6	1.03 H	335	29.00	-1.60
3	3709.00	42.7 PK	74.0	-31.3	1.17 H	229	41.53	1.17
4	3709.00	29.2 AV	54.0	-24.8	1.17 H	229	28.03	1.17
5	4636.25	45.2 PK	74.0	-28.8	1.03 H	230	40.73	4.47
6	4636.25	31.9 AV	54.0	-22.1	1.03 H	230	27.43	4.47
7	7418.00	48.3 PK	74.0	-25.7	1.08 H	223	35.65	12.65
8	7418.00	35.2 AV	54.0	-18.8	1.08 H	223	22.55	12.65
9	8345.25	54.0 PK	74.0	-20.0	1.03 H	238	42.08	11.92
10	8345.25	40.2 AV	54.0	-13.8	1.03 H	238	28.28	11.92

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2781.75	40.3 PK	74.0	-33.7	1.03 V	242	41.90	-1.60
2	2781.75	27.8 AV	54.0	-26.2	1.03 V	242	29.40	-1.60
3	3709.00	43.4 PK	74.0	-30.6	1.15 V	318	42.23	1.17
4	3709.00	29.9 AV	54.0	-24.1	1.15 V	318	28.73	1.17
5	4636.25	45.7 PK	74.0	-28.3	1.09 V	277	41.23	4.47
6	4636.25	32.6 AV	54.0	-21.4	1.09 V	277	28.13	4.47
7	7418.00	48.7 PK	74.0	-25.3	1.05 V	249	36.05	12.65
8	7418.00	35.3 AV	54.0	-18.7	1.05 V	249	22.65	12.65
9	8345.25	54.1 PK	74.0	-19.9	1.19 V	248	42.18	11.92
10	8345.25	40.2 AV	54.0	-13.8	1.19 V	248	28.28	11.92

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.7.8 TEST RESULTS (MODE 2)

BELOW 1GHZ WORST-CASE DATA

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	166.29	29.2 QP	43.5	-14.4	2.00 H	193	42.66	-13.51
2	240.01	35.5 QP	46.0	-10.6	1.00 H	157	50.22	-14.77
3	268.38	35.7 QP	46.0	-10.3	1.00 H	155	49.21	-13.52
4	324.01	28.0 QP	46.0	-18.0	1.00 H	135	39.57	-11.59
5	399.96	25.9 QP	46.0	-20.1	1.00 H	138	35.67	-9.73
6	600.31	32.9 QP	46.0	-13.1	1.50 H	9	37.82	-4.88
7	902.00	42.27 QP	94.44	-52.17	1.57 H	60	14.60	27.67
8	*902.75	114.44 QP	-	-	1.57 H	60	86.76	27.68
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	115.65	29.2 QP	43.5	-14.3	1.50 V	282	44.89	-15.72
2	154.40	28.5 QP	43.5	-15.0	1.00 V	111	41.53	-13.05
3	166.29	32.5 QP	43.5	-11.1	1.00 V	134	45.96	-13.51
4	240.01	27.7 QP	46.0	-18.4	1.00 V	136	42.42	-14.77
5	277.45	29.0 QP	46.0	-17.0	1.00 V	104	42.11	-13.11
6	606.52	28.4 QP	46.0	-17.6	1.00 V	125	33.14	-4.71
7	902.00	44.33 QP	97.16	-52.83	1.19 V	68	16.66	27.67
8	*902.75	117.16 QP	-	-	1.19 V	68	89.48	27.68

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 24	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	166.29	33.2 QP	43.5	-10.4	2.00 H	193	46.66	-13.51
2	240.01	36.3 QP	46.0	-9.7	1.00 H	214	51.11	-14.77
3	268.38	37.7 QP	46.0	-8.3	1.00 H	214	51.25	-13.52
4	324.01	31.2 QP	46.0	-14.8	1.00 H	216	42.80	-11.59
5	399.96	28.9 QP	46.0	-17.1	1.00 H	198	38.65	-9.73
6	600.31	35.0 QP	46.0	-11.0	1.16 H	219	39.86	-4.88
7	*914.75	112.64 QP	-	-	1.00 H	25	84.61	28.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	115.65	33.3 QP	43.5	-10.2	1.00 V	147	48.98	-15.72
2	154.40	33.4 QP	43.5	-10.1	1.00 V	105	46.41	-13.05
3	166.29	35.6 QP	43.5	-7.9	1.00 V	226	49.14	-13.51
4	240.01	33.7 QP	46.0	-12.3	1.00 V	226	48.50	-14.77
5	277.45	36.0 QP	46.0	-10.0	1.00 V	207	49.11	-13.11
6	606.52	34.4 QP	46.0	-11.6	1.00 V	265	39.09	-4.71
7	*914.75	116.59 QP	-	-	1.09 V	111	88.56	28.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 49	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	166.29	34.4 QP	43.5	-9.1	1.50 H	142	47.87	-13.51
2	240.01	37.4 QP	46.0	-8.6	1.06 H	167	52.16	-14.77
3	268.38	36.8 QP	46.0	-9.2	1.00 H	146	50.28	-13.52
4	324.01	34.0 QP	46.0	-12.0	1.00 H	267	45.62	-11.59
5	399.96	33.9 QP	46.0	-12.1	1.00 H	226	43.65	-9.73
6	600.31	35.9 QP	46.0	-10.1	1.00 H	147	40.79	-4.88
7	*927.25	115.34 QP	-	-	1.40 H	58	87.08	28.26
8	928.00	44.24 QP	95.34	-51.10	1.40 H	58	15.95	28.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	115.65	33.2 QP	43.5	-10.3	1.50 V	287	48.91	-15.72
2	154.40	34.5 QP	43.5	-9.0	1.00 V	145	47.51	-13.05
3	166.29	35.4 QP	43.5	-8.1	1.00 V	251	48.90	-13.51
4	240.01	32.7 QP	46.0	-13.3	1.00 V	136	47.51	-14.77
5	277.45	35.0 QP	46.0	-11.0	1.00 V	223	48.11	-13.11
6	606.52	35.7 QP	46.0	-10.3	1.00 V	125	40.42	-4.71
7	*927.25	116.76 QP	-	-	1.13 V	111	88.50	28.26
8	928.00	45.38 QP	96.76	-51.38	1.13 V	111	17.09	28.29

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

ABOVE 1GHz DATA

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 10GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2708.25	46.6 PK	74.0	-27.4	1.24 H	269	48.38	-1.78
2	2708.25	33.7 AV	54.0	-20.3	1.24 H	269	35.48	-1.78
3	3611.00	48.2 PK	74.0	-25.8	1.05 H	54	47.48	0.72
4	3611.00	35.5 AV	54.0	-18.5	1.05 H	54	34.78	0.72
5	4513.75	51.1 PK	74.0	-22.9	1.21 H	305	46.99	4.11
6	4513.75	38.9 AV	54.0	-15.1	1.21 H	305	34.79	4.11
7	5416.50	54.3 PK	74.0	-19.7	1.30 H	211	47.01	7.29
8	5416.50	41.4 AV	54.0	-12.6	1.30 H	211	34.11	7.29
9	8124.75	59.6 PK	74.0	-14.4	1.13 H	105	47.45	12.15
10	8124.75	45.2 AV	54.0	-8.8	1.13 H	105	33.05	12.15
11	9027.50	59.2 PK	74.0	-14.8	1.21 H	214	47.46	11.74
12	9027.50	46.8 AV	54.0	-7.2	1.21 H	214	35.06	11.74

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2708.25	47.2 PK	74.0	-26.8	1.10 V	113	48.98	-1.78
2	2708.25	35.5 AV	54.0	-18.5	1.10 V	113	37.28	-1.78
3	3611.00	47.8 PK	74.0	-26.2	1.15 V	83	47.08	0.72
4	3611.00	35.3 AV	54.0	-18.7	1.15 V	83	34.58	0.72
5	4513.75	50.5 PK	74.0	-23.5	1.02 V	332	46.39	4.11
6	4513.75	38.3 AV	54.0	-15.7	1.02 V	332	34.19	4.11
7	5416.50	54.2 PK	74.0	-19.8	1.11 V	182	46.91	7.29
8	5416.50	41.3 AV	54.0	-12.7	1.11 V	182	34.01	7.29
9	8124.75	60.1 PK	74.0	-13.9	1.00 V	211	47.95	12.15
10	8124.75	46.5 AV	54.0	-7.5	1.00 V	211	34.35	12.15
11	9027.50	60.8 PK	74.0	-13.2	1.05 V	302	49.06	11.74
12	9027.50	47.2 AV	54.0	-6.8	1.05 V	302	35.46	11.74

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 24	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 10GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2744.25	46.1 PK	74.0	-27.9	1.25 H	253	47.79	-1.69
2	2744.25	34.1 AV	54.0	-19.9	1.25 H	253	35.79	-1.69
3	3659.00	47.9 PK	74.0	-26.1	1.03 H	65	46.95	0.95
4	3659.00	35.1 AV	54.0	-18.9	1.03 H	65	34.15	0.95
5	4573.75	51.0 PK	74.0	-23.0	1.16 H	319	46.73	4.27
6	4573.75	38.7 AV	54.0	-15.3	1.16 H	319	34.43	4.27
7	7318.00	53.8 PK	74.0	-20.2	1.14 H	58	41.09	12.71
8	7318.00	41.5 AV	54.0	-12.5	1.14 H	58	28.79	12.71
9	8232.75	58.2 PK	74.0	-15.8	1.15 H	315	46.14	12.06
10	8232.75	44.3 AV	54.0	-9.7	1.15 H	315	32.24	12.06
11	9147.50	59.7 PK	74.0	-14.3	1.07 H	337	48.06	11.64
12	9147.50	46.6 AV	54.0	-7.4	1.07 H	337	34.96	11.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2744.25	43.5 PK	74.0	-30.5	1.04 V	233	45.19	-1.69
2	2744.25	35.5 AV	54.0	-18.5	1.04 V	233	37.19	-1.69
3	3659.00	46.5 PK	74.0	-27.5	1.10 V	110	45.55	0.95
4	3659.00	36.2 AV	54.0	-17.8	1.10 V	110	35.25	0.95
5	4573.75	48.1 PK	74.0	-25.9	1.03 V	321	43.83	4.27
6	4573.75	38.6 AV	54.0	-15.4	1.03 V	321	34.33	4.27
7	7318.00	50.5 PK	74.0	-23.5	1.10 V	231	37.79	12.71
8	7318.00	43.5 AV	54.0	-10.5	1.10 V	231	30.79	12.71
9	8232.75	55.2 PK	74.0	-18.8	1.09 V	102	43.14	12.06
10	8232.75	45.3 AV	54.0	-8.7	1.09 V	102	33.24	12.06
11	9147.50	61.5 PK	74.0	-12.5	1.31 V	241	49.86	11.64
12	9147.50	47.8 AV	54.0	-6.2	1.31 V	241	36.16	11.64

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 49	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 10GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2781.75	44.5 PK	74.0	-29.5	1.13 H	43	46.10	-1.60
2	2781.75	32.7 AV	54.0	-21.3	1.13 H	43	34.30	-1.60
3	3709.00	45.2 PK	74.0	-28.8	1.10 H	311	44.03	1.17
4	3709.00	33.5 AV	54.0	-20.5	1.10 H	311	32.33	1.17
5	4636.25	48.7 PK	74.0	-25.3	1.10 H	323	44.23	4.47
6	4636.25	37.4 AV	54.0	-16.6	1.10 H	323	32.93	4.47
7	7418.00	53.9 PK	74.0	-20.1	1.00 H	84	41.25	12.65
8	7418.00	41.2 AV	54.0	-12.8	1.00 H	84	28.55	12.65
9	8345.25	55.5 PK	74.0	-18.5	1.08 H	308	43.58	11.92
10	8345.25	43.5 AV	54.0	-10.5	1.08 H	308	31.58	11.92

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2781.75	45.6 PK	74.0	-28.4	1.11 V	328	47.20	-1.60
2	2781.75	33.4 AV	54.0	-20.6	1.11 V	328	35.00	-1.60
3	3709.00	45.8 PK	74.0	-28.2	1.04 V	20	44.63	1.17
4	3709.00	34.5 AV	54.0	-19.5	1.04 V	20	33.33	1.17
5	4636.25	47.8 PK	74.0	-26.2	1.03 V	347	43.33	4.47
6	4636.25	36.3 AV	54.0	-17.7	1.03 V	347	31.83	4.47
7	7418.00	49.2 PK	74.0	-24.8	1.05 V	245	36.55	12.65
8	7418.00	42.6 AV	54.0	-11.4	1.05 V	245	29.95	12.65
9	8345.25	54.2 PK	74.0	-19.8	1.19 V	78	42.28	11.92
10	8345.25	44.4 AV	54.0	-9.6	1.19 V	78	32.48	11.92

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

4.8 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 14, 2014


4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 20 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP




4.8.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

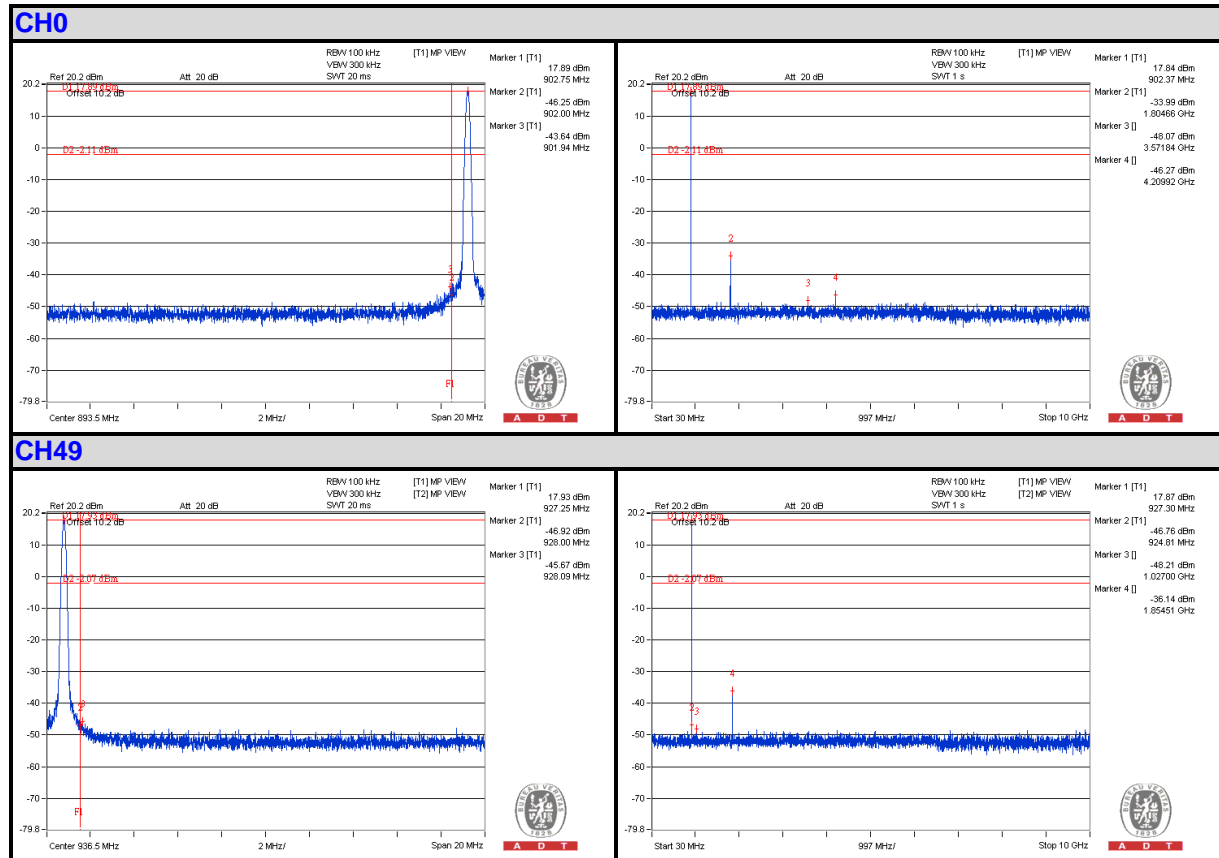



5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---