

**BT Aux ant BDR DH5 2402MHz Rear2 0mm**

Communication System: UID 0, Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2402 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.862$  S/m;  $\epsilon_r = 50.512$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration

- Probe: EX3DV4 - SN3825; ConvF(7.23, 7.23, 7.23); Calibrated: 2013/12/13;  $\{\text{Probe: Calibration Date}\}$
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn509; Calibrated: 2014/07/28
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan 2 (71x101x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 0.000203 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 0 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 0 W/kg  
**SAR(1 g) = n.a. ; SAR(10 g) = n.a.**

Maximum value of SAR (measured) = 0.000530 W/kg

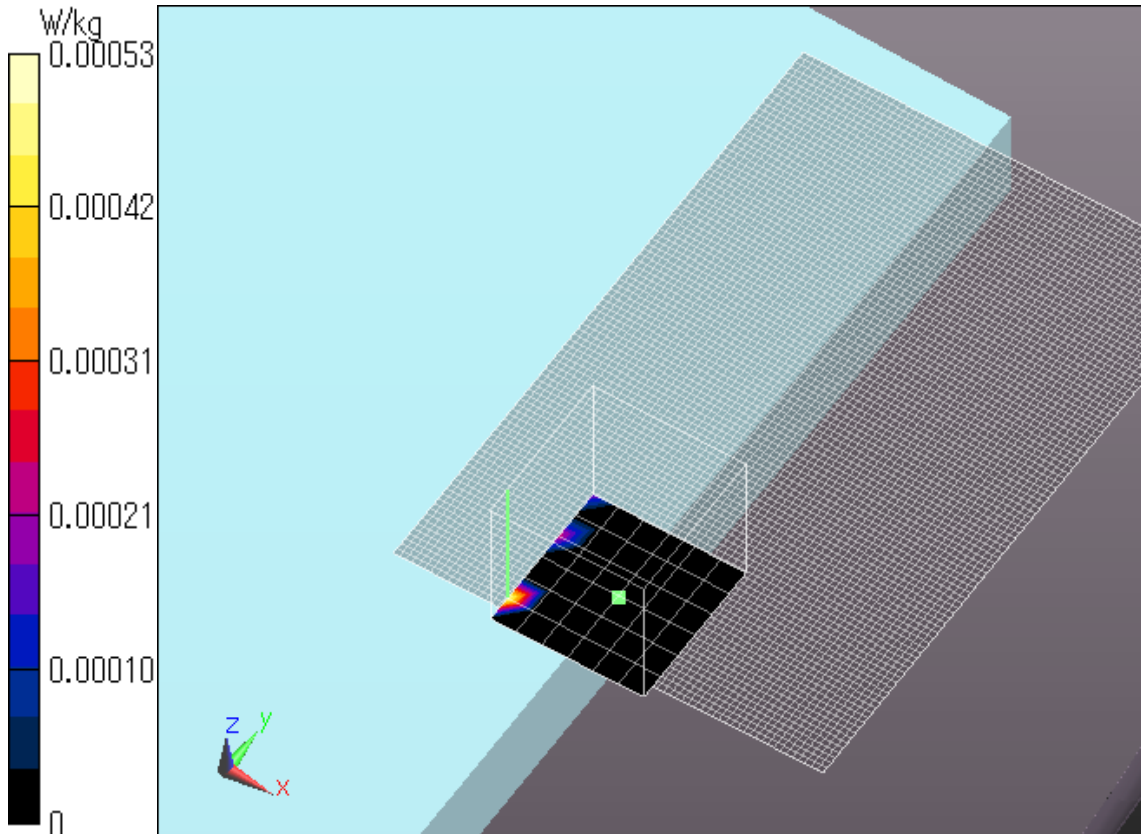

**BT Aux ant BDR DH5 2402MHz Edge4 0mm**

Communication System: UID 0, Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2402 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.862$  S/m;  $\epsilon_r = 50.512$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration

- Probe: EX3DV4 - SN3825; ConvF(7.23, 7.23, 7.23); Calibrated: 2013/12/13;  $\{\text{Probe: Calibration Date}\}$
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn509; Calibrated: 2014/07/28
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan 2 (71x101x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 0.00575 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 1.680 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 0.00907 W/kg  
**SAR(1 g) = 0.000115 W/kg; SAR(10 g) = 1.15e-005 W/kg**

Maximum value of SAR (measured) = 0.00583 W/kg

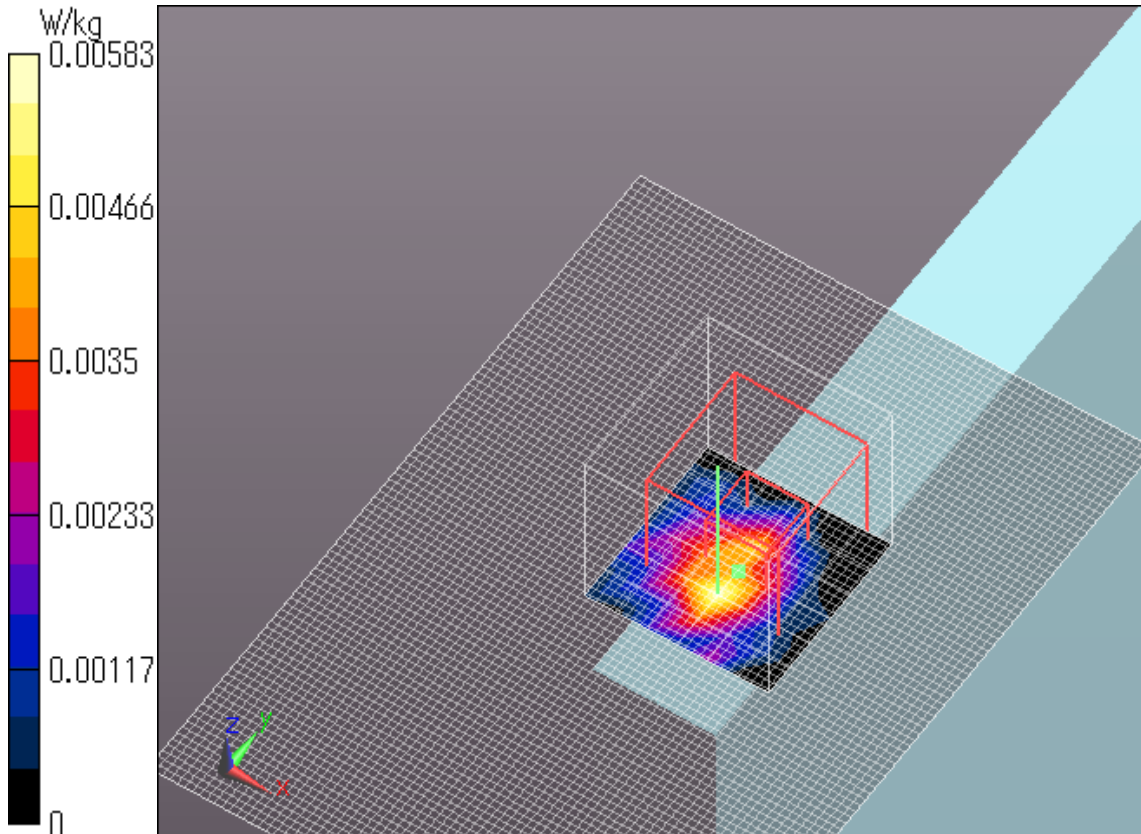

**BT Aux ant BDR DH5 2402MHz Edge1 tilt 0mm**


Communication System: UID 0, Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2402 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.816$  S/m;  $\epsilon_r = 50.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2014/05/14  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Area Scan 2 (101x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.00844 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.179 V/m; Power Drift = 0.18 dB  
Peak SAR (extrapolated) = 0.00829 W/kg  
**SAR(1 g) = 0.00164 W/kg; SAR(10 g) = 0.000758 W/kg**

Maximum value of SAR (measured) = 0.00456 W/kg

**Area Scan (91x111x1):** Interpolated grid: dx=3.000 mm, dy=3.000 mm  
Maximum value of SAR (interpolated) = 0.00479 W/kg

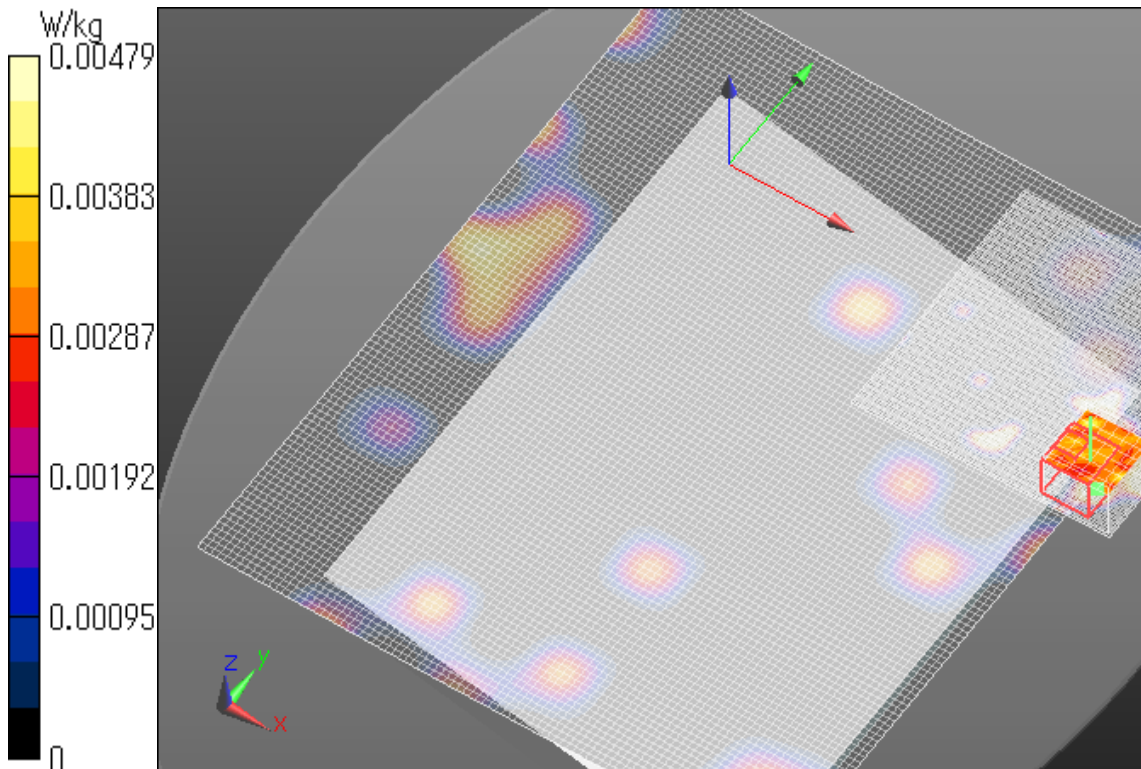

**BT Aux ant BDR DH5 2402MHz Edge2 tilt 0mm**

Communication System: UID 0, Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.816$  S/m;  $\epsilon_r = 50.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)


Electronics: DAE4 Sn1369; Calibrated: 2014/05/14

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Area Scan 3 (201x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0 W/kg

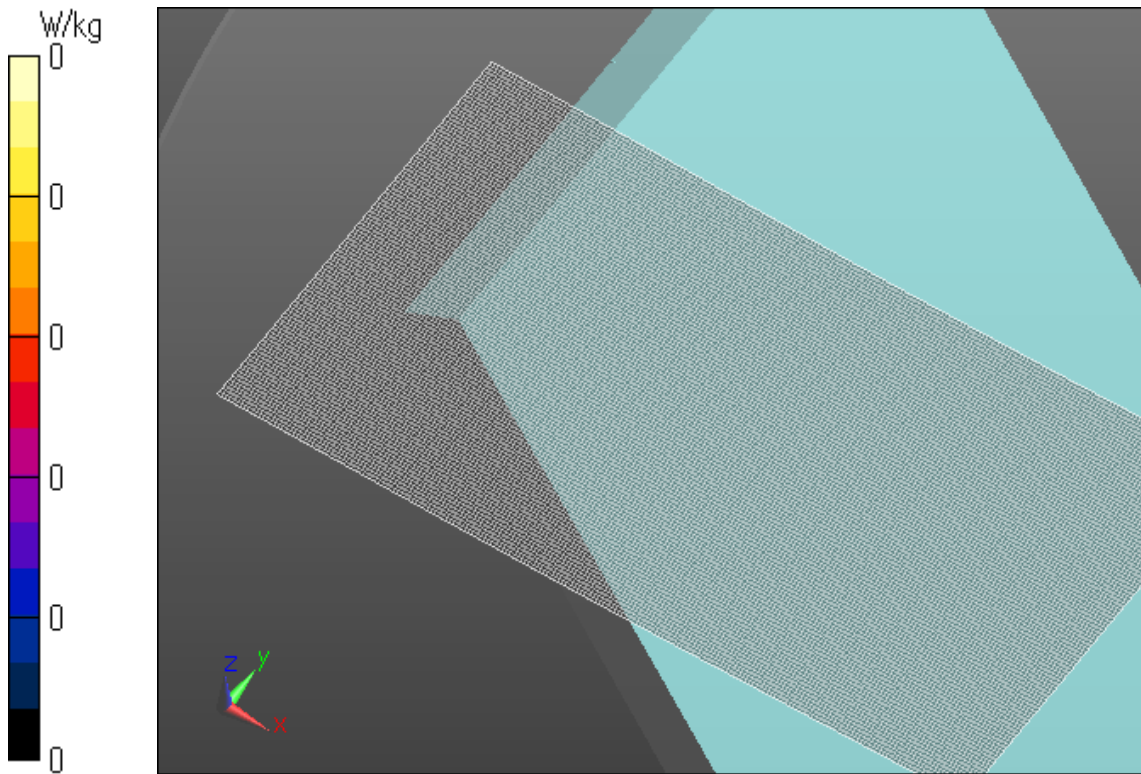



**BT Aux ant BDR DH5 2402MHz Edge3 tilt 0mm**

Communication System: UID 0, Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2402 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.816$  S/m;  $\epsilon_r = 50.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2014/05/14  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Area Scan 2 (101x161x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.0308 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.358 V/m; Power Drift = -0.17 dB  
Peak SAR (extrapolated) = 0.0530 W/kg  
**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.0349 W/kg

