

BT DH5 2480MHz Rear2 0mm

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 51.452$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(7.21, 7.21, 7.21); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045


Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan 3 (71x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0 W/kg

Date: 2015/10/13

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

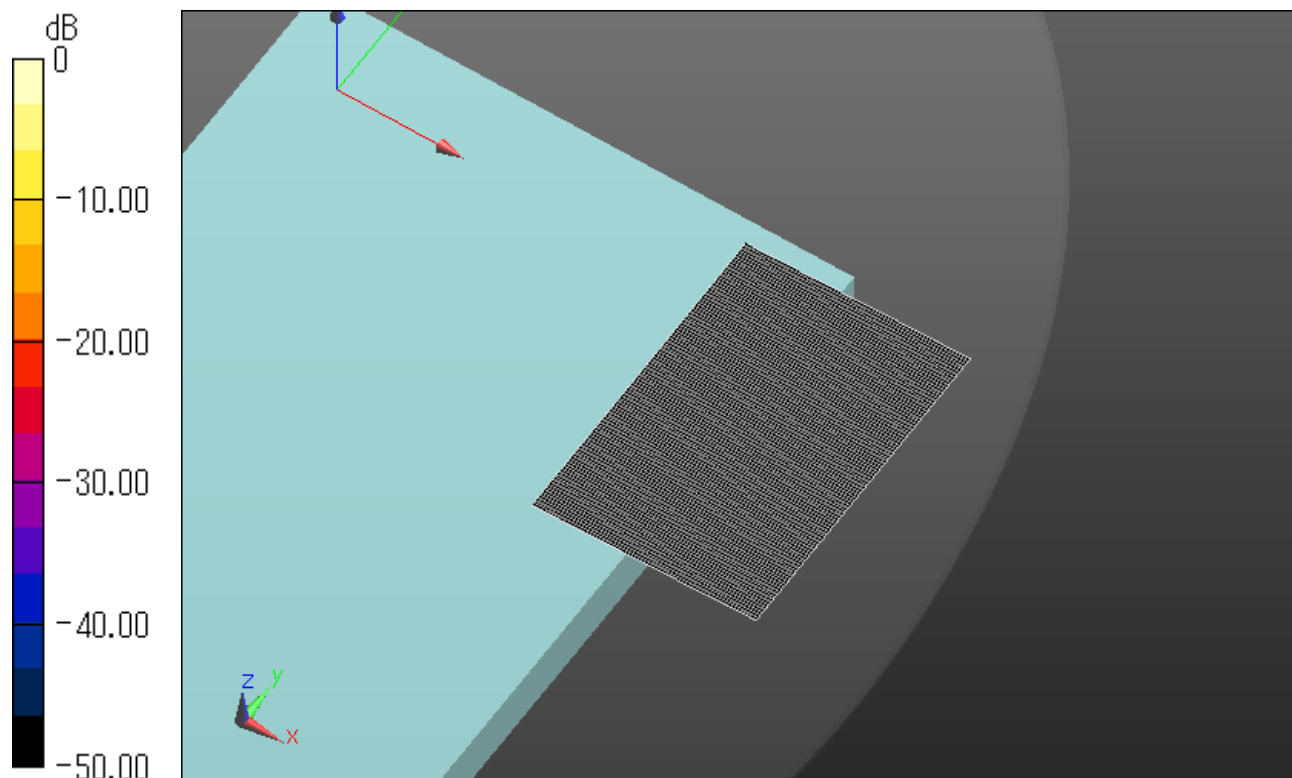

0 dB = 0 W/kg = -999.00 dBW/kg

BT DH5 2480MHz Edge1 tilt 0mm

Communication System: UID 0, Bluetooth DH5(reference) (0); Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.38038

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 51.452$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(7.21, 7.21, 7.21); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045


Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan 2 (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0 W/kg

Date: 2015/10/13

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

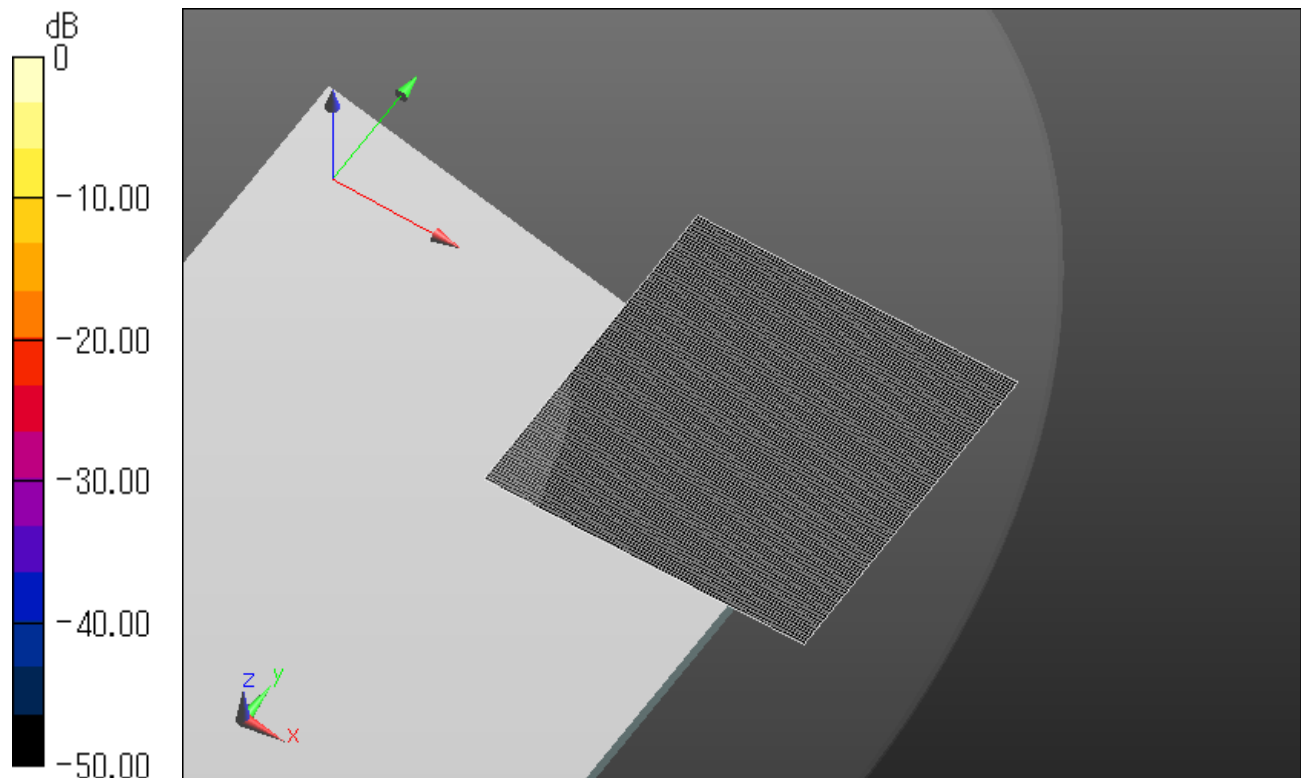

0 dB = 0 W/kg = -999.00 dBW/kg