

Bluetooth DH5 2480MHz Rear 2 0mm

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480$ MHz; $\sigma = 2.022$ S/m; $\epsilon_r = 50.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(7.29, 7.29, 7.29); Calibrated: 2015/12/11;

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Rear 2/Bluetooth/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00360 W/kg

Rear 2/Bluetooth/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.796 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.00375 W/kg; SAR(10 g) = 0.00139 W/kg

Maximum value of SAR (measured) = 0.00649 W/kg

Date: 2016/06/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

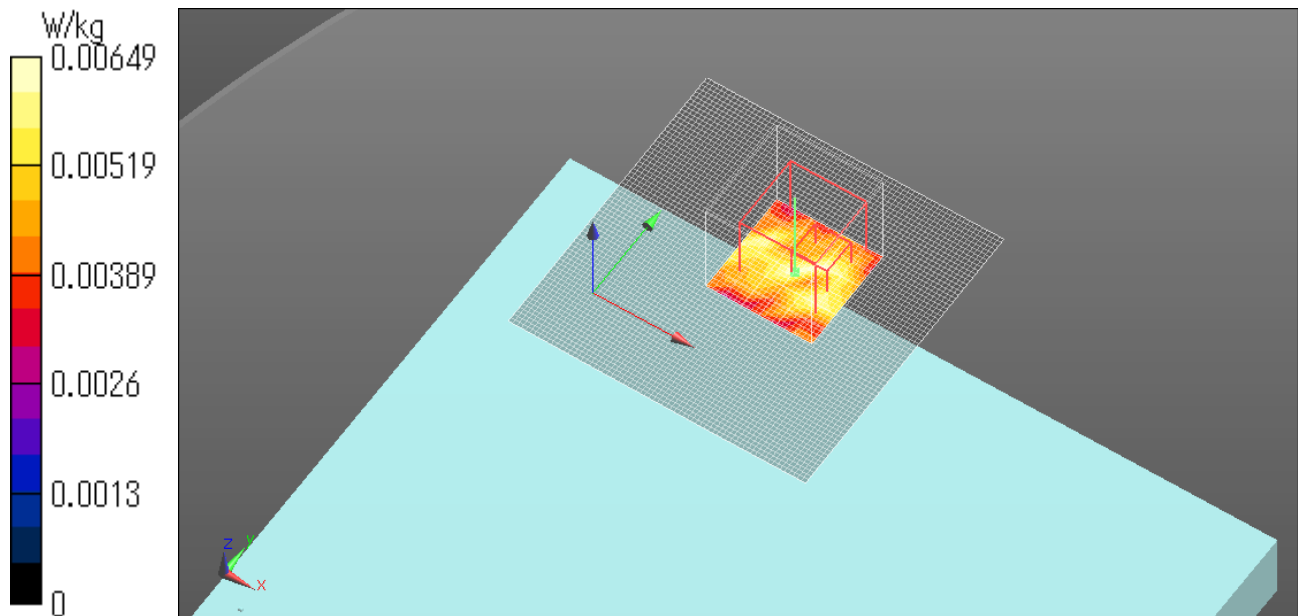

Bluetooth DH5 2480MHz Edge 1 tilt 0mm

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480$ MHz; $\sigma = 2.022$ S/m; $\epsilon_r = 50.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(7.29, 7.29, 7.29); Calibrated: 2015/12/11;

Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Edge 1 tilt/Bluetooth/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0200 W/kg

Edge 1 tilt/Bluetooth/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.842 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.00926 W/kg; SAR(10 g) = 0.00312 W/kg

Maximum value of SAR (measured) = 0.0158 W/kg

Date: 2016/06/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

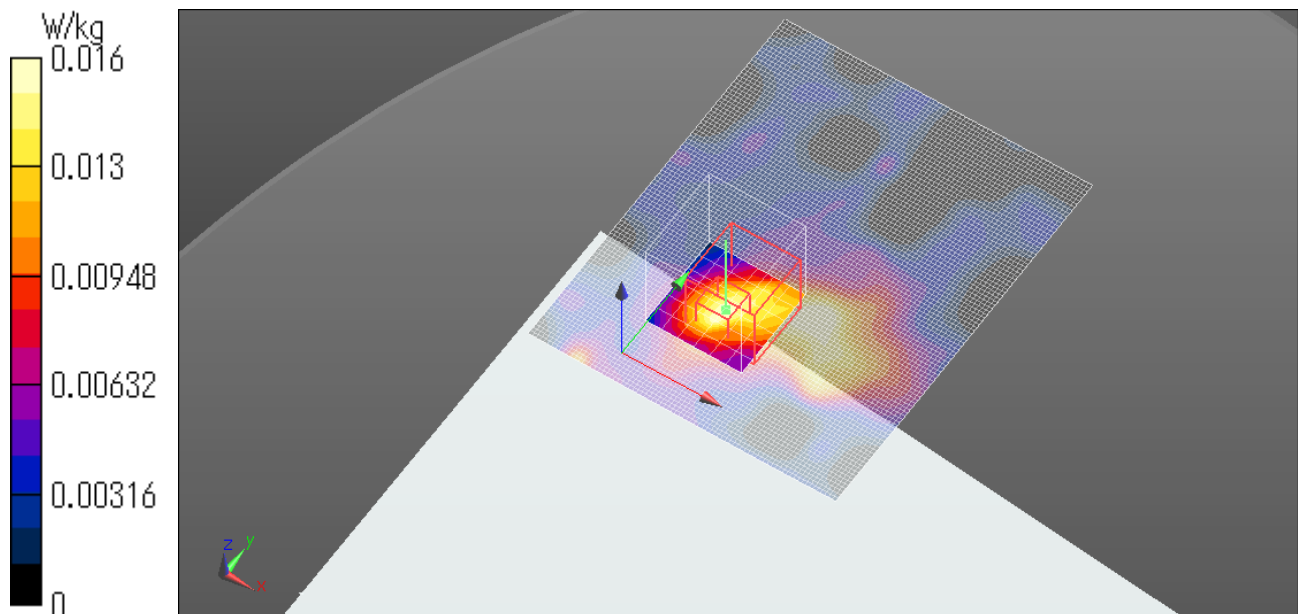

Bluetooth DH5 2480MHz Edge 3 tilt 0mm

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480$ MHz; $\sigma = 2.022$ S/m; $\epsilon_r = 50.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(7.29, 7.29, 7.29); Calibrated: 2015/12/11;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Edge 3 tilt/Bluetooth/Area Scan 2 2 (231x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00874 W/kg

Edge 3 tilt/Bluetooth/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.540 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0100 W/kg

SAR(1 g) = 0.00179 W/kg; SAR(10 g) = 0.000513 W/kg

Maximum value of SAR (measured) = 0.00668 W/kg

Date: 2016/06/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

