

Test Report
FOR
FCC Part 15 Subpart C

of

Tablet Personal Computer
(with Intel PRO/Wireless 2100 LAN 3B Mini PCI Adapter inside,
Model: WM3B2100)

Model:

CA27

(Brand:MITAC)

Applied by:

Mitac Technology Corp.
1st, R&D Road 2 ,
Hsinchu Science-Based Industrial Park,
Hsinchu, Taiwan, R.O.C.

Test Performed by:

(NVLAP Lab. Code: 200234-0)

International Standards Laboratory

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: 04LR022FC

Issued Date: 2003/06/10

HC LAB:NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178

LT LAB:NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997

ISL-T10-R29-1

Contents of Report

- 1. General 1
 - 1.1 Certification of Accuracy of Test Data..... 1
 - 1.2 Test Results Summary 2
 - 1.3 Description of Equipment Under Test (EUT)..... 3
 - 1.4 Test Standards and Procedure 5
 - 1.5 General Test Conditions 5
- 2. Powerline Conducted Emissions [Section 15.207] 6
 - 2.1 EUT Configuration..... 6
 - 2.2 Test Procedure 6
 - 2.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... 6
 - 2.4 Test Data: 7
- 3. Bandwidth for DSSS [Section 15.247 (a)(2)]..... 9
 - 3.1 Test Procedure 9
 - 3.2 Test Setup..... 9
 - 3.3 Test Data 9
- 4. DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 12
 - 4.1 Test Procedure 12
 - 4.2 Test Setup..... 12
 - 4.3 Test Data: 12
- 5. Radiated Emission Measurement [Section [15.247(c)(4)] 13
 - 5.1 EUT Configuration..... 13
 - 5.2 Test Procedure 13
 - 5.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)... 13
 - 5.4 Test Data (30MHz – 1GHz) : 14
 - 5.5 Test Data (1GHz – 25 GHz, Transmitting from Main antenna) 15
- 6. Band Edge Measurement 18
 - 6.1 Test Procedure (Conducted) 18
 - 6.2 Test Setup (Conducted) 18
 - 6.3 Test Data: 18
 - 6.4 Band Edge measurement Test Procedure (Radiated) 20
 - 6.5 Test Setup (Radiated) 20
 - 6.6 Test Data: 21
- 7. RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 27
- 8. DSSS Peak Power Spectral Density [Section 15.247(d)]..... 28
 - 8.1 Test Procedure 28
 - 8.2 Test Setup..... 28
 - 8.3 Test Data: 28

9. Appendix31

9.1 Appendix A: Measurement Procedure for Power-line Conducted Emissions31

9.2 Appendix B: Test Procedure for Radiated Emissions32

9.3 Appendix C: Test Equipment33

9.3.1 Test Equipment List 33

9.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data 34

9.4 Appendix D: Layout of EUT and Support Equipment35

9.4.1 General Conducted Test Configuration 35

9.4.2 General Radiation Test Configuration 36

9.5 Appendix E: Description of Support Equipment37

9.5.1 Description of Support Equipment 37

9.5.2 Software for Controlling Support Unit 37

9.5.3 I/O Cable Condition of EUT and Support Units 37

9.6 Appendix F: Accuracy of Measurement38

9.7 Appendix G: Photographs of EUT Configuration Test Set Up.....40

9.8 Appendix H: Antenna Spec.43

1. . General

1.1 Certification of Accuracy of Test Data

Standards: CFR 47 Part 15 Subpart B Class B
CFR 47 Part 15 Subpart C (Section 15.247)

Test Procedure: ANSI C63.4: 2001

Equipment Tested: Tablet Personal Computer

Model: CA27

Applied by: Mitac Technology Corp.

Sample received Date: 2004/05/24

Test Date : 2004/05/25-2004/06/01

Test Site: Chamber 02, Conduction 02

Temperature Refer to each site test data


Humidity: Refer to each site test data

Test Engineer: Jerry Chiou

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature

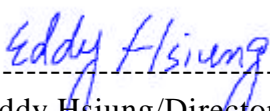

Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions.
This report shall not be reproduced other than in full without the explicit written consent of ISL.
This report contains totally 46 pages, including 1 cover page , 2 contents page, and 43 pages for the test description.
This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard.
International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

1.2 Test Results Summary

The 802.11b functions of EUT has been tested to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 (c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	See SAR report
15.247 (d)	Power Spectral Density	Pass	

1.3 Description of Equipment Under Test (EUT)

Description: Tablet Personal Computer
(with Intel PRO/Wireless 2100 LAN 3B Mini PCI Adapter inside)

Model No.: CA27

FCC ID: MAU011

Brand: MITAC

Wireless LAN Module: Intel, Model: WM3B2100

Frequency Range: 2400 - 2483.5 MHz

Support channel: 11 Channels

Modulation Skill: DBPSK(1Mbps), DQPSK(2Mbps), CCK(5.5/11Mbps)

Antennas Type: PIFA Type in Metal (Model: MP-14C) made by AIR WAVE Corp.

Antenna Connected: Connected to RF connector on the PCB of the 802.11b WLAN Adapter. The user is not possible to change the antenna without disassembling the Tablet Personal computer.

Antenna peak Gain: -2.44dBi at 2500MHz

Power Type of LAN module: 3.3V DC from Tablet Personal Computer

The 802.11b WLAN has 11 channels for communication.
The channel and the operation frequency of 802.11b is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

CPU:	100MHz PentiumM 1.1GHz
Power Supply Type:	Auto Switching AC Adapter Delta (Model: ADP-90FB) 90W (3 Pins)
Hard Disk :	Toshiba (Model:MK4025GAS) 40GB
DDR RAM(333):	256MB Kingston (Model: 9905065-003)
Modem Card:	Askey (Model: V1456 VQL-)P1(INT))
Battery:	Li-ion, DC 11.1Volt 4400mAh
UPS Battery:	Li-ion, DC 14.8Volt 2000mAh
LCD:	Toshiba 10.4" XGA TFT (Model:LTD104KA1S)
Inverter:	MITAC (Model:CA25T)
DC-In:	one
USB2.0 Port:	one
IR Port:	one
Modem Port:	one 4-pin
PCIMCIA Port:	one 68-pin
Line in Port:	one
Line out Port:	one
Port Replicator:	one 60-pin
Private Port:	one 14-pin
Power Cord:	Shielded 3 PIN
Maximum display Resolution:	1024X768 Non-interlaced

1.4 Test Standards and Procedure

Test Specification: FCC Part 15 subpart C (Section 15.247) and subpart B
and/or
CISPR 22/EN55022, RSS210

Test Procedure: ANSI C63.4, CFR 47 Sec. 15.247 as detailed in
Appendices

1.5 General Test Conditions

1. During the test, the EUT was set in continuously transmitting mode with a duty cycle of 99% (maximum allowed).
2. The channel 1, 6, 11 of 802.11b of EUT were all tested.

2. Powerline Conducted Emissions [Section 15.207]

2.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

2.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.


2.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150 KHz--30MHz
Detector Function:	Quasi-Peak/Average
Bandwidth (RBW):	9KHz

2.4 Test Data:


Power Line Conducted Emissions (Hot) Channel 1, 6, 11

Frequency MHz	LISN Loss (dB)	Cable Loss (dB)	QP Corrc. Amp.(dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVE Corrc. Amp.(dBuV)	AVE Limit (dBuV)	AVE Margin (dB)
0.21906	0.10	0.02	48.76	64.03	-15.27	45.22	54.03	-8.81
0.51023	0.12	0.03	41.55	56.00	-14.45	40.25	46.00	-5.75
0.58460	0.13	0.04	41.80	56.00	-14.20	40.60	46.00	-5.40
0.87680	0.18	0.06	38.39	56.00	-17.61	37.79	46.00	-8.21
0.95155	0.19	0.07	38.98	56.00	-17.02	37.81	46.00	-8.19
2.11977	0.20	0.10	39.76	56.00	-16.24	38.39	46.00	-7.61
2.41277	0.20	0.10	40.32	56.00	-15.68	39.45	46.00	-6.55
2.48619	0.20	0.10	40.23	56.00	-15.77	38.82	46.00	-7.18
3.58336	0.20	0.12	40.54	56.00	-15.46	39.33	46.00	-6.67
3.87374	0.20	0.12	40.28	56.00	-15.72	38.31	46.00	-7.69

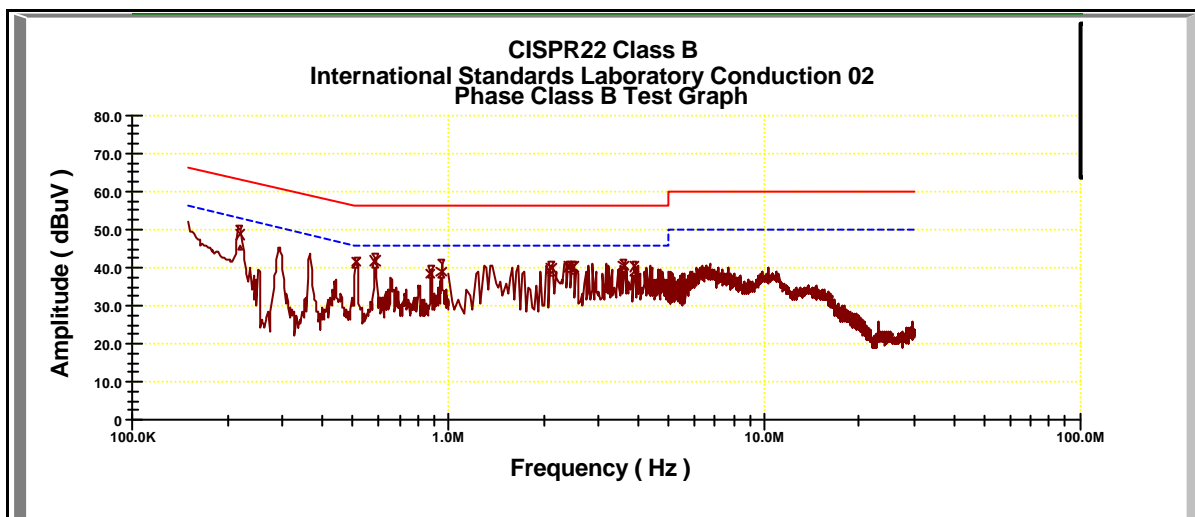

Power Line Conducted Emissions (Neutral) Channel 1, 6, 11

Frequency MHz	LISN Loss (dB)	Cable Loss (dB)	QP Corrcet. Amp.(dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVE Corrcet. Amp.(dBuV)	AVE Limit (dBuV)	AVE Margin (dB)
0.22028	0.10	0.02	49.21	63.99	-14.78	45.78	53.99	-8.21
0.29335	0.10	0.02	45.33	61.90	-16.57	34.20	51.90	-17.70
0.43936	0.11	0.03	38.77	57.73	-18.96	27.37	47.73	-20.36
0.51528	0.12	0.03	40.65	56.00	-15.35	39.33	46.00	-6.67
0.58723	0.13	0.04	42.57	56.00	-13.43	41.51	46.00	-4.49
2.49414	0.20	0.10	40.22	56.00	-15.78	39.27	46.00	-6.73
3.22816	0.20	0.11	41.17	56.00	-14.83	40.10	46.00	-5.90
3.59553	0.20	0.12	41.28	56.00	-14.72	40.07	46.00	-5.93
3.88876	0.20	0.12	41.41	56.00	-14.59	39.97	46.00	-6.03
3.96425	0.20	0.12	40.98	56.00	-15.02	39.28	46.00	-6.72

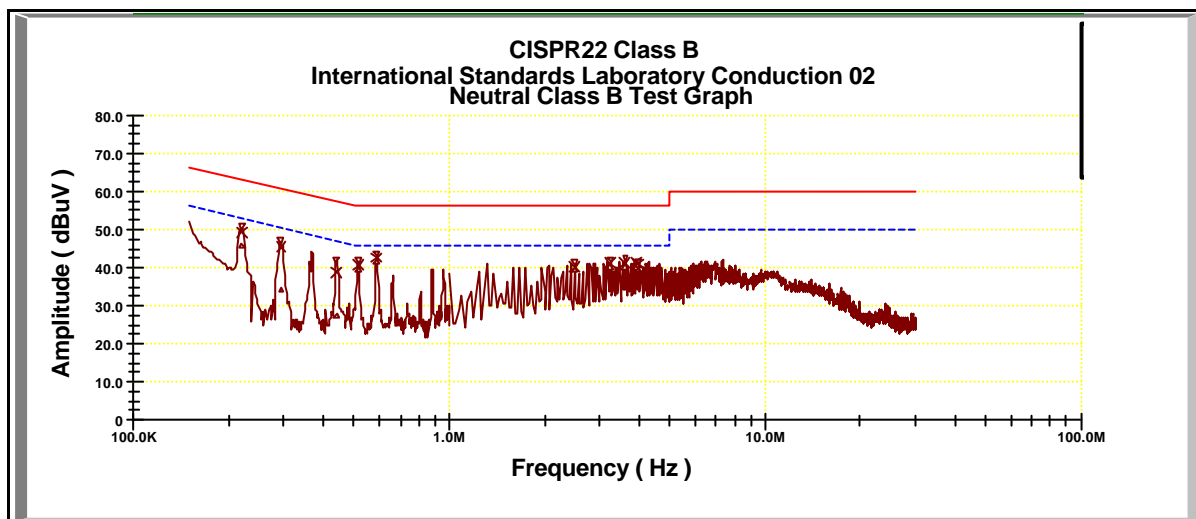

* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels.
 Margin = Amplitude + Insertion Loss- Limit
 A margin of -8dB means that the emission is 8dB below the limit


3. Bandwidth for DSSS [Section 15.247 (a)(2)]

3.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer through an attenuator. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode: Spectrum analyzer
Detector function: Peak mode
RBW: 100KHz
VBW: 100KHz


3.2 Test Setup

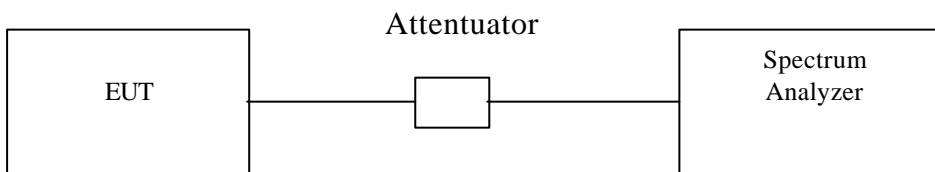


3.3 Test Data

Table 6dB Bandwidth

Chenne	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	11.92	0.5	Pass
6	2437	12.32	0.5	Pass
11	2462	11.88	0.5	Pass

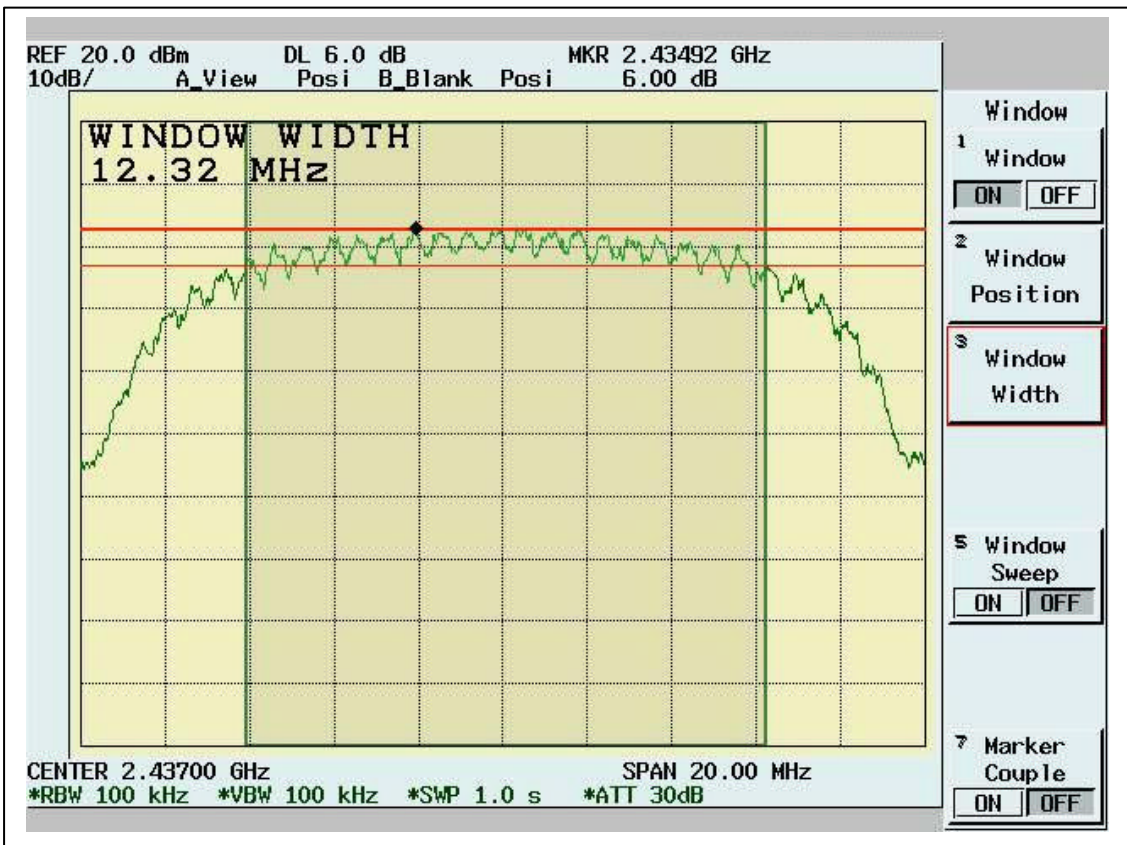

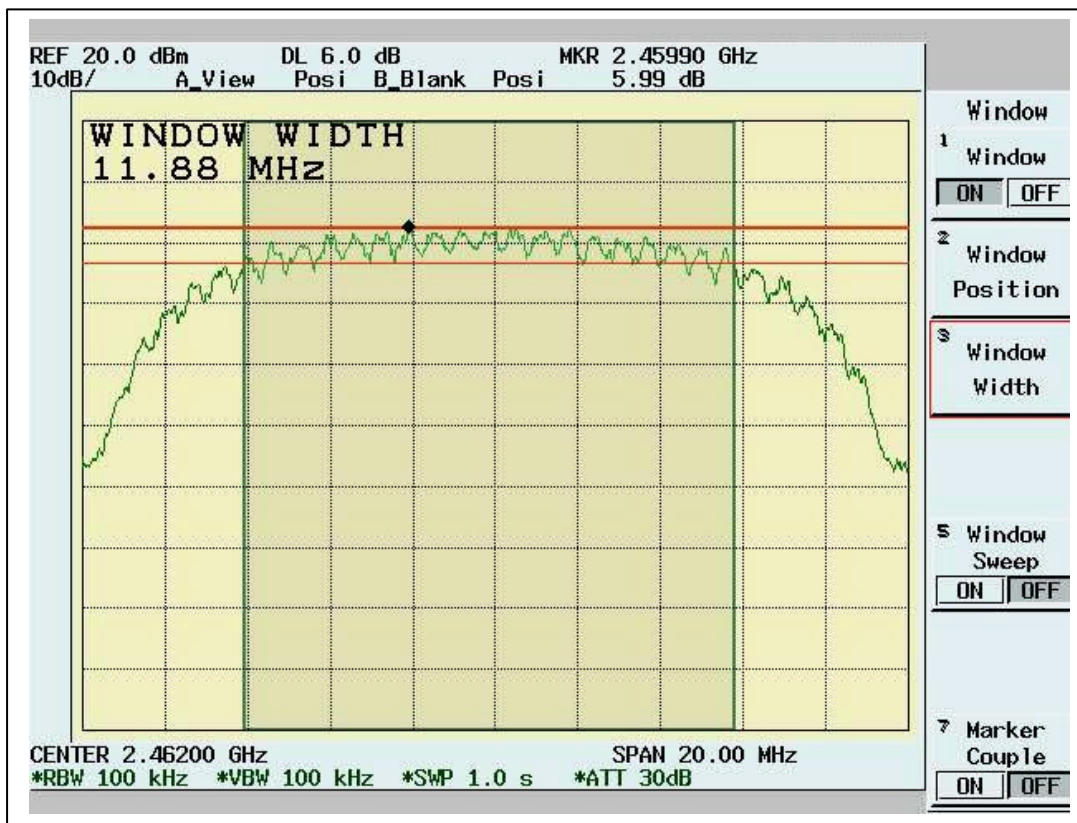


4. DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

4.1 Test Procedure

1. The Transmitter output of EUT was connected to the peak power analyzer through an attenuator.

4.2 Test Setup

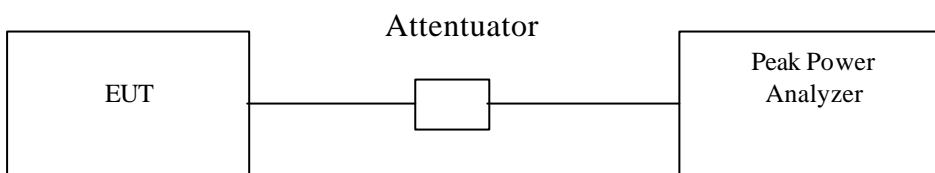

4.3 Test Data:

Maximum Peak Output Power

Chenne	Frequency (MHz)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	47.86	16.80	30	Pass
6	2437	41.68	16.20	30	Pass
11	2462	43.65	16.40	30	Pass

5. Radiated Emission Measurement [Section [15.247(c)(4)]

5.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

5.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

5.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

5.4 Test Data (30MHz – 1GHz) :

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Frequency	Rx Amp.	Ant Fact	CableLoss	PreAmpGain	Corrct. Emi.	Limit	Margin	Ant. Pos.	Table Pos.
MHz	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg)
387.93	12.85	15.21	5.23	0.00	33.30	46.00	-12.70	100.00	288.00
402.48	12.08	15.62	5.34	0.00	33.04	46.00	-12.96	100.00	271.00
455.83	10.72	16.22	5.84	0.00	32.78	46.00	-13.22	201.00	303.00
566.41	6.97	18.37	6.58	0.00	31.92	46.00	-14.08	201.00	352.00
599.39	6.63	18.30	6.77	0.00	31.70	46.00	-14.30	150.00	235.00
623.64	10.83	18.54	6.90	0.00	36.27	46.00	-9.73	100.00	173.00
866.14	5.38	20.16	8.26	0.00	33.81	46.00	-12.19	100.00	141.00
899.12	5.96	20.30	8.27	0.00	34.53	46.00	-11.47	201.00	270.00
911.73	10.36	20.37	8.35	0.00	39.08	46.00	-6.92	201.00	254.00
933.07	4.73	20.50	8.49	0.00	33.71	46.00	-12.29	100.00	173.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Frequency	Rx Amp.	Ant Fact	CableLoss	PreAmpGain	Corrct. Emi.	Limit	Margin	Ant. Pos.	Table Pos.
MHz	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg)
166.77	17.15	8.63	3.86	0.00	29.64	43.50	-13.86	99.00	56.00
197.81	16.77	8.68	4.18	0.00	29.63	43.50	-13.87	201.00	235.00
201.69	16.37	8.67	4.19	0.00	29.23	43.50	-14.27	201.00	235.00
455.83	8.77	16.22	5.84	0.00	30.83	46.00	-15.17	99.00	351.00
499.48	9.06	17.09	6.05	0.00	32.20	46.00	-13.80	99.00	318.00
566.41	8.82	18.37	6.58	0.00	33.77	46.00	-12.23	99.00	24.00
733.25	4.87	19.47	7.54	0.00	31.88	46.00	-14.12	99.00	187.00
833.16	3.47	20.03	8.00	0.00	31.50	46.00	-14.50	148.00	124.00
866.14	3.87	20.16	8.26	0.00	32.30	46.00	-13.70	99.00	285.00
911.73	6.20	20.37	8.35	0.00	34.92	46.00	-11.08	148.00	304.00

* NOTE:

During the test, the EUT was set to Channel 1, 6, 11 respectively to get the maximum reading of all the critical emission frequencies.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

5.5 Test Data (1GHz – 25 GHz, Transmitting from Main antenna) .

1GHz~ 25 GHz(Horizontal), Channel 1 : 2412 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
2392.61	55.52 (pk)	30.54	1.14	46.21	41.00	54(av)	-13.00	102	189
3275.72	45.59 (pk)	31.13	1.44	46.62	31.54	54(av)	-22.46	101	190
3445.55	45.52 (pk)	31.33	1.50	46.64	31.71	54(av)	-22.29	100	190
7623.38	37.36 (pk)	39.84	2.43	45.51	34.12	54(av)	-19.88	100	11
7963.04	32.38 (pk)	41.07	2.49	43.92	32.01	54(av)	-21.99	100	265

‘pk’---- peak, ‘av’-----average

1GHz~ 25 GHz(Vertical), Channel 1 : 2412 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Am pl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
2290.71	44.96 (pk)	30.58	1.11	46.21	30.45	54(av)	-23.55	101	142
2409.59	56.52 (pk)	30.54	1.15	46.21	42.00	54(av)	-12.00	100	76
3275.72	45.66 (pk)	31.13	1.44	46.62	31.62	54(av)	-22.38	103	187
7572.43	38.58 (pk)	39.66	2.42	45.75	34.91	54(av)	-19.09	100	280
8863.14	28.88 (pk)	40.56	2.65	42.75	29.35	54(av)	-24.65	100	65

‘pk’---- peak, ‘av’-----average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz(Horizontal), Channel 6 : 2437 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
3275.72	45.62 (pk)	31.13	1.44	46.62	31.57	54(av)	-22.43	100	220
7827.17	33.28 (pk)	40.58	2.47	44.56	31.77	54(av)	-22.23	100	250
7878.12	34.32 (pk)	40.76	2.48	44.32	33.24	54(av)	-20.76	100	290
8251.75	29.99 (pk)	41.10	2.54	43.11	30.53	54(av)	-23.47	101	306
11478.5	26.45 (pk)	42.32	3.02	41.54	30.24	54(av)	-23.76	100	23

'pk'---- peak, 'av'----average

1GHz~ 25 GHz(Vertical), Channel 6 : 2437 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin*	Height (cm)	Position (°)
3241.76	45.40 (pk)	31.09	1.43	46.61	31.30	54(av)	-22.70	101	56
7895.1	33.45 (pk)	40.82	2.48	44.24	32.51	54(av)	-21.49	100	143
8047.95	31.46 (pk)	41.18	2.51	43.63	31.52	54(av)	-22.48	100	12
11342.7	26.63 (pk)	41.80	3.00	41.25	30.19	54(av)	-23.81	103	280
13686.3	26.53 (pk)	42.27	3.32	42.17	29.96	54(av)	-24.04	100	37

'pk'---- peak, 'av'----average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss -

Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
3071.93	45.70 (pk)	30.89	1.37	46.59	31.37	54(av)	-22.63	100	26
3326.67	45.31 (pk)	31.19	1.46	46.63	31.34	54(av)	-22.66	101	31
6995	32.36 (pk)	39.97	2.32	46.31	28.34	54(av)	-25.66	100	14
7861.14	33.41 (pk)	40.70	2.47	44.40	32.19	54(av)	-21.81	101	276
11461.5	26.80 (pk)	42.25	3.02	41.51	30.57	54(av)	-23.43	103	32

'pk'---- peak, 'av'----average

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
3275.72	47.29 (pk)	31.13	1.44	46.62	33.24	54(av)	-20.76	100	94
3377.62	44.03 (pk)	31.25	1.47	46.63	30.12	54(av)	-23.88	100	220
7045.95	31.98 (pk)	39.94	2.33	46.29	27.97	54(av)	-26.03	100	28
7912.09	29.81 (pk)	40.88	2.48	44.16	29.02	54(av)	-24.98	103	298
8234.76	27.88 (pk)	41.11	2.54	43.15	28.37	54(av)	-25.63	100	29

'pk'---- peak, 'av'----averag

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.


6. Band Edge Measurement

6.1 Test Procedure (Conducted)

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 100MHz
 RBW: 100KHz
 VBW: 100KHz
 Center frequency: 2.4GHz, 2.4835GHz.
 Sweep time= 200ms sec.

2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.

6.2 Test Setup (Conducted)

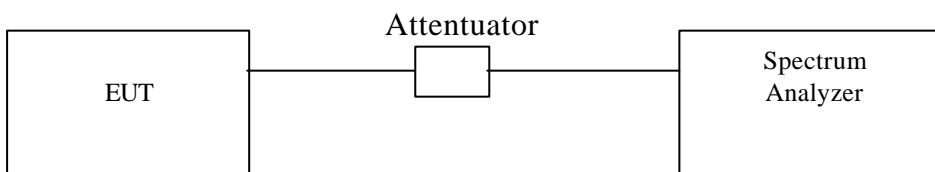

6.3 Test Data:

Table Band Edge measurement (Conducted)

Channe 1	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: > 20dB (dB)	Pass/Fail
1	2409.9	109.43	---	---
Outside band	2396.9	76.21	33.22	Pass
11	2459.9	108.94	---	---
Outside band	2473.0	79.87	29.07	Pass

Band Edge Conducted measurement



Band Edge Conducted Measurement



6.4 Band Edge measurement Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as *Radiated Emission Measurement*
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN:100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48 GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz ,
VBW: 10Hz,
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

6.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

6.6 Test Data:

Table Band Edge measurement (Radiated)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit: > 20dB (dBC)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
1(peak mode)	2413.2	70.20	31.67	101.87	---	---	1MHz	---
Outside band	2397.2	34.84	31.67	66.51	35.36	---	1MHz	Pass
1(average mode)	2412.5	61.38	31.67	93.05	---	---	10Hz	---
Restricted band	2390.0	12.57	31.67	44.24	-----	54	10Hz	Pass
11(peak mode)	2463.7	66.59	31.64	98.23	----	---	1MHz	---
Outside band	2473.1	34.10	31.64	65.74	32.49	---	1MHz	Pass
11(average mode)	2462.5	58.66	31.64	90.30	----	---	10Hz	---
Restricted band	2483.5	9.19	31.64	40.83	-----	54	10Hz	Pass

Note: The Spectrum plot of emission level measurement in Restricted band is attached.

Emission Level = Spectrum Reading + Correction Factor

Correction Factor = Antenna Factor + cable loss – amplifier gain

Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 1)




Radiated)



Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 11)




Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 11)

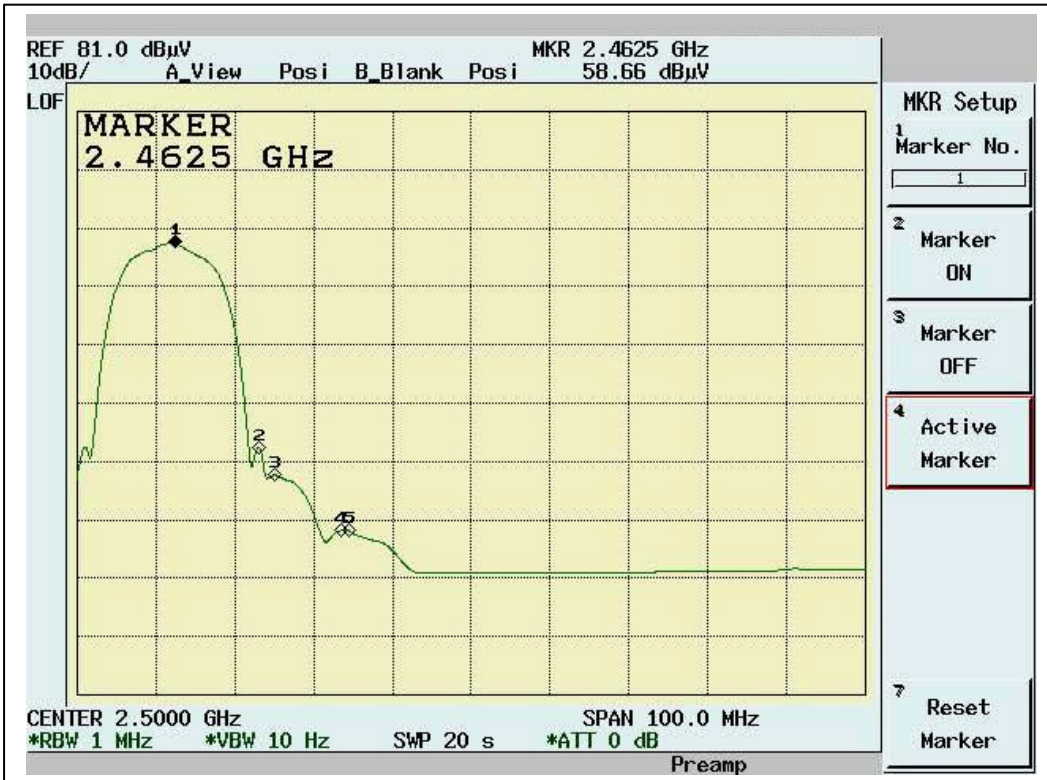


Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
Restricted band	2389.4	17.14	31.67	48.81	74	1MHz	Pass
Restricted band	2389.8	6.34	31.67	38.01	54	10Hz	Pass
Restricted band	2495.8	14.55	31.64	46.19	74	1MHz	Pass
Restricted band	2483.7	4.6	31.64	36.24	54	10Hz	Pass


Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 1)

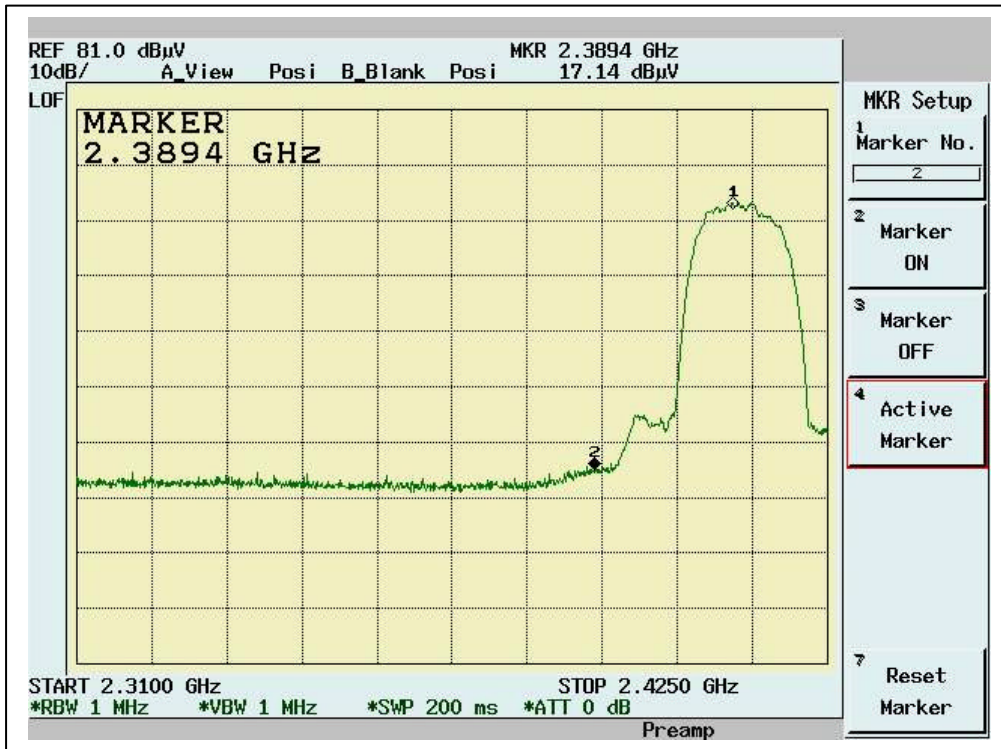


Average Mode (Channel 1)

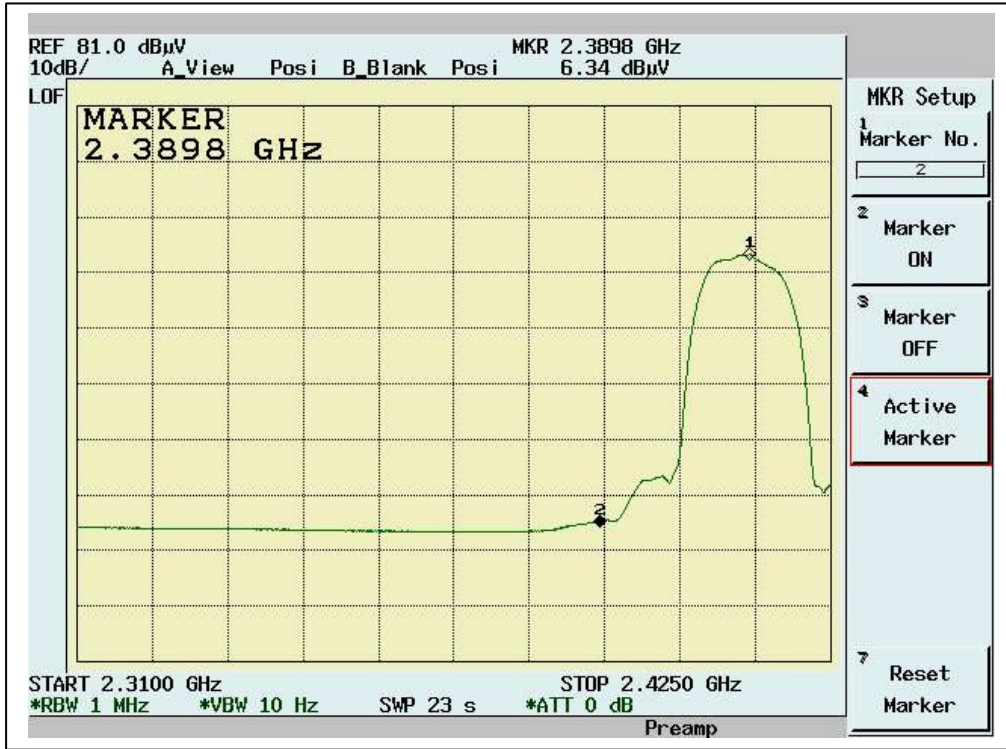

Band Edge measurement for radiated emission in Ristricted Band(Radiated) Peak Mode (Channel 11)

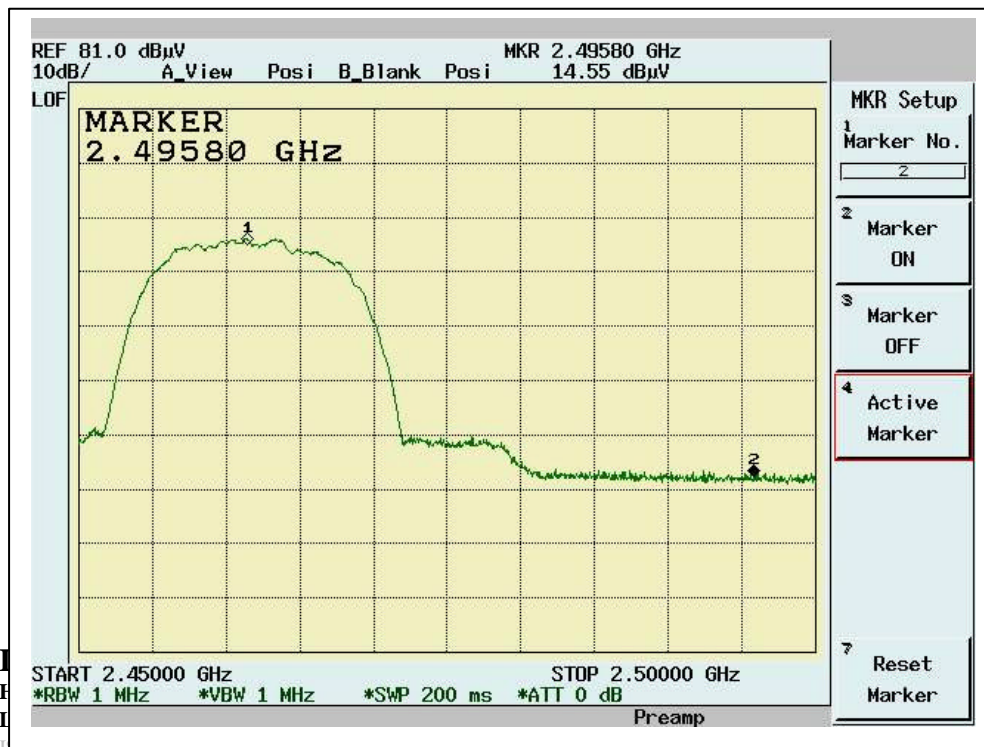

**Band Edge measurement for radiated emission in Restricted Band(Radiated)
Average Mode (Channel 11)**

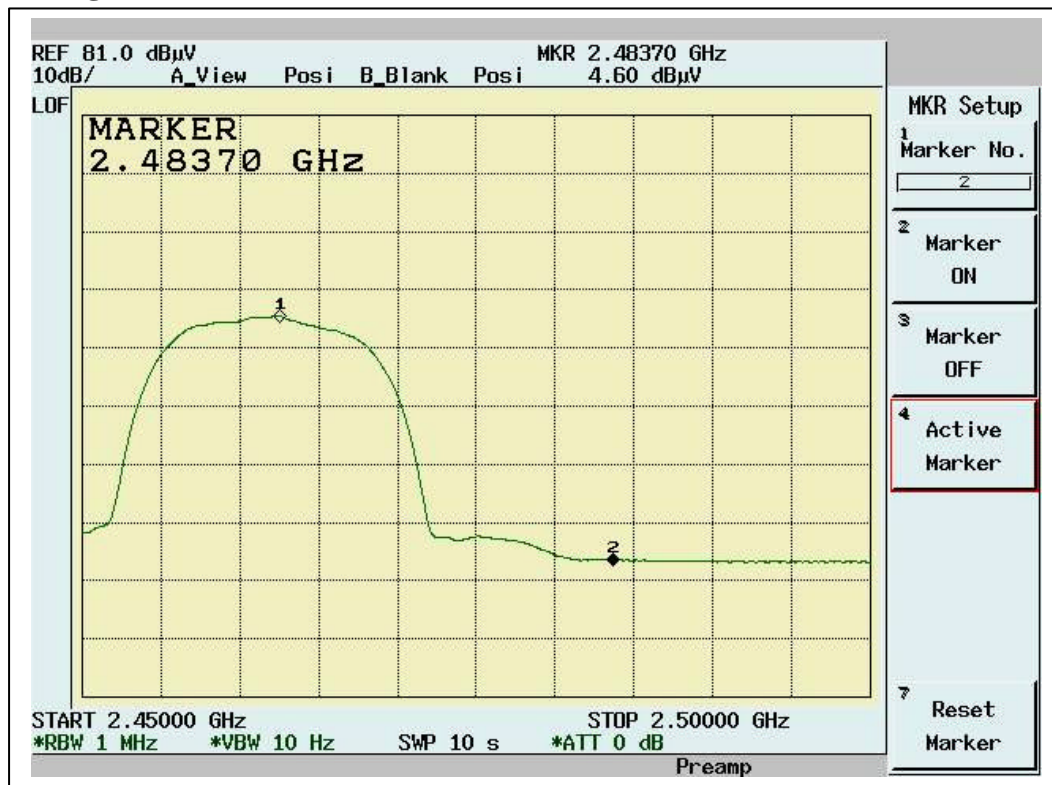

7. RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]

Please see the SAR report


8. DSSS Peak Power Spectral Density [Section 15.247(d)]

8.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN:1.5MHz
 RBW: 3KHz
 VBW: 30KHz
 Center frequency: fundamental frequency tested.
 Sweep time= 500 sec.
 Cable loss=1.13dB

2. Using Peak Search to read the peak power after Maximum Hold function is completed.



8.2 Test Setup

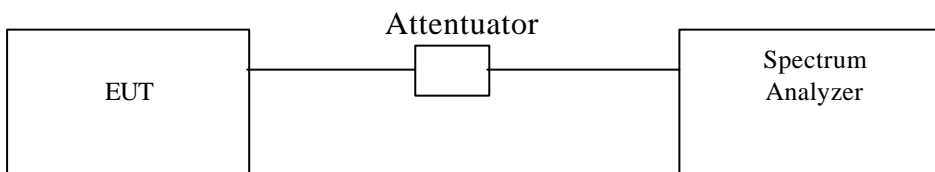


8.3 Test Data:

Table Maximum Peak Output Power Density

Chenne 1	Frequency (MHz)	Spectrum Reading (dBm/3KHz)	Cable Loss (dB)	Peak Power Output (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
1	2412.5	-5.01	1.13	-3.88	8	Pass
6	2437.5	-5.09	1.13	-3.96	8	Pass
11	2462.5	-5.53	1.13	-4.40	8	Pass

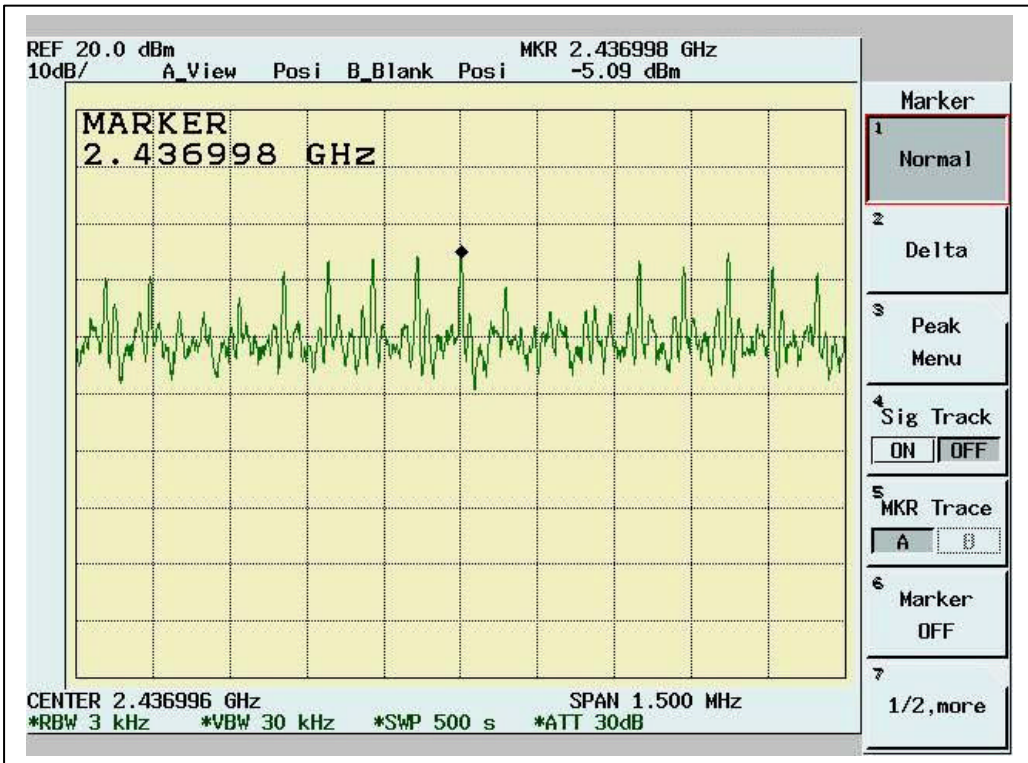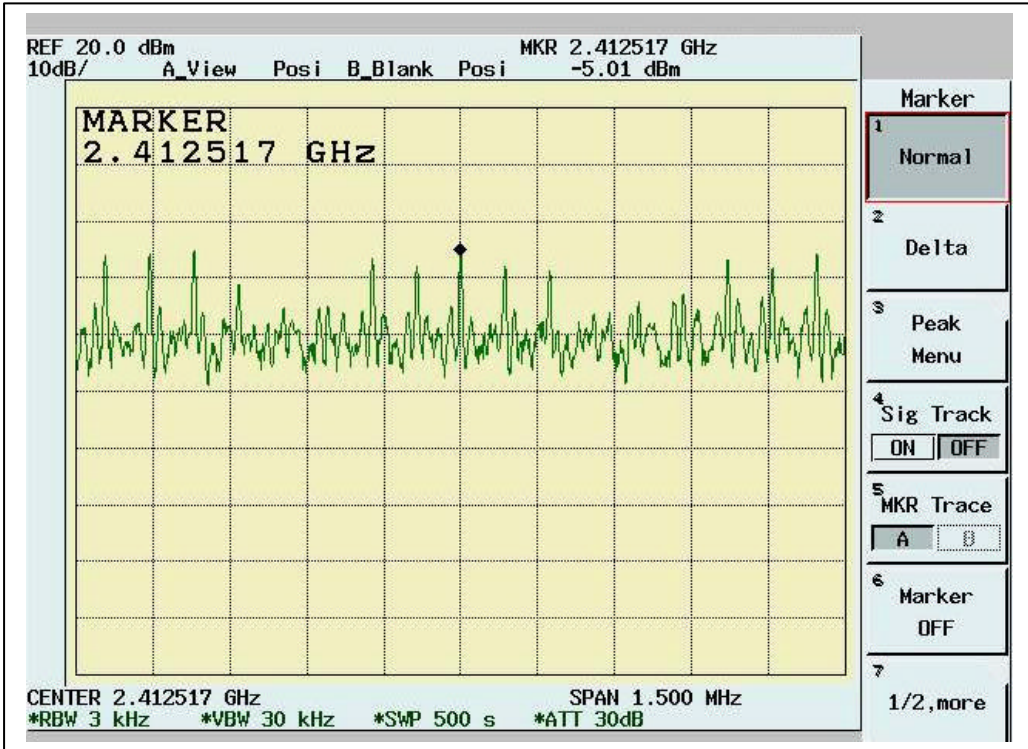

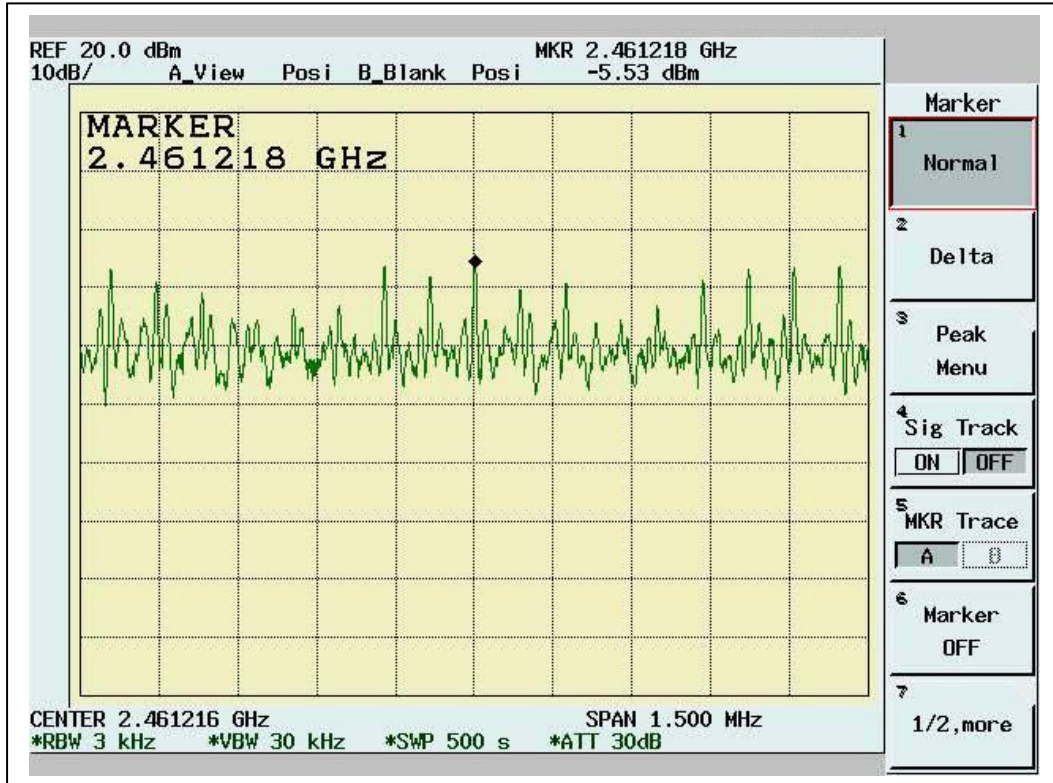

9. Appendix

9.1 Appendix A: Measurement Procedure for Power-line Conducted Emissions

The EUT is set up in accordance with the suggested configuration given in ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the Figure 1 of the ANSI C63.4-2001 or CISPR16. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. Both the line of power cord, hot and neutral, were measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

9.2 Appendix B: Test Procedure for Radiated Emissions

Preliminary Measurements in the Anechoic Chamber

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUT are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360°. The antenna height is varied from 1-2.5m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be pre-selected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.

Measurements on the Open Site or 10m EMC Chamber

The radiated emissions test will then be repeated on the open site or 10m EMC chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of the 3 or 10 meter open field sites. Desktop EUT are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both readings are recorded with the quasi-peak detector with 120KHz bandwidth. For frequency between 30 MHz and 1000MHz, the reading is recorded with peak detector or quasi-peak detector. For frequency above 1 GHz, the reading is recorded with peak detector or average detector with 1 MHz bandwidth.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

9.3 Appendix C: Test Equipment

9.3.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	Coaxial Cable 1F-C2	Harbourindustries	RG400	1F-C2	06/02/2003	06/02/2004
Conduction	Digital Hygro-Thermometer Conduct	MicroLife	HT-2126G	ISL-Conductio n02	12/04/2002	12/04/2004
Conduction	EMI Receiver 03	HP	85460A	3448A00209	01/08/2004	01/08/2005
Conduction	LISN 01	R&S	ESH2-Z5	890485/013	04/30/2004	04/30/2005
Conduction	LISN 04	EMCO	3810/2	9604-1429	12/18/2003	12/18/2004
Radiation	BILOG Antenna 08	Schaffner	CBL6112B	2756	06/03/2003	06/03/2004
Radiation	Coaxial Cable Chmb 02-10M	Belden	RG-8/U	Chmb 02-10M	09/09/2003	09/09/2004
Radiation	Microwave Cable Chmb 02 3M	HUBER+SUHNER AG.	Sucoflex 103	42731/3 & 42729/3	03/17/2004	03/17/2005
Radiation	Digital Hygro-Thermometer Chmb 02	MicroLife	HT-2126G	Chmb 02	12/04/2002	12/04/2004
Radiation	EMI Receiver 02	HP	85460A	3448A00183	10/02/2003	10/02/2004
Radiation	EMI Receiver 04	AFJ	ER 55CR	55390143233	05/20/2004	05/20/2005
Radiation	Spectrum Analyzer 13	Advantest	R3132	121200411	02/12/2004	02/12/2005
Rad. Above 1Ghz	Horn Antenna 02	Com-Power	AH-118	10088	02/17/2004	02/17/2005
Rad. Above 1Ghz	Horn Antenna 04	Com-Power	AH-826	081-001	01/07/2004	01/07/2005
Rad. Above 1Ghz	Horn Antenna 05	Com-Power	AH-640	100A	09/18/2003	09/18/2005
Rad. Above 1Ghz	Microwave Cable RF SK-01	HUBER+SUHNER AG.	Sucoflex 102	22139 /2	02/17/2004	02/17/2005
Rad. Above 1Ghz	Peak Power Analyzer	HP	8990A	3621A01269	01/02/2004	01/02/2005
Rad. Above 1Ghz	Power Sensor Radar	HP	84815A	3318A01828	01/02/2004	01/02/2006
Rad. Spurious Emission	Power Meter 01	HP	438A	3513U06187	01/07/2004	01/07/2005
Rad. Spurious Emission	Power Sensor RF 01	HP	8481H	MY41091048	06/17/2003	06/17/2004
Rad. Above 1Ghz	Preamplifier 02	MITEQ	AFS44-0010265 0-40-10P-44	728229	05/13/2004	05/13/2005
Rad. Above 1Ghz	Preamplifier 09	MITEQ	AFS44-0010265 0-40-10P-44	858687	05/13/2004	05/13/2005
Rad. Above 1Ghz	Preamplifier 10	MITEQ	JS-26004000-27 -5A	818471	N/A	N/A
Rad. Above 1Ghz	Spectrum Analyzer 07	Advantest	R3182	110600649	04/08/2004	04/08/2005

Note: Calibration traceable to NIST or national or international standards.

International Standards Laboratory

Report Number: 04LR022FC

HC LAB: NVLAP:200234-0; VCCI: R-341, C-354; NEMKO: ELA 113a, 113c; BSMI: SL2-IN-E-0037; SL2-R1-E-0037; CNLA: 1178

LT LAB: NVLAP:200234-0; VCCI: R-1435, C-1440; NEMKO: ELA 113b, 113d; BSMI: SL2-IN-E-0013; CNLA: 0997


ISL-T10-R29-1

9.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data


Radiation/Conducti on	Filename	Version	Issued Date
Conduction	Tile.exe	1.12E	7/7/2000
Radiation	Tile.exe	1.12C	6/16/2000

9.4 Appendix D: Layout of EUT and Support Equipment


9.4.1 General Conducted Test Configuration

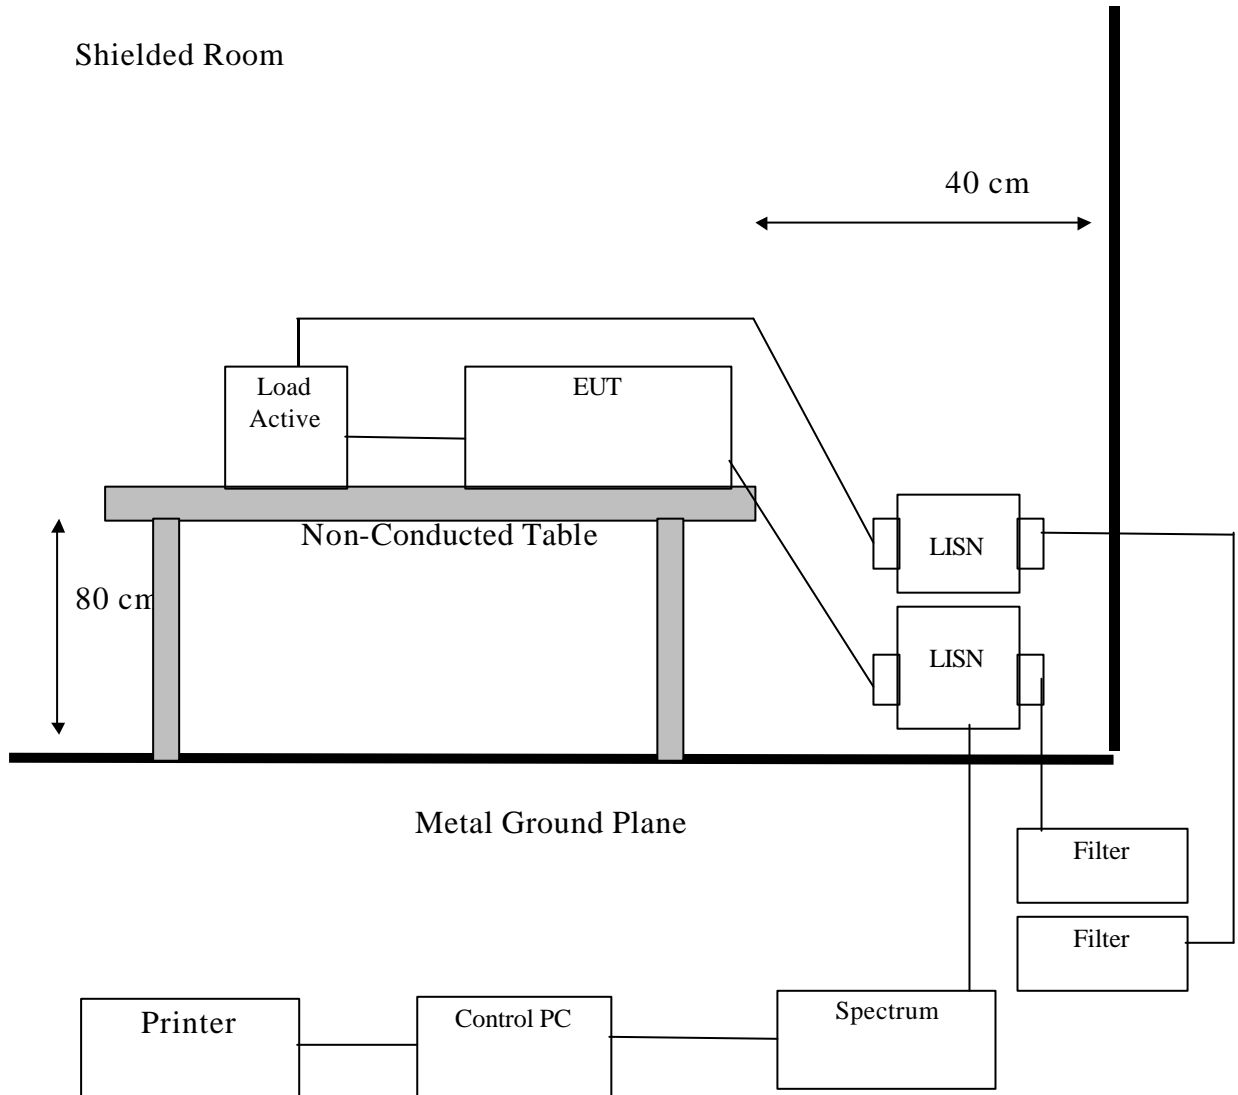

9.4.2 General Radiation Test Configuration

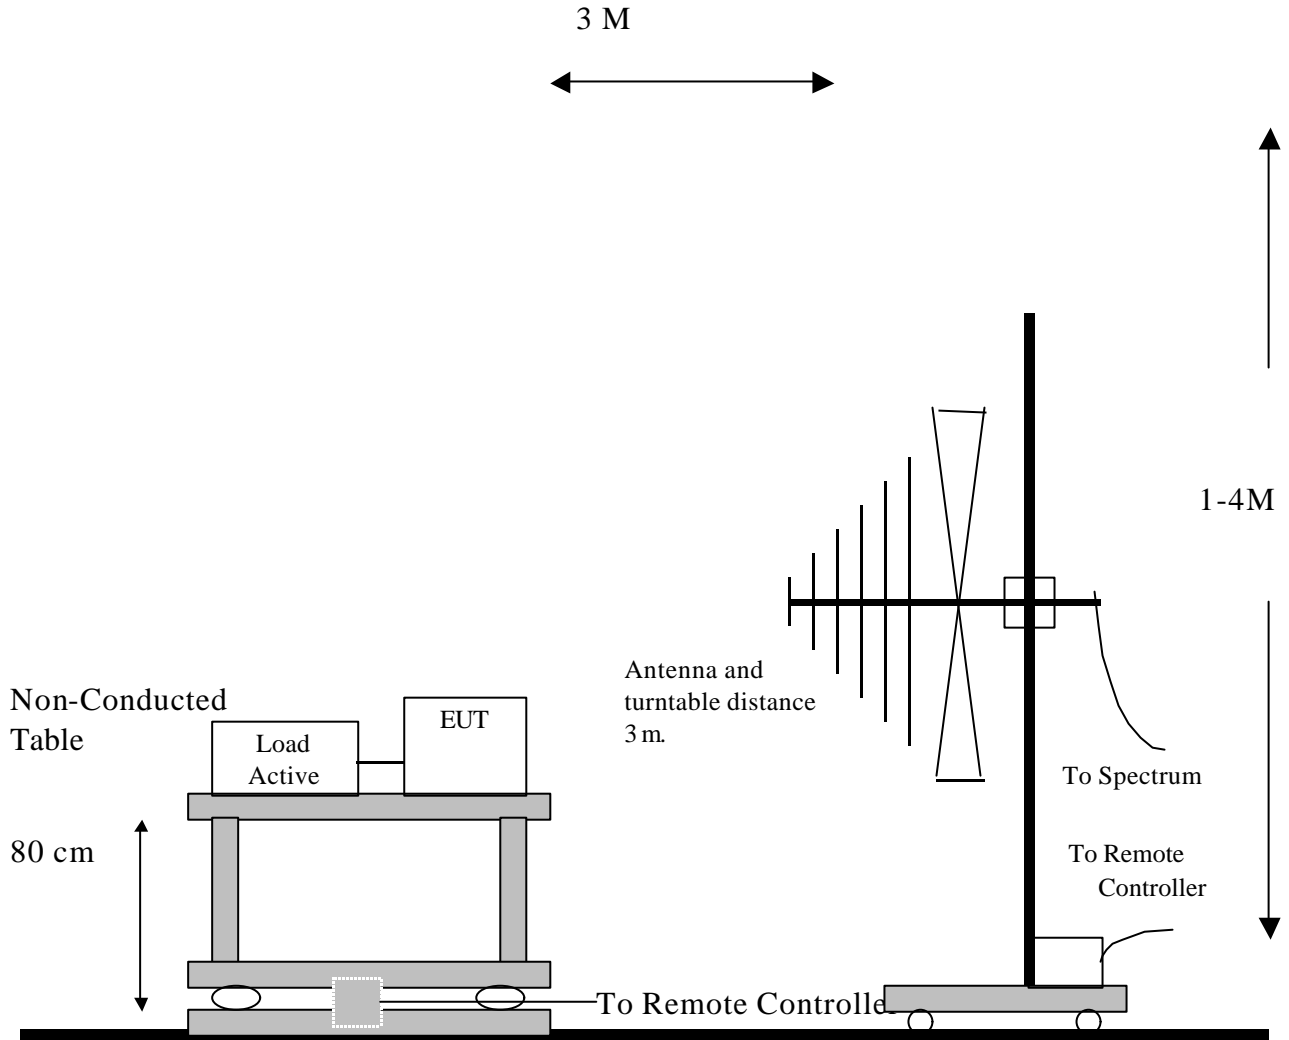

Metal Full Soldered Ground Plane

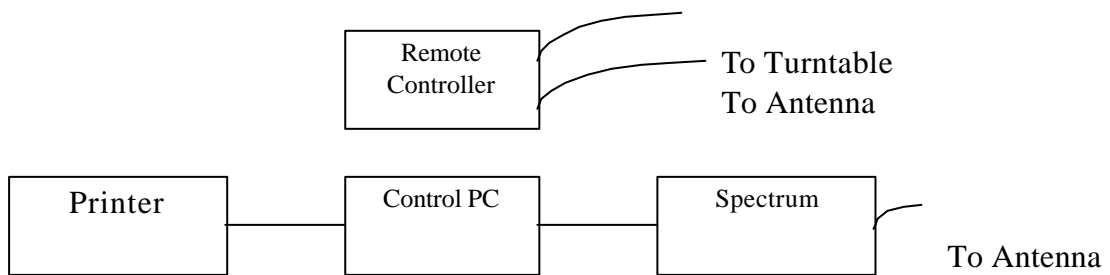

9.5 Appendix E: Description of Support Equipment

9.5.1 Description of Support Equipment

Support Unit 1.

Description:	IR Keyboard
Model Number:	FDC-3402
Serial Number:	FDKB 93001670
Power Supply Type:	Battery
Power Cord:	N/A
FCC ID:	N/A

9.5.2 Software for Controlling Support Unit

A test program which generates a complete line of continuously repeating "H" pattern is used as the software test program. The program was executed as follows:

- A. Read and write to the disk drives.
- B. The RF software makes the transmitter continually sending RF signals
- C. Repeat the above steps.

	Filename	Issued Date
CRTU1203	CRTU.exe	2003/04/02

9.5.3 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to AC Power Cord Inlet (3-pin)	1.8M	Nonshielded, Detachable	Plastic Head

9.6 Appendix F: Accuracy of Measurement

Test Site: Conduction 02

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.104	k=1	0.052
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.330	k=1	0.165
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	LISN Factor Calibration	Normal	k=2	1.200	k=1	0.600
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	0.850
7	Total Uncertainty @95% mim. Confidence Level	Normal	k=2	1.701		

Measurement Uncertainty Calculations:

$$U_c(y) = \text{square root} (u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2)$$

$$U = 2 * U_c(y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS : The treatment of Uncertainty in EMC Measurement.

Test Site: Chamber 02-3M

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.067	k=1	0.034
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.103	k=1	0.052
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	Antenna Factor Calibration	Normal	k=2	1.700	k=1	0.850
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	1.029
7	Total Uncertainty @95% mim. Confidence Level	Normal	k=2	2.059		

Measurement Uncertainty Calculations:


$$Uc(y) = \text{square root} (u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2)$$

$$U = 2 * Uc(y)$$


Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS : The treatment of Uncertainty in EMC Measurement.

9.7 Appendix G: Photographs of EUT Configuration Test Set Up


The Front View of Highest Conducted Set-up For EUT

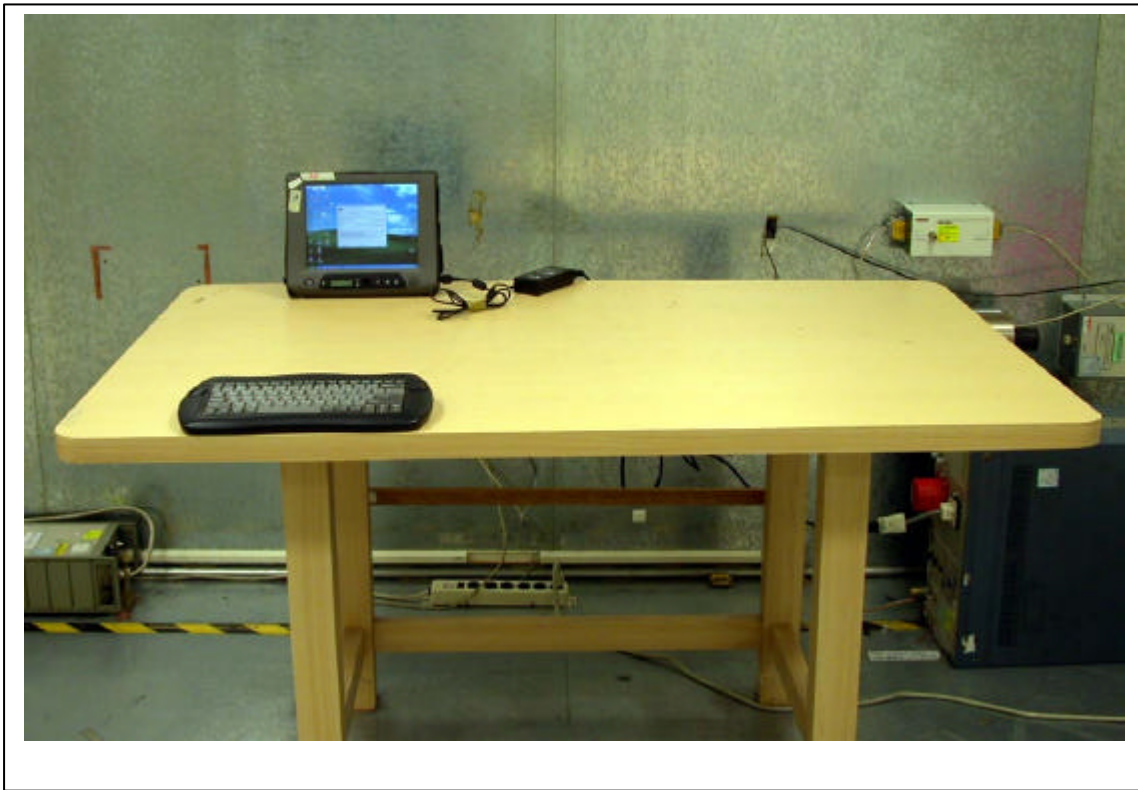


The Back View of Highest Conducted Set-up For EUT

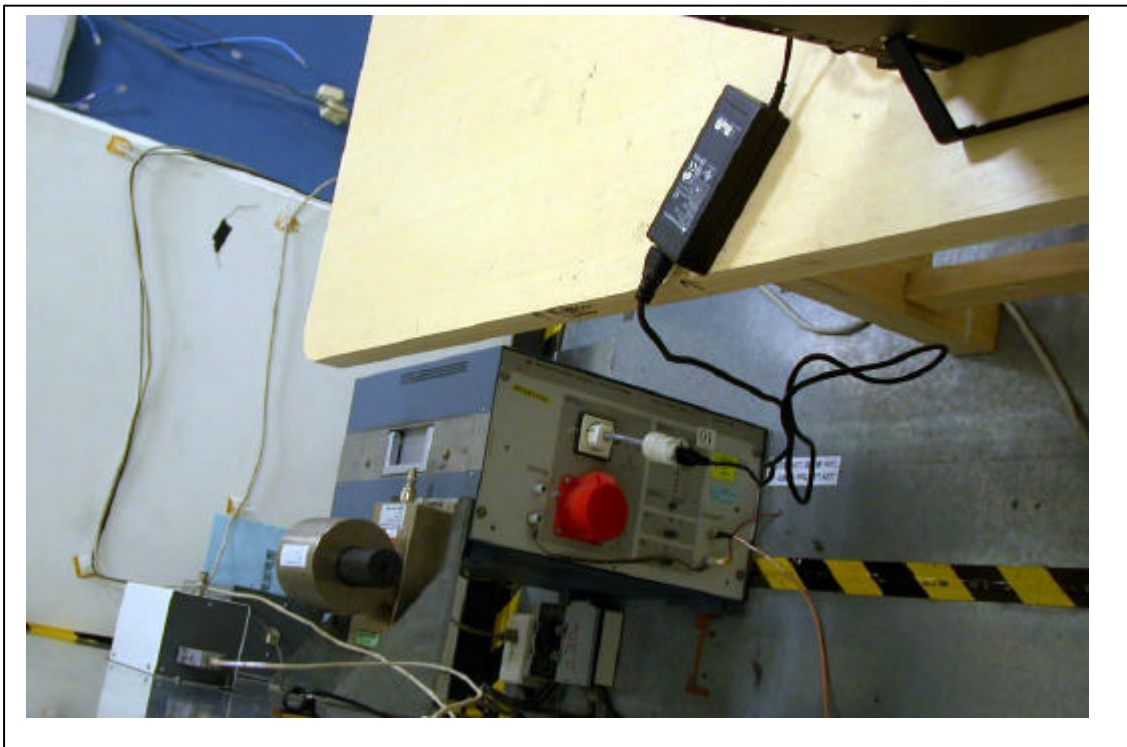

The Front View of Highest Radiated Set-up For EUT

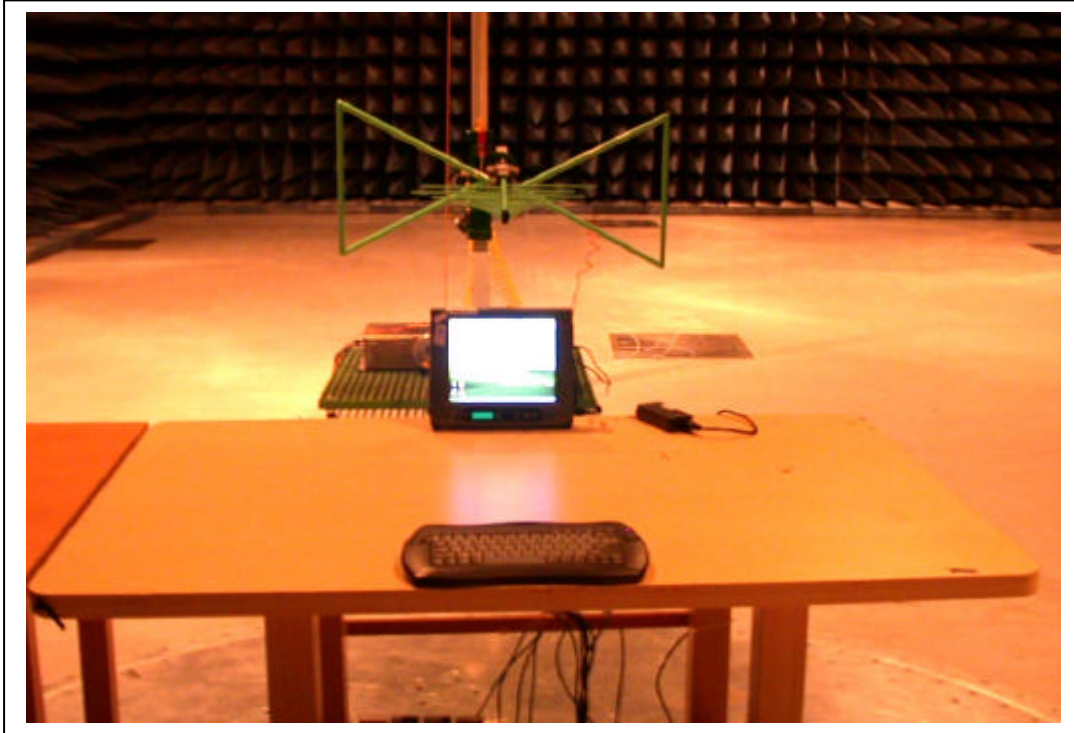

The Back View of Highest Radiated Set-up For EUT

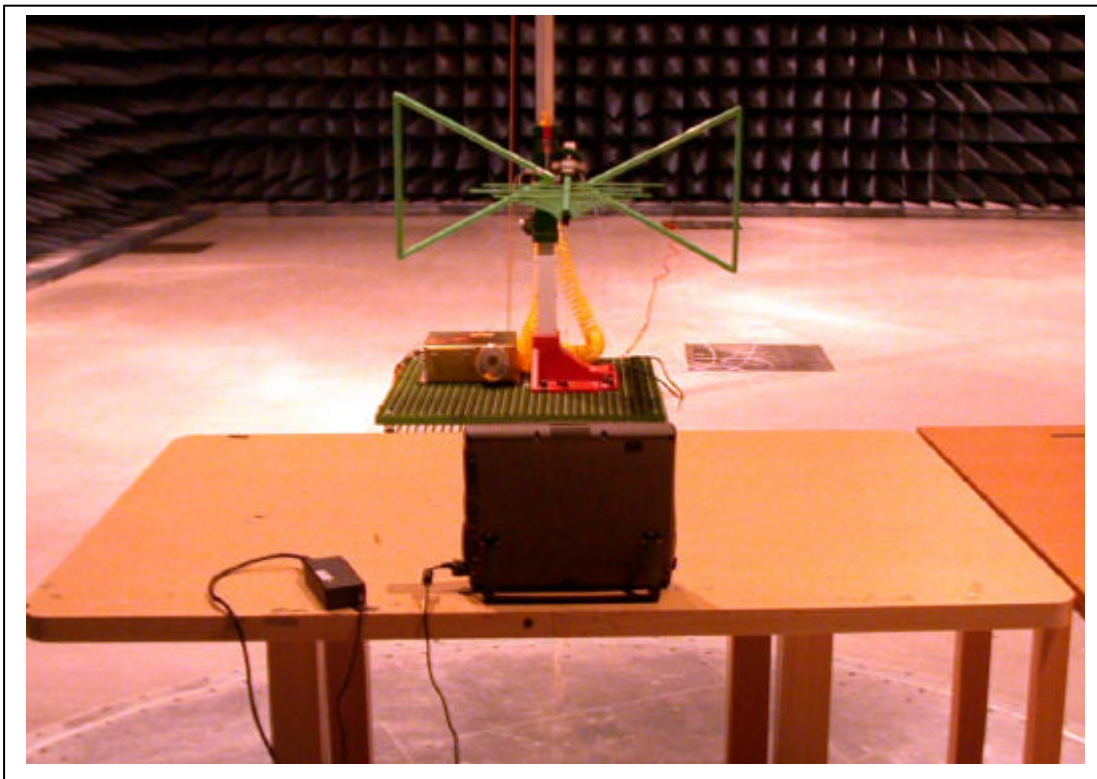

9.8 Appendix H: Antenna Spec.

Please refer to the attached file.