

Test Report
for
FCC Part 15 Subpart B & C

of

Product Name

Notebook Personal Computer

(with Intel PRO/Wireless 2200BG Network Connection inside)

Model

A770

(Brand:MITAC)

Applied by:

MITAC Technology Corporation
4F, No.1, R&D Road 2,
Hsinchu Science-Based industrial Park, Hsinchu 300
Taiwan,R. O. C.

Test Performed by:

International Standards Laboratory

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: ISL-05LR002FC

Issue Date: 2005/02/01

HC LAB:NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178

LT LAB:NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997

ISL-T10-R29-1

Contents of Report

1. General 1

 1.1 Certification of Accuracy of Test Data..... 1

2. Test Results Summary.....2

3. Description of Equipment Under Test (EUT).....3

4. TEST RESULTS (802.11b).....5

 4.1 Powerline Conducted Emissions [Section 15.207]..... 5

 4.1.1 EUT Configuration.....5

 4.1.2 Test Procedure.....5

 4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)5

 4.1.4 Test Data:.....6

 4.2 Bandwidth for DSSS [Section 15.247 (a)(2)]...... 8

 4.2.1 Test Procedure.....8

 4.2.2 Test Setup.....8

 4.2.3 Test Data:.....8

 4.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]...... 11

 4.3.1 Test Procedure.....11

 4.3.2 Test Setup.....11

 4.3.3 Test Data.....11

 4.4 Radiated Emission Measurement [Section [15.247(c)(4)] 12

 4.4.1 EUT Configuration.....12

 4.4.2 Test Procedure.....12

 4.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)12

 4.4.4 Test Data (30MHz – 1GHz):.....13

 4.4.5 Test Data (1GHz – 25 GHz)14

 4.5 Band Edge Measurement..... 17

 4.5.1 Test Procedure (Conducted)17

 4.5.2 Test Setup (Conducted)17

 4.5.3 Test Data:.....17

 4.5.4 Test Procedure (Radiated).....19

 4.5.5 Test Setup (Radiated)19

 4.5.6 Test Data.....20

 4.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)] 23

 4.7 DSSS Peak Power Spectral Density [Section 15.247(d)]..... 24

 4.7.1 Test Procedure.....24

 4.7.2 Test Setup.....24

 4.7.3 Test Data.....24

5. TEST RESULTS (802.11g) 27

 5.1 Powerline Conducted Emissions [Section 15.207]..... 27

 5.1.1 EUT Configuration.....27

 5.1.2 Test Procedure.....27

5.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested) 27

5.1.4 Test Data:28

5.2 Bandwidth for DSSS [Section 15.247 (a)(2)]..... 30

5.2.1 Test Procedure30

5.2.2 Test Setup30

5.2.3 Test Data:30

5.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 33

5.3.1 Test Procedure33

5.3.2 Test Setup33

5.3.3 Test Data33

5.4 Radiated Emission Measurement [Section [15.247(c)(4)] 34

5.4.1 EUT Configuration34

5.4.2 Test Procedure34

5.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested) 34

5.4.4 Test Data (30MHz – 1GHz):35

5.4.5 Test Data (1GHz – 25 GHz)36

5.5 Band Edge Measurement 39

5.5.1 Test Procedure (Conducted)39

5.5.2 Test Setup (Conducted)39

5.5.3 Test Data:39

5.5.4 Test Procedure (Radiated)41

5.5.5 Test Setup (Radiated)41

5.5.6 Test Data42

5.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)] 45

5.7 DSSS Peak Power Spectral Density [Section 15.247(d)] 46

5.7.1 Test Procedure46

5.7.2 Test Setup46

5.7.3 Test Data46

6. Appendix 49

6.1 Appendix A: Measurement Procedure for Power line Conducted Emissions 49

6.2 Appendix B: Test Procedure for Radiated Emissions 50

6.3 Appendix C: Test Equipment 51

6.3.1 Test Equipment List51

6.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data51

6.4 Appendix D: Layout of EUT and Support Equipment 52

6.4.1 General Conducted Test Configuration52

6.4.2 General Radiation Test Configuration53

6.5 Appendix E: Description of Support Equipment 54

6.5.1 Description of Support Equipment54

6.5.2 Software for Controlling Support Unit54

6.5.3 I/O Cable Condition of EUT and Support Units55

6.6 Appendix F: Accuracy of Measurement 56

6.7 Appendix G: Photographs of EUT Configuration Test Set Up 58

6.8 Appendix H: Antenna Spec..... 61

1. General

1.1 Certification of Accuracy of Test Data

Standards: CFR 47 Part 15 Subpart B Class B
CFR 47 Part 15 Subpart C (Section 15.247)

Test Procedure: ANSI C63.4:2003
Notebook Personal Computer (with Intel PRO/Wireless
2200BG Network Connection inside)

Equipment Tested:

Model: A770

Applied by: MITAC Technology Corporation

Sample received Date: 2005/01/20

Final test Date : 2005/01/21~2005/01/28

Test Result PASS

Test Site: Chamber 02, Conduction 02

Temperature Refer to each site test data

Humidity: Refer to each site test data

Test Engineer: Mailes Hsieh

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature



Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 64 pages, including 1 cover page, 2 contents page, and 61 pages for the test description. This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

2. Test Results Summary

The 802.11b functions of EUT has been tested according to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247(c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	MPE report attached
15.247(d)	Power Spectral Density	Pass	

The 802.11g functions of EUT has been tested according to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247(c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	MPE report attached
15.247(d)	Power Spectral Density	Pass	

3. Description of Equipment Under Test (EUT)

Description: Notebook Personal Computer
(with Intel PRO/Wireless 2200BG Network Connection inside)

Model No.: A770

FCC ID: **MAU016**

Brand: MITAC

Wireless LAN Module: Intel, Model: WM3B2200BG

Frequency Range 802.11b/g: 2400 - 2483.5 MHz

Support channel: 802.11b/g 11 Channels

Modulation Skill: 802.11b DBPSK(1Mbps), DQPSK(2Mbps), CCK(5.5/11Mbps)

802.11g OFDM (6M - 54Mbps)

Antennas Type: PIFA, Part: RFA-02-G01
made by Tonyo Electronics CO., LTD

Antenna Connected: Connected to RF connector on the PCB of the 802.11b/g WLAN Adapter. The user is not possible to change the antenna without disassembling the notebook computer.

Antenna peak Gain: 0.06 dBi (11b/g)

Main antenna

Power Type of LAN module: 3.3V DC from Notebook PC

The channel and the operation frequency of 802.11b and 802.11g is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

Adapter Type:	Delta (Model:ADP-90FB REV:F)
Hard Disk Driver:	Toshiba (Model:MK4021GAS)
Modem Card:	Askey (Model: V1456 VQL-P1(INT))
Floppy Driver:	TEAC (Model: FD-05HG)
SDRAM :	Infineon (Model:HYB25D256800BT-7)
USB Connector:	two 4 Pins
RJ11 Connector:	one 2 Pins
RJ45 Connector:	one 8 Pins
VGA Connector:	one 15 Pins
PCMCIA Slot:	two
Line out Port:	one
Line-in Port:	one
Serial Port:	one
Parallel Port:	one 25 Pins
1392 Port:	one 6 Pins
DC IN Port:	one
Battery:	Li-ION, DC 11.1Volt 8800mAh
LCD:	(Model: HT12X12-100)
Display:	LCD & CRT (1024*768)
Maximum Resolution :	LCD & CRT (1024*768)

Speed & CPU

Speed	CPU
100MHz	Pentium 4 1.6GHz

EMI Noise Source:

Crystal: 14.318MHz (X1), 16.0MHz (X2), 24.576MHz (X1, X2, in PCMCIA BD)
Clock Generator: U3

EMI Solution:

1. Add one filter core in RJ11 cable.
2. Add two sheet metal in motherboard and with contact low case.

4. TEST RESULTS (802.11b)

4.1 Powerline Conducted Emissions [Section 15.207]

4.1.1 EUT Configuration

The conducted emission test setups are in accordance with Figs 9, 10(a) and 10(b) of ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996.

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

4.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range	150 KHz--30MHz
Detector Function	Quasi-Peak/Average
Bandwidth (RBW)	9KHz

4.1.4 Test Data:

Power Line Conducted Emissions (Hot) Channel 1, 6, 11


Operator:MailesHsieh

Temperature(C):24

Humidity(%):50

10:55:18AM,Friday,January28,2005

Frequency MHz	LISNLoss (dB)	CableLoss (dB)	QPCorrt. Amp.(dBuV)	QPLimit (dBuV)	QPMargin (dB)	AVECorrt. Amp.(dBuV)	AVELimit (dBuV)	AVEMargin (dB)
0.48688	0.11	0.07	34.40	56.37	-21.98	32.33	46.37	-14.05
0.55793	0.13	0.07	37.56	56.00	-18.44	36.57	46.00	-9.43
0.62596	0.14	0.07	33.67	56.00	-22.33	32.14	46.00	-13.86
0.69798	0.15	0.07	34.67	56.00	-21.33	33.28	46.00	-12.72
0.97448	0.20	0.07	34.73	56.00	-21.27	32.43	46.00	-13.57
3.62425	0.20	0.13	37.55	56.00	-18.45	36.35	46.00	-9.65
4.04243	0.20	0.14	37.82	56.00	-18.18	36.48	46.00	-9.52
4.46169	0.21	0.15	38.25	56.00	-17.75	36.44	46.00	-9.56
4.80865	0.21	0.15	37.48	56.00	-18.52	35.66	46.00	-10.34
4.87979	0.22	0.15	37.54	56.00	-18.46	36.02	46.00	-9.98

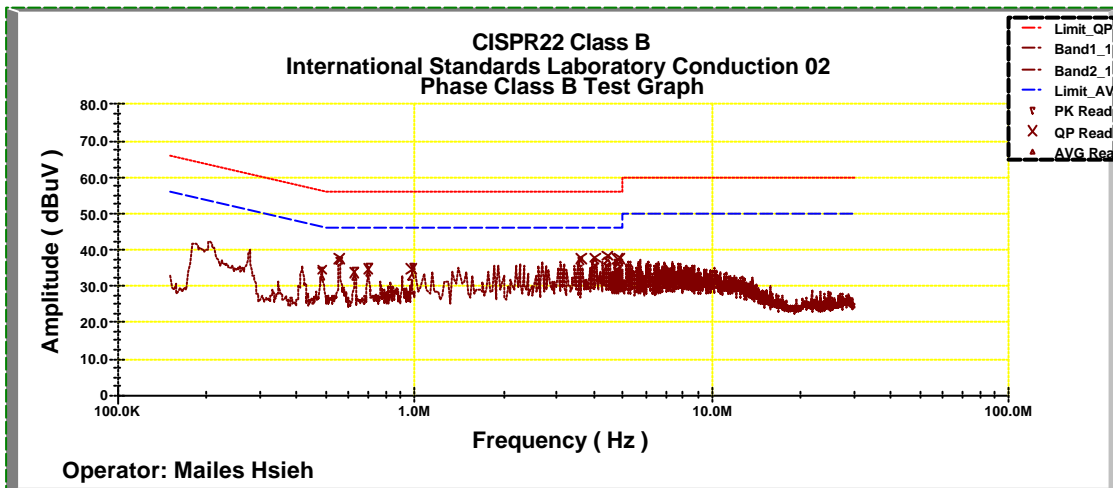

Power Line Conducted Emissions (Neutral) Channel 1, 6, 11


Operator:MailesHsieh

Temperature(C):24

10:44:33AM,Friday,January28,2005

Humidity(%):50

Frequency	LISNLoss	CableLoss	QPCorrt.	QPLimit	QPMargin	AVECorrt.	AVELimit	AVEMargin
MHz	(dB)	(dB)	Amp.(dBuV)	(dBuV)	(dB)	Amp.(dBuV)	(dBuV)	(dB)
0.28355	0.10	0.09	33.02	62.18	-29.16	26.58	52.18	-25.61
0.48625	0.11	0.07	34.60	56.39	-21.80	33.02	46.39	-13.38
0.55705	0.13	0.07	36.31	56.00	-19.69	35.37	46.00	-10.63
0.69595	0.15	0.07	33.84	56.00	-22.16	32.34	46.00	-13.66
0.97276	0.20	0.07	34.11	56.00	-21.89	31.93	46.00	-14.07
3.61392	0.20	0.13	37.51	56.00	-18.49	36.41	46.00	-9.59
4.35661	0.20	0.14	27.61	56.00	-28.39	21.29	46.00	-24.71
4.78793	0.19	0.15	29.41	56.00	-26.59	22.86	46.00	-23.14
4.86598	0.19	0.15	38.14	56.00	-17.86	36.57	46.00	-9.43
4.93293	0.19	0.15	33.13	56.00	-22.87	28.46	46.00	-17.54

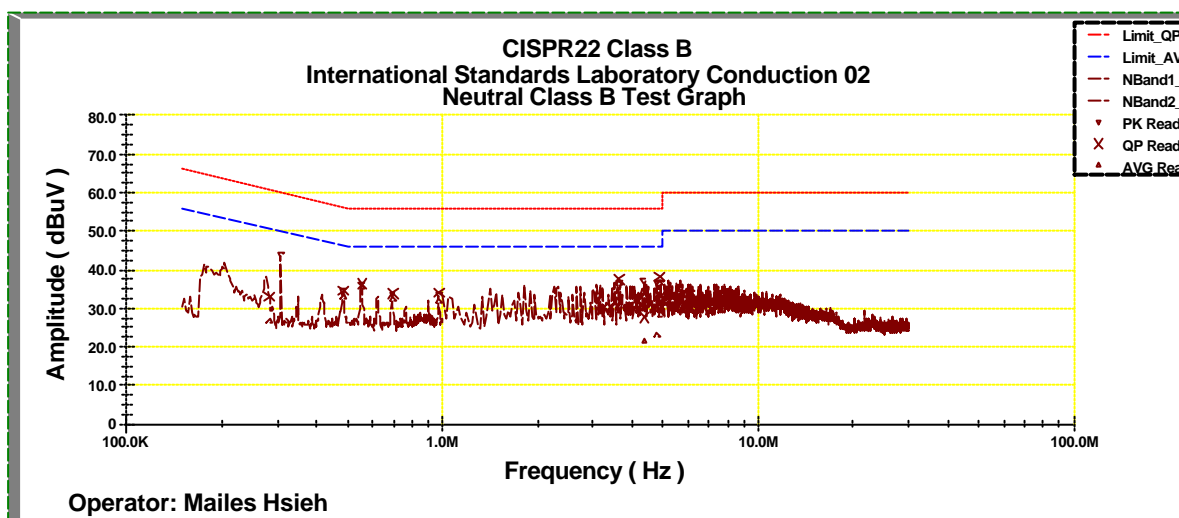

* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels .
 Margin = Amplitude + Insertion Loss- Limit
 A margin of -8dB means that the emission is 8dB below the limit


4.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

4.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode	Spectrum analyzer
Detector function	Peak mode
RBW	100KHz
VBW	100KHz

4.2.2 Test Setup

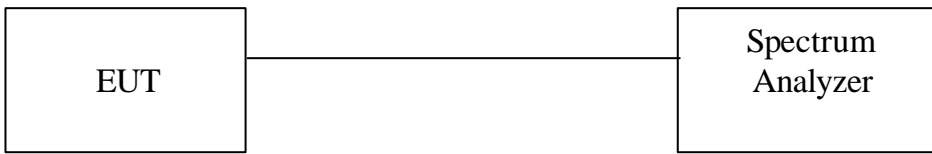

4.2.3 Test Data:

6dB Bandwidth

Temp. (deg. C): 25

Test Engr: Mailes Hsieh

Humidity (%): 50

Chennel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	9.2	0.5	Pass
6	2437	9.16	0.5	Pass
11	2462	9.16	0.5	Pass


Channel 1:



Channel 6:



Channel 11:

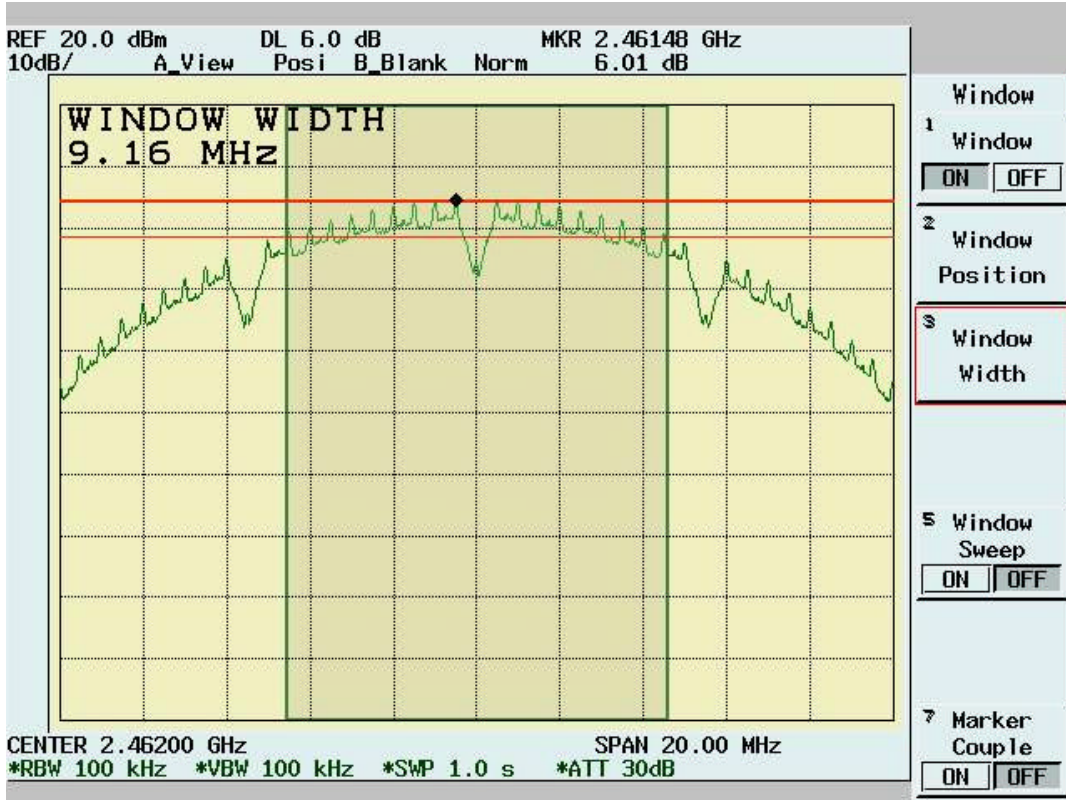


4.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

4.3.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer.

4.3.2 Test Setup

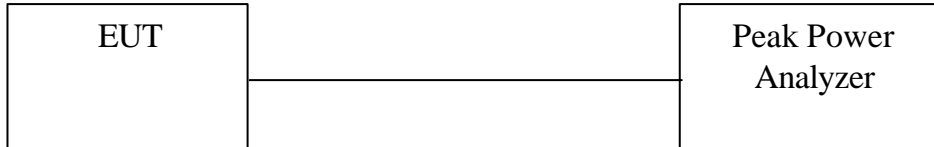

4.3.3 Test Data

Maximum Peak Output Power

Temp. (deg. C): 25

Test Engr: Mailes Hsieh

Humidity (%): 50

Channel	Frequency (Mhz)	Analyzer Reading (dBm)	Cable Loss (dB)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	16.218	1.1	53.93	17.318	30	Pass
6	2437	15.656	1.1	47.38	16.756	30	Pass
11	2462	15.343	1.1	44.09	16.443	30	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

4.4 Radiated Emission Measurement [Section [15.247(c)(4)]

4.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

4.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

4.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	3MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

4.4.4 Test Data (30MHz – 1GHz):

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Operator:MailesHsieh
 Temperature(C):21
 Humidity(%):51

11:53:04AM,Saturday,January29,2005

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos. (deg)
95.96	17.24	9.49	1.91	0.00	28.64	43.50	-14.86	196.00	153.00
165.8	18.02	8.63	2.42	0.00	29.07	43.50	-14.43	146.00	91.00
399.57	9.21	15.89	4.44	0.00	29.53	46.00	-16.47	102.00	125.00
499.48	11.95	17.49	5.28	0.00	34.72	46.00	-11.28	196.00	301.00
666.32	4.92	19.00	6.41	0.00	30.33	46.00	-15.67	102.00	240.00
683.78	3.95	19.00	6.52	0.00	29.46	46.00	-16.54	196.00	334.00
748.77	2.30	20.07	6.98	0.00	29.35	46.00	-16.65	146.00	190.00
813.76	0.96	20.24	7.55	0.00	28.74	46.00	-17.26	196.00	334.00
846.74	1.17	20.57	7.74	0.00	29.48	46.00	-16.52	196.00	350.00
911.73	8.26	20.56	8.16	0.00	36.98	46.00	-9.02	196.00	334.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Operator:MailesHsieh
 Temperature(C):21
 Humidity(%):51

11:55:14AM,Saturday,January29,2005

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos. (deg)
399.57	12.53	15.89	4.44	0.00	32.85	46.00	-13.15	103.00	107.00
432.55	9.36	16.16	4.69	0.00	30.21	46.00	-15.79	152.00	341.00
487.84	9.03	17.21	5.15	0.00	31.39	46.00	-14.61	103.00	320.00
499.48	20.20	17.49	5.28	0.00	42.97	46.00	-3.03	103.00	140.00
503.36	9.91	17.59	5.30	0.00	32.80	46.00	-13.20	103.00	140.00
666.32	9.47	19.00	6.41	0.00	34.88	46.00	-11.12	103.00	58.00
733.25	5.66	19.73	6.89	0.00	32.29	46.00	-13.71	152.00	259.00
799.21	3.80	20.10	7.36	0.00	31.26	46.00	-14.74	152.00	128.00
866.14	1.60	20.54	7.97	0.00	30.11	46.00	-15.89	103.00	255.00
911.73	4.16	20.56	8.16	0.00	32.88	46.00	-13.12	103.00	337.00

NOTE:

During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.

Margin = Corrected Amplitude – Limit
 Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain
 A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

4.4.5 Test Data (1GHz – 25 GHz) .

1GHz~ 25 GHz (Horizontal), Channel 1: 2412 MHz

Operator:MailesHsieh

RBW:1MHz
Humidity(%):40
Temperature(C):28

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2311.19	48.55pk	30.94	1.65	35.19	45.94pk	54.00av	-8.06	101	141
2585.91	47.23pk	30.93	1.38	35.12	44.42pk	54.00av	-9.58	102	227
5013.99	41.19pk	35.61	2.20	37.91	41.09pk	54.00av	-12.91	100	4
12760.2	41.39pk	41.65	3.63	36.58	50.09pk	54.00av	-3.91	101	285

1GHz~ 25 GHz (Vertical), Channel 1: 2412 MHz

Operator:MailesHsieh

RBW:1MHz
Humidity(%):40
Temperature(C):28

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2308.69	47.00pk	30.94	1.66	35.19	44.40pk	54.00av	-9.60	101	140
2583.42	46.86pk	30.93	1.38	35.12	44.04pk	54.00av	-9.96	102	226
5793.71	42.22pk	35.88	3.19	38.02	43.27pk	54.00av	-10.73	100	228
12526.5	40.62pk	41.69	3.68	35.86	50.13pk	54.00av	-3.87	101	223

Note:

- ⚡⚡ According to ANSI C63.4-2001 8.3.1.2 Notes(1):Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- ⚡⚡ “ * ”: Fundamental Frequency
- ⚡⚡ “***”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- ⚡⚡ “ pk” : peak mode
- ⚡⚡ “ av” : average mode
- ⚡⚡ “ ---” : No meter reading data due to the emission level is smaller than spectrum noise level.
- ⚡⚡ The Spectrum noise level+Correction Factor < Limit - 6 dB
- ⚡⚡ Margin=Corrected Amplitude – Limit
- ⚡⚡ Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- ⚡⚡ A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal) , Channel 6 : 2437 MHz

Operator:MailesHsieh

RBW:1MHz
Humidity(%):40
Temperature(C):28

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
2256.24	46.98pk	30.95	1.82	35.19	44.55pk	54.00av	-9.45	101	123
2610.89	47.50pk	30.94	1.38	35.10	44.72pk	54.00av	-9.28	102	235
933.57	40.48pk	35.35	2.15	37.84	40.15pk	54.00av	-13.85	100	7
12088.9	38.94pk	42.19	3.66	35.40	49.39pk	54.00av	-4.61	100	108

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz

Operator:MailesHsieh

RBW:1MHz
Humidity(%):40
Temperature(C):28

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
2273.73	46.87pk	30.95	1.76	35.19	44.39pk	54.00av	-9.61	101	129
2525.97	46.59pk	30.91	1.36	35.18	43.69pk	54.00av	-10.31	102	208
5895.1	41.89pk	35.84	3.11	38.06	42.78pk	54.00av	-11.22	100	257
12082.9	38.82pk	42.20	3.66	35.40	49.28pk	54.00av	-4.72	100	107

Note:

- ⚡ According to ANSI C63.4-2001 8.3.1.2 Notes(1):Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- ⚡ “ * ”: Fundamental Frequency
- ⚡ “***”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- ⚡ “ pk” : peak mode
- ⚡ “ av” : average mode
- ⚡ “ ---”: No meter reading data due to the emission level is smaller than spectrum noise level.
- ⚡ The Spectrum noise level+Correction Factor < Limit - 6 dB
- ⚡ Margin=Corrected Amplitude – Limit
- ⚡ Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- ⚡ A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz

Operator:MailesHsieh

RBW:1MHz
Humidity(%):40
Temperature(C):28

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
2256.24	46.69pk	30.95	1.82	35.19	44.26pk	54.00av	-9.74	101	123
2635.86	46.44pk	30.95	1.38	35.08	43.70pk	54.00av	-10.30	102	243
5069.93	40.43pk	35.66	2.33	37.91	40.51pk	54.00av	-13.49	100	20
12376.6	39.77pk	41.85	3.68	35.67	49.64pk	54.00av	-4.36	100	184

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz

Operator:MailesHsieh

RBW:1MHz
Humidity(%):40
Temperature(C):28

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
2381.12	46.85pk	30.92	1.44	35.20	44.02pk	54.00av	-9.98	101	163
2593.41	47.06pk	30.94	1.38	35.12	44.26pk	54.00av	-9.74	102	229
5783.22	41.37pk	35.89	3.15	38.02	42.39pk	54.00av	-11.61	100	225
9967.03	38.55pk	39.87	3.41	34.45	47.39pk	54.00av	-6.61	101	1
12424.6	40.13pk	41.79	3.68	35.71	49.89pk	54.00av	-4.11	100	197

Note:

- ⚡ According to ANSI C63.4-2001 8.3.1.2 Notes(1):Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- ⚡ “ * ”: Fundamental Frequency
- ⚡ “***”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- ⚡ “ pk” : peak mode
- ⚡ “ av” : average mode
- ⚡ “ ---” : No meter reading data due to the emission level is smaller than spectrum noise level.
- ⚡ The Spectrum noise level+Correction Factor < Limit - 6 dB
- ⚡ Margin=Corrected Amplitude – Limit
- ⚡ Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- ⚡ A margin of -8dB means that the emission is 8dB below the limit.


All frequencies from 1GHz to 25 GHz have been tested.

4.5 Band Edge Measurement

4.5.1 Test Procedure (Conducted)

1. The transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 100MHz
 RBW: 100KHz
 VBW: 100KHz
 Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed
3. Find the next peak frequency outside the operation frequency band

4.5.2 Test Setup (Conducted)

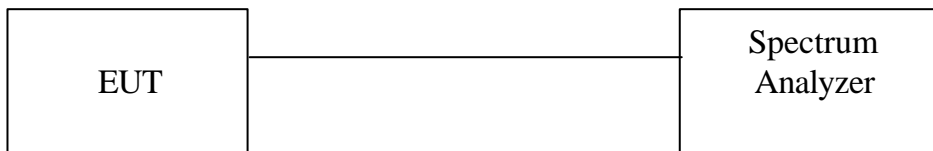


4.5.3 Test Data:

Table: Band Edge measurement (Conducted)


Test Engr: Mailes Hsieh		Temp. (deg. C):	25	
		Humidity (%):	50	
Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: >20dB (dB)	Pass/Fail
1	2411	112.02	---	---
Outside band	2399.5	74.38	37.64	Pass
11	2462.9	110.98	---	---
Outside band	2474.5	73.91	37.07	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

Band Edge Conducted measurement

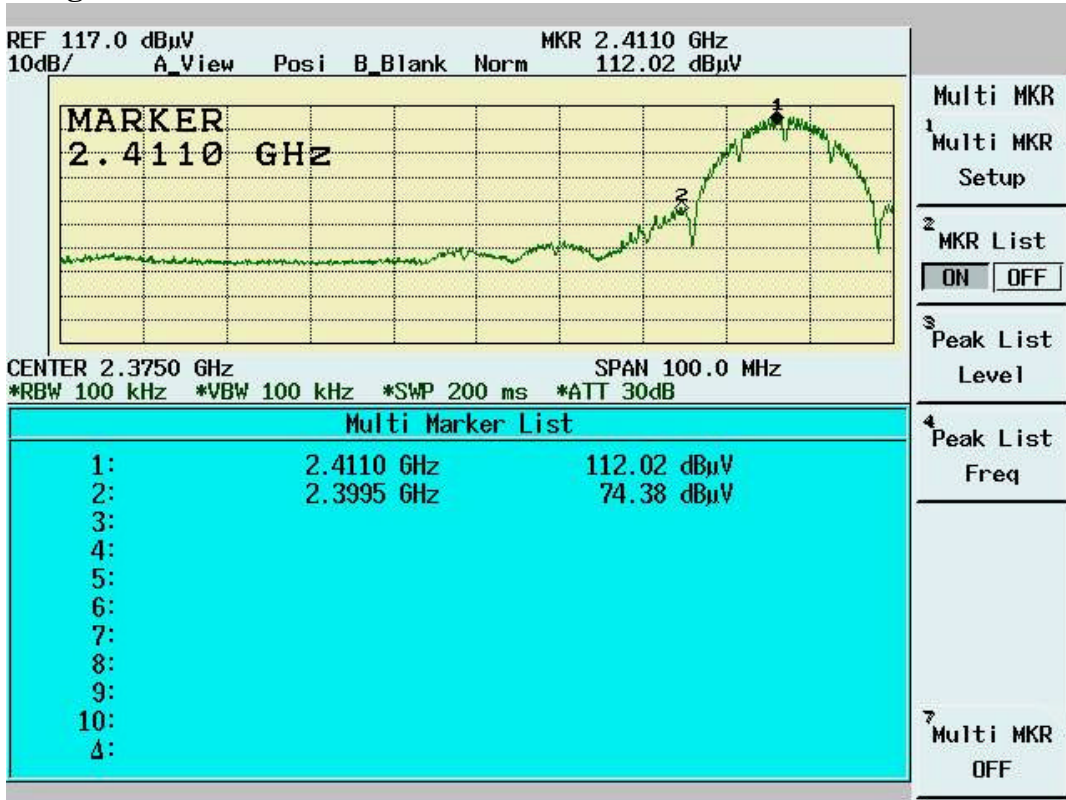

Band Edge Conducted Measurement

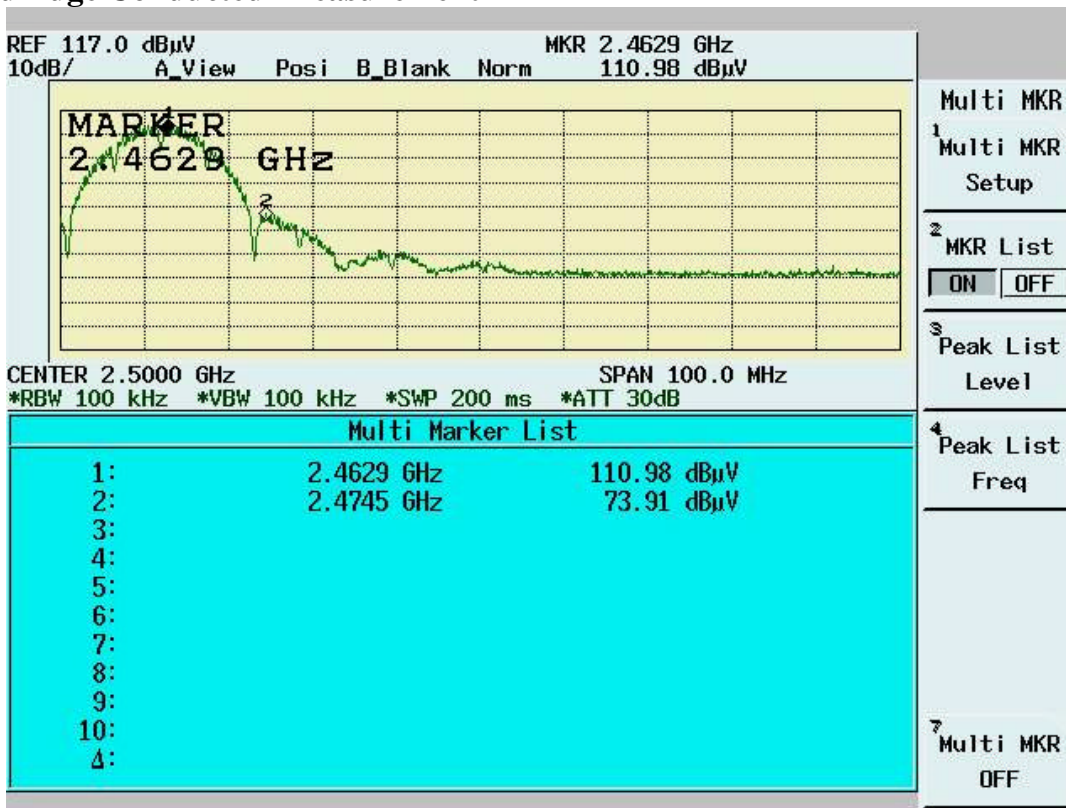

4.5.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 3MHz
Center frequency: 2.395GHz, 2.48GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz
VBW: 10Hz
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

4.5.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

4.5.6 Test Data

Table Band Edge measurement (Radiated)

Temp. (deg. C): 25

Test Engr: Mailes Hsieh


Humidity (%): 50

Description	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	dBc (Limit: > 20dBc)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
Channel_1 (average mode)	2410.7	47.01	35.48	82.49	---	---	10Hz	---
Channel_1 (peak mode)	2411.7	53.02	35.48	88.5	---	---	3MHz	---
Outside band (peak mode)	2398.5	20.7	35.48	56.18	32.32	---	3MHz	Pass
Channel_11 (average mode)	2462.8	45.37	35.5	80.87	---	---	10Hz	---
Channel_11 (peak mode)	2462.8	51.66	35.5	87.16	---	---	3MHz	---
Outside band (peak mode)	2475	20.7	35.51	56.21	30.95	---	3MHz	Pass
Channel_1 Restricted band (peak mode)	2374	17.1	35.47	52.57	---	74	3MHz	Pass
Restricted band (average mode)	2385.3	5.5	35.47	40.97	---	54	10Hz	Pass
Channel_11 Restricted band (peak mode)	2489.4	17.7	35.51	53.21	---	74	3MHz	Pass
Restricted band (average mode)	2548.7	6.38	35.51	41.89	---	54	10Hz	Pass


Note:

- ✂ The Spectrum plot of emission level measurement in Restricted band is attached.
- ✂ Emission Level=Spectrum Reading+Correction Factor
- ✂ Correction Factor=Antenna Factor+cable loss–amplifier gain
- ✂ Both Horizontal and Vertical polarizaion have been tested and the worst data is listed above.


Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 1)

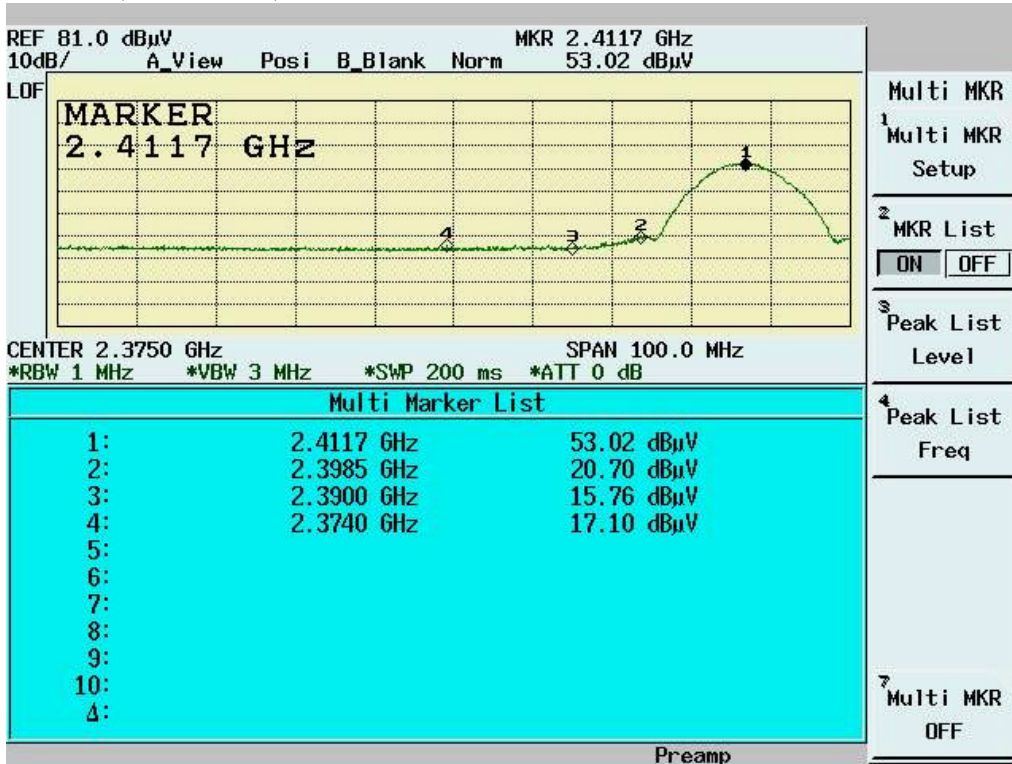


Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 1)

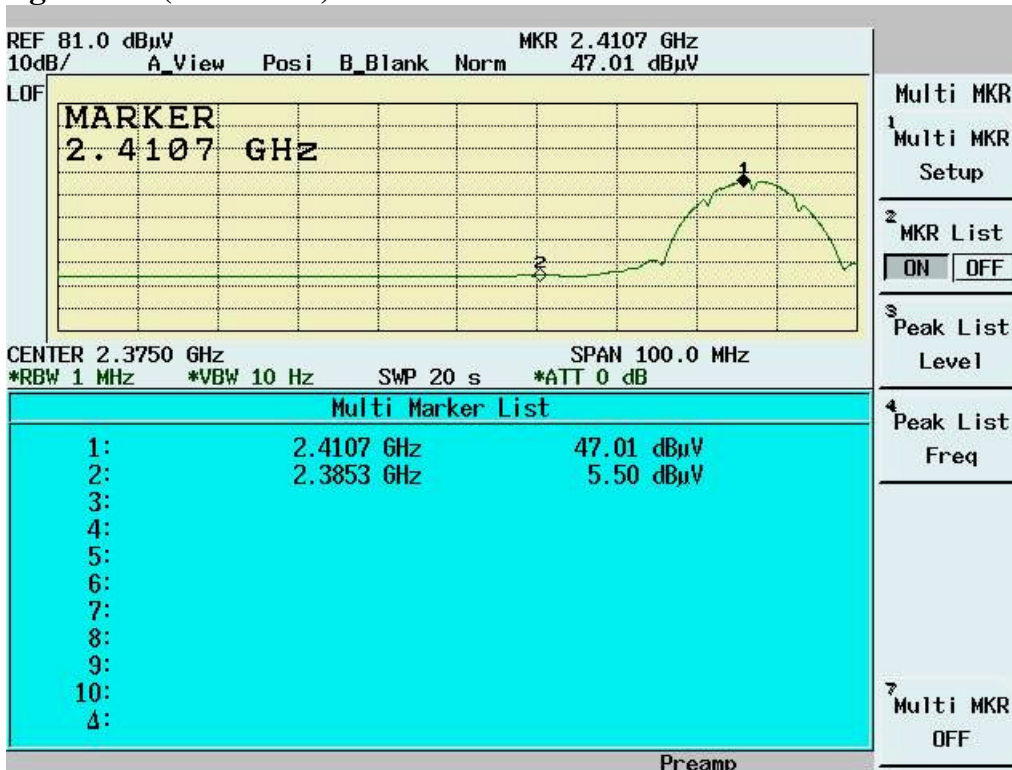

Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 11)

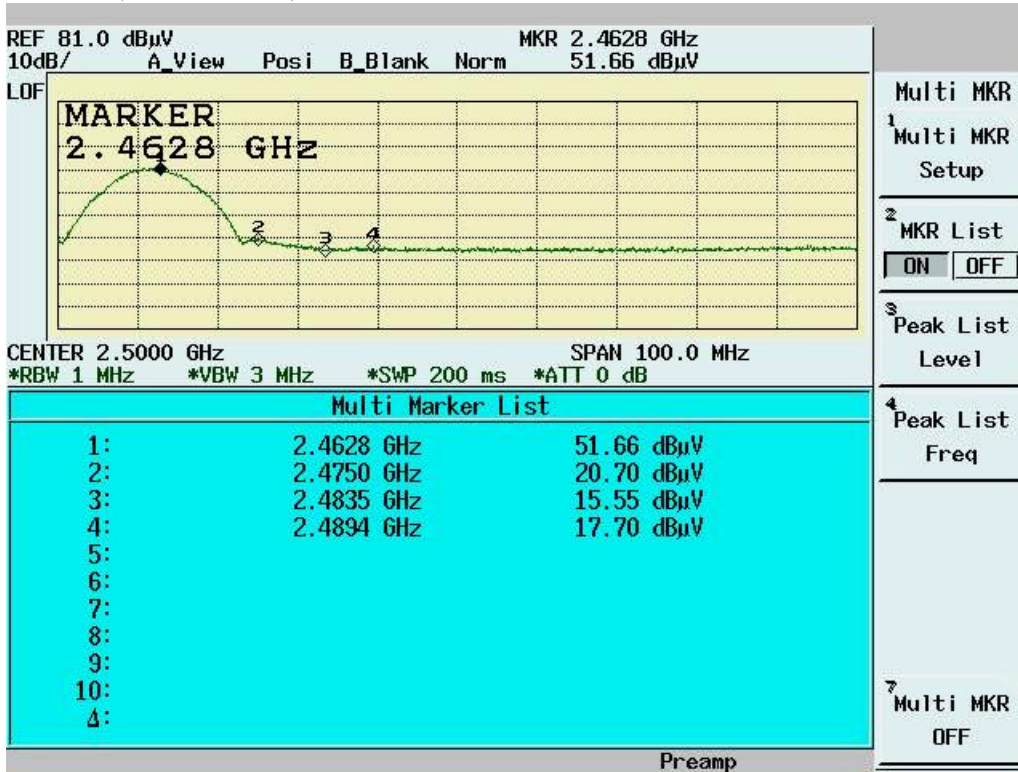

Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 11)

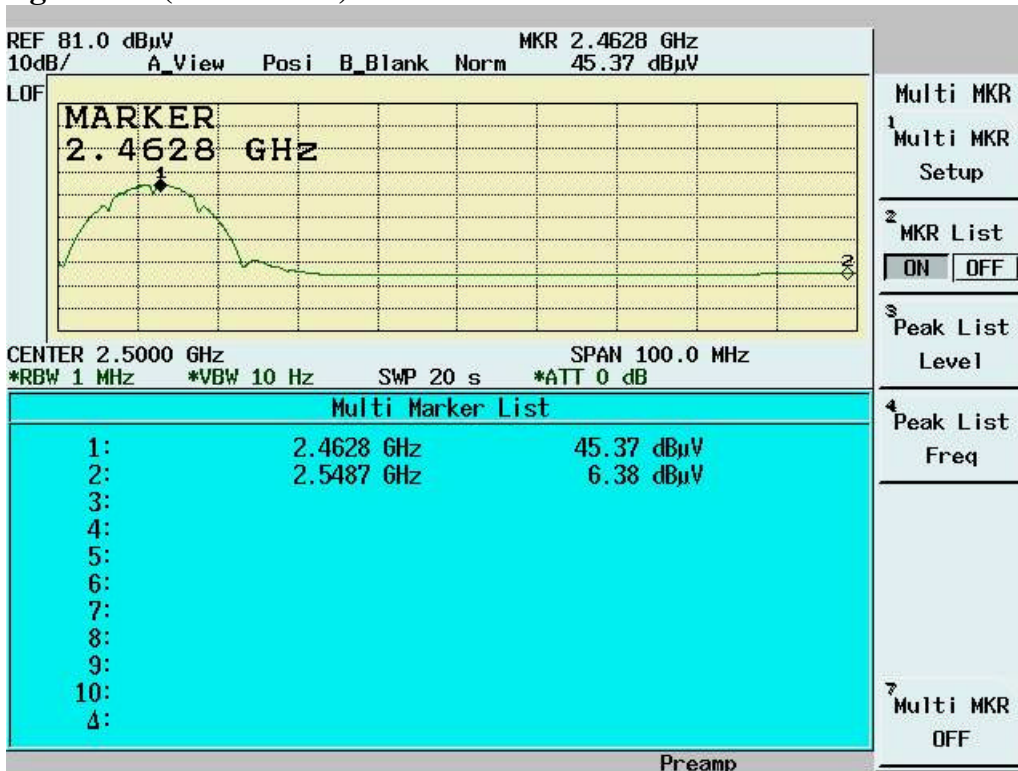

4.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]


See MPE report

4.7 DSSS Peak Power Spectral Density [Section 15.247(d)]

4.7.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN:1.5MHz
 RBW: 3KHz
 VBW: 30KHz
 Center frequency: fundamental frequency tested.
 Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.

4.7.2 Test Setup

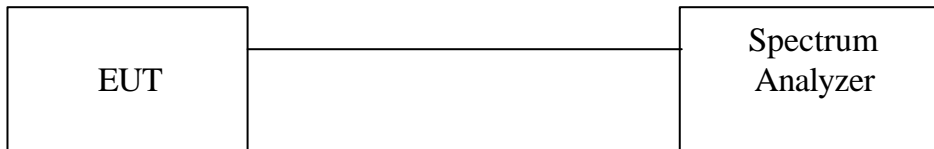

4.7.3 Test Data

Maximum Peak Output Power Density

Temp. (deg. C): 25

Test Engr: Mailes Hsieh

Humidity (%): 50

Channel	Frequency (MHz)	Spectrum Reading (dBm/3KHz)	Cable Loss (dB)	Peak Power Output (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
1	2412	-6.99	1.1	-5.89	8	Pass
6	2437	-6.41	1.1	-5.31	8	Pass
11	2462	-8.18	1.1	-7.08	8	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

Channel 1



Channel 6



Channel 11



5. TEST RESULTS (802.11g)

5.1 Powerline Conducted Emissions [Section 15.207]

5.1.1 EUT Configuration

The conducted emission test setups are in accordance with Figs 9, 10(a) and 10(b) of ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996.

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

5.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

5.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range	150 KHz--30MHz
Detector Function	Quasi-Peak/Average
Bandwidth (RBW)	9KHz

5.1.4 Test Data:

Power Line Conducted Emissions (Hot) Channel 1, 6, 11


Operator:MailesHsieh

Temperature(C):24

11:06:41AM,Friday,January28,2005

Humidity(%):50

Frequency MHz	LISNLoss (dB)	CableLoss (dB)	QPCorrt. Amp.(dBuV)	QPLimit (dBuV)	QPMargin (dB)	AVECorrt. Amp.(dBuV)	AVELimit (dBuV)	AVEMargin (dB)
0.49083	0.12	0.07	33.56	56.26	-22.71	31.72	46.26	-14.54
0.55921	0.13	0.07	38.00	56.00	-18.00	36.94	46.00	-9.06
0.62875	0.14	0.07	34.51	56.00	-21.49	33.11	46.00	-12.89
0.69948	0.15	0.07	34.92	56.00	-21.08	33.64	46.00	-12.36
0.97983	0.20	0.07	33.97	56.00	-22.03	31.95	46.00	-14.05
2.77489	0.20	0.11	23.78	56.00	-32.22	17.43	46.00	-28.57
3.55498	0.20	0.13	28.98	56.00	-27.02	25.04	46.00	-20.96
3.98196	0.20	0.14	37.89	56.00	-18.11	36.72	46.00	-9.28
4.40006	0.21	0.14	38.74	56.00	-17.26	36.98	46.00	-9.02
4.82066	0.21	0.15	38.11	56.00	-17.89	36.63	46.00	-9.37

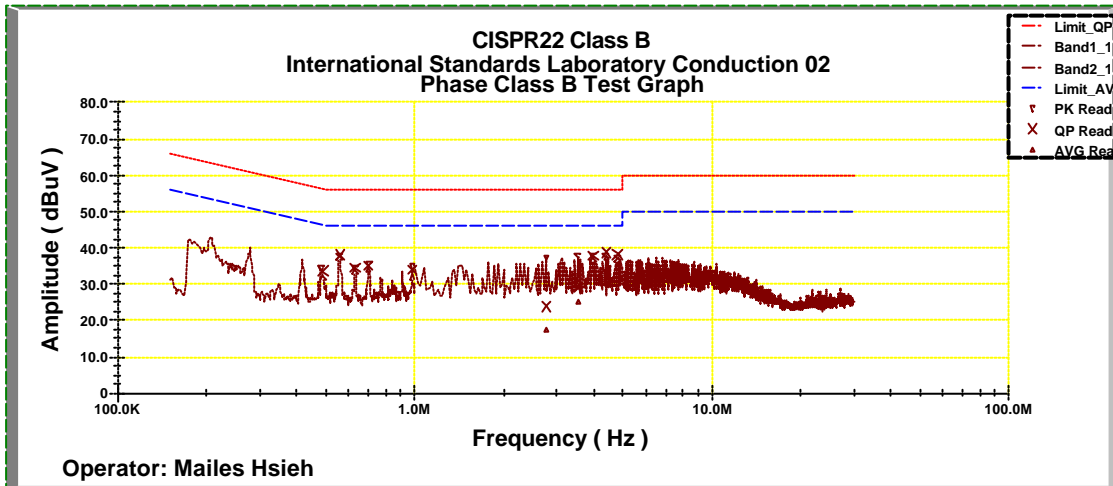

Power Line Conducted Emissions (Neutral) Channel 1, 6, 11


Operator:MailesHsieh

Temperature(C):24

Humidity(%):50

11:15:33AM,Friday,January28,2005

Frequency MHz	LISNLoss (dB)	CableLoss (dB)	QPCorrt. Amp.(dBuV)	QPLimit (dBuV)	QPMargin (dB)	AVECorrt. Amp.(dBuV)	AVELimit (dBuV)	AVEMargin (dB)
0.41953	0.10	0.08	35.82	58.30	-22.48	34.19	48.30	-14.11
0.49038	0.12	0.07	34.89	56.27	-21.39	33.28	46.27	-13.00
0.56095	0.13	0.07	37.22	56.00	-18.78	36.13	46.00	-9.87
0.62928	0.14	0.07	34.07	56.00	-21.93	32.64	46.00	-13.36
0.69851	0.15	0.07	34.67	56.00	-21.33	33.46	46.00	-12.54
3.98413	0.20	0.14	38.45	56.00	-17.55	37.38	46.00	-8.62
4.05363	0.20	0.14	39.37	56.00	-16.63	36.82	46.00	-9.18
4.40351	0.20	0.14	39.07	56.00	-16.93	37.01	46.00	-8.99
4.47654	0.20	0.15	38.53	56.00	-17.47	36.31	46.00	-9.69
4.82493	0.19	0.15	38.72	56.00	-17.28	37.33	46.00	-8.67

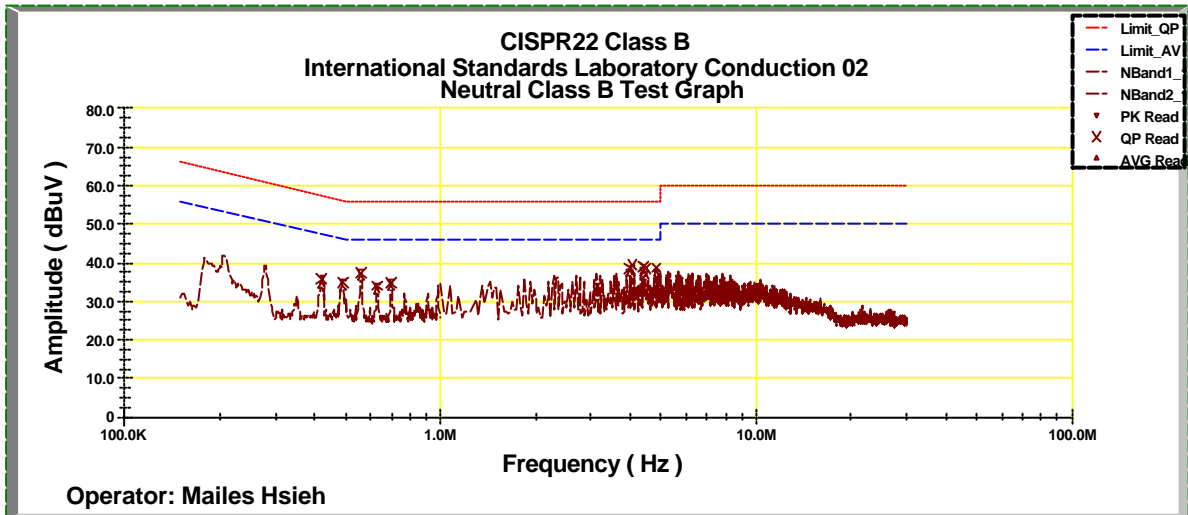

* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels .
 Margin = Amplitude + Insertion Loss- Limit
 A margin of -8dB means that the emission is 8dB below the limit


5.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

5.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode	Spectrum analyzer
Detector function	Peak mode
RBW	100KHz
VBW	100KHz

5.2.2 Test Setup

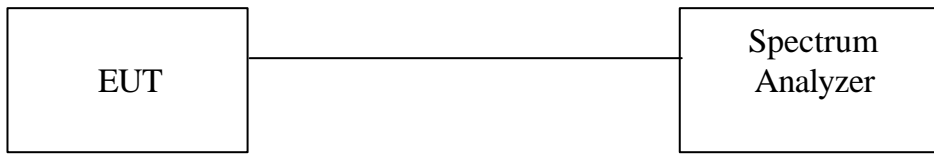

5.2.3 Test Data:

6dB Bandwidth

Temp. (deg. C): 25

Humidity (%): 50


Test Engr: Mailes Hsieh

Chennel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	16.64	0.5	Pass
6	2437	16.6	0.5	Pass
11	2462	16.56	0.5	Pass

Channel 1:



Channel 6:

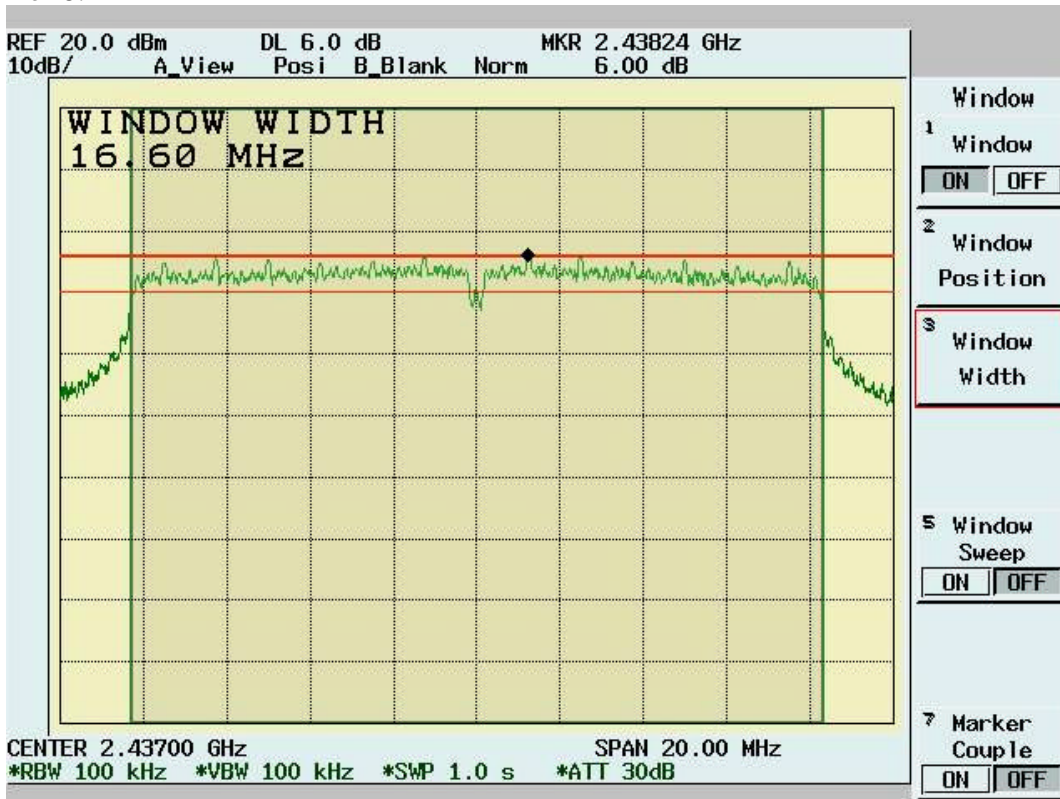

Channel 11:




5.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

5.3.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer.

5.3.2 Test Setup

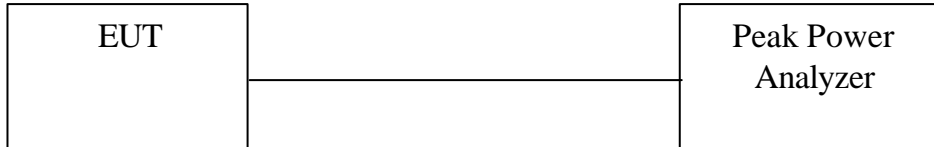

5.3.3 Test Data

Maximum Peak Output Power

Temp. (deg. C): 25

Test Engr: Mailes Hsieh

Humidity (%): 50

Channel	Frequency (Mhz)	Analyzer Reading (dBm)	Cable Loss (dB)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	17.906	1.1	79.54	19.006	30	Pass
6	2437	17.531	1.1	72.96	18.631	30	Pass
11	2462	17.156	1.1	66.93	18.256	30	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

5.4 Radiated Emission Measurement [Section [15.247(c)(4)]

5.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

5.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

5.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	3MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

5.4.4 Test Data (30MHz – 1GHz):

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Operator:MailesHsieh
 Temperature(C):21
 Humidity(%):51

11:58:40AM,Saturday,January29,2005

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos. (deg)
165.8	18.20	8.63	2.42	0.00	29.25	43.50	-14.25	146.00	92.00
399.57	10.50	15.89	4.44	0.00	30.82	46.00	-15.18	103.00	170.00
499.48	12.12	17.49	5.28	0.00	34.89	46.00	-11.11	146.00	108.00
599.39	4.49	18.90	5.85	0.00	29.24	46.00	-16.76	146.00	157.00
618.79	4.43	18.94	6.05	0.00	29.42	46.00	-16.58	103.00	334.00
666.32	5.05	19.00	6.41	0.00	30.45	46.00	-15.55	196.00	235.00
813.76	1.86	20.24	7.55	0.00	29.64	46.00	-16.36	146.00	271.00
846.74	1.75	20.57	7.74	0.00	30.06	46.00	-15.94	146.00	271.00
866.14	0.74	20.54	7.97	0.00	29.25	46.00	-16.75	146.00	26.00
911.73	2.34	20.56	8.16	0.00	31.06	46.00	-14.94	196.00	350.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Operator:MailesHsieh
 Temperature(C):21
 Humidity(%):51

12:01:32PM,Saturday,January29,2005

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos. (deg)
299.66	12.87	13.59	3.60	0.00	30.06	46.00	-15.94	153.00	203.00
399.57	13.07	15.89	4.44	0.00	33.39	46.00	-12.61	102.00	123.00
487.84	8.72	17.21	5.15	0.00	31.08	46.00	-14.92	102.00	304.00
499.48	19.42	17.49	5.28	0.00	42.19	46.00	-3.81	102.00	140.00
503.36	9.54	17.59	5.30	0.00	32.42	46.00	-13.58	153.00	219.00
666.32	9.27	19.00	6.41	0.00	34.67	46.00	-11.33	102.00	58.00
733.25	6.94	19.73	6.89	0.00	33.56	46.00	-12.44	153.00	252.00
799.21	3.95	20.10	7.36	0.00	31.42	46.00	-14.58	153.00	121.00
911.73	4.05	20.56	8.16	0.00	32.77	46.00	-13.23	102.00	123.00
933.07	1.16	20.86	8.31	0.00	30.34	46.00	-15.66	153.00	334.00

NOTE:

During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

5.4.5 Test Data (1GHz – 25 GHz) .

1GHz~ 25 GHz (Horizontal), Channel 1: 2412 MHz

Operator:MailesHsieh

RBW:1MHz
Humidity(%):40
Temperature(C):28

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2308.69	48.60pk	30.94	1.66	35.19	46.01pk	54.00av	-7.99	101	140
2563.44	47.08pk	30.93	1.37	35.14	44.23pk	54.00av	-9.77	102	220
5664.34	42.04pk	35.93	2.99	37.97	42.99pk	54.00av	-11.01	100	191
12148.9	39.57pk	42.12	3.66	35.46	49.90pk	54.00av	-4.10	100	124

1GHz~ 25 GHz (Vertical), Channel 1: 2412 MHz

Operator:MailesHsieh

RBW:1MHz
Humidity(%):40
Temperature(C):28

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2311.19	48.09pk	30.94	1.65	35.19	45.48pk	54.00av	-8.52	101	141
2625.87	46.47pk	30.95	1.38	35.09	43.72pk	54.00av	-10.28	102	240
6681.82	40.22pk	37.38	3.29	37.52	43.37pk	54.00av	-10.63	101	166
12460.5	40.34pk	41.75	3.69	35.74	50.03pk	54.00av	-3.97	100	206

Note:

- ⚡⚡ According to ANSI C63.4-2001 8.3.1.2 Notes(1):Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- ⚡⚡ “ * ”: Fundamental Frequency
- ⚡⚡ “***”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- ⚡⚡ “ pk” : peak mode
- ⚡⚡ “ av” : average mode
- ⚡⚡ “ --- ”: No meter reading data due to the emission level is smaller than spectrum noise level.
- ⚡⚡ The Spectrum noise level+Correction Factor < Limit - 6 dB
- ⚡⚡ Margin=Corrected Amplitude – Limit
- ⚡⚡ Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- ⚡⚡ A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal) , Channel 6 : 2437 MHz

Operator:MailesHsieh

RBW:1MHz
Humidity(%):40
Temperature(C):28

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
2333.67	46.91pk	30.93	1.58	35.19	44.24pk	54.00av	-9.76	101	148
2488.51	47.01pk	30.90	1.42	35.20	44.13pk	54.00av	-9.87	101	196
5493.01	40.13pk	35.99	2.85	37.91	41.07pk	54.00av	-12.93	100	141
12562.4	40.91pk	41.69	3.68	35.97	50.30pk	54.00av	-3.70	101	233

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz

Operator:MailesHsieh

RBW:1MHz
Humidity(%):40
Temperature(C):28

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
2333.67	46.80pk	30.93	1.58	35.19	44.12pk	54.00av	-9.88	101	148
2588.41	46.41pk	30.94	1.38	35.12	43.60pk	54.00av	-10.40	102	228
5590.91	40.82pk	35.96	2.93	37.94	41.77pk	54.00av	-12.23	100	170
12454.5	40.76pk	41.75	3.69	35.74	50.46pk	54.00av	-3.54	100	205

Note:

- ⚡ According to ANSI C63.4-2001 8.3.1.2 Notes(1):Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- ⚡ “ * ”: Fundamental Frequency
- ⚡ “***”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- ⚡ “ pk” : peak mode
- ⚡ “ av” : average mode
- ⚡ “ ---”: No meter reading data due to the emission level is smaller than spectrum noise level.
- ⚡ The Spectrum noise level+Correction Factor < Limit - 6 dB
- ⚡ Margin=Corrected Amplitude – Limit
- ⚡ Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- ⚡ A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.