

(Configuration 5: Notebook + Vehicle Docking + WLAN + Bluetooth)

(with 8.1" LCD, resolution: 800X600)

Test Report
for
FCC Part 15 Subpart B & C

of

Product Name

Notebook Personal Computer;
Notebook Personal Computer with Office Docking;
Notebook Personal Computer with Vehicle Docking

Model

ML900;
ML900 Office Docking;
ML900 Vehicle Docking
(Brand: MOTOROLA)

Applied by:

MITAC Technology Corporation
4F, No.1, R&D Road 2,
Hsinchu Science-Based industrial Park, Hsinchu 300
Taiwan, R. O. C.

Test Performed by:

International Standards Laboratory

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: ISL-05LR022FC

Issue Date: 2005/09/21

HC LAB:NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178

LT LAB:NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997

ISL-T10-R29-1

Contents of Report

1. General..... 1

1.1 Certification of Accuracy of Test Data 1

2. Test Results Summary 2

3. TEST RESULTS (802.11b)..... 3

3.1 Bandwidth for DSSS [Section 15.247 (a)(2)]..... 3

3.1.1 Test Procedure 3

3.1.2 Test Setup 3

3.1.3 Test Data:..... 3

3.2 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 6

3.2.1 Test Procedure 6

3.2.2 Test Setup 6

3.2.3 Test Data..... 6

3.3 Radiated Emission Measurement [Section [15.247(c)(4)] 7

3.3.1 EUT Configuration 7

3.3.2 Test Procedure 7

3.3.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested) .7

3.3.4 Test Data (30MHz – 1GHz): 8

3.3.5 Test Data (1GHz – 25 GHz) 9

3.4 Band Edge Measurement..... 15

3.4.1 Test Procedure (Conducted) 15

3.4.2 Test Setup (Conducted) 15

3.4.3 Test Data:..... 15

3.4.4 Test Procedure (Radiated) 17

3.4.5 Test Setup (Radiated)..... 17

3.4.6 Test Data 18

3.5 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 21

3.6 DSSS Peak Power Spectral Density [Section 15.247(d)]..... 22

3.6.1 Test Procedure 22

3.6.2 Test Setup 22

3.6.3 Test Data 22

- 4. TEST RESULTS (802.11g)..... 25
 - 4.1 Bandwidth for DSSS [Section 15.247 (a)(2)]..... 25
 - 4.1.1 Test Procedure 25
 - 4.1.2 Test Setup 25
 - 4.1.3 Test Data:..... 25
 - 4.2 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 28
 - 4.2.1 Test Procedure 28
 - 4.2.2 Test Setup 28
 - 4.2.3 Test Data 28
 - 4.3 Radiated Emission Measurement [Section [15.247(c)(4)] 29
 - 4.3.1 EUT Configuration 29
 - 4.3.2 Test Procedure 29
 - 4.3.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)29
 - 4.3.4 Test Data (30MHz – 1GHz): 30
 - 4.3.5 Test Data (1GHz – 25 GHz) 31
 - 4.4 Band Edge Measurement..... 37
 - 4.4.1 Test Procedure (Conducted) 37
 - 4.4.2 Test Setup (Conducted) 37
 - 4.4.3 Test Data:..... 37
 - 4.4.4 Test Procedure (Radiated) 39
 - 4.4.5 Test Setup (Radiated)..... 39
 - 4.4.6 Test Data 40
 - 4.5 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 43
 - 4.6 DSSS Peak Power Spectral Density [Section 15.247(d)]..... 44
 - 4.6.1 Test Procedure 44
 - 4.6.2 Test Setup 44
 - 4.6.3 Test Data 44

5. TEST RESULTS (Bluetooth)..... 47

5.1 FHSS Maximum Peak Output Power..... 47

5.1.1 Test Procedure 47

5.1.2 Test Setup 47

5.1.3 Test Data..... 47

5.2 Radiated Emission Measurement 50

5.2.1 EUT Configuration 50

5.2.2 Test Procedure 50

5.2.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)50

5.2.4 Test Data (30MHz – 1GHz): 51

5.2.5 Test Data (1GHz – 25 GHz) 52

5.3 Band Edge Measurement..... 55

5.3.1 Test Procedure (Conducted) 55

5.3.2 Test Setup (Conducted) 55

5.3.3 Test Data:..... 55

5.3.4 Test Procedure (Radiated) 57

5.3.5 Test Setup (Radiated)..... 57

5.3.6 Test Data 58

5.4 Bandwidth & Hopping Channel Separation 61

5.4.1 Standard Applicable..... 61

5.4.2 Test Procedure 61

5.4.3 Test Setup 61

5.4.4 Test Data 62

5.5 Number of Hopping Frequency Used..... 66

5.5.1 Test Procedure 66

5.5.2 Test Setup 66

5.5.3 Test Data 66

5.6 Dwell Time 68

5.6.1 Test Procedure 68

5.6.2 Test Setup 68

5.6.3 Test Data 68

5.7 Appendix G: Photographs of EUT Configuration Test Set Up 74

5.8 Appendix H: Antenna Spec. 77

1. General

1.1 Certification of Accuracy of Test Data

Standards: CFR 47 Part 15 Subpart B Class B
CFR 47 Part 15 Subpart C (Section 15.247)

Test Procedure: ANSI C63.4:2003
Notebook Personal Computer;
Notebook Personal Computer with Office Docking;

Equipment Tested: Notebook Personal Computer with Vehicle Docking

Model: ML900; ML900 Office Docking; ML900 Vehicle Docking

Applied by: MITAC Technology Corporation

Sample received Date: 2005/07/26


Final test Date : 2005/08/08-2005/09/05

Test Result PASS

Test Site: Chamber 02, Conduction 02

Temperature Refer to each site test data

Humidity: Refer to each site test data

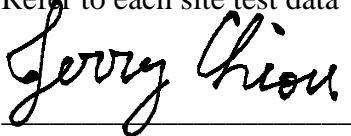


Test Engineer: Jerry Chiou

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature

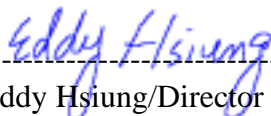

Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 81 pages, including 1 cover page , 3 contents page, and 77 pages for the test description. This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

2. Test Results Summary

The 802.11b functions of EUT has been tested according to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 (c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	MPE report attached
15.247 (d)	Power Spectral Density	Pass	

The 802.11g functions of EUT has been tested according to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 (c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	MPE report attached
15.247 (d)	Power Spectral Density	Pass	

The Bluetooth functions of EUT has been tested according to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207(a)	AC Power Line Emissions	Pass	
15.247(b) (1)	Max. Peak Output Power	Pass	
15.209(a)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 (c)	Band Edge Measurement	Pass	
15.247(a)(1)(iii)	Number of Hopping Frequency Used	Pass	
15.247(a) (1)(ii)	Spectrum Bandwidth Of FHSS device	Pass	
15.247(a)(1)	Hopping Channel Separation	Pass	
15.247(a)(1)(iii)	Dwell Time	Pass	

3. TEST RESULTS (802.11b)


3.1 Bandwidth for DSSS [Section 15.247 (a)(2)]

3.1.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode	Spectrum analyzer
Detector function	Peak mode
RBW	100KHz
VBW	100KHz

3.1.2 Test Setup

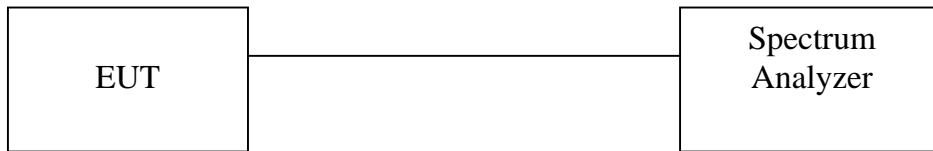

3.1.3 Test Data:

6dB Bandwidth

Test Engineer: Jerry Chiou


Temperature (): 27

Tx Data Rate=1Mbps

Humidity (%): 55

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	9.16	0.5	Pass
6	2437	9.60	0.5	Pass
11	2462	9.12	0.5	Pass


Channel 1:

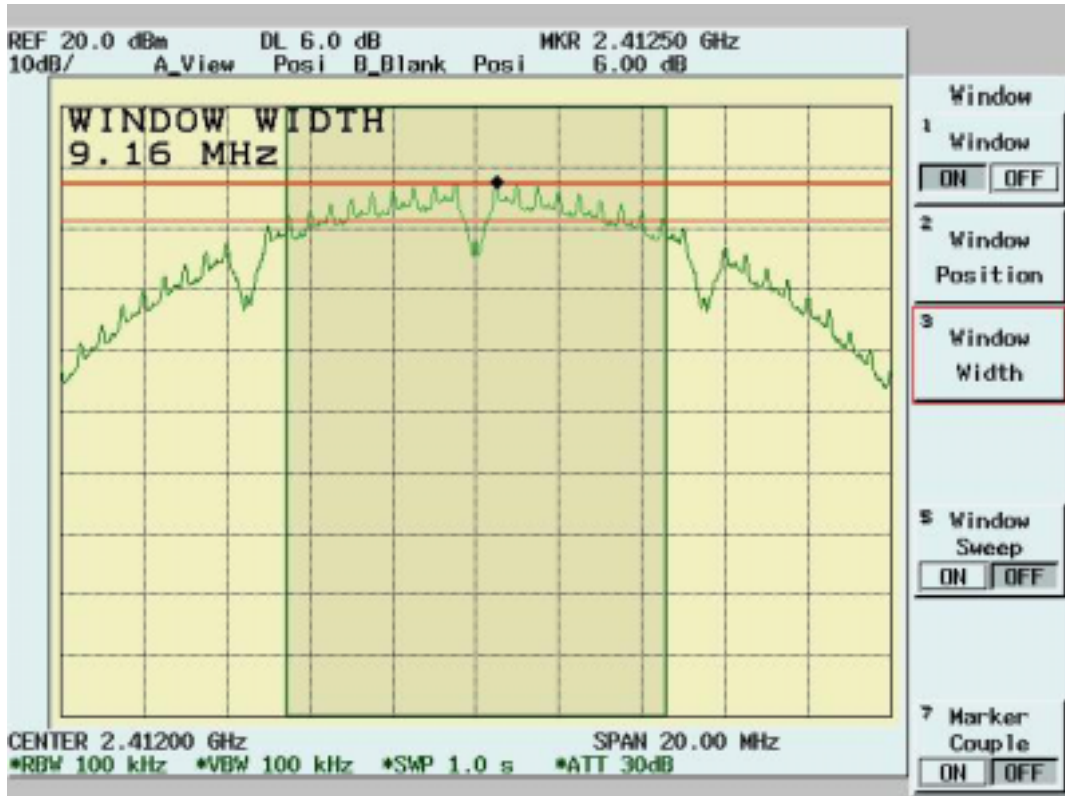

Channel 6:



Channel 11:

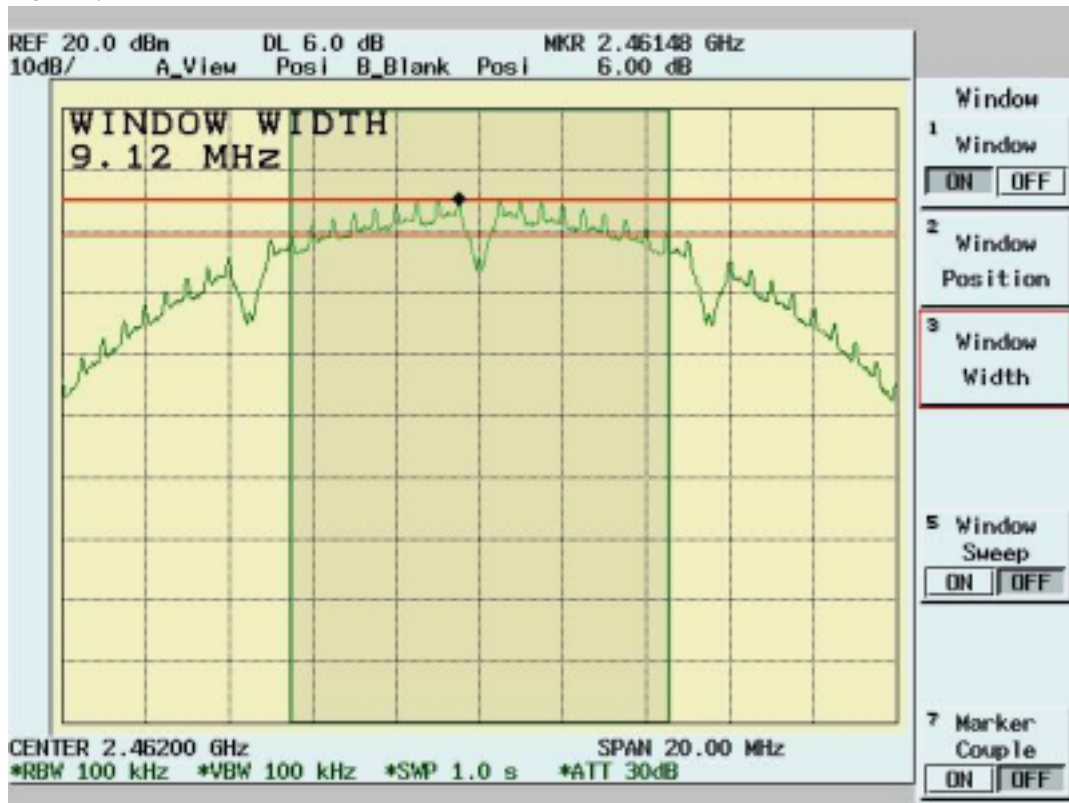


3.2 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

3.2.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer.

3.2.2 Test Setup

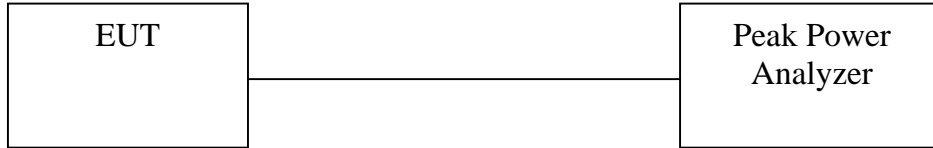

3.2.3 Test Data

Maximum Peak Output Power

Test Engineer: Jerry Chiou

Temperature (): 27

Tx Data Rate=1Mbps

Humidity (%): 55

Channel	Frequency (Mhz)	Analyzer Reading (dBm)	Cable Loss (dB)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	16.22	1.10	53.93	17.32	30	Pass
6	2437	15.69	1.10	47.72	16.79	30	Pass
11	2462	15.38	1.10	44.41	16.48	30	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

3.3 Radiated Emission Measurement [Section [15.247(c)(4)]

3.3.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

3.3.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

3.3.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	3MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

3.3.4 Test Data (30MHz – 1GHz):

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Operator: Jerry Chiou
 Temperature (C): 23
 Humidity (%): 54

06:39:05 PM, Friday, August 12, 2005

Frequency	Rx Amp.	Ant Fact	CableLoss	PreAmpGain	Corrct. Emi.	Limit	Margin	Ant. Pos.	Table Pos.
MHz	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg)
96.93	20.02	9.69	1.90	0.00	31.60	43.50	-11.90	197.00	23.00
106.63	18.51	11.10	1.99	0.00	31.60	43.50	-11.90	102.00	223.00
142.52	17.23	10.10	2.21	0.00	29.54	43.50	-13.96	197.00	170.00
366.59	14.52	16.10	4.22	0.00	34.84	46.00	-11.16	102.00	321.00
455.83	10.71	16.34	4.90	0.00	31.95	46.00	-14.05	102.00	305.00
499.48	9.12	17.39	5.28	0.00	31.80	46.00	-14.20	197.00	203.00
666.32	17.91	19.00	6.41	0.00	43.31	46.00	-2.69	197.00	186.00
733.25	11.91	19.80	6.89	0.00	38.59	46.00	-7.41	197.00	301.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Operator: Jerry Chiou
 Temperature (C): 23
 Humidity (%): 54

06:39:05 PM, Friday, August 12, 2005

Frequency	Rx Amp.	Ant Fact	CableLoss	PreAmpGain	Corrct. Emi.	Limit	Margin	Ant. Pos.	Table Pos.
MHz	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg)
71.71	24.06	5.61	1.52	0.00	31.19	40.00	-8.81	197.00	6.00
75.59	21.08	6.07	1.62	0.00	28.77	40.00	-11.23	197.00	318.00
351.07	13.29	16.19	4.12	0.00	33.60	46.00	-12.40	197.00	252.00
366.59	14.51	16.10	4.22	0.00	34.82	46.00	-11.18	102.00	321.00
423.82	12.11	16.04	4.60	0.00	32.75	46.00	-13.25	197.00	219.00
432.55	13.26	16.10	4.69	0.00	34.04	46.00	-11.96	102.00	190.00
666.32	19.70	19.00	6.41	0.00	45.11	46.00	-0.89	197.00	186.00
733.25	11.91	19.80	6.89	0.00	38.59	46.00	-7.41	197.00	301.00

NOTE:

➤ During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.

➤ Margin = Corrected Amplitude – Limit
 Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain
 A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

3.3.5 Test Data (1GHz – 25 GHz) .

1GHz~ 25 GHz (Horizontal), Channel 1: 2412 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
1132.37	46.44 pk	25.11	2.19	34.00	39.73 pk	54.00 av	-14.27	102	103
1164.84	46.16 pk	25.26	2.19	34.02	39.59 pk	54.00 av	-14.41	102	101
1332.17	48.02 pk	26.03	2.21	34.11	42.14 pk	54.00 av	-11.86	101	89
1364.64	44.75 pk	26.18	2.21	34.13	39.01 pk	54.00 av	-14.99	101	87
1664.34	43.55 pk	28.18	2.35	34.52	39.56 pk	54.00 av	-14.44	101	66
1811.69	41.98 pk	29.42	2.46	34.81	39.05 pk	54.00 av	-14.95	100	56
1846.65	41.83 pk	29.71	2.49	34.88	39.15 pk	54.00 av	-14.85	100	54
1999	40.88 pk	30.99	2.60	35.18	39.30 pk	54.00 av	-14.70	100	43
2301.2	45.27 pk	30.94	1.68	35.19	42.70 pk	54.00 av	-11.30	101	138
2311.19	50.80 pk	30.94	1.65	35.19	48.20 pk	54.00 av	-5.80	101	141
2333.67	47.18 pk	30.93	1.58	35.19	44.50 pk	54.00 av	-9.50	101	148
2510.99	45.31 pk	30.90	1.36	35.19	42.39 pk	54.00 av	-11.61	102	203
2610.89	43.23 pk	30.94	1.38	35.10	40.45 pk	54.00 av	-13.55	102	235
4823.74	46.95 pk	34.93	2.12	37.72	46.29 pk	54.00 av	-7.71	100.00	347.00
7235.92	46.22 pk	39.48	2.68	36.83	51.55 pk	54.00 av	-2.45	100.00	26.00
9648.18	46.82 pk	40.57	3.25	34.33	56.31 pk	74.00 pk	-17.69	100.00	352.00
9648.18	33.00 av	40.57	3.25	34.33	42.49 av	54.00 av	-11.51	100.00	352.00

1GHz~ 25 GHz (Vertical), Channel 1: 2412 MHz

Operator: Jerry Chiou

RBW: 1MHz
 Humidity (%): 41
 Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1132.37	47.38 pk	25.11	2.19	34.00	40.67 pk	54.00 av	-13.33	102	103
1164.84	46.88 pk	25.26	2.19	34.02	40.31 pk	54.00 av	-13.69	102	101
1219.78	46.54 pk	25.51	2.20	34.05	40.20 pk	54.00 av	-13.80	102	97
1264.74	47.27 pk	25.72	2.20	34.07	41.11 pk	54.00 av	-12.89	101	94
1332.17	47.51 pk	26.03	2.21	34.11	41.64 pk	54.00 av	-12.36	101	89
1392.11	46.34 pk	26.30	2.22	34.14	40.71 pk	54.00 av	-13.29	101	85
1666.83	44.17 pk	28.20	2.35	34.53	40.20 pk	54.00 av	-13.80	101	66
1811.69	44.34 pk	29.42	2.46	34.81	41.40 pk	54.00 av	-12.60	100	56
1831.67	43.16 pk	29.59	2.48	34.85	40.37 pk	54.00 av	-13.63	100	55
1846.65	44.81 pk	29.71	2.49	34.88	42.13 pk	54.00 av	-11.87	100	54
1999	41.99 pk	30.99	2.60	35.18	40.41 pk	54.00 av	-13.59	100	43
2311.19	50.38 pk	30.94	1.65	35.19	47.78 pk	54.00 av	-6.22	101	141
2510.99	44.32 pk	30.90	1.36	35.19	41.40 pk	54.00 av	-12.60	102	203
2798.2	44.97 pk	31.02	1.41	34.93	42.47 pk	54.00 av	-11.53	102	294
4824.28	47.05 pk	34.93	2.12	37.72	46.39 pk	54.00 av	-7.61	100.00	11.00
7236.12	46.08 pk	39.48	2.68	36.83	51.41 pk	54.00 av	-2.59	100.00	360.00
9647.64	46.37 pk	40.58	3.25	34.33	55.86 pk	74.00 pk	-18.14	100.00	260.00
9647.64	28.58 av	40.58	3.25	34.33	38.08 av	54.00 av	-15.92	100.00	260.00

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ * ”: Fundamental Frequency
- “***”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk” : peak mode
- “ av” : average mode
- “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal) , Channel 6 : 2437 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
1132.37	46.84 pk	25.11	2.19	34.00	40.13 pk	54.00 av	-13.87	102	103
1332.17	47.13 pk	26.03	2.21	34.11	41.25 pk	54.00 av	-12.75	101	89
1999	42.17 pk	30.99	2.60	35.18	40.58 pk	54.00 av	-13.42	100	43
2171.33	42.13 pk	30.97	2.08	35.19	39.98 pk	54.00 av	-14.02	101	97
2233.77	42.87 pk	30.95	1.89	35.19	40.52 pk	54.00 av	-13.48	101	116
2278.72	44.22 pk	30.94	1.75	35.19	41.72 pk	54.00 av	-12.28	101	131
2313.69	46.71 pk	30.94	1.64	35.19	44.10 pk	54.00 av	-9.90	101	141
2333.67	50.91 pk	30.93	1.58	35.19	48.23 pk	54.00 av	-5.77	101	148
2353.65	48.10 pk	30.93	1.52	35.19	45.36 pk	54.00 av	-8.64	101	154
2518.48	43.46 pk	30.91	1.36	35.18	40.55 pk	54.00 av	-13.45	102	206
2535.96	44.68 pk	30.91	1.37	35.17	41.79 pk	54.00 av	-12.21	102	211
2613.39	44.09 pk	30.95	1.38	35.10	41.31 pk	54.00 av	-12.69	102	236
2633.37	42.91 pk	30.95	1.38	35.08	40.17 pk	54.00 av	-13.83	102	242
4874	47.95 pk	35.12	2.14	37.77	47.44 pk	54.00 av	-6.56	100.00	43.00
7309.22	45.76 pk	39.59	2.56	36.70	51.21 pk	54.00 av	-2.79	100.00	25.00
9747.88	43.91 pk	40.35	3.30	34.37	53.19 pk	74.00 pk	-20.81	100.00	168.00
9747.88	27.38 av	40.35	3.30	34.37	36.66 av	54.00 av	-17.34	100.00	168.00

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1067.43	46.84 pk	24.81	2.18	33.97	39.86 pk	54.00 av	-14.14	102	107
1132.37	46.98 pk	25.11	2.19	34.00	40.27 pk	54.00 av	-13.73	102	103
1164.84	47.66 pk	25.26	2.19	34.02	41.09 pk	54.00 av	-12.91	102	101
1264.74	46.31 pk	25.72	2.20	34.07	40.16 pk	54.00 av	-13.84	101	94
1332.17	46.70 pk	26.03	2.21	34.11	40.82 pk	54.00 av	-13.18	101	89
1799.2	42.89 pk	29.31	2.45	34.79	39.87 pk	54.00 av	-14.13	100	57
1814.19	44.14 pk	29.44	2.46	34.82	41.23 pk	54.00 av	-12.77	100	56
1846.65	43.59 pk	29.71	2.49	34.88	40.90 pk	54.00 av	-13.10	100	54
1999	41.58 pk	30.99	2.60	35.18	39.99 pk	54.00 av	-14.01	100	43
2231.27	45.01 pk	30.95	1.89	35.19	42.67 pk	54.00 av	-11.33	101	116
2276.22	44.38 pk	30.94	1.76	35.19	41.89 pk	54.00 av	-12.11	101	130
2333.67	50.61 pk	30.93	1.58	35.19	47.93 pk	54.00 av	-6.07	101	148
2535.96	46.20 pk	30.91	1.37	35.17	43.31 pk	54.00 av	-10.69	102	211
2798.2	42.71 pk	31.02	1.41	34.93	40.21 pk	54.00 av	-13.79	102	294
4873.88	47.91 pk	35.12	2.14	37.77	47.40 pk	54.00 av	-6.60	100.00	326.00
7310	46.61 pk	39.60	2.55	36.70	52.06 pk	54.00 av	-1.94	100.00	360.00
9747.72	43.68 pk	40.36	3.30	34.37	52.96 pk	54.00 av	-1.04	100.00	258.00

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ * ”: Fundamental Frequency
- “***”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk” : peak mode
- “ av” : average mode
- “ --- “: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
1132.37	46.21 pk	25.11	2.19	34.00	39.50 pk	54.00 av	-14.50	102	103
1232.27	45.72 pk	25.57	2.20	34.06	39.43 pk	54.00 av	-14.57	102	96
1332.17	47.27 pk	26.03	2.21	34.11	41.39 pk	54.00 av	-12.61	101	89
1844.16	42.02 pk	29.69	2.48	34.87	39.32 pk	54.00 av	-14.68	100	54
1999	41.43 pk	30.99	2.60	35.18	39.84 pk	54.00 av	-14.16	100	43
2196.3	41.77 pk	30.96	2.00	35.19	39.54 pk	54.00 av	-14.46	101	105
2256.24	44.66 pk	30.95	1.82	35.19	42.24 pk	54.00 av	-11.76	101	123
2286.21	48.27 pk	30.94	1.73	35.19	45.75 pk	54.00 av	-8.25	101	133
2298.7	46.52 pk	30.94	1.69	35.19	43.96 pk	54.00 av	-10.04	101	137
2318.68	46.34 pk	30.94	1.63	35.19	43.71 pk	54.00 av	-10.29	101	143
2358.64	50.16 pk	30.93	1.51	35.19	47.40 pk	54.00 av	-6.60	101	156
2378.62	46.80 pk	30.92	1.44	35.20	43.98 pk	54.00 av	-10.02	101	162
2560.94	43.91 pk	30.92	1.37	35.15	41.06 pk	54.00 av	-12.94	102	219
2615.88	43.03 pk	30.95	1.38	35.10	40.26 pk	54.00 av	-13.74	102	236
4923.78	51.34 pk	35.31	2.15	37.83	50.97 pk	54.00 av	-3.03	100.00	35.00
7388.42	45.95 pk	39.72	2.42	36.56	51.53 pk	54.00 av	-2.47	100.00	27.00
9848.12	45.66 pk	40.13	3.35	34.41	54.74 pk	74.00 pk	-19.26	100.00	360.00
9848.12	30.78 av	40.13	3.35	34.41	39.85 av	54.00 av	-14.15	100.00	360.00

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz

Operator: Jerry Chiou

RBW: 1MHz
 Humidity (%): 41
 Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1132.37	47.05 pk	25.11	2.19	34.00	40.35 pk	54.00 av	-13.65	102	103
1167.33	47.68 pk	25.27	2.19	34.02	41.12 pk	54.00 av	-12.88	102	100
1237.26	46.02 pk	25.59	2.20	34.06	39.75 pk	54.00 av	-14.25	102	96
1332.17	47.34 pk	26.03	2.21	34.11	41.47 pk	54.00 av	-12.53	101	89
1389.61	48.87 pk	26.29	2.22	34.14	43.24 pk	54.00 av	-10.76	101	85
1811.69	43.06 pk	29.42	2.46	34.81	40.13 pk	54.00 av	-13.87	100	56
1841.66	43.80 pk	29.67	2.48	34.87	41.08 pk	54.00 av	-12.92	100	54
2256.24	44.70 pk	30.95	1.82	35.19	42.28 pk	54.00 av	-11.72	101	123
2286.21	48.13 pk	30.94	1.73	35.19	45.61 pk	54.00 av	-8.39	101	133
2303.7	46.16 pk	30.94	1.67	35.19	43.58 pk	54.00 av	-10.42	101	138
2358.64	48.60 pk	30.93	1.51	35.19	45.84 pk	54.00 av	-8.16	101	156
2376.12	46.57 pk	30.92	1.45	35.20	43.75 pk	54.00 av	-10.25	101	161
2798.2	44.06 pk	31.02	1.41	34.93	41.56 pk	54.00 av	-12.44	102	294
4923.88	49.23 pk	35.31	2.15	37.83	48.86 pk	54.00 av	-5.14	100.00	330.00
7385.26	45.28 pk	39.72	2.42	36.56	50.85 pk	54.00 av	-3.15	100.00	360.00
9848.04	45.13 pk	40.13	3.35	34.41	54.21 pk	74.00 pk	-19.79	100.00	295.00
9848.04	29.73 av	40.13	3.35	34.41	38.80 av	54.00 av	-15.20	100.00	295.00

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ * ”: Fundamental Frequency
- “***”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk”: peak mode
- “av”: average mode
- “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

3.4 Band Edge Measurement

3.4.1 Test Procedure (Conducted)

1. The transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 100KHz
VBW: 100KHz
Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed
3. Find the next peak frequency outside the operation frequency band

3.4.2 Test Setup (Conducted)



3.4.3 Test Data:

Table: Band Edge measurement (Conducted)

Test Engineer: Jerry Chiou

Temperature (): 27


Tx Data Rate=1Mbps

Humidity (%): 55


Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: >20dB (dB)	Pass/Fail
1	2413.0	111.65	---	---
Outside band	2399.5	74.41	37.24	Pass
11	2462.4	111.02	---	---
Outside band	2474.5	74.35	36.67	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

Band Edge Conducted measurement

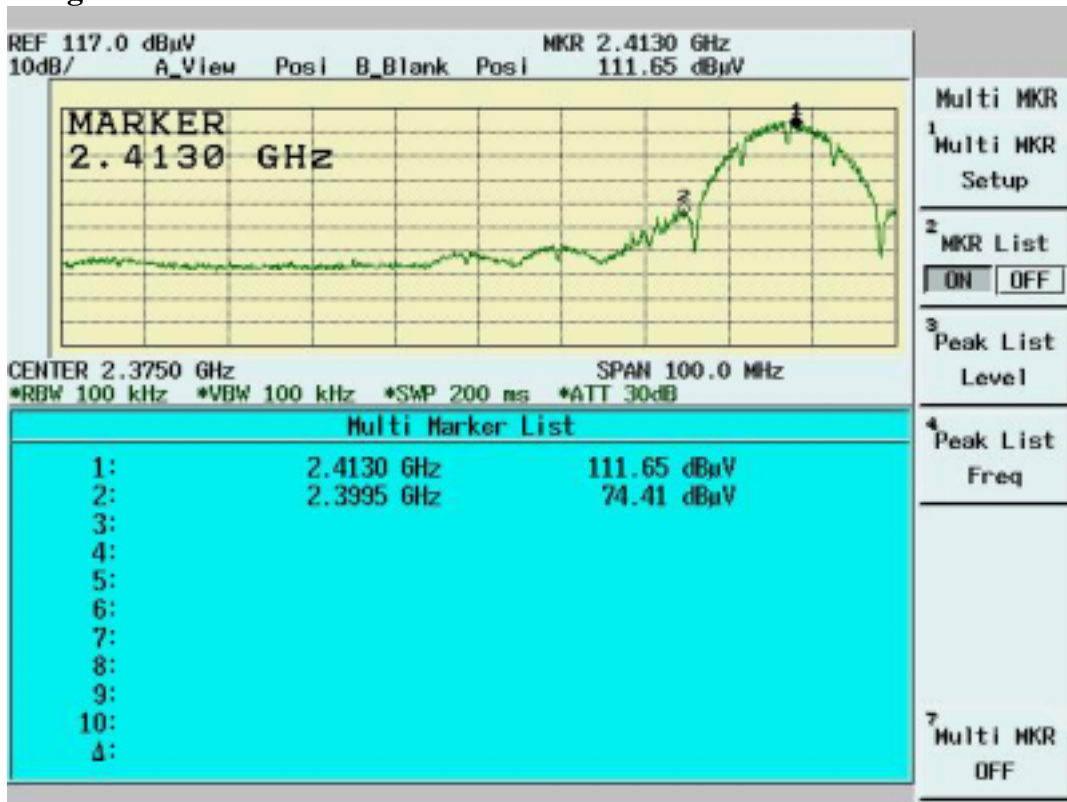

Band Edge Conducted Measurement

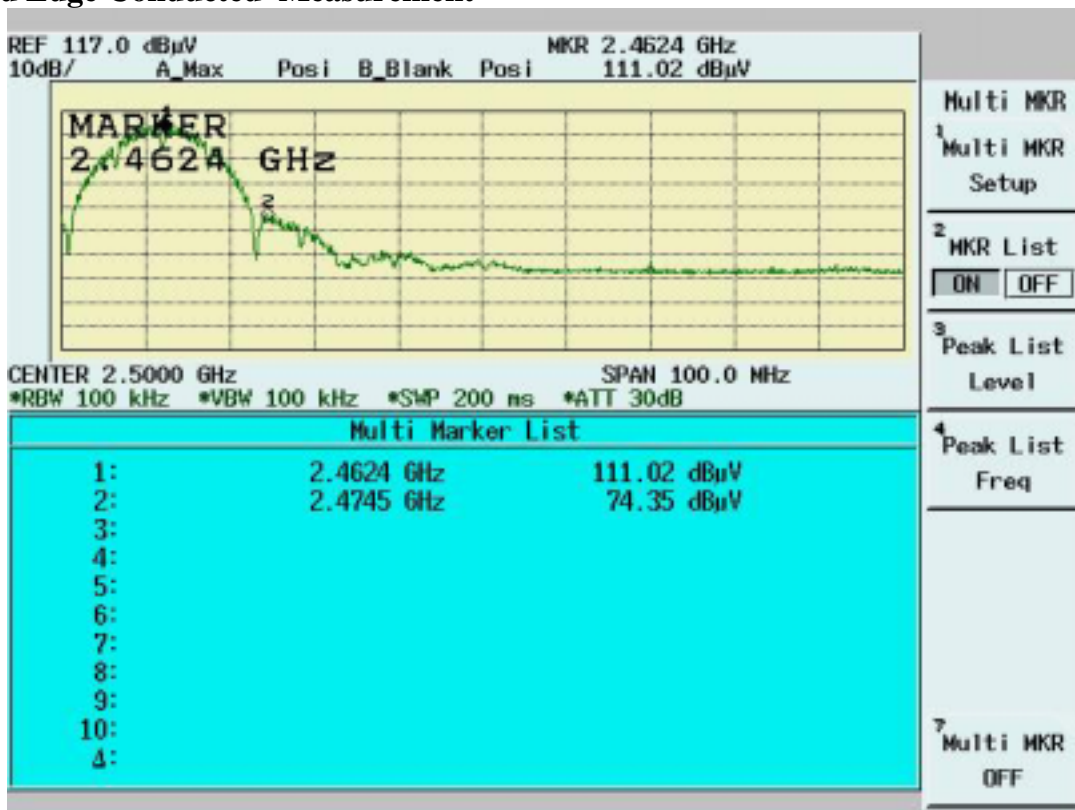

3.4.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 3MHz
Center frequency: 2.395GHz, 2.48GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band
4. For peak frequency emission level measurement in Restricted Band
Change RBW: 1MHz
VBW: 10Hz
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

3.4.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

3.4.6 Test Data

Table Band Edge measurement (Radiated)

Test Engineer: Jerry Chiou

Temperature (): 26

Tx Data Rate=1Mbps


Humidity (%): 43

Description	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	dBc (Limit: > 20dBc)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
Channel_1 (average mode)	2410.7	64.92	35.48	100.40	---	---	10Hz	---
Channel_1 (peak mode)	2411.7	71.80	35.48	107.28	---	---	3MHz	---
Outside band (peak mode)	2397.5	39.51	35.48	74.99	32.29	---	3MHz	Pass
Channel_11 (average mode)	2462.8	63.17	35.50	98.67	---	---	10Hz	---
Channel_11 (peak mode)	2462.9	70.09	35.50	105.59	---	---	3MHz	---
Outside band (peak mode)	2474.8	34.44	35.51	69.95	35.64	---	3MHz	Pass
Channel_1 Restricted band (peak mode)	2382.6	23.82	35.47	59.29	---	74	3MHz	Pass
Restricted band (average mode)	2383.6	13.55	35.47	49.02	---	54	10Hz	Pass
Channel_11 Restricted band (peak mode)	2487.9	22.79	35.51	58.30	---	74	3MHz	Pass
Restricted band (average mode)	2488.2	11.80	35.51	47.31	---	54	10Hz	Pass


Note:

- > The Spectrum plot of emission level measurement in Restricted band is attached.
- > Emission Level=Spectrum Reading+Correction Factor
- > Correction Factor=Antenna Factor+cable loss–amplifier gain
- > Both Horizontal and Vertical polarizaion have been tested and the worst data is listed above.


Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 1)

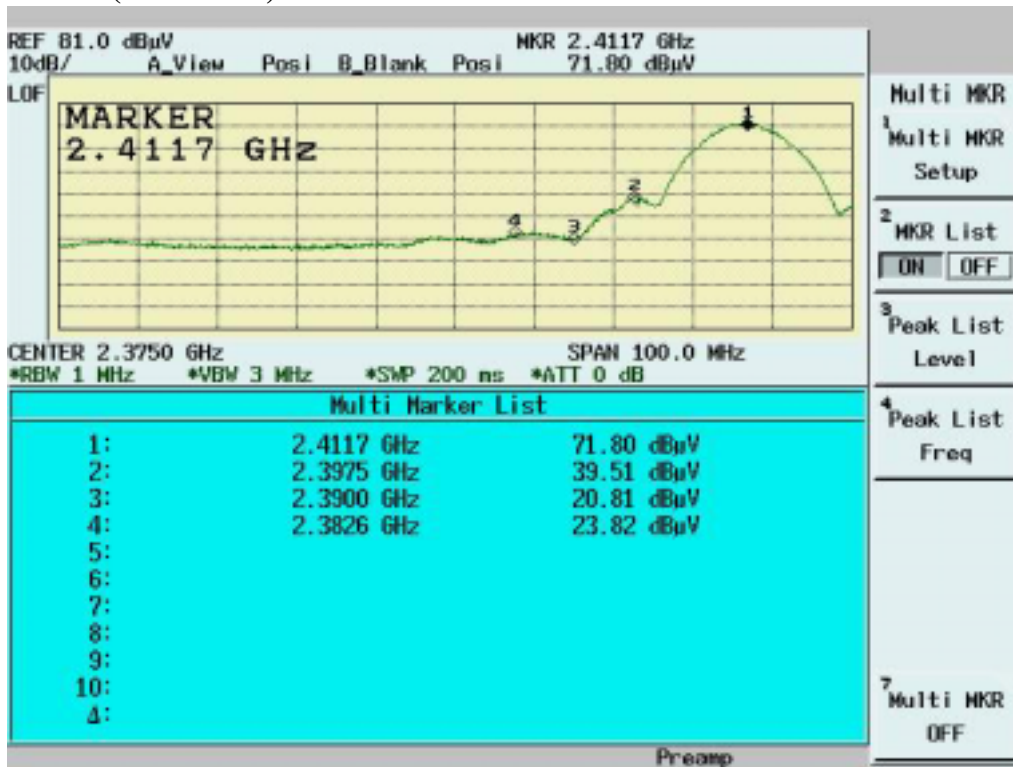


Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 1)

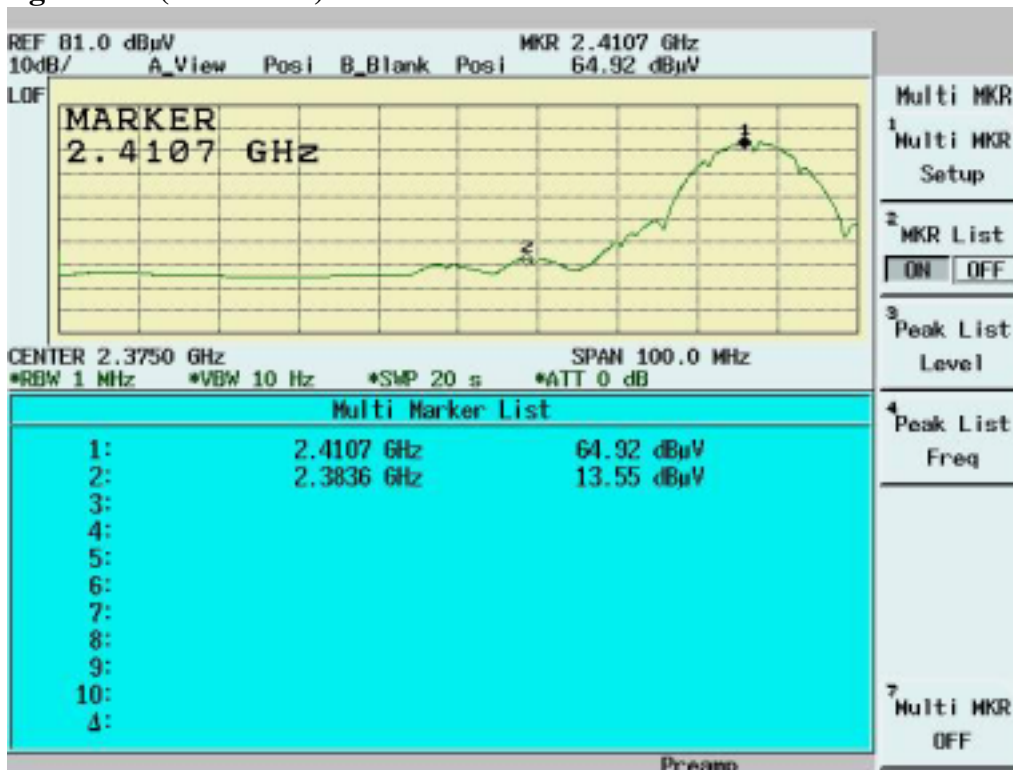

Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 11)

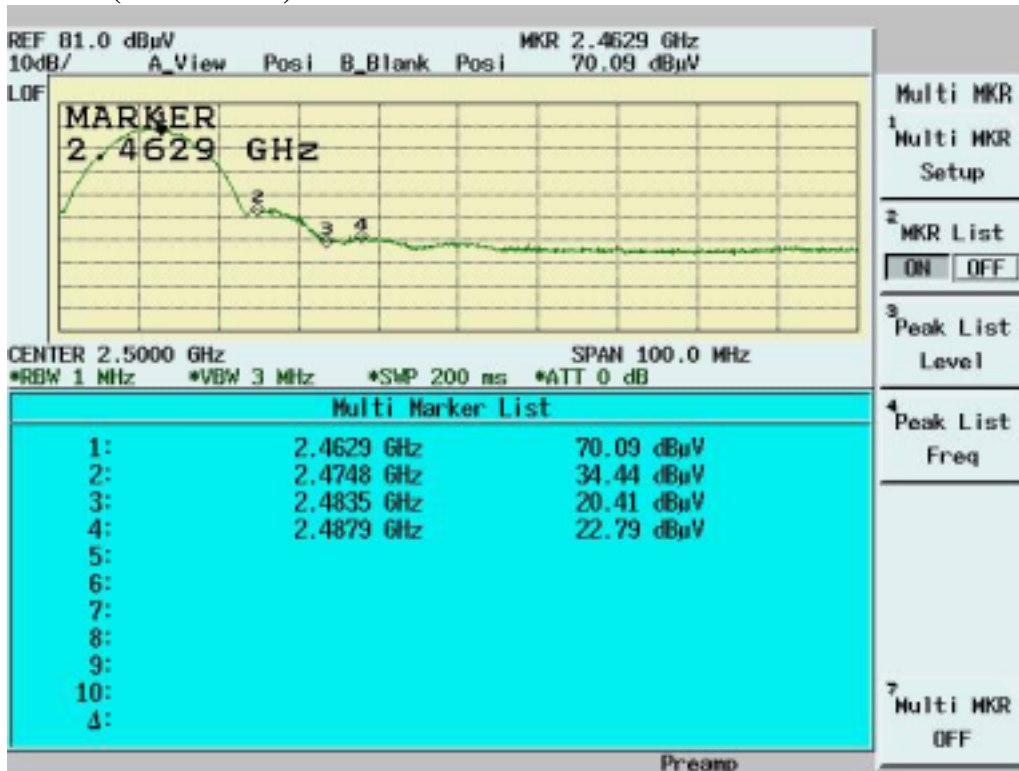

Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 11)

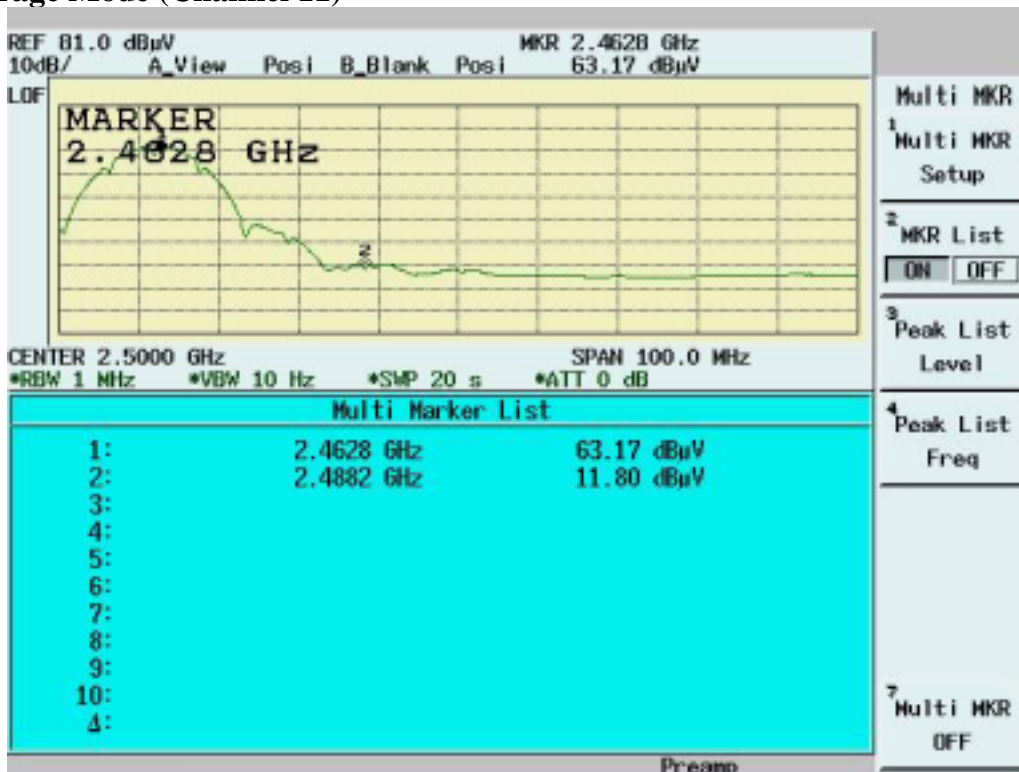

3.5 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]

See MPE report

3.6 DSSS Peak Power Spectral Density [Section 15.247(d)]

3.6.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN:1.5MHz
 RBW: 3KHz
 VBW: 30KHz
 Center frequency: fundamental frequency tested.
 Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.

3.6.2 Test Setup



3.6.3 Test Data

Maximum Peak Output Power Density

Test Engineer:Jerry
Chiou

Temperature ():27

Tx Data Rate=1Mbps

Humidity (%):55


Channel	Frequency (MHz)	Spectrum Reading (dBm/3KHz)	Cable Loss (dB)	Peak Power Output (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
1	2412	-7.75	1.10	-6.65	8	Pass
6	2437	-8.84	1.10	-7.74	8	Pass
11	2462	-7.94	1.10	-6.84	8	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.


Channel 1



Channel 6

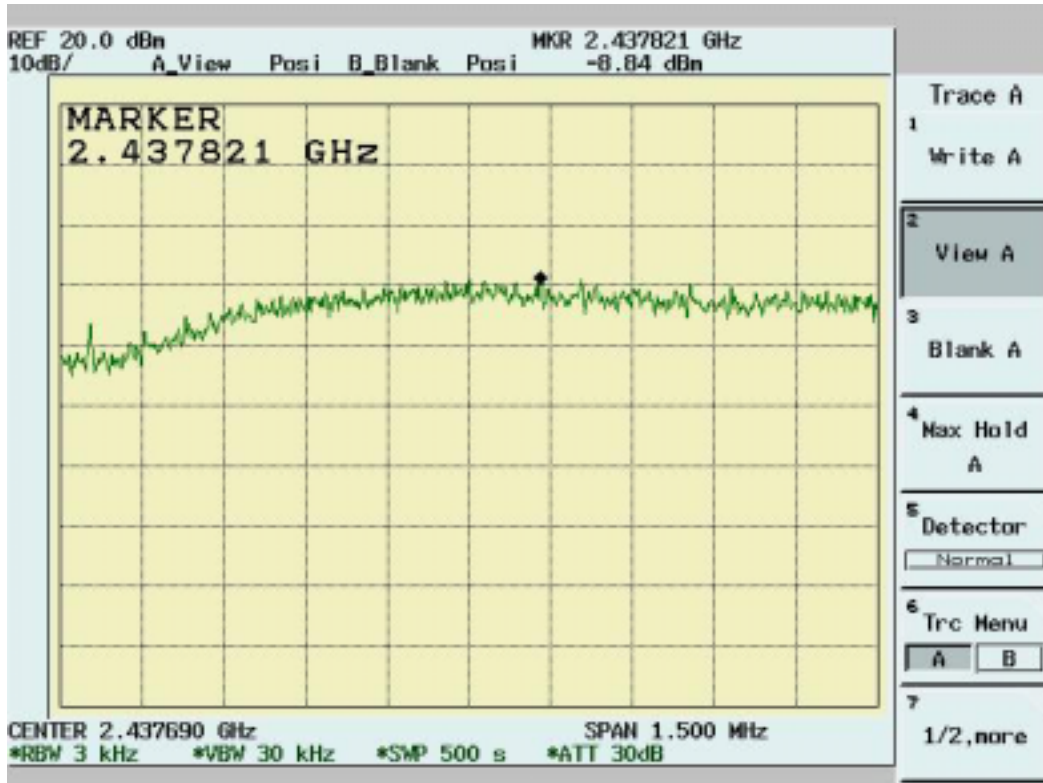

Channel 11

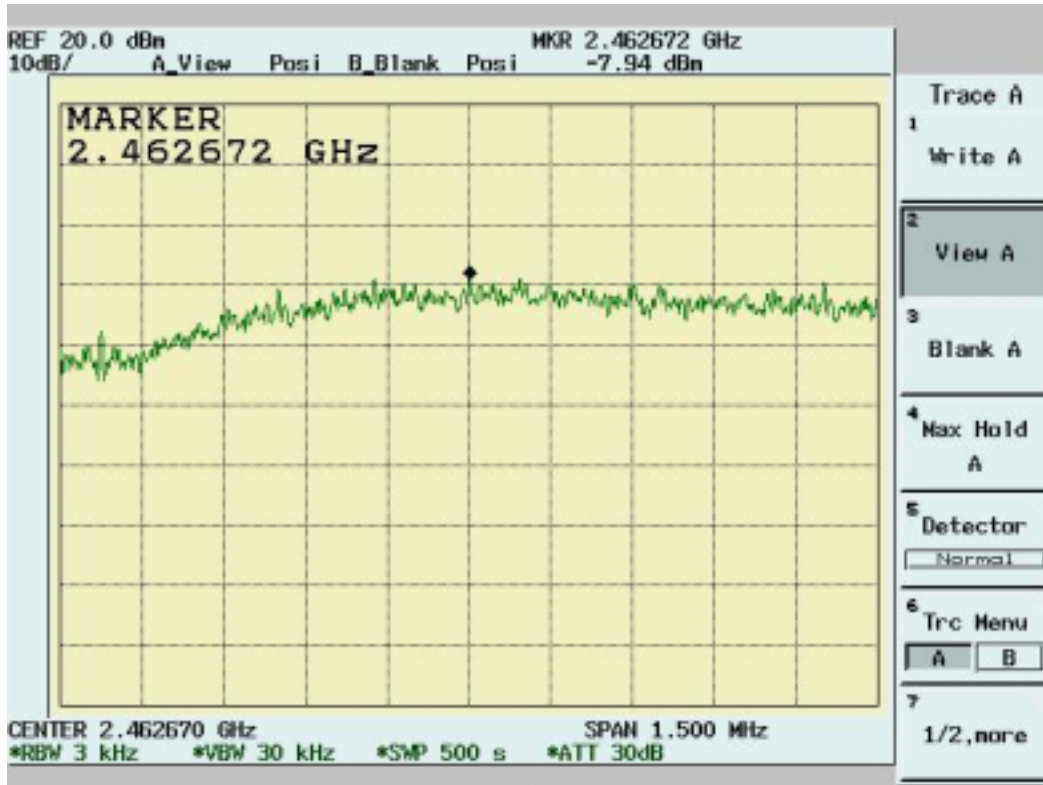

4. TEST RESULTS (802.11g)

4.1 Bandwidth for DSSS [Section 15.247 (a)(2)]

4.1.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode	Spectrum analyzer
Detector function	Peak mode
RBW	100KHz
VBW	100KHz

4.1.2 Test Setup



4.1.3 Test Data:

6dB Bandwidth

Test Engineer: Jerry Chiou

Temperature (): 27

Tx Data Rate=6Mbps


Humidity (%): 55

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	16.60	0.5	Pass
6	2437	16.52	0.5	Pass
11	2462	16.60	0.5	Pass


Channel 1:



Channel 6:

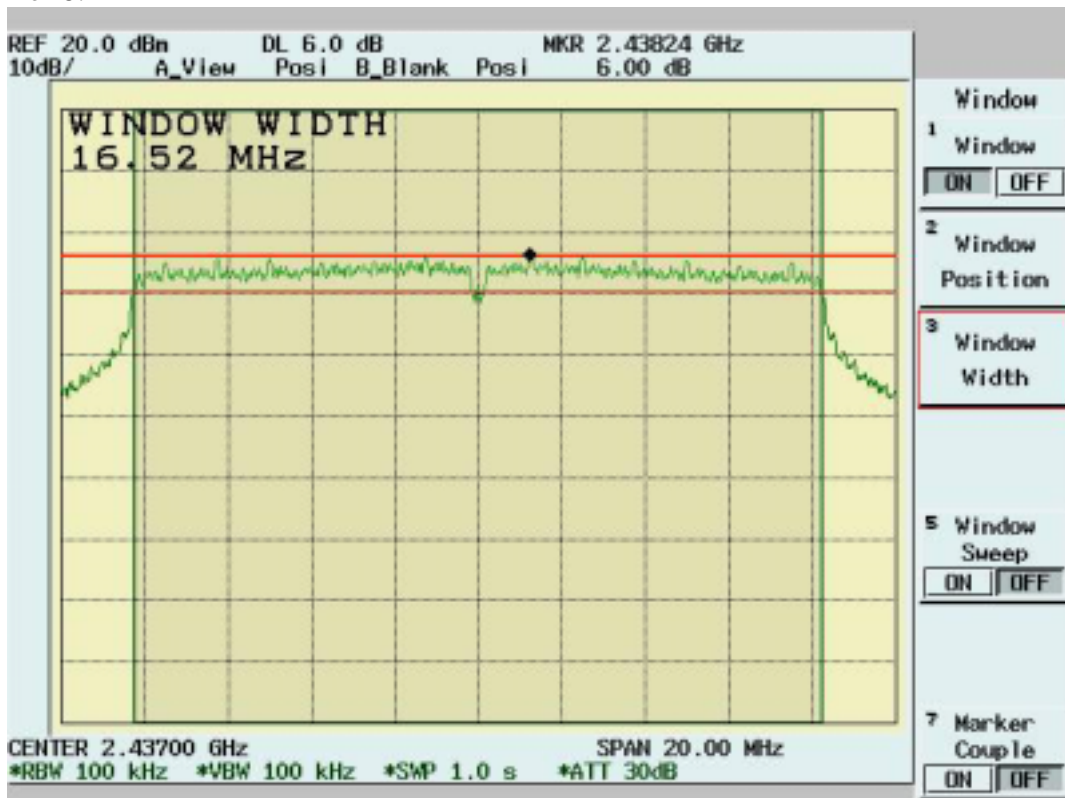

Channel 11:

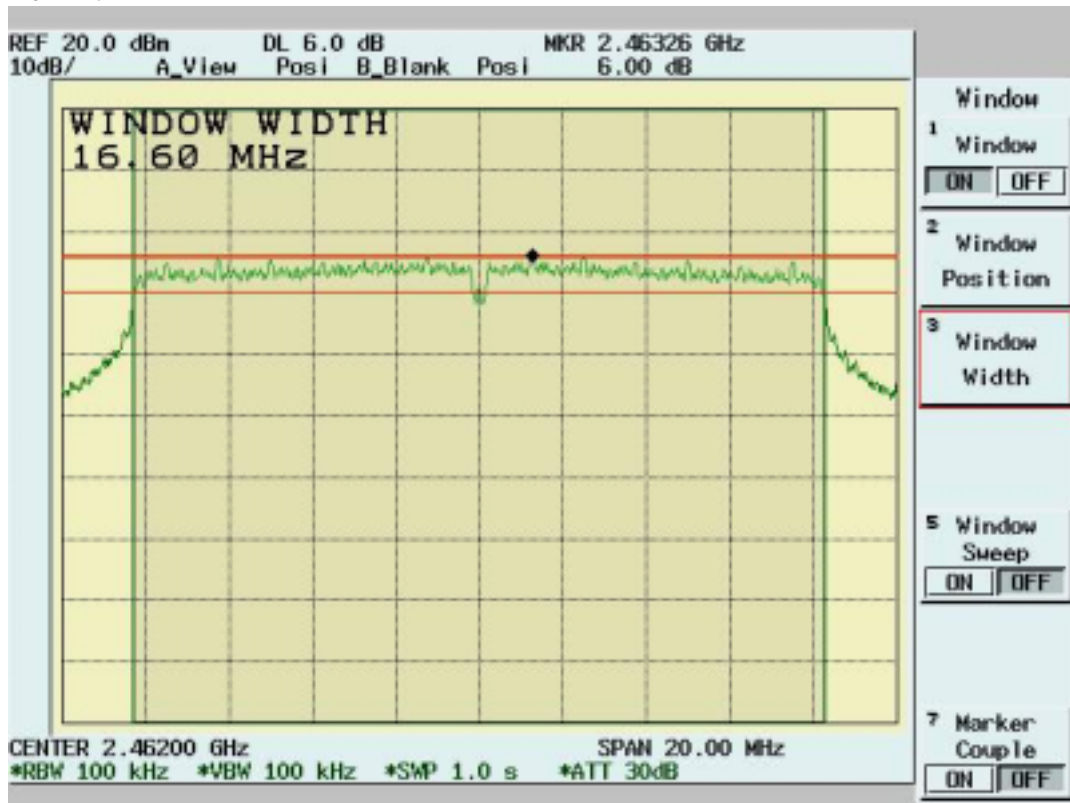


4.2 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

4.2.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer.

4.2.2 Test Setup

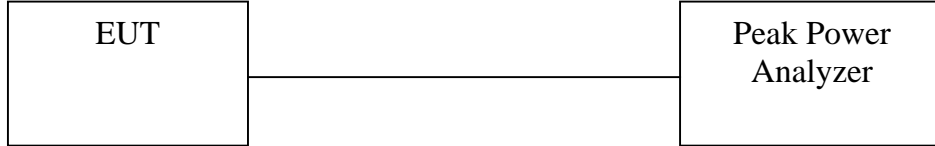

4.2.3 Test Data

Maximum Peak Output Power

Test Engineer: Jerry Chiou

Temperature (): 27

Tx Data Rate=6Mbps

Humidity (%): 55

Channel	Frequency (Mhz)	Analyzer Reading (dBm)	Cable Loss (dB)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	15.75	1.10	48.42	16.85	30	Pass
6	2437	15.56	1.10	46.37	16.66	30	Pass
11	2462	15.16	1.10	42.23	16.26	30	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

4.3 Radiated Emission Measurement [Section [15.247(c)(4)]

4.3.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

4.3.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

4.3.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz
Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	3MHz
Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

4.3.4 Test Data (30MHz – 1GHz):

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Operator: Jerry Chiou
Temperature (C): 23
Humidity (%): 54

06:47:33 PM, Friday, August 12, 2005

Frequency	Rx Amp.	Ant Fact	CableLoss	PreAmpGain	Corrct. Emi.	Limit	Margin	Ant. Pos.	Table Pos.
MHz	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg)
41.64	13.84	11.38	1.13	0.00	26.35	40.00	-13.65	102.00	337.00
53.28	20.46	6.81	1.26	0.00	28.53	40.00	-11.47	102.00	255.00
106.63	20.89	11.10	1.99	0.00	33.98	43.50	-9.52	102.00	190.00
142.52	16.58	10.10	2.21	0.00	28.89	43.50	-14.61	102.00	287.00
322.94	12.09	16.04	3.86	0.00	31.98	46.00	-14.02	196.00	237.00
366.59	13.53	16.10	4.22	0.00	33.85	46.00	-12.15	102.00	337.00
512.09	8.64	17.69	5.31	0.00	31.64	46.00	-14.36	196.00	253.00
666.32	17.24	19.00	6.41	0.00	42.65	46.00	-3.35	102.00	141.00
733.25	12.43	19.80	6.89	0.00	39.12	46.00	-6.88	196.00	303.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Operator: Jerry Chiou
Temperature (C): 23
Humidity (%): 54

06:47:33 PM, Friday, August 12, 2005

Frequency	Rx Amp.	Ant Fact	CableLoss	PreAmpGain	Corrct. Emi.	Limit	Margin	Ant. Pos.	Table Pos.
MHz	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg)
71.71	24.50	5.61	1.52	0.00	31.63	40.00	-8.37	196.00	351.00
76.56	21.40	6.19	1.62	0.00	29.21	40.00	-10.79	196.00	351.00
354.95	13.09	16.17	4.14	0.00	33.40	46.00	-12.60	196.00	220.00
357.86	13.62	16.15	4.16	0.00	33.93	46.00	-12.07	196.00	204.00
366.59	13.71	16.10	4.22	0.00	34.03	46.00	-11.97	102.00	337.00
432.55	12.43	16.10	4.69	0.00	33.21	46.00	-12.79	102.00	206.00
666.32	17.16	19.00	6.41	0.00	42.57	46.00	-3.43	102.00	141.00
733.25	11.35	19.80	6.89	0.00	38.04	46.00	-7.96	196.00	303.00
833.16	5.39	20.43	7.71	0.00	33.53	46.00	-12.47	196.00	270.00

NOTE:

- During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.
- Margin = Corrected Amplitude – Limit
Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain
A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

4.3.5 Test Data (1GHz – 25 GHz) .

1GHz~ 25 GHz (Horizontal), Channel 1: 2412 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
1332.17	48.73 pk	26.03	2.21	34.11	42.86 pk	54.00 av	-11.14	101	89
1844.16	45.37 pk	29.69	2.48	34.87	42.67 pk	54.00 av	-11.33	100	54
2208.79	44.98 pk	30.96	1.96	35.19	42.72 pk	54.00 av	-11.28	101	109
2248.75	46.07 pk	30.95	1.84	35.19	43.67 pk	54.00 av	-10.33	101	121
2256.24	46.40 pk	30.95	1.82	35.19	43.98 pk	54.00 av	-10.02	101	123
2510.99	51.68 pk	30.90	1.36	35.19	48.76 pk	54.00 av	-5.24	102	203
2518.48	48.33 pk	30.91	1.36	35.18	45.42 pk	54.00 av	-8.58	102	206
2558.44	45.77 pk	30.92	1.37	35.15	42.92 pk	54.00 av	-11.08	102	218
2610.89	47.76 pk	30.94	1.38	35.10	44.98 pk	54.00 av	-9.02	102	235
2633.37	45.21 pk	30.95	1.38	35.08	42.47 pk	54.00 av	-11.53	102	242
2645.85	44.01 pk	30.96	1.39	35.07	41.28 pk	54.00 av	-12.72	102	246
4823.4	47.07 pk	34.93	2.12	37.72	46.41 pk	54.00 av	-7.59	100.00	165.00
9647.02	43.07 pk	40.58	3.25	34.33	52.56 pk	54.00 av	-1.44	100.00	97.00

1GHz~ 25 GHz (Vertical), Channel 1: 2412 MHz

Operator: Jerry Chiou

RBW: 1MHz
 Humidity (%): 41
 Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1267.23	51.71 pk	25.73	2.20	34.07	45.57 pk	54.00 av	-8.43	101	94
1744.26	48.97 pk	28.85	2.41	34.68	45.55 pk	54.00 av	-8.45	101	61
1844.16	47.83 pk	29.69	2.48	34.87	45.13 pk	54.00 av	-8.87	100	54
1854.15	47.97 pk	29.77	2.49	34.89	45.34 pk	54.00 av	-8.66	100	53
2208.79	49.27 pk	30.96	1.96	35.19	47.01 pk	54.00 av	-6.99	101	109
2241.26	50.01 pk	30.95	1.86	35.19	47.63 pk	54.00 av	-6.37	101	119
2311.19	60.58 pk	30.94	1.65	35.19	57.97 pk	74.00 pk	-16.03	101	141
2311.19	36.84 av	30.94	1.65	35.19	34.22 av	54.00 av	-19.78	101	141
2318.68	53.99 pk	30.94	1.63	35.19	51.36 pk	54.00 av	-2.64	101	143
2358.64	53.49 pk	30.93	1.51	35.19	50.73 pk	54.00 av	-3.27	101	156
2491.01	51.53 pk	30.90	1.41	35.20	48.64 pk	54.00 av	-5.36	101	197
2510.99	53.48 pk	30.90	1.36	35.19	50.56 pk	54.00 av	-3.44	102	203
2518.48	51.36 pk	30.91	1.36	35.18	48.45 pk	54.00 av	-5.55	102	206
2610.89	49.76 pk	30.94	1.38	35.10	46.98 pk	54.00 av	-7.02	102	235
4823.5	45.71 pk	34.93	2.12	37.72	45.05 pk	54.00 av	-8.95	100.00	5.00
9648.58	42.71 pk	40.57	3.25	34.33	52.20 pk	54.00 av	-1.80	100.00	12.00

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ * ”: Fundamental Frequency
- “**”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk” : peak mode
- “av”: average mode
- “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal) , Channel 6 : 2437 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
1332.17	49.65 pk	26.03	2.21	34.11	43.78 pk	54.00 av	-10.22	101	89
1754.25	46.47 pk	28.94	2.42	34.70	43.12 pk	54.00 av	-10.88	100	60
1856.64	47.14 pk	29.80	2.49	34.90	44.53 pk	54.00 av	-9.47	100	53
1886.61	46.13 pk	30.05	2.52	34.96	43.74 pk	54.00 av	-10.26	100	51
2126.37	45.57 pk	30.97	2.21	35.19	43.57 pk	54.00 av	-10.43	100	83
2231.27	50.00 pk	30.95	1.89	35.19	47.66 pk	54.00 av	-6.34	101	116
2535.96	50.76 pk	30.91	1.37	35.17	47.87 pk	54.00 av	-6.13	102	211
2593.41	48.16 pk	30.94	1.38	35.12	45.35 pk	54.00 av	-8.65	102	229
2638.36	48.29 pk	30.96	1.38	35.08	45.55 pk	54.00 av	-8.45	102	243
2693.31	46.57 pk	30.98	1.39	35.03	43.92 pk	54.00 av	-10.08	102	261
2975.52	46.62 pk	31.09	1.45	34.77	44.38 pk	54.00 av	-9.62	103	349
3152.85	46.50 pk	31.22	1.53	35.08	44.17 pk	54.00 av	-9.83	103	318
3267.73	47.06 pk	31.31	1.59	35.33	44.63 pk	54.00 av	-9.37	103	288
4873.16	48.80 pk	35.12	2.14	37.77	48.28 pk	54.00 av	-5.72	100.00	198.00
9748.66	44.27 pk	40.35	3.30	34.37	53.55 pk	54.00 av	-0.45	100.00	185.00

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1264.74	51.68 pk	25.72	2.20	34.07	45.53 pk	54.00 av	-8.47	101	94
1844.16	48.14 pk	29.69	2.48	34.87	45.44 pk	54.00 av	-8.56	100	54
2201.3	46.94 pk	30.96	1.99	35.19	44.69 pk	54.00 av	-9.31	101	106
2231.27	52.79 pk	30.95	1.89	35.19	50.45 pk	54.00 av	-3.55	101	116
2296.2	52.85 pk	30.94	1.70	35.19	50.30 pk	54.00 av	-3.70	101	136
2318.68	52.92 pk	30.94	1.63	35.19	50.29 pk	54.00 av	-3.71	101	143
2358.64	52.20 pk	30.93	1.51	35.19	49.43 pk	54.00 av	-4.57	101	156
2518.48	51.09 pk	30.91	1.36	35.18	48.18 pk	54.00 av	-5.82	102	206
2535.96	50.97 pk	30.91	1.37	35.17	48.08 pk	54.00 av	-5.92	102	211
2578.42	48.88 pk	30.93	1.37	35.13	46.05 pk	54.00 av	-7.95	102	225
2600.9	48.57 pk	30.94	1.38	35.11	45.78 pk	54.00 av	-8.22	102	232
2890.61	46.60 pk	31.06	1.43	34.85	44.24 pk	54.00 av	-9.76	103	323
2973.03	46.59 pk	31.09	1.45	34.77	44.35 pk	54.00 av	-9.65	103	349
4874.88	46.49 pk	35.12	2.14	37.77	45.98 pk	54.00 av	-8.02	100.00	217.00
9748.67	43.91 pk	40.35	3.30	34.37	53.19 pk	54.00 av	-0.81	100.00	325.00

Note:

- According to the standards used,Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ * ”: Fundamental Frequency
- “**”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk ”: peak mode
- “ av ”: average mode
- “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency MHz	Rx_R. dBuV	Ant_F. dB/m	Cab_L. dB	PreAmpl dB	Emission dBuV/m	Limit dBuV/m	Margin dB	A.Tower cm	T.Table deg
1332.17	50.55 pk	26.03	2.21	34.11	44.68 pk	54.00 av	-9.32	101	89
1844.16	48.00 pk	29.69	2.48	34.87	45.30 pk	54.00 av	-8.70	100	54
2233.77	47.57 pk	30.95	1.89	35.19	45.22 pk	54.00 av	-8.78	101	116
2253.75	51.91 pk	30.95	1.83	35.19	49.49 pk	54.00 av	-4.51	101	123
2286.21	55.65 pk	30.94	1.73	35.19	53.13 pk	54.00 av	-0.87	101	133
2318.68	51.45 pk	30.94	1.63	35.19	48.82 pk	54.00 av	-5.18	101	143
2331.17	50.56 pk	30.93	1.59	35.19	47.89 pk	54.00 av	-6.11	101	147
2383.62	51.44 pk	30.92	1.43	35.20	48.59 pk	54.00 av	-5.41	101	163
2518.48	50.70 pk	30.91	1.36	35.18	47.79 pk	54.00 av	-6.21	102	206
2540.96	48.43 pk	30.92	1.37	35.16	45.55 pk	54.00 av	-8.45	102	213
2560.94	48.54 pk	30.92	1.37	35.15	45.69 pk	54.00 av	-8.31	102	219
2578.42	48.75 pk	30.93	1.37	35.13	45.93 pk	54.00 av	-8.07	102	225
4923.81	46.45 pk	35.31	2.15	37.83	46.08 pk	54.00 av	-7.92	100.00	326.00
9847.62	43.87 pk	40.14	3.35	34.41	52.95 pk	54.00 av	-1.05	100.00	259.00

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1264.74	51.70 pk	25.72	2.20	34.07	45.54 pk	54.00 av	-8.46	101	94
1846.65	48.31 pk	29.71	2.49	34.88	45.63 pk	54.00 av	-8.37	100	54
2151.35	46.19 pk	30.97	2.14	35.19	44.11 pk	54.00 av	-9.89	100	91
2226.27	47.92 pk	30.95	1.91	35.19	45.60 pk	54.00 av	-8.40	101	114
2253.75	52.24 pk	30.95	1.83	35.19	49.83 pk	54.00 av	-4.17	101	123
2286.21	55.67 pk	30.94	1.73	35.19	53.15 pk	54.00 av	-0.85	101	133
2358.64	56.21 pk	30.93	1.51	35.19	53.45 pk	54.00 av	-0.55	101	156
2386.11	53.17 pk	30.92	1.42	35.20	50.32 pk	54.00 av	-3.68	101	164
2403.6	51.83 pk	30.92	1.49	35.20	49.05 pk	54.00 av	-4.95	101	170
2518.48	49.73 pk	30.91	1.36	35.18	46.82 pk	54.00 av	-7.18	102	206
2535.96	48.29 pk	30.91	1.37	35.17	45.40 pk	54.00 av	-8.60	102	211
2560.94	48.77 pk	30.92	1.37	35.15	45.92 pk	54.00 av	-8.08	102	219
2915.58	46.73 pk	31.07	1.43	34.83	44.40 pk	54.00 av	-9.60	103	330
3250.25	47.25 pk	31.30	1.58	35.30	44.83 pk	54.00 av	-9.17	103	293
4924.02	46.48 pk	35.31	2.15	37.83	46.12 pk	54.00 av	-7.88	100.00	5.00
9848.23	43.69 pk	40.13	3.35	34.41	52.77 pk	54.00 av	-1.23	100.00	281.00

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ * ”: Fundamental Frequency
- “**”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk”: peak mode
- “av”: average mode
- “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.


All frequencies from 1GHz to 25 GHz have been tested.

4.4 Band Edge Measurement

4.4.1 Test Procedure (Conducted)

1. The transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 100MHz
 RBW: 100KHz
 VBW: 100KHz
 Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed
3. Find the next peak frequency outside the operation frequency band

4.4.2 Test Setup (Conducted)

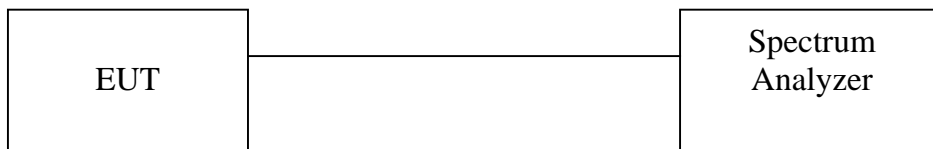

4.4.3 Test Data:

Table: Band Edge measurement (Conducted)

Test Engineer: Jerry Chiou

Temperature (): 27


Tx Data Rate=6Mbps

Humidity (%): 55


Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: >20dB (dB)	Pass/Fail
1	2413.2	102.50	---	---
Outside band	2399.9	71.26	31.24	Pass
11	2463.2	102.20	---	---
Outside band	2475.1	70.32	31.88	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

Band Edge Conducted measurement

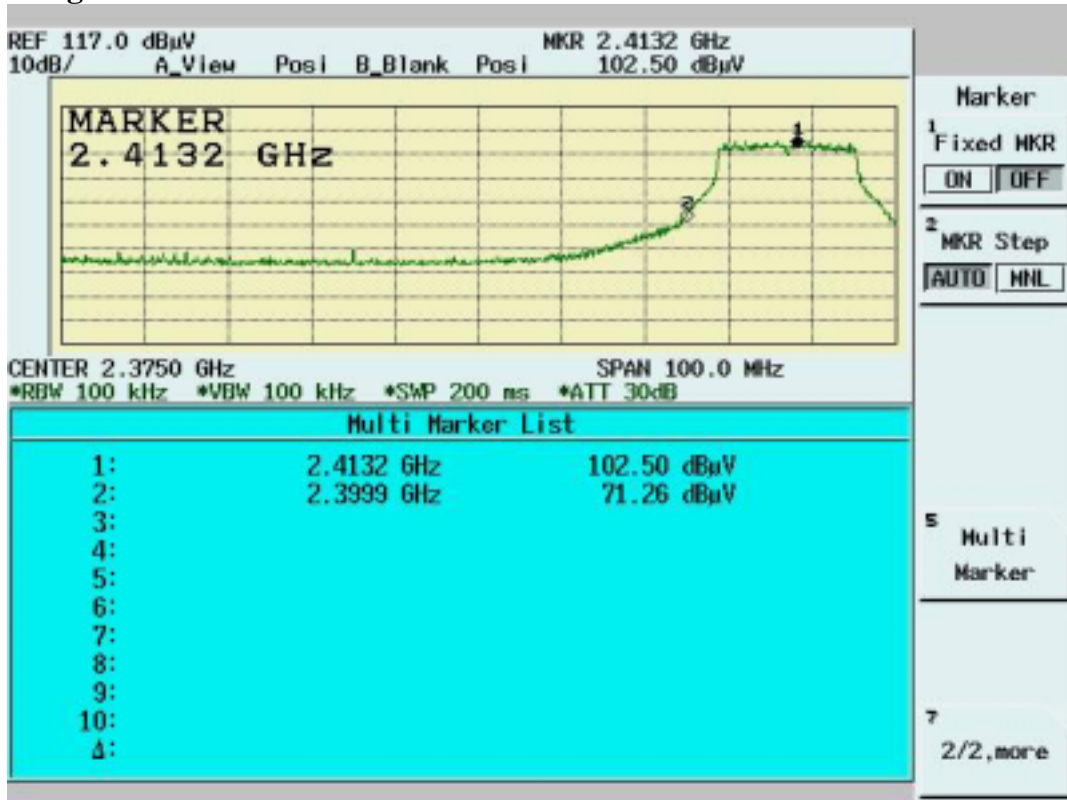

Band Edge Conducted Measurement

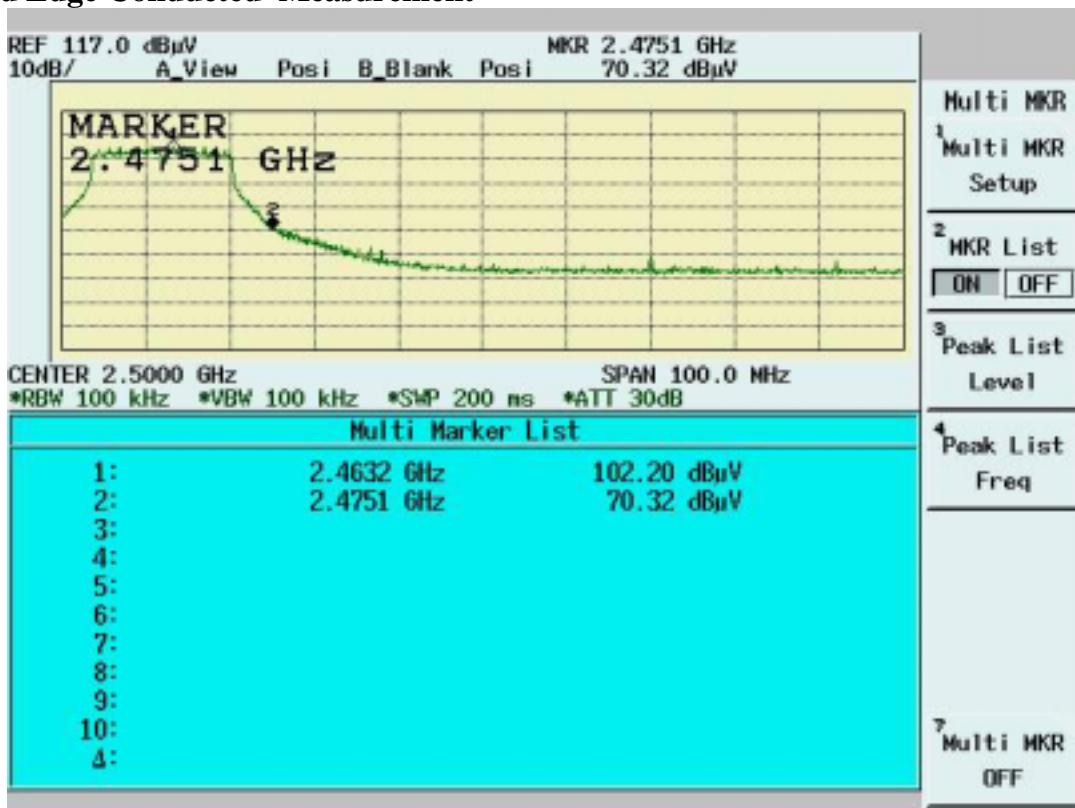

4.4.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 3MHz
Center frequency: 2.395GHz, 2.48GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz
VBW: 10Hz
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

4.4.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

4.4.6 Test Data

Table Band Edge measurement (Radiated)

Test Engineer: Jerry Chiou

Temperature (): 26

Tx Data Rate=6Mbps


Humidity (%): 43

Description	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	dBc (Limit: > 20dBc)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
Channel_1 (average mode)	2410.1	54.38	35.48	89.86	---	---	10Hz	---
Channel_1 (peak mode)	2409.8	69.17	35.48	104.65	---	---	3MHz	---
Outside band (peak mode)	2396.8	34.33	35.48	69.81	34.84	---	3MHz	Pass
Channel_11 (average mode)	2463.2	52.73	35.50	88.23	---	---	10Hz	---
Channel_11 (peak mode)	2461.9	67.95	35.50	103.45	---	---	3MHz	---
Outside band (peak mode)	2476.9	36.64	35.51	72.15	31.30	---	3MHz	Pass
Channel_1 Restricted band (peak mode)	2389.8	29.25	35.47	64.72	---	74	3MHz	Pass
Restricted band (average mode)	2390.0	10.81	35.47	46.28	---	54	10Hz	Pass
Channel_11 Restricted band (peak mode)	2483.7	31.77	35.51	67.28	---	74	3MHz	Pass
Restricted band (average mode)	2483.5	12.53	35.51	48.04	---	54	10Hz	Pass


Note:

- The Spectrum plot of emission level measurement in Restricted band is attached.
- Emission Level=Spectrum Reading+Correction Factor
- Correction Factor=Antenna Factor+cable loss–amplifier gain
- Both Horizontal and Vertical polarizaion have been tested and the worst data is listed above.


Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 1)

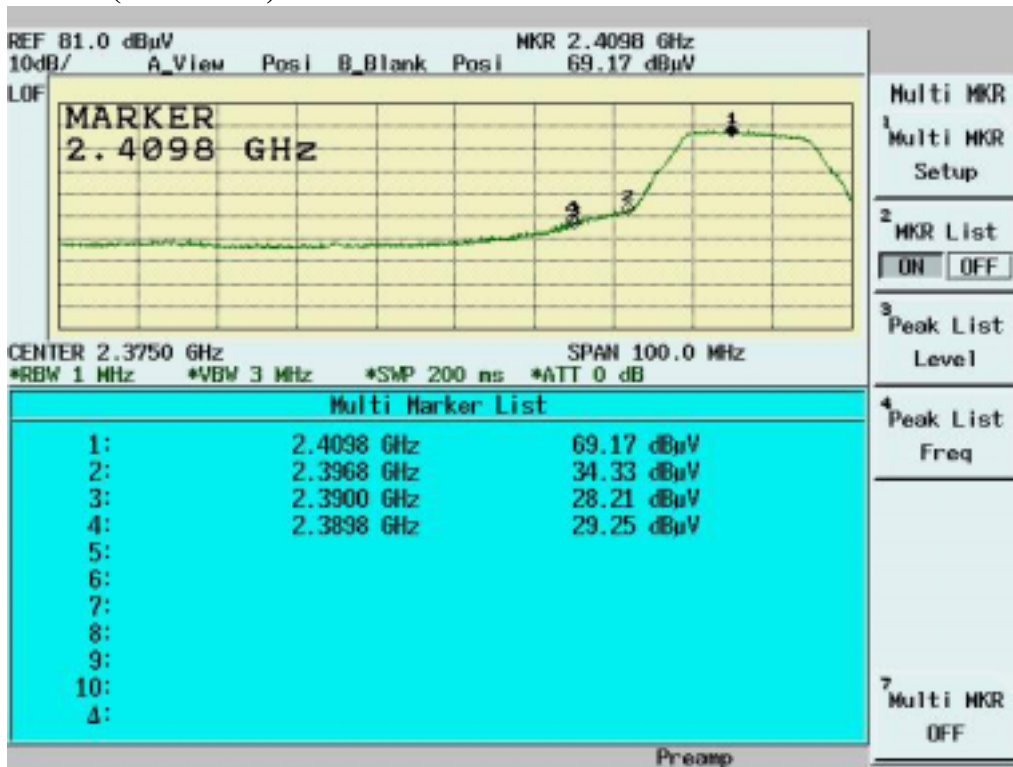


Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 1)

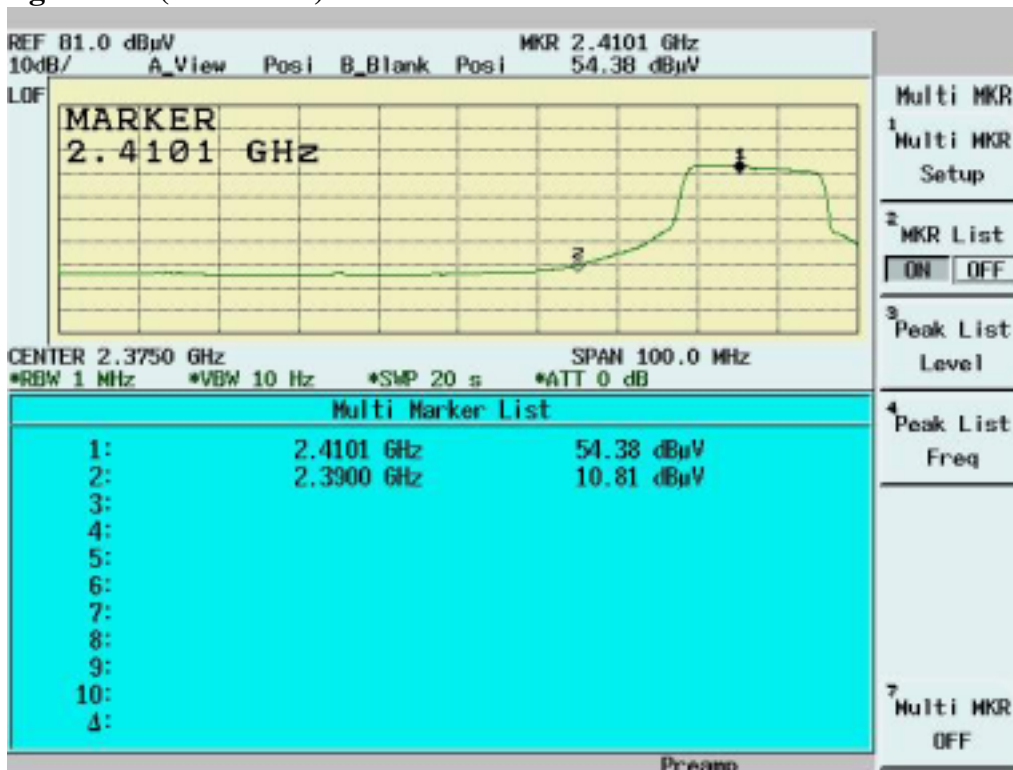

Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 11)

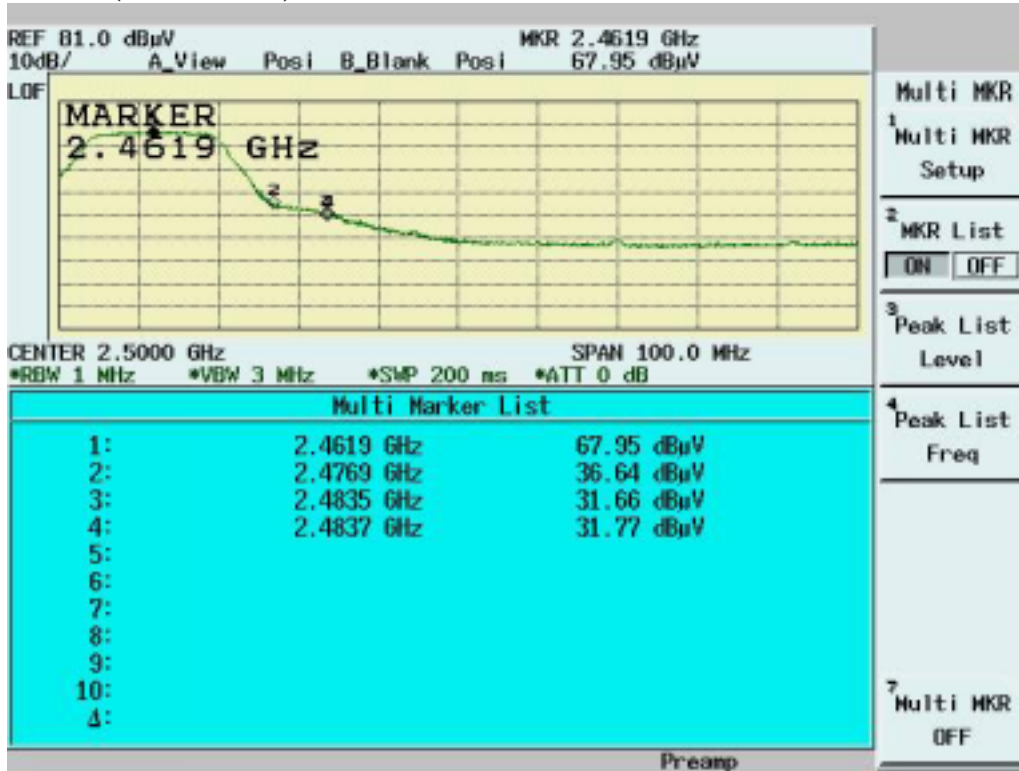

Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 11)

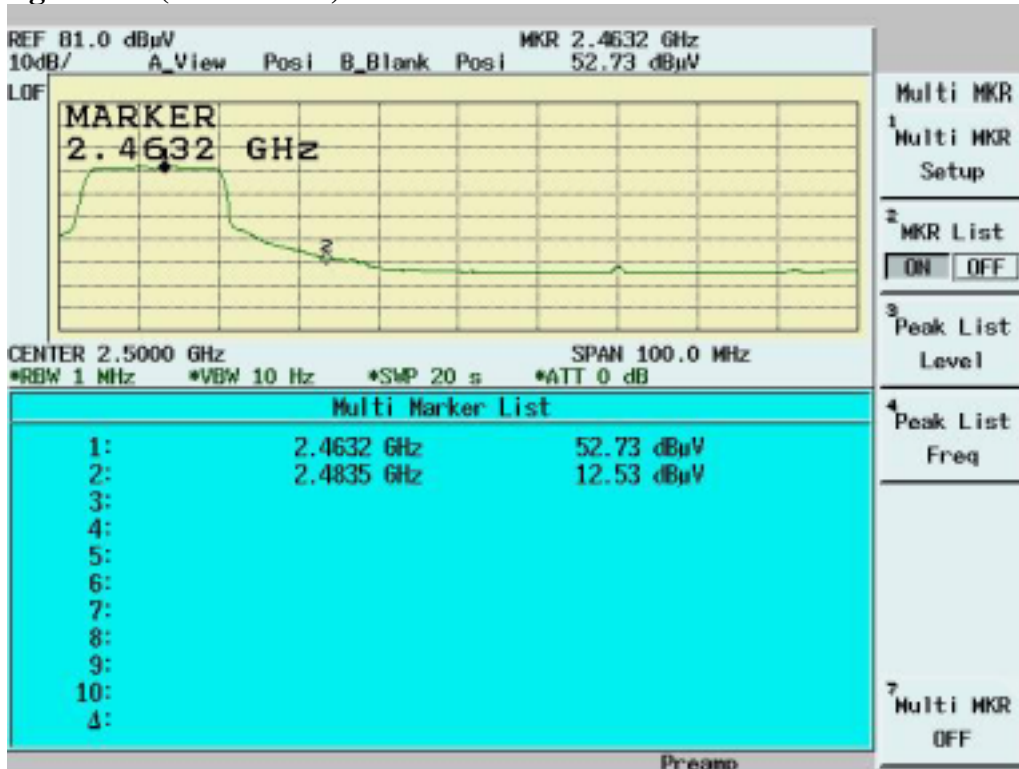

4.5 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]

See MPE report

4.6 DSSS Peak Power Spectral Density [Section 15.247(d)]

4.6.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN:1.5MHz
 RBW: 3KHz
 VBW: 30KHz
 Center frequency: fundamental frequency tested.
 Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.

4.6.2 Test Setup



4.6.3 Test Data

Maximum Peak Output Power Density

Test Engineer:Jerry
Chiou

Temperature ():27


Tx Data Rate=6Mbps

Humidity (%):55

Channel	Frequency (MHz)	Spectrum Reading (dBm/3KHz)	Cable Loss (dB)	Peak Power Output (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
1	2412	-14.88	1.10	-13.78	8	Pass
6	2437	-15.50	1.10	-14.40	8	Pass
11	2462	-15.76	1.10	-14.66	8	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.


Channel 1

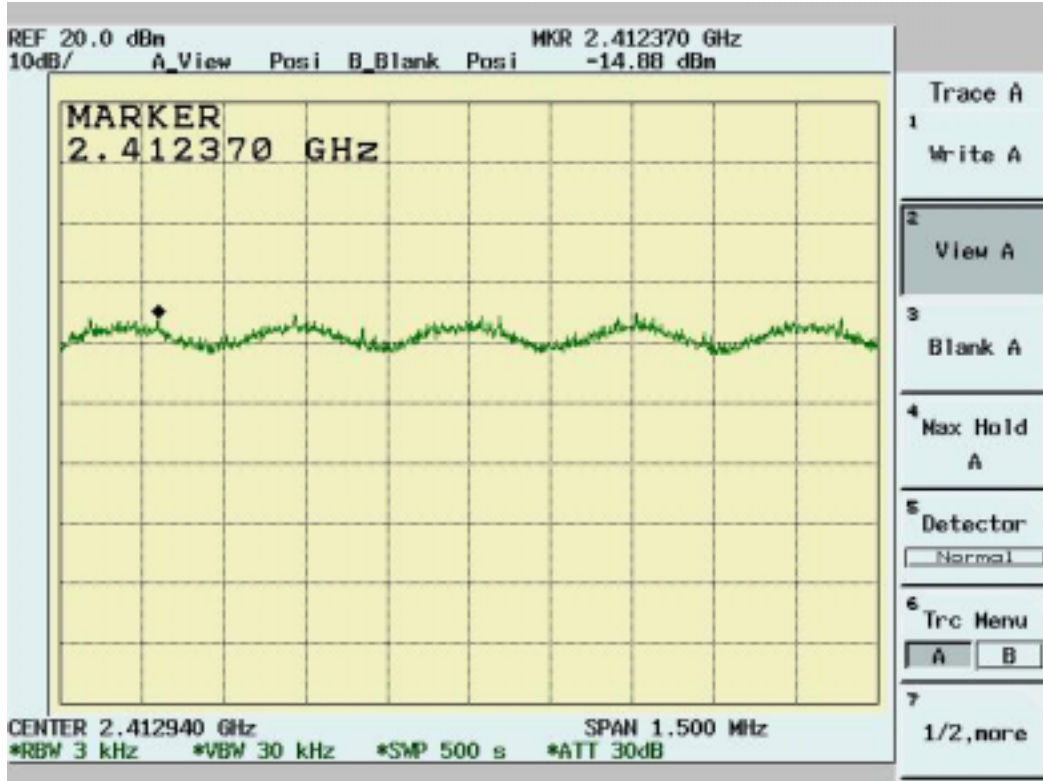

Channel 6



Channel 11

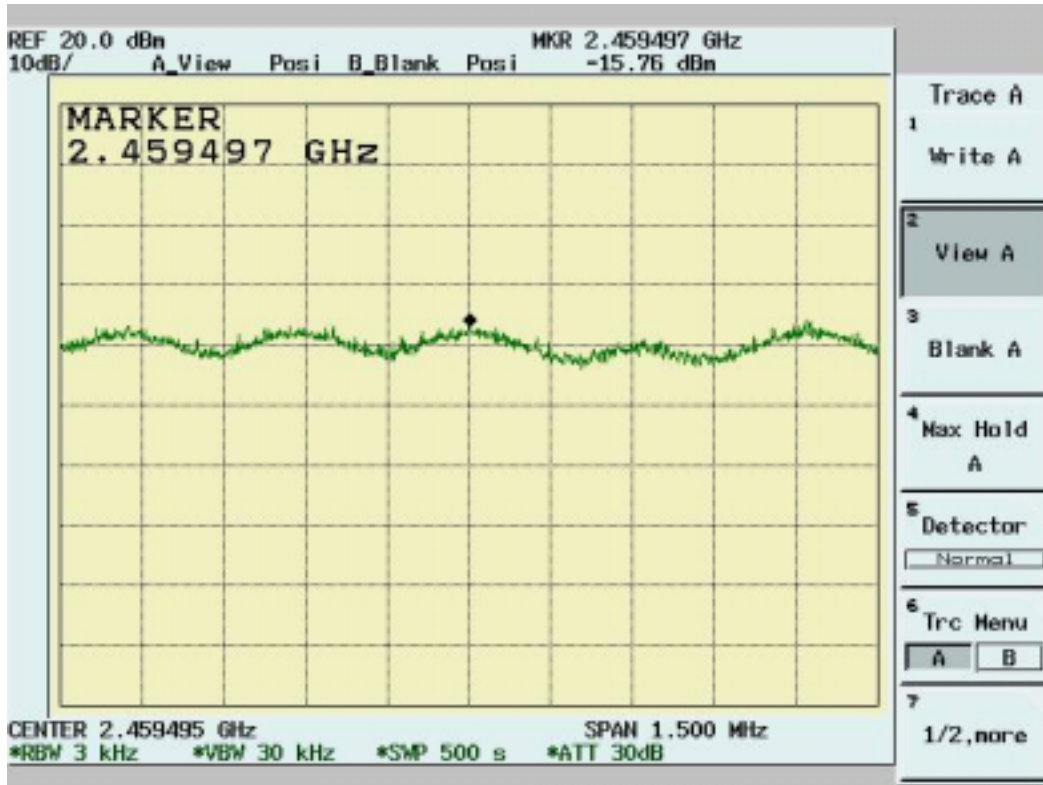

5. TEST RESULTS (Bluetooth)

5.1 FHSS Maximum Peak Output Power

5.1.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer.

5.1.2 Test Setup



5.1.3 Test Data


Maximum Peak Output Power



Temperature ():25

Test Engineer:Jerry Chiou

Humidity (%):55

Channel	Frequency (Mhz)	Analyzer Reading (dBm)	Cable Loss (dB)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
00	2412	3.30	1.10	2.75	4.40	30	Pass
39	2437	2.77	1.10	2.44	3.87	30	Pass
78	2462	2.50	1.10	2.29	3.60	30	Pass

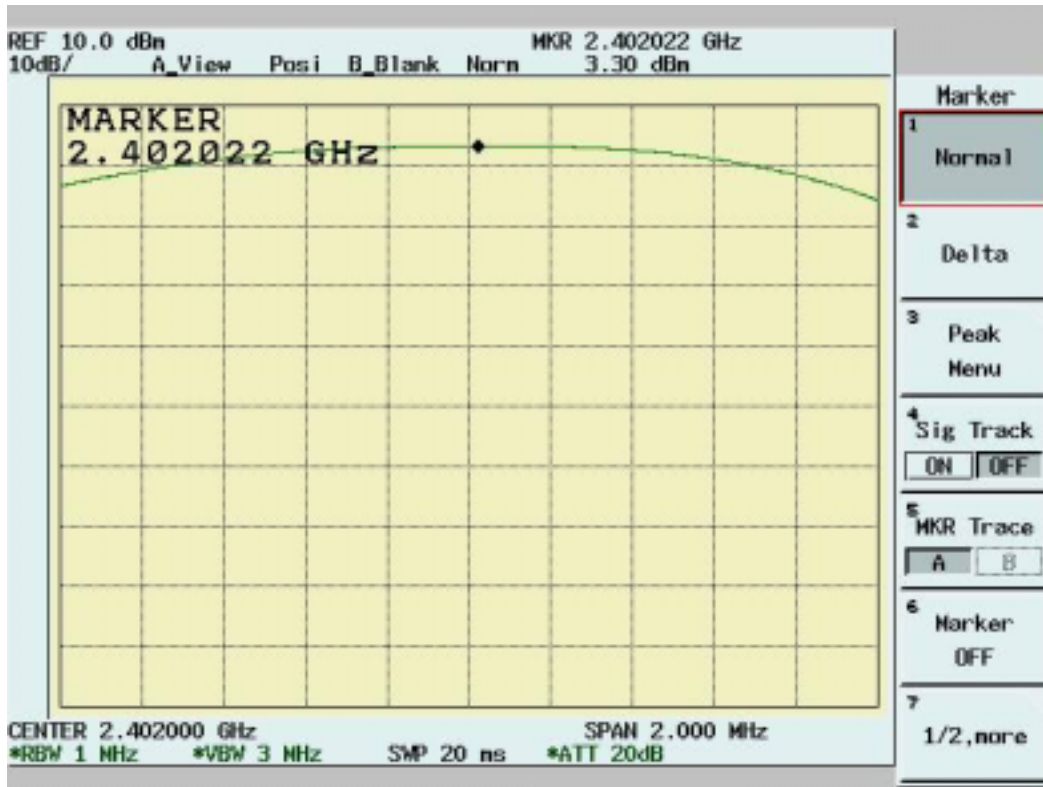

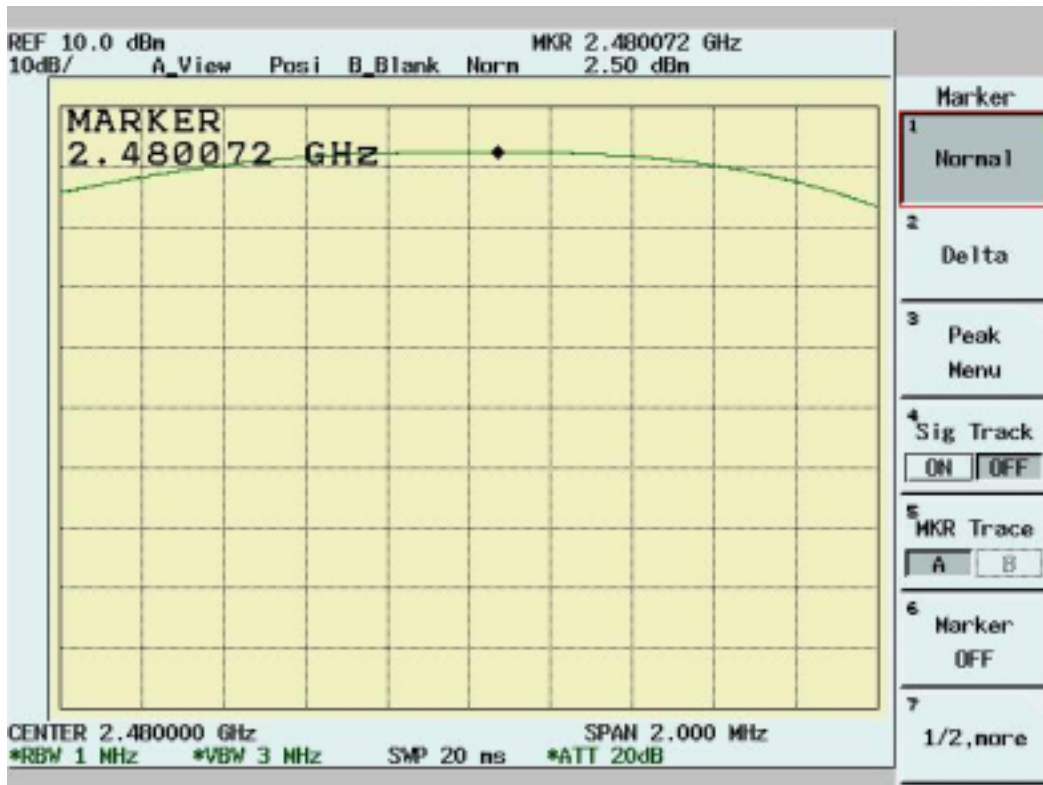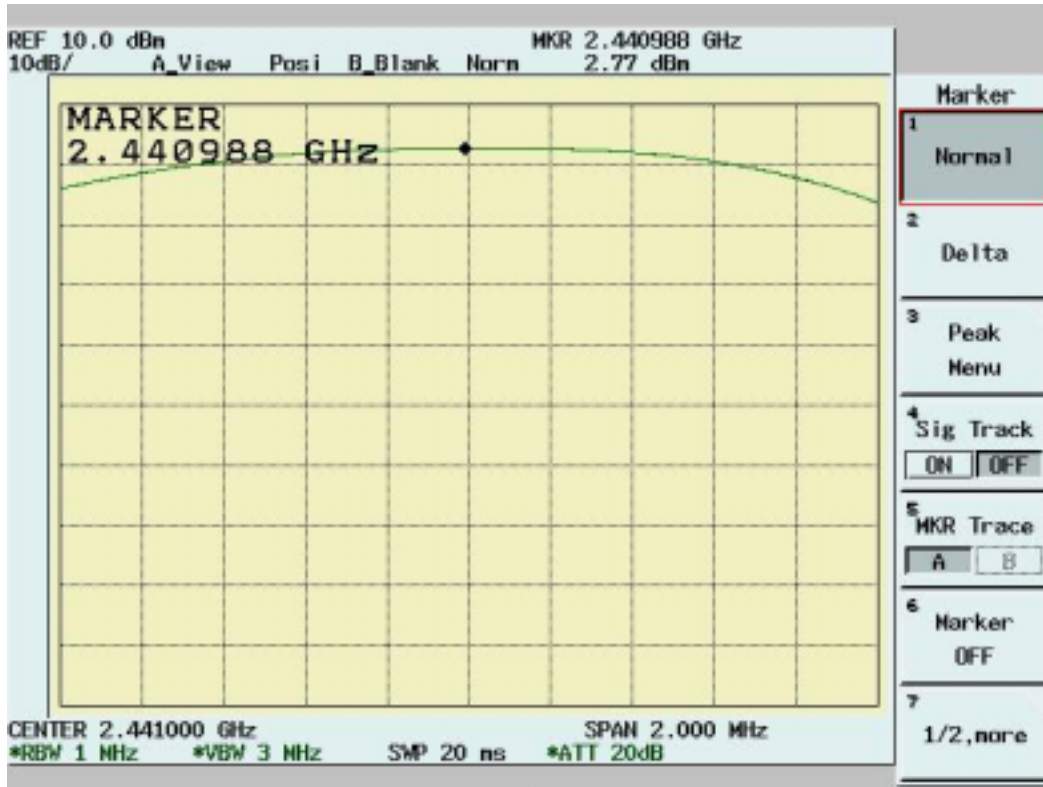

5.2 Radiated Emission Measurement

5.2.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

5.2.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup *according to EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

5.2.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	3MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

5.2.4 Test Data (30MHz – 1GHz):**30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 00, 39, 78**

Operator: Jerry Chiou

Temperature (C): 23

06:53:39 PM, Friday, August 12, 2005

Humidity (%): 54

Frequency	Rx Amp.	Ant Fact	CableLoss	PreAmpGain	Corrct. Emi.	Limit	Margin	Ant. Pos.	Table Pos.
MHz	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg)
70.74	20.66	5.49	1.49	0.00	27.65	40.00	-12.35	196.00	334.00
96.93	18.51	9.69	1.90	0.00	30.10	43.50	-13.40	196.00	7.00
107.6	18.60	11.21	2.01	0.00	31.82	43.50	-11.68	196.00	285.00
355.92	11.98	16.16	4.15	0.00	32.29	46.00	-13.71	196.00	219.00
479.11	10.45	16.90	5.06	0.00	32.41	46.00	-13.59	102.00	26.00
499.48	10.20	17.39	5.28	0.00	32.87	46.00	-13.13	102.00	157.00
666.32	17.04	19.00	6.41	0.00	42.45	46.00	-3.55	196.00	203.00
733.25	12.80	19.80	6.89	0.00	39.49	46.00	-6.51	196.00	23.00
866.14	2.87	20.60	7.97	0.00	31.44	46.00	-14.56	102.00	271.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 00, 39, 78

Operator: Jerry Chiou

Temperature (C): 23

06:53:39 PM, Friday, August 12, 2005

Humidity (%): 54

Frequency	Rx Amp.	Ant Fact	CableLoss	PreAmpGain	Corrct. Emi.	Limit	Margin	Ant. Pos.	Table Pos.
MHz	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg)
40.67	16.95	11.86	1.13	0.00	29.94	40.00	-10.06	196.00	318.00
53.28	26.93	6.81	1.26	0.00	35.00	40.00	-5.00	102.00	173.00
71.71	24.56	5.61	1.52	0.00	31.69	40.00	-8.31	196.00	334.00
357.86	14.54	16.15	4.16	0.00	34.85	46.00	-11.15	196.00	203.00
366.59	13.21	16.10	4.22	0.00	33.53	46.00	-12.47	102.00	320.00
428.67	12.46	16.07	4.65	0.00	33.18	46.00	-12.82	102.00	189.00
666.32	17.26	19.00	6.41	0.00	42.67	46.00	-3.33	196.00	203.00
733.25	11.09	19.80	6.89	0.00	37.78	46.00	-8.22	196.00	23.00
833.16	5.27	20.43	7.71	0.00	33.41	46.00	-12.59	196.00	252.00

NOTE:

- During the Pre-test, the EUT has been tested for Channel 00, 39, 78 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.
- Margin = Corrected Amplitude – Limit
Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain
A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

5.2.5 Test Data (1GHz – 25 GHz) .

1GHz~ 25 GHz (Horizontal), Channel 00: 2402 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1132.37	47.55 pk	25.11	2.19	34.00	40.85 pk	54.00 av	-13.15	102	103
1167.33	46.78 pk	25.27	2.19	34.02	40.22 pk	54.00 av	-13.78	102	100
1332.17	47.80 pk	26.03	2.21	34.11	41.93 pk	54.00 av	-12.07	101	89
1806.69	42.43 pk	29.38	2.46	34.80	39.46 pk	54.00 av	-14.54	100	56
1831.67	42.42 pk	29.59	2.48	34.85	39.63 pk	54.00 av	-14.37	100	55
1841.66	44.98 pk	29.67	2.48	34.87	42.27 pk	54.00 av	-11.73	100	54
1999	41.74 pk	30.99	2.60	35.18	40.16 pk	54.00 av	-13.84	100	43
2148.85	41.68 pk	30.97	2.15	35.19	39.61 pk	54.00 av	-14.39	100	90
4804.21	49.06 pk	34.86	2.12	37.69	48.34 pk	54.00 av	-5.66	1400.00	242.00
9607.67	43.27 pk	40.66	3.23	34.32	52.84 pk	54.00 av	-1.16	100.00	185.00

1GHz~ 25 GHz (Vertical), Channel 00: 2402 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1064.94	49.05 pk	24.80	2.18	33.97	42.06 pk	54.00 av	-11.94	102	108
1099.9	47.05 pk	24.96	2.18	33.98	40.21 pk	54.00 av	-13.79	102	105
1132.37	46.46 pk	25.11	2.19	34.00	39.75 pk	54.00 av	-14.25	102	103
1199.8	46.58 pk	25.42	2.19	34.04	40.15 pk	54.00 av	-13.85	102	98
1264.74	47.43 pk	25.72	2.20	34.07	41.28 pk	54.00 av	-12.72	101	94
1299.7	45.86 pk	25.88	2.21	34.09	39.85 pk	54.00 av	-14.15	101	91
1332.17	48.05 pk	26.03	2.21	34.11	42.18 pk	54.00 av	-11.82	101	89
2798.2	43.98 pk	31.02	1.41	34.93	41.48 pk	54.00 av	-12.52	102	294
4803.68	49.48 pk	34.85	2.12	37.69	48.76 pk	54.00 av	-5.24	100.00	202.00
9608.05	43.47 pk	40.66	3.23	34.32	53.04 pk	54.00 av	-0.96	100.00	143.00

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ * ”: Fundamental Frequency
- “**”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk”: peak mode
- “av”: average mode
- “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal) , Channel 39 : 2441 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1132.37	46.32 pk	25.11	2.19	34.00	39.61 pk	54.00 av	-14.39	102	103
1332.17	47.83 pk	26.03	2.21	34.11	41.96 pk	54.00 av	-12.04	101	89
1399.6	45.14 pk	26.34	2.22	34.15	39.55 pk	54.00 av	-14.45	101	84
1806.69	42.51 pk	29.38	2.46	34.80	39.54 pk	54.00 av	-14.46	100	56
1841.66	45.05 pk	29.67	2.48	34.87	42.33 pk	54.00 av	-11.67	100	54
1999	41.02 pk	30.99	2.60	35.18	39.44 pk	54.00 av	-14.56	100	43
2151.35	42.17 pk	30.97	2.14	35.19	40.09 pk	54.00 av	-13.91	100	91
4882.14	49.40 pk	35.15	2.14	37.78	48.91 pk	54.00 av	-5.09	100.00	232.00
9763.92	43.30 pk	40.32	3.31	34.38	52.55 pk	54.00 av	-1.45	100.00	24.00

1GHz~ 25 GHz (Vertical), Channel 39 : 2441 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1064.94	49.43 pk	24.80	2.18	33.97	42.44 pk	54.00 av	-11.56	102	108
1099.9	46.91 pk	24.96	2.18	33.98	40.06 pk	54.00 av	-13.94	102	105
1132.37	46.36 pk	25.11	2.19	34.00	39.65 pk	54.00 av	-14.35	102	103
1264.74	46.77 pk	25.72	2.20	34.07	40.62 pk	54.00 av	-13.38	101	94
1299.7	45.63 pk	25.88	2.21	34.09	39.62 pk	54.00 av	-14.38	101	91
1332.17	47.99 pk	26.03	2.21	34.11	42.12 pk	54.00 av	-11.88	101	89
2798.2	43.78 pk	31.02	1.41	34.93	41.28 pk	54.00 av	-12.72	102	294
4882.27	52.83 pk	35.15	2.14	37.78	52.34 pk	54.00 av	-1.66	100.00	226.00
9764.2	44.06 pk	40.32	3.31	34.38	53.31 pk	54.00 av	-0.69	100.00	360.00

Note:

- According to the standards used:Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ * ”: Fundamental Frequency
- “**”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk” : peak mode
- “ av” : average mode
- “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 78: 2480 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1064.94	46.34 pk	24.80	2.18	33.97	39.36 pk	54.00 av	-14.64	102	108
1132.37	45.71 pk	25.11	2.19	34.00	39.00 pk	54.00 av	-15.00	102	103
1164.84	45.80 pk	25.26	2.19	34.02	39.23 pk	54.00 av	-14.77	102	101
1332.17	48.44 pk	26.03	2.21	34.11	42.57 pk	54.00 av	-11.43	101	89
1826.67	41.90 pk	29.54	2.47	34.84	39.07 pk	54.00 av	-14.93	100	55
1841.66	45.20 pk	29.67	2.48	34.87	42.49 pk	54.00 av	-11.51	100	54
1999	41.17 pk	30.99	2.60	35.18	39.58 pk	54.00 av	-14.42	100	43
2151.35	41.67 pk	30.97	2.14	35.19	39.59 pk	54.00 av	-14.41	100	91
2510.99	44.62 pk	30.90	1.36	35.19	41.69 pk	54.00 av	-12.31	102	203
4959.67	50.90 pk	35.45	2.16	37.87	50.64 pk	54.00 av	-3.36	100.00	239.00
9919.25	42.59 pk	39.98	3.39	34.43	51.52 pk	54.00 av	-2.48	100.00	144.00

1GHz~ 25 GHz (Vertical), Channel 78 : 2480 MHz

Operator: Jerry Chiou

RBW: 1MHz
Humidity (%): 41
Temperature (C): 27

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1064.94	48.77 pk	24.80	2.18	33.97	41.78 pk	54.00 av	-12.22	102	108
1099.9	47.03 pk	24.96	2.18	33.98	40.19 pk	54.00 av	-13.81	102	105
1132.37	46.44 pk	25.11	2.19	34.00	39.73 pk	54.00 av	-14.27	102	103
1264.74	46.71 pk	25.72	2.20	34.07	40.56 pk	54.00 av	-13.44	101	94
1332.17	47.81 pk	26.03	2.21	34.11	41.94 pk	54.00 av	-12.06	101	89
1699.3	43.53 pk	28.47	2.38	34.59	39.79 pk	54.00 av	-14.21	101	6
2510.99	42.27 pk	30.90	1.36	35.19	39.35 pk	54.00 av	-14.65	102	203
2798.2	43.64 pk	31.02	1.41	34.93	41.14 pk	54.00 av	-12.86	102	294
4959.67	51.09 pk	35.45	2.16	37.87	50.83 pk	54.00 av	-3.17	100.00	217.00
9918.52	42.74 pk	39.98	3.39	34.43	51.68 pk	54.00 av	-2.32	100.00	275.00

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ * ”: Fundamental Frequency
- “**”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk” : peak mode
- “ av” : average mode
- “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.


All frequencies from 1GHz to 25 GHz have been tested.

5.3 Band Edge Measurement

5.3.1 Test Procedure (Conducted)

1. The transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 100MHz
 RBW: 100KHz
 VBW: 100KHz
 Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed
3. Find the next peak frequency outside the operation frequency band

5.3.2 Test Setup (Conducted)

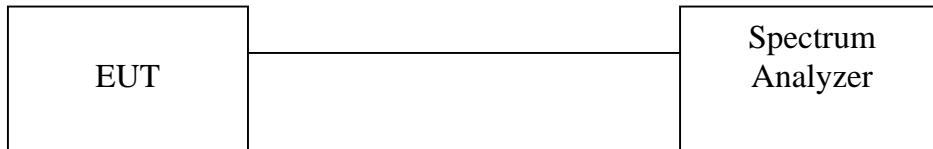

5.3.3 Test Data:

Table: Band Edge measurement (Conducted)


Temperature ():25

Test Engineer:Jerry Chiou

Humidity (%):55

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: >20dB (dB)	Pass/Fail
00	2401.8	110.0	---	---
Outside band	2399.5	65.6	44.5	Pass
78	2479.8	109.2	---	---
Outside band	2482.1	66.8	42.3	Pass

Band Edge Conducted measurement

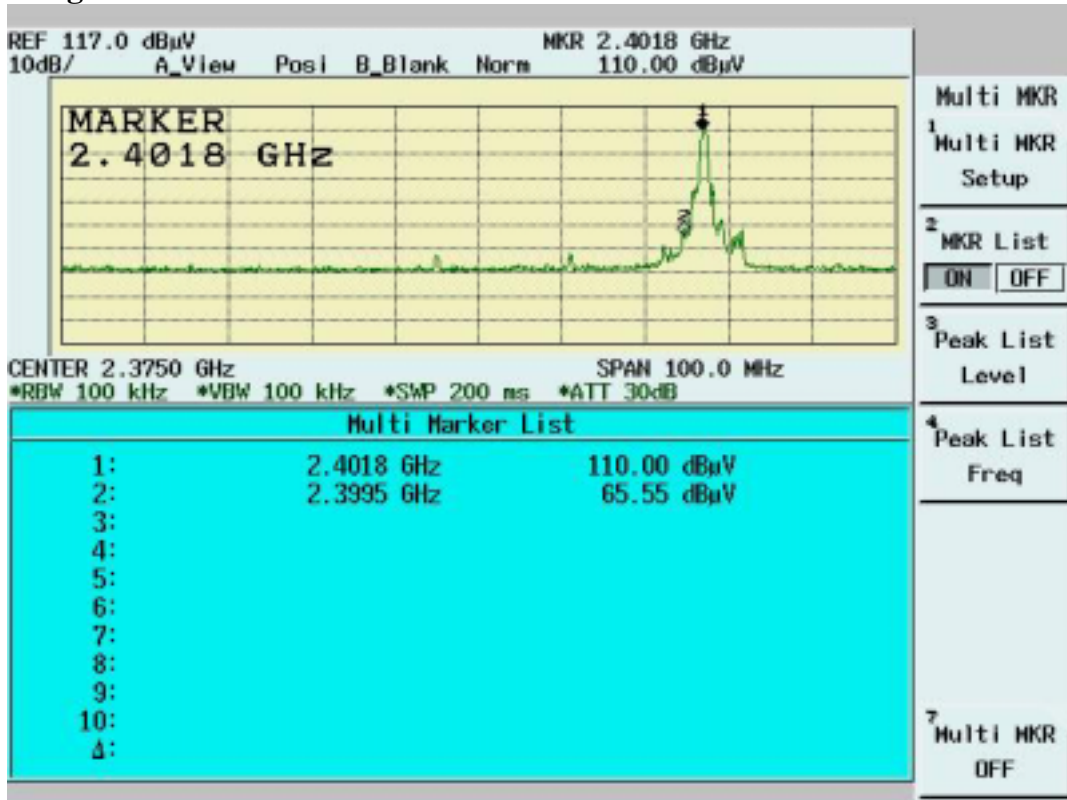

Band Edge Conducted Measurement

