

*Part 1--Tested with WLAN Module*

**Test Report**  
**for**  
**FCC Part 15 Subpart B & C**

*of*

*Product Name*

**Notebook Personal Computer**

*Model*

**V100**

**(With WLAN & Bluetooth & WWAN Module)**

*Applied by:*

MITAC Technology Corporation  
4F, No.1, R&D Road 2,  
Hsinchu Science-Based industrial Park, Hsinchu 300  
Taiwan,R. O. C.

*Test Performed by:*

**International Standards Laboratory**

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.  
Lung-Tan Hsiang, Tao Yuan County 325  
Taiwan, R.O.C.  
Tel:(03)407-1718 Fax:(03)407-1738

**Report Number: ISL-07LR008FC**

**Issue Date: 2007/04/02**

HC LAB: NVLAP:200234-0;VCCI: R-341,C-354; NEMKO:ELA 113A;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;TAF:1178; IC:IC4067

LT LAB: NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113B; BSMI:SL2-IN-E-0013;TAF:0997; IC:IC4164-1

ISL-T10-R2-3

## Contents of Report

|       |  |    |
|-------|--|----|
| 1.    | General .....  | 1  |
| 1.1   | Certification of Accuracy of Test Data.....                                    | 1  |
| 1.2   | Test Results Summary .....   | 2  |
| 2.    | Description of Equipment Under Test (EUT).....                                 | 4  |
| 3.    | TEST RESULTS (802.11b) .....   | 8  |
| 3.1   | Powerline Conducted Emissions [Section 15.207] .....                           | 8  |
| 3.1.1 | EUT Configuration.....   | 8  |
| 3.1.2 | Test Procedure.....  | 8  |
| 3.1.3 | EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... | 8  |
| 3.1.4 | Test Data: Power Line Conducted Emissions (Hot) Channel 1, 6, 11 .....         | 9  |
| 3.2   | Bandwidth for DSSS [Section 15.247 (a)(2)].....                                | 11 |
| 3.2.1 | Test Procedure.....  | 11 |
| 3.2.2 | Test Setup .....   | 11 |
| 3.2.3 | Test Data: .....   | 11 |
| 3.3   | DSSS Maximum Output Power [Section 15.247 (b)(1)] .....                        | 14 |
| 3.3.1 | Test Procedure.....  | 14 |
| 3.3.2 | Test Setup .....   | 14 |
| 3.3.3 | Test Data .....  | 14 |
| 3.4   | Radiated Emission Measurement [Section [15.247(c)(4)].....                     | 17 |
| 3.4.1 | EUT Configuration.....   | 17 |
| 3.4.2 | Test Procedure.....  | 17 |
| 3.4.3 | EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... | 17 |
| 3.4.4 | Test Data (30MHz – 1GHz): .....  | 18 |
| 3.4.5 | Test Data ( 1GHz – 25 GHz) .....   | 19 |
| 3.5   | Band Edge Measurement .....  | 22 |
| 3.5.1 | Test Procedure (Conducted).....  | 22 |
| 3.5.2 | Test Setup (Conducted) .....   | 22 |
| 3.5.3 | Test Data: .....   | 22 |
| 3.5.4 | Test Procedure (Radiated).....   | 24 |
| 3.5.5 | Test Setup (Radiated).....   | 24 |
| 3.5.6 | Test Data .....  | 25 |
| 3.6   | RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)].....                | 28 |
| 3.7   | DSSS Peak Power Spectral Density [Section 15.247(d) ] .....                    | 29 |
| 3.7.1 | Test Procedure.....  | 29 |
| 3.7.2 | Test Setup .....   | 29 |
| 3.7.3 | Test Data .....  | 29 |
| 4.    | TEST RESULTS (802.11g).....  | 32 |
| 4.1   | Powerline Conducted Emissions [Section 15.207] .....                           | 32 |
| 4.1.1 | EUT Configuration.....   | 32 |
| 4.1.2 | Test Procedure.....  | 32 |
| 4.1.3 | EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... | 32 |
| 4.1.4 | Test Data: Power Line Conducted Emissions (Hot) Channel 1, 6, 11 .....         | 33 |
| 4.2   | Bandwidth for DSSS [Section 15.247 (a)(2)].....                                | 35 |
| 4.2.1 | Test Procedure.....  | 35 |
| 4.2.2 | Test Setup .....   | 35 |
| 4.2.3 | Test Data: .....   | 35 |

|       |  |    |
|-------|--|----|
| 4.3   | DSSS Maximum Peak Output Power [Section 15.247 (b)(1)].....                    | 38 |
| 4.3.1 | Test Procedure.....  | 38 |
| 4.3.2 | Test Setup .....   | 38 |
| 4.3.3 | Test Data .....  | 38 |
| 4.4   | Radiated Emission Measurement [Section [15.247(c)(4)] .....                    | 41 |
| 4.4.1 | EUT Configuration.....   | 41 |
| 4.4.2 | Test Procedure.....  | 41 |
| 4.4.3 | EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... | 41 |
| 4.4.4 | Test Data (30MHz – 1GHz): .....  | 42 |
| 4.4.5 | Test Data ( 1GHz – 25 GHz) .....   | 43 |
| 4.5   | Band Edge Measurement .....  | 46 |
| 4.5.1 | Test Procedure (Conducted).....  | 46 |
| 4.5.2 | Test Setup (Conducted) .....   | 46 |
| 4.5.3 | Test Data: .....   | 46 |
| 4.5.4 | Test Procedure (Radiated).....   | 48 |
| 4.5.5 | Test Setup (Radiated).....   | 48 |
| 4.5.6 | Test Data .....  | 49 |
| 4.6   | RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)].....                | 52 |
| 4.7   | DSSS Peak Power Spectral Density [Section 15.247(d) ] .....                    | 53 |
| 4.7.1 | Test Procedure.....  | 53 |
| 4.7.2 | Test Setup .....   | 53 |
| 4.7.3 | Test Data .....  | 53 |
| 5.    | TEST RESULTS (802.11a 5725MHz-5850MHz) .....                                   | 56 |
| 5.1   | Powerline Conducted Emissions [Section 15.207] .....                           | 56 |
| 5.1.1 | EUT Configuration.....   | 56 |
| 5.1.2 | Test Procedure.....  | 56 |
| 5.1.3 | EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... | 56 |
| 5.1.4 | Test Data: .....   | 57 |
| 5.2   | Bandwidth for DSSS [Section 15.247 (a)(2)] .....                               | 59 |
| 5.2.1 | Test Procedure.....  | 59 |
| 5.2.2 | Test Setup .....   | 59 |
| 5.2.3 | Test Data: .....   | 59 |
| 5.3   | DSSS Maximum Output Power [Section 15.247 (b)(1)] .....                        | 62 |
| 5.3.1 | Test Procedure.....  | 62 |
| 5.3.2 | Test Setup .....   | 62 |
| 5.3.3 | Test Data .....  | 62 |
| 5.4   | Radiated Emission Measurement [Section [15.247(c)(4)] .....                    | 65 |
| 5.4.1 | EUT Configuration.....   | 65 |
| 5.4.2 | Test Procedure.....  | 65 |
| 5.4.3 | EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... | 65 |
| 5.4.4 | Test Data (30MHz – 1GHz): .....  | 66 |
| 5.4.5 | Test Data ( 1GHz – 40 GHz) .....   | 67 |



5.5 Band Edge Measurement ..... 70

5.5.1 Test Procedure (Conducted) ..... 70

5.5.2 Test Setup (Conducted) ..... 70

5.5.3 Test Data: ..... 70

5.5.4 Test Procedure (Radiated)..... 72

5.5.5 Test Setup (Radiated) ..... 72

5.5.6 Test Data ..... 73

5.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 75

5.7 DSSS Peak Power Spectral Density [Section 15.247(d) ] ..... 76

5.7.1 Test Procedure..... 76

5.7.2 Test Setup ..... 76

5.7.3 Test Data ..... 76

|        |  |     |
|--------|--|-----|
| 6.     | TEST RESULTS (802.11a 5150 – 5350MHz) .....                                    | 79  |
| 6.1.   | Maximum output Power [Section 15.407 (a)(1)(2)(3)].....                        | 79  |
| 6.1.1. | Test Procedure.....  | 79  |
| 6.1.2. | Test Setup .....   | 79  |
| 6.1.3. | Test Data: (Normal Mode) .....   | 79  |
| 6.2.   | Peak Power Spectral Density [Section 15.407(a)(1)(2)(3) ].....                 | 84  |
| 6.2.1. | Test Procedure.....  | 84  |
| 6.2.2. | Test Setup .....   | 84  |
| 6.2.3. | Test Data: (Normal Mode) .....   | 84  |
| 6.3.   | Peak Power Excursion Measurement [Section 15.407(a)(6) ].....                  | 87  |
| 6.3.1. | Test Procedure.....  | 87  |
| 6.3.2. | Test Setup .....   | 87  |
| 6.3.3. | Test Data: (Normal Mode) .....   | 87  |
| 6.4.   | Powerline Conducted Emissions .....  | 90  |
| 6.4.1. | EUT Configuration.....   | 90  |
| 6.4.2. | Test Procedure.....  | 90  |
| 6.4.3. | EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... | 90  |
| 6.4.4. | Test Data: Power Line Conducted Emissions (Hot) .....                          | 91  |
| 6.5.   | Radiated Emission Measurement [Section 15.209 & 15.407(b)(5)] .....            | 93  |
| 6.5.1. | EUT Configuration.....   | 93  |
| 6.5.2. | Test Procedure.....  | 93  |
| 6.5.3. | EMI Receiver/Spectrum Analyzer Configuration .....                             | 93  |
| 6.5.4. | Test Data (30MHz – 1GHz) .....   | 94  |
| 6.5.5. | Test Data ( 1GHz – 40 GHz, Transmitting ) .....                                | 95  |
| 6.6.   | Band Edge Measurement (Section 15.407 (b) (1) (2)) .....                       | 99  |
| 6.6.1. | Test Procedure (Conducted).....  | 99  |
| 6.6.2. | Test Setup (Conducted) .....   | 99  |
| 6.6.3. | Test Data (conducted): .....   | 99  |
| 6.6.4. | Bandedge Measurement Test Procedure (Radiated).....                            | 101 |
| 6.6.5. | Test Setup (Radiated) .....  | 102 |
| 6.6.6. | Test Data (Radiated): .....  | 103 |
| 6.7.   | RF Exposure Measurement [Section 15.407(f)(4) & 1.1307(b)] .....               | 106 |
| 6.8.   | Frequency Stability [Section 15.407(g)].....                                   | 107 |
| 6.8.1. | Limits of Frequency Stability Measurement.....                                 | 107 |
| 6.8.2. | Test Procedure.....  | 107 |
| 6.8.3. | Test Setup .....   | 107 |
| 6.8.4. | Test Data .....  | 108 |
| 6.9.   | Transmitter Power Control (TPC) .....  | 109 |
| 6.10.  | Dynamic Frequency Selection (DFS) .....  | 110 |

|        |  |     |
|--------|--|-----|
| 7.     | Appendix .....   | 111 |
| 7.1.   | Appendix A: Measurement Procedure for Power line Conducted Emissions ..... | 111 |
| 7.2.   | Appendix B: Test Procedure for Radiated Emissions .....                    | 112 |
| 7.3.   | Appendix C: Test Equipment .....   | 113 |
| 7.3.1. | Test Equipment List.....   | 113 |
| 7.3.2. | Software for Controlling Spectrum/Receiver and Calculating Test Data ..... | 113 |
| 7.4.   | Appendix D: Layout of EUT and Support Equipment.....                       | 114 |
| 7.4.1. | General Conducted Test Configuration.....                                  | 114 |
| 7.4.2. | General Radiation Test Configuration .....                                 | 115 |
| 7.5.   | Appendix E: Description of Support Equipment.....                          | 116 |
| 7.5.1. | Description of Support Equipment.....                                      | 116 |
| 7.5.2. | Software for Controlling Support Unit.....                                 | 118 |
| 7.5.3. | I/O Cable Condition of EUT and Support Units.....                          | 119 |
| 7.6.   | Appendix F: Accuracy of Measurement.....                                   | 120 |
| 7.7.   | Appendix G: Photographs of EUT Configuration Test Set Up.....              | 122 |
| 7.8.   | Appendix H: Antenna Spec.....  | 125 |

# 1. General

## 1.1 Certification of Accuracy of Test Data

**Standards:** CFR 47 Part 15 Subpart B Class B  
CFR 47 Part 15 Subpart C (Section 15.247)  
CFR 47 Part 15 Subpart E (Section 15.407)

**Test Procedure:** ANSI C63.4:2003

**Equipment Tested:** Notebook Personal Computer

**Model:** V100

**Applied by:** MITAC Technology Corporation

**Sample received Date:** 2007/02/05

**Final test Date :** 2007/02/06-2007/02/08


**Test Result** PASS

**Test Site:** Chamber 02, Conduction 02

**Temperature** Refer to each site test data

**Humidity:** Refer to each site test data

**Test Engineer:**

  
Jerry Chiou

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature

  
-----  
Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 131 pages, including 1 cover page, 5 contents page, and 125 pages for the test description. This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

## 1.2 Test Results Summary

The 802.11b functions of EUT has been tested according to the FCC regulations listed below:

| Tested Standards: 47 CFR Part 15 Subpart C |                                   |        |                     |
|--|-----------------------------------|--------|---------------------|
| Standard Section                           | Test Type                         | Result | Remarks             |
| 15.207                                     | AC Power Line Emissions           | Pass   |                     |
| 15.247(a)(2)                               | Spectrum Bandwidth Of DSSS device | Pass   |                     |
| 15.247(b)                                  | Max. Peak Output Power            | Pass   |                     |
| 15.247( c )                                | Radiated Emissions 30MHz – 25 GHz | Pass   |                     |
| 15.247 ( c )                               | Band Edge Measurement             | Pass   |                     |
| 15.247(b)(4)                               | Radiation Exposure                | Pass   | SAR report attached |
| 15.247 (d)                                 | Power Spectral Density            | Pass   |                     |

The 802.11g functions of EUT has been tested according to the FCC regulations listed below:

| Tested Standards: 47 CFR Part 15 Subpart C |                                   |        |                     |
|--|-----------------------------------|--------|---------------------|
| Standard Section                           | Test Type                         | Result | Remarks             |
| 15.207                                     | AC Power Line Emissions           | Pass   |                     |
| 15.247(a)(2)                               | Spectrum Bandwidth Of DSSS device | Pass   |                     |
| 15.247(b)                                  | Max. Peak Output Power            | Pass   |                     |
| 15.247( c )                                | Radiated Emissions 30MHz – 25 GHz | Pass   |                     |
| 15.247 ( c )                               | Band Edge Measurement             | Pass   |                     |
| 15.247(b)(4)                               | Radiation Exposure                | Pass   | SAR report attached |
| 15.247 (d)                                 | Power Spectral Density            | Pass   |                     |



The 802.11a (5725 - 5850MHz) functions of EUT has been tested according to the FCC regulations listed below:

| Tested Standards: 47 CFR Part 15 Subpart C |                                   |        |                     |
|--|-----------------------------------|--------|---------------------|
| Standard Section                           | Test Type                         | Result | Remarks             |
| 15.207                                     | AC Power Line Emissions           | Pass   |                     |
| 15.247(a)(2)                               | Spectrum Bandwidth Of DSSS device | Pass   |                     |
| 15.247(b)                                  | Max. Peak Output Power            | Pass   |                     |
| 15.247( c )                                | Radiated Emissions 30MHz – 25 GHz | Pass   |                     |
| 15.247 ( c )                               | Band Edge Measurement             | Pass   |                     |
| 15.247(b)(4)                               | Radiation Exposure                | Pass   | SAR report attached |
| 15.247 (d)                                 | Power Spectral Density            | Pass   |                     |

The 802.11a (5150 - 5350MHz) functions of EUT has been tested to the FCC regulations listed below:

| Tested Standards: 47 CFR Part 15 Subpart E |                                   |        |                     |
|--|-----------------------------------|--------|---------------------|
| Standard Section                           | Test Type                         | Result | Remarks             |
| 15.407 (a)(1)(2)(3)                        | Peak Transmit Power               | Pass   |                     |
| 15.407 (a)(1)(2)(3)                        | Peak Power Spectral Density       | Pass   |                     |
| 15.407 (a)(6)                              | Peak Power Excursion              | Pass   |                     |
| 15.407 (b)(5)                              | AC Power Line Emissions           | Pass   |                     |
| 15.407 (b)(5)                              | Radiated Emissions 30MHz – 40 GHz | Pass   |                     |
| 15.407(f)                                  | Radiation exposure                | Pass   | SAR report attached |
| 15.407 (g)                                 | Frequency Stability               | Pass   |                     |
| 15.407 (h) (1)                             | Transmitter Power Control         | Pass   |                     |
| 15.407 (h) (2)                             | Dynamic Frequency Selection       | Pass   | DFS report attached |

## 2. Description of Equipment Under Test (EUT)

|                                 |   |
|---------------------------------|---|
| Description:                    | Notebook Personal Computer  |
| Condition:                      | Pre-Production  |
| Model:                          | V100  |
| Brand:                          | MITAC   |
| Wireless LAN Module:            | Intel, Model: WM3945ABG   |
| Bluetooth Module:               | BILLIONTON (Model:GUBTCR42M)  |
| Frequency Range of 802.11a:     | 5150 - 5250 MHz<br>5250 - 5350 MHz<br>5725 - 5850 MHz   |
| Frequency Range of 802.11b/g:   | 2400 - 2483.5 MHz   |
| Frequency Range of Bluetooth:   | 2400 - 2483.5 MHz   |
| Support channel:                |   |
| 802.11a Normal mode             | 13 Channels   |
| 802.11b/g                       | 11 Channels   |
| Bluetooth                       | 79 Channels   |
| Modulation Skill:               |   |
| 802.11a                         | OFDM (6 Mbps – 54 Mbps)   |
| 802.11b                         | DBPSK(1Mbps), DQPSK(2Mbps),<br>CCK(5.5/11Mbps)  |
| 802.11g                         | OFDM (6M - 54Mbps)  |
| Bluetooth                       | GFSK (1Mbps)  |
| Antennas Type:                  |   |
| WLAN Right antenna:             | PIFA (P/N: IA-060076) White<br>made by JOINSOON ELECTRONICS MFG. CO., LTD   |
| WLAN Left antenna:              | PIFA (P/N: IA-060239) Black<br>made by JOINSOON ELECTRONICS MFG. CO., LTD   |
| Bluetooth antenna:              | PIFA Antenna(P/N: IA060093),<br>made by JOINSOON ELECTRONICS MFG. CO.,LTD.  |
| Antenna Connected:              | Connected to RF connector on the PCB of the Bluetooth or WLAN module .The user is not possible to change the antenna without disassembling the notebook computer. |
| Antenna peak Gain:              |   |
| WLAN Right antenna              | 1.61dBi(11b,11g), 2.45dBi(11a)  |
| WLAN Left antenna               | -0.55 dBi (11b,11g), 3.97 dBi (11a)   |
| Bluetooth antenna               | -0.8 dBi  |
| Power Type of wireless module:  | 3.3V DC from Notebook PC  |
| Power Type of Bluetooth module: | 3.3V DC from Notebook PC  |

The channel and the operation frequency of 802.11a listed below:

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 01      | 5180           | 02      | 5200           |
| 03      | 5220           | 04      | 5240           |
| 05      | 5260           | 06      | 5280           |
| 07      | 5300           | 08      | 5320           |
| 09      | 5745           | 10      | 5765           |
| 11      | 5785           | 12      | 5805           |
| 13      | 5825           |         |                |

The channel and the operation frequency of 802.11b and 802.11g listed below:

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 01      | 2412           | 07      | 2442           |
| 02      | 2417           | 08      | 2447           |
| 03      | 2422           | 09      | 2452           |
| 04      | 2427           | 10      | 2457           |
| 05      | 2432           | 11      | 2462           |
| 06      | 2437           |         |                |

The channels and the operation frequency of Bluetooth listed below:

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 00      | 2402           | 01      | 2403           |
| 02      | 2404           | 03      | 2405           |
| 04      | 2406           | 05      | 2407           |
| .....   |                |         |                |
| 75      | 2477           | 76      | 2478           |
| 77      | 2479           | 78      | 2480           |

WWAN card: SIERRA (Model:MC5720)  
 TX Frequency: 824MHz~849MHz(CDMA800)  
 1850MHz ~ 1910MHz(CDMA1900)  
 RX Frequency: 869MHz~894MHz(CDMA800)  
 1930MHz ~ 1990MHz(CDMA1900)

Antennas Type:  
 WWAN Right antenna: PIFA (P/N: IA-060094) Blue  
 made by JOINSOON ELECTRONICS MFG. CO., LTD  
 WWAN Left antenna: PIFA (P/N: IA-060240) Red  
 made by JOINSOON ELECTRONICS MFG. CO., LTD

Antenna peak Gain:  
 WWAN Right antenna 1.1dBi(800MHz), 2.02dBi(1900MHz)  
 WWAN Left antenna 1.1dBi(800MHz), 2.02dBi(1900MHz)

|                     |   |
|---------------------|---|
| CPU:                | Genuine intel U2500 1.2GHz  |
| Adapter Type:       | Auto Switching AC Adapter<br>100-240V,1.2A 50-60Hz<br>EPS (Model: F10903-A) |
| Hard Disk Driver:   | Toshiba (Model:MK8032GSX) 80G or<br>Toshiba (Model:MK1234GSX) 120G          |
| Modem Card:         | Conexant (Model: RD-02-D330)  |
| Wireless LAN Card:  | Intel(Model:WM3945ABG)  |
| Bluetooth module:   | BILLIONTON(Model:GUBTCR42M)   |
| USB Connector:      | two 4 pin   |
| RJ11 Connector:     | one 2 pin   |
| Serial Port:        | two 9 pin   |
| RJ45 Connector:     | one 8 pin   |
| Line out Port:      | one   |
| Line-in Port:       | one   |
| SD Card Port:       | one   |
| PCMCIA Slot:        | two   |
| DC IN Port:         | one   |
| Battery:<br>7800mAh | MITAC(Model: BP-LC2600/33-0151), 11.1Vdc,                                   |
| LCD:                | Toshiba(Model: LTD104KA1S) or<br>Toshiba(Model: LTD121EXEV)                 |
| DDR:                | Infineon(Model:PC2-4200S-444-11-A0) 512M<br>Hnnix(Model:PC2-5300S555-12) 1G |
| Power Cord:         | Non-shielded, Detachable  |

Test configuration:

| configuration | LCD                          | CPU                        | Adapter Type          | Hard Disk                       | Modem Card                    | Wireless LAN Card        | Battery                           | DDR                             |
|---------------|------------------------------|----------------------------|-----------------------|---------------------------------|-------------------------------|--------------------------|-----------------------------------|---------------------------------|
| 1             | Toshiba( Model: LTD104K A1S) | Genuine intel U2500 1.2GHz | EPS (Model: F10903-A) | Toshiba (Model:MK 1234GSX) 120G | Conexant (Model: RD-02-D33 0) | Intel(Model: WM3945A BG) | MITAC(M odel:BP-LC 2600/33-015 1) | Hnnix(M odel:PC2- 5300S555 -12) |
| 2             | Toshiba( Model: LTD121E XEV) | Genuine intel U2500 1.2GHz | EPS (Model: F10903-A) | Toshiba (Model:MK 1234GSX) 120G | Conexant (Model: RD-02-D33 0) | Intel(Model: WM3945A BG) | MITAC(M odel:BP-LC 2600/33-015 1) | Hnnix(M odel:PC2- 5300S555 -12) |

All types of LCD, CPU, Adapter Type, Hard Disk, Modem Card, Wireless LAN Card, Battery, DDR with related components have been tested, only shown the worst data using the following configuration in this report.

| configuration | LCD                          | CPU                        | Adapter Type          | Hard Disk                       | Modem Card                    | Wireless LAN Card        | Battery                           | DDR                             |
|---------------|------------------------------|----------------------------|-----------------------|---------------------------------|-------------------------------|--------------------------|-----------------------------------|---------------------------------|
| 2             | Toshiba( Model: LTD121E XEV) | Genuine intel U2500 1.2GHz | EPS (Model: F10903-A) | Toshiba (Model:MK 1234GSX) 120G | Conexant (Model: RD-02-D33 0) | Intel(Model: WM3945A BG) | MITAC(M odel:BP-LC 2600/33-015 1) | Hnnix(M odel:PC2- 5300S555 -12) |

**EMI Noise Source:**

- GPS board Crystal: 12MHz(X1)
- Touch Panel board Crystal:7.372MHz(X1)
- SD card board Crystal:12MHz(X2)
- Main board Crystal:25MHz(X3),10MHz(X2),14.318MHz(X501)
- Clock Generator: U514

**EMI Solution:**

1. Adding shielded tape on LCD Signal cable
2. Adding Gasket on LCD Signal cable
3. Adding Gasket on LCD Panel around
4. Adding Gasket on Bluetooth Module
5. Adding aluminum foil on 3GCDMA antenna
6. Adding Copper on Main board
7. Adding Copper on Modem Card
8. Adding Gasket on Main board
9. Adding Gasket on Modem Card
10. Adding Core(A5 FS 16\*5\*12) on LAN Signal cable
11. Adding Core(A3 FS 15\*3\*11) on Modem Card Signal cable
12. Adding Core(K5B RH 6.35\*15.8\*3.3) on DC IN Jack
13. Adding aluminum foil on Case
14. Adding Core(FPC 40\*2.7\*12-K) on Keyboard Signal cable
15. Adding Core(RC 16\*28\*9 -M2) on Adapter Type Signal cable

### 3. TEST RESULTS (802.11b)

#### 3.1 Powerline Conducted Emissions [Section 15.207]

##### 3.1.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit used.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

##### 3.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.


At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

##### 3.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

|                   |                    |
|-------------------|--------------------|
| Frequency Range   | 150 KHz--30MHz     |
| Detector Function | Quasi-Peak/Average |
| Bandwidth (RBW)   | 9KHz               |


### 3.1.4 Test Data: Power Line Conducted Emissions (Hot) Channel 1, 6, 11

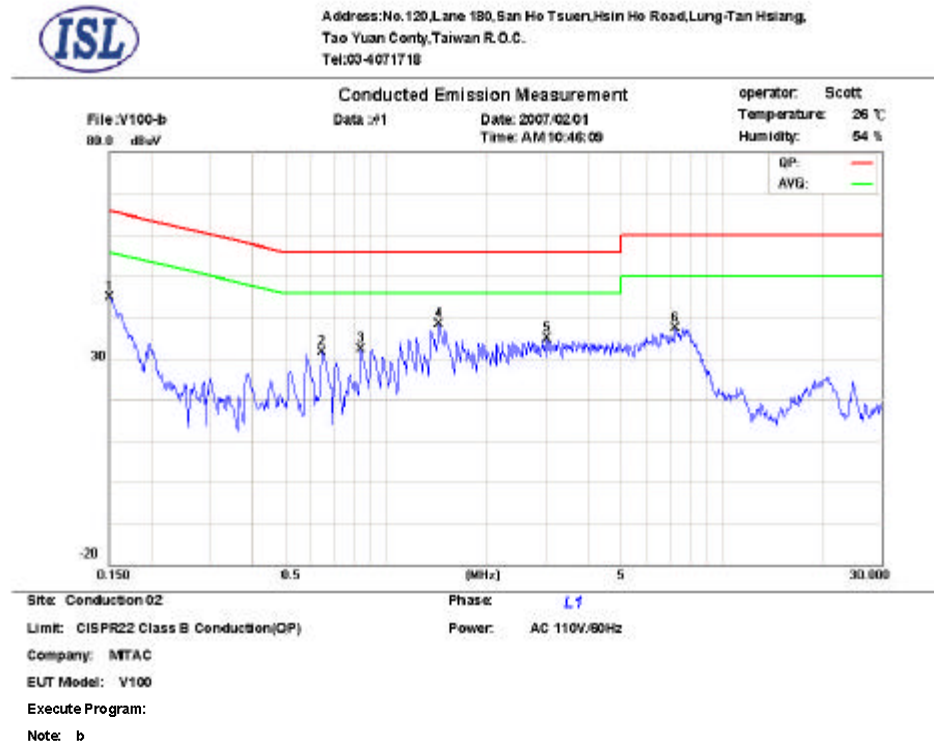

| Frequency MHz | LISN Loss dB | Cable Loss dB | QP Correct dBuV | QP Limit dBuV | QP Margin dB | AVG Correct dBuV | AVG Limit dBuV | AVG Margin dB | Note |
|---------------|--------------|---------------|-----------------|---------------|--------------|------------------|----------------|---------------|------|
| 0.1508        | 0.1          | 0.02          | 43.00           | 65.9          | -22.9        | 39.90            | 55.9           | -16.0         |      |
| 0.6440        | 0.2          | 0.07          | 32.70           | 56.0          | -23.3        | 29.60            | 46.0           | -16.4         |      |
| 0.8438        | 0.2          | 0.07          | 33.00           | 56.0          | -23.0        | 32.60            | 46.0           | -13.4         |      |
| * 1.4257      | 0.2          | 0.08          | 39.90           | 56.0          | -16.1        | 36.90            | 46.0           | -9.10         |      |
| 3.0253        | 0.3          | 0.12          | 25.80           | 56.0          | -30.2        | 22.40            | 46.0           | -23.6         |      |
| 7.2518        | 0.45         | 0.18          | 38.50           | 60.0          | -21.5        | 34.90            | 50.0           | -15.1         |      |

\*:Maximum data x:Over limit

Power Line Conducted Emissions (Neutral) Channel 1, 6, 11

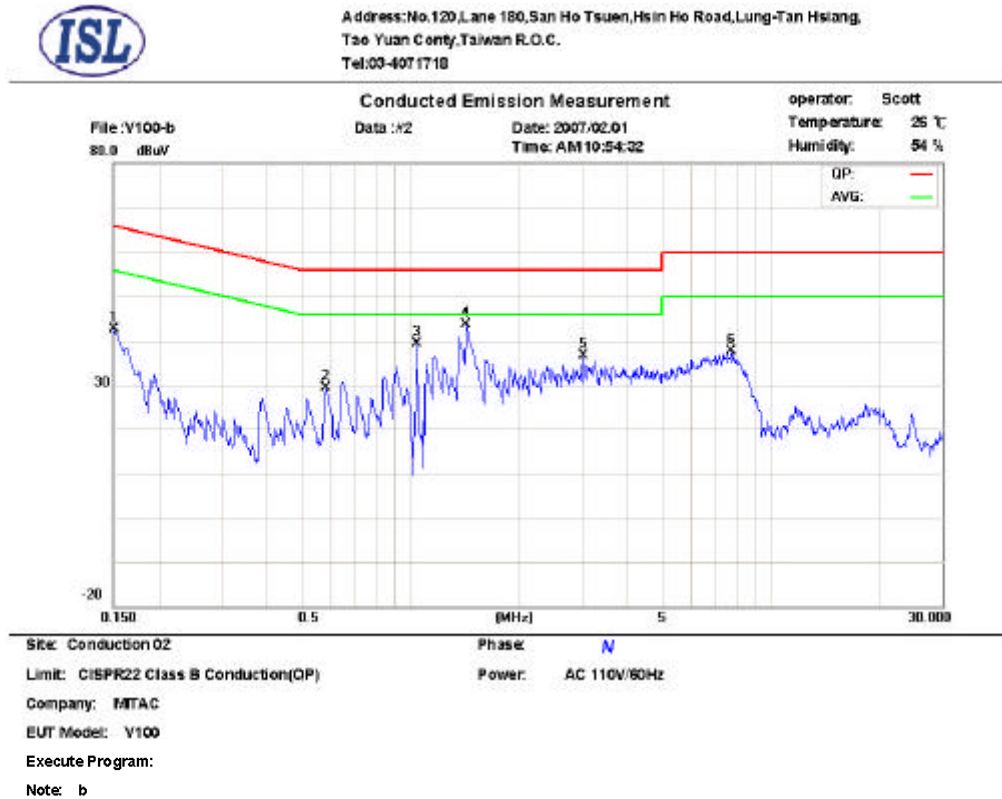

| Frequency MHz | LISN Loss dB | Cable Loss dB | QP Correct dBuV | QP Limit dBuV | QP Margin dB | AVG Correct dBuV | AVG Limit dBuV | AVG Margin dB | Note |
|---------------|--------------|---------------|-----------------|---------------|--------------|------------------|----------------|---------------|------|
| 0.1508        | 0.1          | 0.02          | 42.30           | 65.9          | -23.6        | 39.50            | 55.9           | -16.4         |      |
| 0.5854        | 0.2          | 0.07          | 31.10           | 56.0          | -24.9        | 28.00            | 46.0           | -18.0         |      |
| 1.0430        | 0.2          | 0.07          | 23.40           | 56.0          | -32.6        | 15.50            | 46.0           | -30.5         |      |
| * 1.4220      | 0.2          | 0.08          | 43.70           | 56.0          | -12.3        | 40.30            | 46.0           | -5.70         |      |
| 3.0253        | 0.2          | 0.12          | 26.90           | 56.0          | -29.1        | 21.60            | 46.0           | -24.4         |      |
| 7.7689        | 0.33         | 0.18          | 36.80           | 60.0          | -23.2        | 32.60            | 50.0           | -17.4         |      |

\*:Maximum data x:Over limit

\* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels.  
Margin = Amplitude + Insertion Loss- Limit  
A margin of -8dB means that the emission is 8dB below the limit



### 3.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

#### 3.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

|                   |                   |
|-------------------|-------------------|
| Equipment mode    | Spectrum analyzer |
| Detector function | Peak mode         |
| RBW               | 100KHz            |
| VBW               | 100KHz            |

#### 3.2.2 Test Setup




#### 3.2.3 Test Data:

##### 6dB Bandwidth


Temp. (deg. C): 25  
 Humidity (%): 50  
 Test Engr: Jerry Chiou

| Chennel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | Limit<br>(MHz) | Pass/Fail |
|---------|--------------------|------------------------|----------------|-----------|
| 1       | 2412               | 9.08                   | 0.5            | Pass      |
| 6       | 2437               | 9.04                   | 0.5            | Pass      |
| 11      | 2462               | 9.08                   | 0.5            | Pass      |

Channel 1:

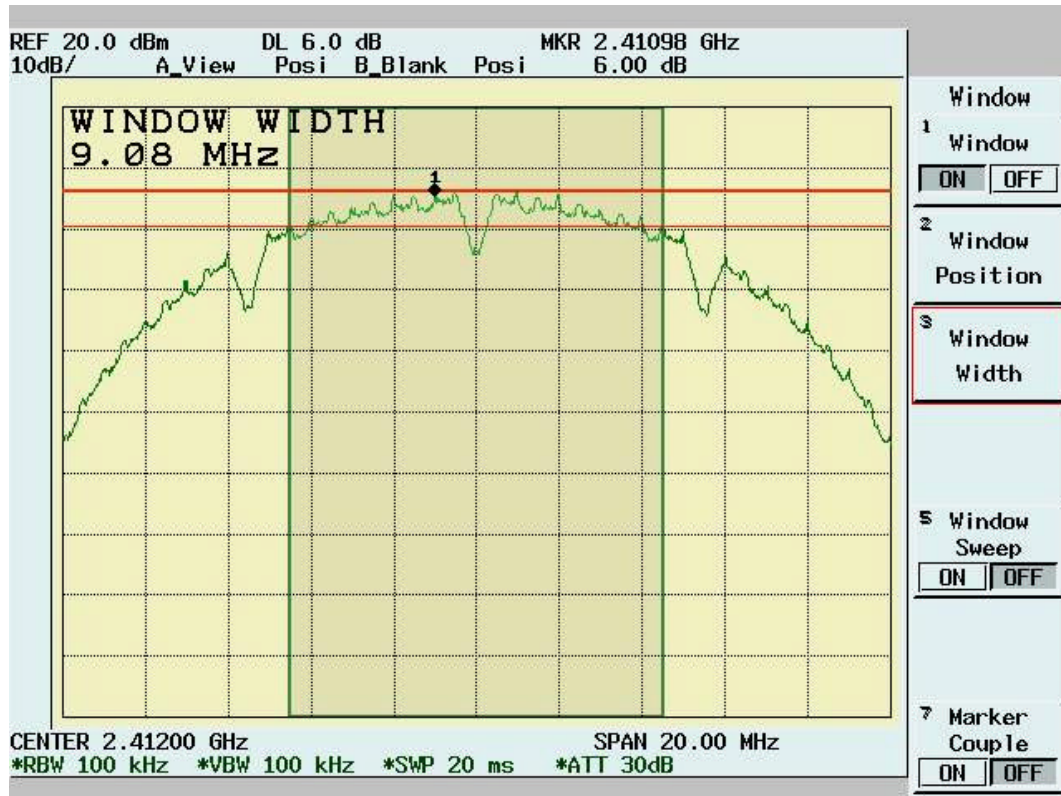

Channel 6:

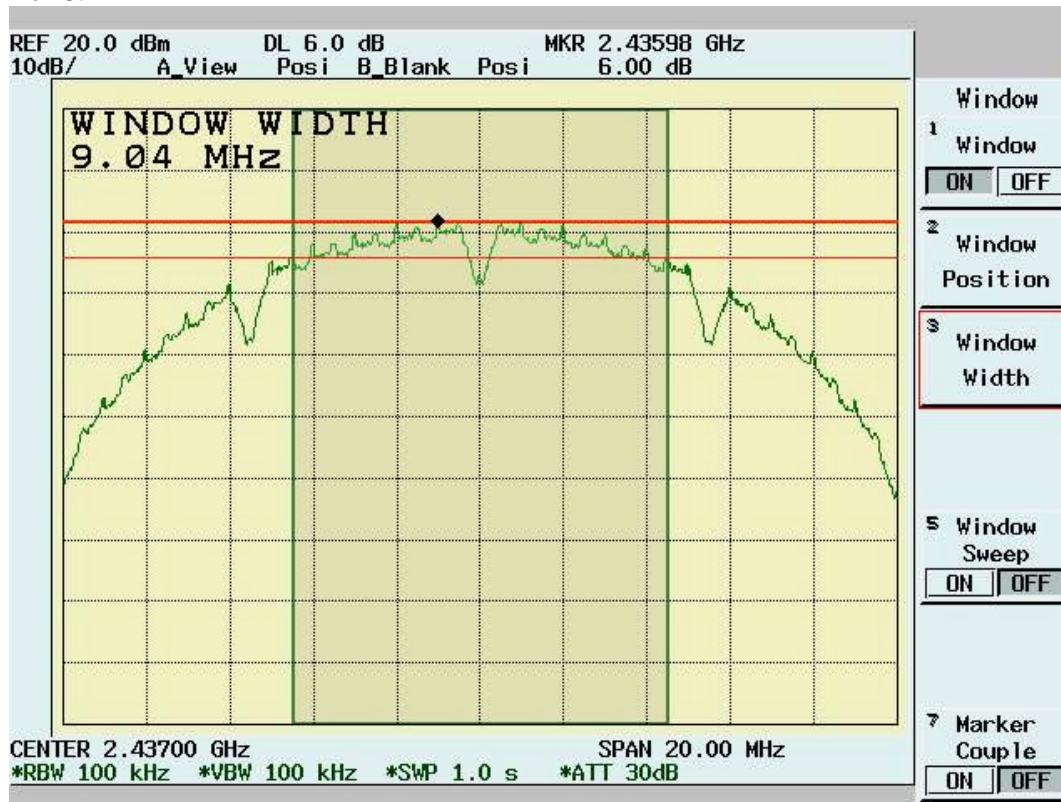

Channel 11:



### 3.3 DSSS Maximum Output Power [Section 15.247 (b)(1)]

#### 3.3.1 Test Procedure

- The Transmitter output of EUT was connected to the spectrum analyzer.
  - Equipment mode: Spectrum analyzer
  - Detector function: Channel Power
  - SPAN:20MHz
  - Channel BW:20MHz
  - RBW: 1MHz
  - VBW: 3MHz
  - Center frequency: fundamental frequency tested.
  - Sweep time= auto
  - Average times = 100.

#### 3.3.2 Test Setup



#### 3.3.3 Test Data

##### Maximum Peak Output Power

Temp. (deg. C): 25

Test Engr: Jerry Chiou


Humidity (%): 50

| Channel | Frequency (Mhz) | Analyzer Reading (dBm) | Cable Loss (dB) | Peak Power Output (mW) | Peak Power Output (dBm) | Limit (dBm) | Pass/Fail |
|---------|-----------------|------------------------|-----------------|------------------------|-------------------------|-------------|-----------|
| 1       | 2412            | 12.81                  | 1.1             | 24.60                  | 13.91                   | 30          | Pass      |
| 6       | 2437            | 13.6                   | 1.1             | 29.51                  | 14.7                    | 30          | Pass      |
| 11      | 2462            | 13.85                  | 1.1             | 31.26                  | 14.95                   | 30          | Pass      |


Note: Two RF output( MAIN & AUX) have been test,the worse data shown above.




Channel 1:

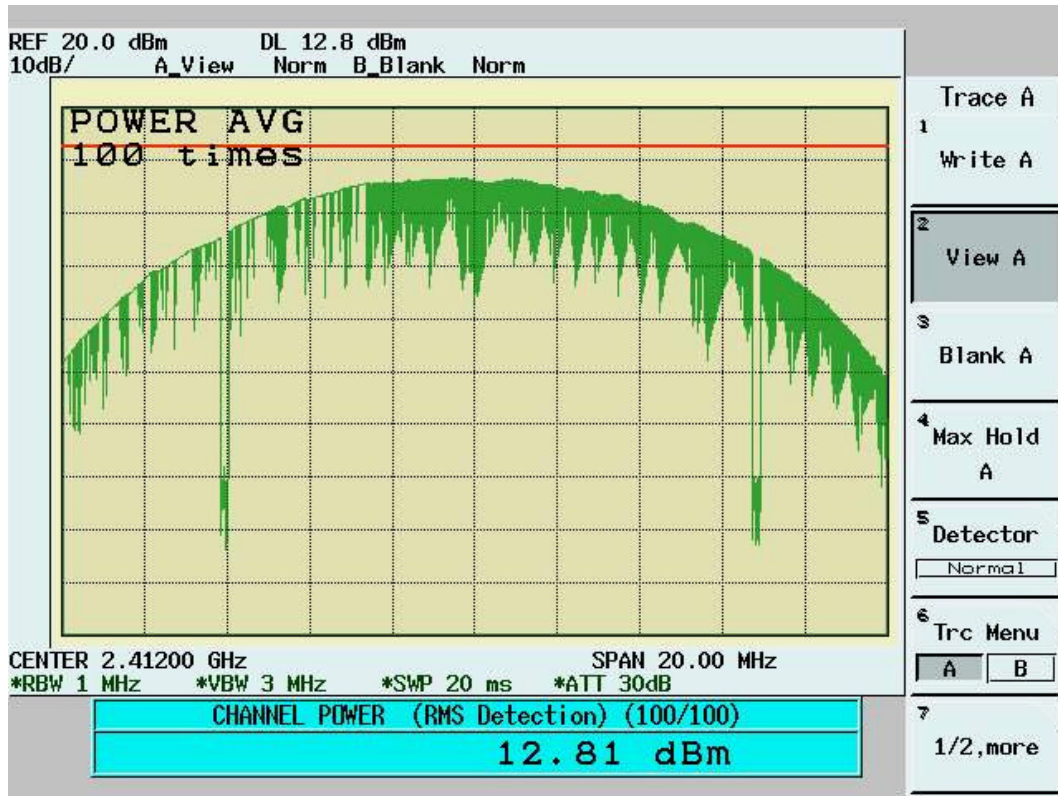

Channel 6:

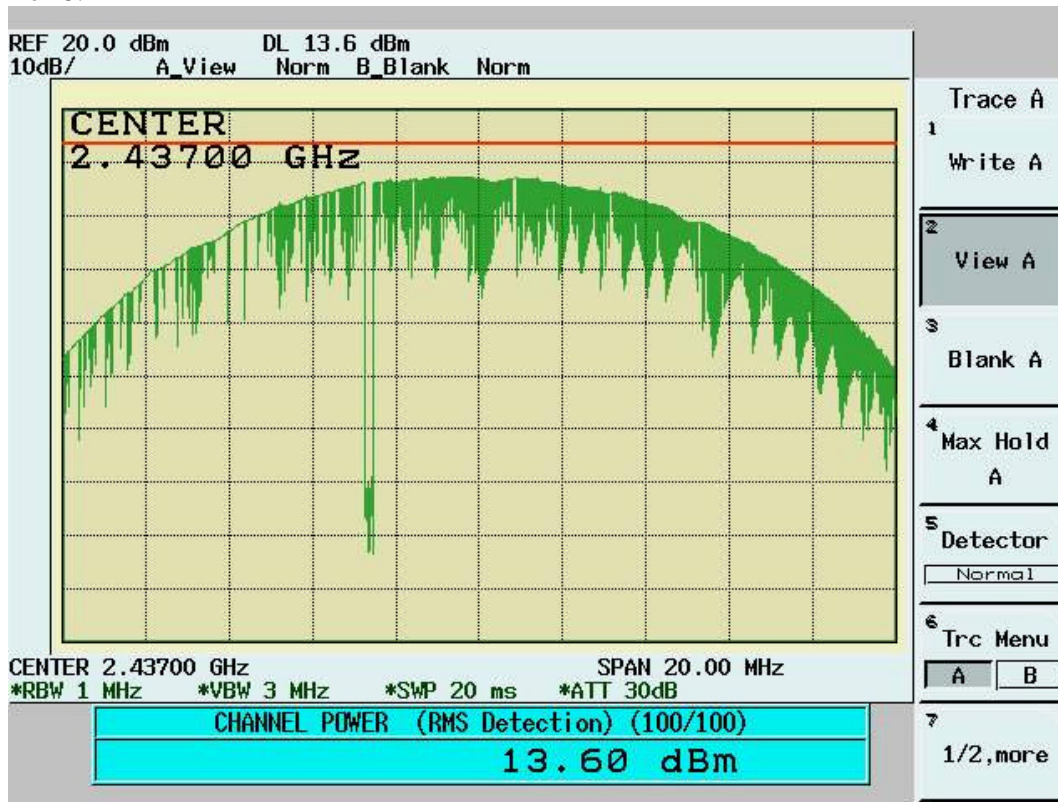

Channel 11:

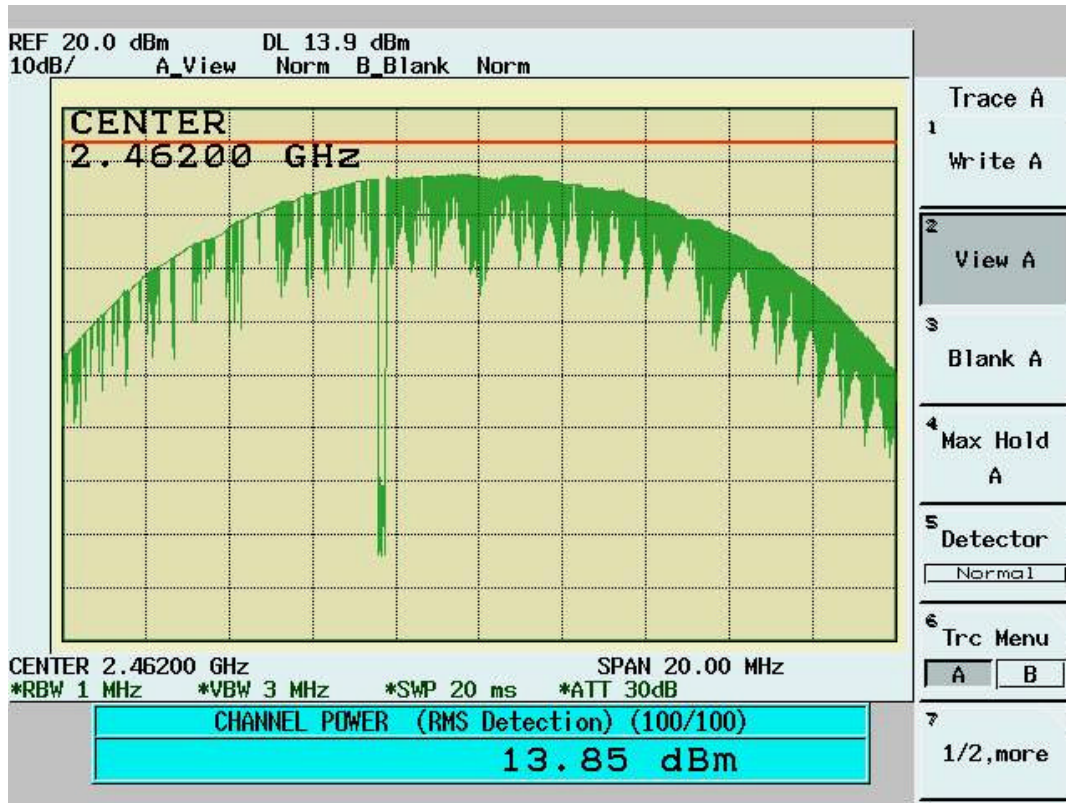

### 3.4 Radiated Emission Measurement [Section [15.247(c)(4)]

#### 3.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

#### 3.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2<sup>nd</sup> to 10<sup>th</sup> harmonics frequencies, the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

#### 3.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

|                             |                 |
|-----------------------------|-----------------|
| Frequency Range Tested:     | 30MHz~1000MHz   |
| Detector Function:          | Quasi-Peak Mode |
| Resolution Bandwidth (RBW): | 120KHz          |
| Video Bandwidth (VBW)       | 1MHz            |

|                             |               |
|-----------------------------|---------------|
| Frequency Range Tested:     | 1GHz – 25 GHz |
| Detector Function:          | Peak Mode     |
| Resolution Bandwidth (RBW): | 1MHz          |
| Video Bandwidth (VBW)       | 3MHz          |

|                             |               |
|-----------------------------|---------------|
| Frequency Range Tested:     | 1GHz – 25 GHz |
| Detector Function:          | Average Mode  |
| Resolution Bandwidth (RBW): | 1MHz          |
| Video Bandwidth (VBW)       | 10 Hz         |

**3.4.4 Test Data (30MHz – 1GHz):**

**30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11**

Operator: Jerry Chiou  
 Temperature(C): 25  
 Humidity(%): 63

| Frequency<br>MHz | RxAmp.<br>(dBuV) | AntFact<br>(dB/m) | CableLoss<br>(dB) | PreAmpGain<br>(dB) | Corrct.Emi.<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Ant.Pos<br>(cm) | TablePos<br>(deg) |
|------------------|------------------|-------------------|-------------------|--------------------|-------------------------|-------------------|----------------|-----------------|-------------------|
| 65.89            | 22.39            | 6.31              | 1.47              | 0.00               | 30.16                   | 40.00             | -9.84          | 96.00           | 218.00            |
| 87.23            | 22.49            | 8.35              | 1.67              | 0.00               | 32.51                   | 40.00             | -7.49          | 96.00           | 244.00            |
| 95.96            | 17.37            | 9.91              | 1.79              | 0.00               | 29.07                   | 43.50             | -14.43         | 96.00           | 34.00             |
| 105.66           | 15.52            | 11.62             | 1.93              | 0.00               | 29.07                   | 43.50             | -14.43         | 96.00           | 60.00             |
| 108.57           | 16.24            | 12.14             | 1.94              | 0.00               | 30.32                   | 43.50             | -13.18         | 96.00           | 34.00             |
| 111.48           | 19.59            | 12.43             | 1.90              | 0.00               | 33.92                   | 43.50             | -9.58          | 96.00           | 34.00             |
| 157.07           | 16.10            | 10.13             | 2.34              | 0.00               | 28.57                   | 43.50             | -14.93         | 96.00           | 218.00            |
| 163.86           | 16.33            | 9.87              | 2.39              | 0.00               | 28.58                   | 43.50             | -14.92         | 96.00           | 218.00            |
| 182.29           | 15.59            | 9.23              | 2.47              | 0.00               | 27.30                   | 43.50             | -16.20         | 96.00           | 271.00            |
| 197.81           | 15.91            | 9.16              | 2.60              | 0.00               | 27.67                   | 43.50             | -15.83         | 96.00           | 244.00            |
| 201.69           | 16.92            | 9.18              | 2.63              | 0.00               | 28.73                   | 43.50             | -14.77         | 96.00           | 244.00            |
| 919.49           | 4.29             | 20.66             | 5.32              | 0.00               | 30.26                   | 46.00             | -15.74         | 96.00           | 324.00            |

**30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11**

Operator: Jerry Chiou  
 Temperature(C): 25  
 Humidity(%): 63

| Frequency<br>MHz | RxAmp.<br>(dBuV) | AntFact<br>(dB/m) | CableLoss<br>(dB) | PreAmpGain<br>(dB) | CorrctEmi<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Ant.Pos<br>(cm) | TablePos<br>(deg) |
|------------------|------------------|-------------------|-------------------|--------------------|-----------------------|-------------------|----------------|-----------------|-------------------|
| 70.74            | 21.44            | 6.16              | 1.55              | 0.00               | 29.14                 | 40.00             | -10.86         | 96.00           | 244.00            |
| 89.17            | 21.96            | 8.73              | 1.66              | 0.00               | 32.36                 | 43.50             | -11.14         | 96.00           | 218.00            |
| 95.96            | 16.63            | 9.91              | 1.79              | 0.00               | 28.34                 | 43.50             | -15.16         | 96.00           | 34.00             |
| 102.75           | 13.90            | 11.10             | 1.93              | 0.00               | 26.92                 | 43.50             | -16.58         | 96.00           | 34.00             |
| 105.66           | 14.79            | 11.62             | 1.93              | 0.00               | 28.34                 | 43.50             | -15.16         | 96.00           | 60.00             |
| 111.48           | 19.16            | 12.43             | 1.90              | 0.00               | 33.50                 | 43.50             | -10.00         | 96.00           | 34.00             |
| 159.01           | 17.81            | 10.11             | 2.38              | 0.00               | 30.30                 | 43.50             | -13.20         | 96.00           | 218.00            |
| 163.86           | 15.97            | 9.87              | 2.39              | 0.00               | 28.22                 | 43.50             | -15.28         | 96.00           | 218.00            |
| 183.26           | 15.73            | 9.20              | 2.48              | 0.00               | 27.41                 | 43.50             | -16.09         | 96.00           | 191.00            |
| 202.66           | 16.46            | 9.17              | 2.63              | 0.00               | 28.26                 | 43.50             | -15.24         | 96.00           | 244.00            |
| 208.48           | 14.85            | 9.12              | 2.62              | 0.00               | 26.58                 | 43.50             | -16.92         | 96.00           | 244.00            |
| 584.84           | 5.77             | 18.79             | 4.42              | 0.00               | 28.98                 | 46.00             | -17.02         | 96.00           | 297.00            |

NOTE:

- During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.
- Margin = Corrected Amplitude – Limit  
 Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain  
 A margin of -8dB means that the emission is 8dB below the limit

**All frequencies from 30MHz to 1GHz have been tested**



### 3.4.5 Test Data ( 1GHz – 25 GHz) .

#### 1GHz~ 25 GHz (Horizontal), Channel 1: 2412 MHz

Operator:JerryChiou

RBW:1MHz  
Humidity(%) :57  
Temperature(C):22

| Frequency<br>MHz | Rx_R.<br>dBuV | Ant_F.<br>dB/m | Cab_L.<br>dB | PreAmpl<br>dB | Emission<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | A.Tower<br>cm | T.Table<br>deg |
|------------------|---------------|----------------|--------------|---------------|--------------------|-----------------|--------------|---------------|----------------|
| 1986.51          | 35.79pk       | 30.89          | 2.59         | 23.75         | 45.52pk            | 54.00av         | -8.48        | 100           | 44             |
| 4818.18          | 35.01pk       | 34.11          | 5.14         | 27.49         | 46.76pk            | 54.00av         | -7.24        | 100           | 18             |
| 7222.78          | 36.09pk       | 38.09          | 3.85         | 26.60         | 51.43pk            | 54.00av         | -2.57        | 101           | 142            |
| 9641.86          | 30.61pk       | 38.84          | 3.94         | 24.84         | 48.55pk            | 54.00av         | -5.45        | 102           | 7              |

#### 1GHz~ 25 GHz (Vertical), Channel 1: 2412 MHz

Operator:JerryChiou

RBW:1MHz  
Humidity(%) :57  
Temperature(C):22

| Frequency<br>MHz | Rx_R.<br>dBuV | Ant_F.<br>dB/m | Cab_L.<br>dB | PreAmpl<br>dB | Emission<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | A.Tower<br>cm | T.Table<br>deg |
|------------------|---------------|----------------|--------------|---------------|--------------------|-----------------|--------------|---------------|----------------|
| 1861.64          | 37.81pk       | 29.84          | 2.50         | 23.75         | 46.40pk            | 54.00av         | -7.60        | 100           | 53             |
| 4818.18          | 35.76pk       | 34.11          | 5.14         | 27.49         | 47.51pk            | 54.00av         | -6.49        | 100           | 18             |
| 7222.78          | 38.45pk       | 38.09          | 3.85         | 26.60         | 53.79pk            | 54.00av         | -0.21        | 101           | 142            |
| 9641.86          | 33.26pk       | 38.84          | 3.94         | 24.84         | 51.20pk            | 54.00av         | -2.80        | 102           | 7              |

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ \* ”: Fundamental Frequency
- “\*\*”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk”: peak mode
- “ av”: average mode
- “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

**All frequencies from 1GHz to 25 GHz have been tested.**

**1GHz~ 25 GHz (Horizontal) , Channel 6 : 2437 MHz**

Operator:JerryChiou

RBW:1MHz  
Humidity(%) :57  
Temperature(C):22

| Frequency<br>MHz | Rx_R.<br>dBuV | Ant_F.<br>dB/m | Cab_L.<br>dB | PreAmpl<br>dB | Emission<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | A.Tower<br>cm | T.Table<br>deg |
|------------------|---------------|----------------|--------------|---------------|--------------------|-----------------|--------------|---------------|----------------|
| 4861.64          | 42.02pk       | 34.27          | 5.13         | 27.43         | 54.00pk            | 74.00pk         | -20          | 100           | 14             |
| 4873.91          | 39.58av       | 34.27          | 5.13         | 27.43         | 51.56av            | 54.00av         | -2.44        | 100           | 14             |
| 7295.2           | 35.80pk       | 38.38          | 3.88         | 26.57         | 51.49pk            | 54.00av         | -2.51        | 101           | 152            |
| 9728.77          | 32.55pk       | 38.69          | 4.00         | 24.78         | 50.46pk            | 54.00av         | -3.54        | 102           | 5              |

**1GHz~ 25 GHz (Vertical) , Channel 6 : 2437 MHz**

Operator:JerryChiou

RBW:1MHz  
Humidity(%) :57  
Temperature(C):22

| Frequency<br>MHz | Rx_R.<br>dBuV | Ant_F.<br>dB/m | Cab_L.<br>dB | PreAmpl<br>dB | Emission<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | A.Tower<br>cm | T.Table<br>deg |
|------------------|---------------|----------------|--------------|---------------|--------------------|-----------------|--------------|---------------|----------------|
| 4861.64          | 43.80pk       | 34.27          | 5.13         | 27.43         | 55.77pk            | 74.00pk         | -18.23       | 100           | 14             |
| 4874.16          | 40.56av       | 34.27          | 5.13         | 27.43         | 52.53av            | 54.00av         | -1.47        | 100           | 14             |
| 7295.2           | 38.87pk       | 38.38          | 3.88         | 26.57         | 54.56pk            | 74.00pk         | -19.44       | 101           | 152            |
| 7308.2           | 33.82av       | 38.38          | 3.88         | 26.57         | 49.51av            | 54.00av         | -4.49        | 101           | 152            |
| 9728.77          | 39.96pk       | 38.69          | 4.00         | 24.78         | 57.86pk            | 74.00pk         | -16.14       | 102           | 5              |
| 9747.95          | 33.54av       | 38.69          | 4.00         | 24.78         | 51.44av            | 54.00av         | -2.56        | 102           | 5              |

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ \* ”: Fundamental Frequency
- “\*\*”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk”: peak mode
- “ av”: average mode
- “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

**All frequencies from 1GHz to 25 GHz have been tested.**

**1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz**

Operator:JerryChiou

RBW:1MHz  
Humidity(%) :57  
Temperature(C):22

| Frequency<br>MHz | Rx_R.<br>dBuV | Ant_F.<br>dB/m | Cab_L.<br>dB | PreAmpl<br>dB | Emission<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | A.Tower<br>cm | T.Table<br>deg |
|------------------|---------------|----------------|--------------|---------------|--------------------|-----------------|--------------|---------------|----------------|
| 4919.58          | 35.10pk       | 34.49          | 5.13         | 27.35         | 47.37pk            | 54.00av         | -6.63        | 100           | 8              |
| 7367.63          | 32.79pk       | 38.67          | 3.92         | 26.54         | 48.84pk            | 54.00av         | -5.16        | 101           | 163            |

**1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz**

Operator:JerryChiou

RBW:1MHz  
Humidity(%) :57  
Temperature(C):22

| Frequency<br>MHz | Rx_R.<br>dBuV | Ant_F.<br>dB/m | Cab_L.<br>dB | PreAmpl<br>dB | Emission<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | A.Tower<br>cm | T.Table<br>deg |
|------------------|---------------|----------------|--------------|---------------|--------------------|-----------------|--------------|---------------|----------------|
| 4919.58          | 39.78pk       | 34.49          | 5.13         | 27.35         | 52.05pk            | 54.00av         | -1.95        | 100           | 8              |
| 7382.12          | 35.71pk       | 38.73          | 3.93         | 26.53         | 51.83pk            | 54.00av         | -2.17        | 101           | 165            |
| 9830.17          | 31.63pk       | 38.51          | 4.07         | 24.72         | 49.49pk            | 54.00av         | -4.51        | 101           | 3              |

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ \* ”: Fundamental Frequency
- “\*\*”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk”: peak mode
- “ av”: average mode
- “---”: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

**All frequencies from 1GHz to 25 GHz have been tested.**

### 3.5 Band Edge Measurement

#### 3.5.1 Test Procedure (Conducted)

1. The transmitter output of EUT was connected to the spectrum analyzer.  
Equipment mode: Spectrum analyzer  
Detector function: Peak mode  
SPAN: 100MHz  
RBW: 100KHz  
VBW: 100KHz  
Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed
3. Find the next peak frequency outside the operation frequency band

#### 3.5.2 Test Setup (Conducted)



#### 3.5.3 Test Data:

**Table: Band Edge measurement (Conducted)**


| Test Engr:   |                    | Jerry Chiou                   | Temp. (deg. C):                               | 25        |
|--------------|--------------------|-------------------------------|---|-----------|
|              |                    |                               | Humidity (%):                                 | 50        |
| Channel      | Frequency<br>(MHz) | Spectrum<br>Reading<br>(dBuV) | Carrier - Outsideband<br>Limit: >20dB<br>(dB) | Pass/Fail |
| 1            | 2410.9             | 107.86                        | ---   | ---       |
| Outside band | 2400               | 65.33                         | 42.53   | Pass      |
| 11           | 2460.9             | 108.02                        | ---   | ---       |
| Outside band | 2485.2             | 50.77                         | 57.25   | Pass      |

Note: Two RF output( MAIN & AUX) have been test,the worse data shown above.

### Band Edge Conducted measurement



### Band Edge Conducted Measurement

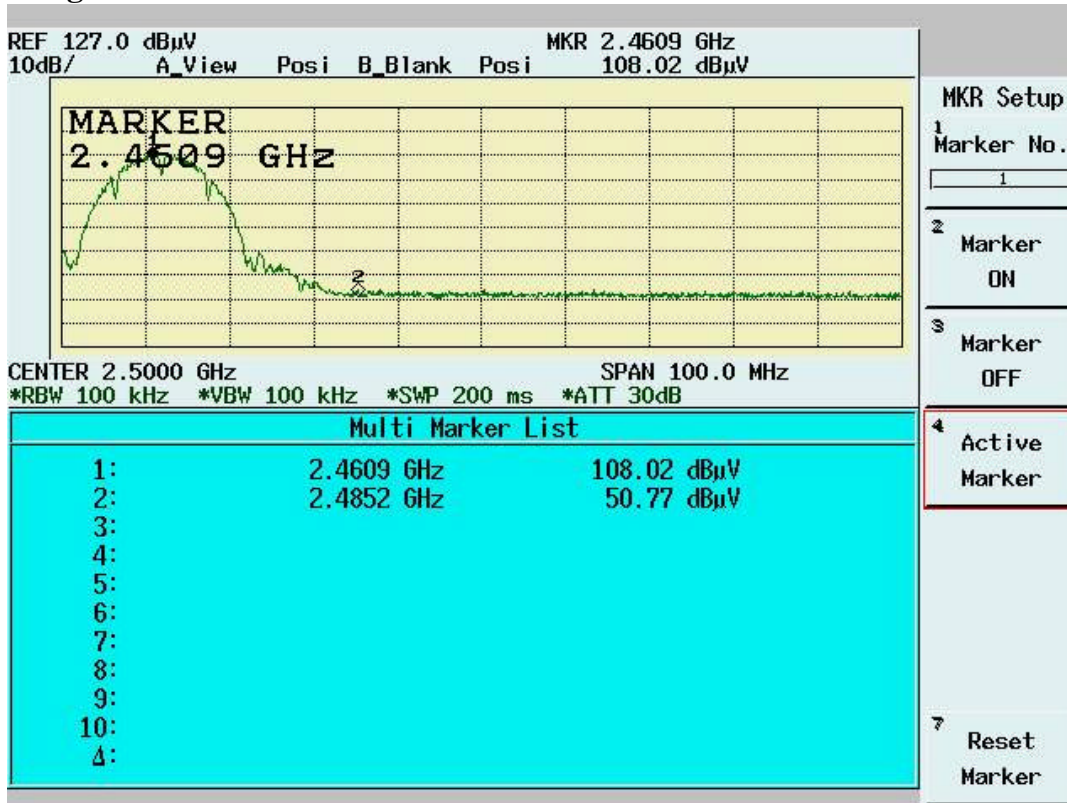

### 3.5.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.  
Equipment mode: Spectrum analyzer  
Detector function: Peak mode  
SPAN: 100MHz  
RBW: 1MHz  
VBW: 3MHz  
Center frequency: 2.395GHz, 2.48GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band
4. For peak frequency emission level measurement in Restricted Band  
Change RBW: 1MHz  
VBW: 10Hz  
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

### 3.5.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

3.5.6 Test Data

Table Band Edge measurement (Radiated)

Temp. (deg. C): 25  
Humidity (%): 50

Test Engr: Jerry Chiou


| Description                            | Frequency (MHz) | Spectrum Reading (dBuV) | Correction Factor (dB/m) | Emission Level (dBuV/m) | dBc (Limit: > 30dBc) | Limit (dBuV/m) | Equip. Setup VBW | Pass or Fail |
|--|-----------------|-------------------------|--------------------------|-------------------------|----------------------|----------------|------------------|--------------|
| Channel_1 (average mode)               | 2412.8          | 65.41                   | 35.48                    | 100.89                  | ---                  | ---            | 10Hz             | ---          |
| Channel_1 (peak mode)                  | 2412.8          | 68.66                   | 35.48                    | 104.14                  | ---                  | ---            | 3MHz             | ---          |
| Outside band (average mode)            | 2399.3          | 22.15                   | 35.48                    | 57.63                   | 43.26                | ---            | 10Hz             | Pass         |
| Channel_11 (average mode)              | 2462.7          | 64.06                   | 35.5                     | 99.56                   | ---                  | ---            | 10Hz             | ---          |
| Channel_11 (peak mode)                 | 2462.9          | 69.09                   | 35.5                     | 104.59                  | ---                  | ---            | 3MHz             | ---          |
| Outside band (average mode)            | 2490.6          | 6.55                    | 35.51                    | 42.06                   | 57.5                 | ---            | 10Hz             | Pass         |
| Channel_1 Restricted band (peak mode)  | 2385.4          | 17.25                   | 35.47                    | 52.72                   | ---                  | 74             | 3MHz             | Pass         |
| Restricted band (average mode)         | 2386.8          | 6.97                    | 35.47                    | 42.44                   | ---                  | 54             | 10Hz             | Pass         |
| Channel_11 Restricted band (peak mode) | 2488.1          | 16.61                   | 35.51                    | 52.12                   | ---                  | 74             | 3MHz             | Pass         |
| Restricted band (average mode)         | 2490.6          | 6.55                    | 35.51                    | 42.06                   | ---                  | 54             | 10Hz             | Pass         |

Note:


- The Spectrum plot of emission level measurement in Restricted band is attached.
- Emission Level=Spectrum Reading+Correction Factor
- Correction Factor=Antenna Factor+cable loss–amplifier gain
- Both Horizontal and Vertical polarization have been tested and the worst data is listed above.



**Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 1)**

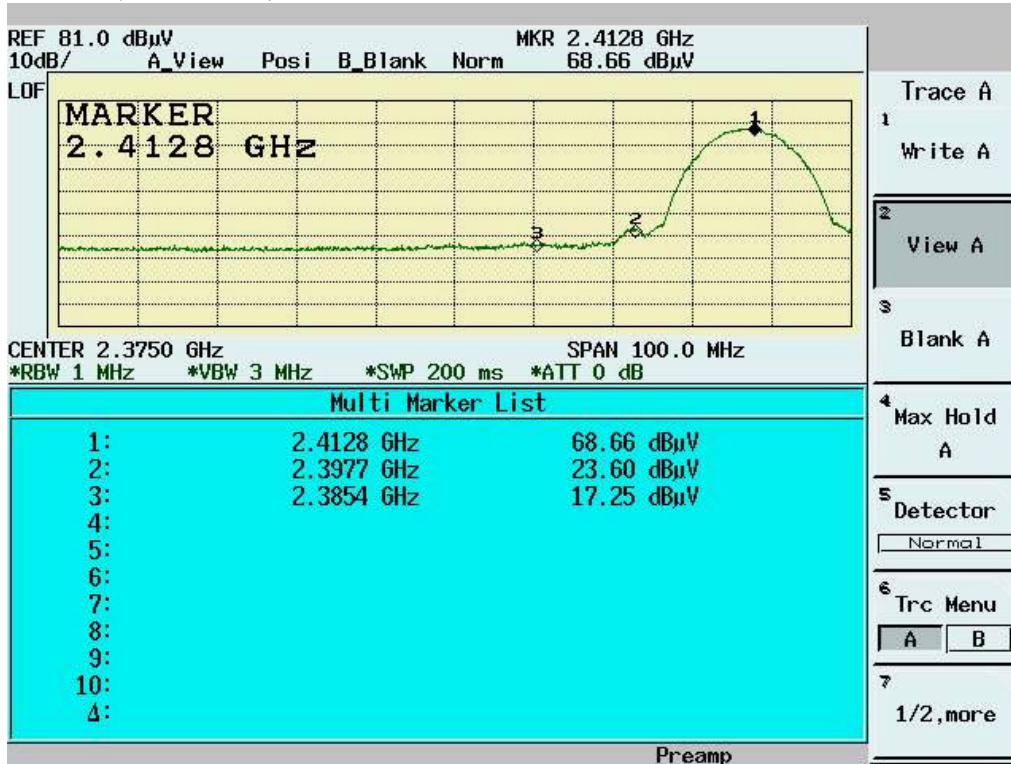


**Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 1)**

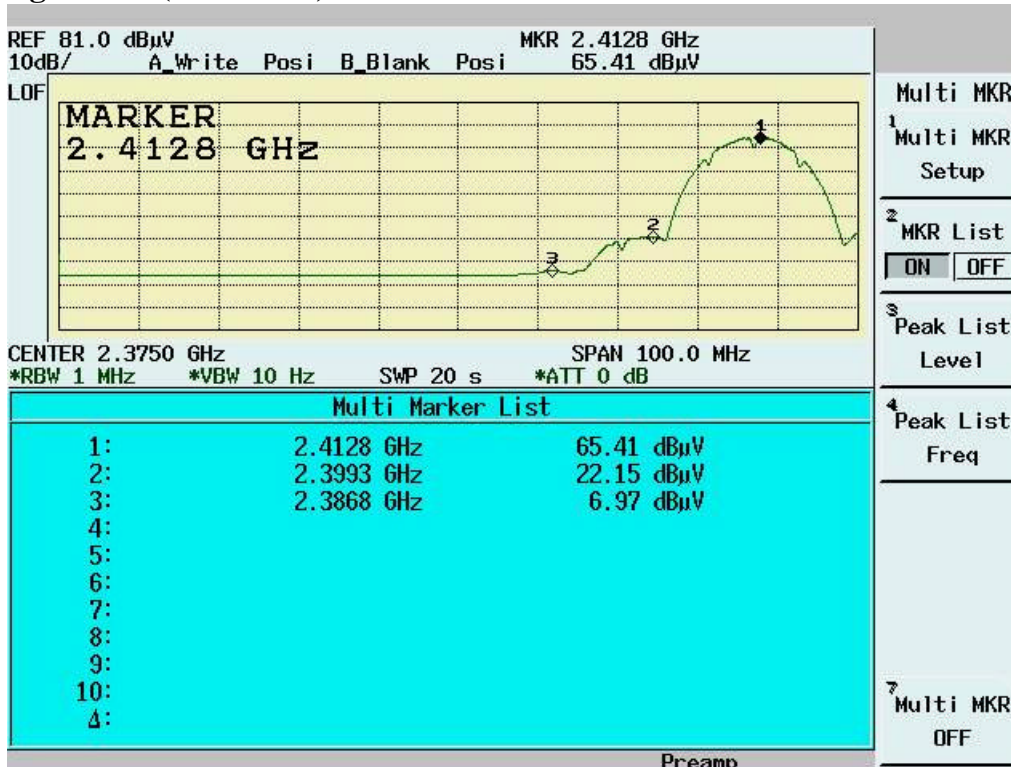




**Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 11)**

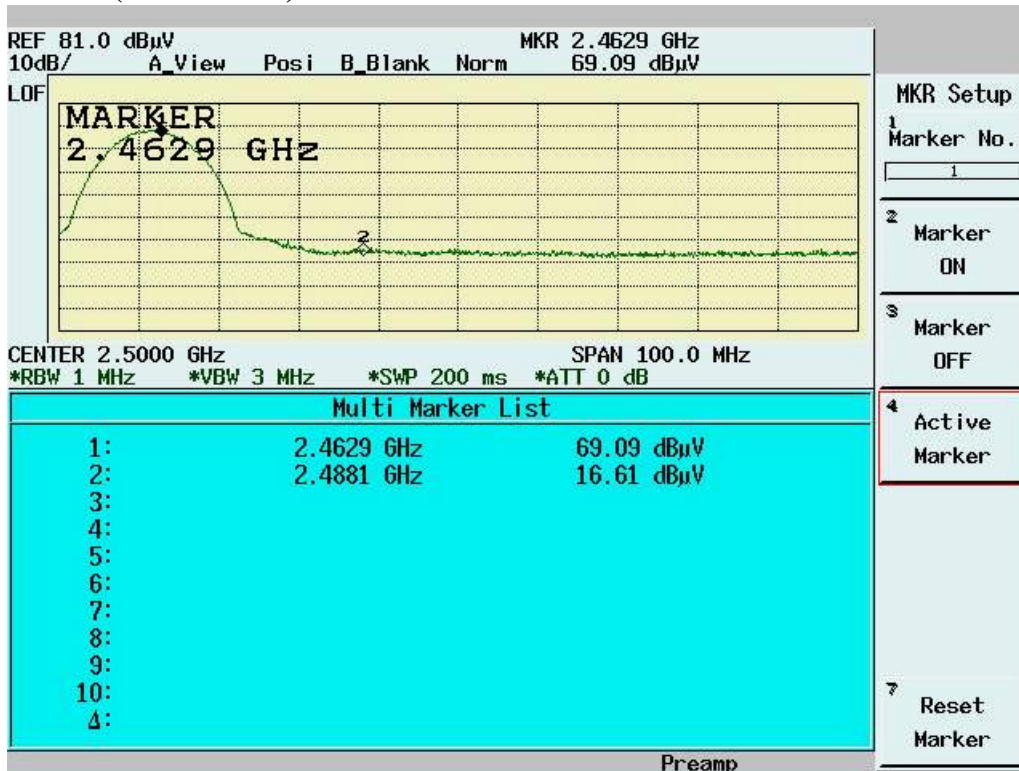

**Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 11)**

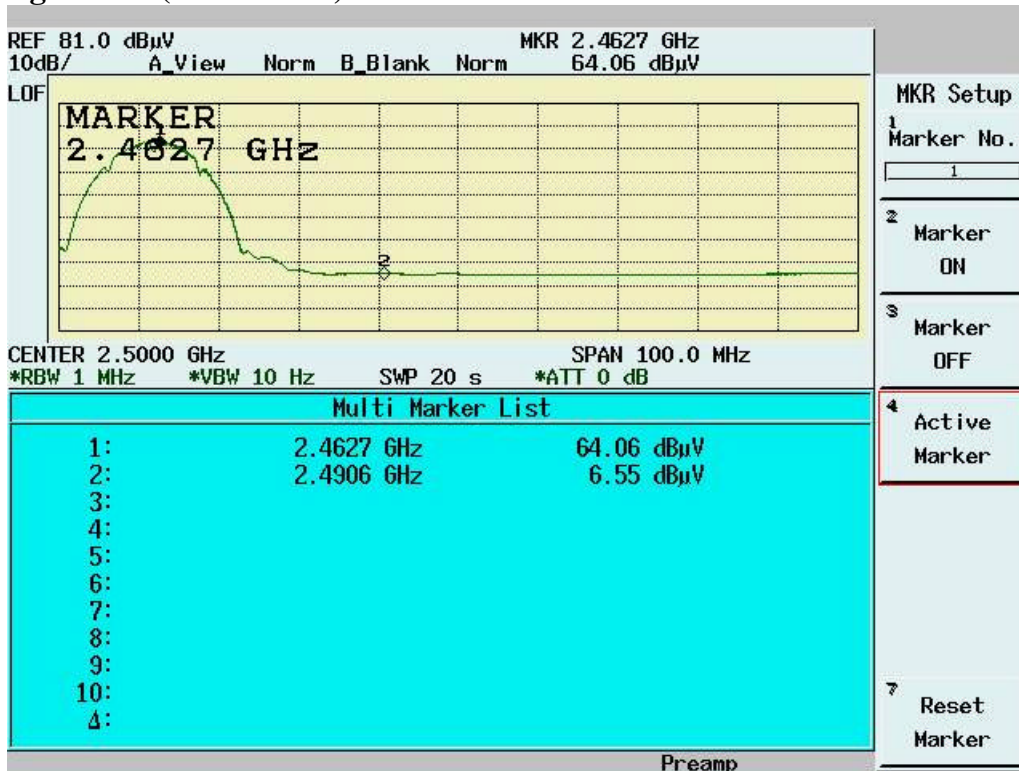

### 3.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]


See SAR report

### 3.7 DSSS Peak Power Spectral Density [Section 15.247(d) ]

#### 3.7.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.  
Equipment mode: Spectrum analyzer  
Detector function: Peak mode  
SPAN:1.5MHz  
RBW: 3KHz  
VBW: 30KHz  
Center frequency: fundamental frequency tested.  
Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.

#### 3.7.2 Test Setup

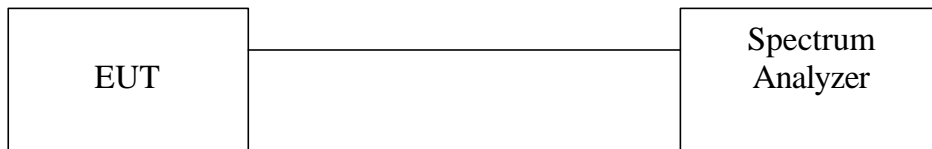

#### 3.7.3 Test Data

##### Maximum Peak Output Power Density

Temp. (deg. C): 25


Test Engr: Jerry Chiou

Humidity (%): 50


| Chennel | Frequency (MHz) | Spectrum Reading (dBm/3KHz) | Cable Loss (dB) | Peak Power Output (dBm/3KHz) | Limit (dBm/3KHz) | Pass/Fail |
|---------|-----------------|-----------------------------|-----------------|------------------------------|------------------|-----------|
| 1       | 2412            | -13.45                      | 1.1             | -12.35                       | 8                | Pass      |
| 6       | 2437            | -13.07                      | 1.1             | -11.97                       | 8                | Pass      |
| 11      | 2462            | -13.06                      | 1.1             | -11.96                       | 8                | Pass      |

Note: Two RF output( MAIN & AUX) have been test,the worse data shown above.


Channel 1

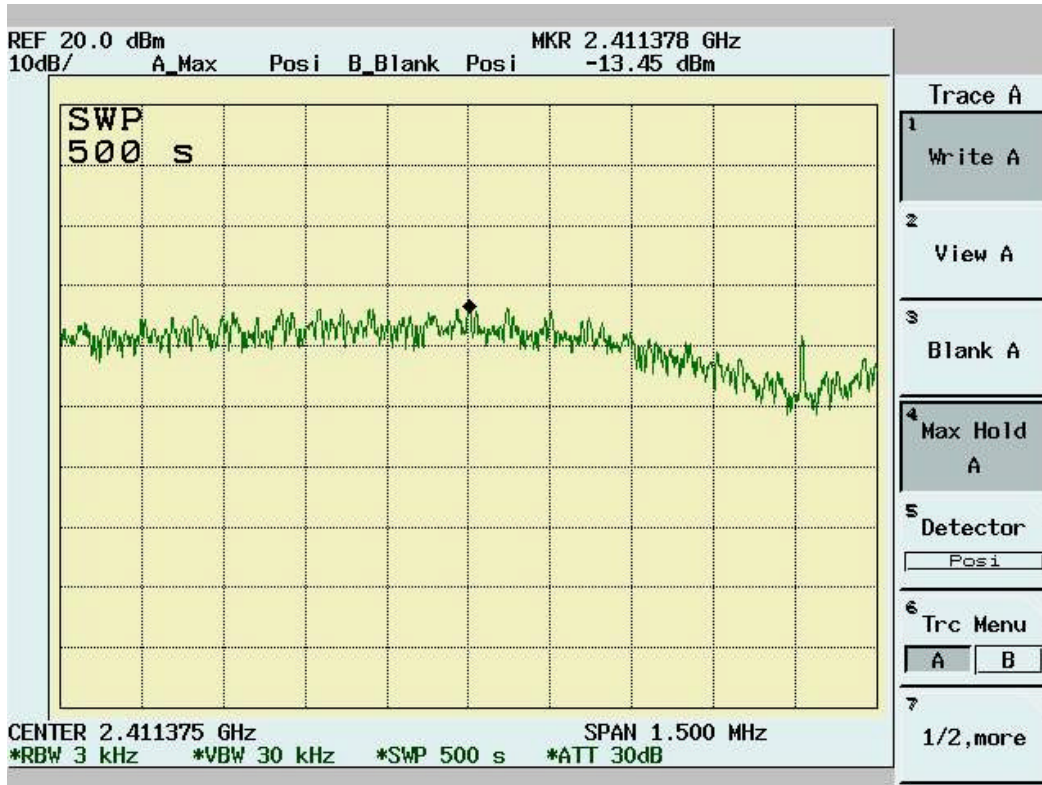

Channel 6

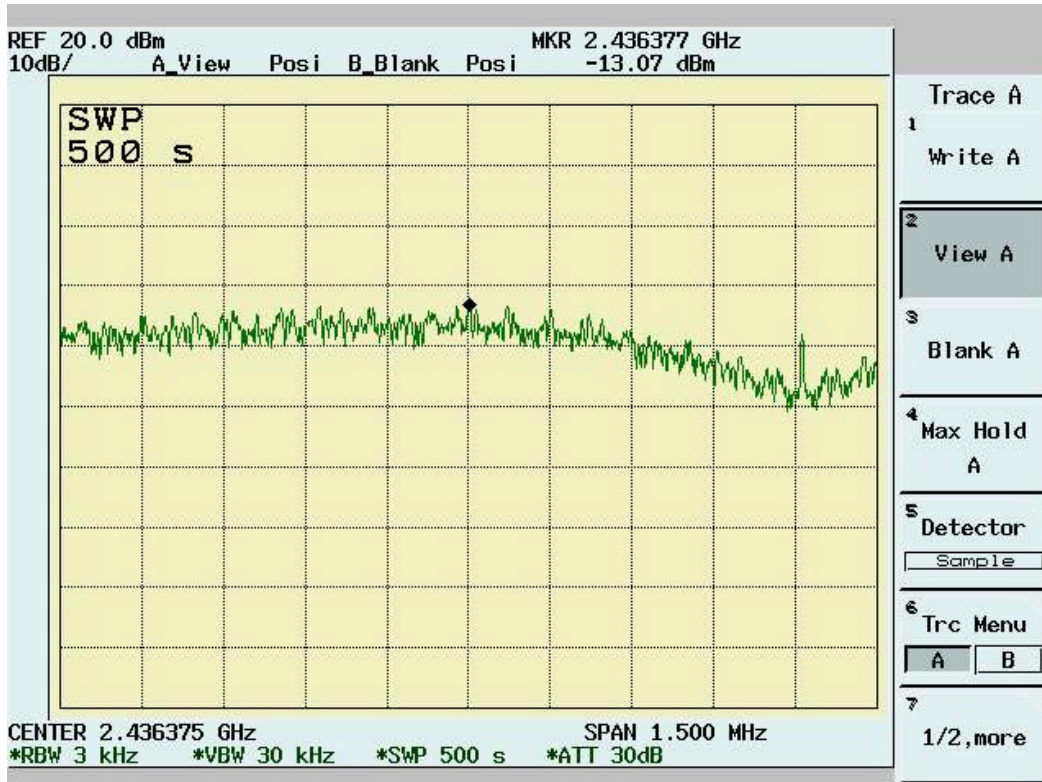

Channel 11

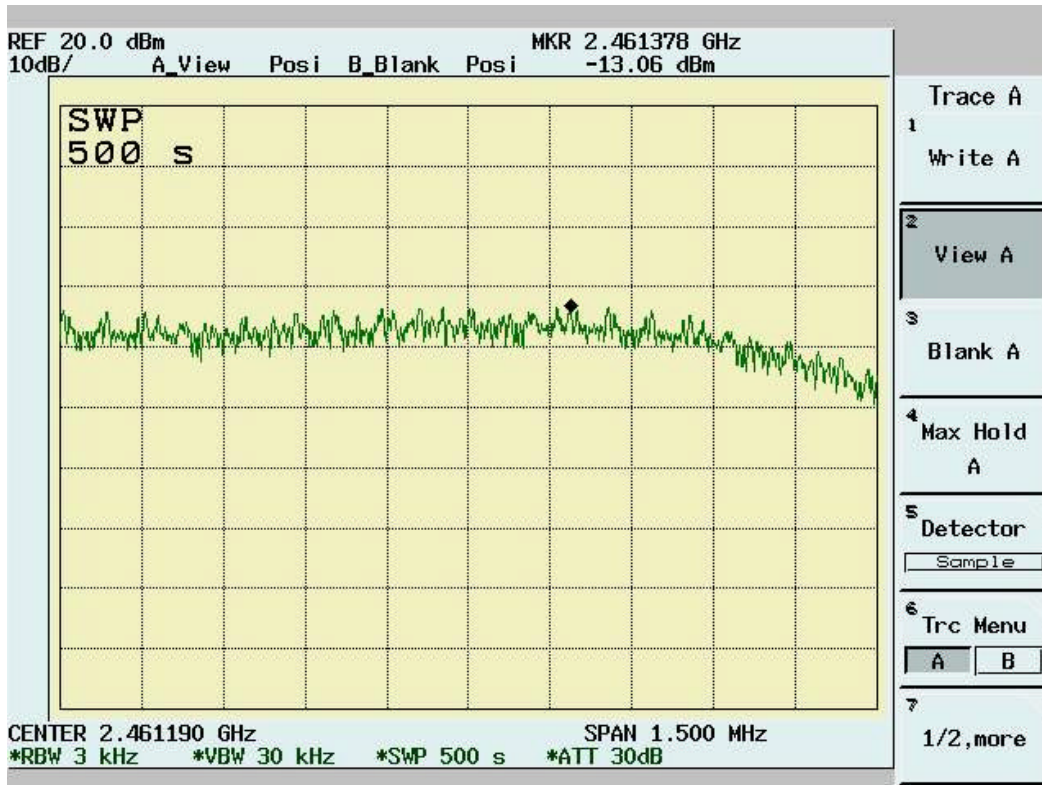



## 4. TEST RESULTS (802.11g)

### 4.1 Powerline Conducted Emissions [Section 15.207]

#### 4.1.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit used.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

#### 4.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.


At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

#### 4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

|                   |                    |
|-------------------|--------------------|
| Frequency Range   | 150 KHz--30MHz     |
| Detector Function | Quasi-Peak/Average |
| Bandwidth (RBW)   | 9KHz               |

4.1.4 Test Data: Power Line Conducted Emissions (Hot) Channel 1, 6, 11

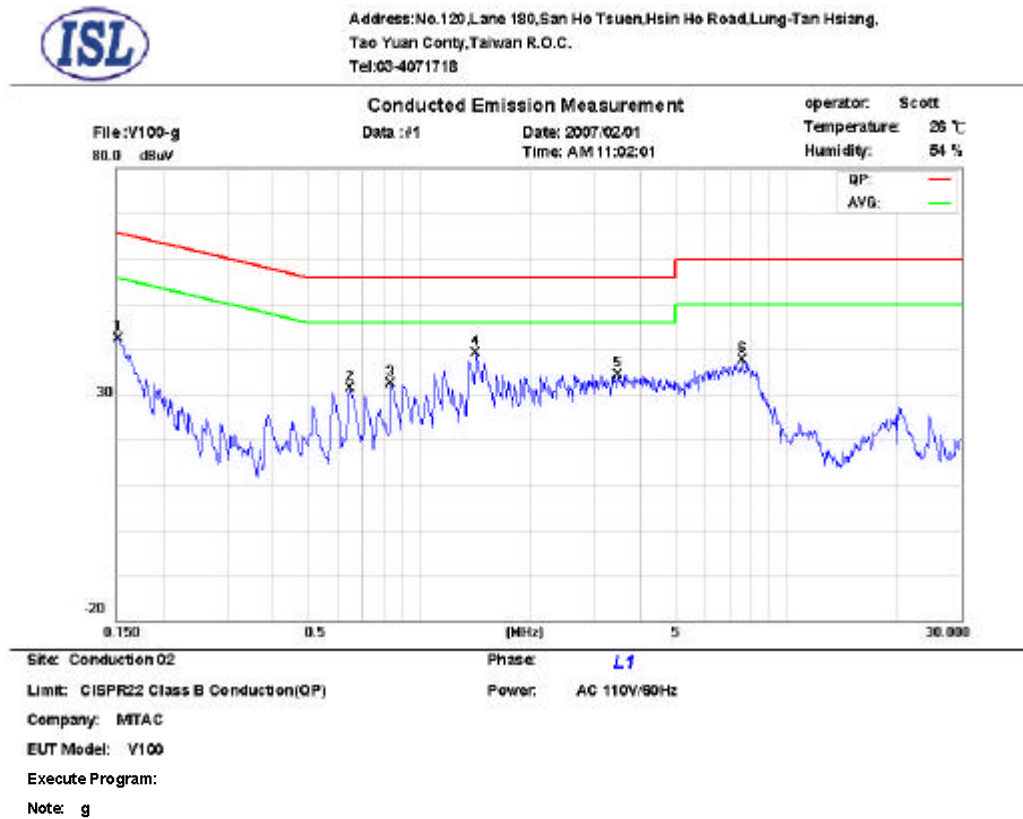


| Frequency MHz | LISN Loss dB | Cable Loss dB | QP Correct dBuV | QP Limit dBuV | QP Margin dB | AVG Correct. dBuV | AVG Limit dBuV | AVG Margin dB | Note |
|---------------|--------------|---------------|-----------------|---------------|--------------|-------------------|----------------|---------------|------|
| 0.1516        | 0.1          | 0.02          | 42.90           | 65.9          | -23.0        | 39.70             | 55.9           | -16.2         |      |
| 0.6508        | 0.2          | 0.07          | 32.60           | 56.0          | -23.4        | 29.10             | 46.0           | -16.9         |      |
| 0.8393        | 0.2          | 0.07          | 32.50           | 56.0          | -23.5        | 31.90             | 46.0           | -14.1         |      |
| * 1.4257      | 0.2          | 0.08          | 39.60           | 56.0          | -16.4        | 36.40             | 46.0           | -9.60         |      |
| 3.4906        | 0.35         | 0.13          | 34.30           | 56.0          | -21.7        | 33.60             | 46.0           | -12.4         |      |
| 7.5658        | 0.46         | 0.18          | 37.80           | 60.0          | -22.2        | 37.90             | 50.0           | -12.1         |      |

\*:Maximum data x:Over limit

**Power Line Conducted Emissions (Neutral) Channel 1, 6, 11**



Address: No.120, Lane 180, San Ho Tsuen, Hsin Ho Road, Lung-Tan Hsiang,  
Tao Yuan Conty, Taiwan R.O.C.  
Tel: 09-4971718

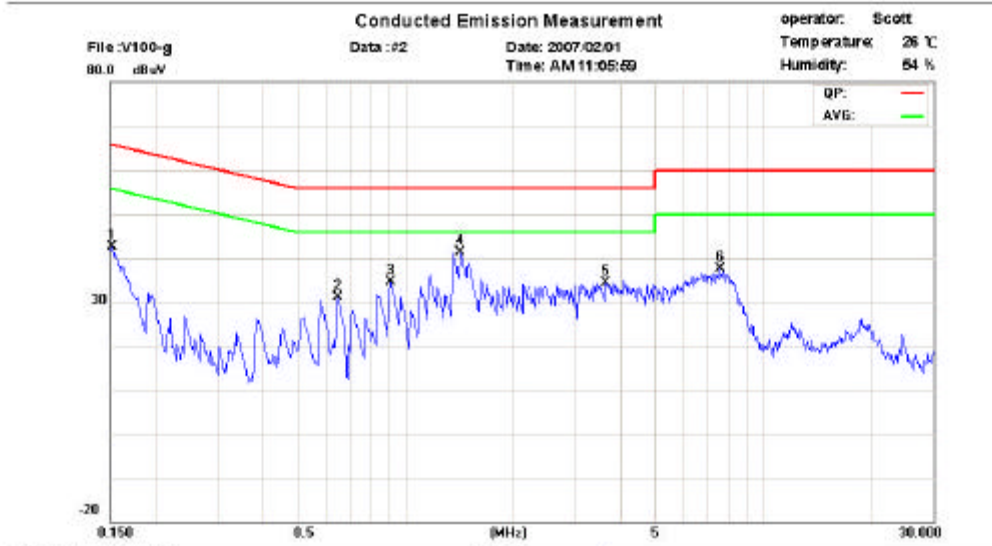

Site: Conduction 02  
Phase: N  
Limit: CISPR22 Class B Conduction(OP)  
Power: AC 110V/60Hz  
Company: INTAC  
EUT Model: V100  
Execute Program:  
Note: g

| Frequency MHz | LISN Loss dB | Cable Loss dB | QP Correct dBuV | QP Limit dBuV | QP Margin dB | AVG Correct dBuV | AVG Limit dBuV | AVG Margin dB | Note |
|---------------|--------------|---------------|-----------------|---------------|--------------|------------------|----------------|---------------|------|
| 0.1516        | 0.1          | 0.02          | 42.30           | 65.9          | -23.6        | 39.20            | 55.9           | -16.7         |      |
| 0.6474        | 0.2          | 0.07          | 31.70           | 56.0          | -24.3        | 30.90            | 46.0           | -15.1         |      |
| 0.9087        | 0.2          | 0.07          | 35.20           | 56.0          | -20.8        | 32.00            | 46.0           | -14.0         |      |
| * 1.4242      | 0.2          | 0.08          | 40.40           | 56.0          | -15.6        | 40.30            | 46.0           | -5.70         |      |
| 3.6418        | 0.2          | 0.13          | 24.80           | 56.0          | -31.2        | 19.60            | 46.0           | -26.4         |      |
| 7.5658        | 0.32         | 0.18          | 37.40           | 60.0          | -22.6        | 36.00            | 50.0           | -14.0         |      |

\*:Maximum data x:Over limit

\* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels.  
Margin = Amplitude + Insertion Loss- Limit  
A margin of -8dB means that the emission is 8dB below the limit