

Test Laboratory: Compliance Certification Services Inc.

EVDO A Cellular - NB mode Bottom Flated Body V1002X

DUT: V1002X; Type: V1002X; Serial: N/A


Communication System: EVDO Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 824.7$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Body NB Bottom Flated CH1013/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.026 mW/g

EVDO Body NB Bottom Flated CH1013/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.07 V/m; Power Drift = -0.111 dB
Peak SAR (extrapolated) = 0.019 W/kg
SAR(1 g) = **0.015 mW/g**; SAR(10 g) = **0.014 mW/g**
Maximum value of SAR (measured) = 0.019 mW/g

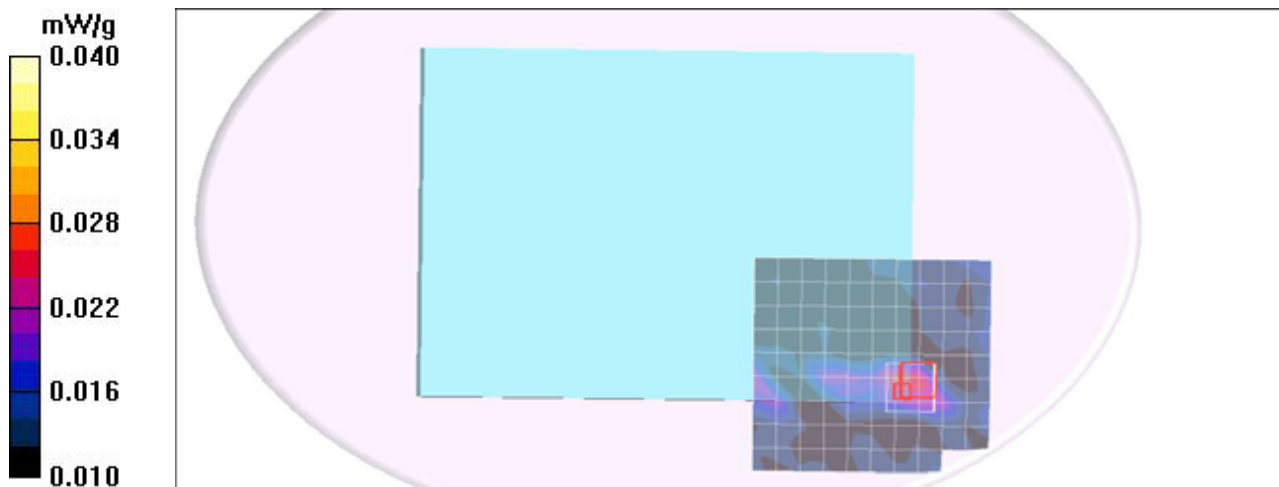

Test Laboratory: Compliance Certification Services Inc.

EVDO A Cellular - Tablet mode Tip edge V1002X

DUT: V1002X; Type: V1002X; Serial: N/A


Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 824.7$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Body Tablet Tip edge CH1013/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.284 mW/g

EVDO Body Tablet Tip edge CH1013/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.84 V/m; Power Drift = -0.060 dB
Peak SAR (extrapolated) = 0.358 W/kg
SAR(1 g) = **0.208 mW/g**; SAR(10 g) = **0.169 mW/g**
Maximum value of SAR (measured) = 0.286 mW/g

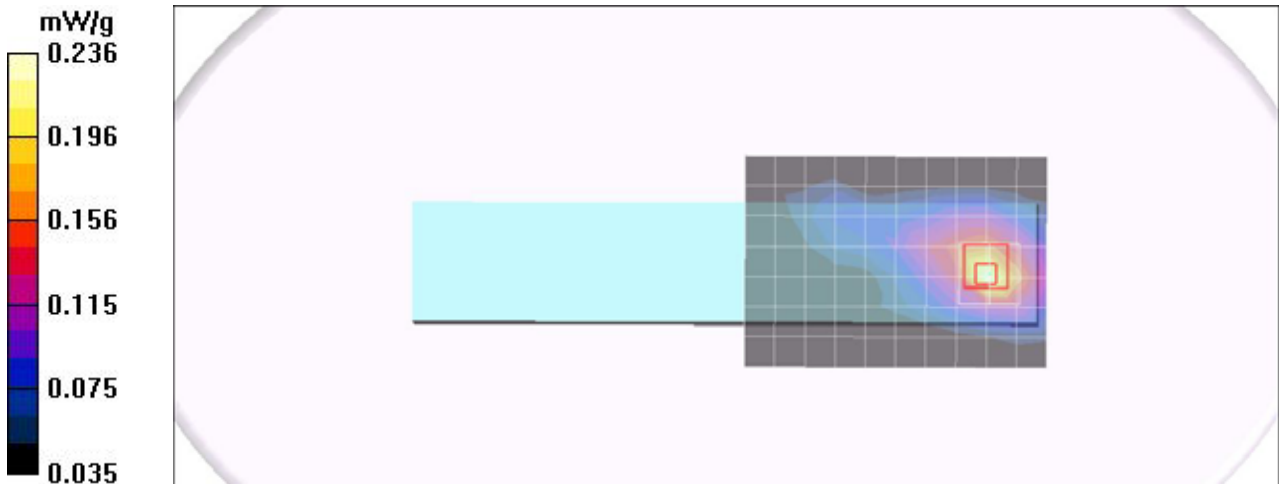

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 - Tablet mode Tip edge Body V1002X

DUT: V100X; Type: V100X; Serial: N/A


Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet Tip edge CH661/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.402 mW/g

GPRS Body Tablet Tip edge CH661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.31 V/m; Power Drift = -0.104 dB
Peak SAR (extrapolated) = 0.639 W/kg
SAR(1 g) = **0.354 mW/g**; SAR(10 g) = **0.190 mW/g**
Maximum value of SAR (measured) = 0.466 mW/g

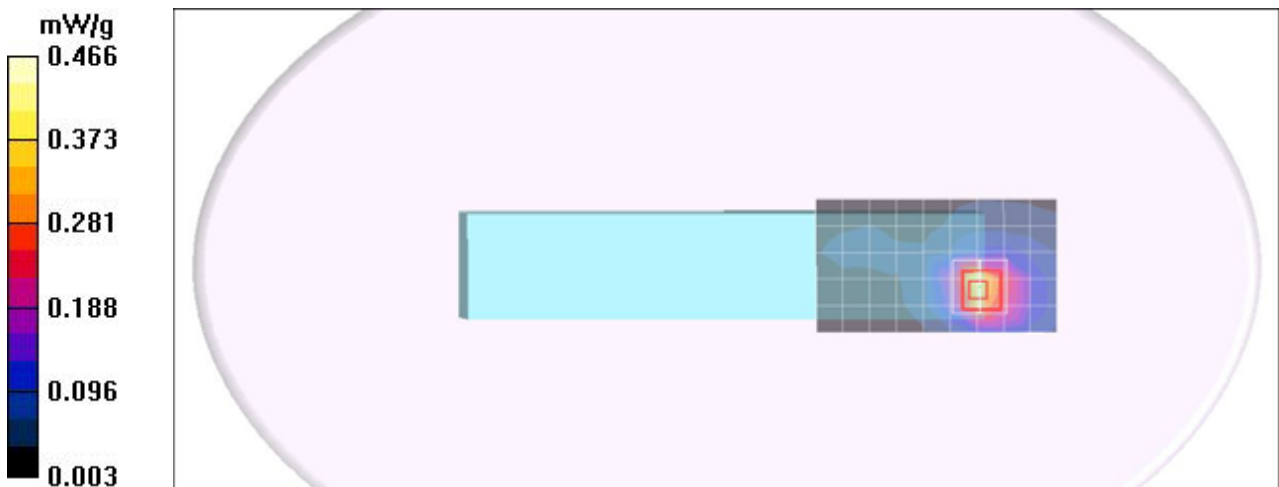

Test Laboratory: Compliance Certification Services Inc.

EGPRS 1900 - Tablet mode Tip edge Body V1002X

DUT: V1002X; Type: V1002X; Serial: N/A


Communication System: EGPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tablet Tip edge CH661/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.203 mW/g

EGPRS Body Tablet Tip edge CH661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 1.63 V/m; Power Drift = -0.087 dB
Peak SAR (extrapolated) = 0.287 W/kg
SAR(1 g) = **0.161 mW/g**; SAR(10 g) = **0.085 mW/g**
Maximum value of SAR (measured) = 0.215 mW/g

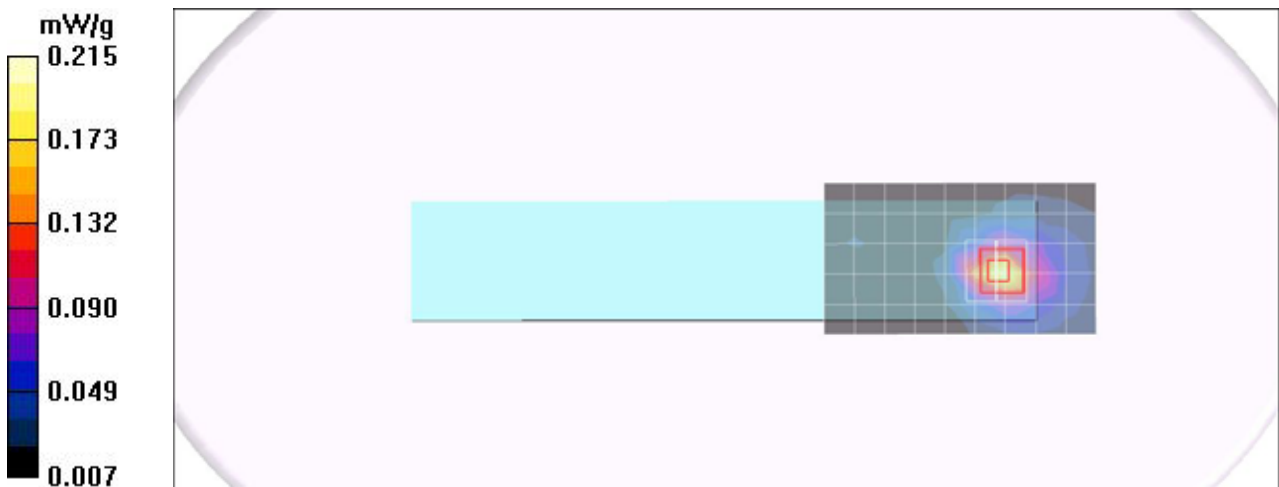

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II - Tablet mode Tip edge Body V1002X

DUT: V100X; Type: V100X; Serial: N/A


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Body Tablet Tip edge CH9262/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.402 mW/g

WCDMA Body Tablet Tip edge CH9262/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.16 V/m; Power Drift = -0.063 dB
Peak SAR (extrapolated) = 0.552 W/kg
SAR(1 g) = **0.318 mW/g**; SAR(10 g) = **0.190 mW/g**
Maximum value of SAR (measured) = 0.409 mW/g

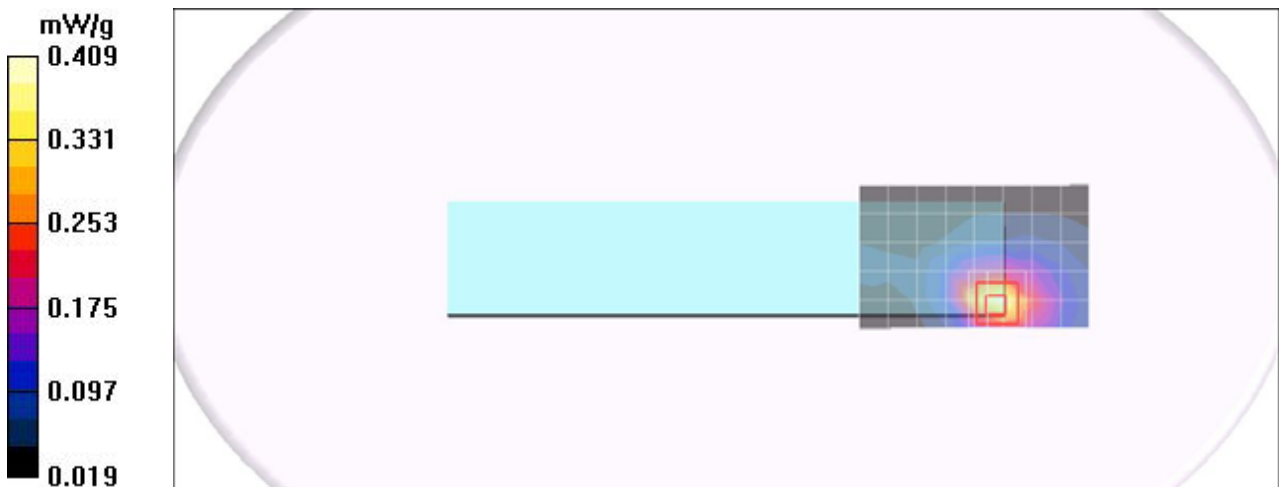

Test Laboratory: Compliance Certification Services Inc.

HSDPA Band II - Tablet mode Tip edge Body V1002X

DUT: V1002X; Type: V1002X; Serial: N/A


Communication System: HSDPA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA Body Tablet Right edge CH9262/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.528 mW/g

HSDPA Body Tablet Right edge CH9262/Zoom Scan (7x7x9)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.46 V/m; Power Drift = -0.087 dB
Peak SAR (extrapolated) = 0.799 W/kg
SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.240 mW/g
Maximum value of SAR (measured) = 0.590 mW/g

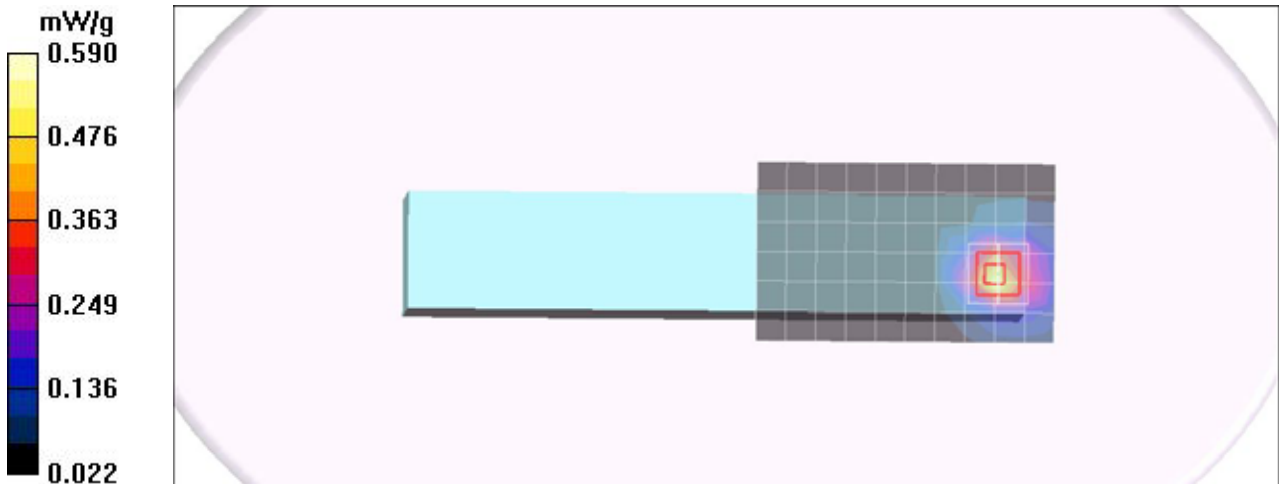

Test Laboratory: Compliance Certification Services Inc.

HSUPA Band II - Tablet mode Tip edge Body V1002X

DUT: V1002X; Type: V1002X; Serial: N/A


Communication System: HSUPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA Body Tablet Tip edge CH9400/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.509 mW/g

HSUPA Body Tablet Tip edge CH9400/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.18 V/m; Power Drift = -0.053 dB
Peak SAR (extrapolated) = 0.790 W/kg
SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.242 mW/g
Maximum value of SAR (measured) = 0.583 mW/g

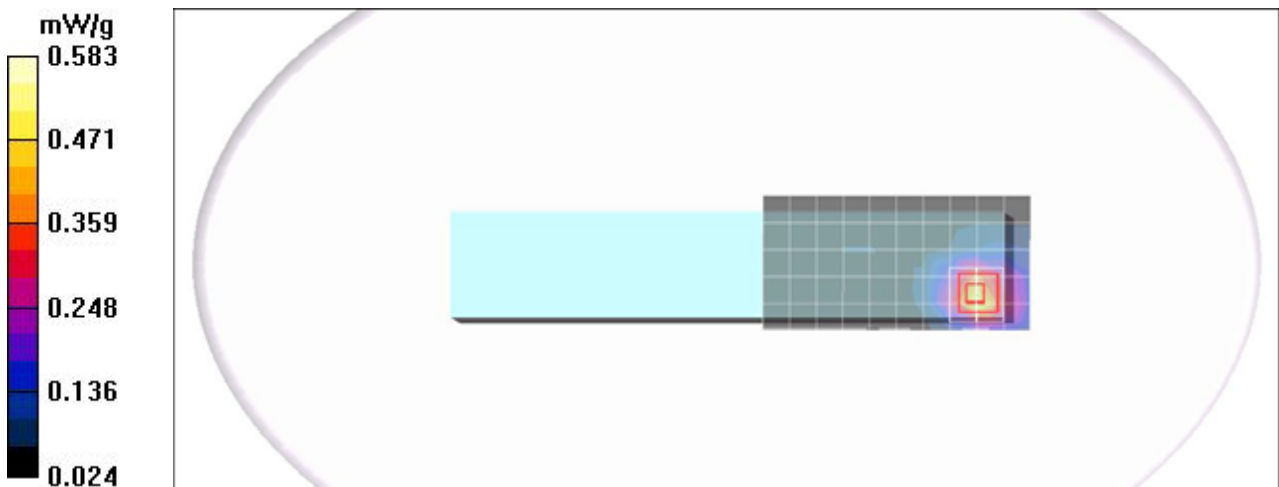

Test Laboratory: Compliance Certification Services Inc.

CDMA PCS - Tablet mode Tip edge V1002X

DUT: V1002X; Type: V1002X; Serial: N/A


Communication System: CDMA PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CDMA Body Tablet Tip edge CH25/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.540 mW/g

CDMA Body Tablet Tip edge CH25/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.36 V/m; Power Drift = -0.075 dB
Peak SAR (extrapolated) = 0.658 W/kg
SAR(1 g) = **0.383 mW/g**; SAR(10 g) = **0.216 mW/g**
Maximum value of SAR (measured) = 0.511 mW/g

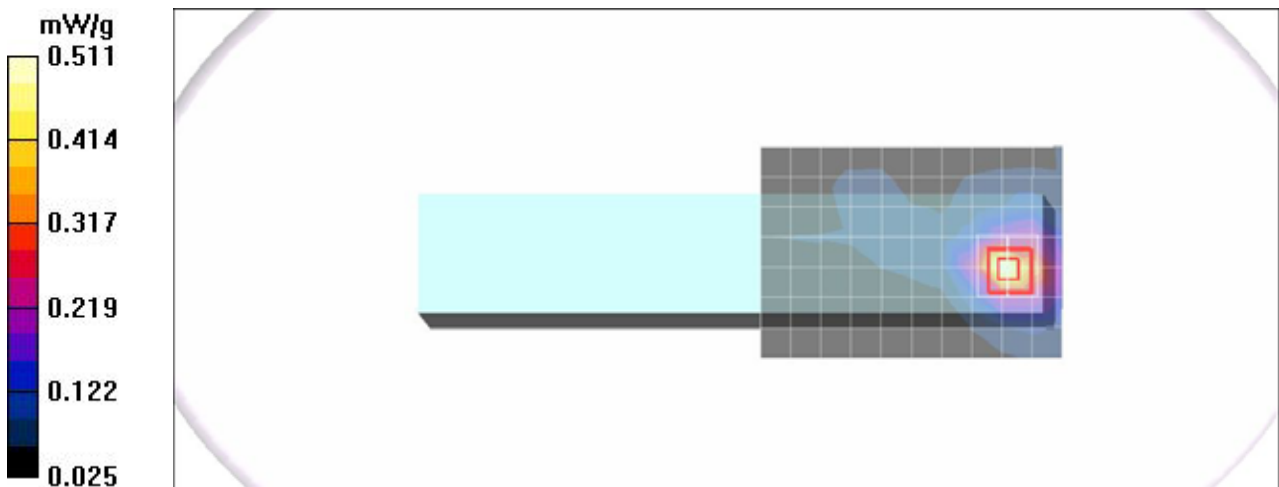

Test Laboratory: Compliance Certification Services Inc.

EVDO 0 PCS - Tablet mode Tip edge Body V1002X

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: EVDO PCS; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Body Tablet Tip edge CH1175/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.556 mW/g


EVDO Body Tablet Tip edge CH1175/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 6.24 V/m; Power Drift = -0.115 dB
Peak SAR (extrapolated) = 0.780 W/kg
SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.256 mW/g
Maximum value of SAR (measured) = 0.574 mW/g

EVDO Body Tablet Tip edge CH1175/Z Scan (1x1x11): Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.405 mW/g

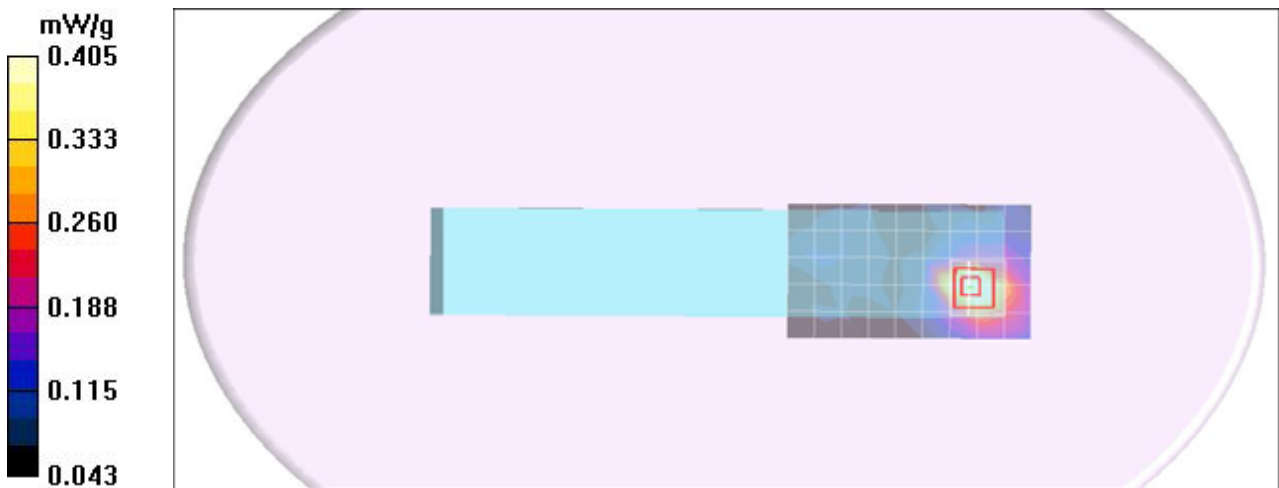

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

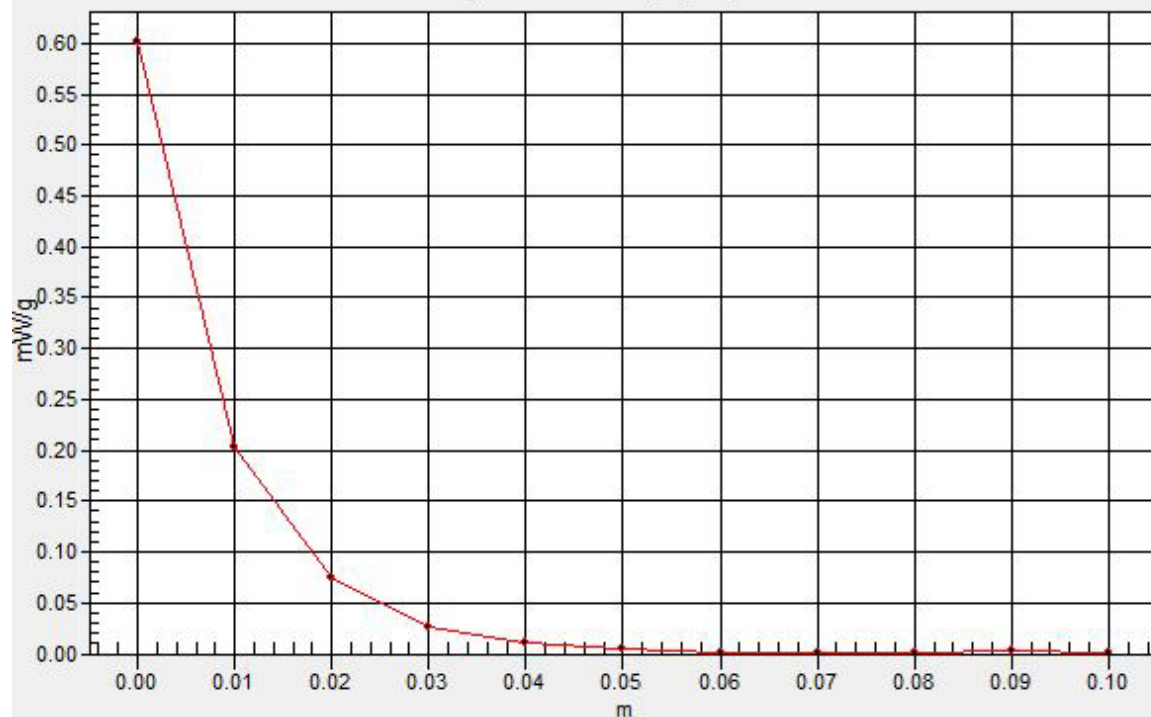

Test Laboratory: Compliance Certification Services Inc.

EVDO A PCS - Tablet mode Tip edge Body V1002X

DUT: V1002X; Type: V1002X; Serial: N/A


Communication System: EVDO PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Body Tablet Right edge CH25/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.539 mW/g

EVDO Body Tablet Right edge CH25/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.92 V/m; Power Drift = -0.037 dB
Peak SAR (extrapolated) = 0.791 W/kg
SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.245 mW/g
Maximum value of SAR (measured) = 0.573 mW/g

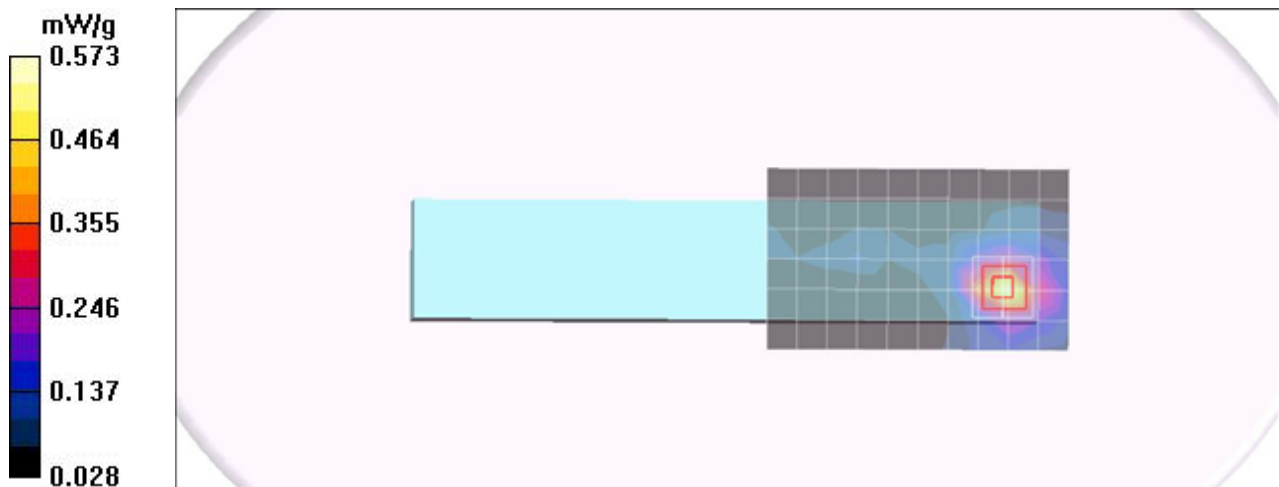

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet mode Bottom Flat Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.962$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet Bottom Flat CH190/Area Scan (12x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.101 mW/g

GPRS Body Tablet Bottom Flat CH190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 1.42 V/m; Power Drift = -0.119 dB
Peak SAR (extrapolated) = 0.103 W/kg
SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.062 mW/g
Maximum value of SAR (measured) = 0.099 mW/g

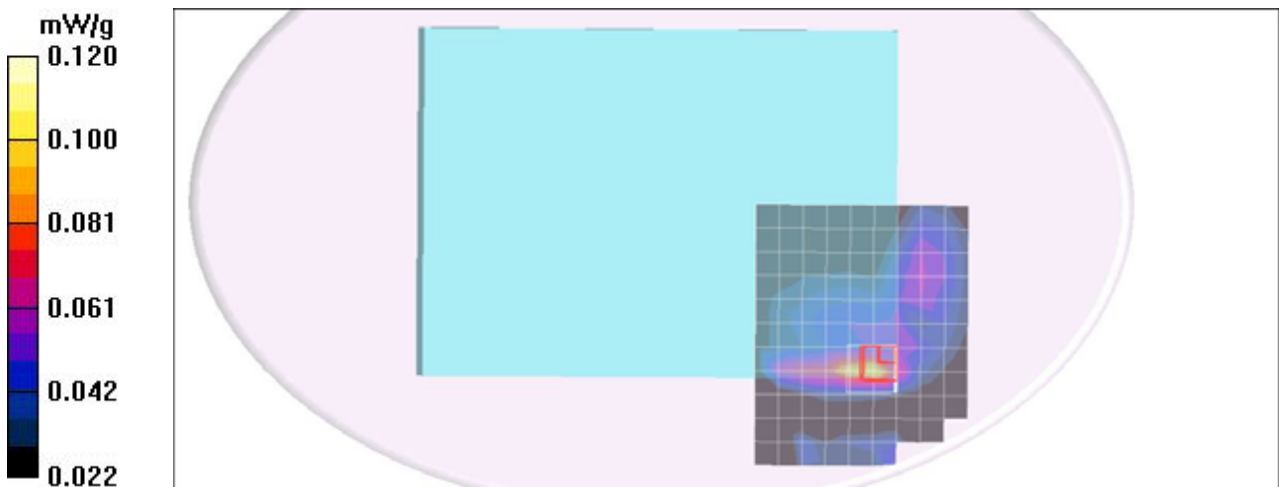

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - NB mode Bottom Flat Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body NB Bottom Flat CH190/Area Scan (10x23x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.023 mW/g

GPRS Body NB Bottom Flat CH190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 1.51 V/m; Power Drift = -0.112 dB
Peak SAR (extrapolated) = 0.051 W/kg
SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.022 mW/g
Maximum value of SAR (measured) = 0.049 mW/g

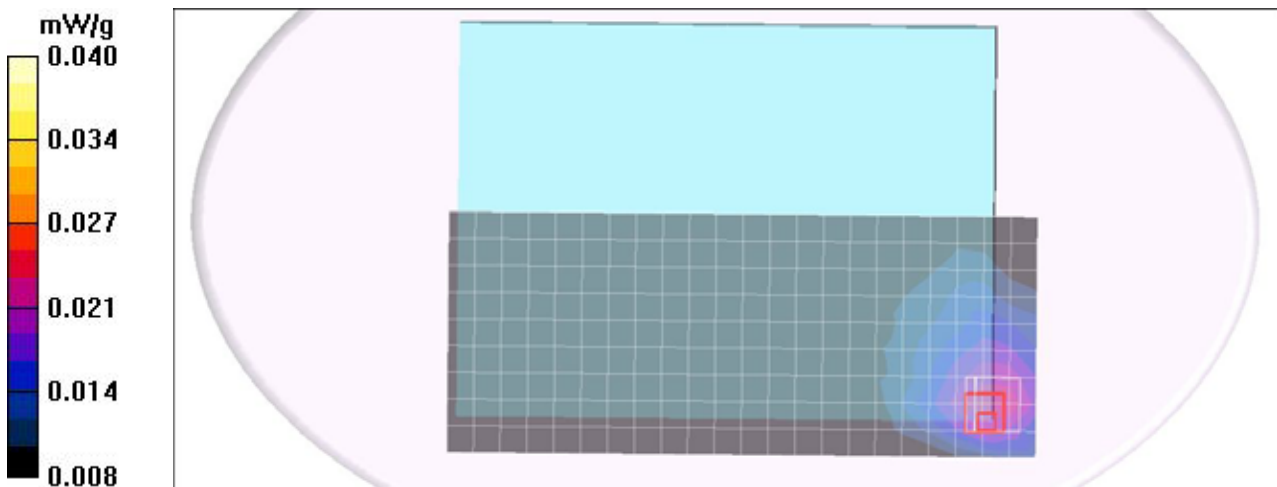

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet Tip edge CH190/Area Scan (6x23x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.147 mW/g

GPRS Body Tablet Tip edge CH190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.00 V/m; Power Drift = -0.127 dB
Peak SAR (extrapolated) = 0.206 W/kg
SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.085 mW/g
Maximum value of SAR (measured) = 0.151 mW/g

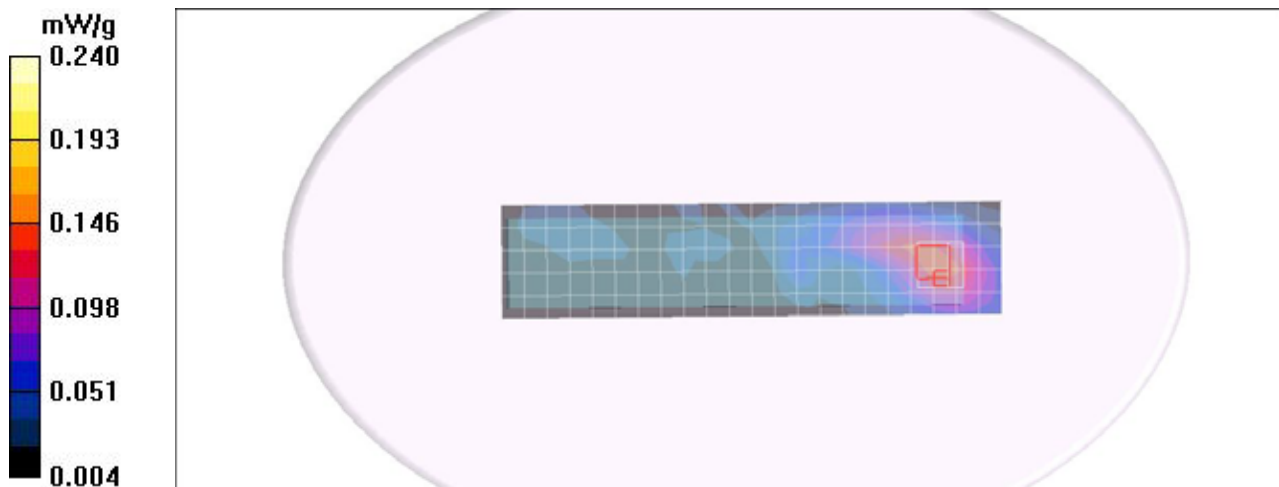

Test Laboratory: Compliance Certification Services Inc.

EGPRS 850 - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tablet Tip edge CH190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.044 mW/g

EGPRS Body Tablet Tip edge CH190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.19 V/m; Power Drift = -0.040 dB
Peak SAR (extrapolated) = 0.053 W/kg
SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.033 mW/g
Maximum value of SAR (measured) = 0.047 mW/g

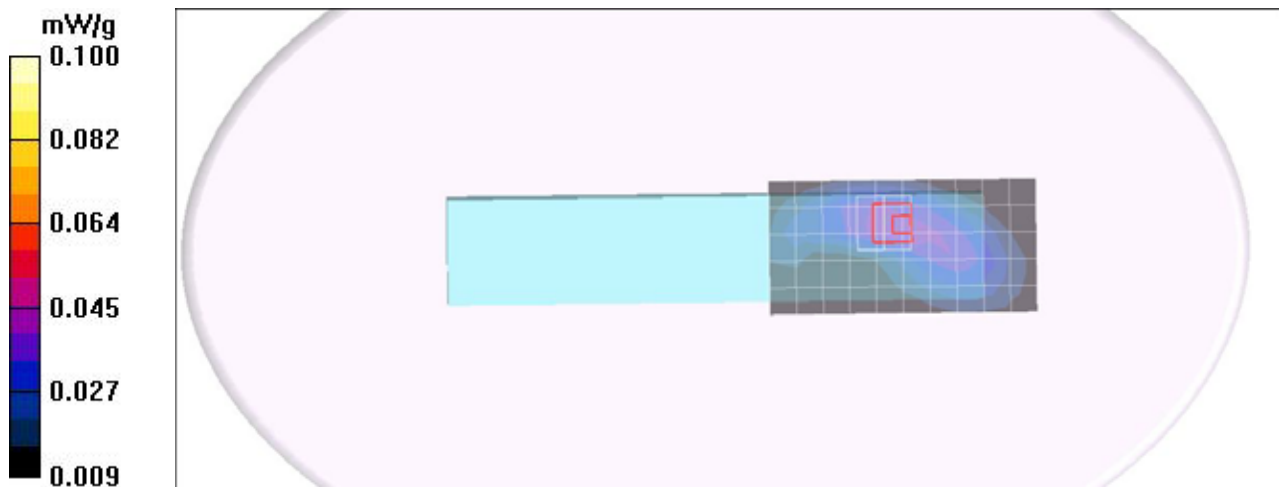

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V - Tablet mode Bottom Flated Body V200X

DUT: V200X; Type: V200X; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Body Tablet Bottom Flated CH4182/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm



Maximum value of SAR (measured) = 0.073 mW/g

WCDMA Body Tablet Bottom Flated CH4182/Zoom Scan (7x7x9)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.64 V/m; Power Drift = -0.111 dB
Peak SAR (extrapolated) = 0.067 W/kg
SAR(1 g) = **0.048 mW/g**; SAR(10 g) = **0.035 mW/g**
Maximum value of SAR (measured) = 0.057 mW/g

WCDMA Body Tablet Bottom Flated CH4182/Zoom Scan (7x7x9)/Cube 1: Measurement grid:

dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.64 V/m; Power Drift = -0.111 dB
Peak SAR (extrapolated) = 0.047 W/kg
SAR(1 g) = **0.033 mW/g**; SAR(10 g) = **0.023 mW/g**
Maximum value of SAR (measured) = 0.040 mW/g

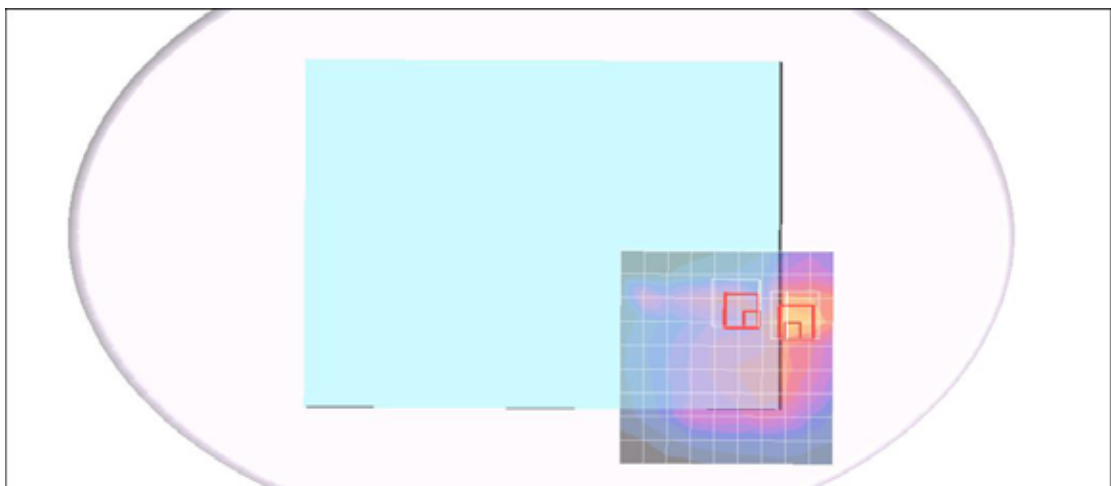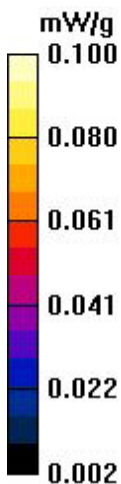

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V - NB mode Bottom Flated Body V200X

DUT: V200X; Type: V200X; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Body NB Bottom Flated CH4182/Area Scan (10x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.059 mW/g

WCDMA Body NB Bottom Flated CH4182/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 1.14 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.023 W/kg

SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

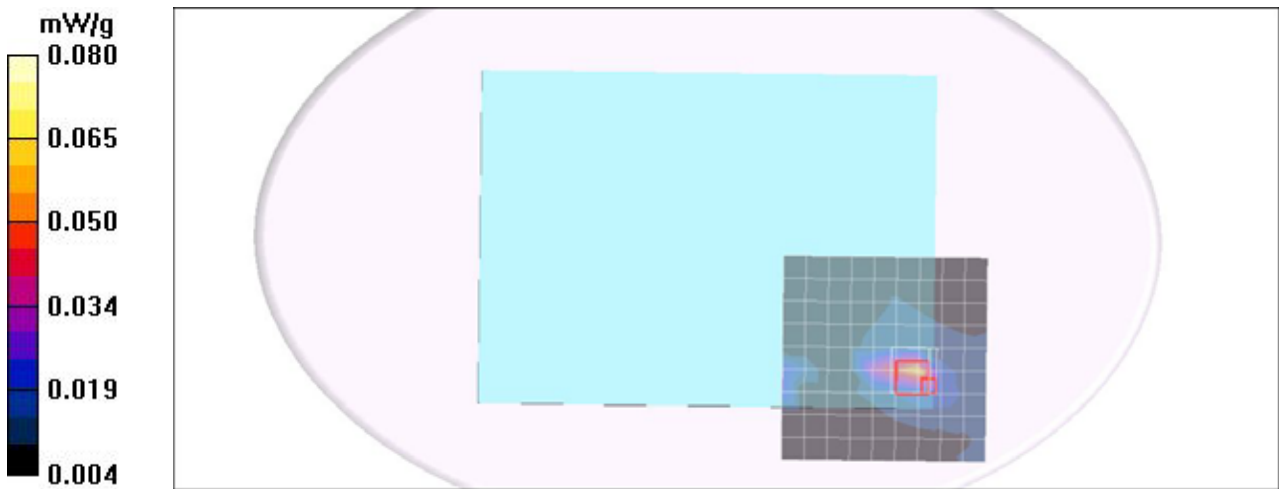

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Body Tablet Tip edge CH4182/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.142 mW/g

WCDMA Body Tablet Tip edge CH4182/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.71 V/m; Power Drift = -0.034 dB
Peak SAR (extrapolated) = 0.163 W/kg
SAR(1 g) = **0.131 mW/g**; SAR(10 g) = **0.103 mW/g**
Maximum value of SAR (measured) = 0.145 mW/g

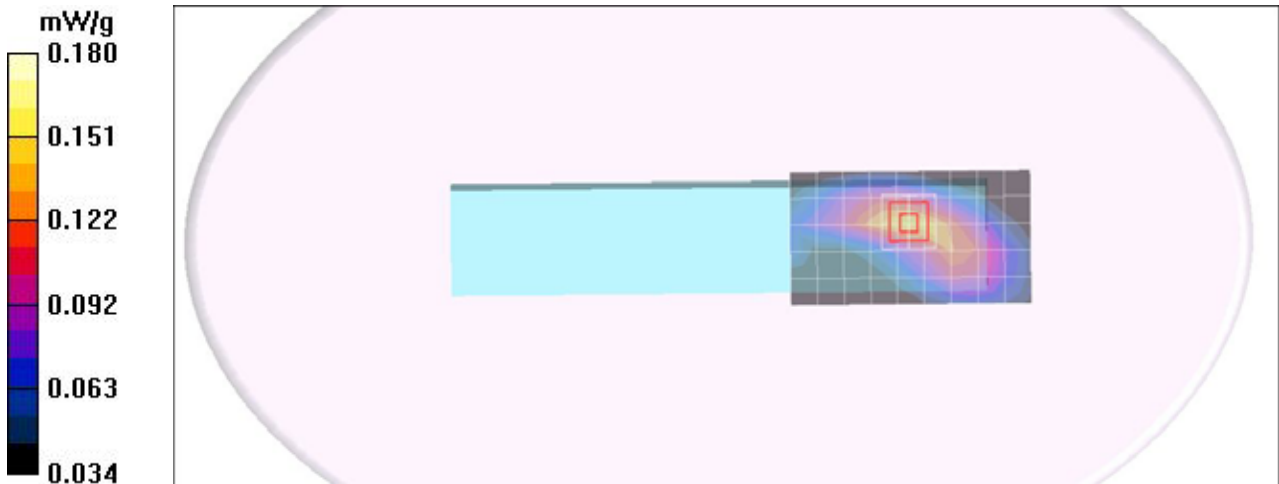

Test Laboratory: Compliance Certification Services Inc.

HSDPA Band V - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: HSDPA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA Body Tablet Tip edge CH4233/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.166 mW/g

HSDPA Body Tablet Tip edge CH4233/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.28 V/m; Power Drift = -0.104 dB
Peak SAR (extrapolated) = 0.308 W/kg
SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.105 mW/g
Maximum value of SAR (measured) = 0.213 mW/g

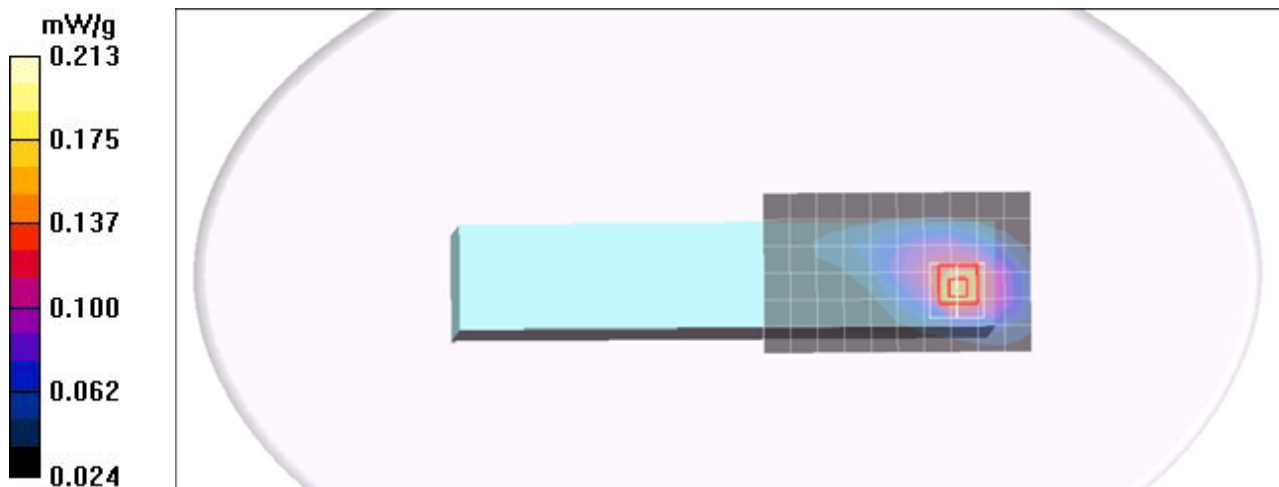

Test Laboratory: Compliance Certification Services Inc.

HSUPA Band V - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A

Communication System: HSUPA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.933$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA Body Tablet Right edge CH4132/Area Scan (6x17x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.851 mW/g


HSUPA Body Tablet Right edge CH4132/Zoom Scan (7x7x9)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=3mm
Reference Value = 19.8 V/m; Power Drift = -0.080 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = **0.535 mW/g**; SAR(10 g) = **0.308 mW/g**
Maximum value of SAR (measured) = 0.903 mW/g

HSUPA Body Tablet Right edge CH4132/Z Scan (1x1x11): Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.908 mW/g

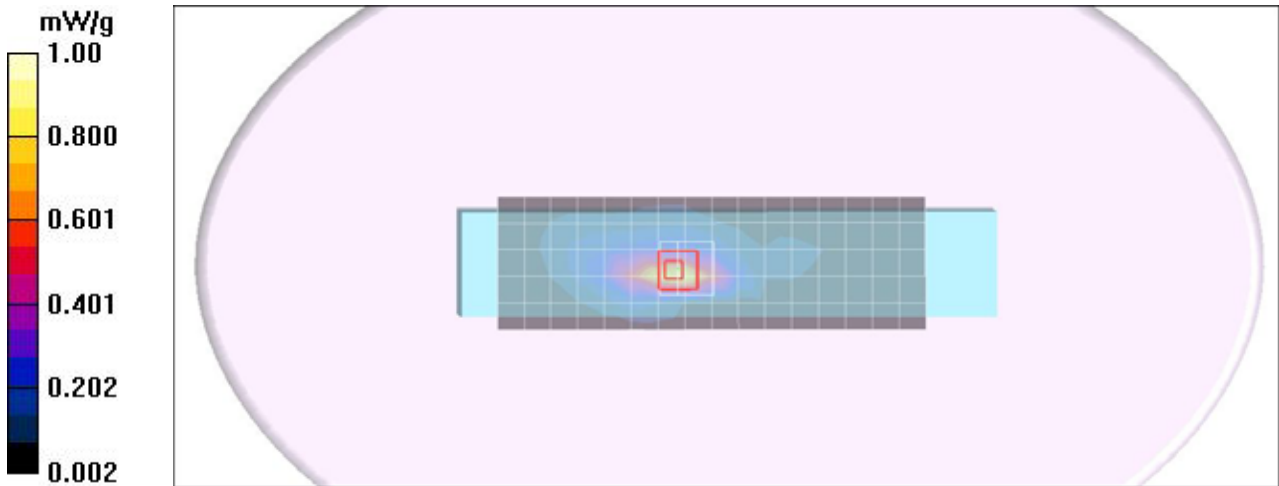

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

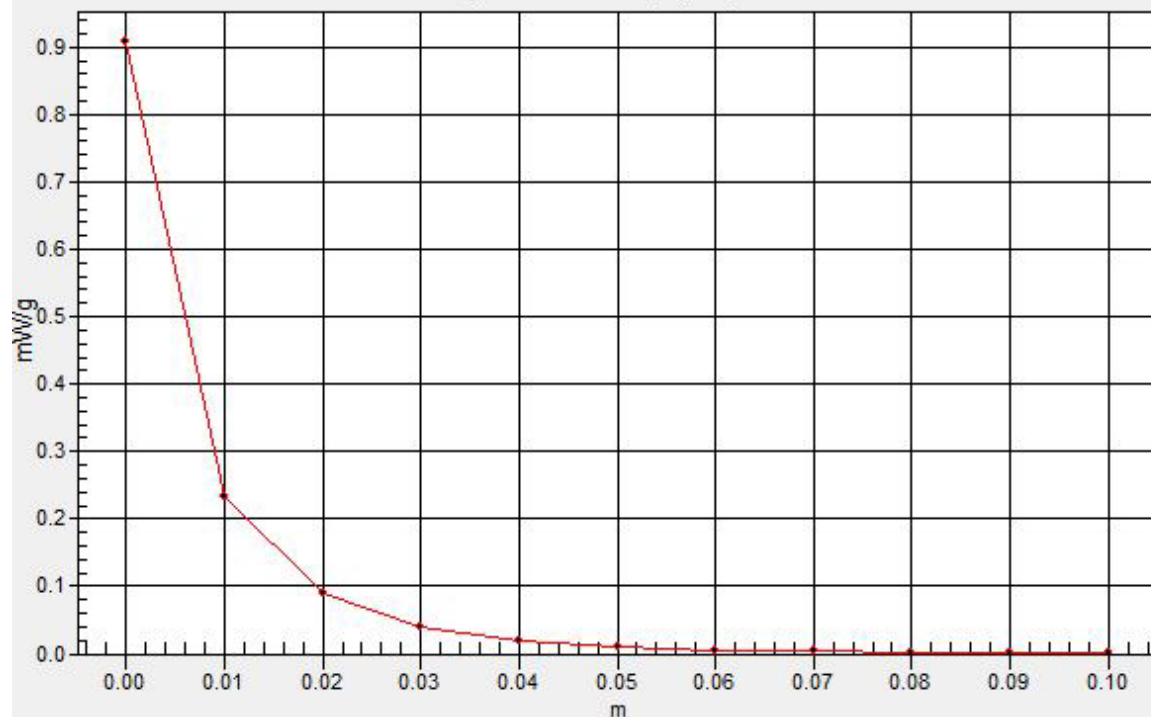

Test Laboratory: Compliance Certification Services Inc.

CDMA Cellular - Tablet mode Tip edge V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CDMA Body Tablet Tip edge CH384/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.123 mW/g

CDMA Body Tablet Tip edge CH384/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.44 V/m; Power Drift = -0.104 dB
Peak SAR (extrapolated) = 0.030 W/kg
SAR(1 g) = **0.011 mW/g**; SAR(10 g) = **0.00595 mW/g**
Maximum value of SAR (measured) = 0.026 mW/g

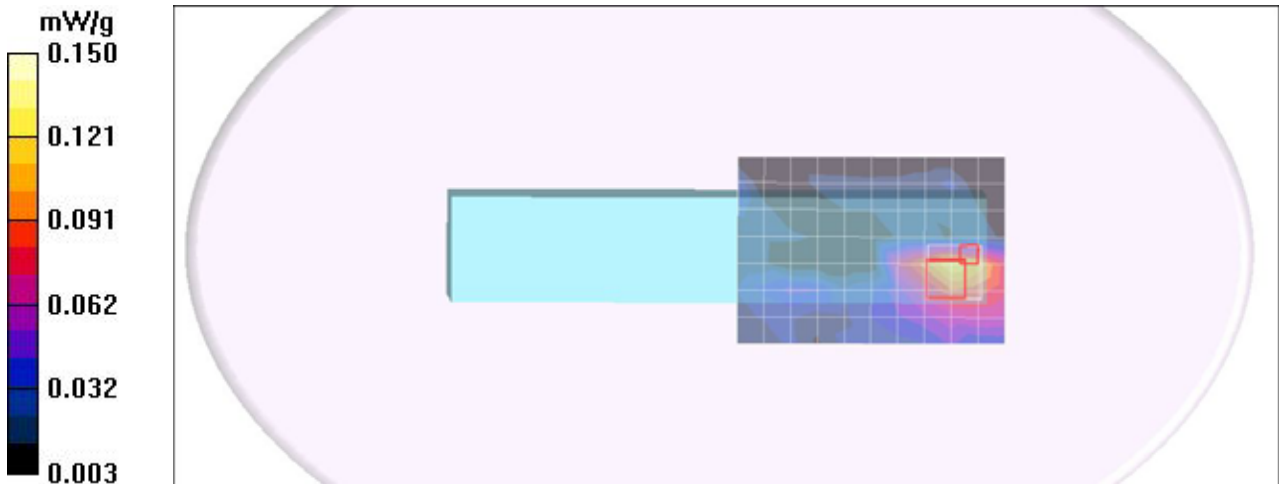

Test Laboratory: Compliance Certification Services Inc.

EVDO 0 Cellular - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: EVDO Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Body Tablet Tip edge CH777/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.032 mW/g

EVDO Body Tablet Tip edge CH777/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.19 V/m; Power Drift = -0.097 dB
Peak SAR (extrapolated) = 0.075 W/kg
SAR(1 g) = **0.013 mW/g**; SAR(10 g) = **0.00614 mW/g**
Maximum value of SAR (measured) = 0.034 mW/g

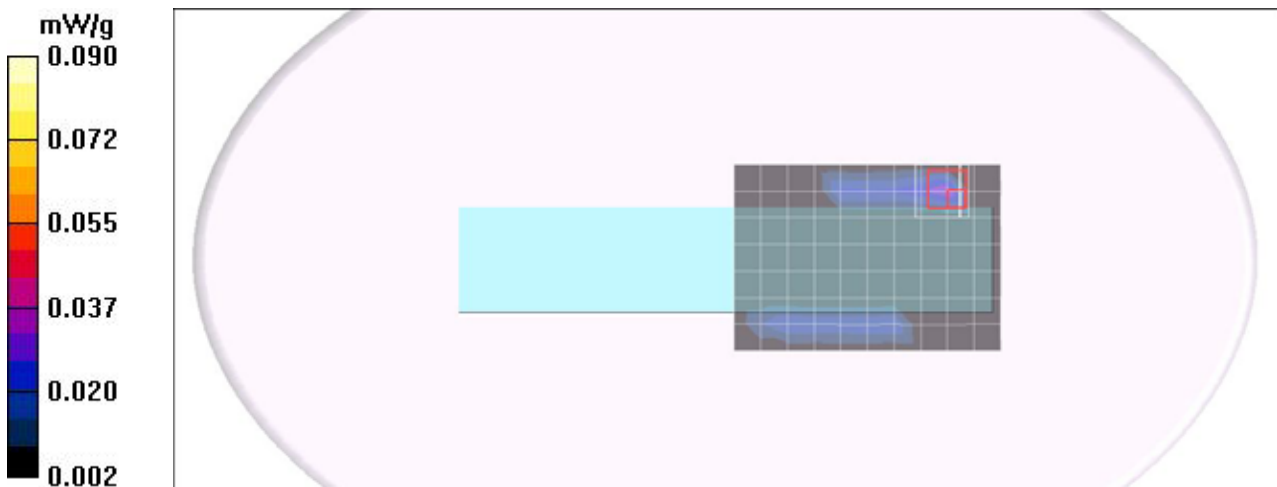

Test Laboratory: Compliance Certification Services Inc.

EVDO A Cellular - Tablet mode Bottom Flated Body V200X

DUT: V200X; Type: V200X; Serial: N/A

Communication System: EVDO Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 824.7$ MHz; $\sigma = 0.932$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Body Tablet Bottom Flated CH1013/Area Scan (10x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.024 mW/g

EVDO Body Tablet Bottom Flated CH1013/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 2.06 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 0.041 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00675 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

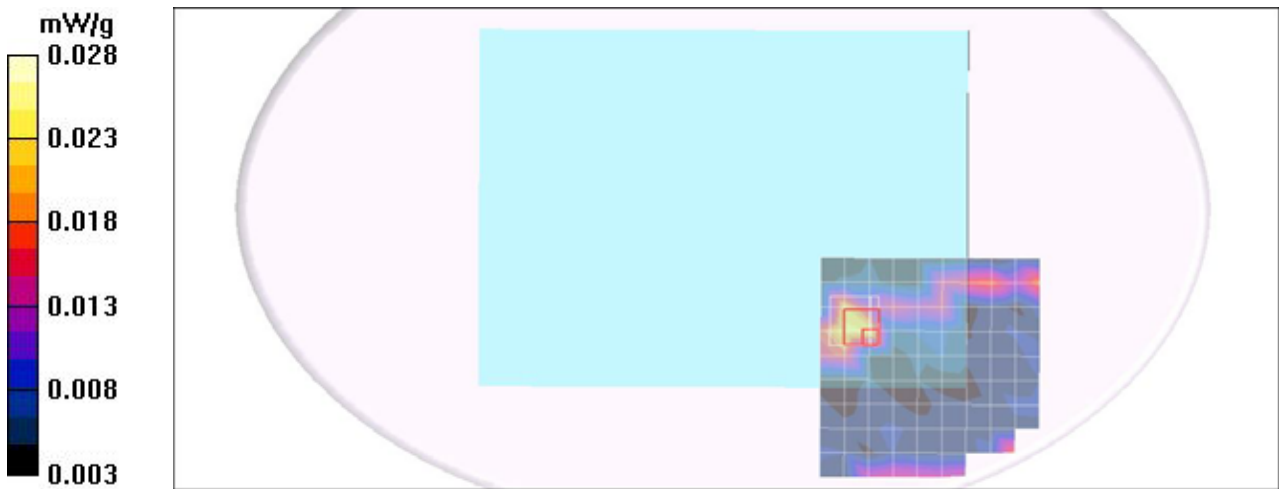

Test Laboratory: Compliance Certification Services Inc.

EVDO A Cellular - NB mode Bottom Flated Body V200X

DUT: V200X; Type: V200X; Serial: N/A

Communication System: EVDO Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 824.7$ MHz; $\sigma = 0.932$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Body NB Bottom Flated CH1013/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.021 mW/g

EVDO Body NB Bottom Flated CH1013/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.14 V/m; Power Drift = -0.108 dB
Peak SAR (extrapolated) = 0.025 W/kg
SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00666 mW/g
Maximum value of SAR (measured) = 0.023 mW/g

EVDO Body NB Bottom Flated CH1013/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.14 V/m; Power Drift = -0.108 dB
Peak SAR (extrapolated) = 0.031 W/kg
SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.0082 mW/g
Maximum value of SAR (measured) = 0.024 mW/g

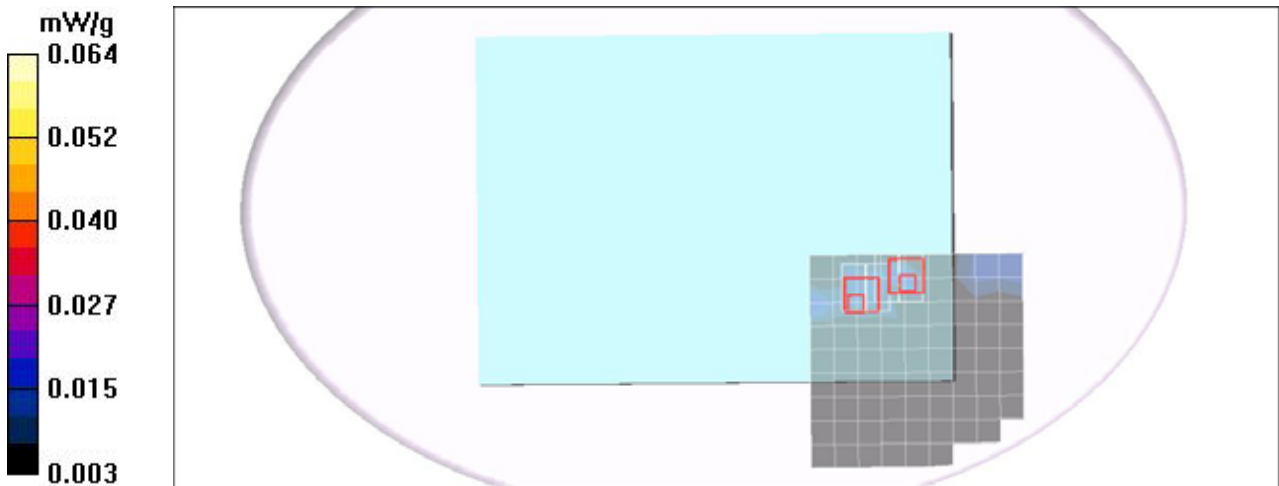

Test Laboratory: Compliance Certification Services Inc.

EVDO A Cellular - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: EVDO Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 824.7$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.28, 7.28, 7.28);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Body Tablet Tip edge CH1013/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.032 mW/g

EVDO Body Tablet Tip edge CH1013/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 0.265 V/m; Power Drift = -0.087 dB
Peak SAR (extrapolated) = 0.049 W/kg
SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.016 mW/g
Maximum value of SAR (measured) = 0.045 mW/g

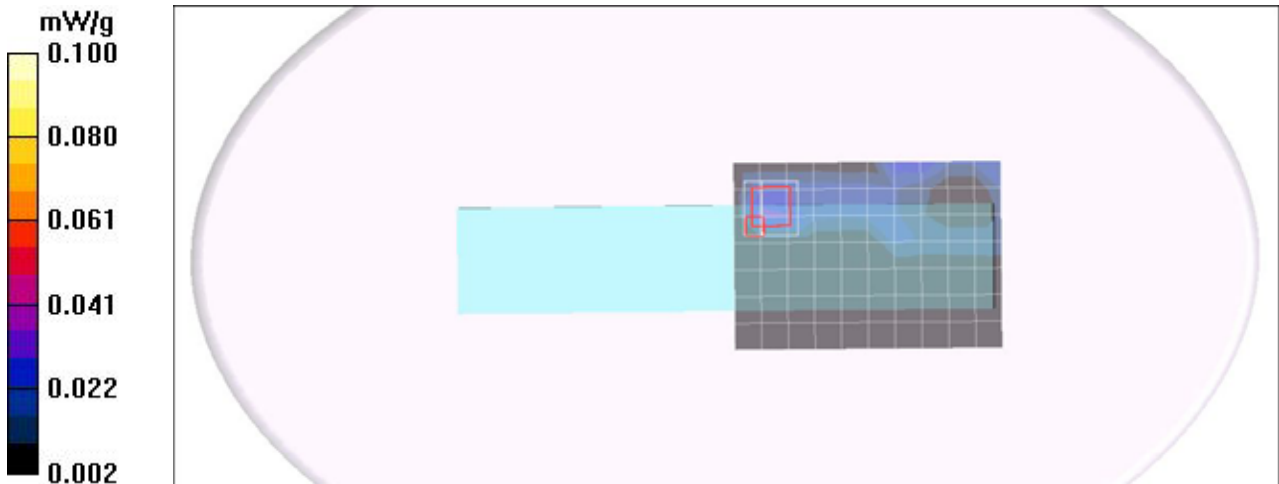

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet Tip edge CH661/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.138 mW/g

GPRS Body Tablet Tip edge CH661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.35 V/m; Power Drift = -0.102 dB
Peak SAR (extrapolated) = 0.177 W/kg
SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.062 mW/g
Maximum value of SAR (measured) = 0.135 mW/g

GPRS Body Tablet Tip edge CH661/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.35 V/m; Power Drift = -0.102 dB
Peak SAR (extrapolated) = 0.172 W/kg
SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.060 mW/g
Maximum value of SAR (measured) = 0.128 mW/g

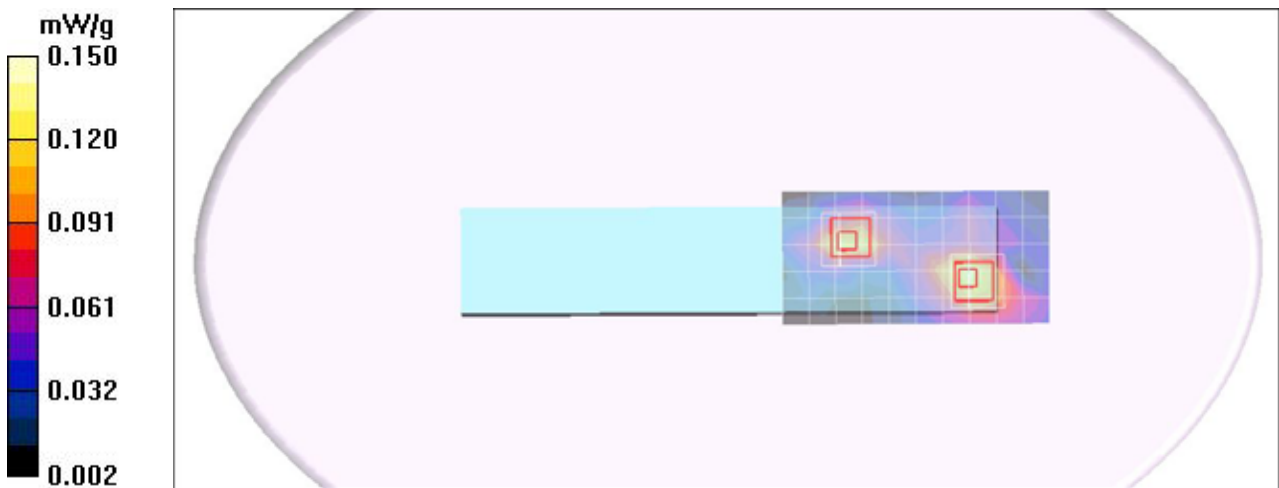

Test Laboratory: Compliance Certification Services Inc.

EGPRS 1900 - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A

Communication System: EGPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tablet Tip edge CH661/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.059 mW/g

EGPRS Body Tablet Tip edge CH661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 1.08 V/m; Power Drift = -0.113 dB
Peak SAR (extrapolated) = 0.085 W/kg
SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.028 mW/g
Maximum value of SAR (measured) = 0.063 mW/g

EGPRS Body Tablet Tip edge CH661/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 1.08 V/m; Power Drift = 4.73 dB
Peak SAR (extrapolated) = 0.075 W/kg
SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.026 mW/g
Maximum value of SAR (measured) = 0.055 mW/g

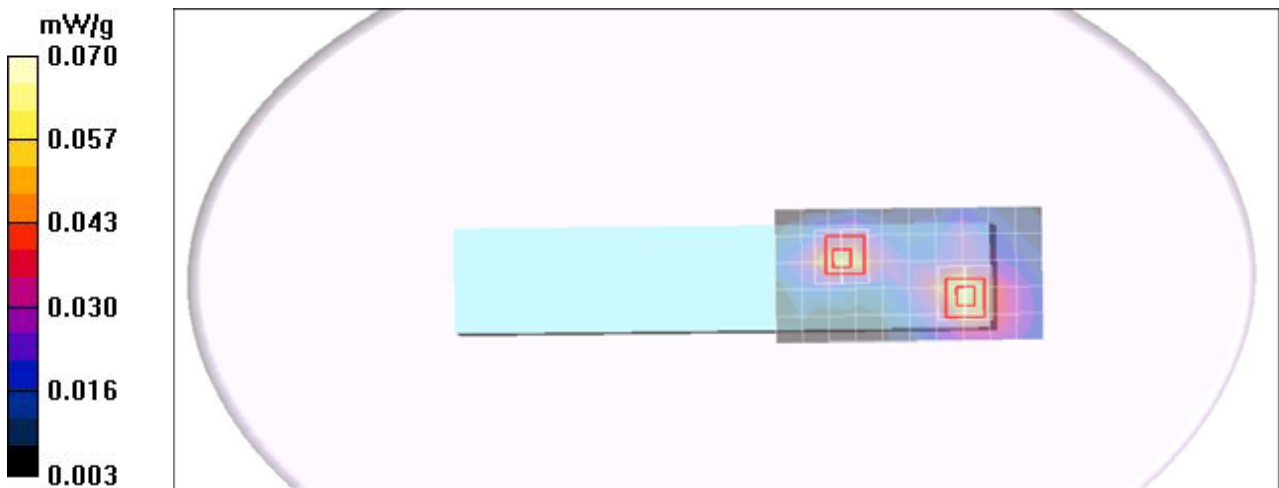

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Body Tablet Tip edge CH9262/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.216 mW/g

WCDMA Body Tablet Tip edge CH9262/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.35 V/m; Power Drift = -0.036 dB
Peak SAR (extrapolated) = 0.337 W/kg
SAR(1 g) = **0.199 mW/g**; SAR(10 g) = **0.118 mW/g**
Maximum value of SAR (measured) = 0.253 mW/g

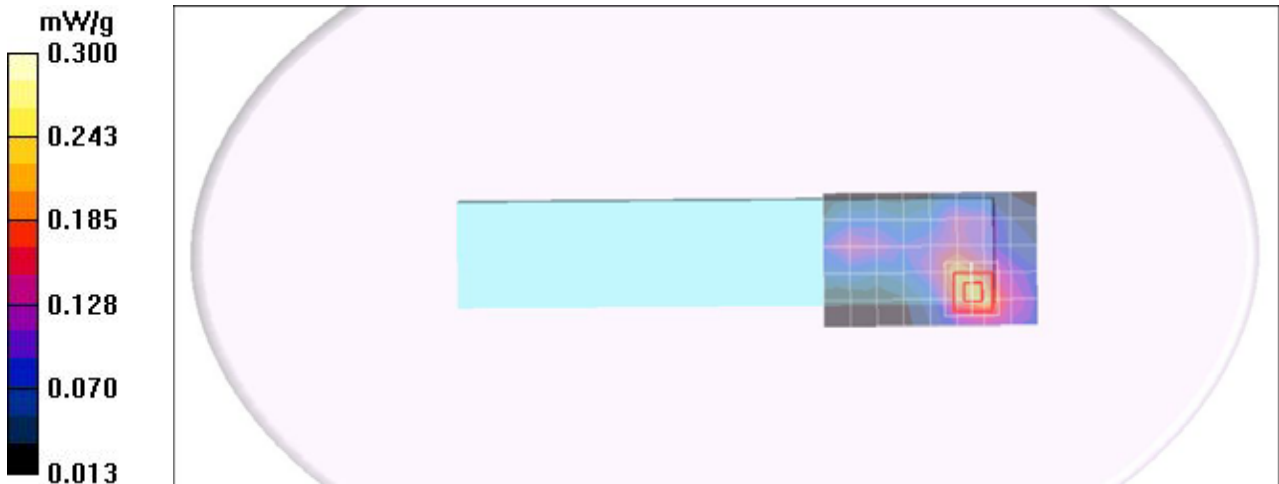

Test Laboratory: Compliance Certification Services Inc.

HSDPA Band II - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: HSDPA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA Body Tablet Right edge CH9262/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.568 mW/g

HSDPA Body Tablet Right edge CH9262/Zoom Scan (7x7x9)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.47 V/m; Power Drift = -0.067 dB
Peak SAR (extrapolated) = 0.804 W/kg
SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.242 mW/g
Maximum value of SAR (measured) = 0.586 mW/g

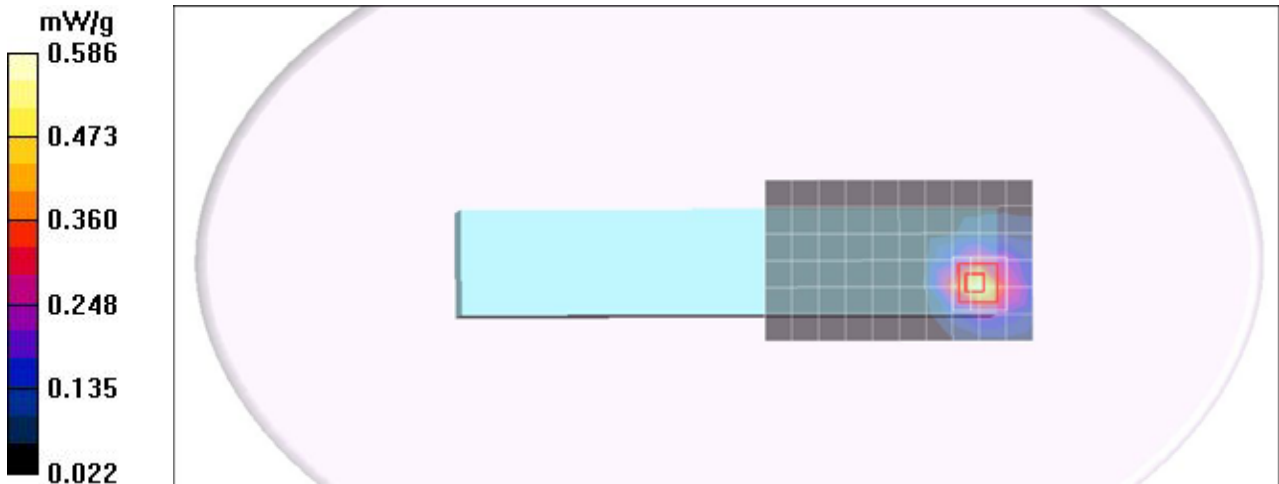

Test Laboratory: Compliance Certification Services Inc.

HSUPA Band II - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A

Communication System: HSUPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA Body Tablet Right edge CH9400/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.658 mW/g


HSUPA Body Tablet Right edge CH9400/Zoom Scan (7x7x9)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.61 V/m; Power Drift = 0.109 dB
Peak SAR (extrapolated) = 0.929 W/kg
SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.274 mW/g
Maximum value of SAR (measured) = 0.678 mW/g

HSUPA Body Tablet Right edge CH9400/Z Scan (1x1x11): Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.681 mW/g

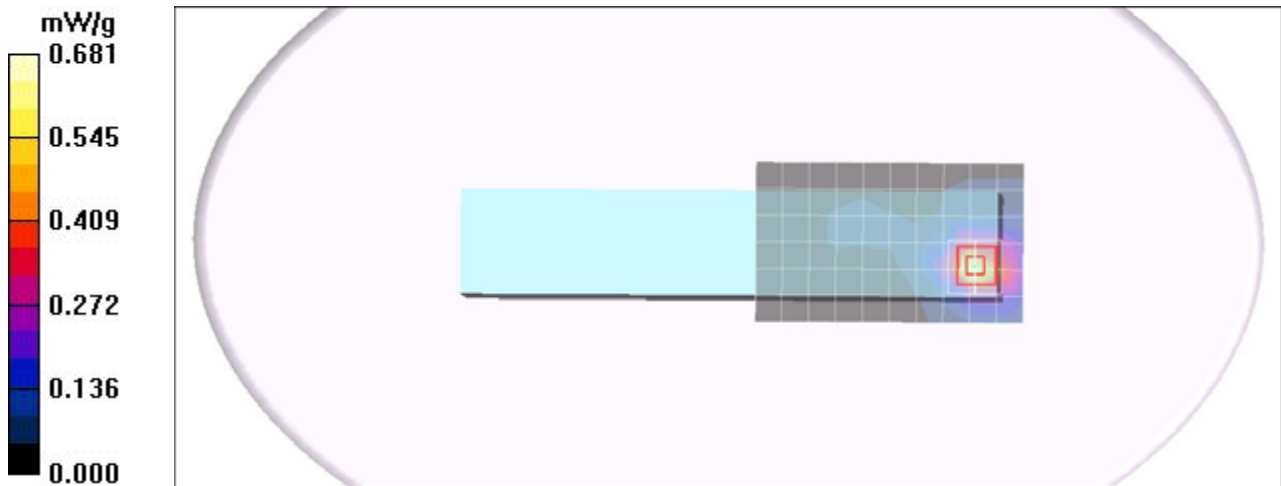

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

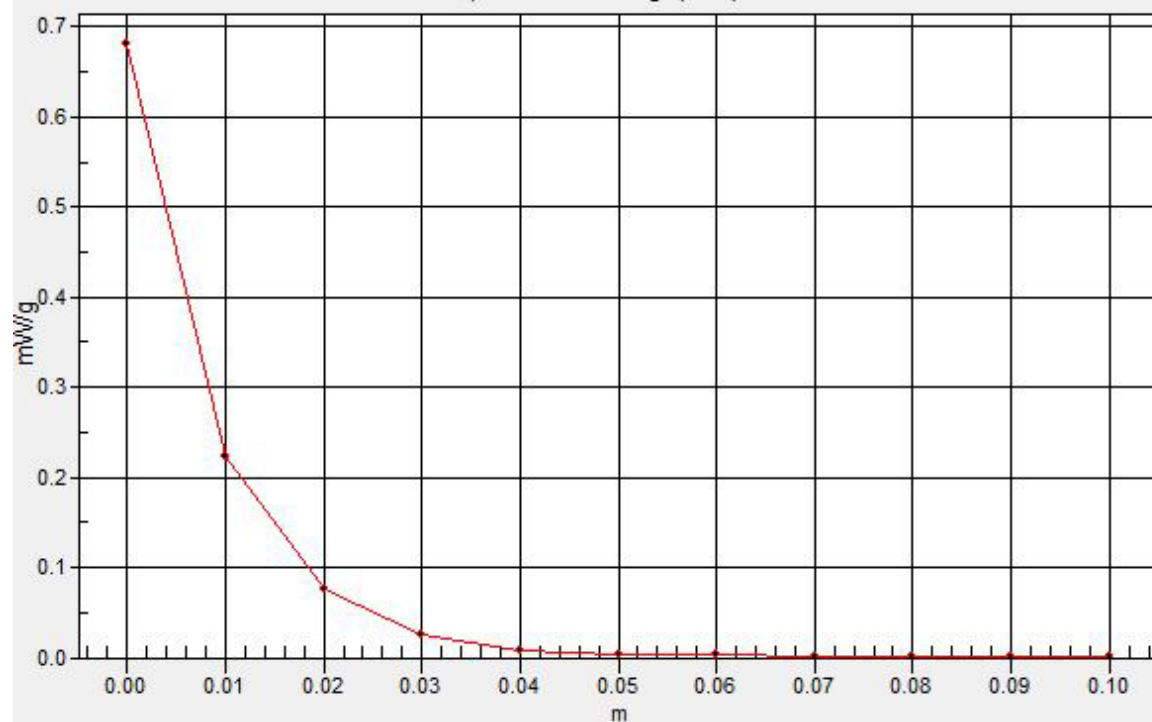

Test Laboratory: Compliance Certification Services Inc.

CDMA PCS - Tablet mode Tip edge V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: CDMA PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CDMA Body Tablet Tip edge CH25/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.223 mW/g

CDMA Body Tablet Tip edge CH25/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.76 V/m; Power Drift = -0.104 dB
Peak SAR (extrapolated) = 0.055 W/kg
SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.011 mW/g
Maximum value of SAR (measured) = 0.048 mW/g

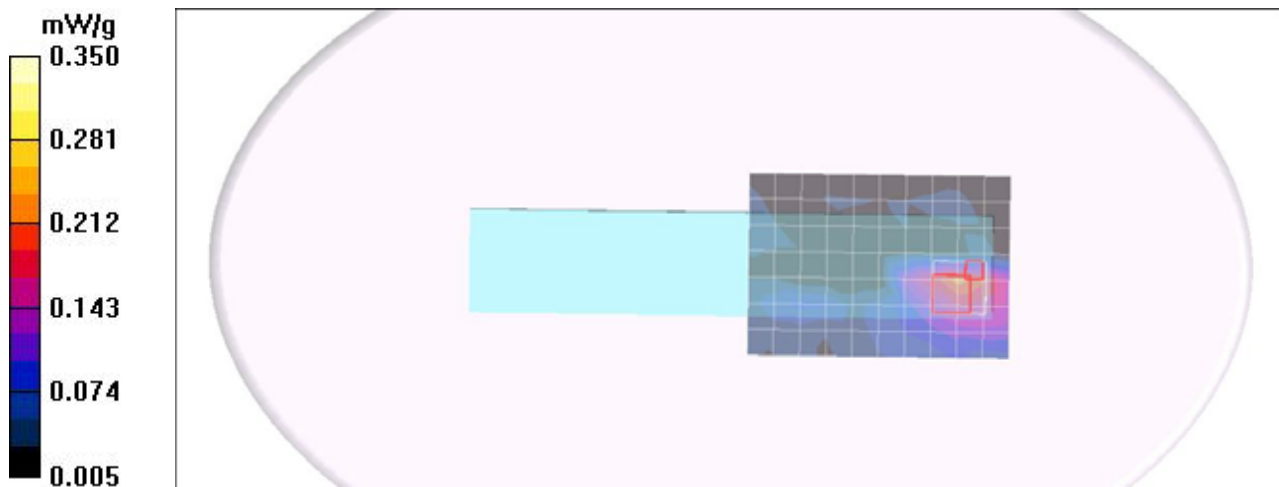

Test Laboratory: Compliance Certification Services Inc.

EVDO 0 PCS - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A


Communication System: EVDO PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Body Tablet Tip edge CH25/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.210 mW/g

EVDO Body Tablet Tip edge CH25/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.62 V/m; Power Drift = -0.084 dB
Peak SAR (extrapolated) = 0.292 W/kg
SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.098 mW/g
Maximum value of SAR (measured) = 0.212 mW/g

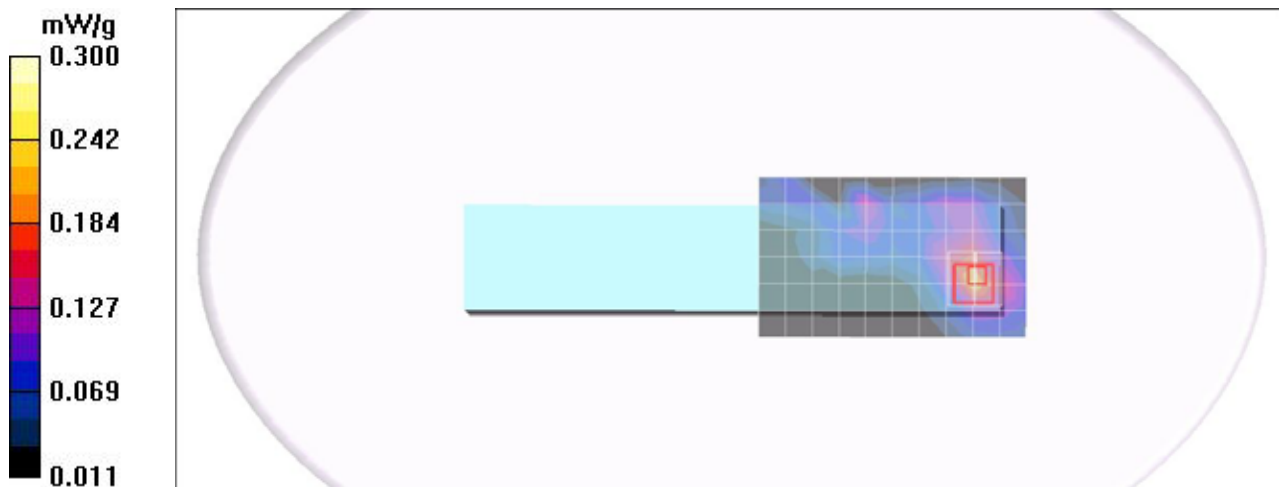

Test Laboratory: Compliance Certification Services Inc.

EVDO A PCS - Tablet mode Tip edge Body V200X

DUT: V200X; Type: V200X; Serial: N/A

Communication System: EVDO PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EVDO Body Tablet Tip edge CH25/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.217 mW/g

EVDO Body Tablet Tip edge CH25/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.64 V/m; Power Drift = -0.099 dB
Peak SAR (extrapolated) = 0.301 W/kg
SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.101 mW/g
Maximum value of SAR (measured) = 0.228 mW/g

