

Test Laboratory: Compliance Certification Services Inc.

80211a Left Edge mode V1002X antenna B

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5300 Rate=6M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.341 mW/g

CH5300 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.00 V/m; Power Drift = -0.073 dB
Peak SAR (extrapolated) = 0.825 W/kg
SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.087 mW/g
Maximum value of SAR (measured) = 0.404 mW/g

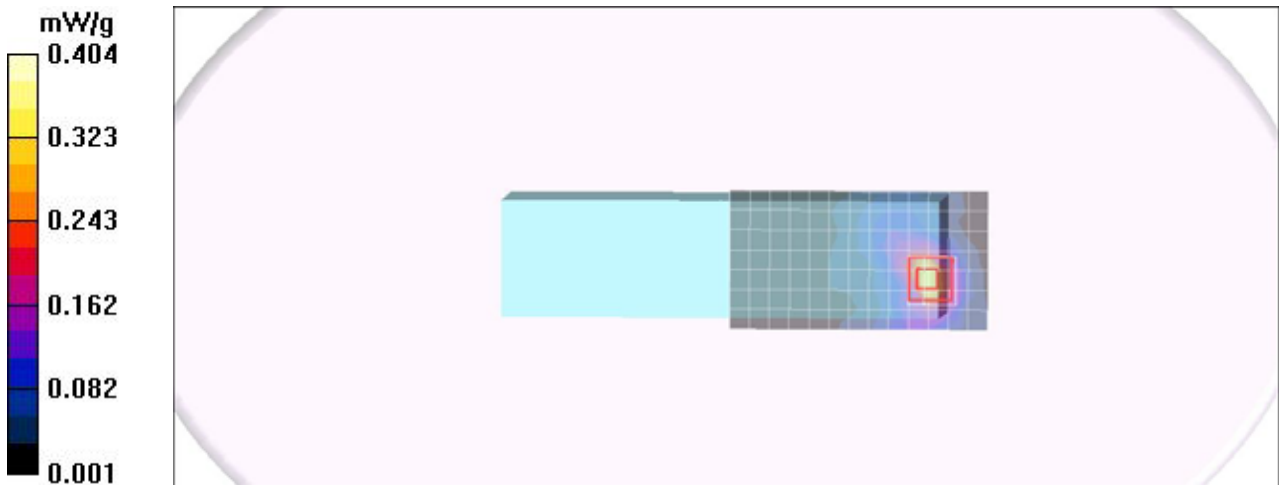

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom Tablet mode V1002X antenna B

DUT: V1002X; Type: V1002X; Serial: N/A


Communication System: IEEE 802.11 A; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5300 Rate=6M/Area Scan (9x14x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.036 mW/g

CH5300 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 0.000 V/m; Power Drift = -0.028 dB
Peak SAR (extrapolated) = 0.280 W/kg
SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.00848 mW/g
Maximum value of SAR (measured) = 0.037 mW/g

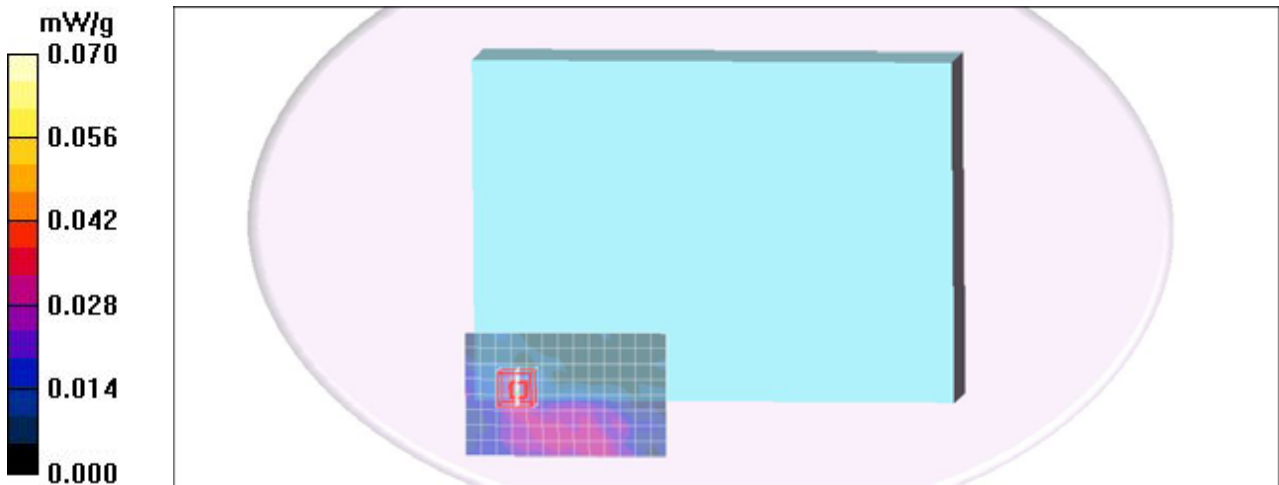

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom NB mode V1002X antenna B

DUT: V1002X; Type: V1002X; Serial: N/A


Communication System: IEEE 802.11 A; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5300 Rate=6M/Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.571 mW/g

CH5300 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 0.976 V/m; Power Drift = -0.077 dB
Peak SAR (extrapolated) = 0.024 W/kg
SAR(1 g) = 0.000356 mW/g; SAR(10 g) = 5.27e-005 mW/g
Maximum value of SAR (measured) = 0.027 mW/g

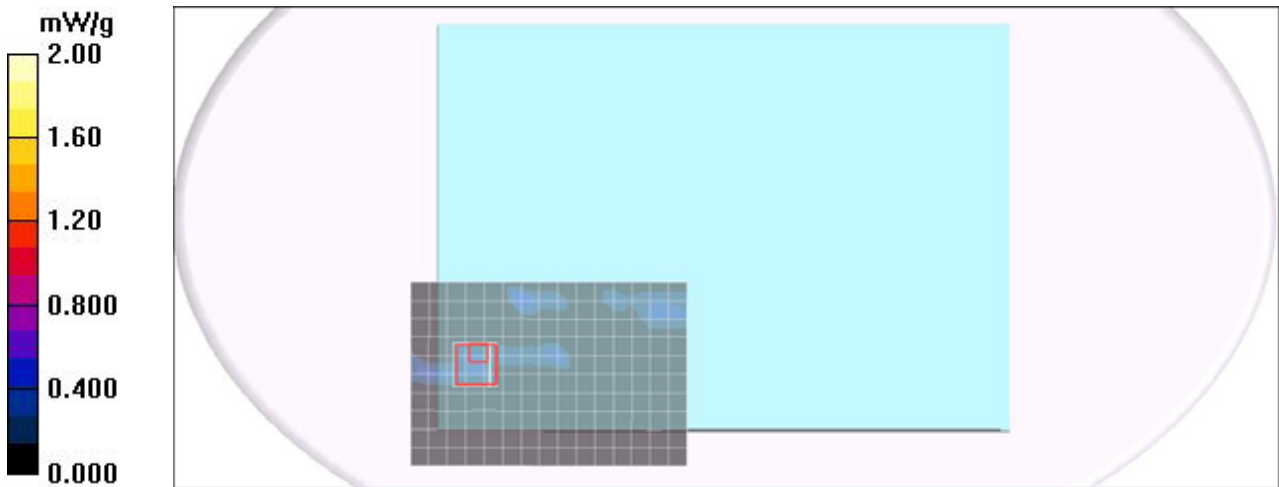

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(A) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.18$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5825 Rate=6.5M/Area Scan (9x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.540 mW/g

CH5825 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.12 V/m; Power Drift = -0.114 dB
Peak SAR (extrapolated) = 1.43 W/kg
SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.042 mW/g
Maximum value of SAR (measured) = 0.672 mW/g

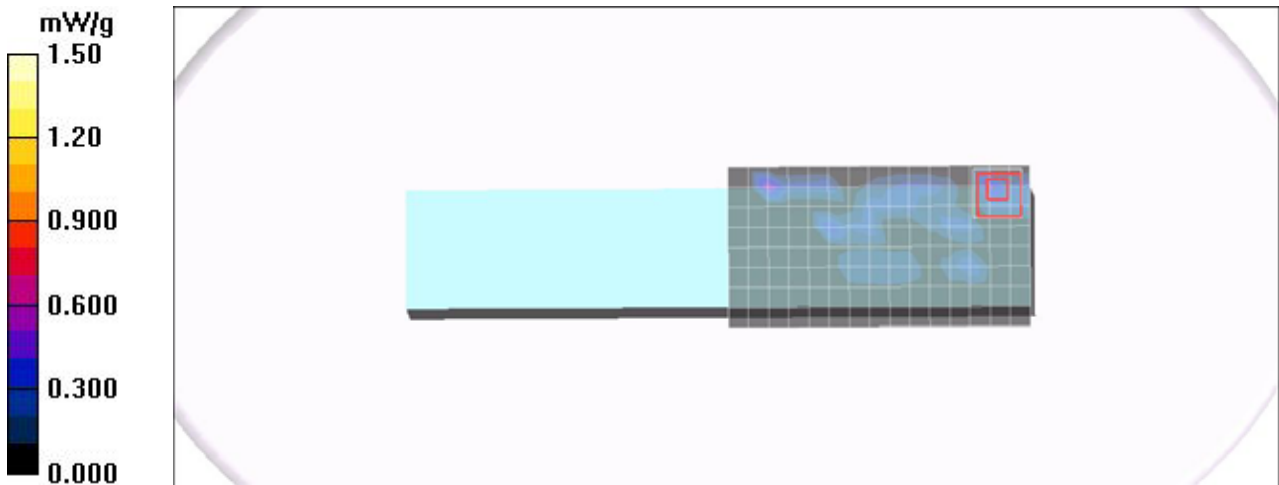

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.18$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5825 Rate=6.5M/Area Scan (9x16x1): Measurement grid: dx=10mm, dy=10mm



Maximum value of SAR (measured) = 1.92 mW/g

CH5825 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.58 V/m; Power Drift = -0.113 dB
Peak SAR (extrapolated) = 3.53 W/kg
SAR(1 g) = 0.911 mW/g; SAR(10 g) = 0.254 mW/g
Maximum value of SAR (measured) = 1.65 mW/g

CH5825 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.58 V/m; Power Drift = -0.113 dB
Peak SAR (extrapolated) = 2.90 W/kg
SAR(1 g) = 0.696 mW/g; SAR(10 g) = 0.267 mW/g
Maximum value of SAR (measured) = 1.44 mW/g

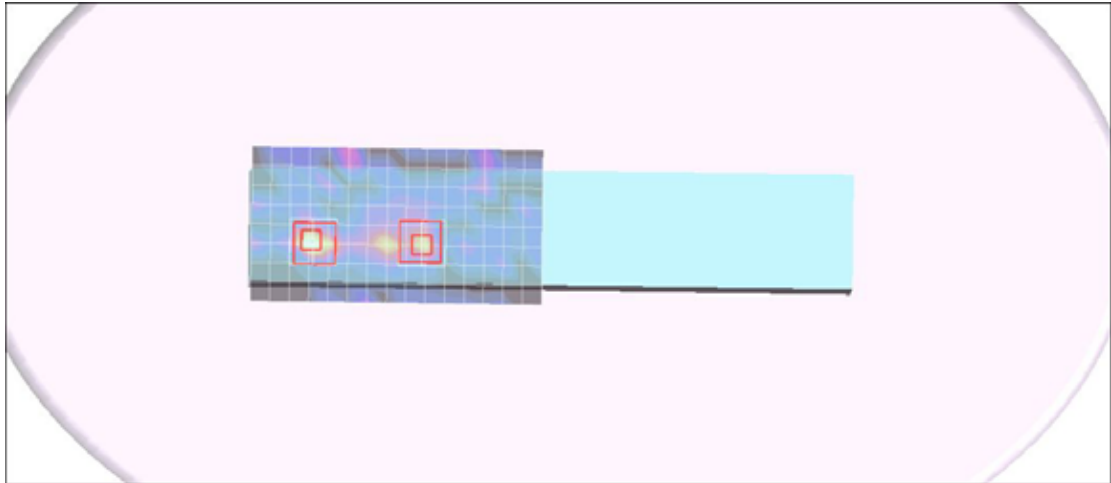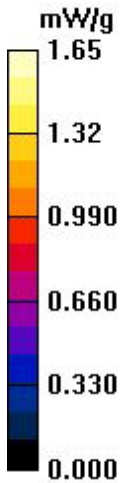

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.32$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.8, 3.8, 3.8);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5180 Rate=6.5M/Area Scan (9x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.523 mW/g

CH5180 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.471 V/m; Power Drift = -0.118 dB
Peak SAR (extrapolated) = 0.219 W/kg
SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.010 mW/g
Maximum value of SAR (measured) = 0.117 mW/g

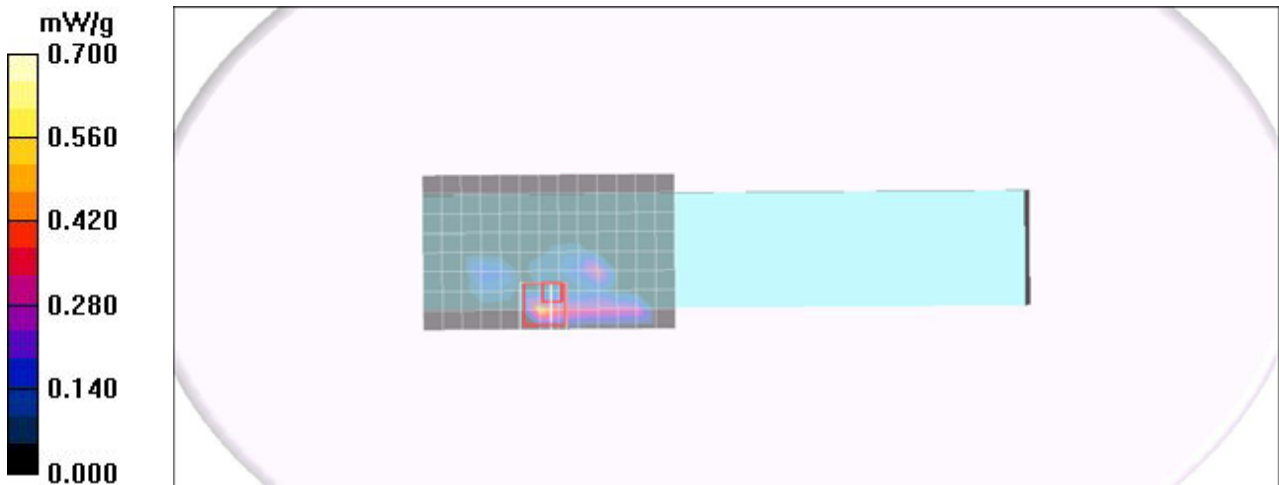

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5220 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5220$ MHz; $\sigma = 5.32$ mho/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.8, 3.8, 3.8);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5220 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 0.257 mW/g

CH5220 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.95 V/m; Power Drift = -0.062 dB
Peak SAR (extrapolated) = 0.585 W/kg
SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.076 mW/g
Maximum value of SAR (measured) = 0.331 mW/g

CH5220 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.95 V/m; Power Drift = -0.062 dB
Peak SAR (extrapolated) = 0.185 W/kg
SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.038 mW/g
Maximum value of SAR (measured) = 0.123 mW/g

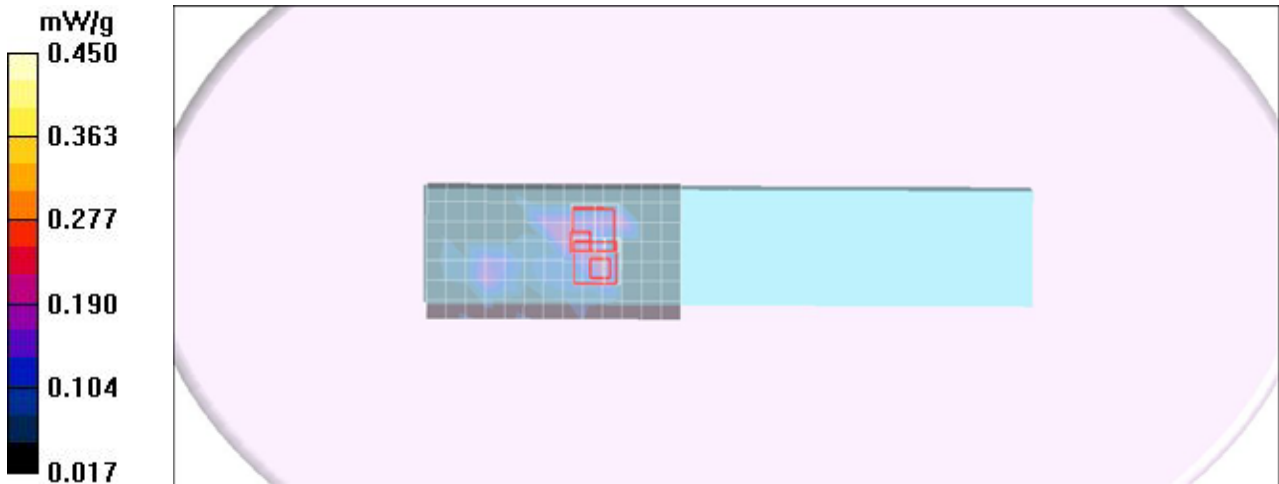

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.47$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5280 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 1.38 mW/g

CH5280 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.79 V/m; Power Drift = -0.090 dB
Peak SAR (extrapolated) = 3.56 W/kg
SAR(1 g) = 1.010 mW/g; SAR(10 g) = 0.303 mW/g
Maximum value of SAR (measured) = 1.89 mW/g

CH5280 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.79 V/m; Power Drift = -0.090 dB
Peak SAR (extrapolated) = 3.22 W/kg
SAR(1 g) = 1.080 mW/g; SAR(10 g) = 0.322 mW/g
Maximum value of SAR (measured) = 1.93 mW/g

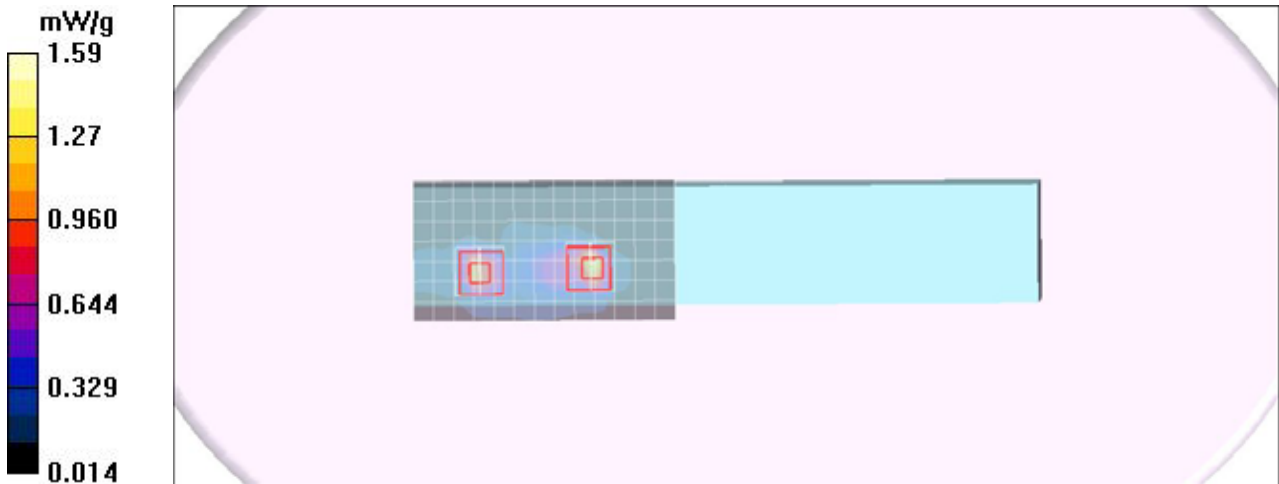

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5320 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5320$ MHz; $\sigma = 5.47$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5320 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 1.43 mW/g

CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.35 V/m; Power Drift = -0.101 dB
Peak SAR (extrapolated) = 3.34 W/kg
SAR(1 g) = 0.980 mW/g; SAR(10 g) = 0.320 mW/g
Maximum value of SAR (measured) = 1.82 mW/g

CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.35 V/m; Power Drift = -0.101 dB
Peak SAR (extrapolated) = 3.41 W/kg
SAR(1 g) = 0.974 mW/g; SAR(10 g) = 0.281 mW/g
Maximum value of SAR (measured) = 1.80 mW/g

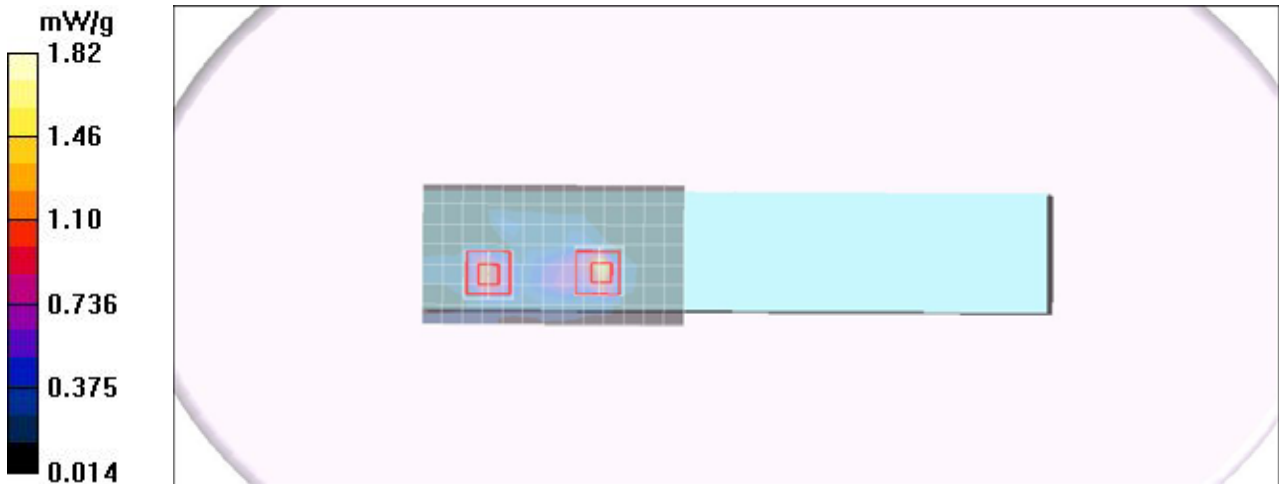

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5520 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5520$ MHz; $\sigma = 5.77$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.37, 3.37, 3.37);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5520 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm



Maximum value of SAR (measured) = 1.27 mW/g

CH5520 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.10 V/m; Power Drift = -0.128 dB
Peak SAR (extrapolated) = 2.95 W/kg
SAR(1 g) = 0.832 mW/g; SAR(10 g) = 0.238 mW/g
Maximum value of SAR (measured) = 1.49 mW/g

CH5520 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.10 V/m; Power Drift = -0.128 dB
Peak SAR (extrapolated) = 2.84 W/kg
SAR(1 g) = 0.877 mW/g; SAR(10 g) = 0.235 mW/g
Maximum value of SAR (measured) = 1.45 mW/g

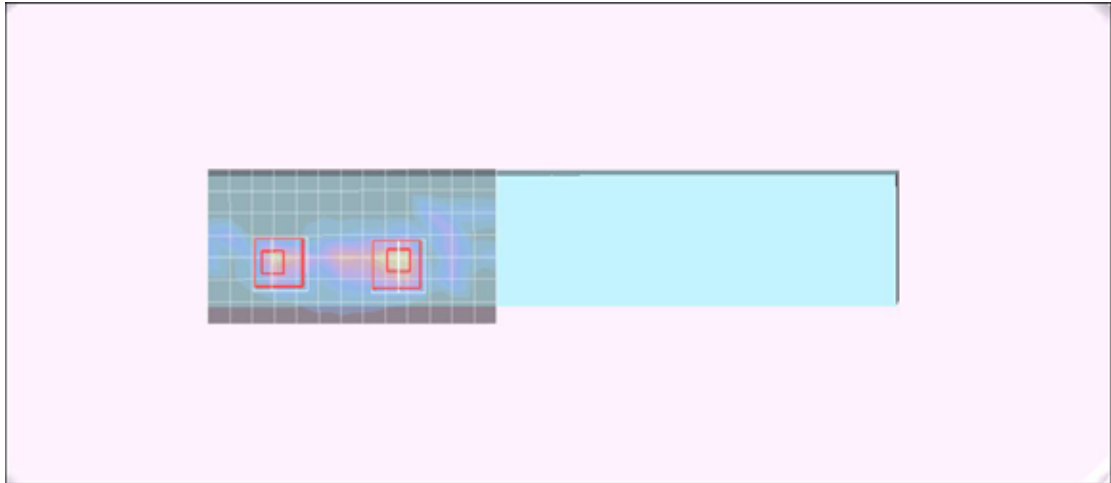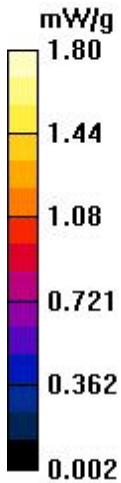

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5580 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5580$ MHz; $\sigma = 5.92$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.3, 3.3, 3.3);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5600 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm



Maximum value of SAR (measured) = 1.26 mW/g

CH5600 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.69 V/m; Power Drift = -0.078 dB
Peak SAR (extrapolated) = 2.81 W/kg
SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.253 mW/g
Maximum value of SAR (measured) = 1.54 mW/g

CH5600 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.69 V/m; Power Drift = -0.078 dB
Peak SAR (extrapolated) = 2.87 W/kg
SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.211 mW/g
Maximum value of SAR (measured) = 1.39 mW/g

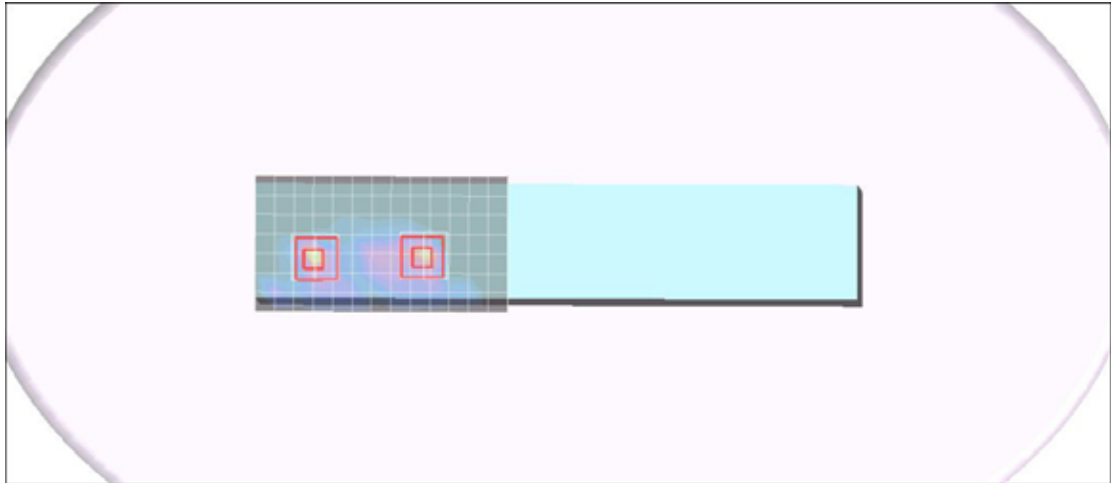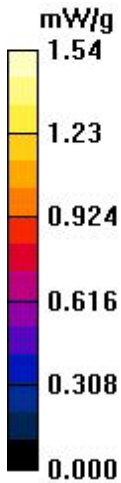

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5620 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5620$ MHz; $\sigma = 5.92$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.3, 3.3, 3.3);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5620 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 1.49 mW/g

CH5620 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.45 V/m; Power Drift = -0.108 dB
Peak SAR (extrapolated) = 3.93 W/kg
SAR(1 g) = 0.923 mW/g; SAR(10 g) = 0.333 mW/g
Maximum value of SAR (measured) = 1.45 mW/g

CH5620 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.45 V/m; Power Drift = -0.108 dB
Peak SAR (extrapolated) = 3.73 W/kg
SAR(1 g) = 1.040 mW/g; SAR(10 g) = 0.316 mW/g
Maximum value of SAR (measured) = 1.79 mW/g

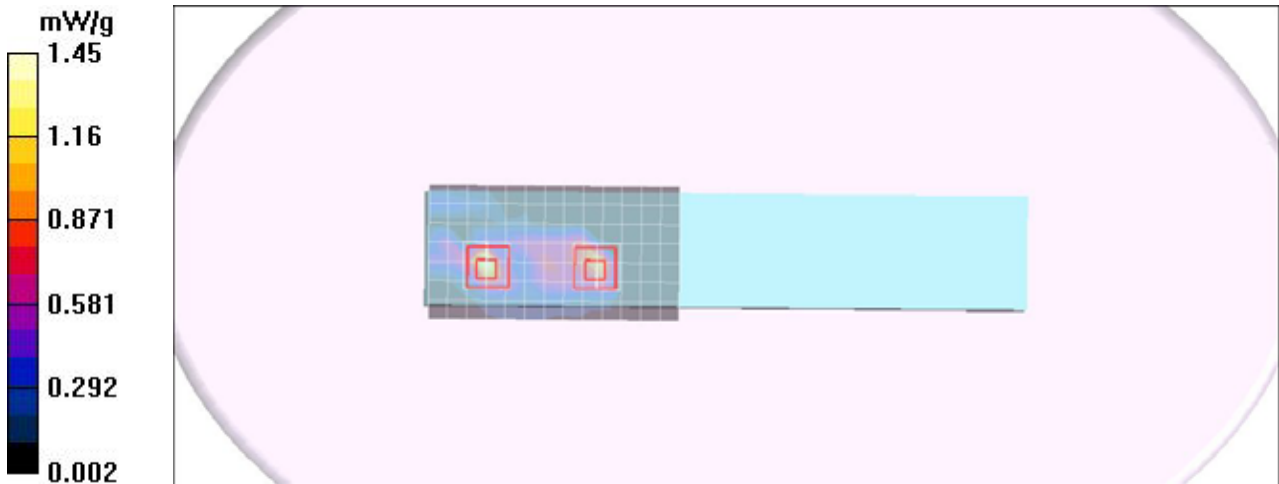

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5700 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5700$ MHz; $\sigma = 6.07$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.3, 3.3, 3.3);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5700 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.15 mW/g


CH5700 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.494 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 0.629 mW/g; SAR(10 g) = 0.268 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

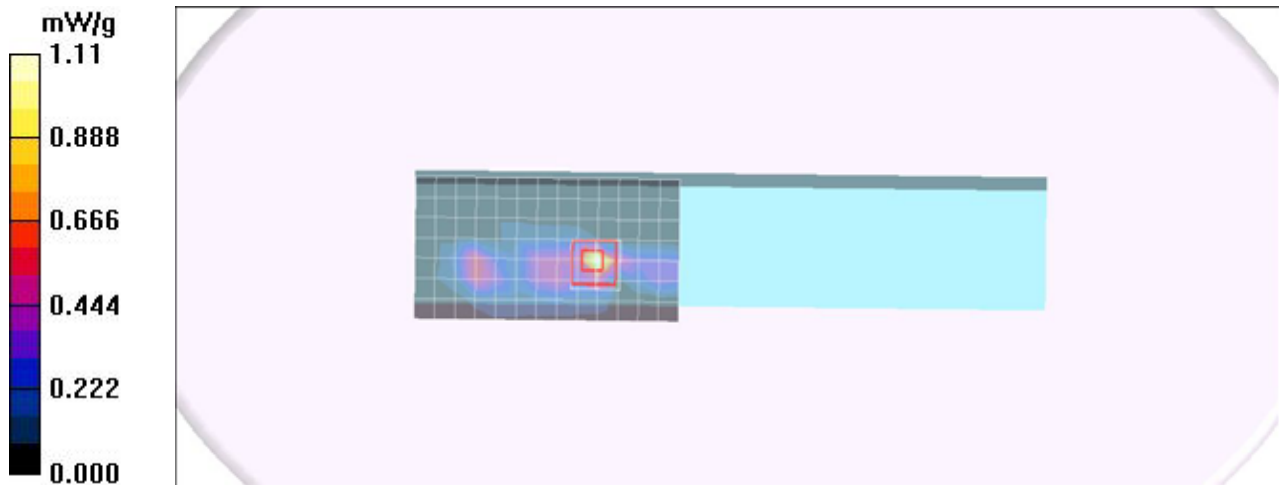

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.07$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5745 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 0.826 mW/g

CH5745 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.92 V/m; Power Drift = -0.098 dB
Peak SAR (extrapolated) = 3.22 W/kg
SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.262 mW/g
Maximum value of SAR (measured) = 1.32 mW/g

CH5745 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.92 V/m; Power Drift = -0.098 dB
Peak SAR (extrapolated) = 2.53 W/kg
SAR(1 g) = 0.693 mW/g; SAR(10 g) = 0.188 mW/g
Maximum value of SAR (measured) = 1.33 mW/g

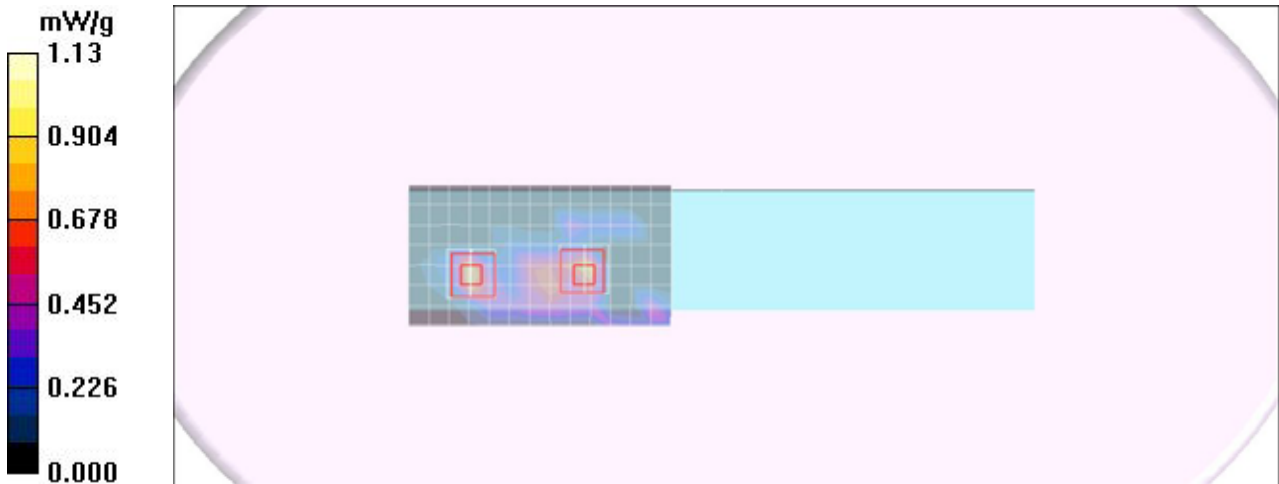

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5765 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5765$ MHz; $\sigma = 6.18$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5805 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 1.12 mW/g

CH5805 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.23 V/m; Power Drift = -0.109 dB
Peak SAR (extrapolated) = 3.10 W/kg
SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.280 mW/g
Maximum value of SAR (measured) = 1.56 mW/g

CH5805 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.23 V/m; Power Drift = -0.109 dB
Peak SAR (extrapolated) = 3.22 W/kg
SAR(1 g) = 0.773 mW/g; SAR(10 g) = 0.278 mW/g
Maximum value of SAR (measured) = 1.27 mW/g

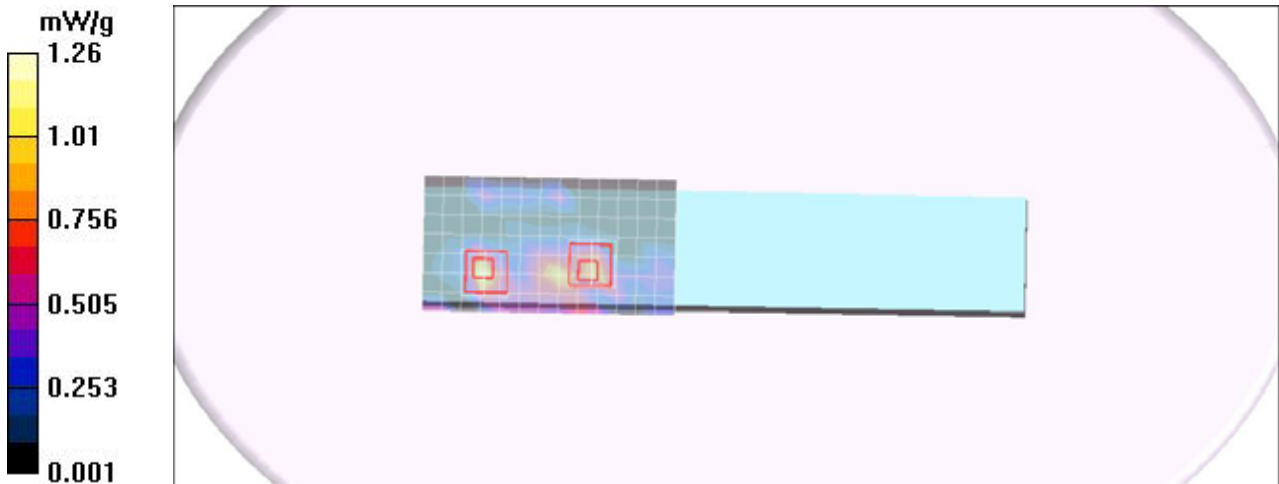

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(A) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.47$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5280 Rate=6.5M/Area Scan (9x16x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 0.504 mW/g

CH5280 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.29 V/m; Power Drift = -0.074 dB
Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.098 mW/g
Maximum value of SAR (measured) = 0.666 mW/g

CH5280 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.29 V/m; Power Drift = -0.074 dB
Peak SAR (extrapolated) = 0.918 W/kg
SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.072 mW/g
Maximum value of SAR (measured) = 0.485 mW/g

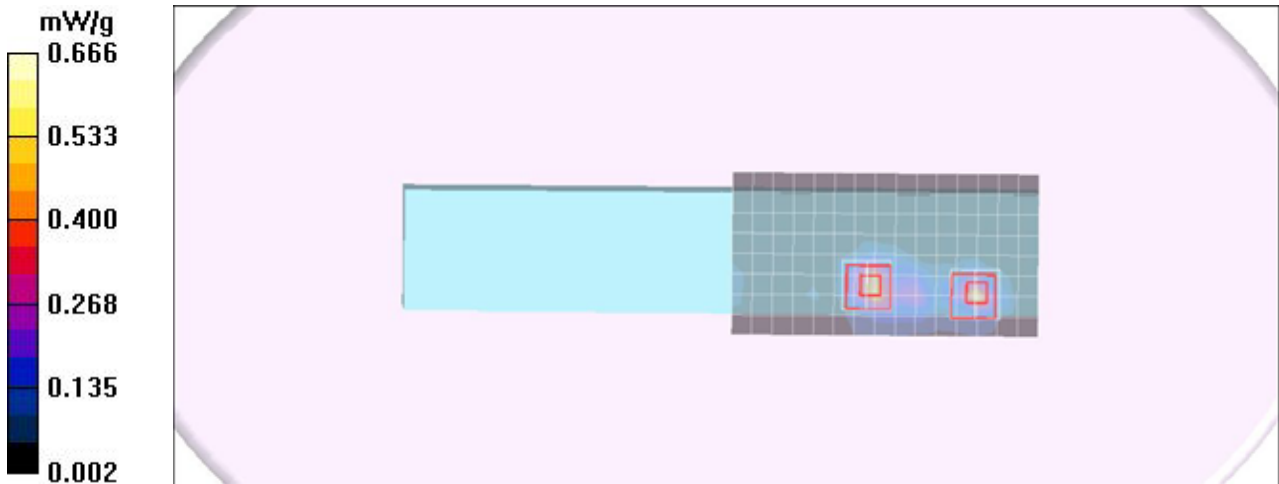

Test Laboratory: Compliance Certification Services Inc.

80211a Left Edge mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5280 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.264 mW/g

CH5280 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.67 V/m; Power Drift = -0.055 dB
Peak SAR (extrapolated) = 0.559 W/kg
SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.074 mW/g
Maximum value of SAR (measured) = 0.339 mW/g

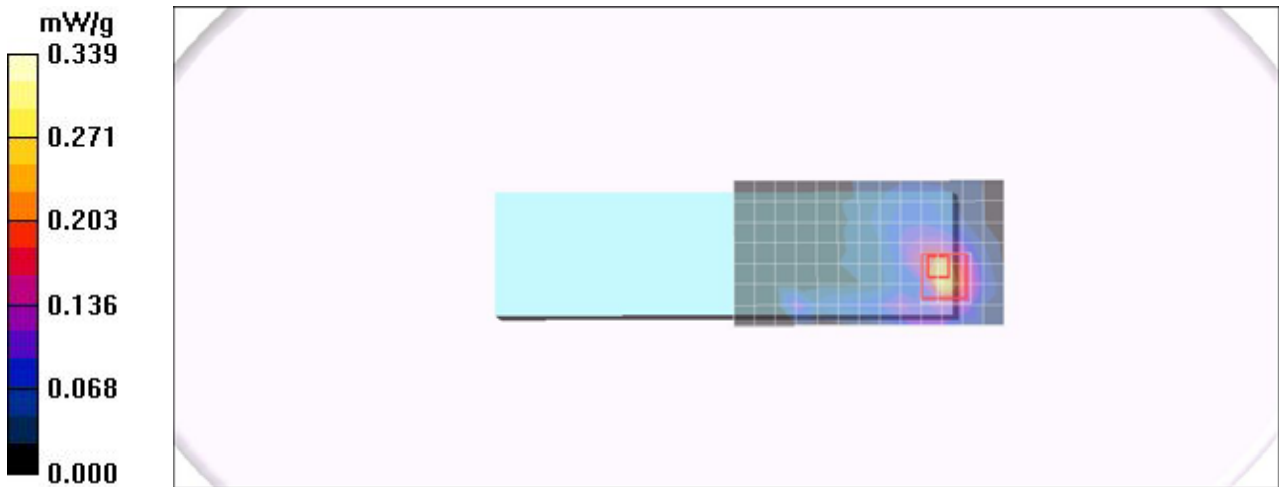

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom Tablet mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5280 Rate=6.5M/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.028 mW/g

CH5280 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = -0.099 dB
Peak SAR (extrapolated) = 0.249 W/kg
SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00365 mW/g
Maximum value of SAR (measured) = 0.035 mW/g

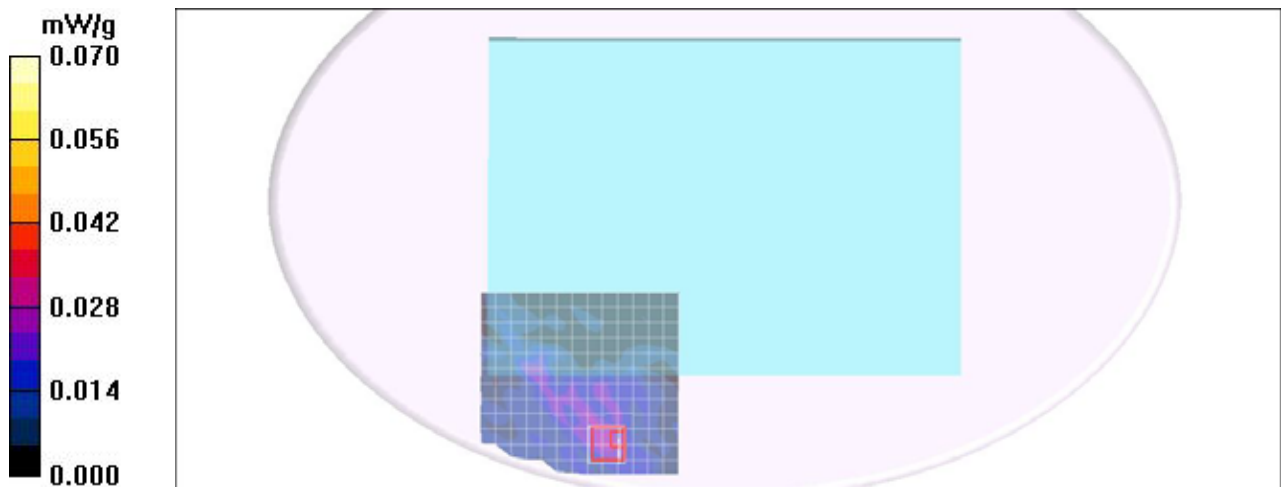

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom NB mode V1002X antenna AB(B) HT20

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5280 Rate=6.5M/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.074 mW/g

CH5280 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.30 V/m; Power Drift = -0.036 dB
Peak SAR (extrapolated) = 0.106 W/kg
SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.052 mW/g
Maximum value of SAR (measured) = 0.105 mW/g

CH5280 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.30 V/m; Power Drift = -0.036 dB
Peak SAR (extrapolated) = 0.114 W/kg
SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.052 mW/g
Maximum value of SAR (measured) = 0.096 mW/g

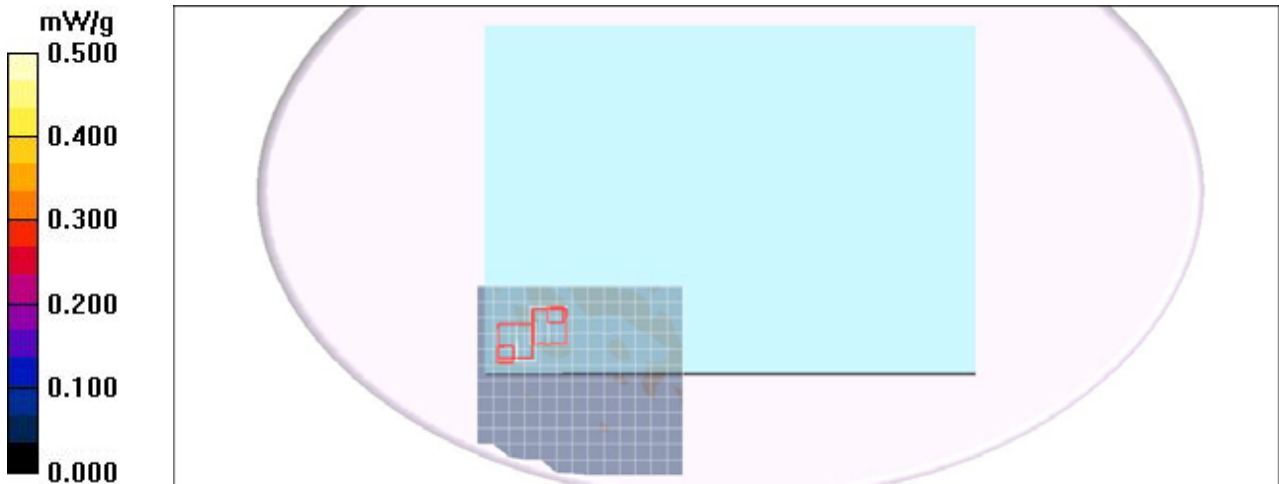

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(A) HT40

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11A HT40; Frequency: 5670 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5670$ MHz; $\sigma = 6.04$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.3, 3.3, 3.3);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5670 Rate=13.5M/Area Scan (9x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.597 mW/g

CH5670 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.61 V/m; Power Drift = -0.084 dB
Peak SAR (extrapolated) = 0.785 W/kg
SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.077 mW/g
Maximum value of SAR (measured) = 0.778 mW/g

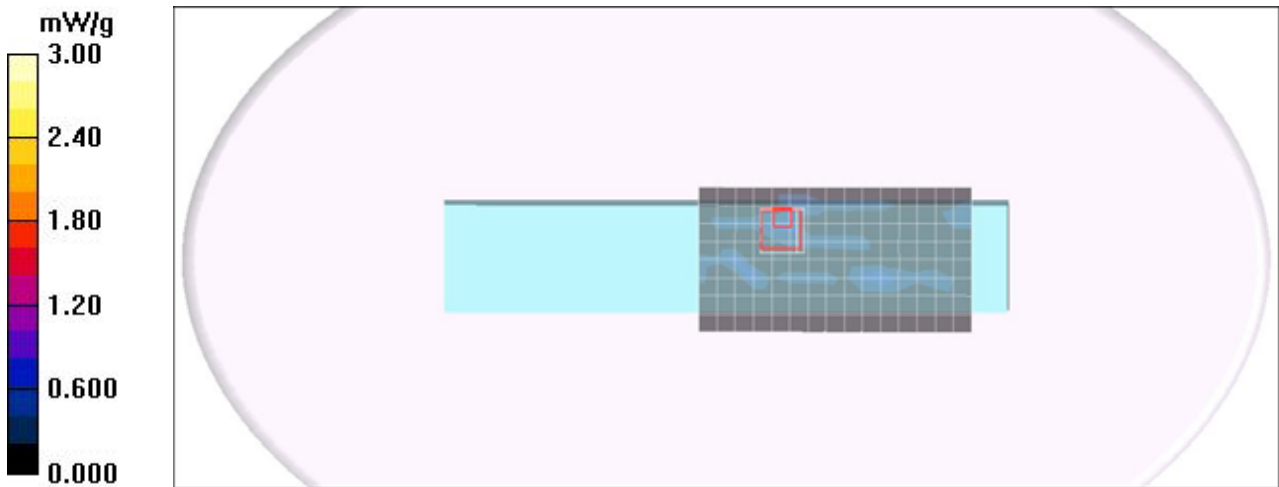

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT40

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11A HT40; Frequency: 5670 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5670$ MHz; $\sigma = 6.04$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.3, 3.3, 3.3);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5670 Rate=13.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.07 mW/g

CH5670 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.29 V/m; Power Drift = -0.075 dB
Peak SAR (extrapolated) = 2.68 W/kg
SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.230 mW/g
Maximum value of SAR (measured) = 1.31 mW/g

CH5670 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.29 V/m; Power Drift = -0.075 dB
Peak SAR (extrapolated) = 4.50 W/kg
SAR(1 g) = 0.773 mW/g; SAR(10 g) = 0.318 mW/g
Maximum value of SAR (measured) = 1.35 mW/g

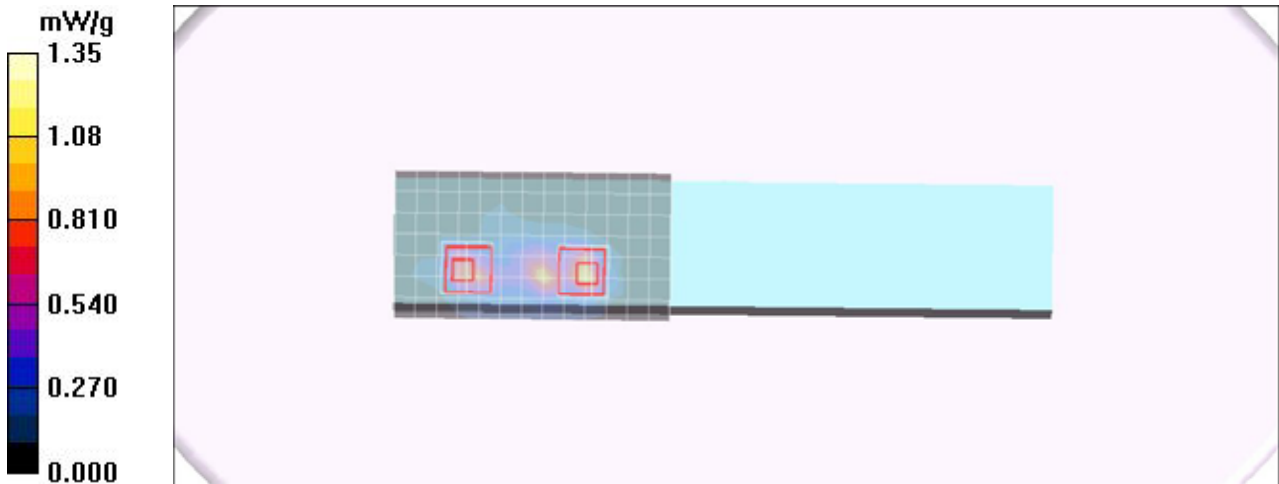

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT40

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11A HT40; Frequency: 5190 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5190$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 49$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.8, 3.8, 3.8);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5190 Rate=13.5M/Area Scan (8x14x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.468 mW/g


CH5190 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0:

Reference Value = 1.02 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 0.497 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.860 mW/g

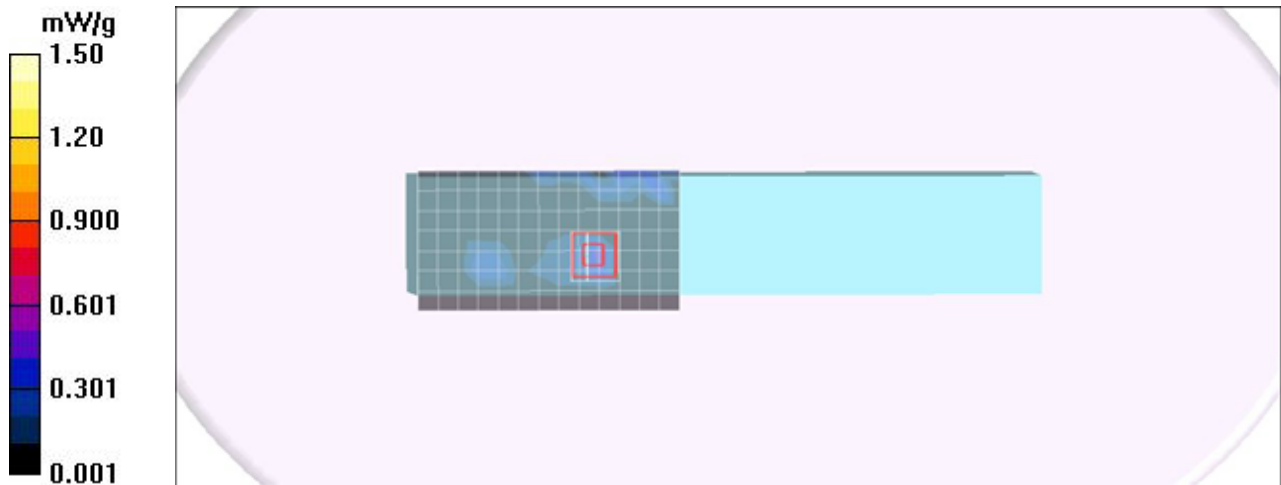

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT40

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11A HT40; Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 48.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5270 Rate=13.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.57 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 3.80 V/m; Power Drift = -0.076 dB
Peak SAR (extrapolated) = 3.73 W/kg
SAR(1 g) = 1.010 mW/g; SAR(10 g) = 0.346 mW/g
Maximum value of SAR (measured) = 1.90 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 3.80 V/m; Power Drift = -0.076 dB
Peak SAR (extrapolated) = 3.45 W/kg
SAR(1 g) = 1.010 mW/g; SAR(10 g) = 0.283 mW/g
Maximum value of SAR (measured) = 1.79 mW/g

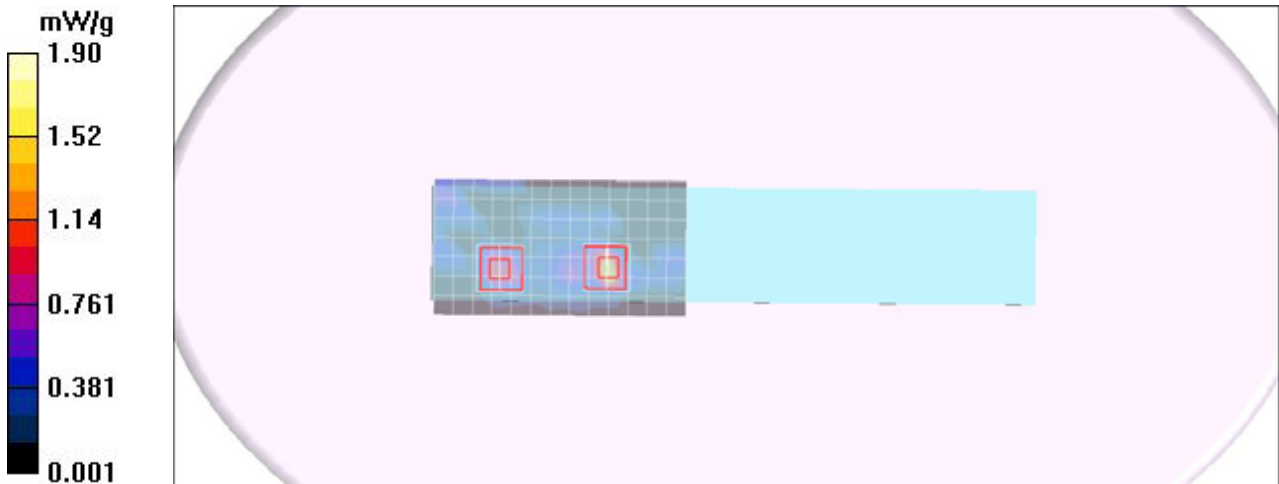

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(B) HT40

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11A HT40; Frequency: 5795 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 6.14$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5795 Rate=13.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.19 mW/g

CH5795 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 9.06 V/m; Power Drift = -0.094 dB
Peak SAR (extrapolated) = 3.26 W/kg
SAR(1 g) = 0.809 mW/g; SAR(10 g) = 0.261 mW/g
Maximum value of SAR (measured) = 1.46 mW/g

CH5795 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 9.06 V/m; Power Drift = -0.094 dB
Peak SAR (extrapolated) = 3.10 W/kg
SAR(1 g) = 1.050 mW/g; SAR(10 g) = 0.337 mW/g
Maximum value of SAR (measured) = 1.87 mW/g

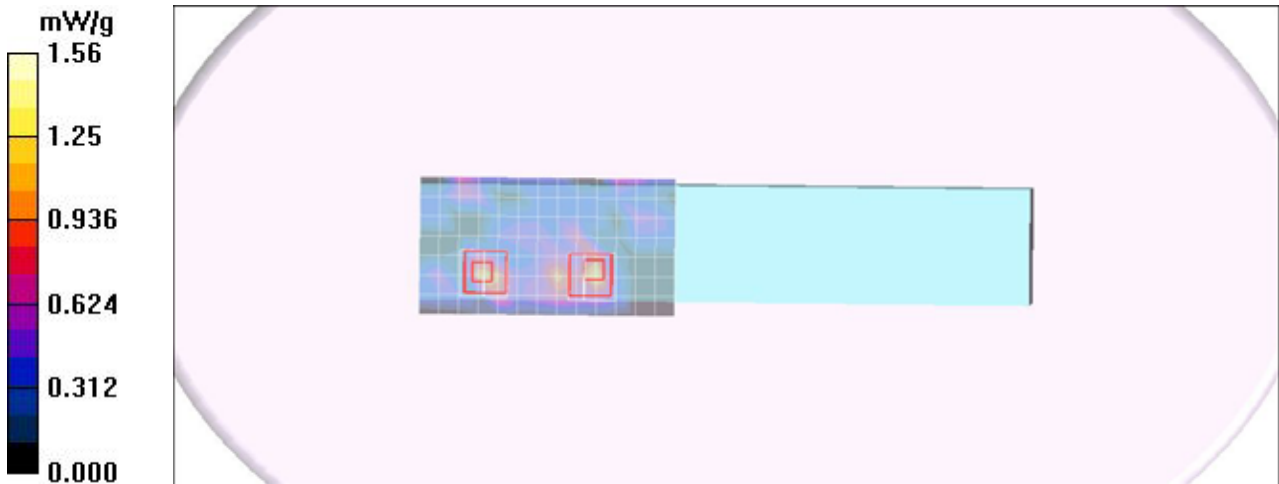

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V1002X antenna AB(A) HT40

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11A HT40; Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 48.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5270 Rate=13.5M/Area Scan (8x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.644 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 7.07 V/m; Power Drift = -0.130 dB
Peak SAR (extrapolated) = 1.21 W/kg
SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.078 mW/g
Maximum value of SAR (measured) = 0.825 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 7.07 V/m; Power Drift = -0.130 dB
Peak SAR (extrapolated) = 0.832 W/kg
SAR(1 g) = 0.245 mW/g; SAR(10 g) = 0.081 mW/g
Maximum value of SAR (measured) = 0.623 mW/g

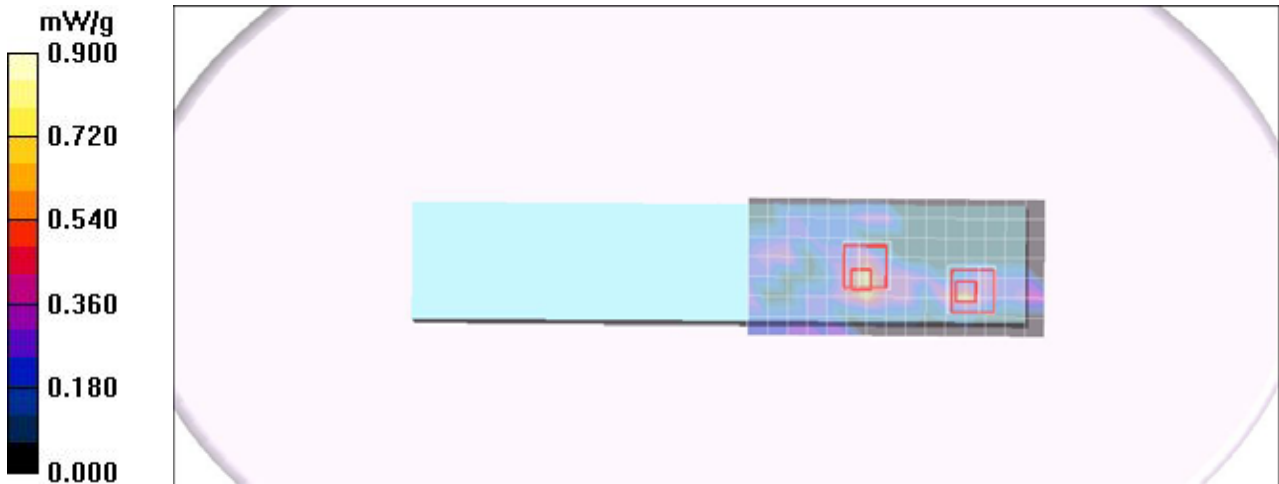

Test Laboratory: Compliance Certification Services Inc.

80211a Left Edge mode V1002X antenna AB(B) HT40

DUT: V1002X; Type: V1002X; Serial: N/A


Communication System: IEEE 802.11A HT40; Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5270 Rate=13.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.320 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 5.24 V/m; Power Drift = -0.094 dB
Peak SAR (extrapolated) = 0.446 W/kg
SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.033 mW/g
Maximum value of SAR (measured) = 0.223 mW/g

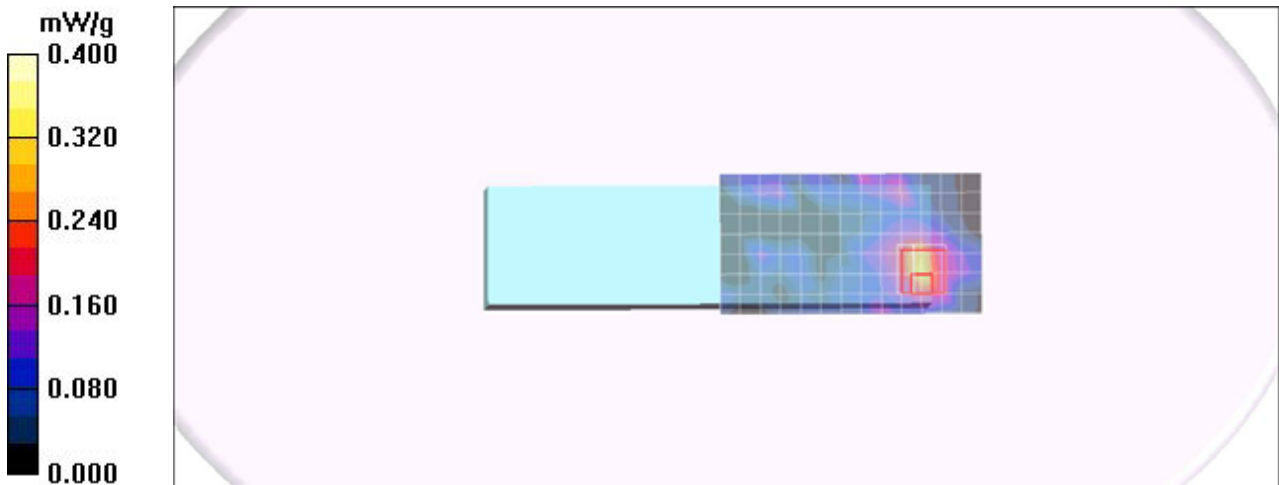

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom Tablet mode V1002X antenna AB(B) HT40

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11A HT40; Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5270 Rate=13.5M/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.552 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 0.000 V/m; Power Drift = -0.099 dB
Peak SAR (extrapolated) = 0.875 W/kg
SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.069 mW/g
Maximum value of SAR (measured) = 0.845 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 0.000 V/m; Power Drift = -0.099 dB
Peak SAR (extrapolated) = 1.05 W/kg
SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.012 mW/g
Maximum value of SAR (measured) = 0.650 mW/g

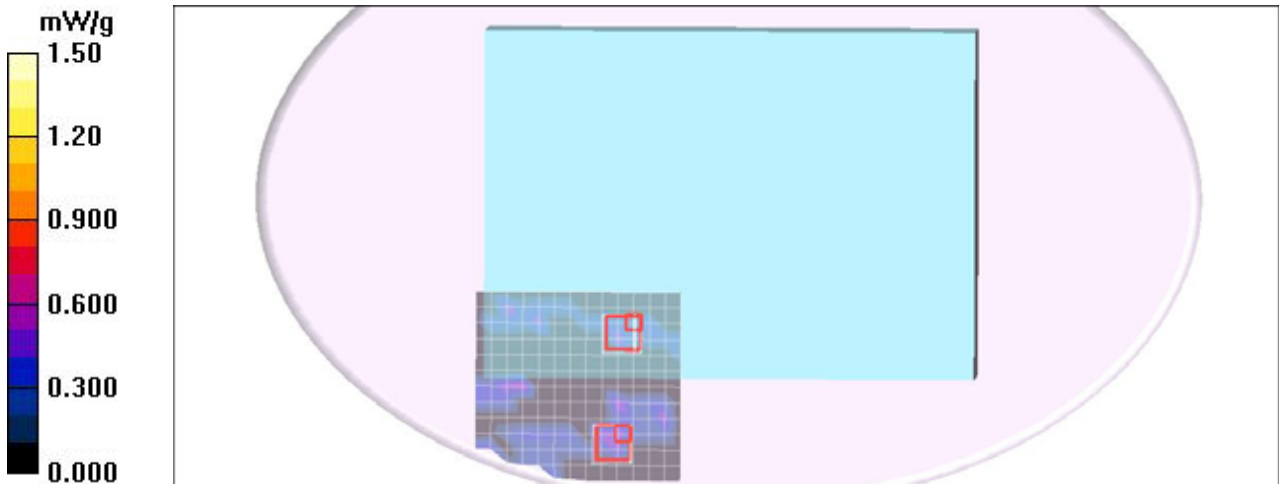

Test Laboratory: Compliance Certification Services Inc.

80211a NB Tablet mode V1002X antenna AB(B) HT40

DUT: V1002X; Type: V1002X; Serial: N/A

Communication System: IEEE 802.11A HT40; Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5270 Rate=13.5M/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.682 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.859 V/m; Power Drift = -0.096 dB
Peak SAR (extrapolated) = 0.780 W/kg
SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.035 mW/g
Maximum value of SAR (measured) = 0.765 mW/g

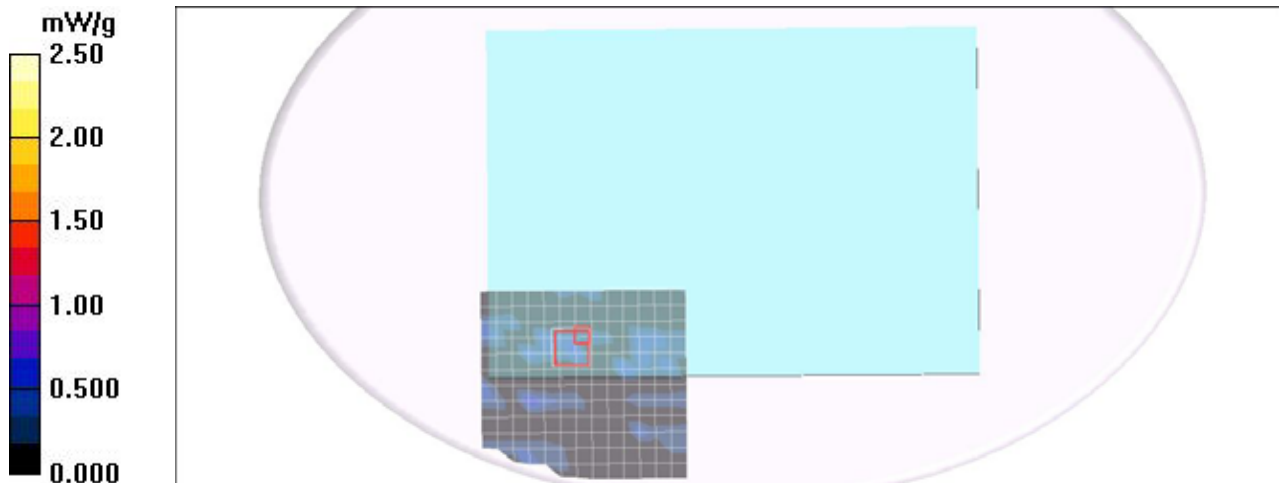

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna A

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.24$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5825 Rate=6M/Area Scan (8x33x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.543 mW/g


CH5825 Rate=6M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 15.2 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 0.882 W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

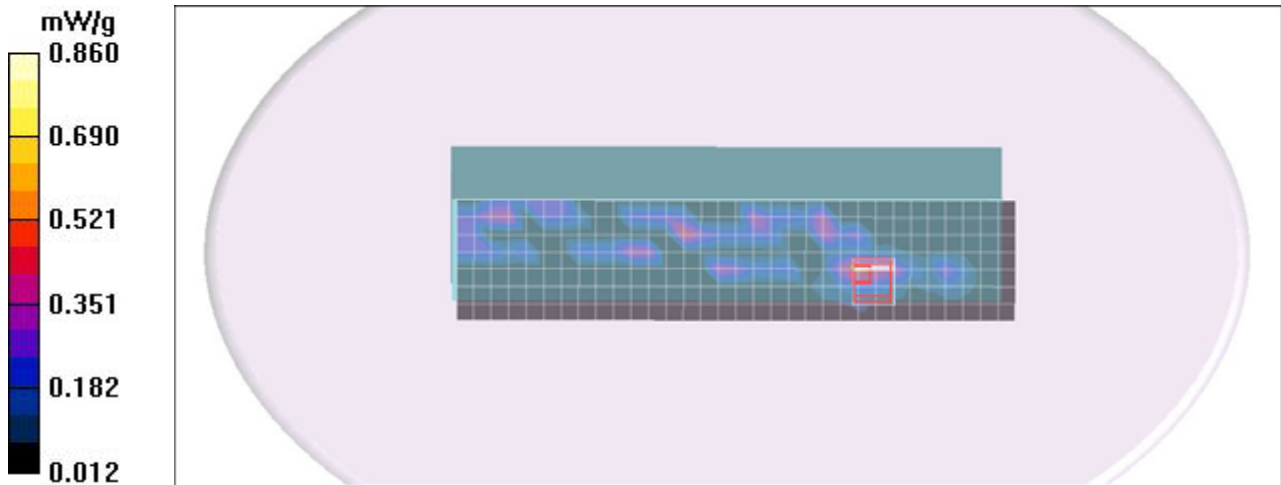

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5700 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5700$ MHz; $\sigma = 6.14$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5700 Rate=6M/Area Scan (8x33x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.868 mW/g

CH5700 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.13 V/m; Power Drift = -0.088 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.902 mW/g



CH5700 Rate=6M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.13 V/m; Power Drift = -0.088 dB

Peak SAR (extrapolated) = 4.16 W/kg

SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

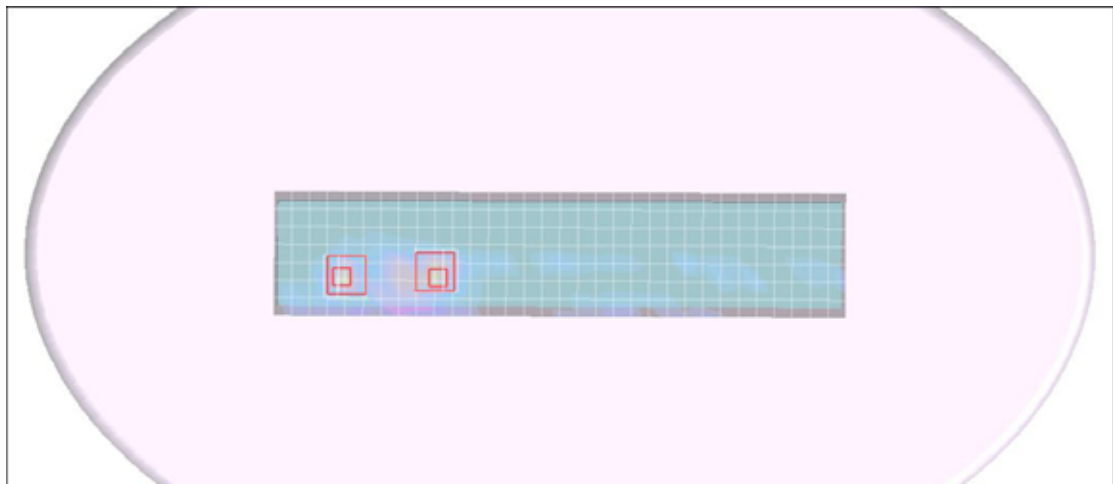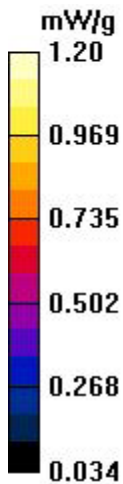

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.8, 3.8, 3.8);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5200 Rate=6M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.444 mW/g


CH5200 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.75 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.369 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.723 mW/g

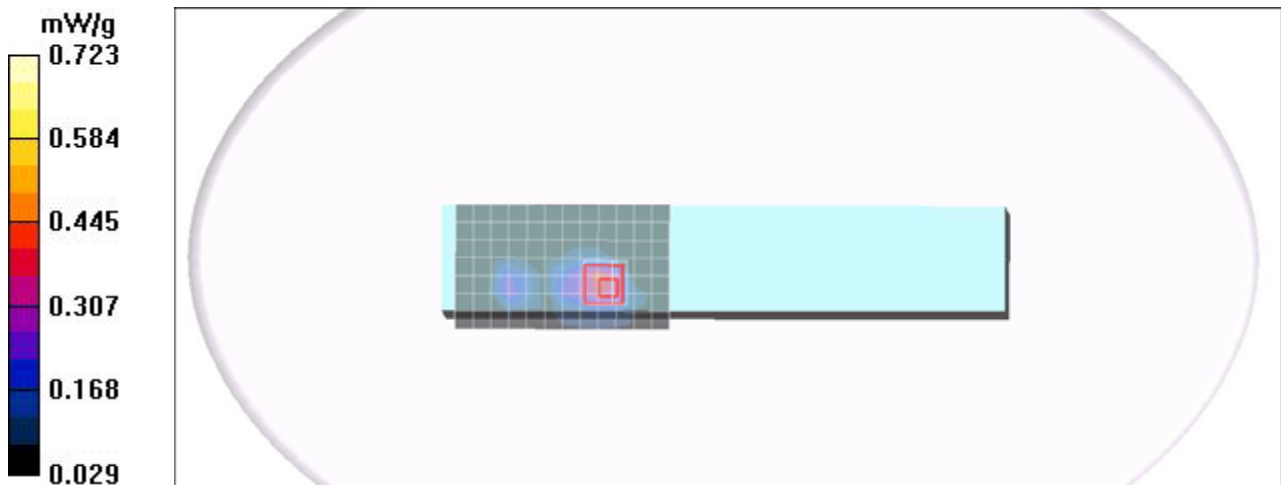

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.8, 3.8, 3.8);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5240 Rate=6M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.401 mW/g

CH5240 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.97 V/m; Power Drift = -0.082 dB
Peak SAR (extrapolated) = 1.25 W/kg
SAR(1 g) = 0.343 mW/g; SAR(10 g) = 0.137 mW/g
Maximum value of SAR (measured) = 0.601 mW/g

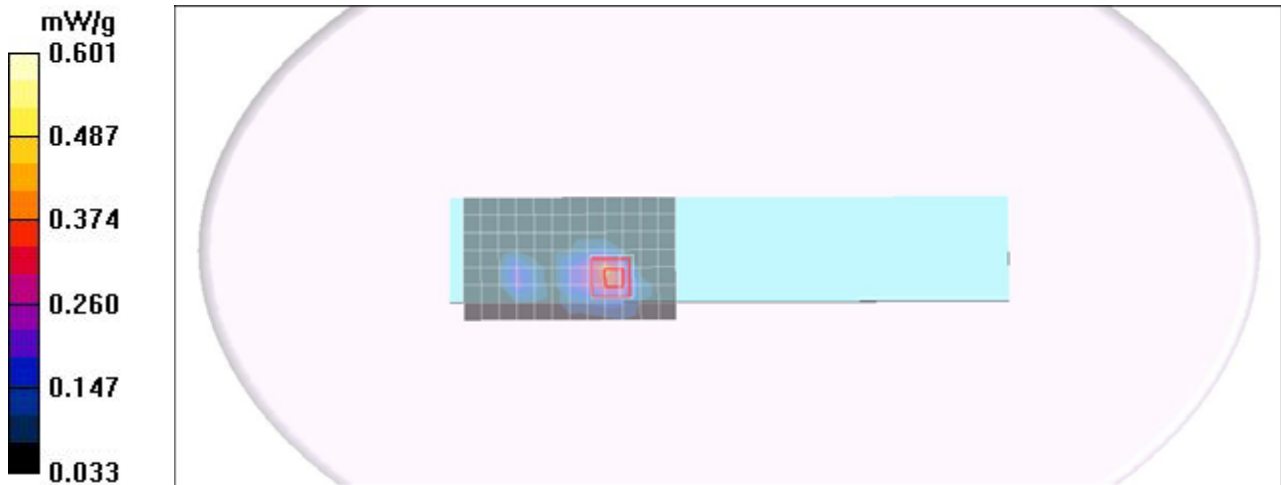

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.53$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5280 Rate=6M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.857 mW/g

CH5280 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.13 V/m; Power Drift = -0.056 dB
Peak SAR (extrapolated) = 1.95 W/kg
SAR(1 g) = 0.625 mW/g; SAR(10 g) = 0.244 mW/g
Maximum value of SAR (measured) = 1.03 mW/g

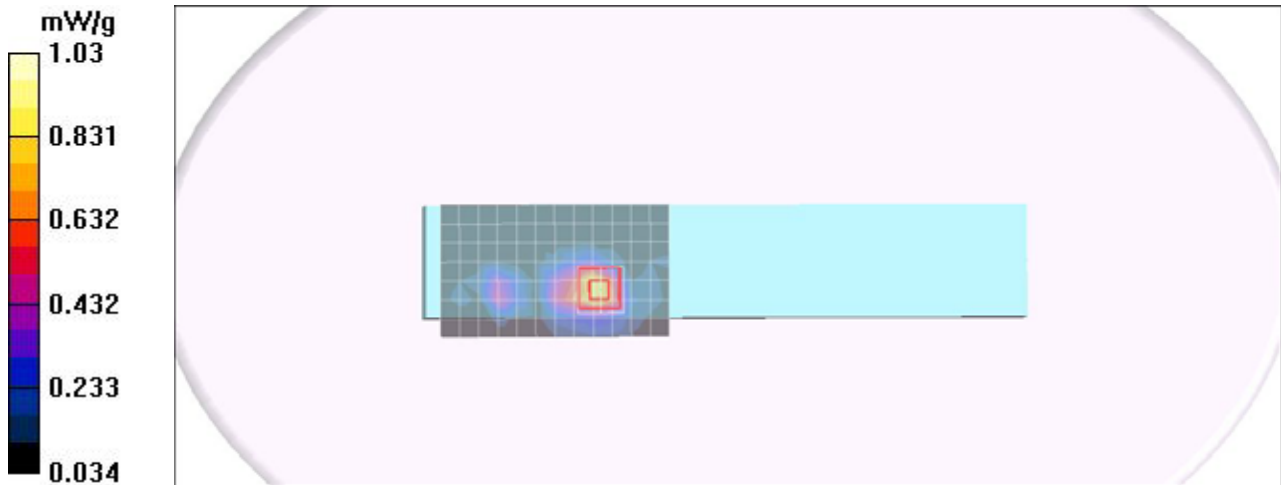

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.53$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5300 Rate=6M MAX/Area Scan (8x13x1):

Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.25 mW/g

CH5300 Rate=6M MAX/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 5.03 V/m; Power Drift = -0.123 dB
Peak SAR (extrapolated) = 3.75 W/kg
SAR(1 g) = 0.887 mW/g; SAR(10 g) = 0.398 mW/g
Maximum value of SAR (measured) = 1.66 mW/g

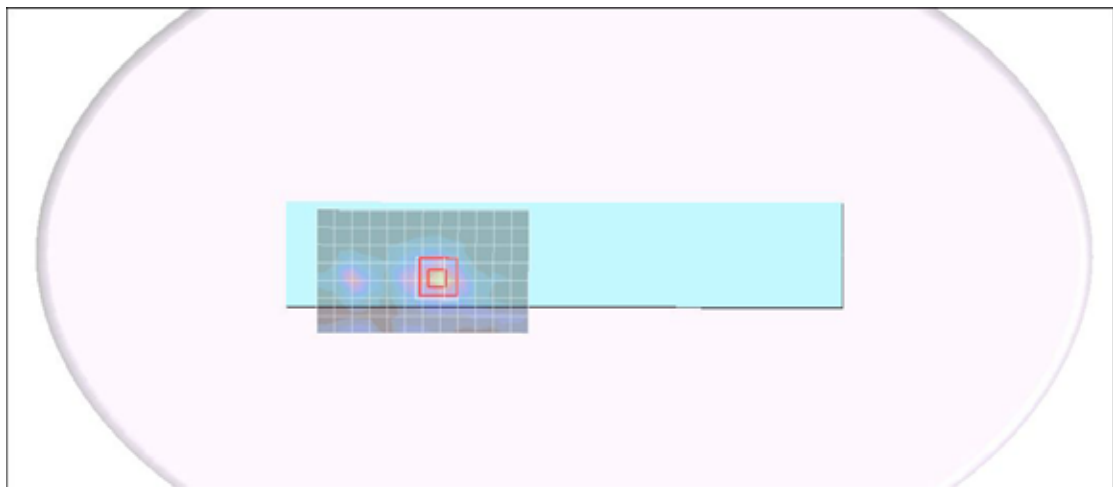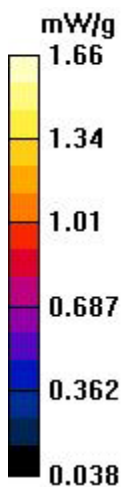

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5520 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5520$ MHz; $\sigma = 5.8$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.37, 3.37, 3.37);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5520 Rate=6M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.873 mW/g


CH5520 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.13 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.925 mW/g

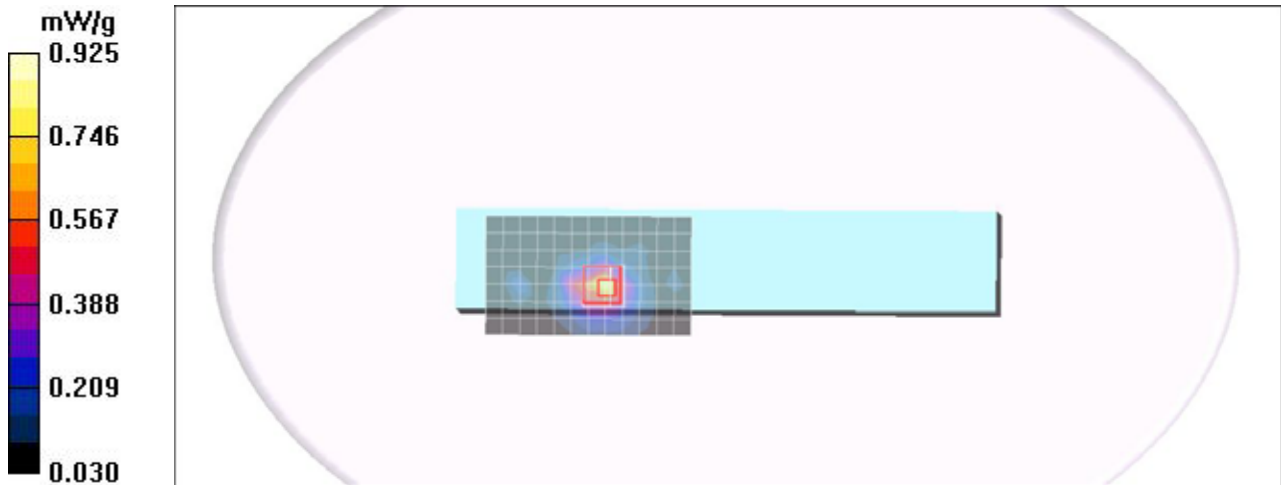

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5580 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5580$ MHz; $\sigma = 5.98$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.3, 3.3, 3.3);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5580 Rate=6M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.999 mW/g

CH5580 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.88 V/m; Power Drift = -0.065 dB
Peak SAR (extrapolated) = 1.81 W/kg
SAR(1 g) = 0.686 mW/g; SAR(10 g) = 0.290 mW/g
Maximum value of SAR (measured) = 1.20 mW/g

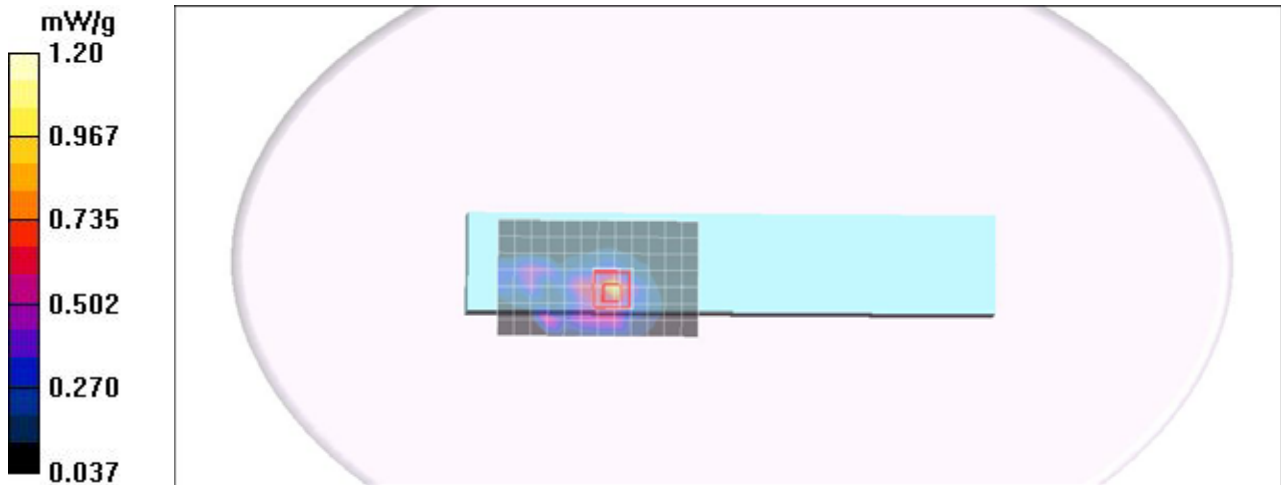

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5620 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5620$ MHz; $\sigma = 5.98$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.3, 3.3, 3.3);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5620 Rate=6M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.988 mW/g

CH5620 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.38 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.190 mW/g

Maximum value of SAR (measured) = 0.757 mW/g



CH5620 Rate=6M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.38 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.699 mW/g; SAR(10 g) = 0.263 mW/g

Maximum value of SAR (measured) = 1.39 mW/g

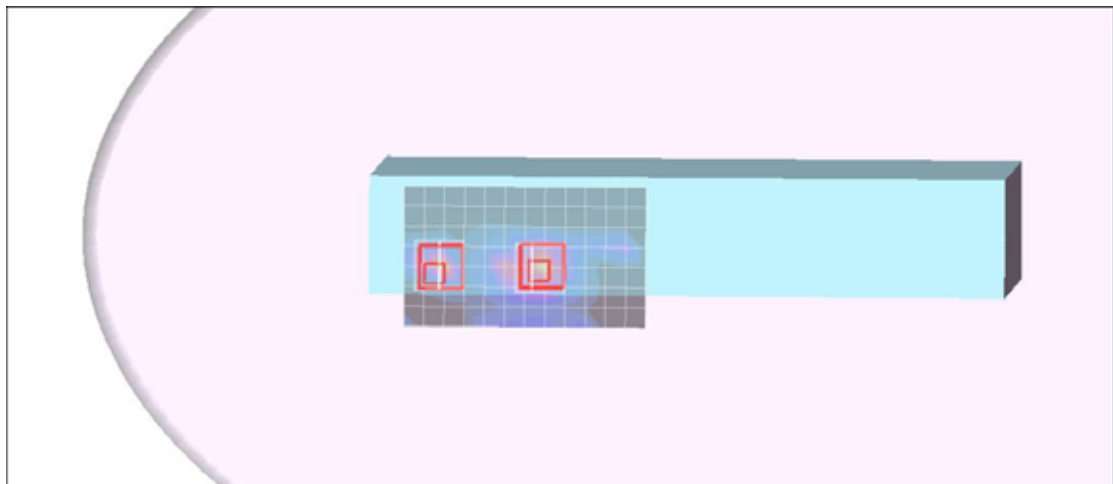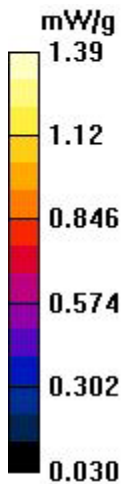

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5765 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5765$ MHz; $\sigma = 6.24$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5765 Rate=6M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.04 mW/g

CH5765 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.65 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = **0.408 mW/g**; SAR(10 g) = **0.206 mW/g**

Maximum value of SAR (measured) = 0.801 mW/g



CH5765 Rate=6M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.65 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = **0.562 mW/g**; SAR(10 g) = **0.238 mW/g**

Maximum value of SAR (measured) = 1.03 mW/g

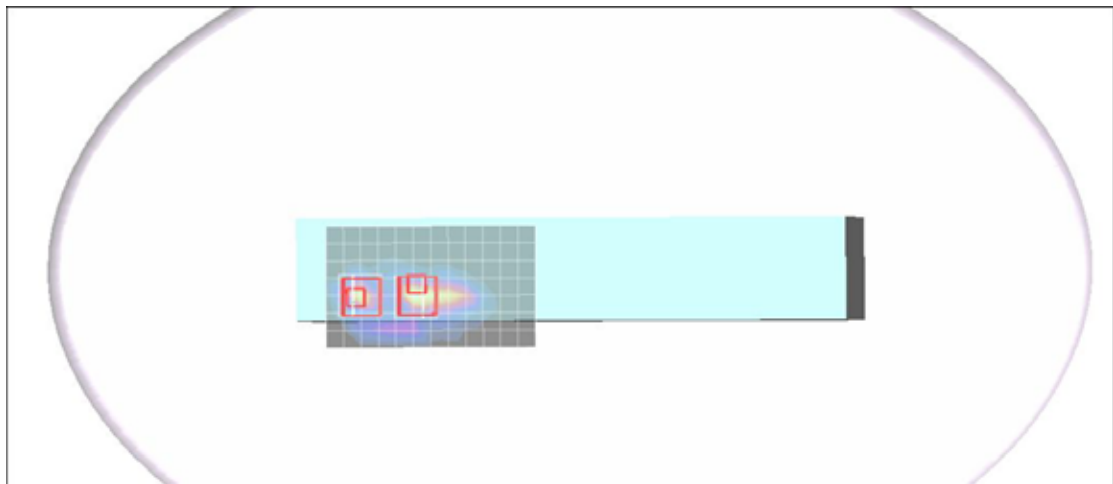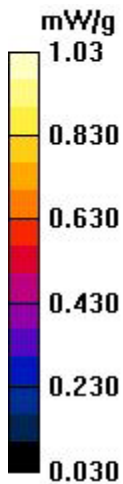

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5805 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5805$ MHz; $\sigma = 6.24$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5805 Rate=6M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.02 mW/g


CH5805 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.58 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 4.28 W/kg

SAR(1 g) = 0.609 mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 1.38 mW/g

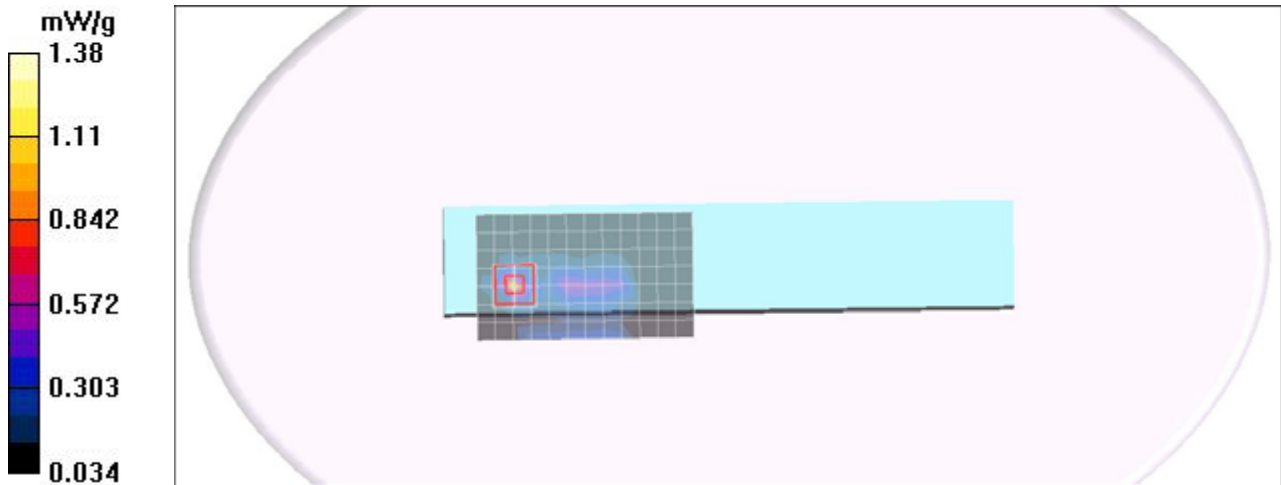

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna A

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.53$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5300 Rate=6M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.14 mW/g


CH5300 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.31 V/m; Power Drift = 1.73 dB

Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 0.749 mW/g; SAR(10 g) = 0.265 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

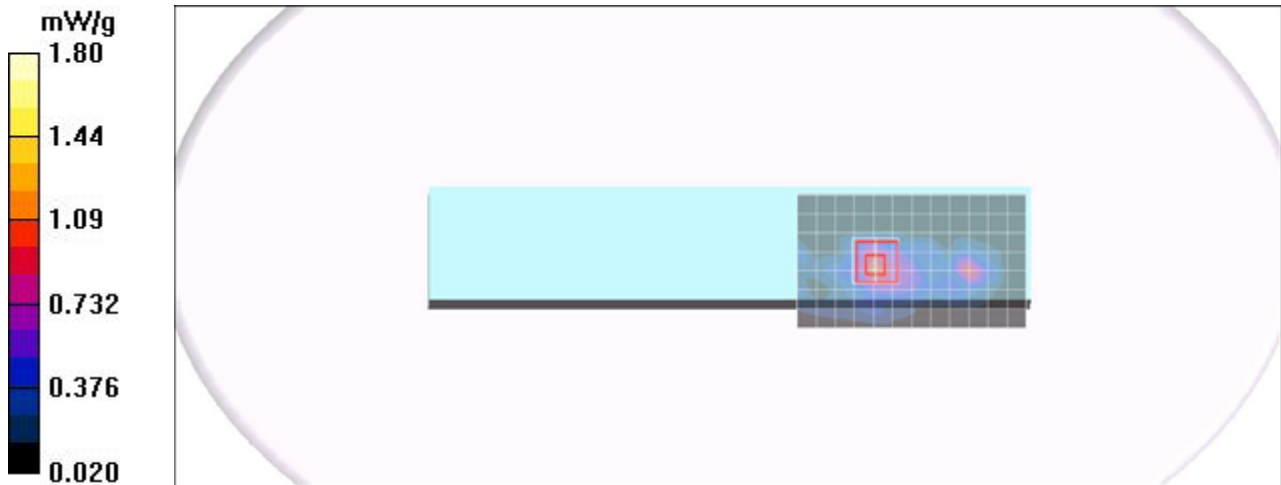

Test Laboratory: Compliance Certification Services Inc.

80211a Left Edge mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5300 Rate=6M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.246 mW/g

CH5300 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.50 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.079 mW/g



CH5300 Rate=6M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.50 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

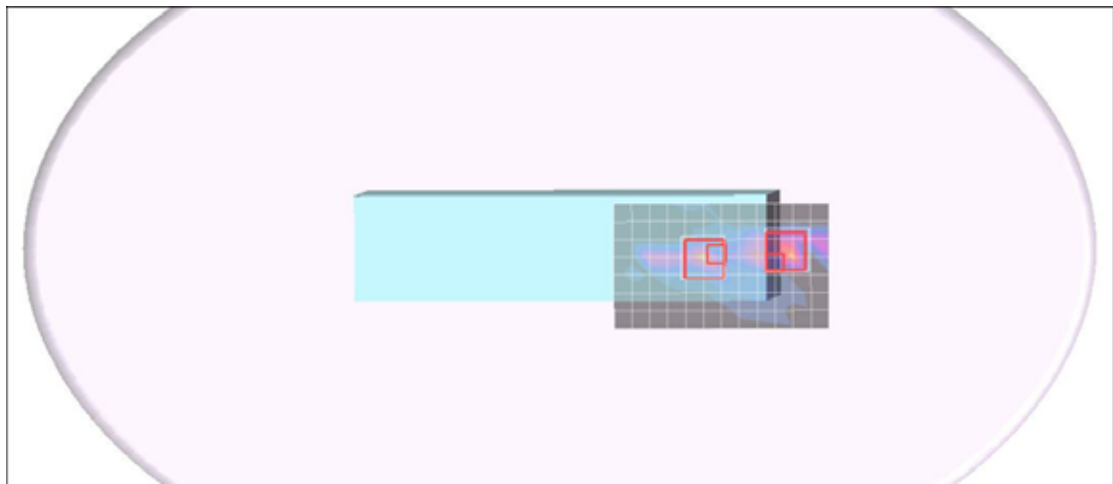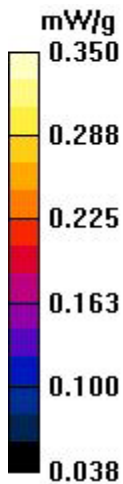

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom Tablet mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5300 Rate=6M/Area Scan (9x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.053 mW/g

CH5300 Rate=6M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.09 V/m; Power Drift = -0.101 dB
Peak SAR (extrapolated) = 0.227 W/kg
SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.065 mW/g
Maximum value of SAR (measured) = 0.197 mW/g

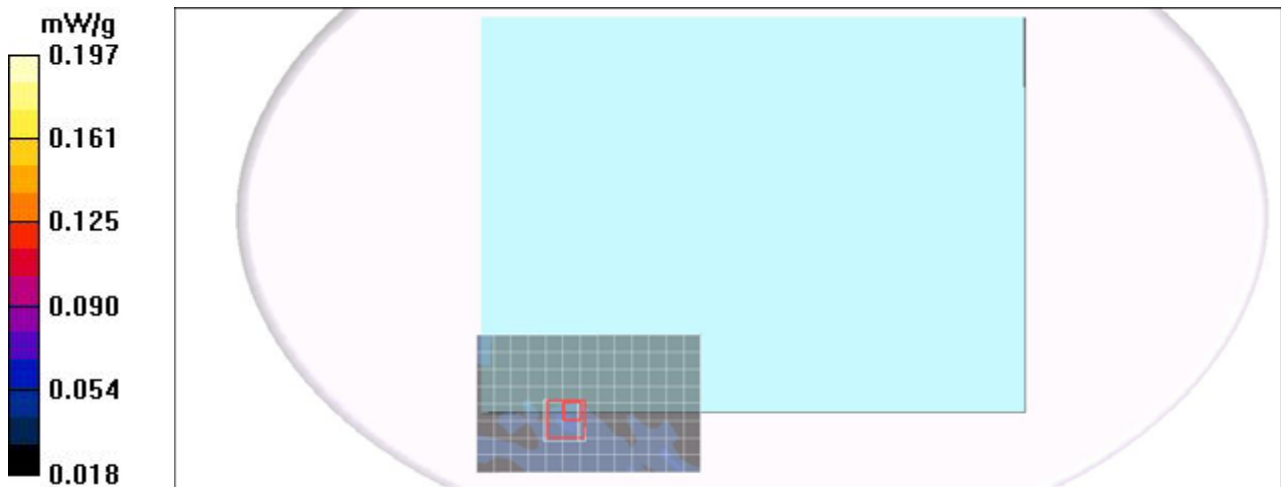

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom NB mode V200X antenna B

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11 A; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5300 Rate=6M/Area Scan (9x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.040 mW/g

CH5300 Rate=6M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.80 V/m; Power Drift = -0.120 dB
Peak SAR (extrapolated) = 0.087 W/kg
SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.035 mW/g
Maximum value of SAR (measured) = 0.059 mW/g

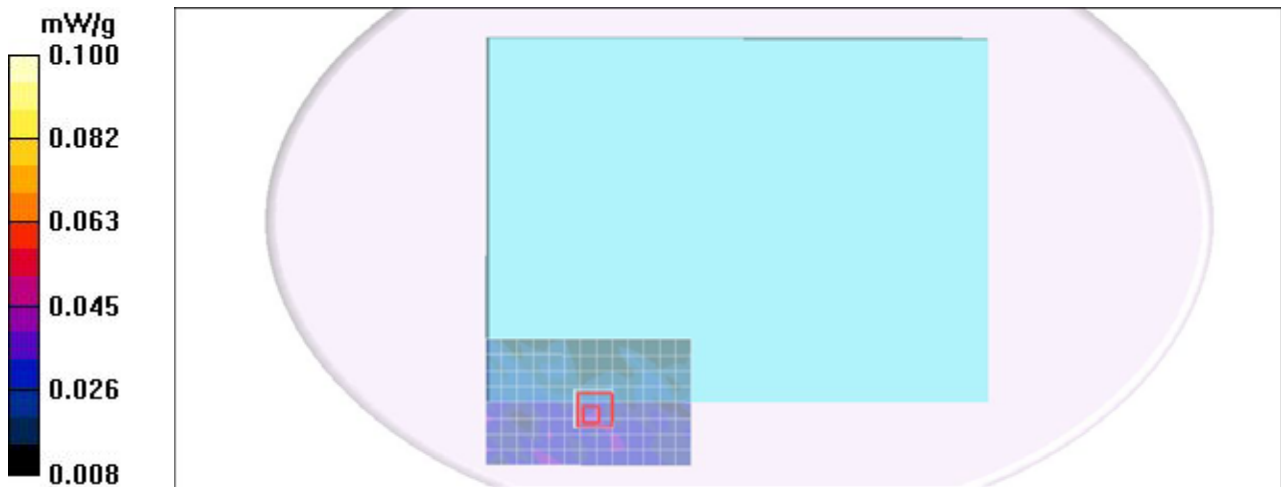

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(A) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.24$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5825 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 0.459 mW/g

CH5825 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.27 V/m; Power Drift = -0.093 dB
Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = **0.278 mW/g**; SAR(10 g) = **0.130 mW/g**
Maximum value of SAR (measured) = 0.447 mW/g

CH5825 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.27 V/m; Power Drift = -0.093 dB
Peak SAR (extrapolated) = 0.847 W/kg
SAR(1 g) = **0.223 mW/g**; SAR(10 g) = **0.093 mW/g**
Maximum value of SAR (measured) = 0.369 mW/g

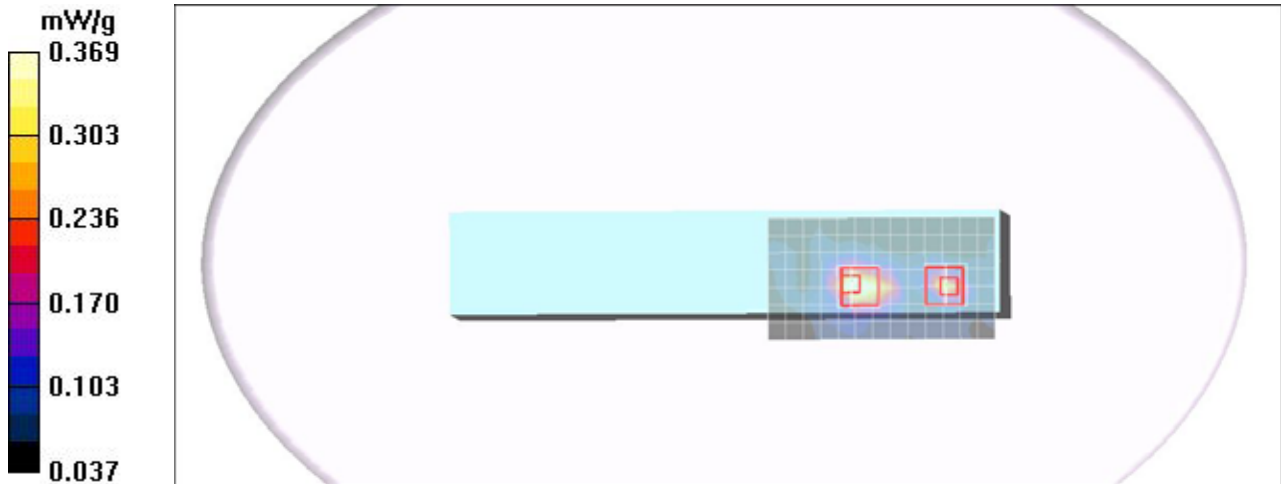

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.24$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5825 Rate=6.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.657 mW/g

CH5825 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.82 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.484 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.842 mW/g



CH5825 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.82 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.571 mW/g

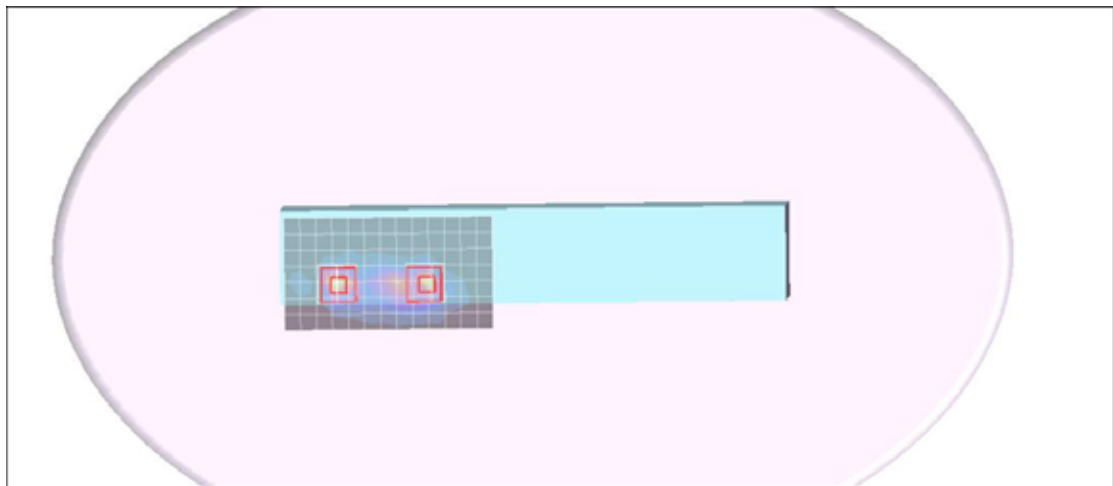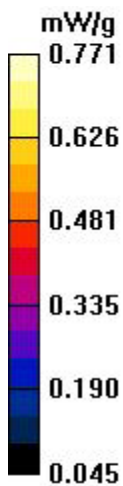

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 5.38 \text{ mho/m}$; $\epsilon_r = 48.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.8, 3.8, 3.8);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5180 Rate=6.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.174 mW/g

CH5180 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.74 V/m; Power Drift = -0.067 dB
Peak SAR (extrapolated) = 0.463 W/kg
SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.069 mW/g
Maximum value of SAR (measured) = 0.206 mW/g

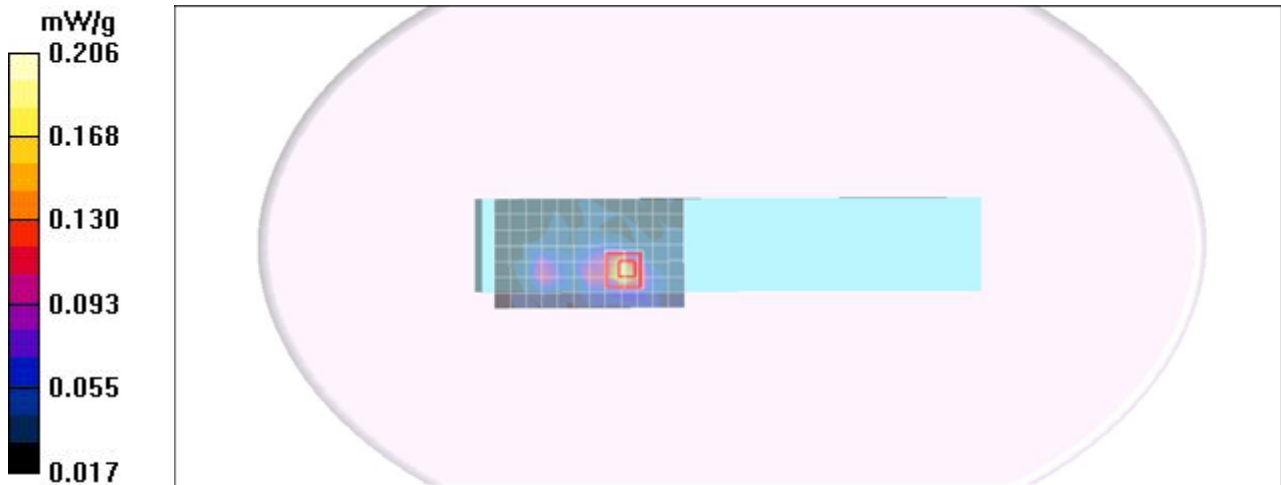

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.8, 3.8, 3.8);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5220 Rate=6.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.164 mW/g


CH5220 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.49 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.200 mW/g

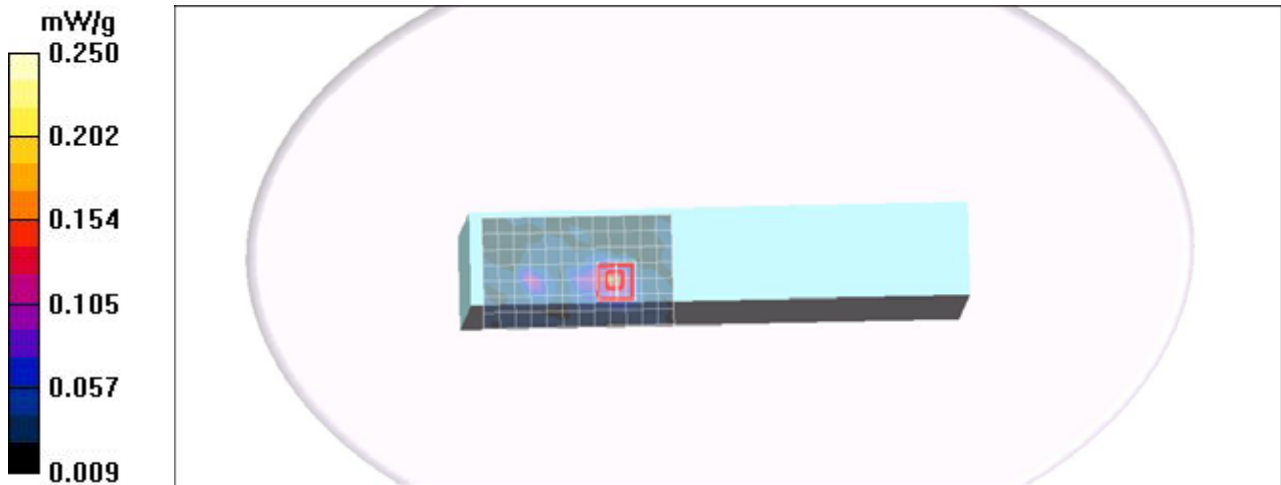

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.53$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5280 Rate=6.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.900 mW/g

CH5280 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.10 V/m; Power Drift = -0.056 dB
Peak SAR (extrapolated) = 1.84 W/kg
SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.228 mW/g
Maximum value of SAR (measured) = 0.981 mW/g

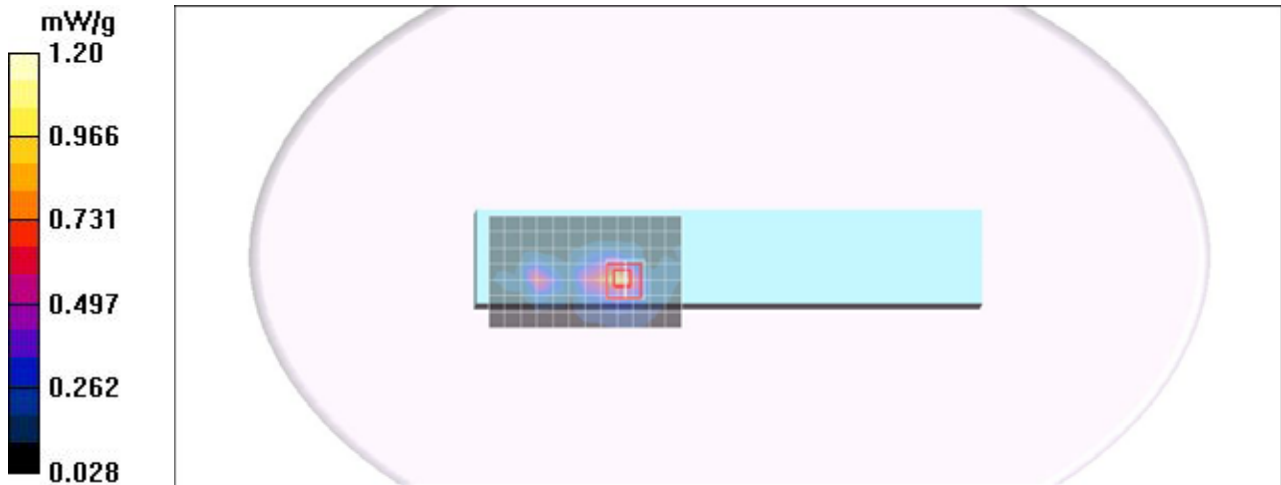

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.53$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5320 Rate=6.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 mW/g


CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.31 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.253 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

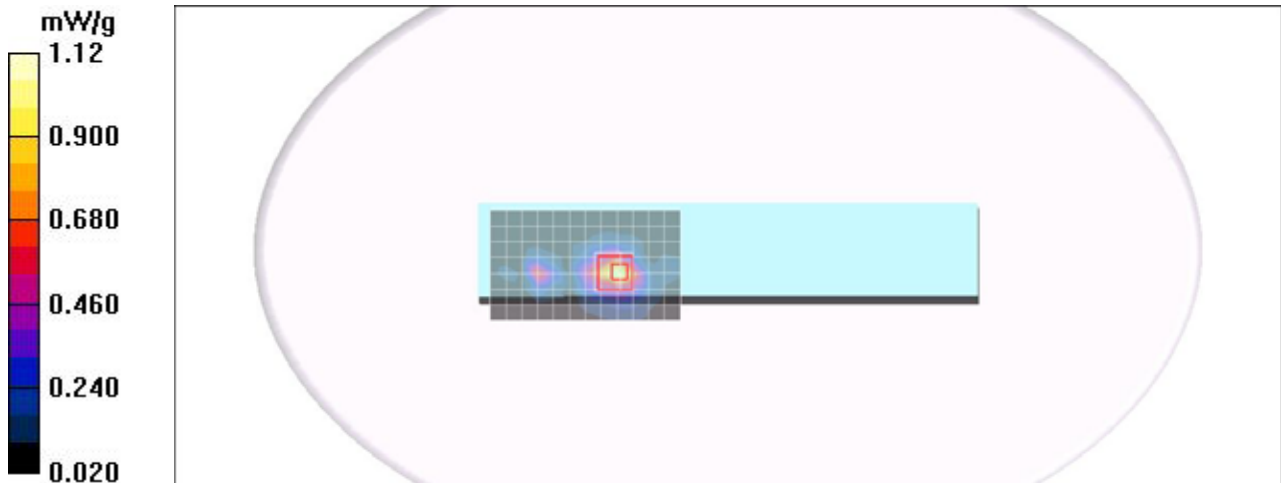

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5520 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.83$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.37, 3.37, 3.37);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5520 Rate=6.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.774 mW/g


CH5520 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.02 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.775 mW/g

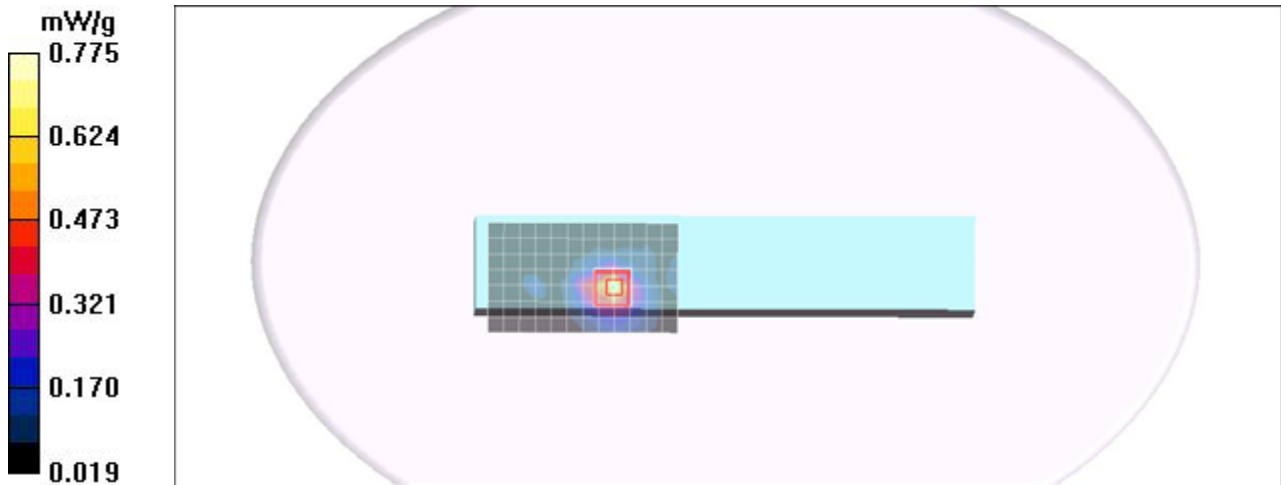

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.3, 3.3, 3.3);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5600 Rate=6.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.817 mW/g


CH5600 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.71 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.195 mW/g

Maximum value of SAR (measured) = 0.811 mW/g

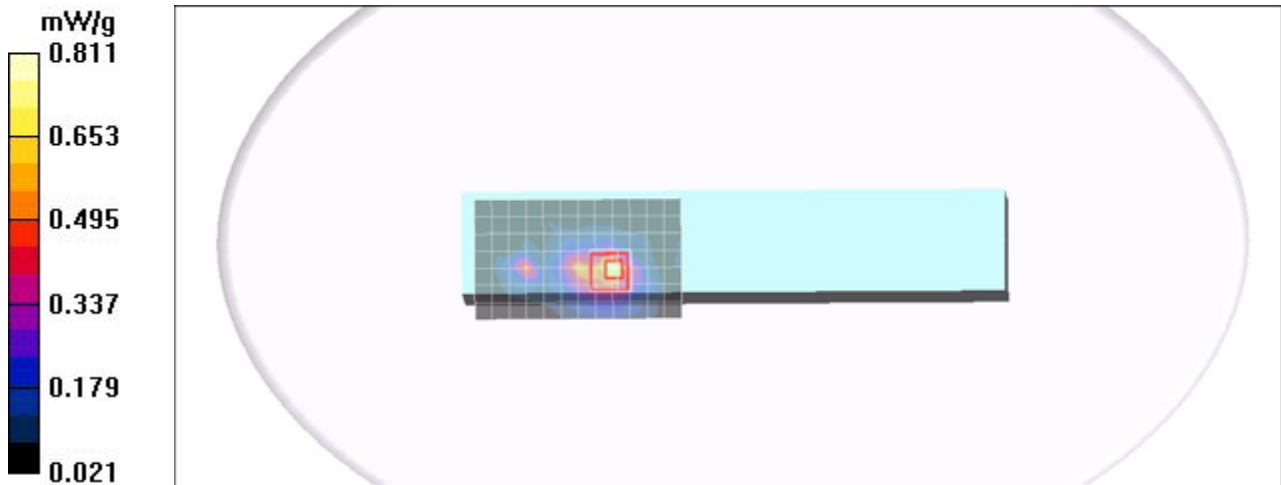

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5620 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5620$ MHz; $\sigma = 5.98$ mho/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.3, 3.3, 3.3);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5620 Rate=6.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.14 mW/g

CH5620 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.85 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 1.22 mW/g



CH5620 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.85 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 0.530 mW/g; SAR(10 g) = 0.330 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

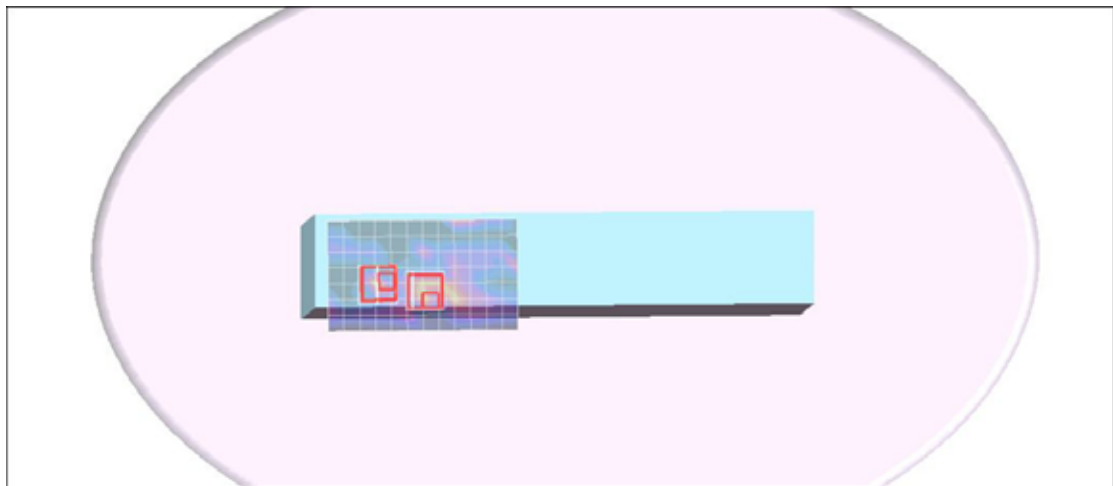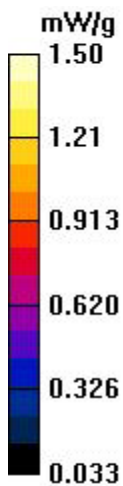

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5700 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5700$ MHz; $\sigma = 6.14$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5700 Rate=6.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.764 mW/g

CH5700 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.87 V/m; Power Drift = 0.106 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 1.16 mW/g


CH5700 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.87 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

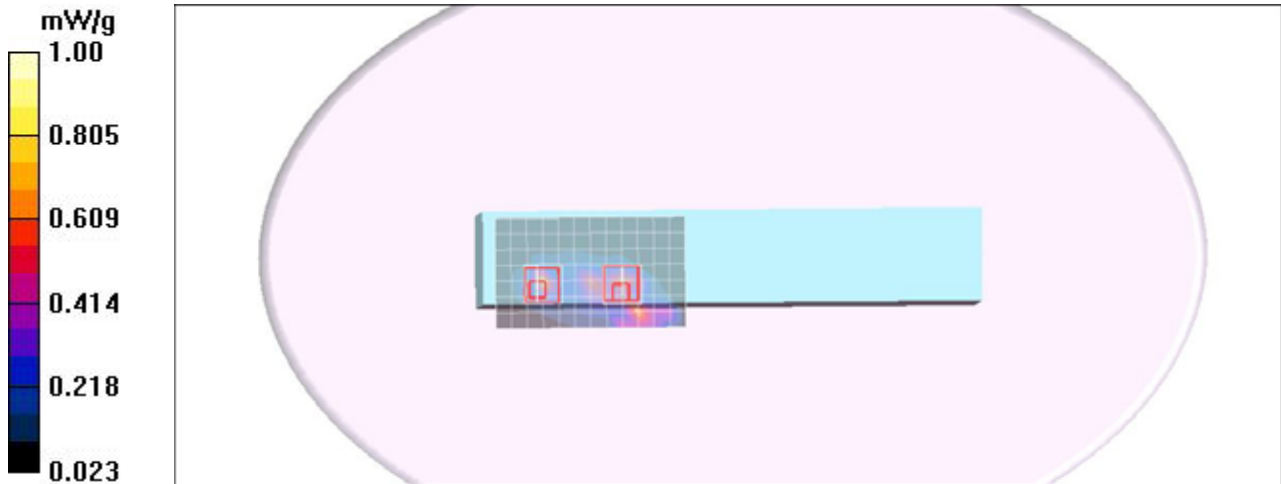

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.14$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5745 Rate=6.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 0.778 mW/g

CH5745 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.39 V/m; Power Drift = -0.091 dB
Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.137 mW/g
Maximum value of SAR (measured) = 0.946 mW/g

CH5745 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.39 V/m; Power Drift = -0.091 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.194 mW/g
Maximum value of SAR (measured) = 1.03 mW/g

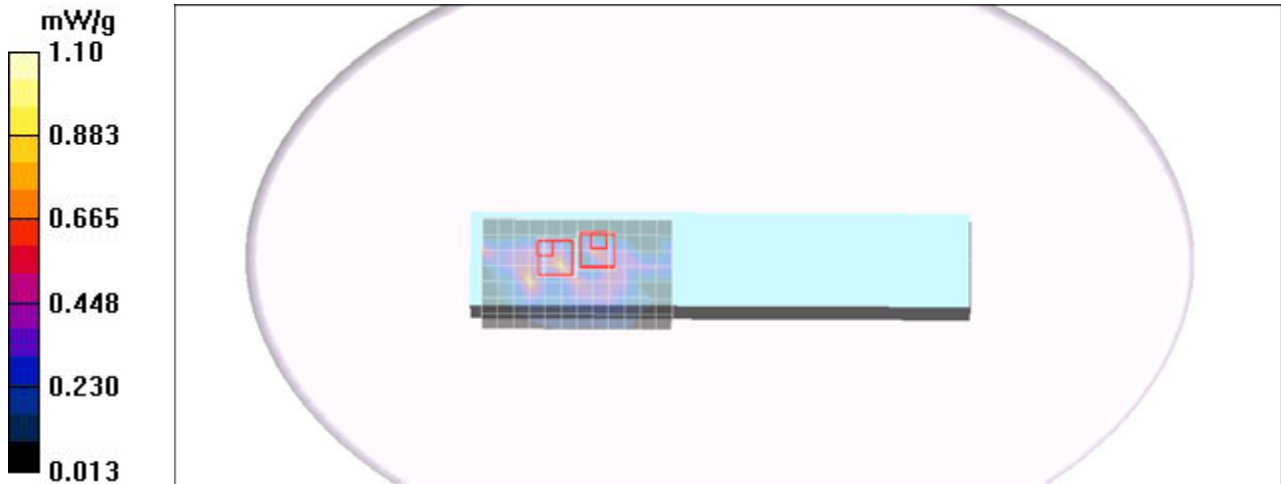

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5805 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5805$ MHz; $\sigma = 6.24$ mho/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5805 Rate=6.5M /Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.01 mW/g

CH5805 Rate=6.5M /Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.92 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = **0.498 mW/g**; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 1.03 mW/g



CH5805 Rate=6.5M /Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.92 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = **0.532 mW/g**; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

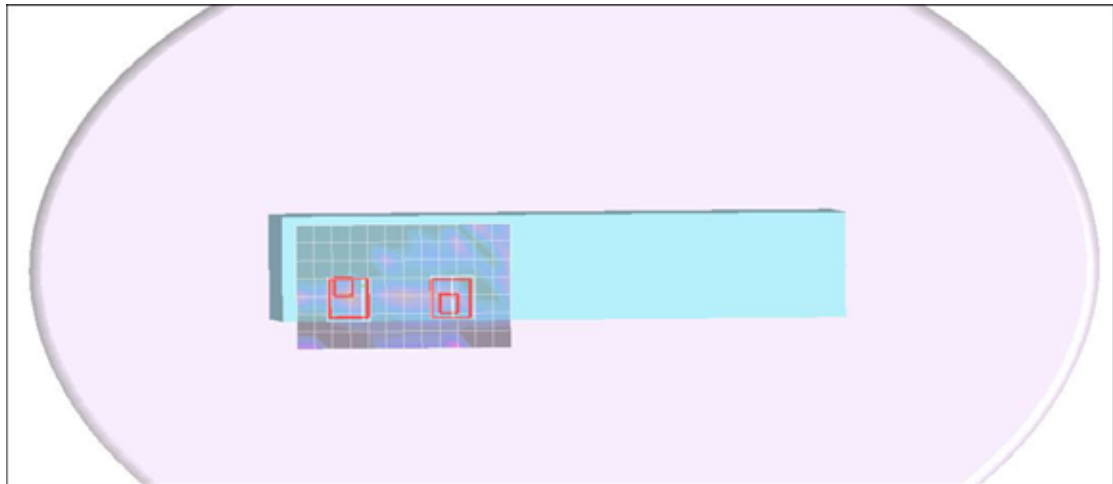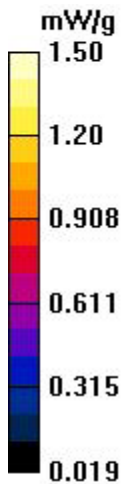

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(A) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5320 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5320$ MHz; $\sigma = 5.53$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5320 Rate=6.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm



Maximum value of SAR (measured) = 0.996 mW/g

CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.96 V/m; Power Drift = -0.104 dB
Peak SAR (extrapolated) = 1.76 W/kg
SAR(1 g) = 0.579 mW/g; SAR(10 g) = 0.214 mW/g
Maximum value of SAR (measured) = 0.946 mW/g

CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.96 V/m; Power Drift = -0.104 dB
Peak SAR (extrapolated) = 1.71 W/kg
SAR(1 g) = 0.527 mW/g; SAR(10 g) = 0.175 mW/g
Maximum value of SAR (measured) = 0.958 mW/g

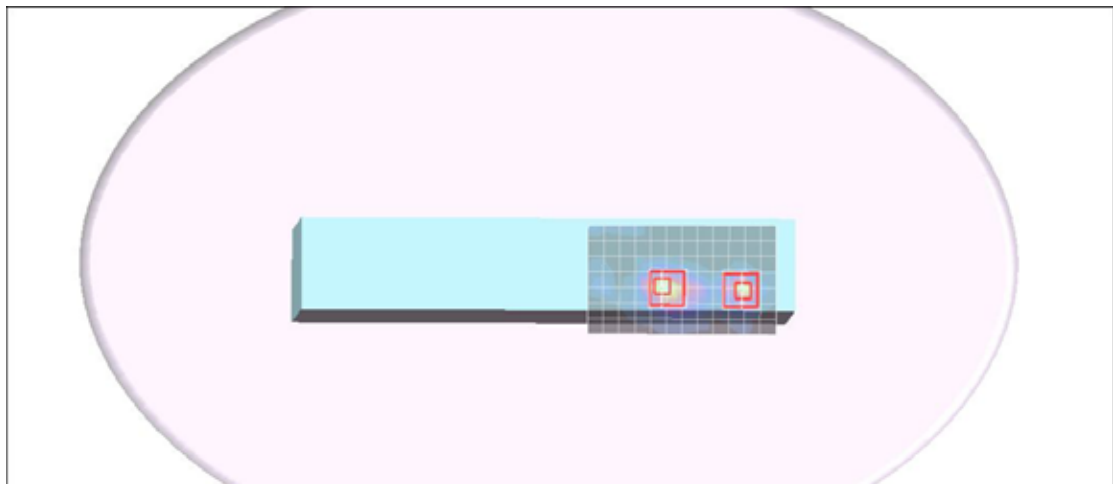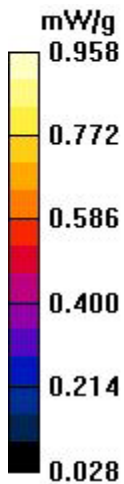

Test Laboratory: Compliance Certification Services Inc.

80211a Left Edge mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5320 Rate=6.5M/Area Scan (9x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.295 mW/g

CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.74 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = **0.110 mW/g**; SAR(10 g) = **0.065 mW/g**

Maximum value of SAR (measured) = 0.272 mW/g



CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.74 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = **0.049 mW/g**; SAR(10 g) = **0.042 mW/g**

Maximum value of SAR (measured) = 0.063 mW/g

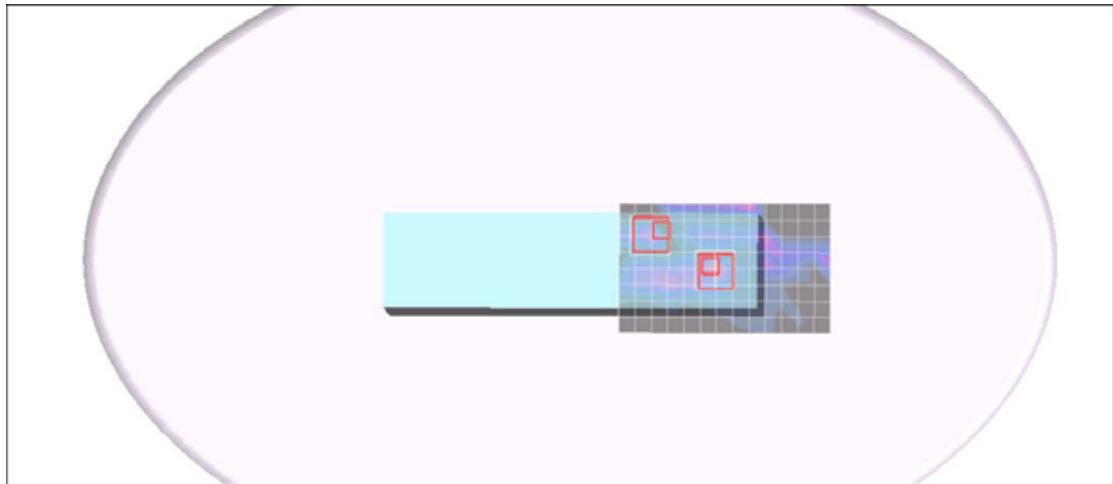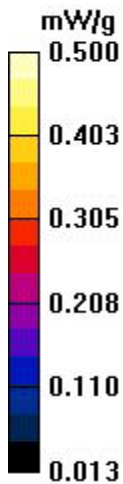

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom Tablet mode V200X antenna AB(B) HT20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5320 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5320$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5320 Rate=6.5M/Area Scan (9x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.150 mW/g

CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.71 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.203 mW/g



CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.71 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.240 mW/g

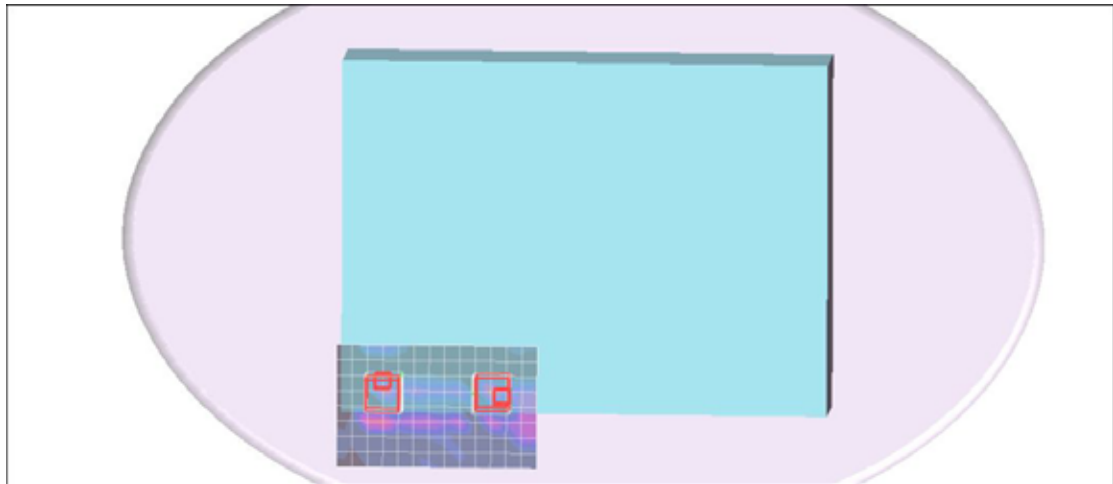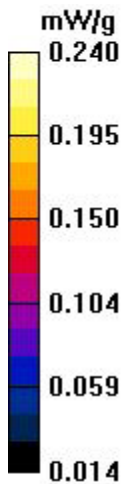

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom NB mode V200X antenna AB(B) HT 20

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT20; Frequency: 5320 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5320$ MHz; $\sigma = 5.56$ mho/m; $\epsilon_r = 48.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5320 Rate=6.5M/Area Scan (9x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.155 mW/g

CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.72 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = **0.115 mW/g**; SAR(10 g) = **0.070 mW/g**

Maximum value of SAR (measured) = 0.307 mW/g


CH5320 Rate=6.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.72 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = **0.108 mW/g**; SAR(10 g) = **0.078 mW/g**

Maximum value of SAR (measured) = 0.248 mW/g

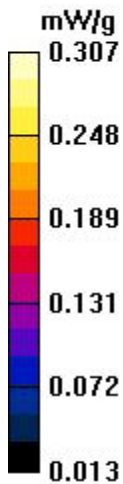

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(A) HT40

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT40; Frequency: 5670 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5670$ MHz; $\sigma = 6.04$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5670 Rate=13.5M/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.948 mW/g

CH5670 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 3.31 V/m; Power Drift = -0.123 dB
Peak SAR (extrapolated) = 1.12 W/kg
SAR(1 g) = 0.400 mW/g; SAR(10 g) = 0.165 mW/g
Maximum value of SAR (measured) = 0.653 mW/g

CH5670 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 3.31 V/m; Power Drift = -0.123 dB
Peak SAR (extrapolated) = 1.60 W/kg
SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.152 mW/g
Maximum value of SAR (measured) = 0.768 mW/g

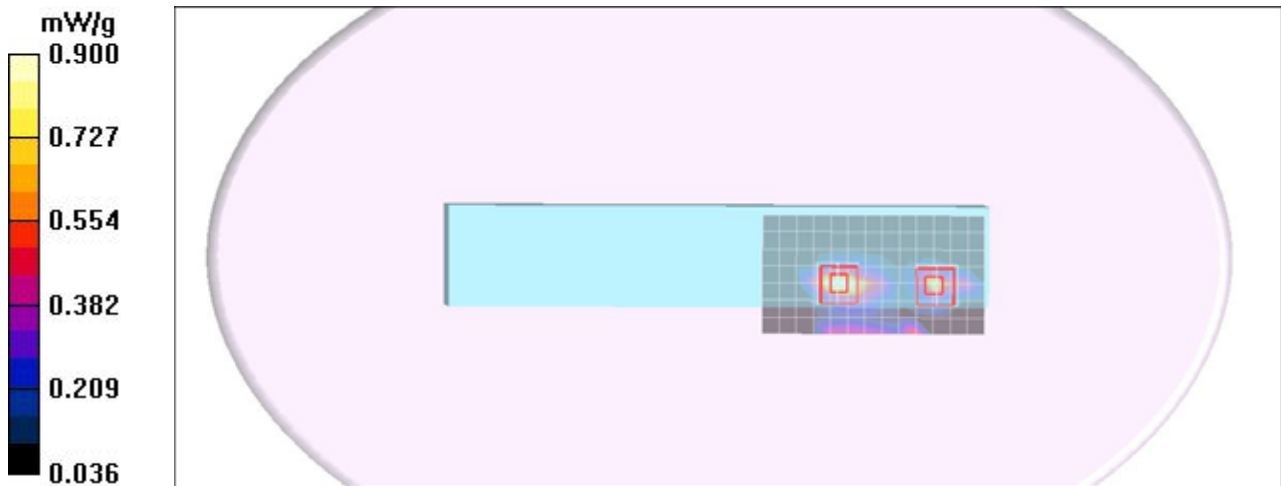

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT40

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT40; Frequency: 5670 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5670$ MHz; $\sigma = 6.04$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5670 Rate=13.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.849 mW/g

CH5670 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 4.14 V/m; Power Drift = -0.124 dB
Peak SAR (extrapolated) = 1.86 W/kg
SAR(1 g) = 0.526 mW/g; SAR(10 g) = 0.218 mW/g
Maximum value of SAR (measured) = 0.873 mW/g

CH5670 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 4.14 V/m; Power Drift = -0.124 dB
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.425 mW/g; SAR(10 g) = 0.179 mW/g
Maximum value of SAR (measured) = 0.697 mW/g

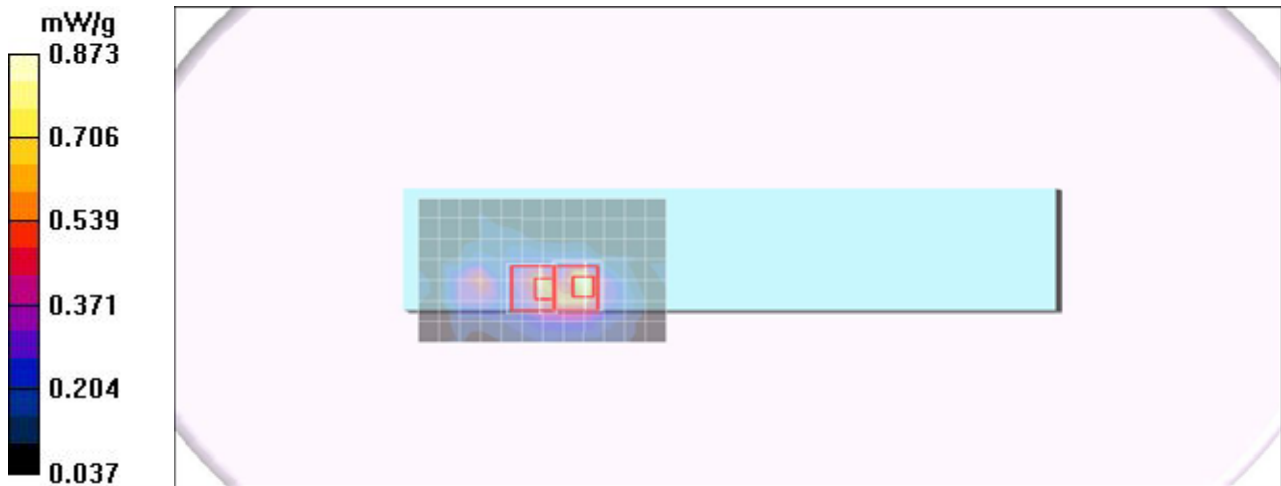

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT40

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT40; Frequency: 5190 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5190$ MHz; $\sigma = 5.28$ mho/m; $\epsilon_r = 49$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.8, 3.8, 3.8);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5190 Rate=13.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.339 mW/g

CH5190 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.53 V/m; Power Drift = -0.115 dB
Peak SAR (extrapolated) = 0.657 W/kg
SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.086 mW/g
Maximum value of SAR (measured) = 0.350 mW/g

CH5190 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.53 V/m; Power Drift = -0.115 dB
Peak SAR (extrapolated) = 0.475 W/kg
SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.058 mW/g
Maximum value of SAR (measured) = 0.230 mW/g

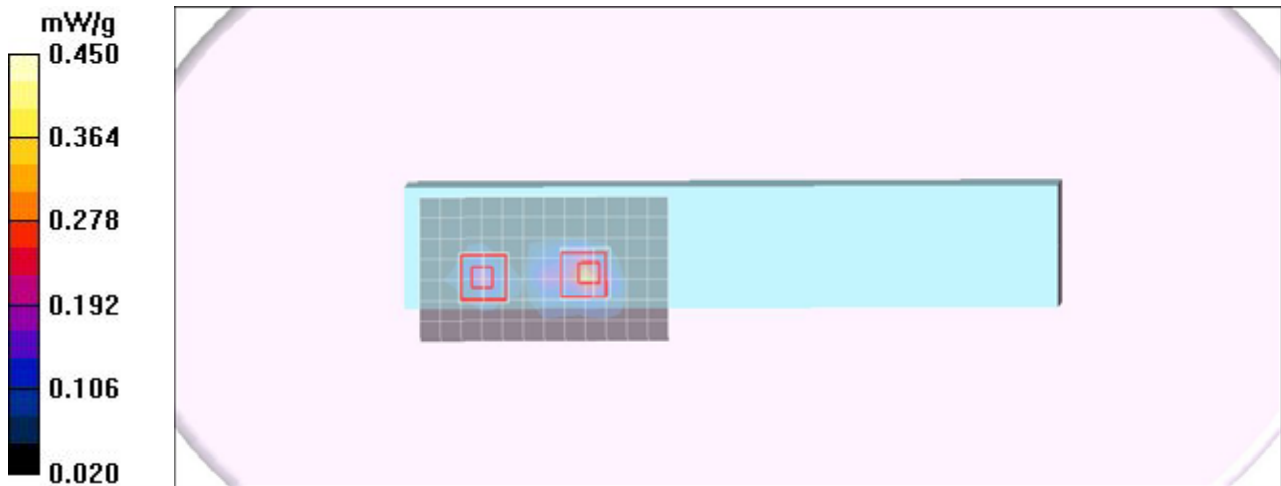

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT40

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT40; Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 48.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5270 Rate=13.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.10 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.689 mW/g; SAR(10 g) = 0.317 mW/g

Maximum value of SAR (measured) = 1.04 mW/g



CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.10 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.215 mW/g

Maximum value of SAR (measured) = 0.707 mW/g

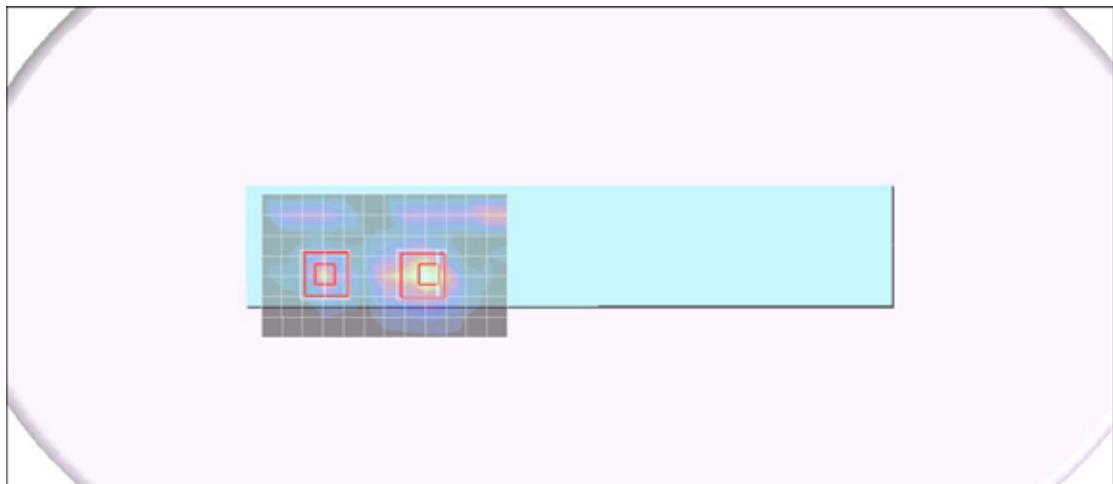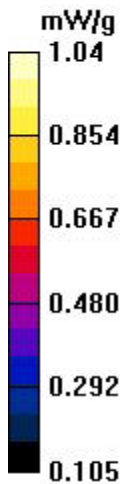

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(B) HT40

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT40; Frequency: 5795 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 6.14$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.31, 3.31, 3.31);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5795 Rate=13.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.768 mW/g

CH5795 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.41 V/m; Power Drift = -0.125 dB
Peak SAR (extrapolated) = 1.56 W/kg
SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.148 mW/g
Maximum value of SAR (measured) = 0.862 mW/g

CH5795 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.41 V/m; Power Drift = -0.125 dB
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.151 mW/g
Maximum value of SAR (measured) = 0.650 mW/g

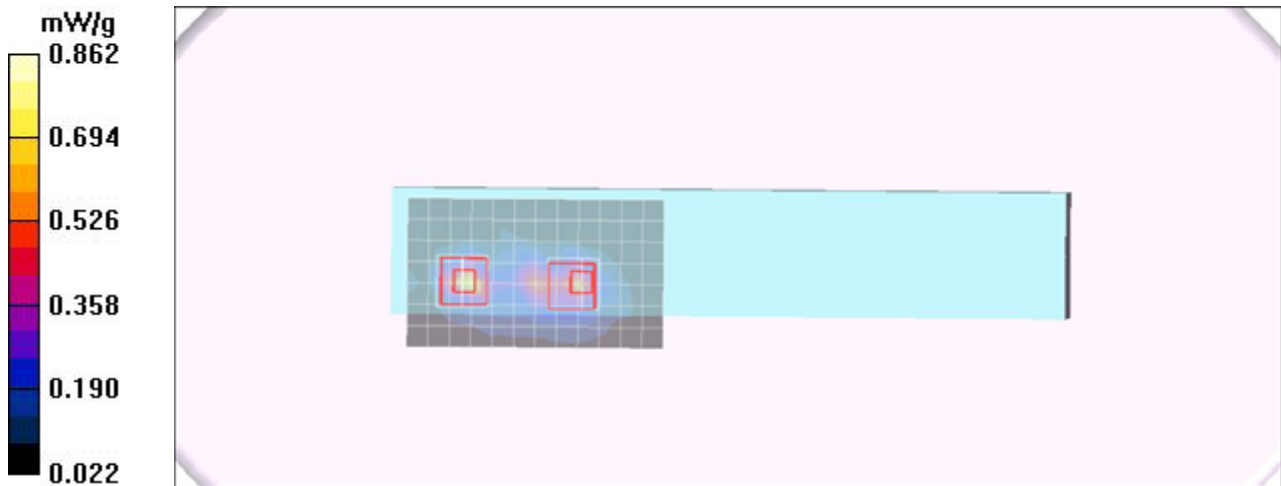

Test Laboratory: Compliance Certification Services Inc.

80211a Tip mode V200X antenna AB(A) HT40

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT40; Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 48.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5270 Rate=13.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.840 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 4.76 V/m; Power Drift = -0.103 dB
Peak SAR (extrapolated) = 2.23 W/kg
SAR(1 g) = 0.663 mW/g; SAR(10 g) = 0.229 mW/g
Maximum value of SAR (measured) = 1.19 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 4.76 V/m; Power Drift = -0.103 dB
Peak SAR (extrapolated) = 2.00 W/kg
SAR(1 g) = 0.599 mW/g; SAR(10 g) = 0.183 mW/g
Maximum value of SAR (measured) = 1.05 mW/g

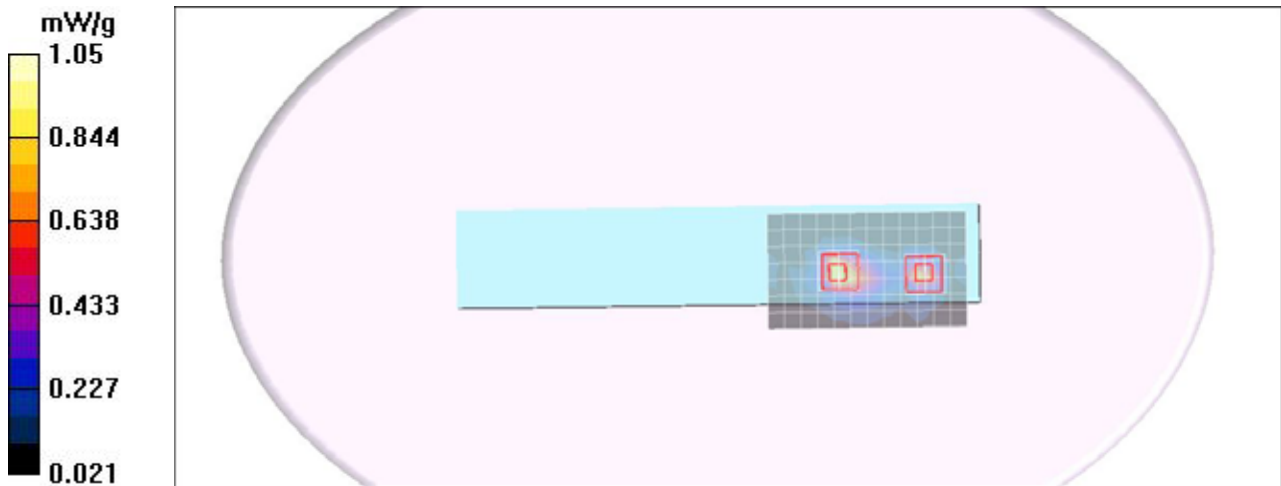

Test Laboratory: Compliance Certification Services Inc.

80211a Left Edge mode V200X antenna AB(B) HT40

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT40; Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5270 Rate=13.5M/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.148 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.05 V/m; Power Drift = -0.144 dB
Peak SAR (extrapolated) = 0.305 W/kg
SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.104 mW/g
Maximum value of SAR (measured) = 0.288 mW/g

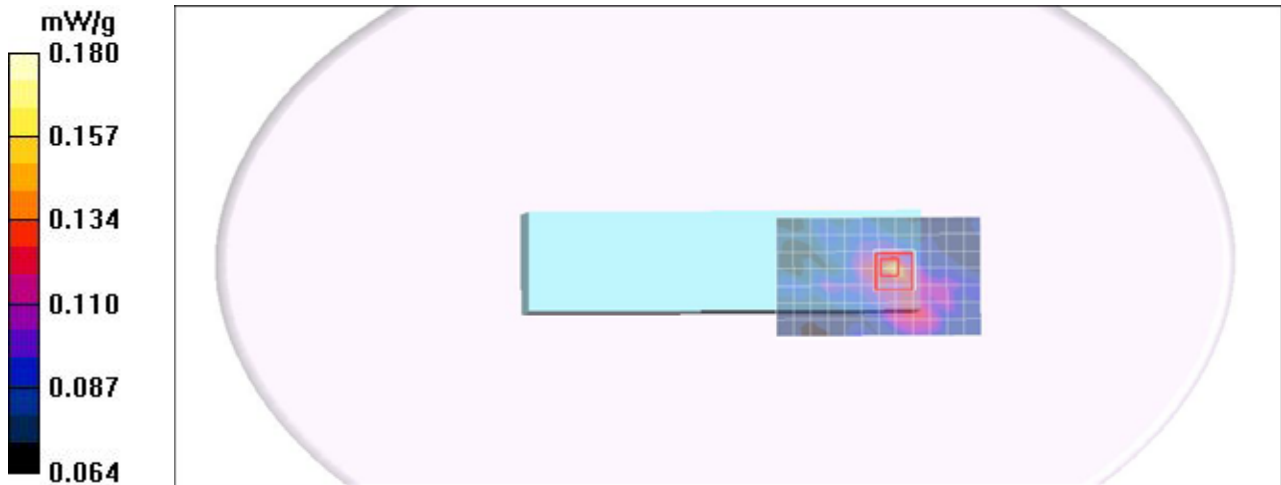

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom Tablet mode V200X antenna AB(B) HT40

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT40; Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5270 Rate=13.5M/Area Scan (9x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.086 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.96 V/m; Power Drift = -0.067 dB
Peak SAR (extrapolated) = 0.112 W/kg
SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.086 mW/g
Maximum value of SAR (measured) = 0.112 mW/g

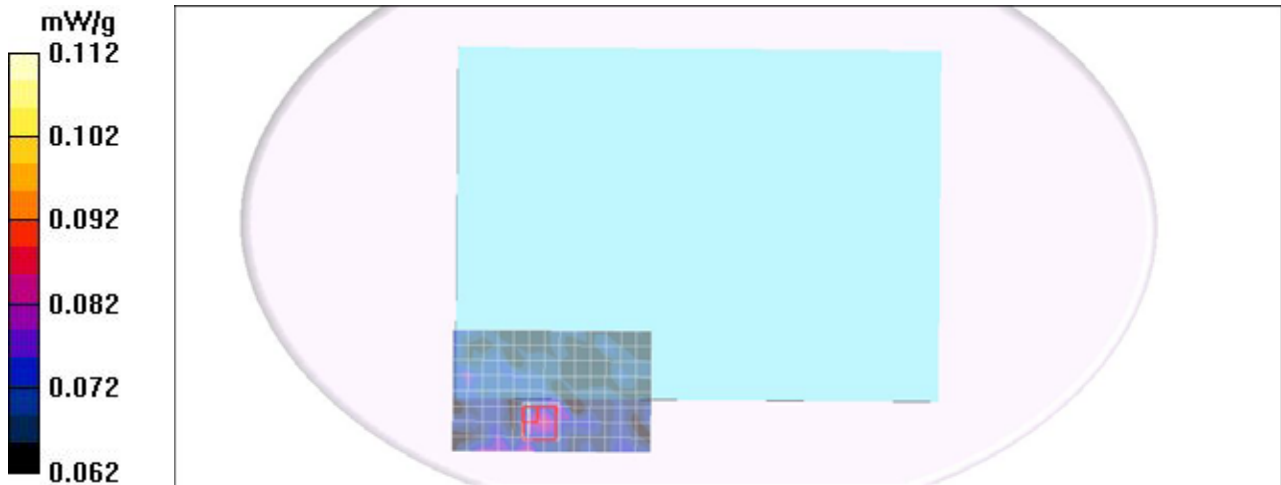

Test Laboratory: Compliance Certification Services Inc.

80211a Bottom NB mode V200X antenna AB(B) HT 40

DUT: V200X; Type: V200X; Serial: V200X

Communication System: IEEE 802.11A HT40; Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.5$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.57, 3.57, 3.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2010/6/22
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

CH5270 Rate=13.5M/Area Scan (9x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.083 mW/g

CH5270 Rate=13.5M/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.91 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.102 mW/g

