



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

**For**

**NOTEBOOK COMPUTER**

**Model: V200**

**Trade Name: Getac**

*Issued to*

**Getac Technology Corp.**

**No.1,R&D Road 2 , Hsinchu Science Based Industrial Park ,  
Hsinchu , Taiwan**

*Issued by*

**Compliance Certification Services Inc.**

**No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang,  
Taoyuan Shien, (338), Taiwan, R.O.C.**

**<http://www.ccsrf.com>**

**[service@ccsrf.com](mailto:service@ccsrf.com)**



---

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2. EUT DESCRIPTION .....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
3.1 EUT CONFIGURATION .....	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5 DESCRIPTION OF TEST MODES .....	7
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>8</b>
4.1 MEASURING INSTRUMENT CALIBRATION .....	8
4.2 MEASUREMENT EQUIPMENT USED .....	8
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>10</b>
5.1 FACILITIES .....	10
5.2 EQUIPMENT.....	10
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	11
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>12</b>
6.1 SETUP CONFIGURATION OF EUT.....	12
6.2 SUPPORT EQUIPMENT .....	12
<b>7. FCC PART 15.247 REQUIREMENTS.....</b>	<b>13</b>
7.1 6DB BANDWIDTH.....	13
7.2 PEAK POWER.....	26
7.3 AVERAGE POWER .....	29
7.4 BAND EDGES MEASUREMENT .....	32
7.5 PEAK POWER SPECTRAL DENSITY.....	49
7.6 SPURIOUS EMISSIONS.....	62
7.7 POWERLINE CONDUCTED EMISSIONS.....	98
<b>APPENDIX I RADIO FREQUENCY EXPOSURE .....</b>	<b>101</b>
<b>APPENDIX II PHOTOGRAPHS OF TEST SETUP .....</b>	<b>103</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	



# 1. TEST RESULT CERTIFICATION

**Applicant:** Getac Technology Corp.  
 No.1,R&D Road 2 , Hsinchu Science Based Industrial  
 Park ,Hsinchu , Taiwan

**Equipment Under Test:** NOTEBOOK COMPUTER

**Trade Name:** Getac

**Model:** V200

**Date of Test:** July 27 ~ October 13, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

---

Rex Lai  
 Section Manager  
 Compliance Certification Services Inc.

---

Gina Lo  
 Section Manager  
 Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	NOTEBOOK COMPUTER
<b>Trade Name</b>	Getac
<b>Number</b>	V200
<b>Model Discrepancy</b>	N/A
<b>WLAN Module Trade Name / Model</b>	Intel / Intel Advanced-N 6200 WiFi Card
<b>Amplifier information</b>	Name : WLAN RF BOOSTER CARD Trade Name : Taiwan Microelectronics Technologies Inc Model : TM5126
<b>Power Supply</b>	1. Power Adapter: Getac / ADM-6019M I/P: 100-240V, 1.5A, 50-60Hz O/P: 19V, 3.16A 2. VDC from Battery: Mode: BP-LC2600/33-01SI Rating: DC 11.1V, 7800mAh, 87Wh
<b>Frequency Range</b>	IEEE 802.11a/ draft 802.11n Standard-20 MHz: 5.725~5.850 GHz IEEE 802.11b/g/ draft 802.11n Standard-20 MHz: 2.412~2.462 GHz draft 802.11n Wide-40 MHz: 2.422~2.452 GHz
<b>Transmit Power</b>	IEEE 802.11a mode: 22.02 dBm draft 802.11n Standard-20 MHz Channel mode: 20.5 dBm draft 802.11n Wide-40 MHz Channel mode: 20.6 dBm IEEE 802.11b mode: 24.92 dBm IEEE 802.11g mode: 28.01 dBm draft 802.11n Standard-20 MHz Channel mode: 27.07 dBm draft 802.11n Wide-40 MHz Channel mode: 27.04 dBm
<b>Modulation Technique &amp; Transmit Data Rate</b>	IEEE 802.11a: OFDM (54, 48, 36, 24, 18, 12, 9, 6 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33, 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps) IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33, 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)
<b>Number of Channels</b>	IEEE 802.11a mode: 5 Channels draft 802.11n Standard-20 MHz Channel mode: 5 Channels draft 802.11n Wide-40 MHz Channel mode: 2 Channels IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels
<b>Antenna Specification</b>	Antenna Type: PIFA Antenna Antenna Gain: IEEE 802.11a: 3.97 dBi IEEE 802.11b/g mode: 2.6 dBi

### Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: MAU042 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. The EUT is only ITIR.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### 3.5 DESCRIPTION OF TEST MODES

The EUT (model: V200) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed. The worst case data rate is determined as the data rate with highest output power.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

**IEEE 802.11b mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

**IEEE 802.11g mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

**draft 802.11n Standard-20 MHz Channel mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

**draft 802.11n Wide-40 MHz Channel mode:**

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

**IEEE 802.11a mode:**

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate and cyclic delay diversity were chosen for full testing.

**draft 802.11n Standard-20 MHz Channel mode:**

Channel Low(5745MHz), Channel Mid(5785MHz) and Channel High(5825MHz) with 6.5Mbps data rate were chosen for full testing.

**draft 802.11n Wide-40 MHz Channel mode:**

Channel Low(5755MHz) and Channel High(5795MHz) with 13.5Mbps data rate were chosen for full testing.

**The external amplifier information is list as below.**

Name : WLAN RF BOOSTER CARD

Trade Name : Taiwan Microelectronics Technologies Inc

Model : TM5126

specification : 2.4GHz b/g RF Booster

Set up: Using V200-Getac-Utility-20.1.100910.0.exe. Software control external amplifier Output power.

This amplifier is only connected to used for 2.4 GHz antenna part.



## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.*

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/03/2011
Power Meter	Anritsu	ML2495A	1012009	03/28/2011
Power Sensor	Anritsu	MA2411B	0917072	03/09/2011

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/25/2011
EMI Test Receiver	R&S	ESCI	100064	02/04/2011
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/13/2011
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/20/2010
Bilog Antenna	Sunol Sciences	JB3	A030105	09/10/2011
Horn Antenna	EMCO	3117	00055165	12/07/2010
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/31/2010
Test S/W	EZ-EMC (CCS-3A1RE)			

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/08/2011
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	03/22/2011
EMI Test Receiver	ROHDE & SCHWARZ	ESCS 30	835418/008	10/26/2011
Pulse Limit	ROHDE & SCHWARZ	ESH3-Z2	100117	09/16/2011
N Type Coaxial Cable	BELDEN	8268 M17/164	003	07/09/2011





### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.7468
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0606
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9979
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5790
3M Semi Anechoic Chamber / 8G~18G	+/- 2.5928
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7212
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9520

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.989-1, Wenshan Rd., Qionglin Township, Hsinchu County 307, Taiwan (R.O.C.)  
Tel: +886-3-5921698

**Remark:** *The powerline conducted emissions items was tested at Compliance Certification Services Inc. (Hsinchu Lab.) The test equipments were listed in page 8 and the test data, please refer page 99-100.*

- No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.





Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

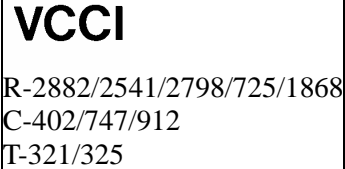Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	 ACCREDITED No. 0824-01
USA	FCC MRA	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 TW1026
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	<b>VCCI</b> R-2882/2541/2798/725/1868 C-402/747/912 T-321/325
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 2324C-3 IC 2324C-5

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	GPS Simulator	HWAJEAT	GPS-101	EN001	---
2	8960 Series 10 Wireless Communication test set	Agilent	E5515C	GB44051665	---
3	ADVANCED HYBRID SYSTEM	Panasonic	KX-TA308	---	---
4	Notebook PC	Lenovo ideaPad	S10e_4068-RZ1	L3CEV2D	HFS-FL
5	Notebook PC	HP	nx6130	CNU543274R	CNTWM3B2200BGA
6	Bluetooth Headset	Motorola	H17	SJYN029A	IHDP6KE1
7	Modem	ZyXEL	Omni 56K	S1Z4107727	1880MNI56K
8	LED Monitor	ViewSonic	VS12085	R18082200389	DoC
9	Headset/Microphone	ERGOTECH	ET-E203	4719405008042	---
10	E-SATA External hard	VANTEC	NexStar CX	---	---
11	Flash disk	Transcend	CompactFlash512MB	1561433338	---
12	Flash disk	Sayho	PR1014(256M)	104720	---
13	SD Crad	SanDisk	---	---	---
14	Smart Card	HOME RUN CARD	---	---	---
15	PCMCIA Card (CF Adapter)	Billionton	1211004-0040	00082900065	---
16	CF Card	iEi	ICF1000	ICF-10001-128MB	---

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6dB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

#### Test Configuration

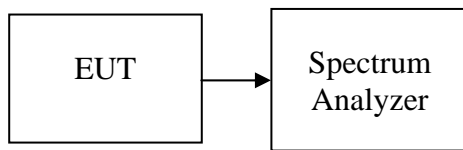

#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted*



**Test Data**

**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	12.17	>500	PASS
Mid	2437	11.25		PASS
High	2462	11.25		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.17	>500	PASS
Mid	2437	14.50		PASS
High	2462	15.17		PASS

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.08	>500	PASS
Mid	2437	15.17		PASS
High	2462	15.17		PASS

**Test mode: draft 802.11n Wide-40 MHz Channel mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	31.33	>500	PASS
Mid	2437	31.42		PASS
High	2452	31.33		PASS



**Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	16.25	>500	PASS
Mid	5785	16.33		PASS
High	5825	16.50		PASS

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	16.75	>500	PASS
Mid	5785	17.25		PASS
High	5825	17.33		PASS

**Test mode: draft 802.11n Wide-40 MHz Channel mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5755	27.58	>500	PASS
High	5795	30.67		PASS



### Test Plot


#### IEEE 802.11b mode

#### 6dB Bandwidth (CH Low)

Agilent 10:39:15 Oct 13, 2010

R T

Δ Mkr1 12.17 MHz  
0.33 dB

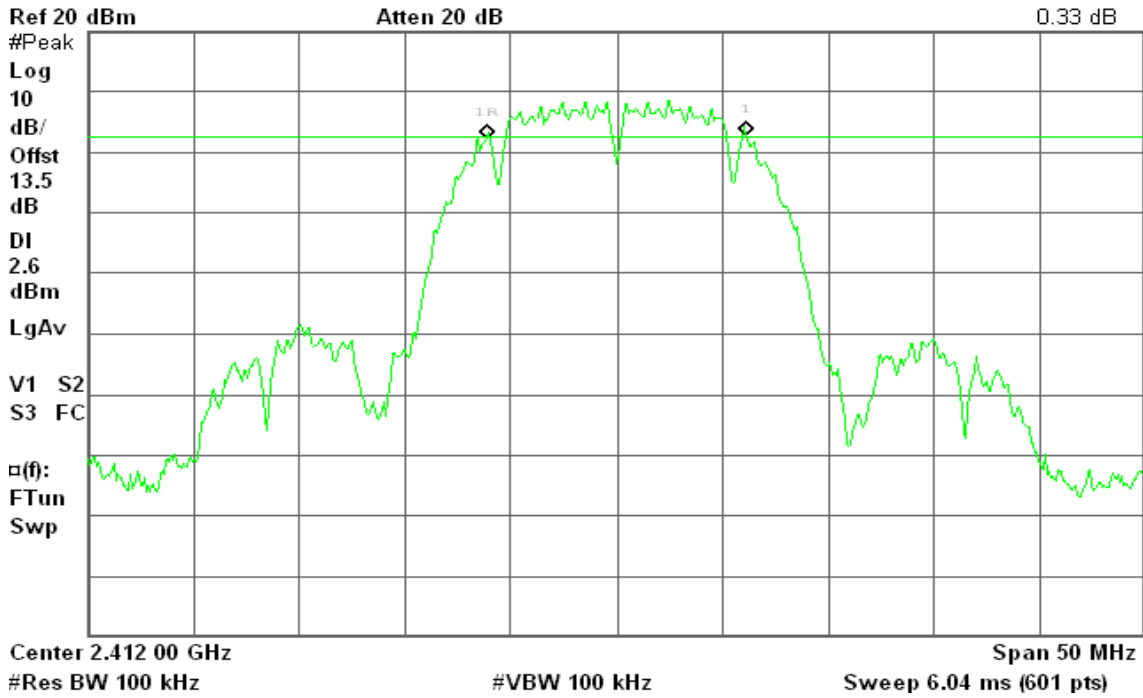


#### 6dB Bandwidth (CH Mid)

Agilent 10:39:47 Oct 13, 2010

R T

Δ Mkr1 11.25 MHz  
0.49 dB

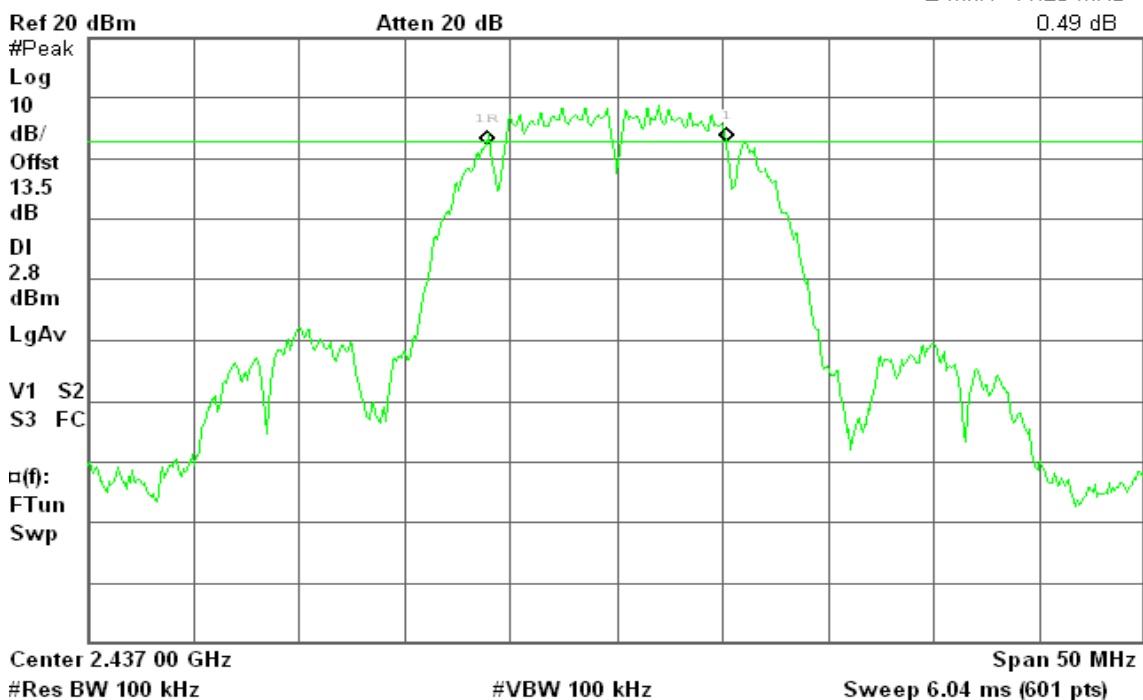






### 6dB Bandwidth (CH High)

Agilent 10:40:17 Oct 13, 2010

R T

Δ Mkr1 11.25 MHz  
-0.67 dB

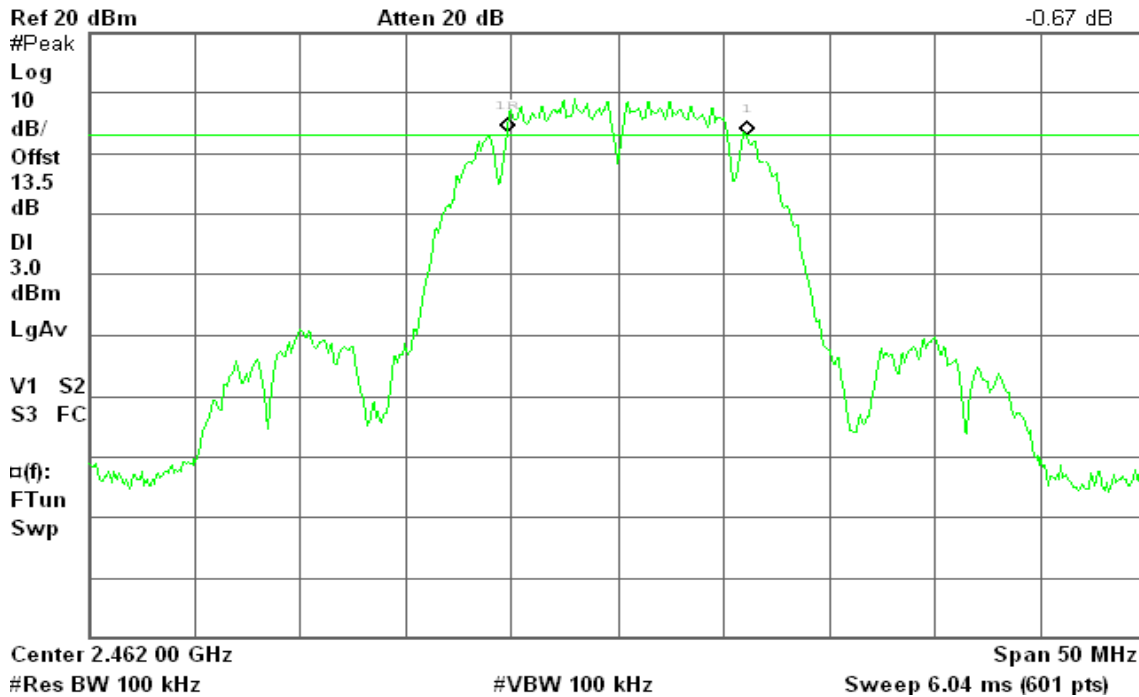


### IEEE 802.11g mode

### 6dB Bandwidth (CH Low)

Agilent 10:25:32 Oct 13, 2010

R T

Δ Mkr1 15.17 MHz  
0.46 dB

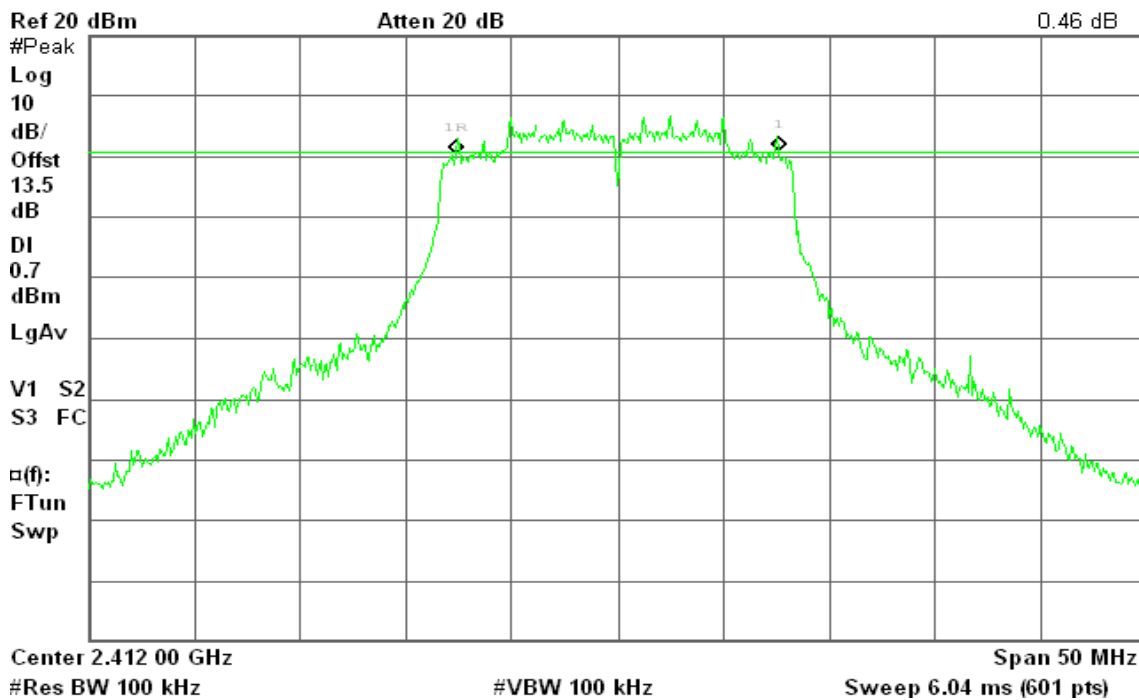




### 6dB Bandwidth (CH Mid)

Agilent 10:29:09 Oct 13, 2010

R T

Δ Mkr1 14.50 MHz  
-1.90 dB

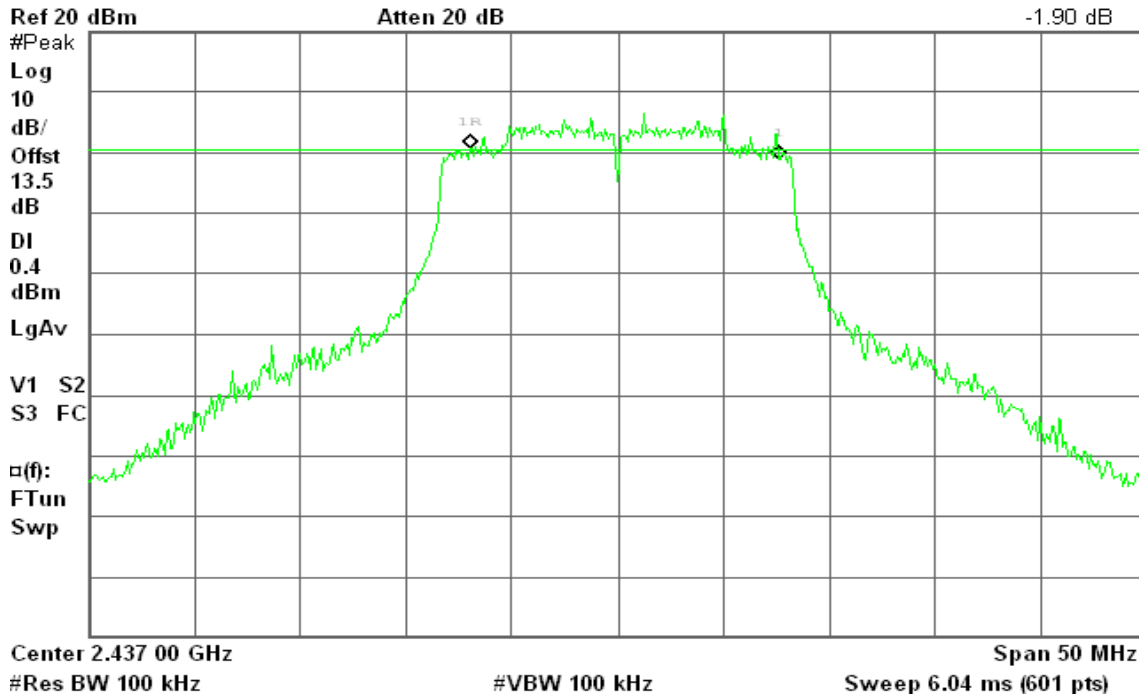


### 6dB Bandwidth (CH High)

Agilent 10:34:56 Oct 13, 2010

R L

Δ Mkr1 15.17 MHz  
-0.41 dB

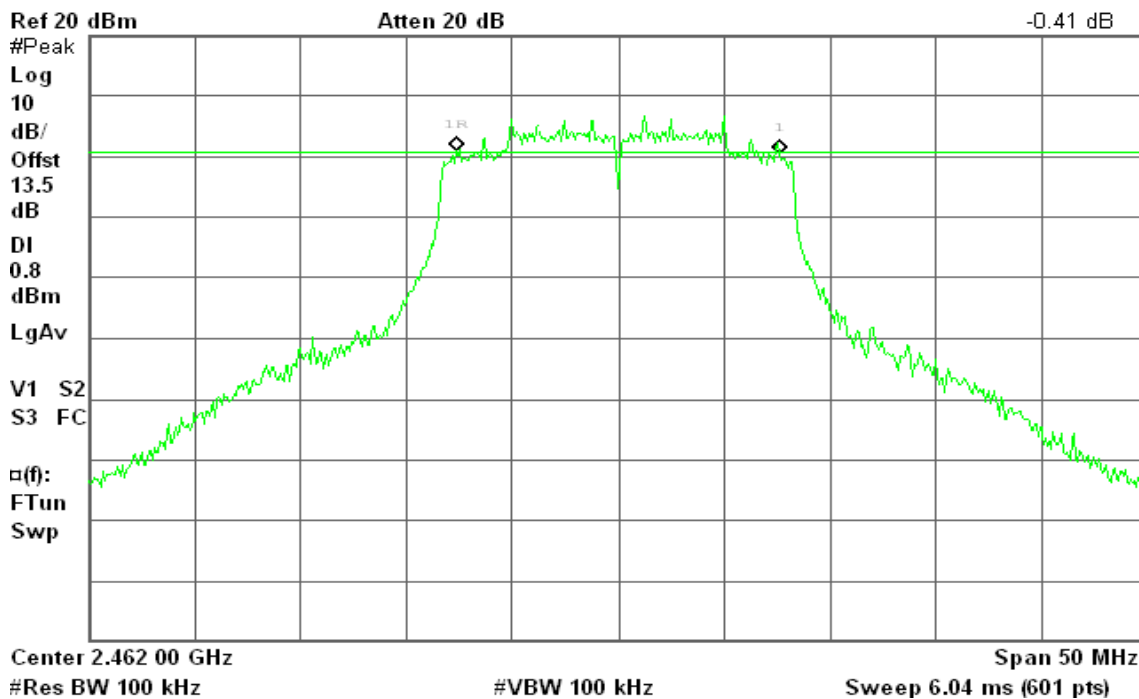




### draft 802.11n Standard-20 MHz Channel mode

#### 6dB Bandwidth (CH Low)

Agilent 10:42:37 Oct 13, 2010

R T

Δ Mkr1 15.08 MHz  
-1.08 dB

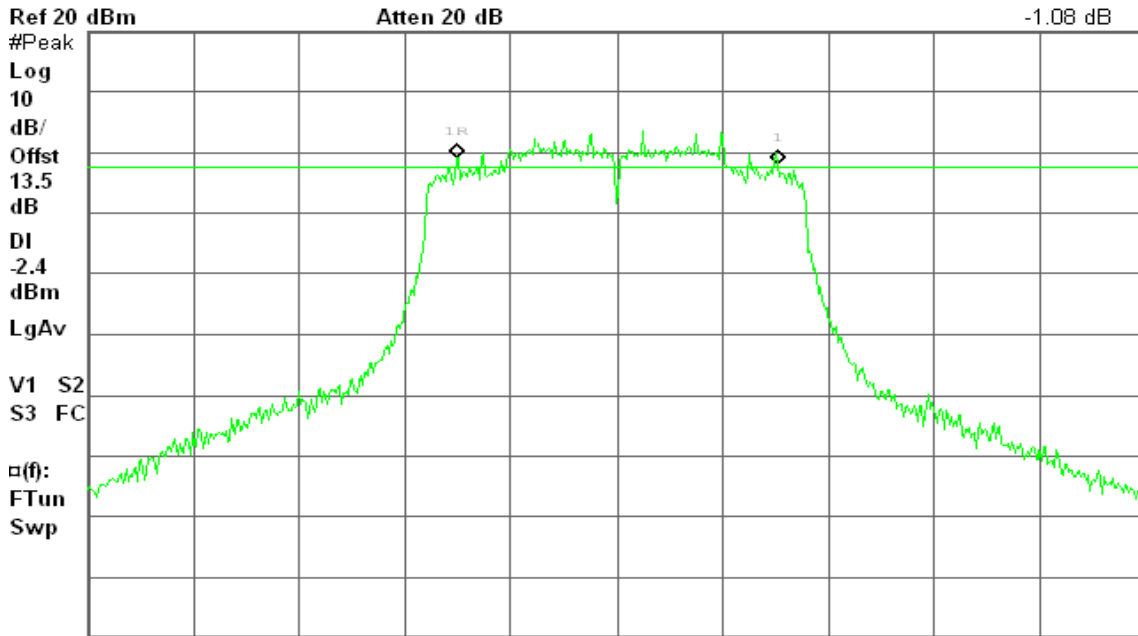

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 6.04 ms (601 pts)

#### 6dB Bandwidth (CH Mid)

Agilent 10:50:49 Oct 13, 2010

R T

Δ Mkr1 15.17 MHz  
-0.53 dB

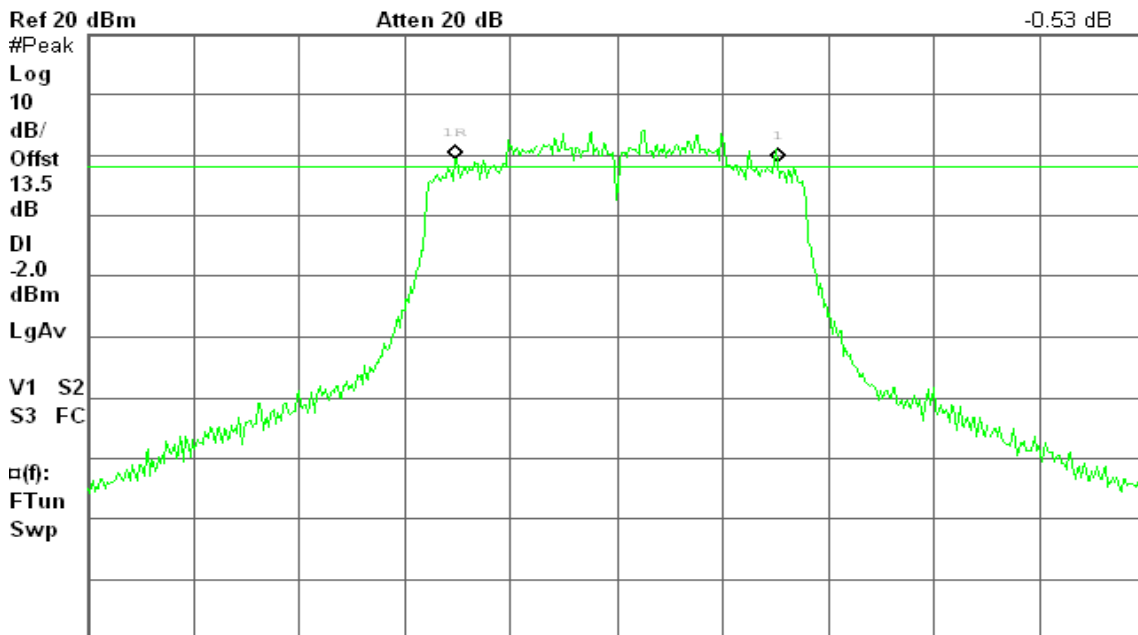

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)




### 6dB Bandwidth (CH High)

Agilent 10:58:28 Oct 13, 2010

R T

Δ Mkr1 15.17 MHz  
-1.76 dB

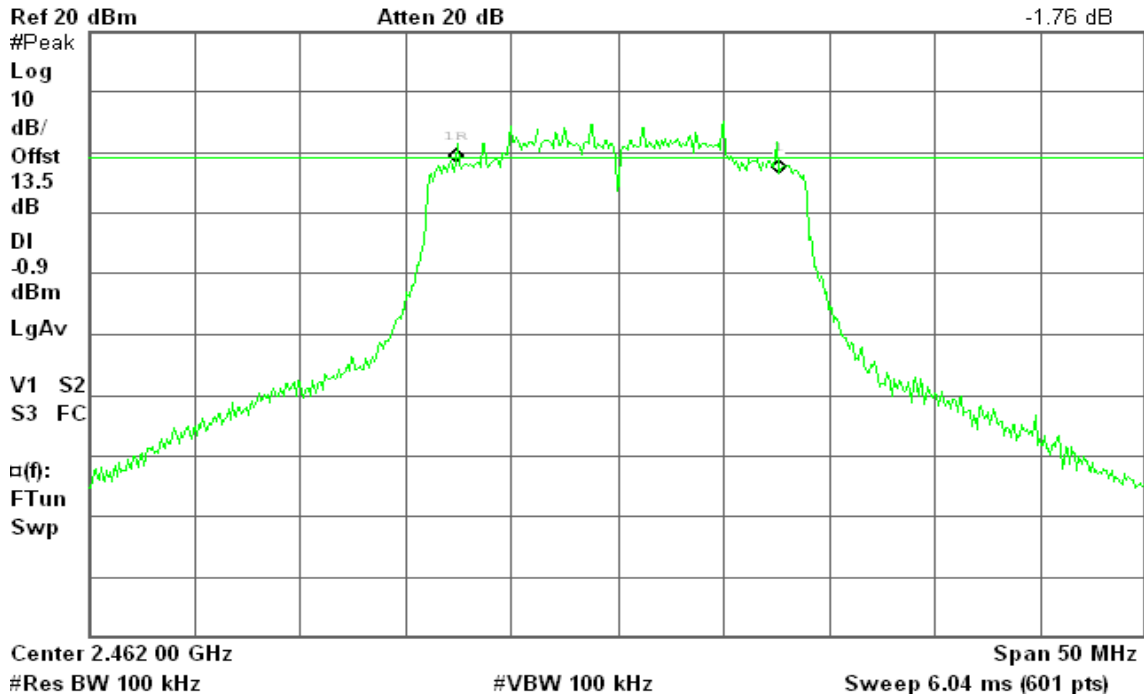


### draft 802.11n Wide-40 MHz Channel mode

### 6dB Bandwidth (CH Low)

Agilent 11:16:19 Oct 13, 2010

R T

Δ Mkr1 31.33 MHz  
1.03 dB

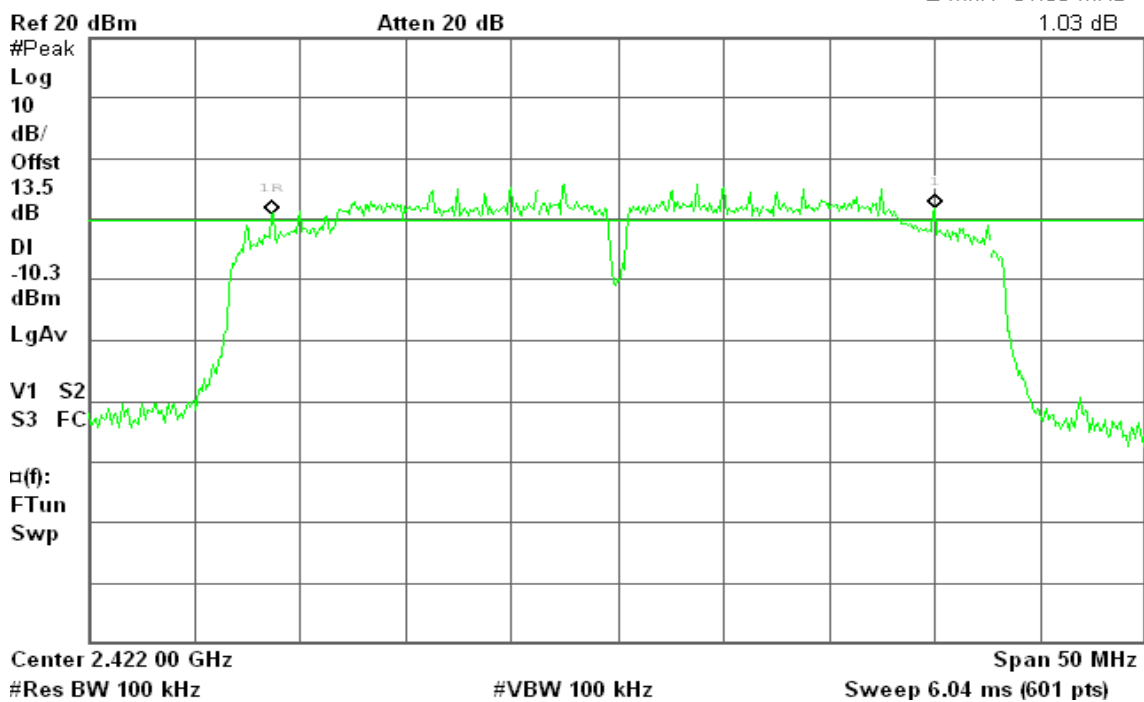




### 6dB Bandwidth (CH Mid)

Agilent 11:04:42 Oct 13, 2010

R T

Δ Mkr1 31.42 MHz  
-1.85 dB

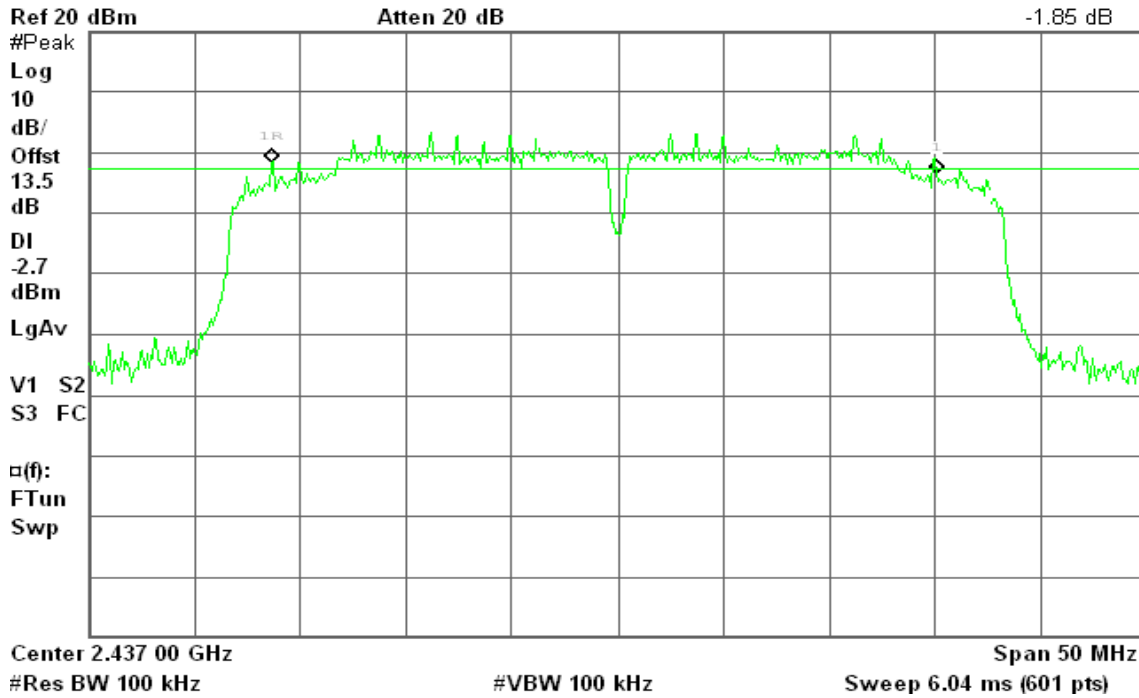


### 6dB Bandwidth (CH High)

Agilent 11:10:14 Oct 13, 2010

R T

Δ Mkr1 31.33 MHz  
-0.62 dB

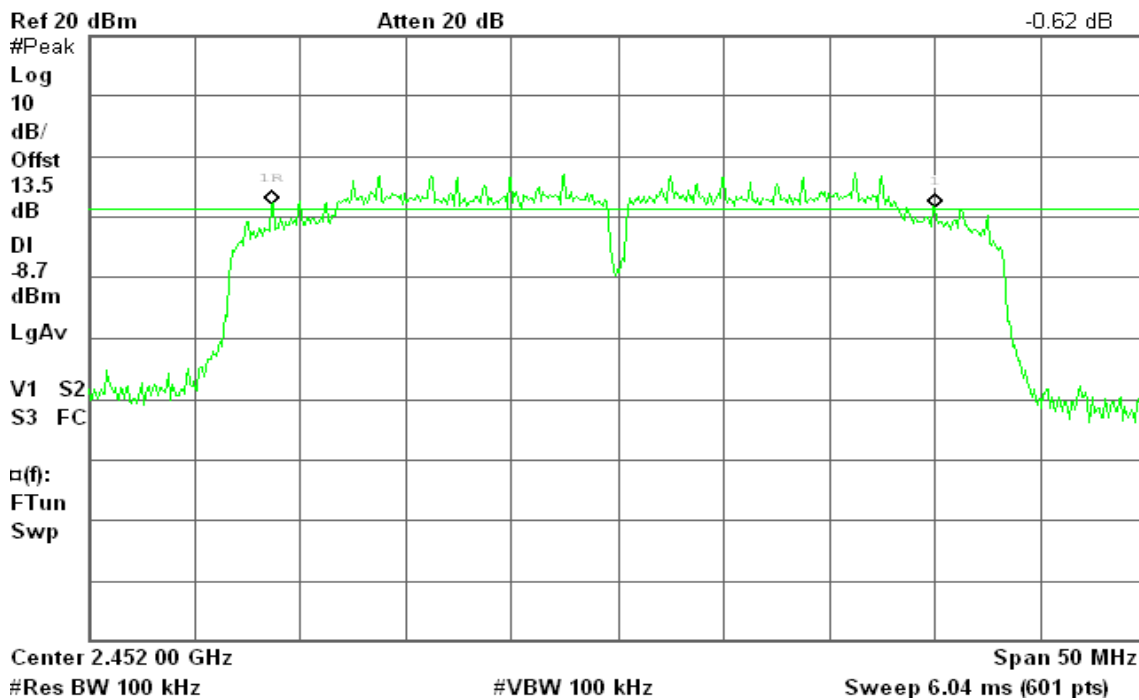




### IEEE 802.11a mode 6dB Bandwidth (CH Low)

Agilent 11:10:26 Jul 28, 2010

R T

Δ Mkr1 16.25 MHz  
-0.55 dB

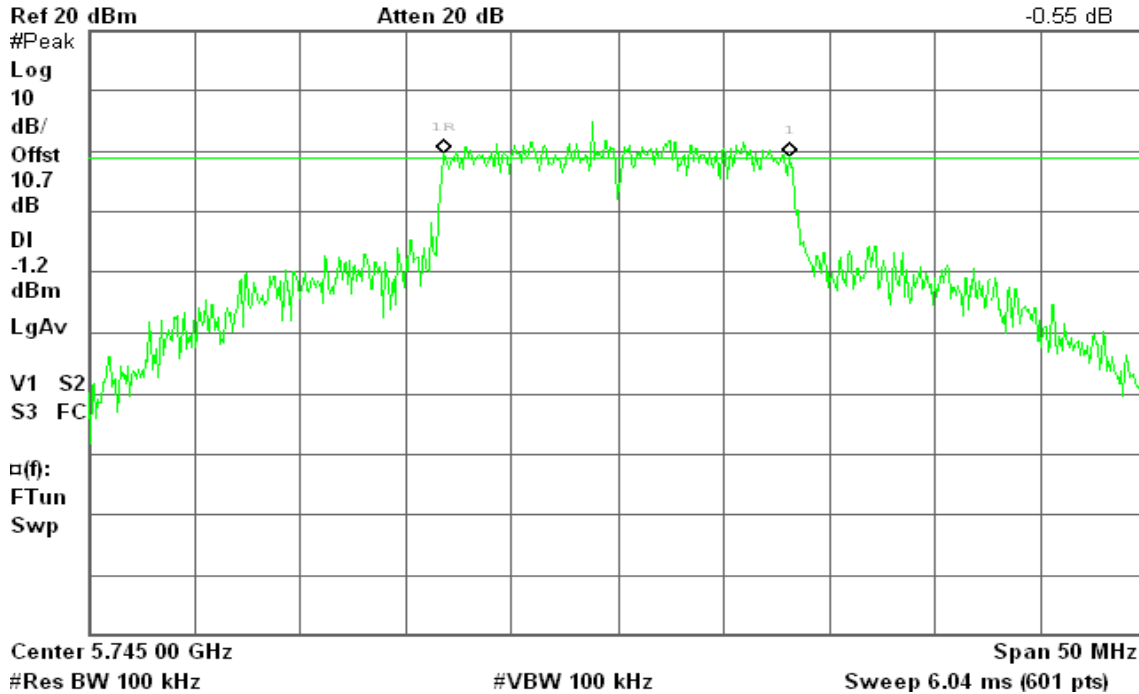


### 6dB Bandwidth (CH Mid)

Agilent 11:15:24 Jul 28, 2010

R T

Δ Mkr1 16.33 MHz  
-2.95 dB

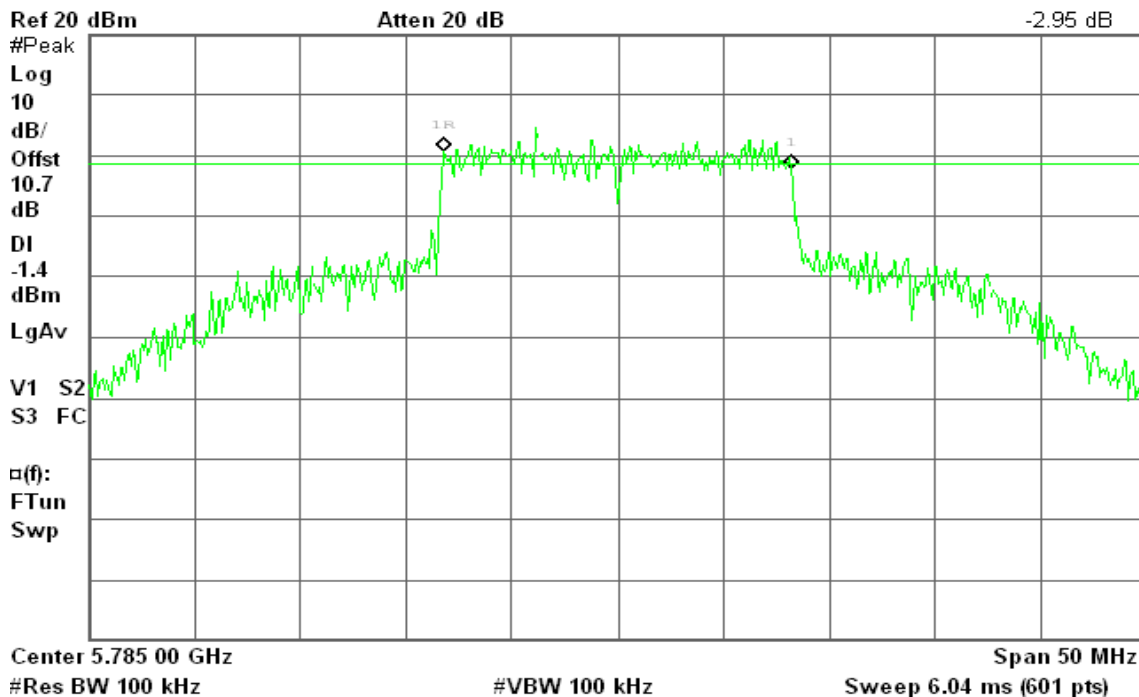




### 6dB Bandwidth (CH High)

Agilent 11:20:26 Jul 28, 2010

R T

Δ Mkr1 16.50 MHz  
-0.14 dB

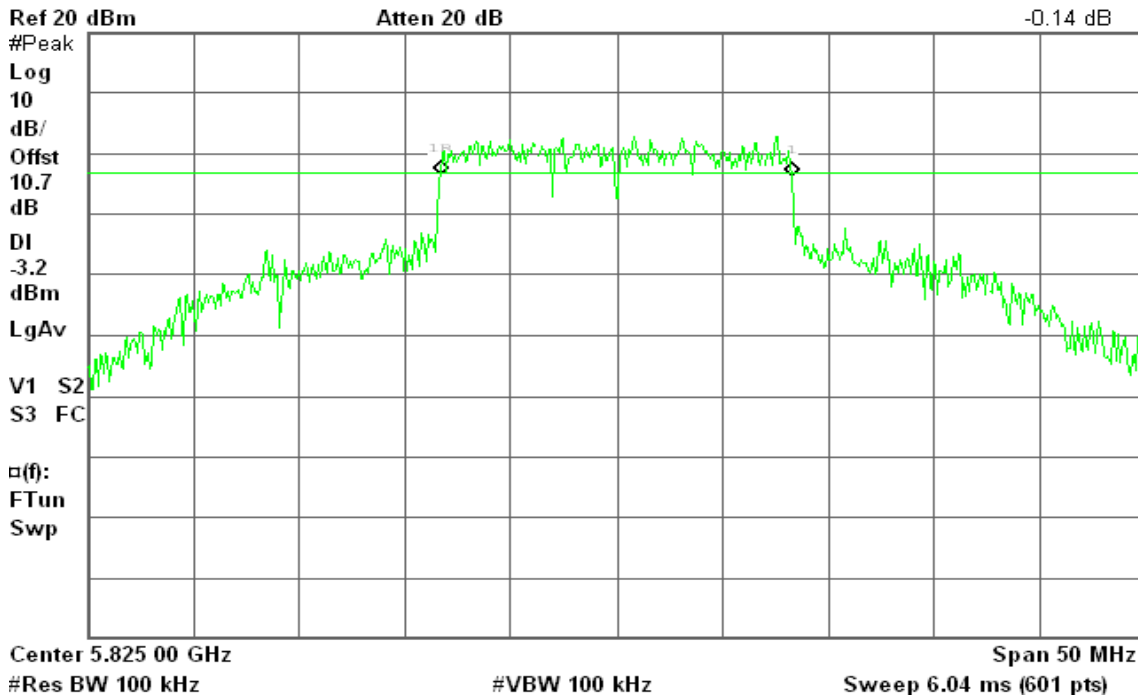


### draft 802.11n Standard-20 MHz Channel mode

### 6dB Bandwidth (CH Low)

Agilent 13:49:15 Jul 28, 2010

R T

Δ Mkr1 16.75 MHz  
0.89 dB

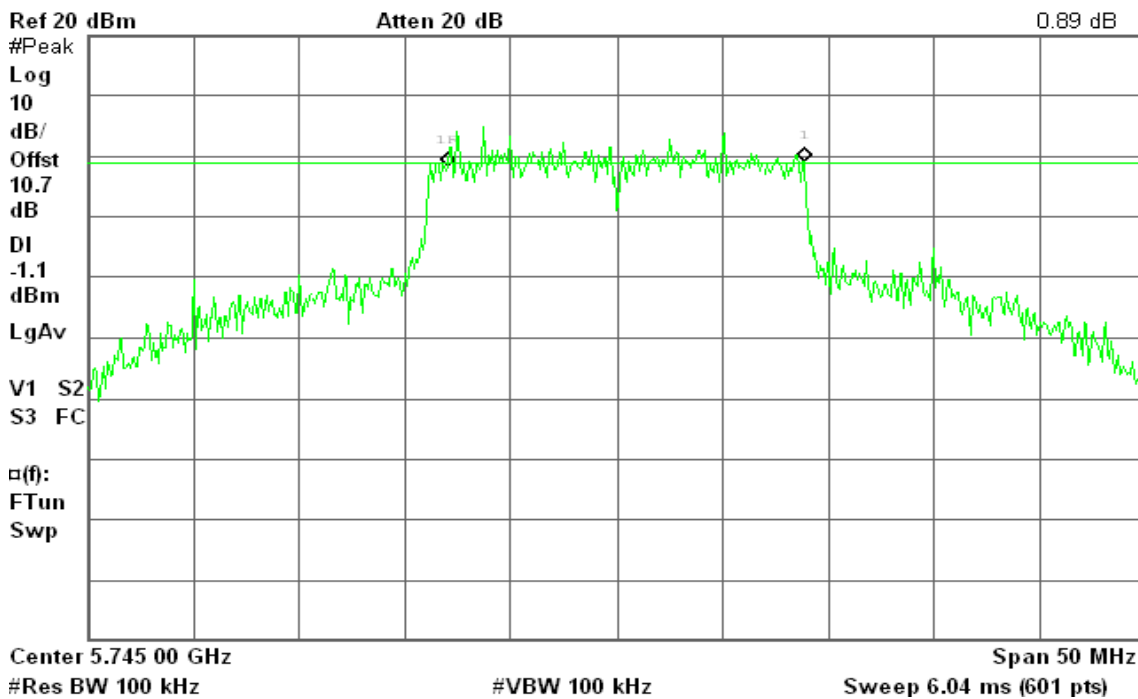




### 6dB Bandwidth (CH Mid)

Agilent 13:54:07 Jul 28, 2010

R T

Δ Mkr1 17.25 MHz  
-0.93 dB

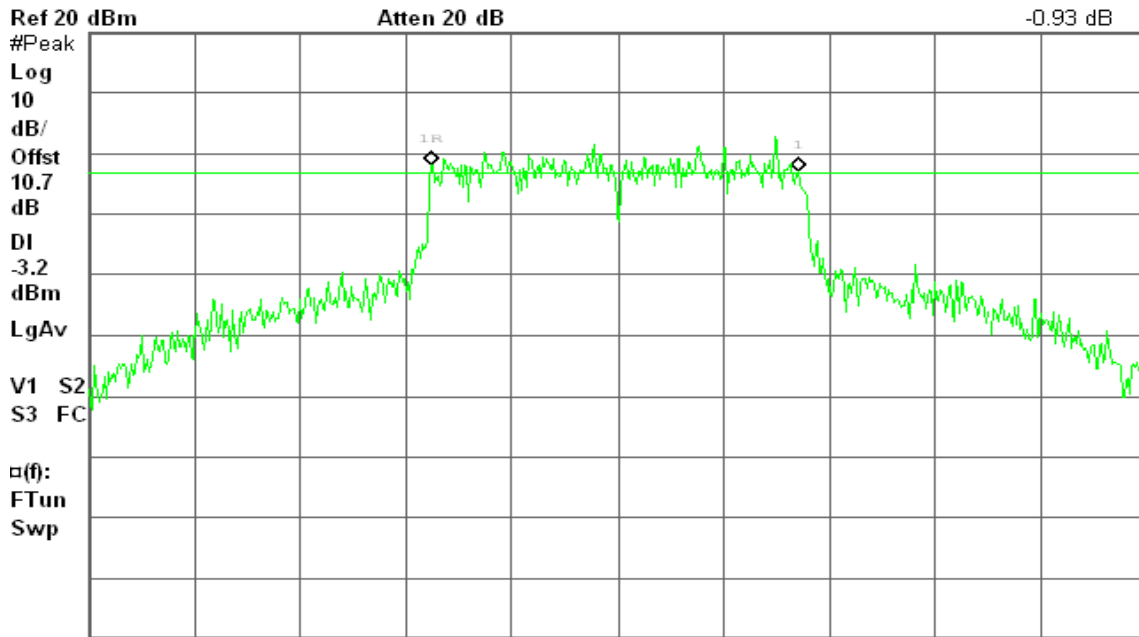

Center 5.785 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 6.04 ms (601 pts)

### 6dB Bandwidth (CH High)

Agilent 13:57:47 Jul 28, 2010

R T

Δ Mkr1 17.33 MHz  
0.82 dB

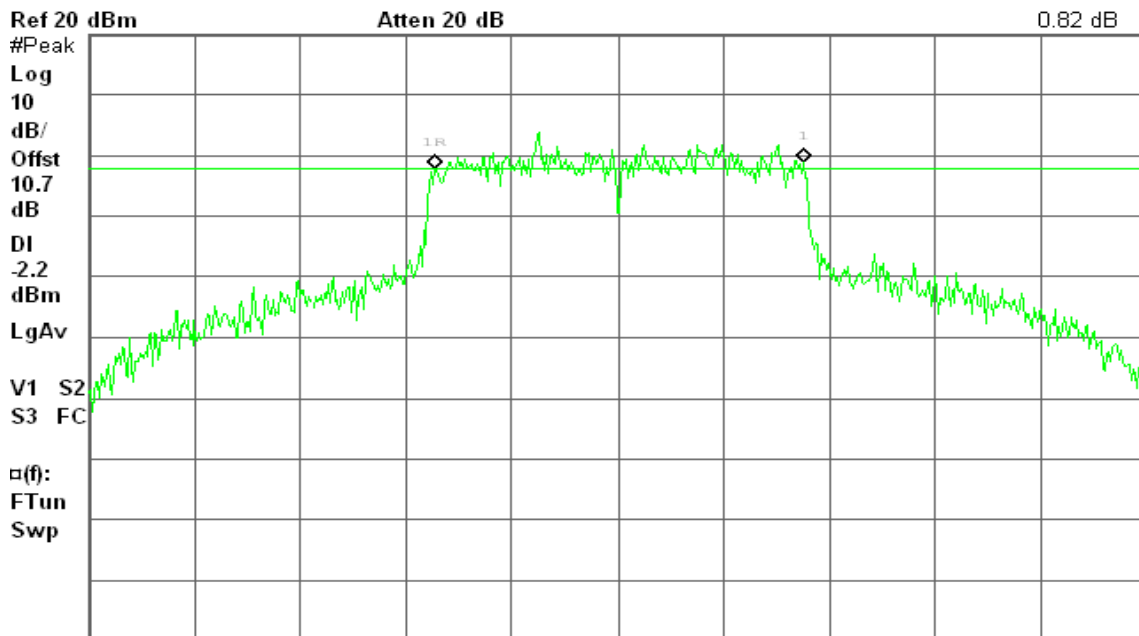

Center 5.825 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)






### draft 802.11n Wide-40 MHz Channel mode

#### 6dB Bandwidth (CH Low)

Agilent 17:29:07 Jul 28, 2010

R T

Δ Mkr1 27.58 MHz  
-1.09 dB

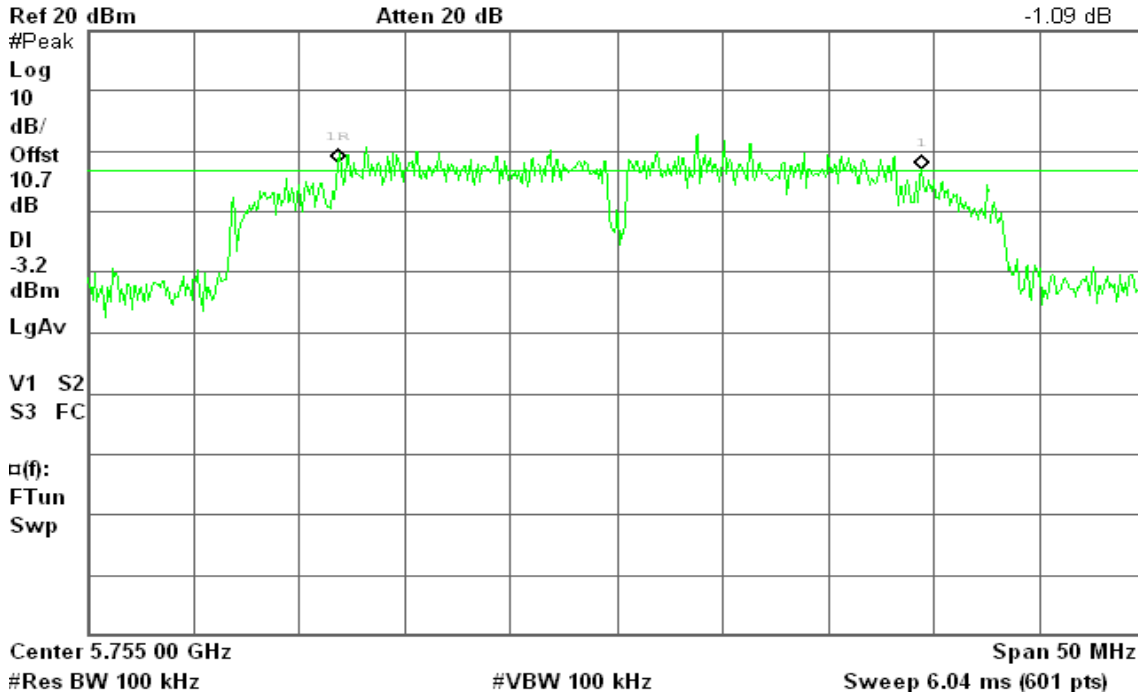


#### 6dB Bandwidth (CH High)

Agilent 17:34:48 Jul 28, 2010

R T

Δ Mkr1 30.67 MHz  
0.27 dB

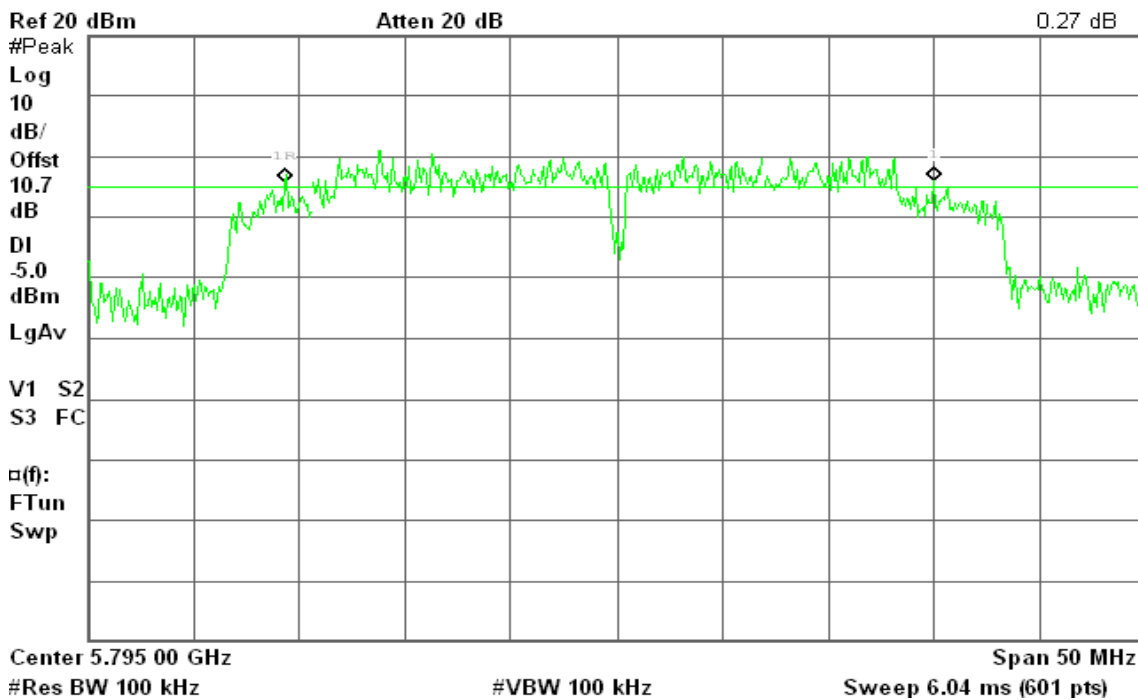




## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

### TEST RESULTS

*No non-compliance noted.*



**Test Data**

**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	24.92	0.3105	1.00	PASS
Mid	2437	23.58	0.2280		PASS
High	2462	24.26	0.2667		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	28.01	0.6324	1.00	PASS
Mid	2437	27.94	0.6223		PASS
High	2462	27.81	0.6039		PASS

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	26.41	0.4375	1.00	PASS
Mid	2437	26.76	0.4742		PASS
High	2462	27.07	0.5093		PASS

**Test mode: draft 802.11n Wide-40 MHz Channel mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	20.23	0.1054	1.00	PASS
Mid	2437	27.04	0.5058		PASS
High	2452	21.81	0.1517		PASS



**Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5745	21.6	0.1445	1.00	PASS
Mid	5785	22.02	0.1592		PASS
High	5825	21.59	0.1442		PASS

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5745	20.5	0.1122	1.00	PASS
Mid	5785	20.46	0.1112		PASS
High	5825	20.36	0.1086		PASS

**Test mode: draft 802.11n Wide-40 MHz Channel mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5755	20.47	0.1114	1.00	PASS
High	5795	20.6	0.1148		PASS




## 7.3 AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

### TEST RESULTS

*No non-compliance noted.*



**Test Data**

**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	22.36	0.1722
Mid	2437	21.75	0.1496
High	2462	21.89	0.1545

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	19.11	0.0815
Mid	2437	19.12	0.0817
High	2462	19.13	0.0818

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	16.18	0.0415
Mid	2437	17.07	0.0509
High	2462	17.52	0.0565

**Test mode: draft 802.11n Wide-40 MHz Channel mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2422	10.78	0.0120
Mid	2437	18.05	0.0638
High	2452	12.18	0.0165



**Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	5745	17.28	0.0535
Mid	5785	17.82	0.0605
High	5825	17.86	0.0611

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	5745	16.08	0.0406
Mid	5785	15.82	0.0382
High	5825	15.86	0.0385

**Test mode: draft 802.11n Wide-40 MHz Channel mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	5755	16.19	0.0416
High	5795	16.34	0.0431




## 7.4 BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

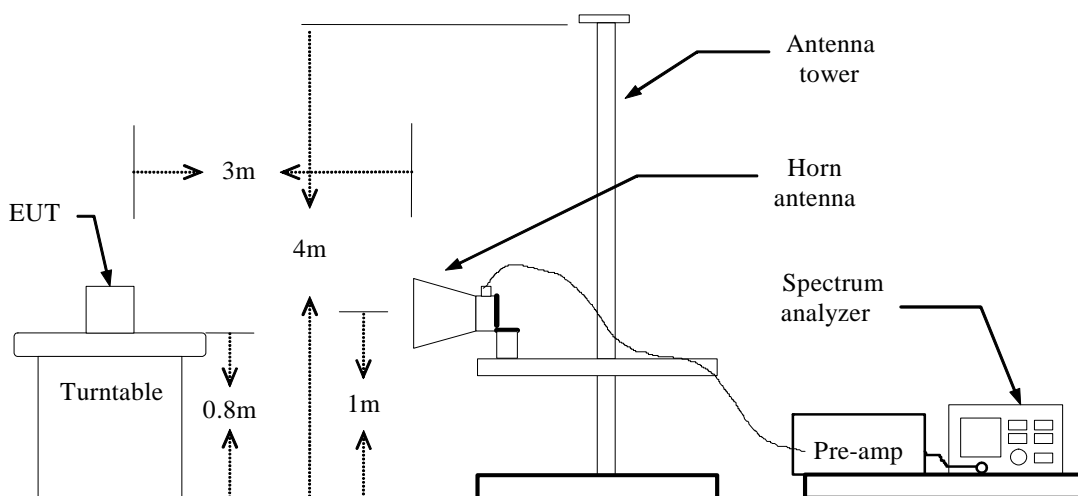

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS

Refer to attach spectrum analyzer data chart.






### Band Edges (IEEE 802.11b mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 16:55:41 Sep 28, 2010

R T

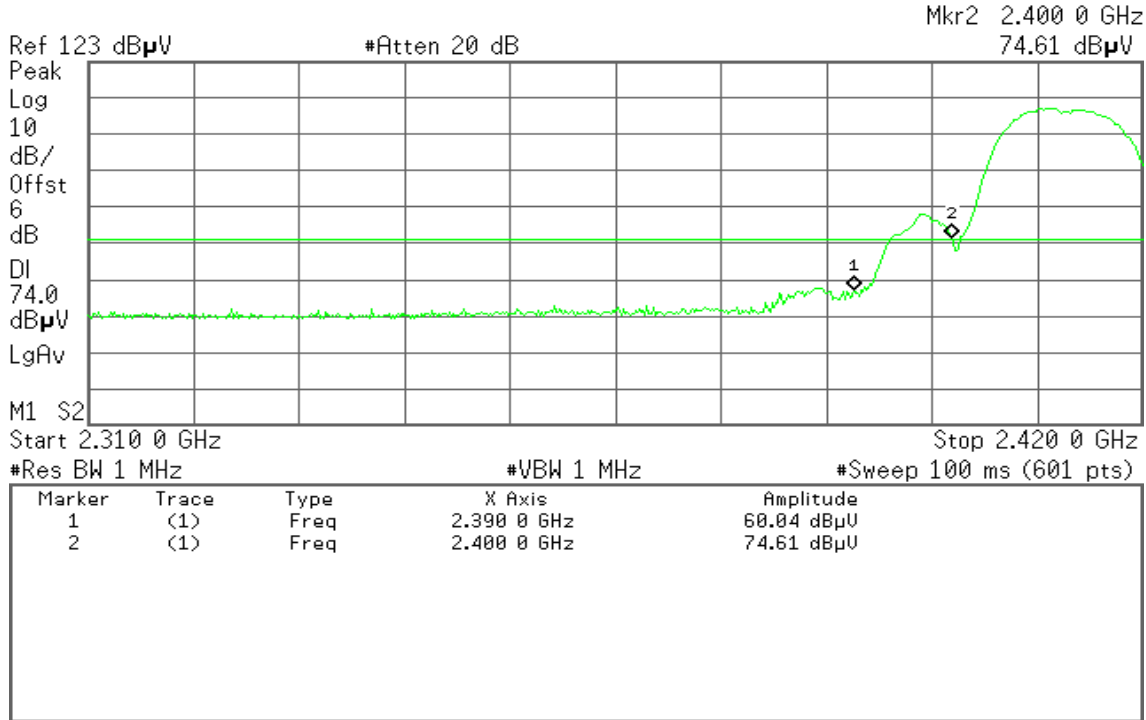


Detector mode: Average

Polarity: Vertical

Agilent 16:55:07 Sep 28, 2010

R T

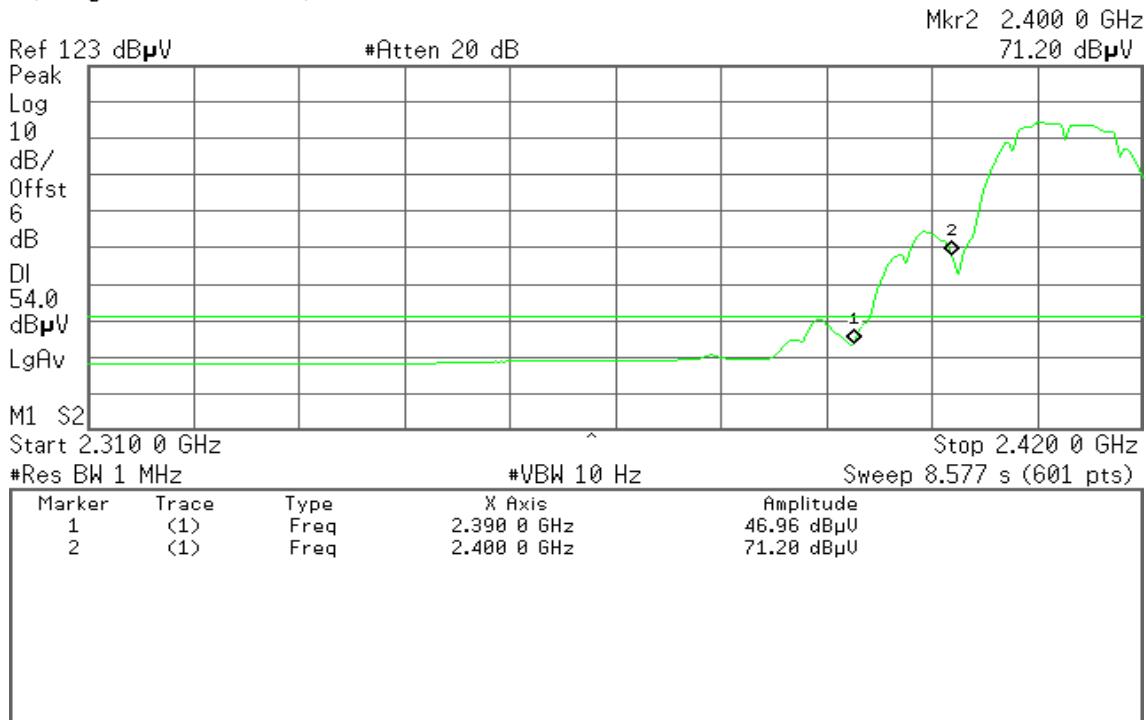




Detector mode: Peak

Polarity: Horizontal

Agilent 16:47:13 Sep 28, 2010

R T

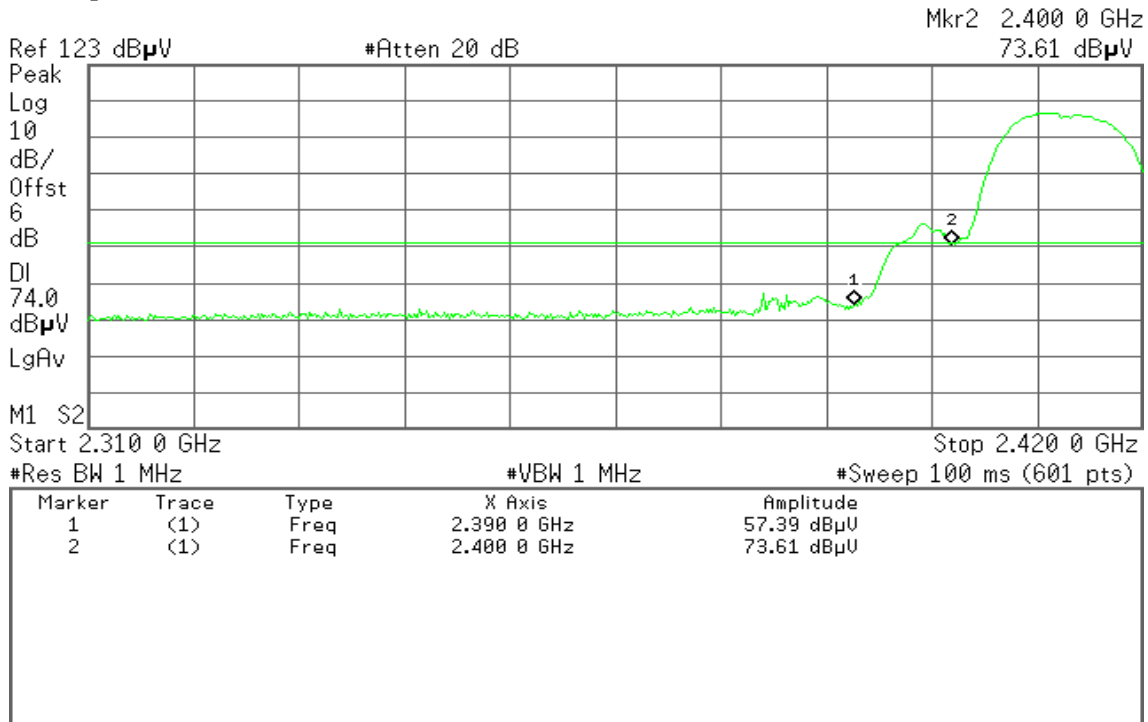


Detector mode: Average

Polarity: Horizontal

Agilent 16:46:25 Sep 28, 2010

R T

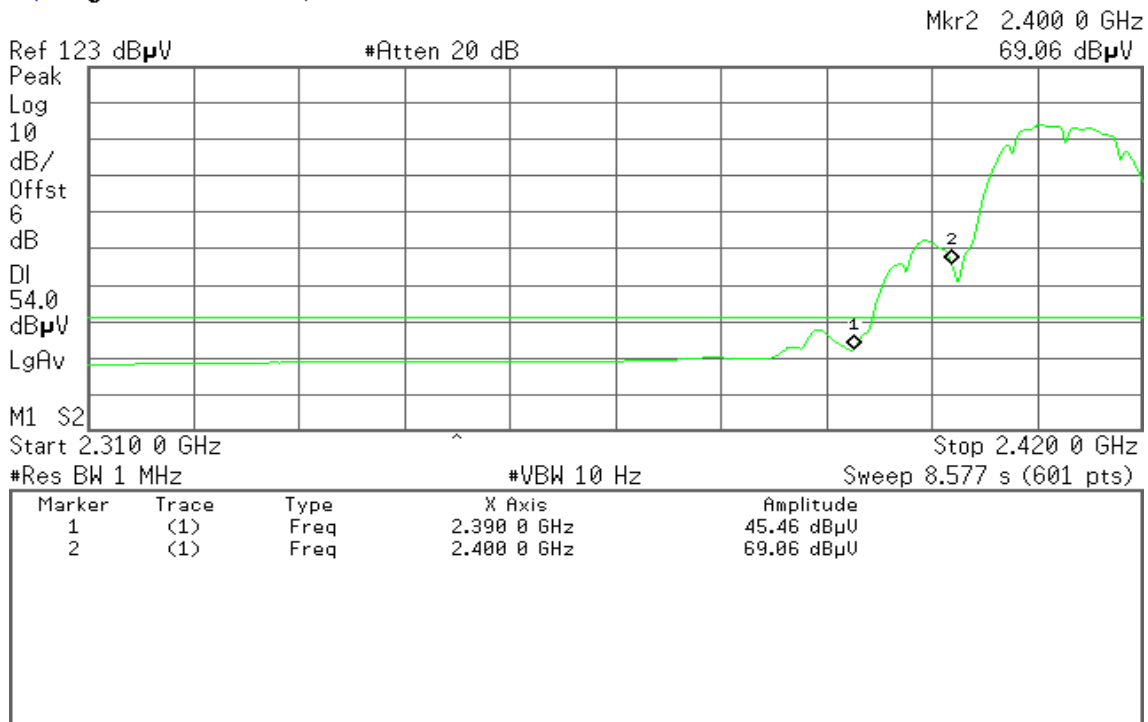



### Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 17:16:42 Sep 28, 2010

T

Mkr1 2.483 50 GHz  
56.18 dB $\mu$ V

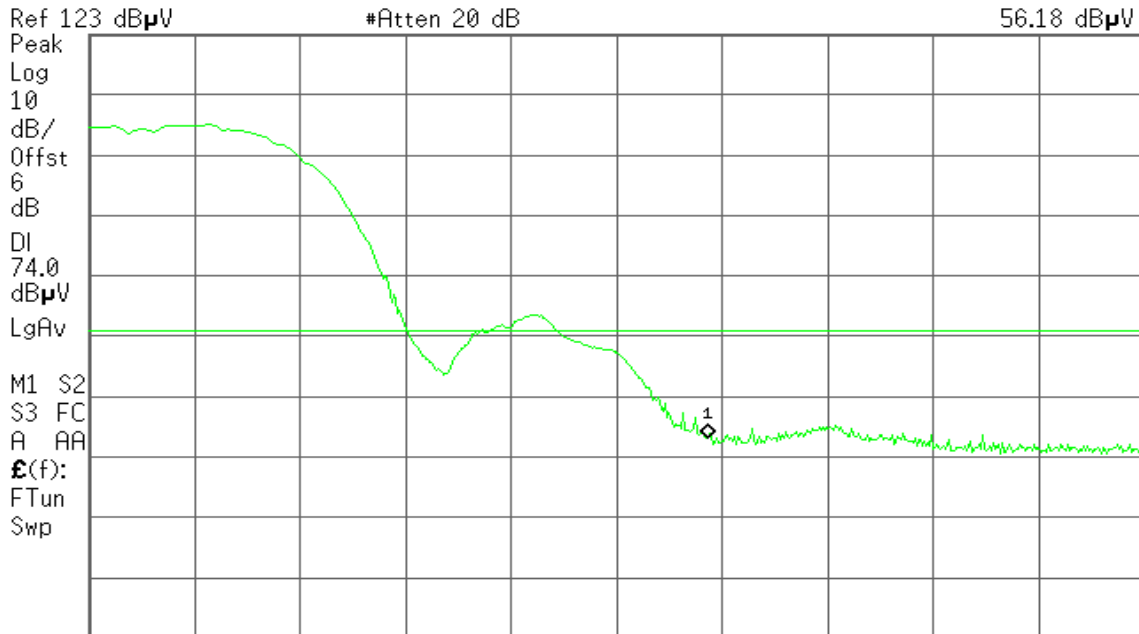

Start 2.460 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 17:16:06 Sep 28, 2010

T

Mkr1 2.483 50 GHz  
45.82 dB $\mu$ V

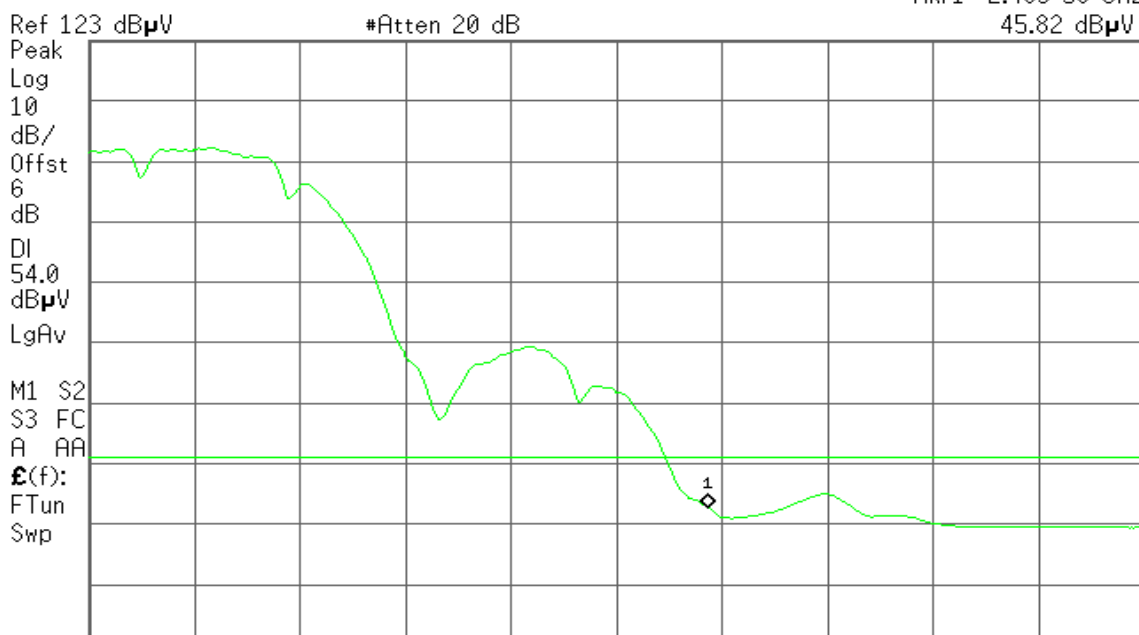

Start 2.460 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 3.119 s (601 pts)




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 17:08:47 Sep 28, 2010

T

Mkr1 2.483 50 GHz  
56.95 dB $\mu$ V

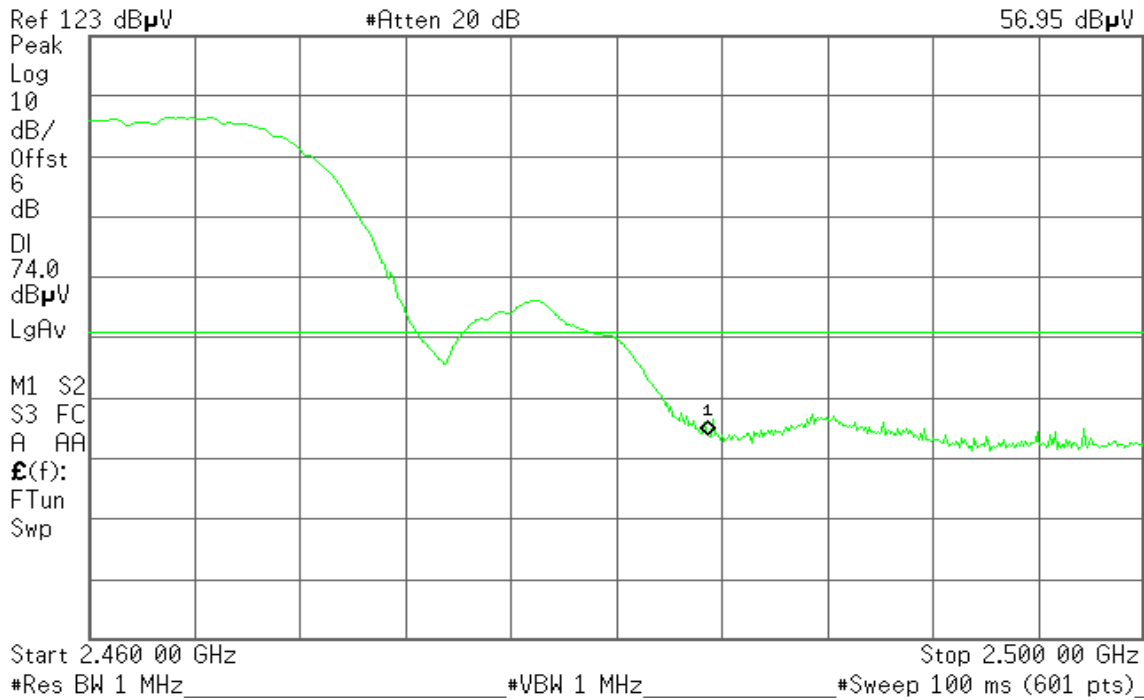


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 17:08:27 Sep 28, 2010

T

Mkr1 2.483 50 GHz  
47.47 dB $\mu$ V

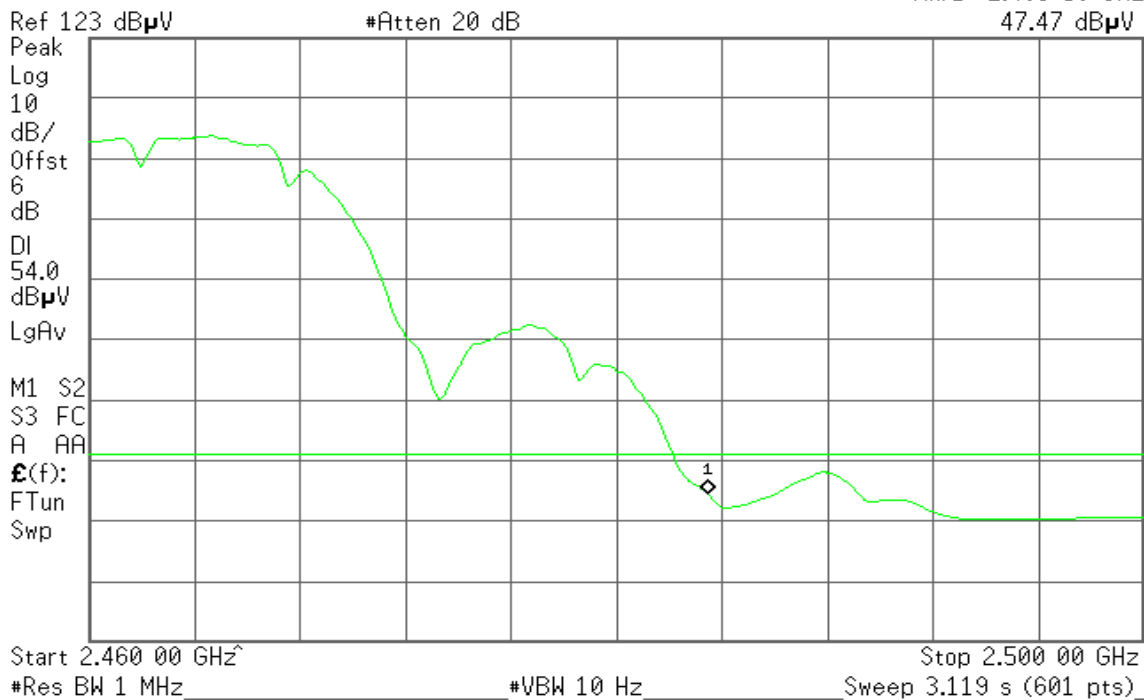




### Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 17:07:22 Sep 27, 2010

R T

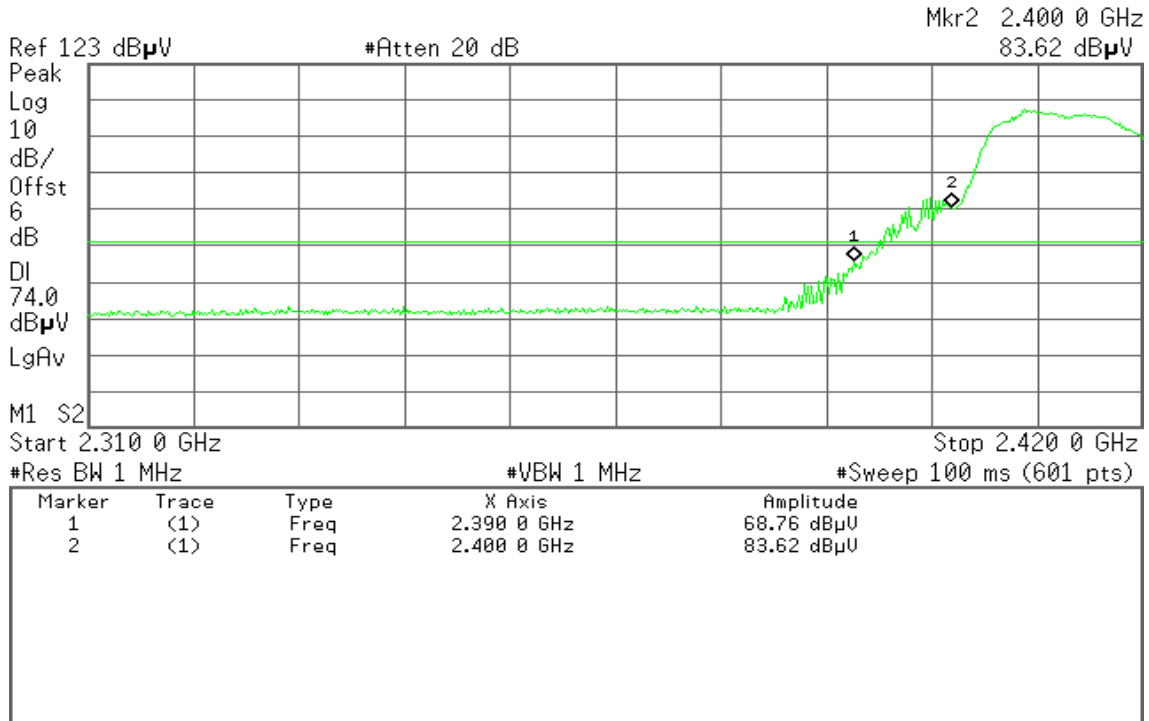


Detector mode: Average

Polarity: Vertical

Agilent 17:05:34 Sep 27, 2010

R T

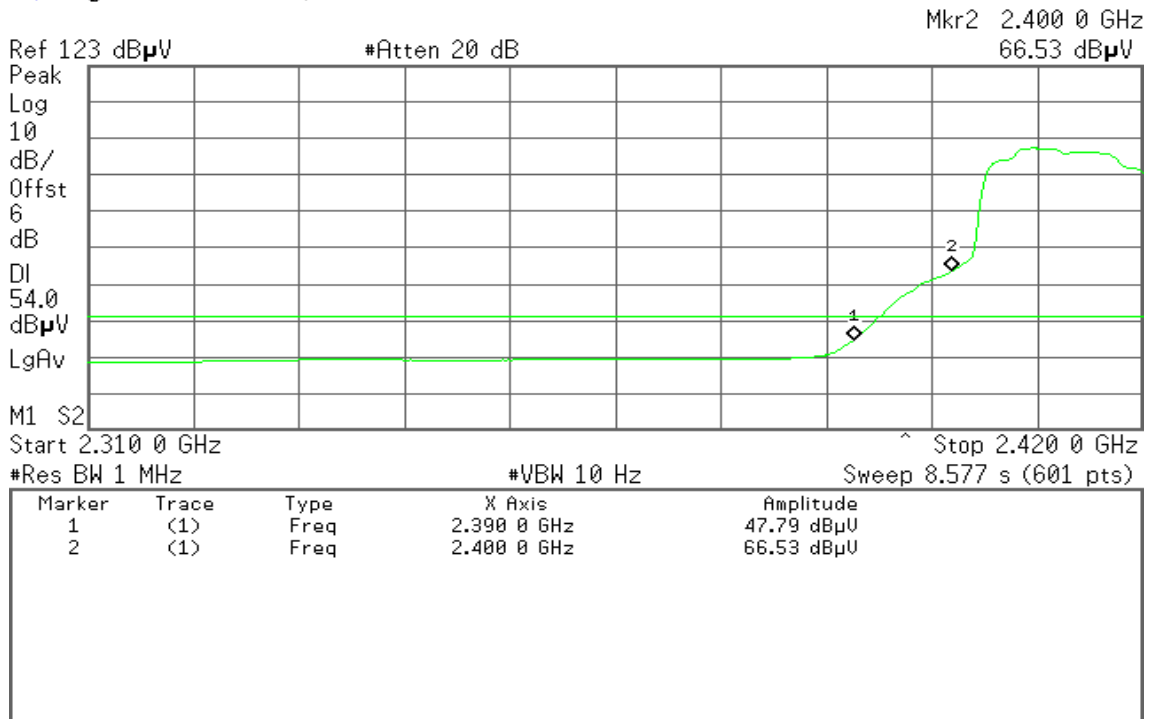




Detector mode: Peak

Polarity: Horizontal

Agilent 17:15:25 Sep 27, 2010

R T

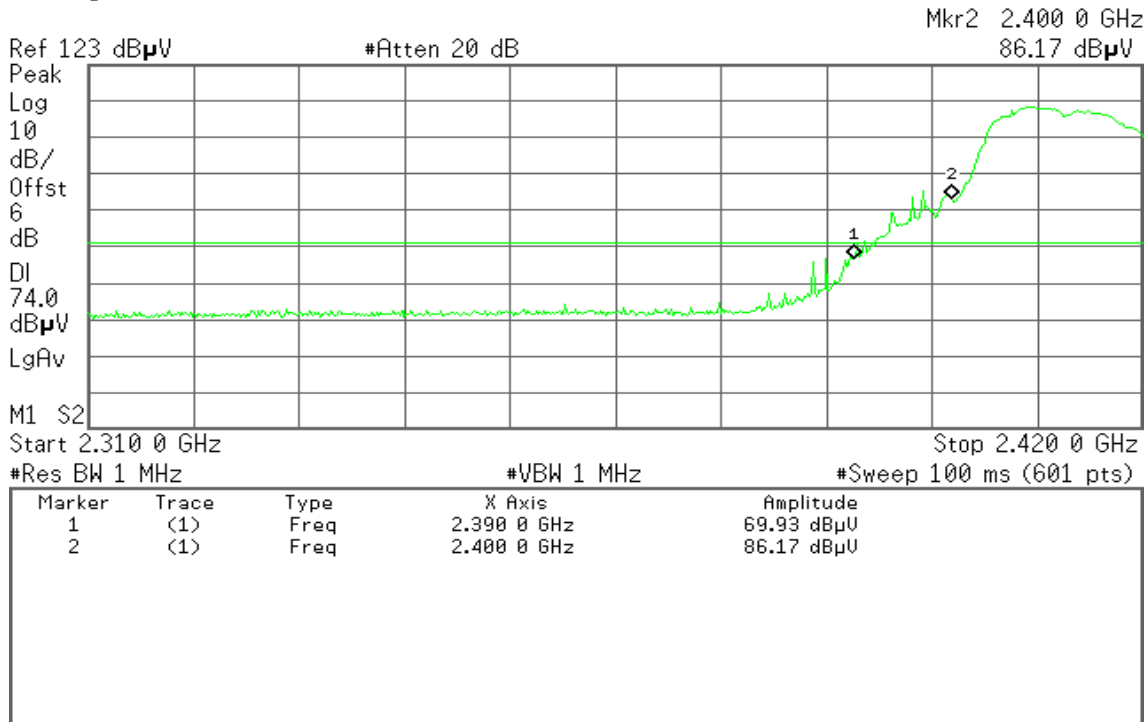


Detector mode: Average

Polarity: Horizontal

Agilent 17:14:55 Sep 27, 2010

R T

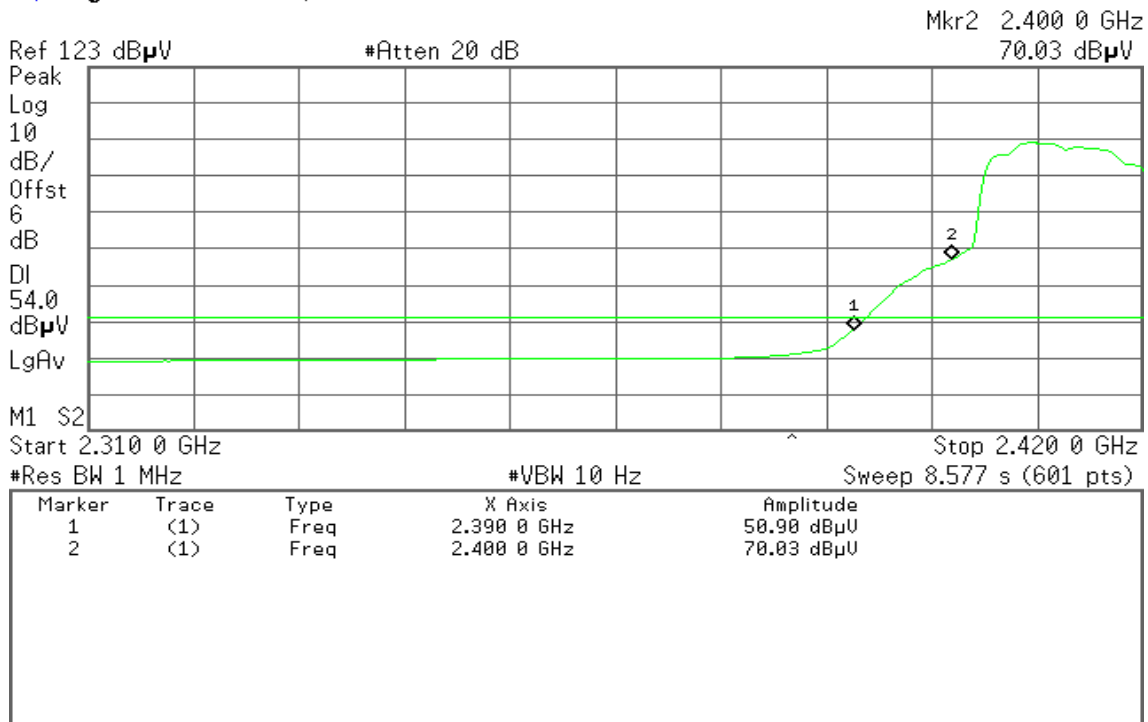



### Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 16:58:05 Sep 27, 2010

T

Mkr1 2.483 50 GHz  
72.03 dB $\mu$ V

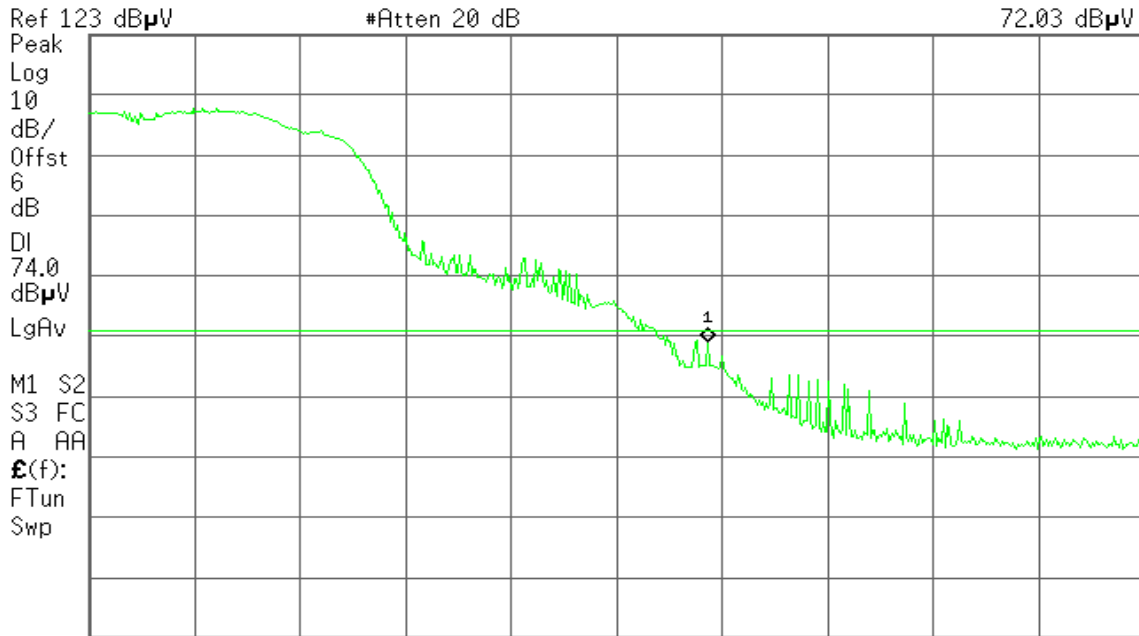

Start 2.460 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 16:56:41 Sep 27, 2010

T

Mkr1 2.483 50 GHz  
50.19 dB $\mu$ V

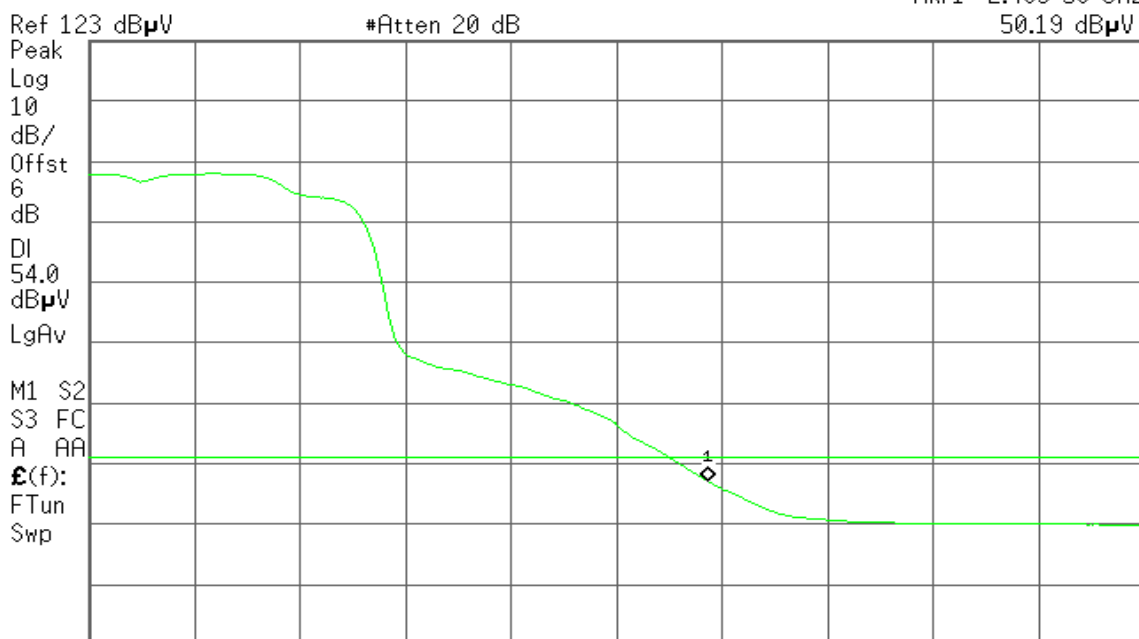

Start 2.460 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 3.119 s (601 pts)




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 16:44:09 Sep 27, 2010

R T

Mkr1 2.483 50 GHz  
72.06 dB $\mu$ V

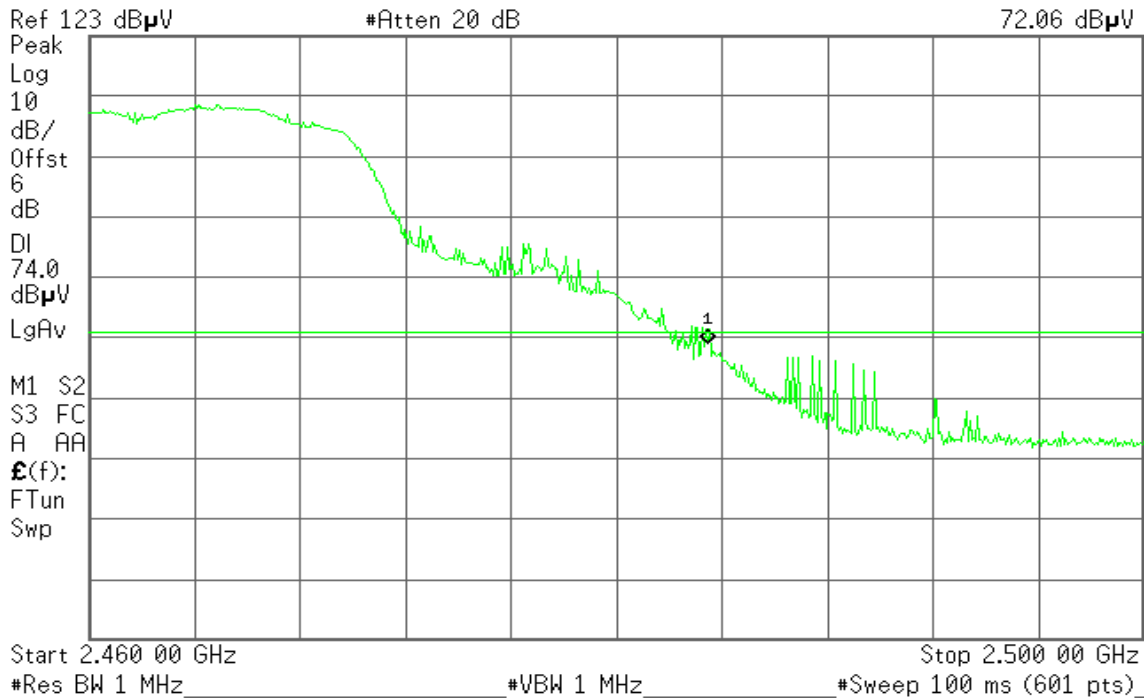


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 16:42:54 Sep 27, 2010

R T

Mkr1 2.483 50 GHz  
52.56 dB $\mu$ V

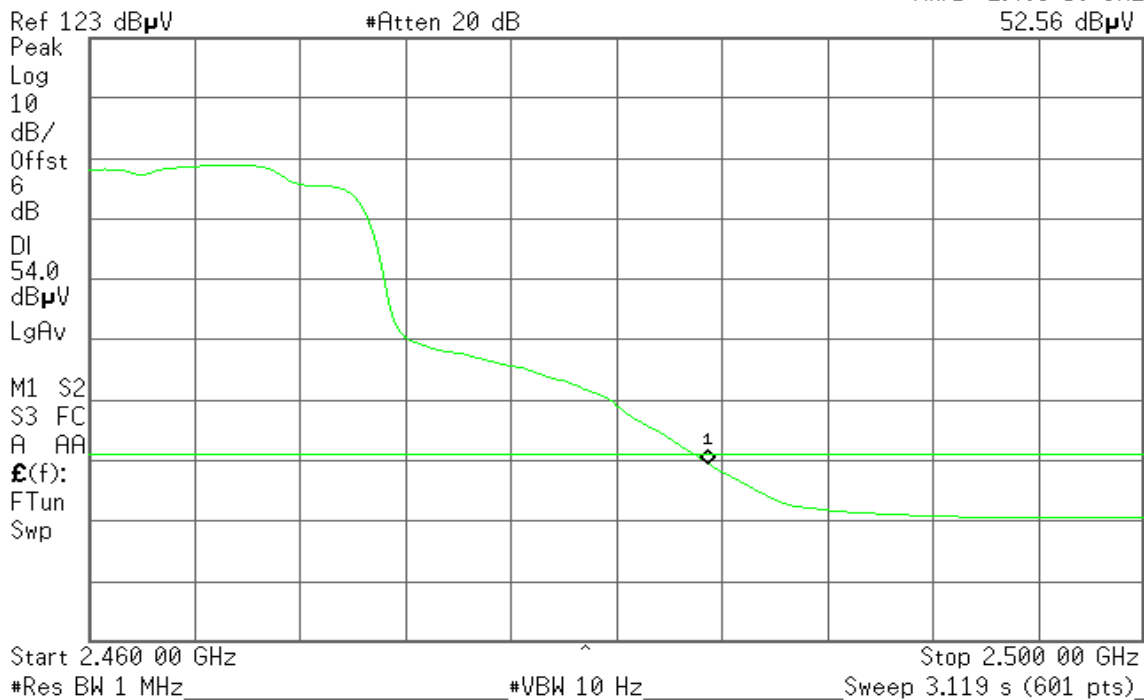






### Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 10:01:18 Sep 28, 2010

R T

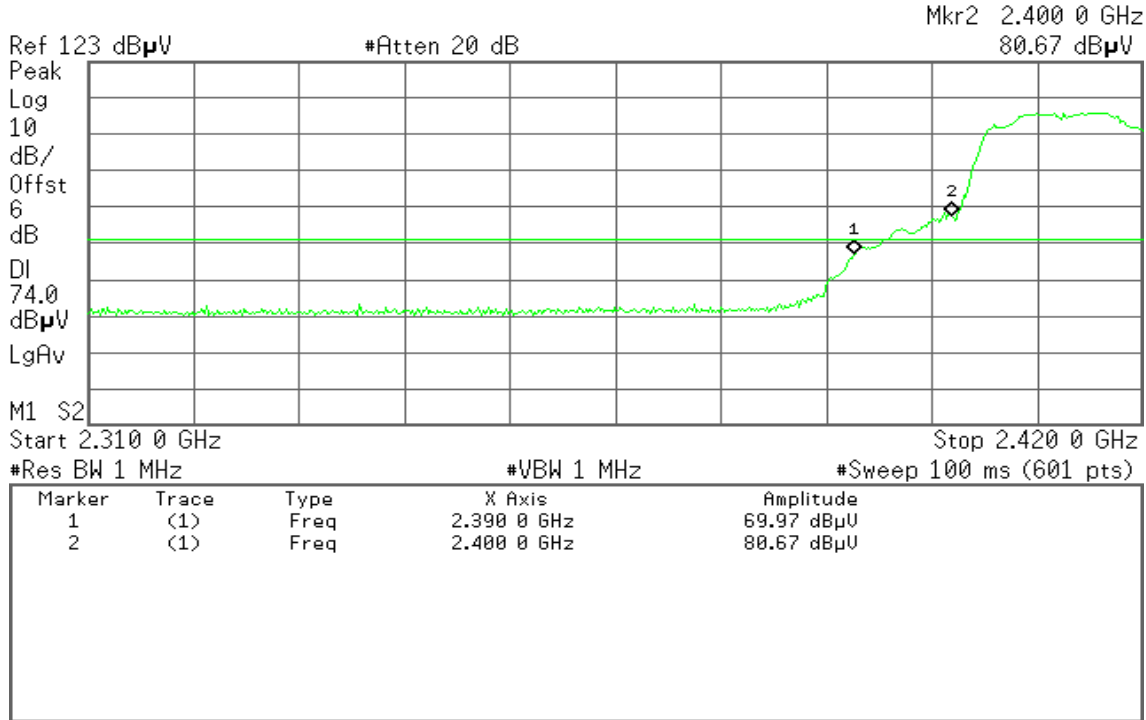


Detector mode: Average

Polarity: Vertical

Agilent 10:00:58 Sep 28, 2010

R T

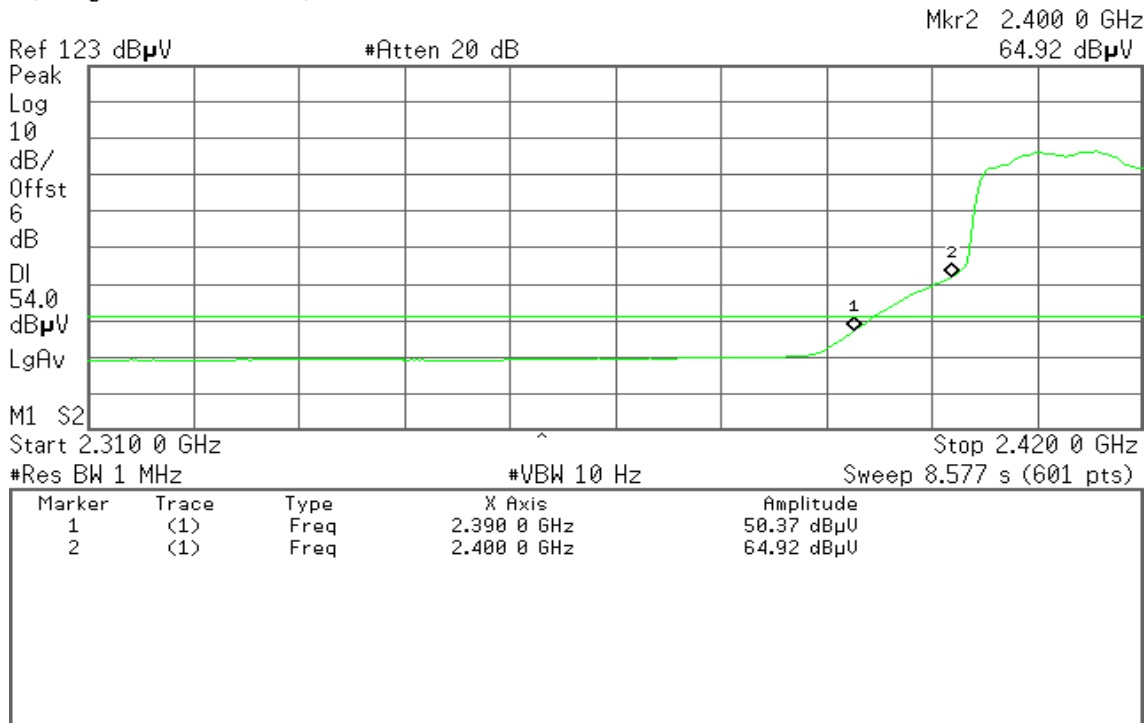




Detector mode: Peak

Polarity: Horizontal

Agilent 10:12:02 Sep 28, 2010

R T

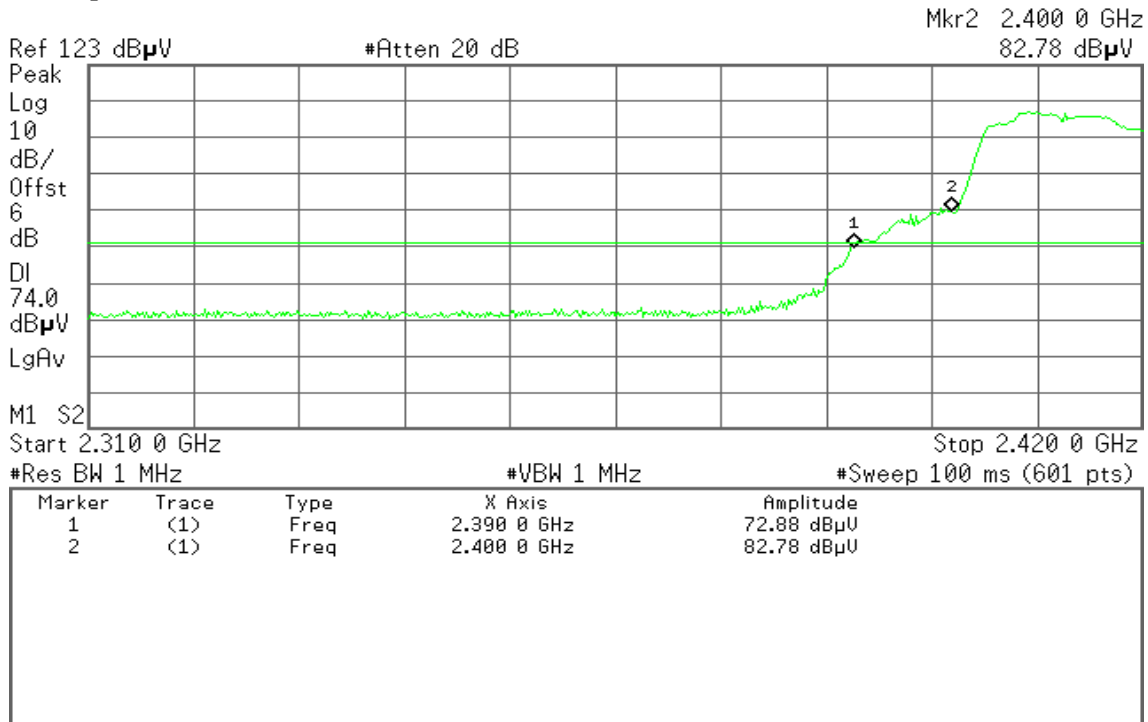


Detector mode: Average

Polarity: Horizontal

Agilent 10:11:36 Sep 28, 2010

R T

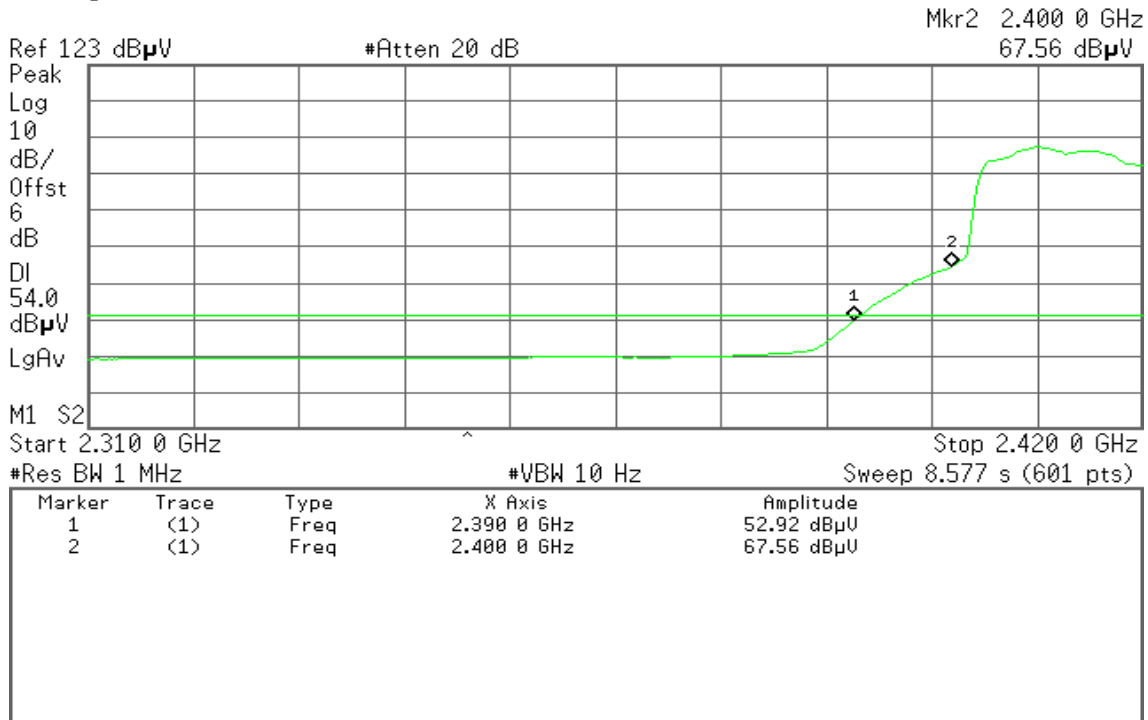



### Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 15:30:32 Sep 28, 2010

T

Mkr1 2.483 50 GHz  
66.45 dB $\mu$ V

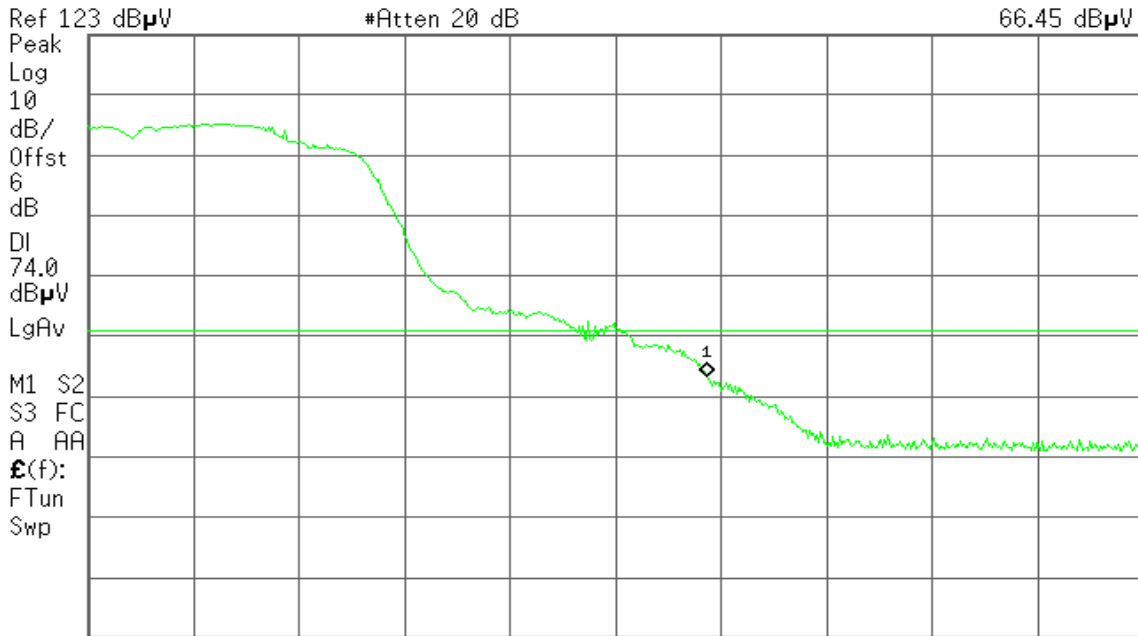

Start 2.460 00 GHz #Res BW 1 MHz #VBW 1 MHz Stop 2.500 00 GHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 15:30:04 Sep 28, 2010

T

Mkr1 2.483 50 GHz  
49.16 dB $\mu$ V

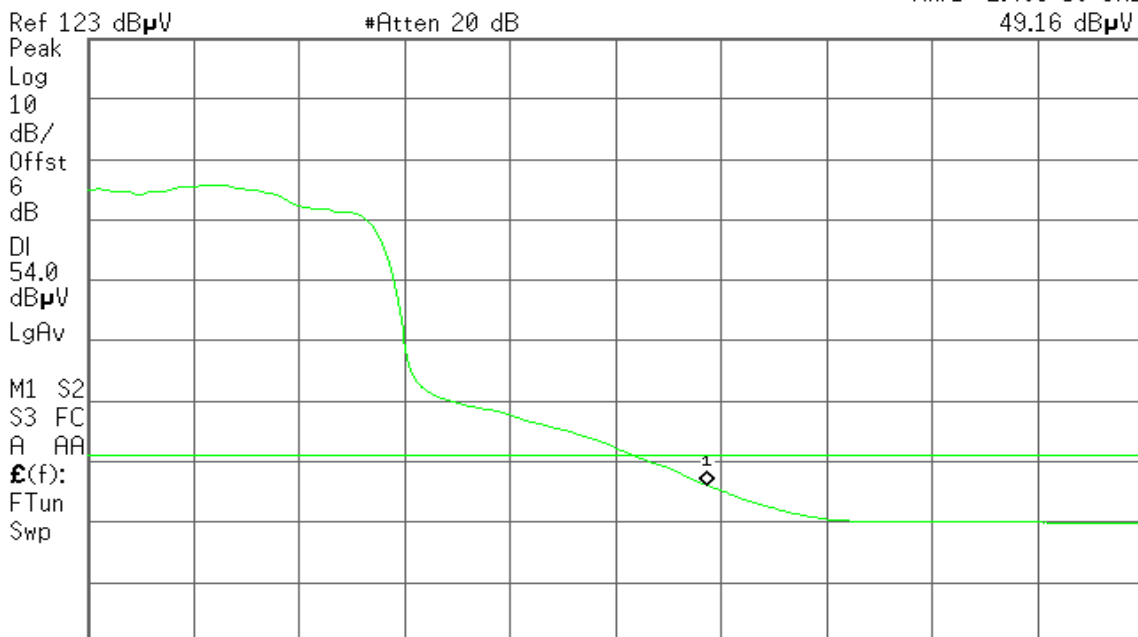

Start 2.460 00 GHz #Res BW 1 MHz #VBW 10 Hz Stop 2.500 00 GHz Sweep 3.119 s (601 pts)




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 15:38:57 Sep 28, 2010

R T

Mkr1 2.483 50 GHz  
69.19 dB $\mu$ V

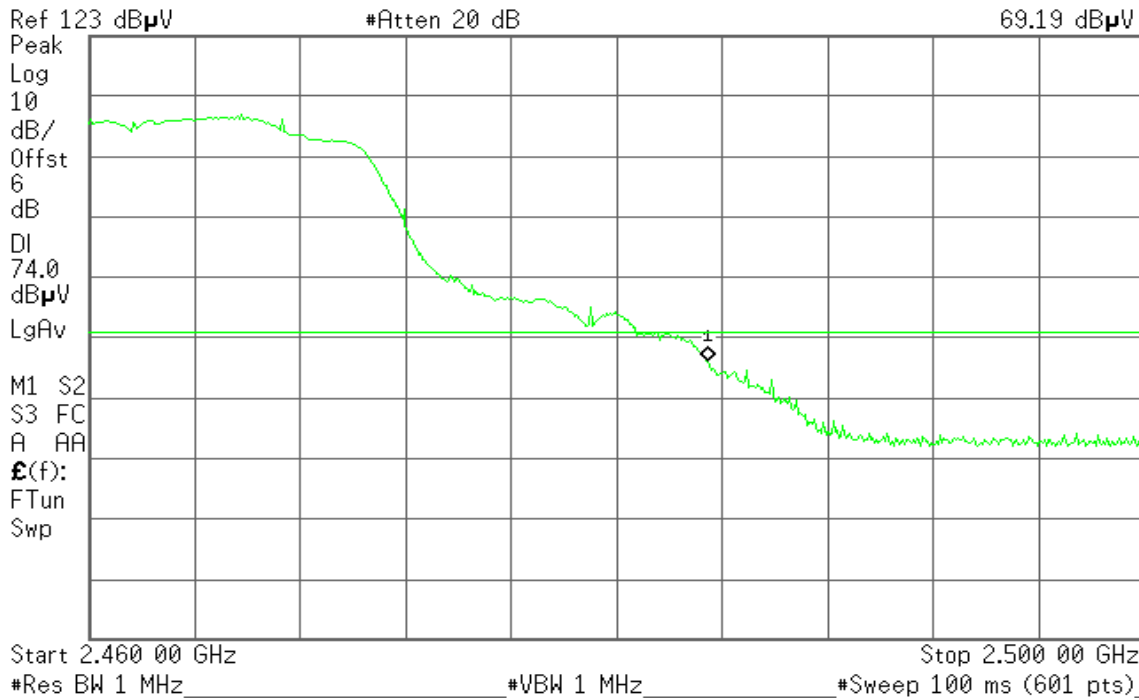


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 15:38:37 Sep 28, 2010

R T

Mkr1 2.483 50 GHz  
51.10 dB $\mu$ V

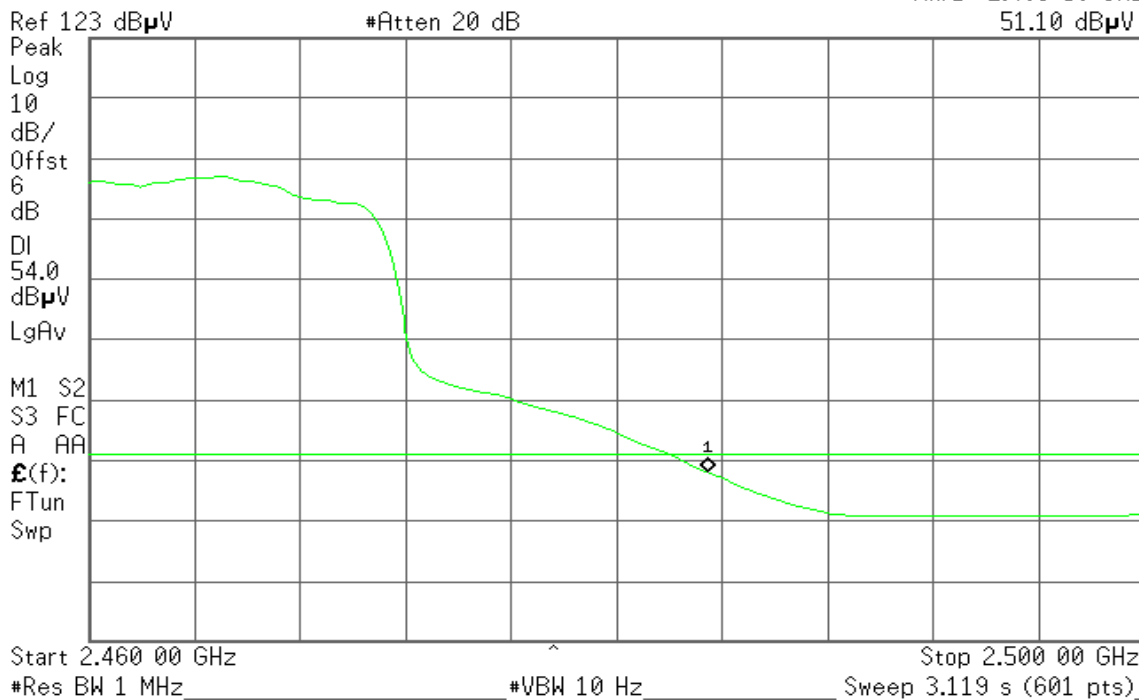




### Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 16:22:34 Sep 28, 2010

R T

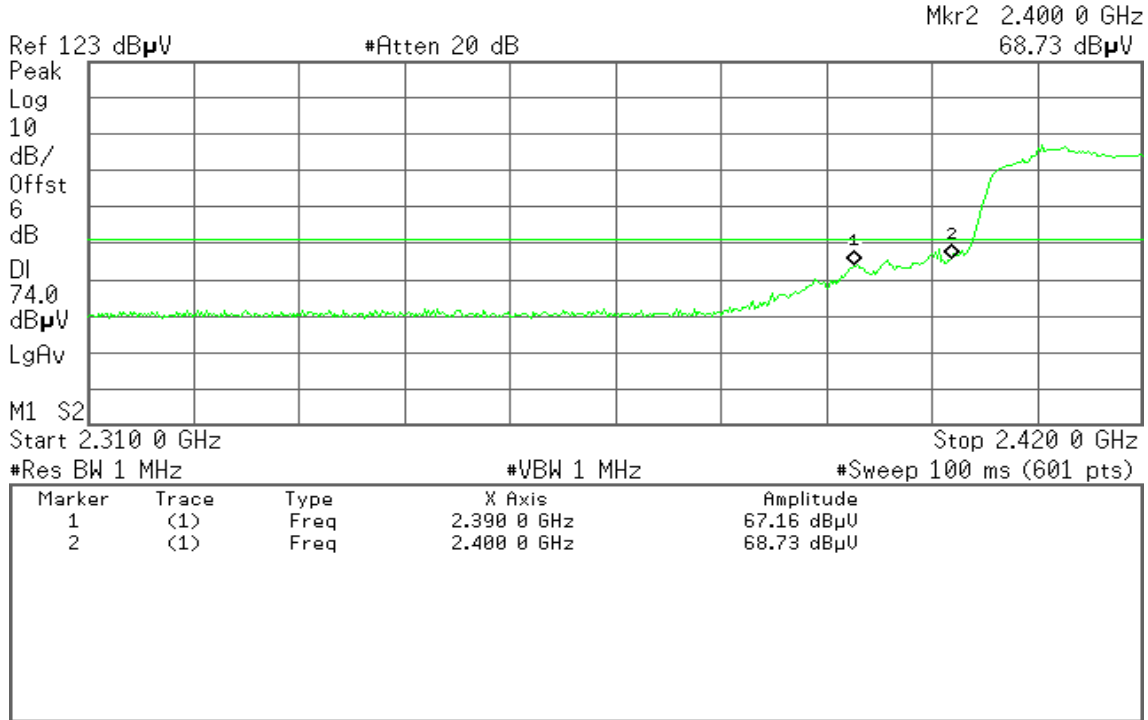


Detector mode: Average

Polarity: Vertical

Agilent 16:23:22 Sep 28, 2010

R T

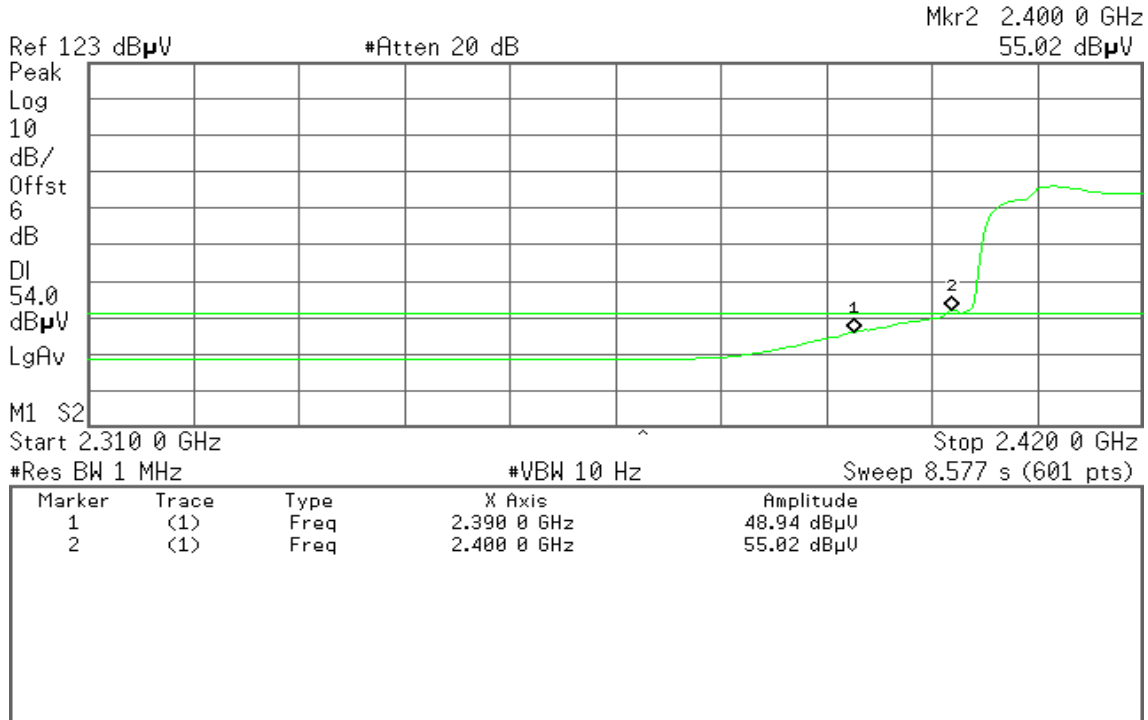




Detector mode: Peak

Polarity: Horizontal

Agilent 16:21:37 Sep 28, 2010

R T

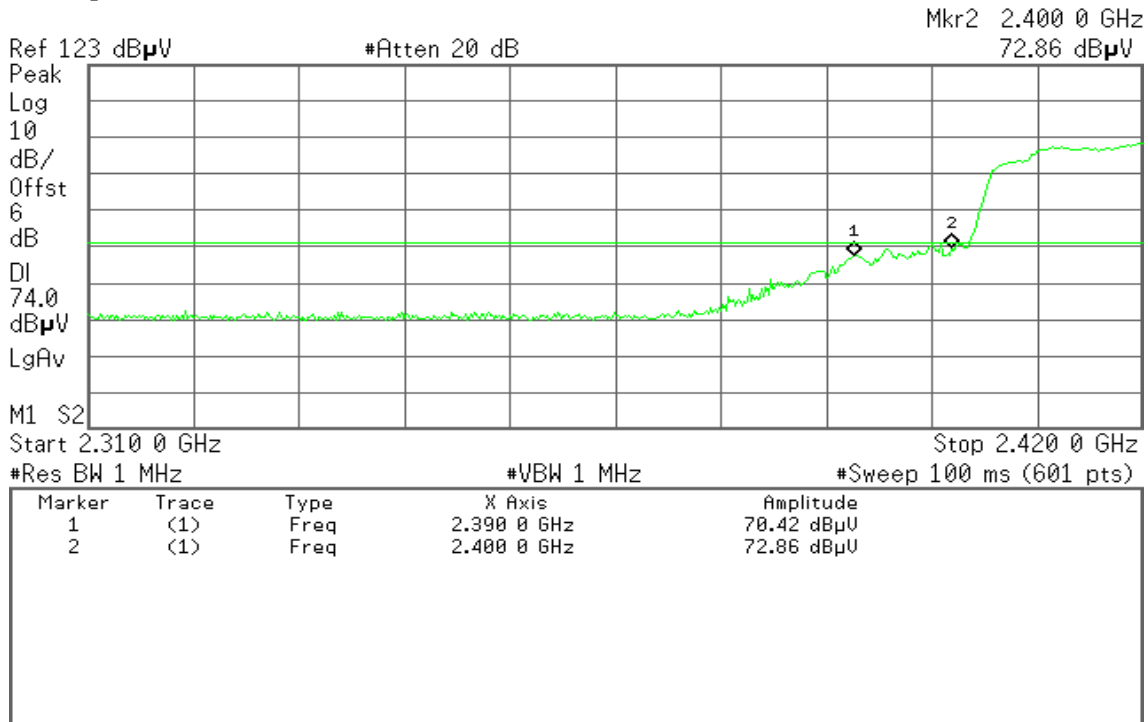


Detector mode: Average

Polarity: Horizontal

Agilent 16:21:07 Sep 28, 2010

R T

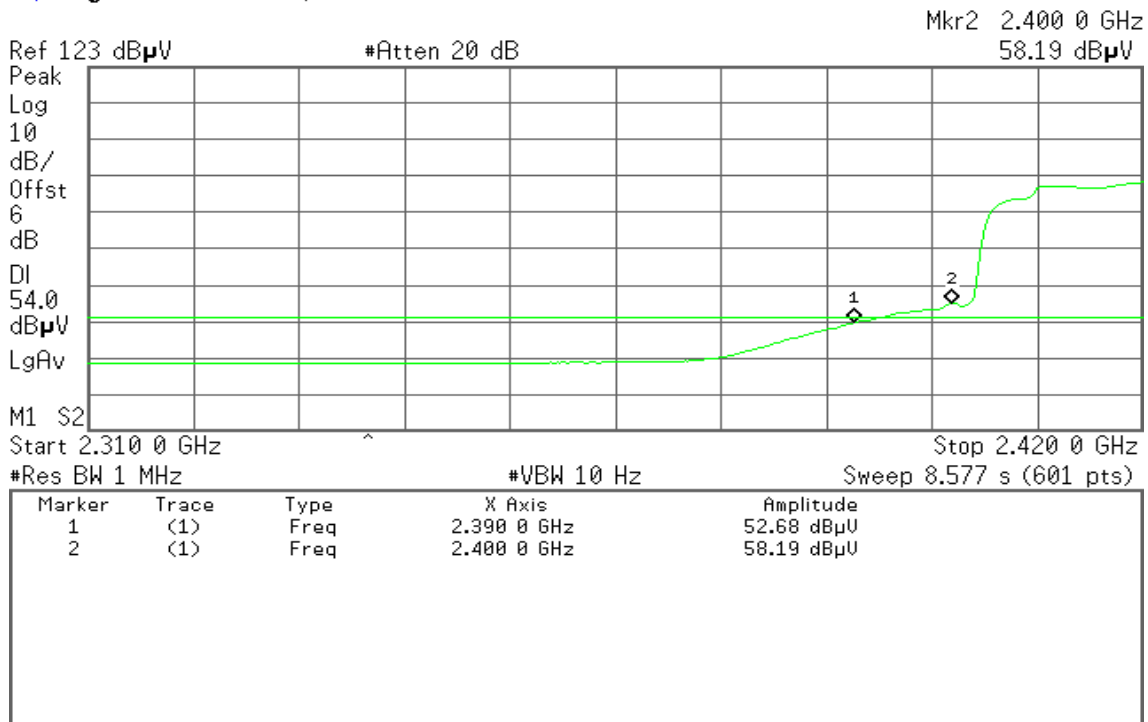



### Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 16:05:31 Sep 28, 2010

R T

Mkr1 2.483 50 GHz  
64.60 dB $\mu$ V

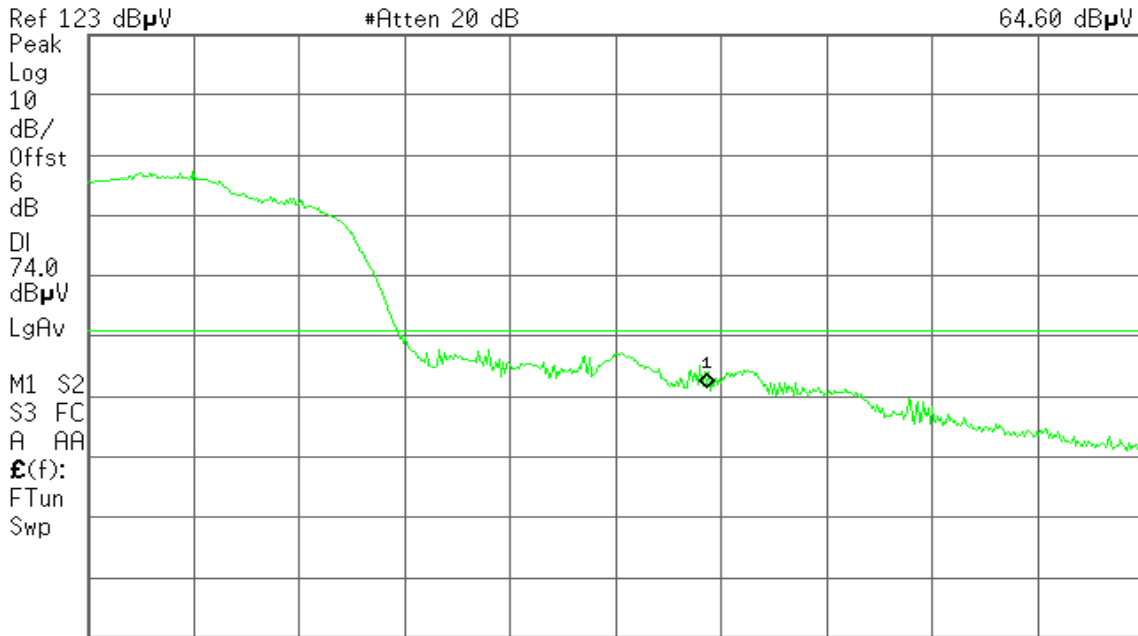

Start 2.460 00 GHz #Res BW 1 MHz #Atten 20 dB #VBW 1 MHz #Sweep 100 ms (601 pts) Stop 2.500 00 GHz


Detector mode: Average

Polarity: Vertical

Agilent 16:04:39 Sep 28, 2010

R T

Mkr1 2.483 50 GHz  
50.75 dB $\mu$ V

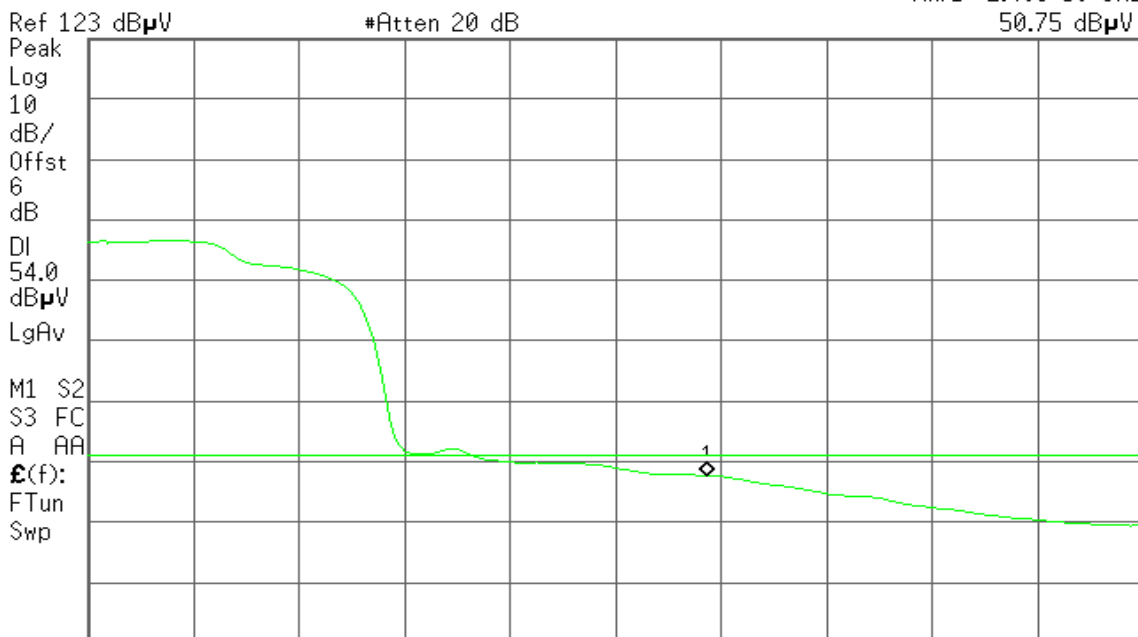

Start 2.460 00 GHz #Res BW 1 MHz #Atten 20 dB #VBW 10 Hz Sweep 3.119 s (601 pts) Stop 2.500 00 GHz




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 15:54:41 Sep 28, 2010

R T

Mkr1 2.483 50 GHz  
65.53 dB $\mu$ V

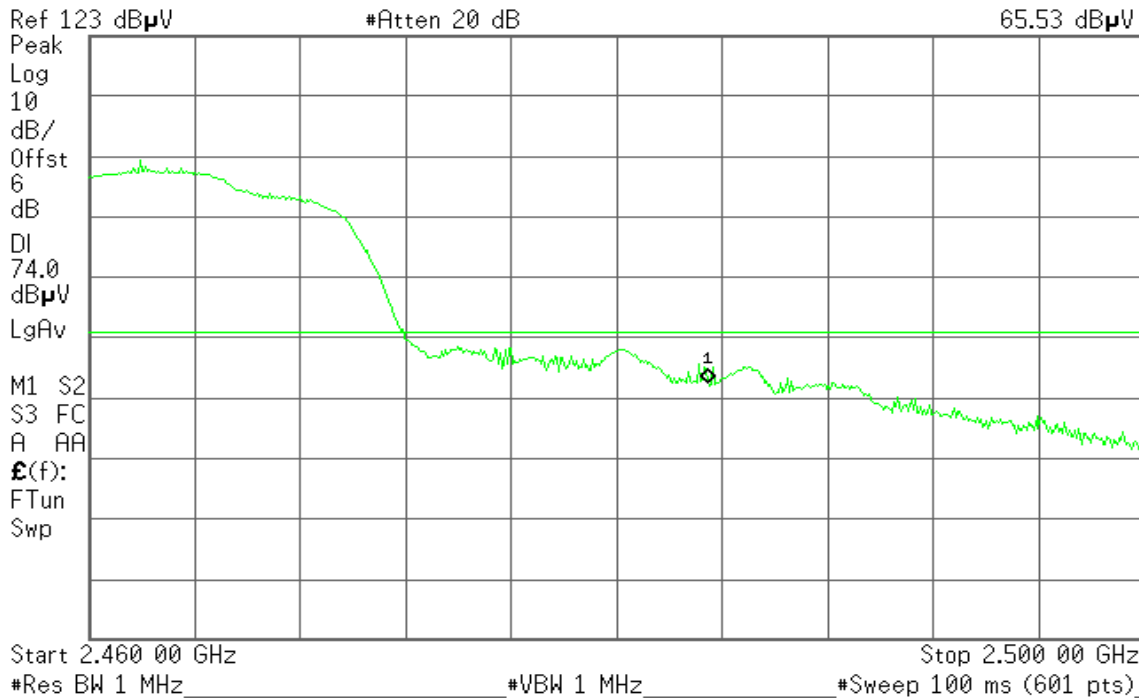


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 15:54:14 Sep 28, 2010

R T

Mkr1 2.483 50 GHz  
52.12 dB $\mu$ V

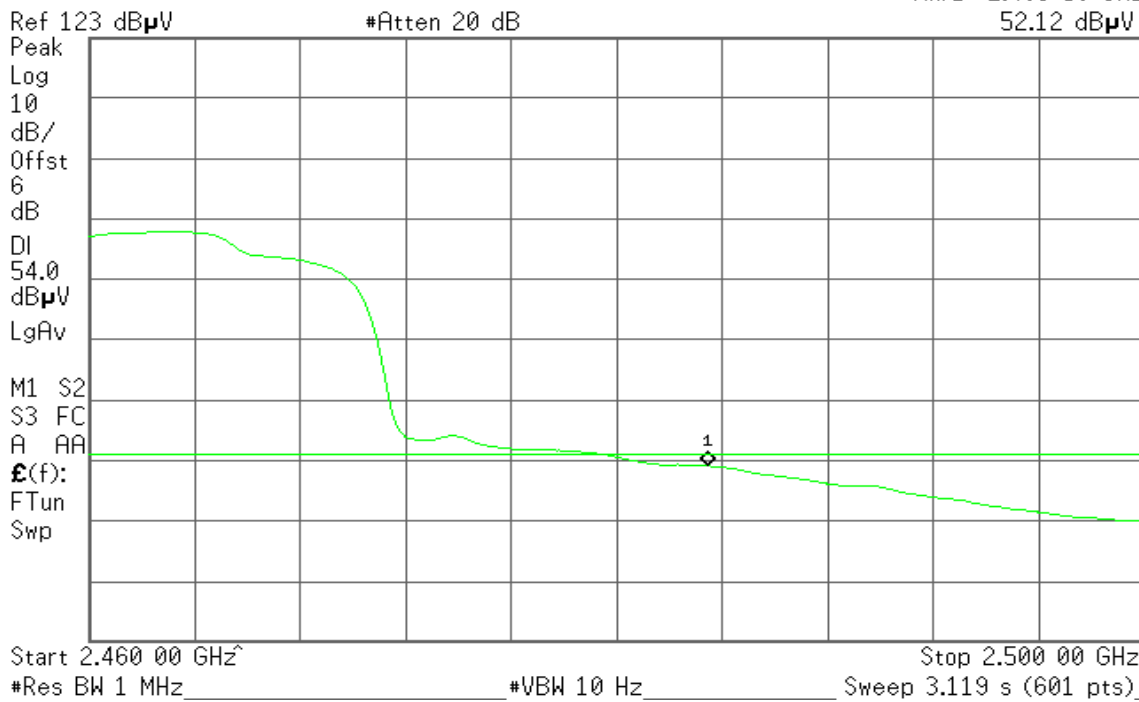






## 7.5 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s.
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### TEST RESULTS

*No non-compliance noted*



**Test Data**

**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-5.45	8.00	PASS
Mid	2437	-6.31		PASS
High	2462	-8.14		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-6.83	8.00	PASS
Mid	2437	-8.30		PASS
High	2462	-6.42		PASS

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-8.55	8.00	PASS
Mid	2437	-8.94		PASS
High	2462	-8.91		PASS

**Test mode: draft 802.11n Wide-40 MHz Channel mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-18.35	8.00	PASS
Mid	2437	-8.90		PASS
High	2452	-16.75		PASS



**Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	-8.36	8.00	PASS
Mid	5785	-9.22		PASS
High	5825	-8.37		PASS

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	-8.57	8.00	PASS
Mid	5785	-8.23		PASS
High	5825	-8.86		PASS

**Test mode: draft 802.11n Wide-40 MHz Channel mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5755	-11.13	8.00	PASS
High	5795	-10.57		PASS



### Test Plot


#### IEEE 802.11b mode

#### PPSD (CH Low)

Agilent 10:13:49 Oct 13, 2010

R T

Mkr1 2.411 476 6 GHz  
-5.45 dBm

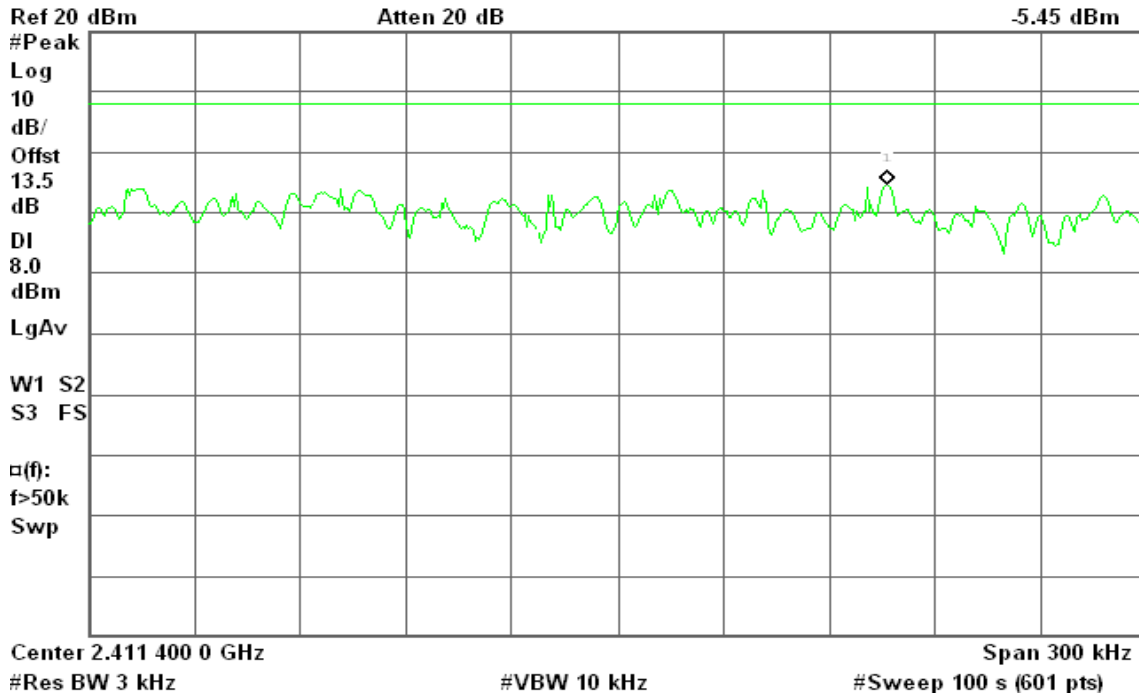


#### PPSD (CH Mid)

Agilent 10:18:51 Oct 13, 2010

R T

Mkr1 2.441 880 4 GHz  
-6.31 dBm

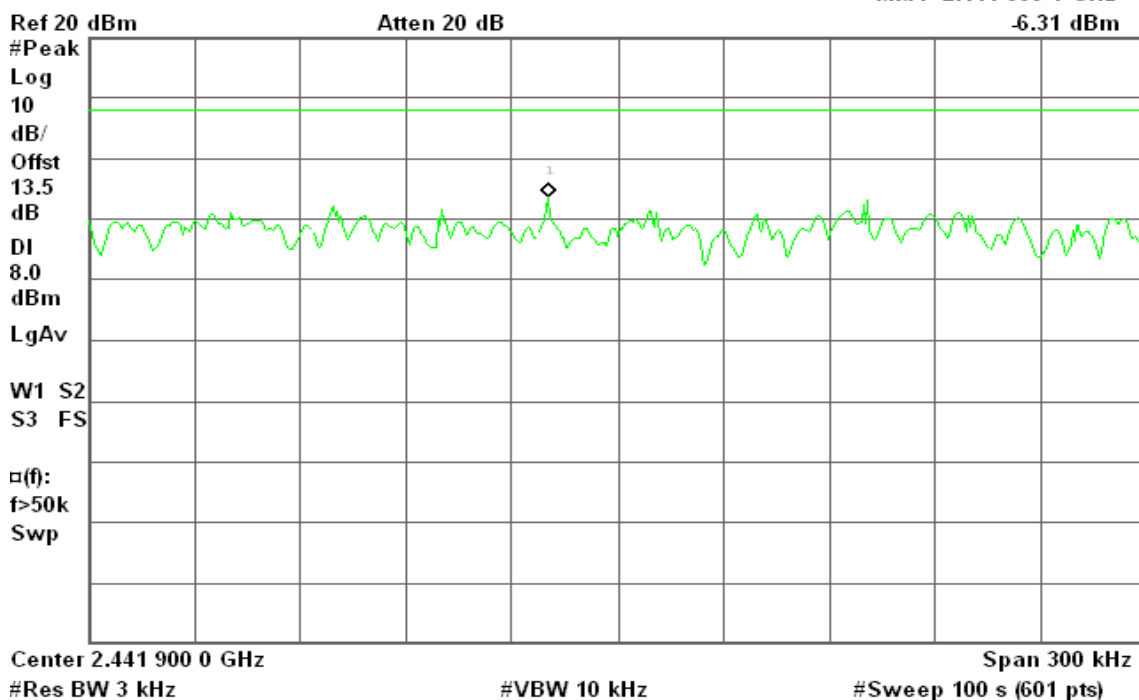




### PPSD (CH High)

Agilent 10:24:02 Oct 13, 2010

R L

Mkr1 2.466 318 1 GHz  
-8.14 dBm

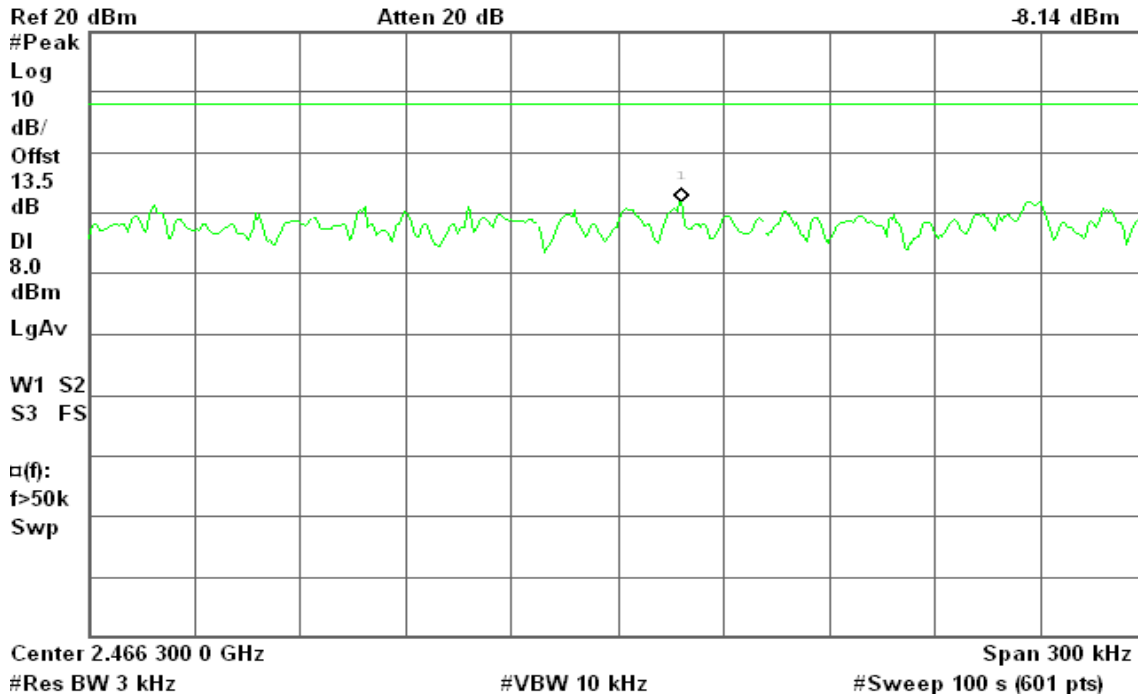


### IEEE 802.11g mode

### PPSD (CH Low)

Agilent 10:28:02 Oct 13, 2010

R T

Mkr1 2.415 690 2 GHz  
-6.83 dBm

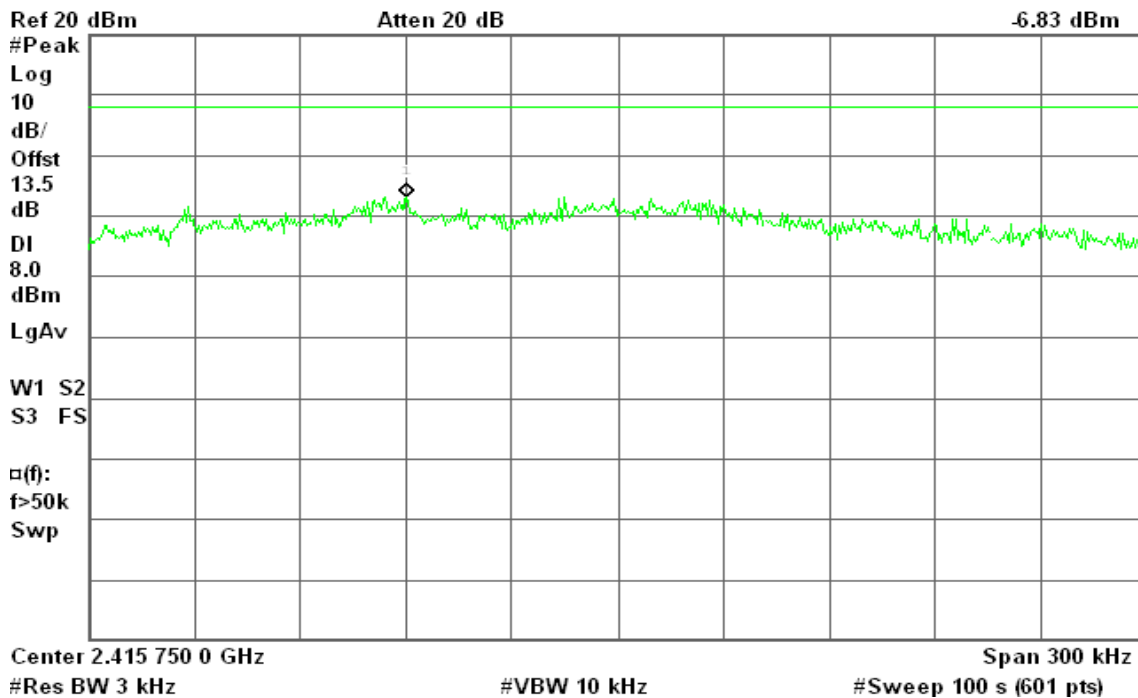




### PPSD (CH Mid)

Agilent 10:33:39 Oct 13, 2010

R T

Mkr1 2.439 200 0 GHz  
-8.30 dBm

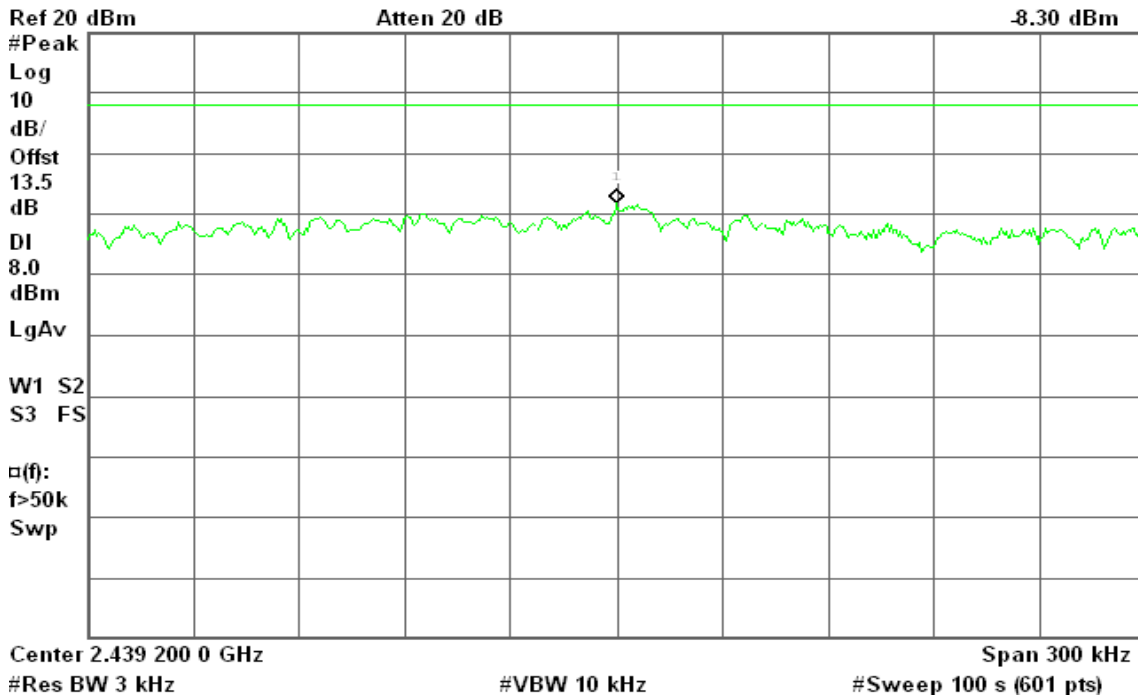


### PPSD (CH High)

Agilent 10:37:23 Oct 13, 2010

R T

Mkr1 2.463 854 9 GHz  
-6.42 dBm

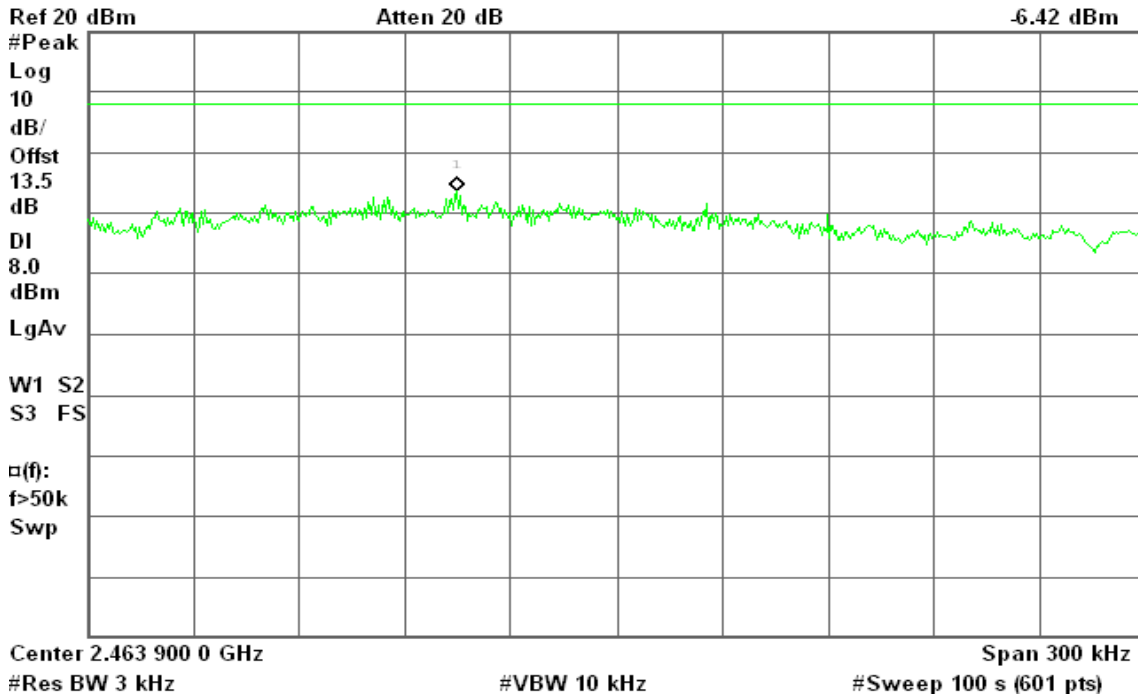




### draft 802.11n Standard-20 MHz Channel mode

#### PPSD (CH Low)

Agilent 10:45:49 Oct 13, 2010

R T

Mkr1 2.416 980 4 GHz  
-8.55 dBm

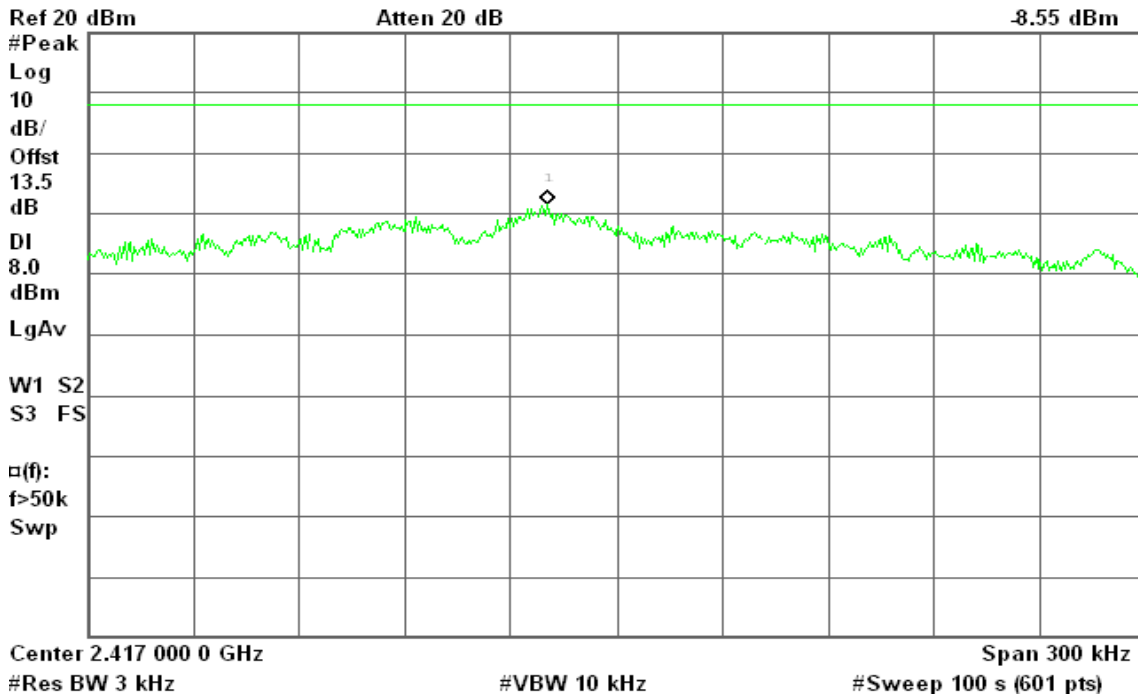


#### PPSD (CH Mid)

Agilent 10:54:47 Oct 13, 2010

R T

Mkr1 2.438 226 9 GHz  
-8.94 dBm

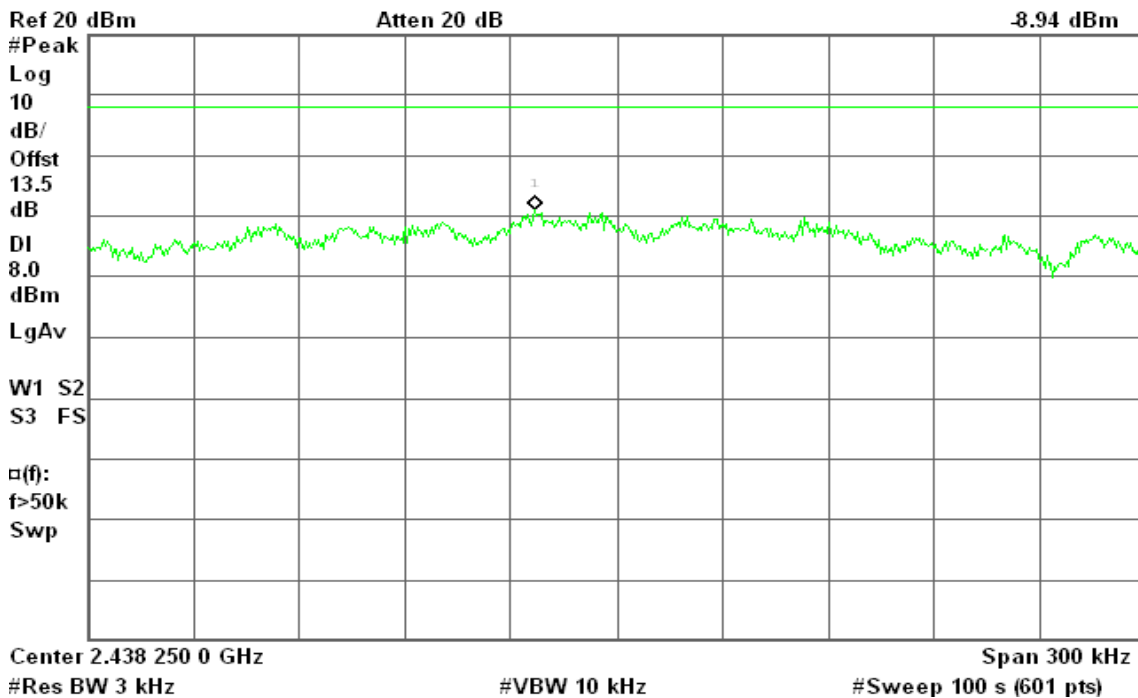




### PPSD (CH High)

Agilent 11:01:21 Oct 13, 2010

R T

Mkr1 2.458 272 6 GHz  
-8.91 dBm

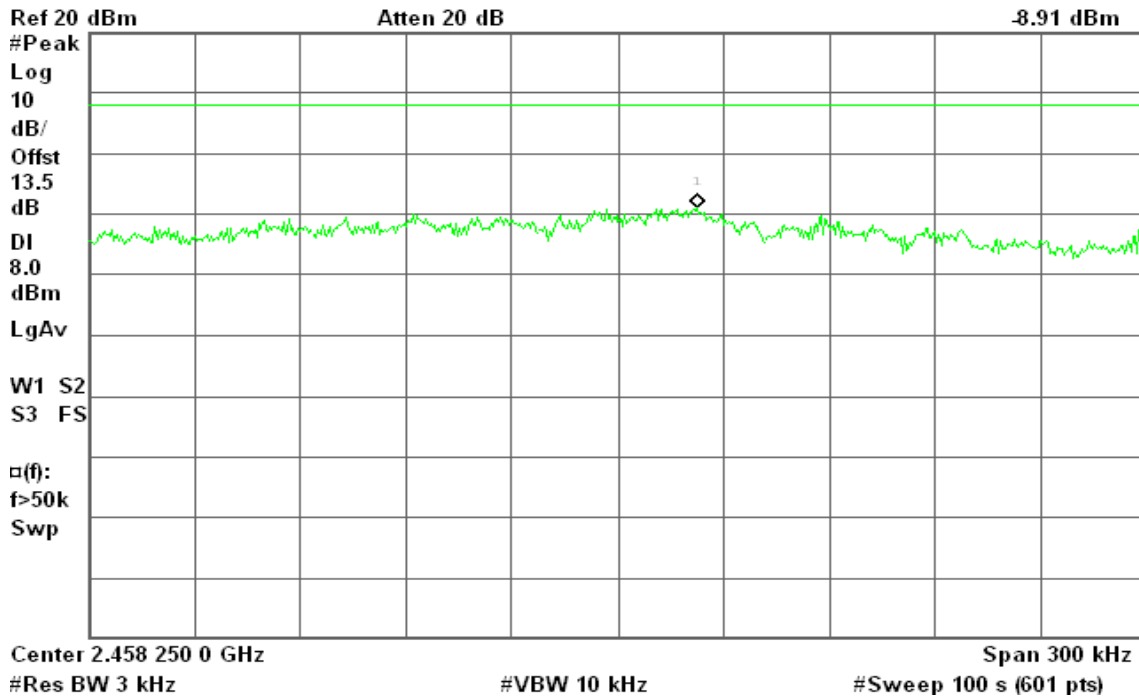


### draft 802.11n Wide-40 MHz Channel mode

### PPSD (CH Low)

Agilent 11:19:55 Oct 13, 2010

R T

Mkr1 2.434 207 5 GHz  
-18.35 dBm

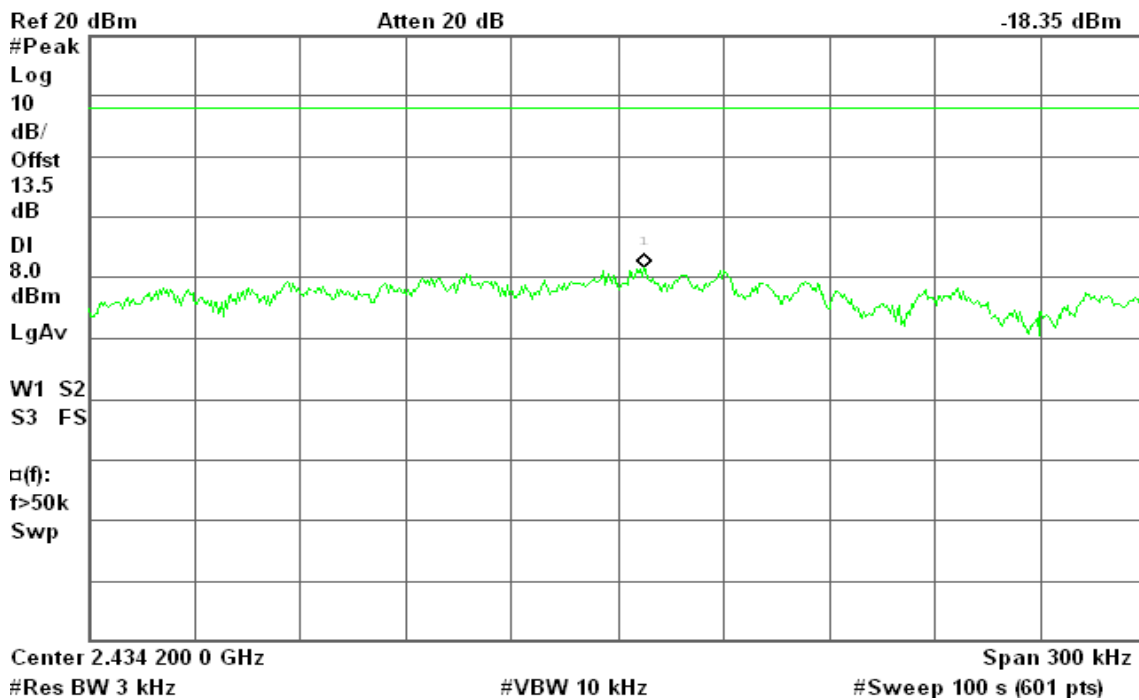






### PPSD (CH Mid)

Agilent 11:08:25 Oct 13, 2010

R T

Mkr1 2.425 728 6 GHz  
-8.90 dBm

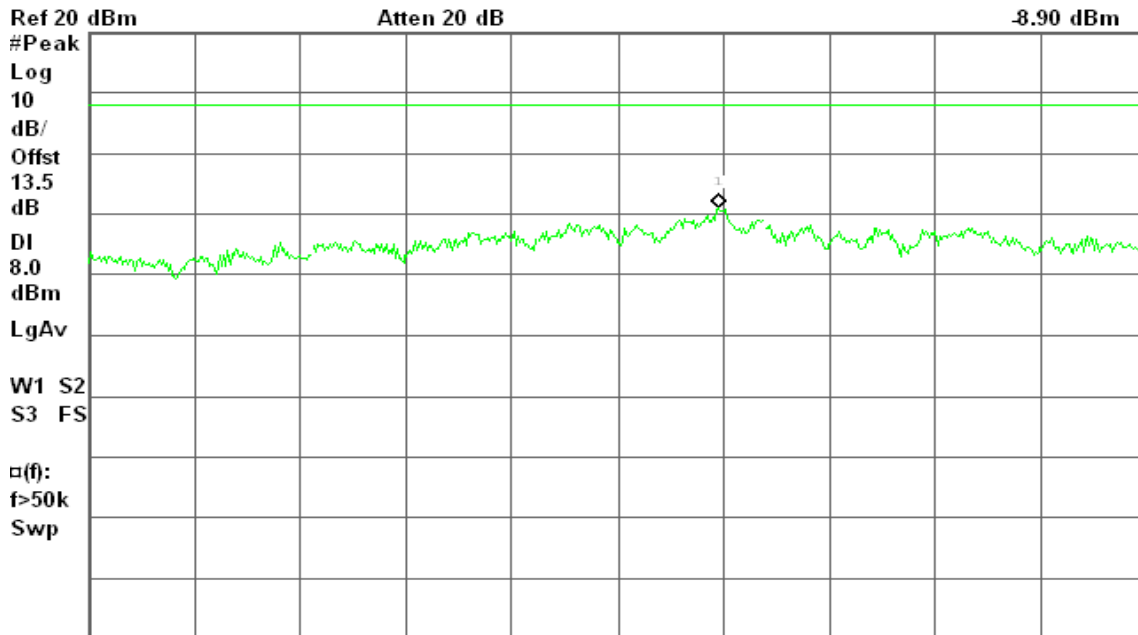


Center 2.425 700 0 GHz Span 300 kHz  
#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)

### PPSD (CH High)

Agilent 11:13:14 Oct 13, 2010

R T

Mkr1 2.443 239 4 GHz  
-16.75 dBm

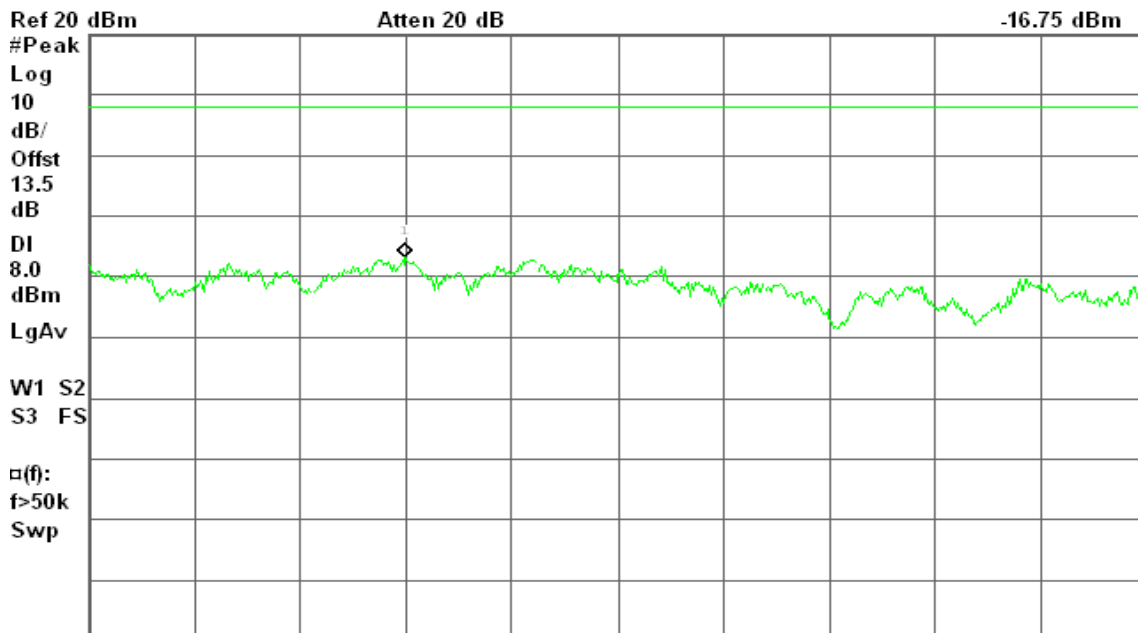

Center 2.443 300 0 GHz Span 300 kHz  
#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)



### IEEE 802.11a mode


### PPSD (CH Low)

Agilent 11:13:26 Jul 28, 2010

R T

Mkr1 5.750 626 9 GHz

-8.36 dBm

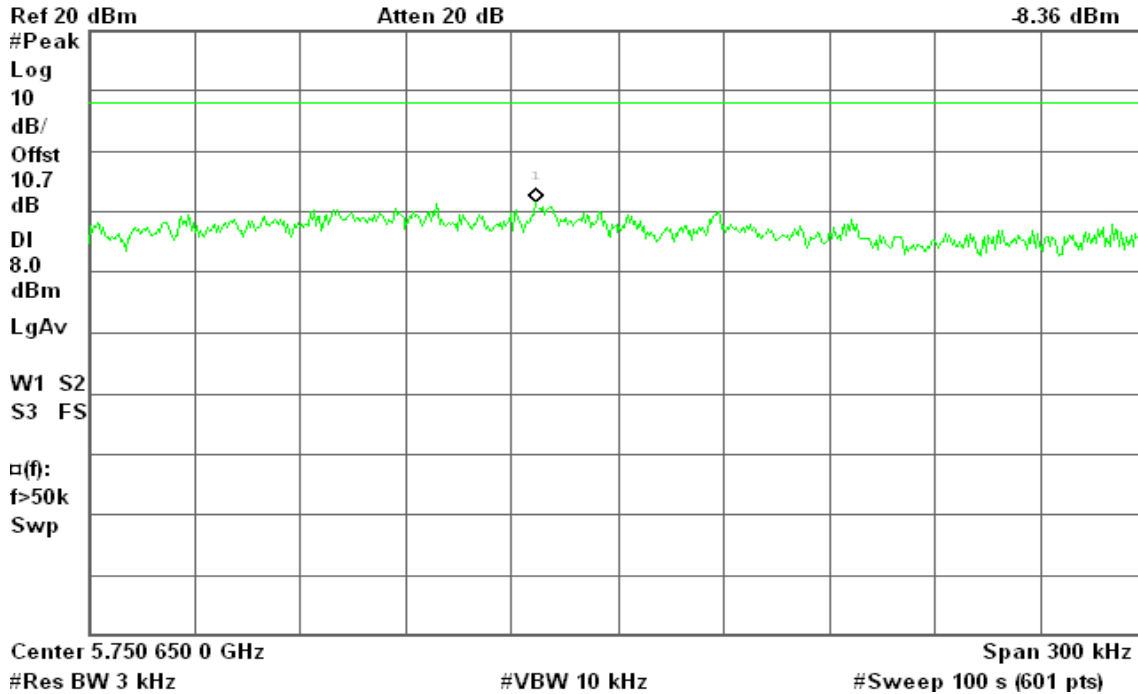


### PPSD (CH Mid)

Agilent 11:18:48 Jul 28, 2010

R T

Mkr1 5.787 836 2 GHz

-9.22 dBm

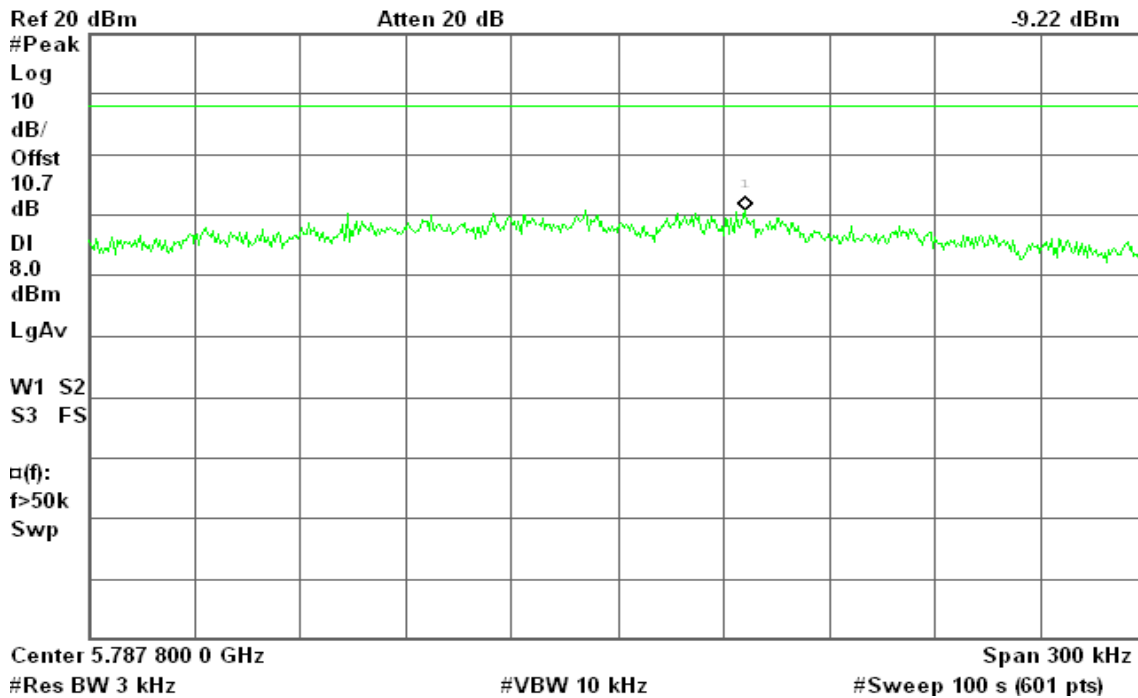




### PPSD (CH High)

Agilent 11:23:06 Jul 28, 2010

R T

Mkr1 5.821 524 1 GHz  
-8.37 dBm

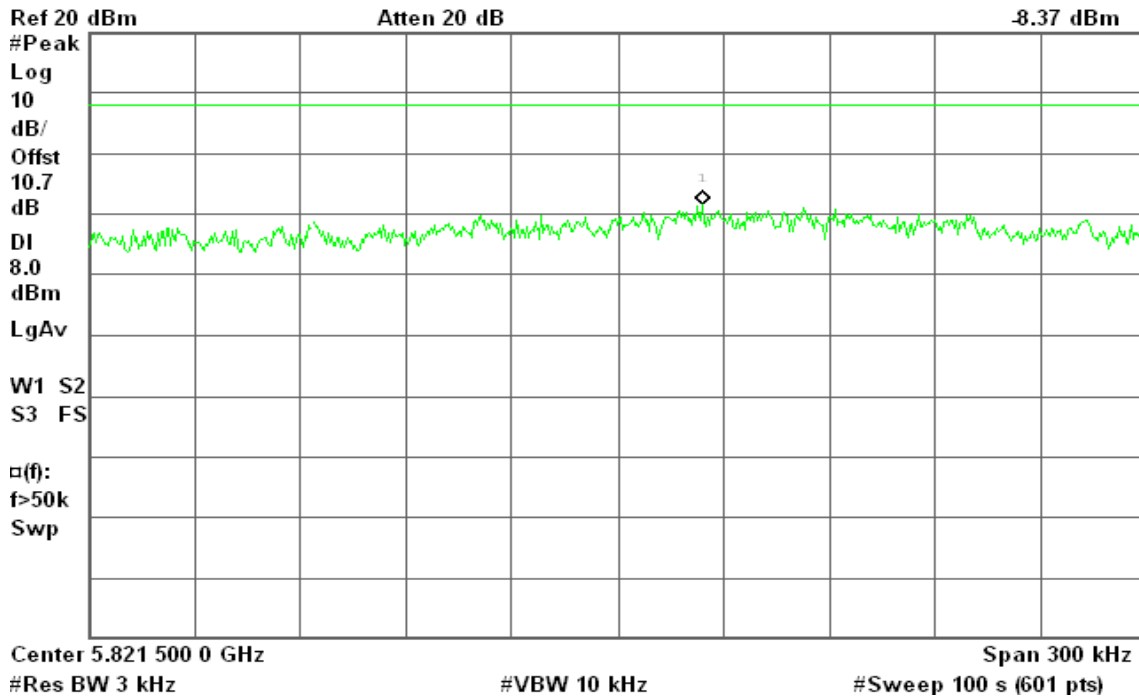


### draft 802.11n Standard-20 MHz Channel mode

### PPSD (CH Low)

Agilent 13:52:59 Jul 28, 2010

R T

Mkr1 5.748 808 0 GHz  
-8.57 dBm

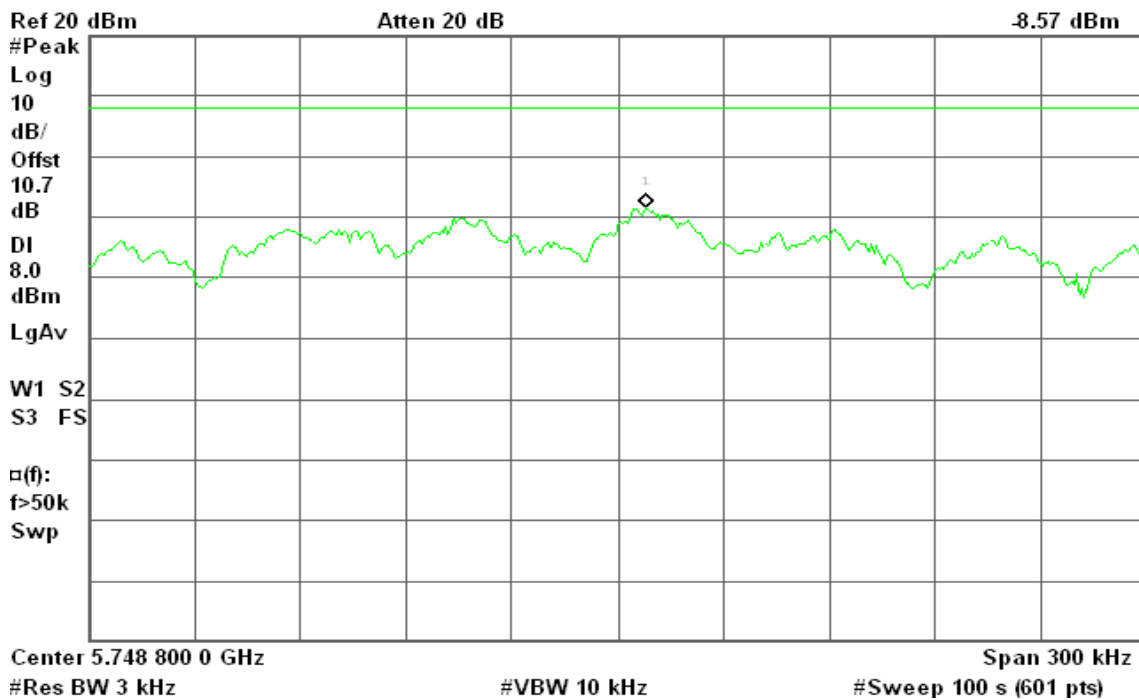




### PPSD (CH Mid)

Agilent 13:56:42 Jul 28, 2010

R T

Mkr1 5.788 804 5 GHz

-8.23 dBm

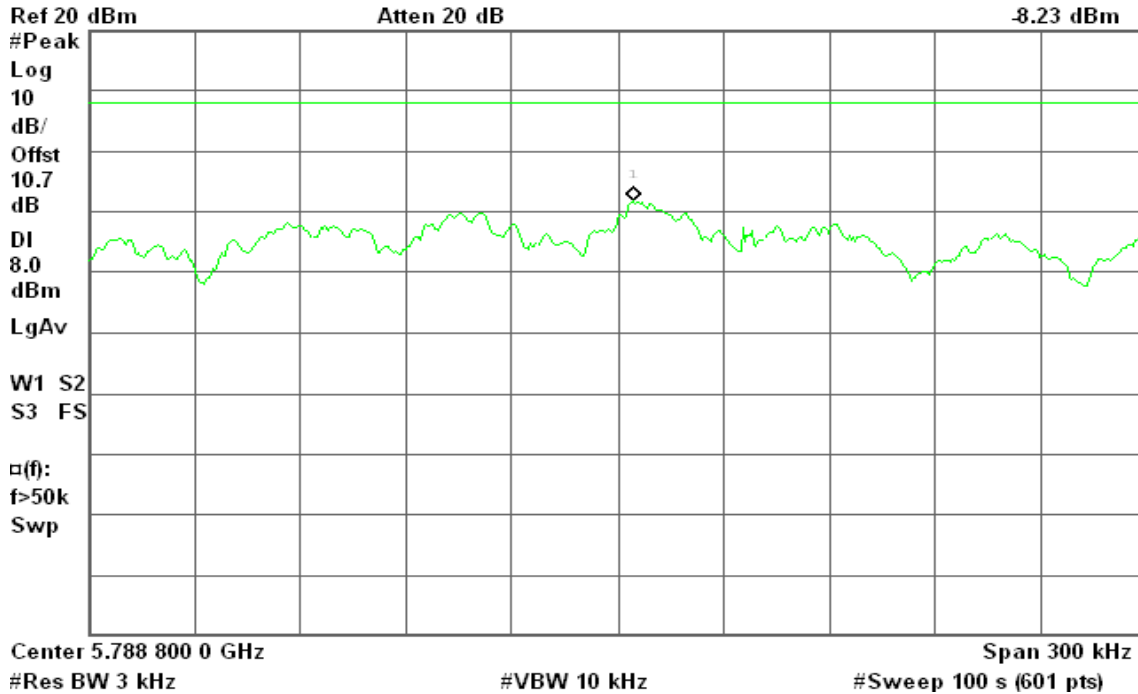


### PPSD (CH High)

Agilent 14:00:40 Jul 28, 2010

R T

Mkr1 5.830 378 4 GHz

-8.86 dBm

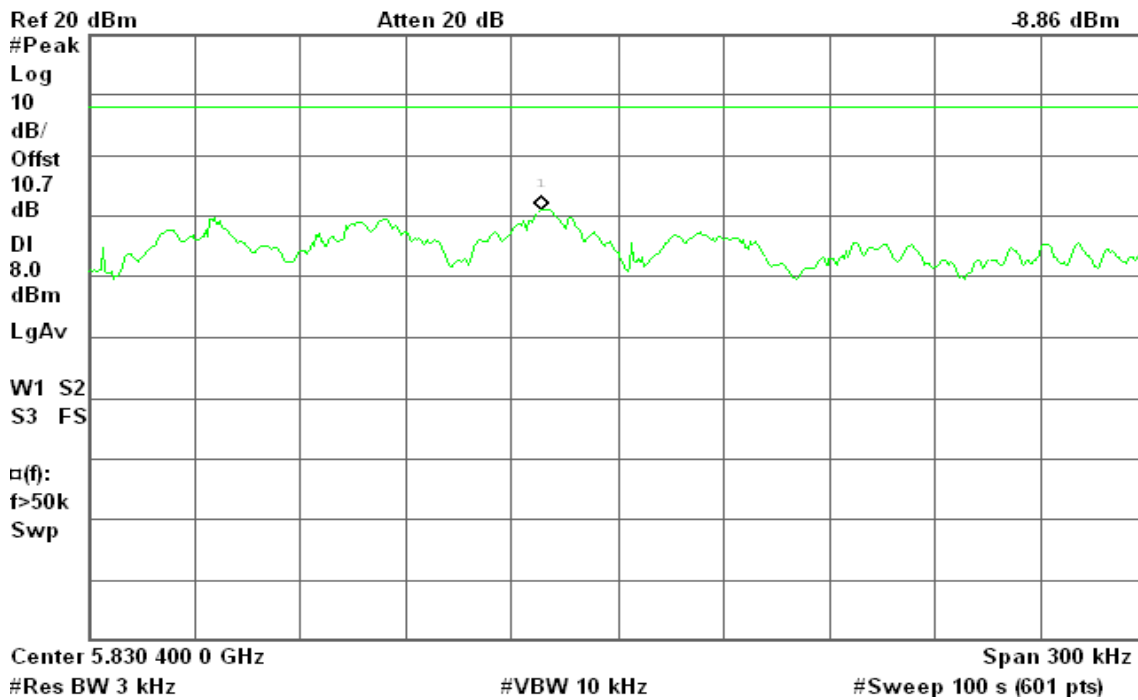



### draft 802.11n Wide-40 MHz Channel mode


### PPSD (CH Low)

Agilent 17:32:40 Jul 28, 2010

R T

Mkr1 5.752 883 4 GHz

-11.13 dBm

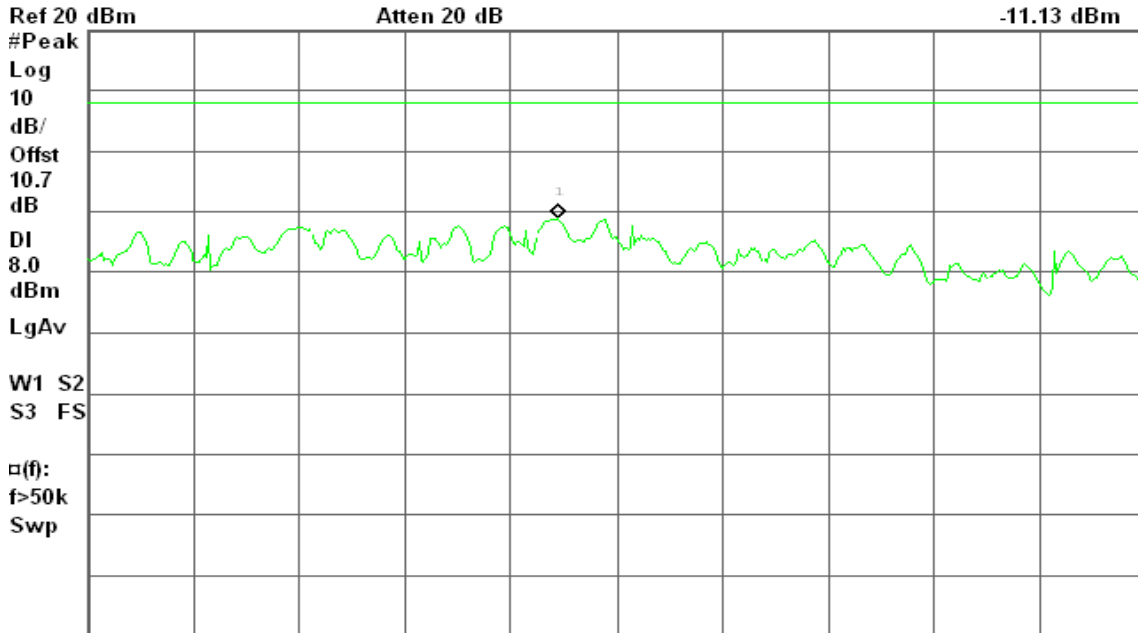

Center 5.752 900 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)


### PPSD (CH High)

Agilent 17:37:28 Jul 28, 2010

R T

Mkr1 5.782 513 0 GHz

-10.57 dBm

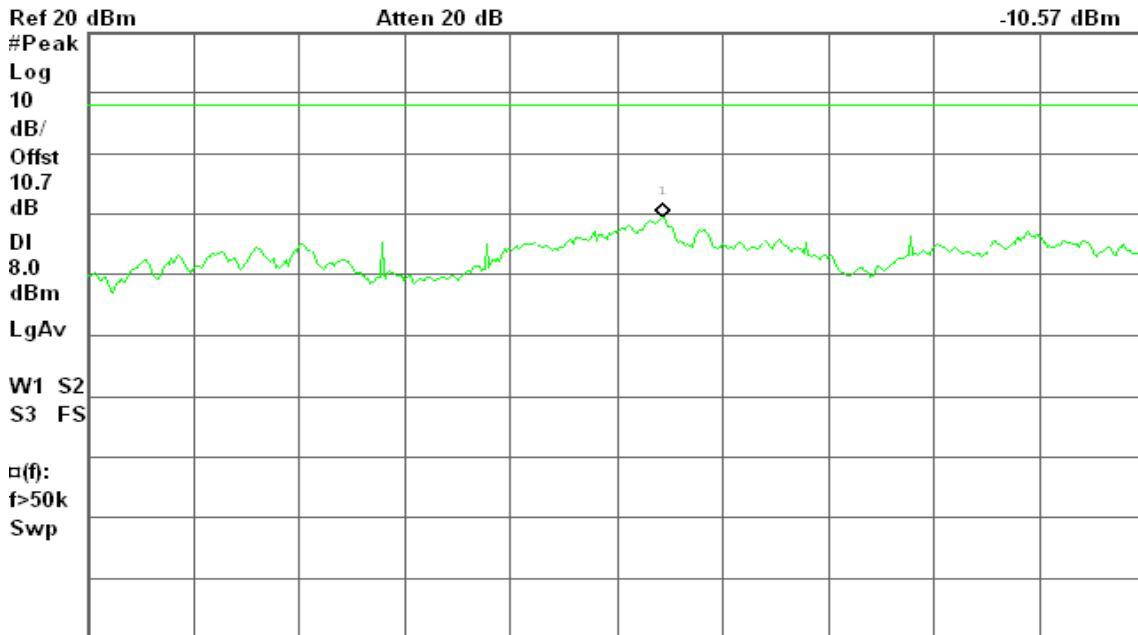

Center 5.782 500 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




## 7.6 SPURIOUS EMISSIONS

### 7.6.1 CONDUCTED MEASUREMENT

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13GHz to 26GHz range for IEEE 802.11b/g, 20GHz to 40GHz range for IEEE 802.11a with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted.*



**Test Plot**


**IEEE 802.11b mode**

**CH Low**

Agilent 10:14:23 Oct 13, 2010

R T

Mkr1 2.42 GHz  
7.60 dBm

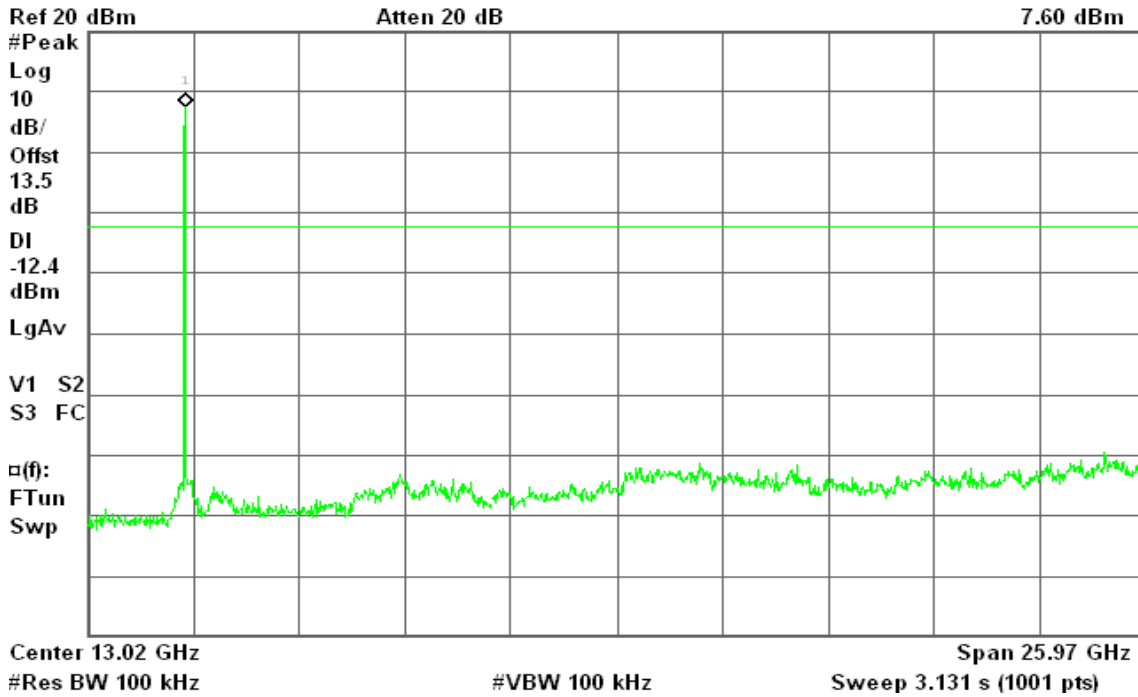


**CH Mid**

Agilent 10:19:41 Oct 13, 2010

R T

Mkr1 2.45 GHz  
8.28 dBm

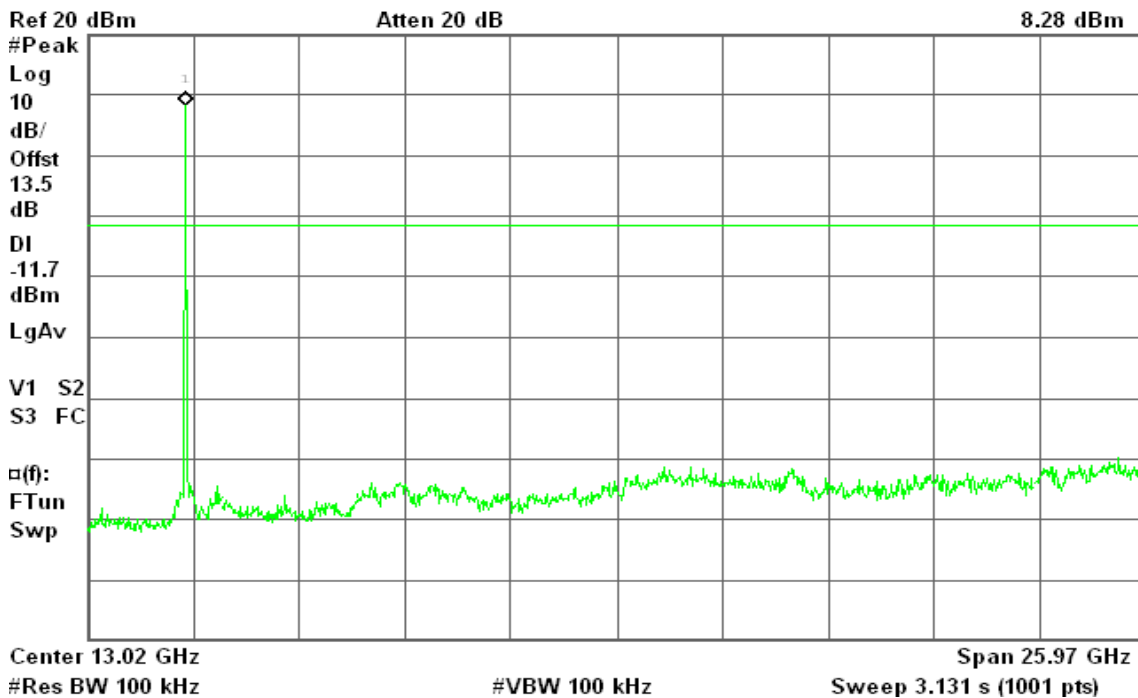




### CH High

Agilent 10:24:31 Oct 13, 2010

R T

Mkr1 2.45 GHz  
7.96 dBm

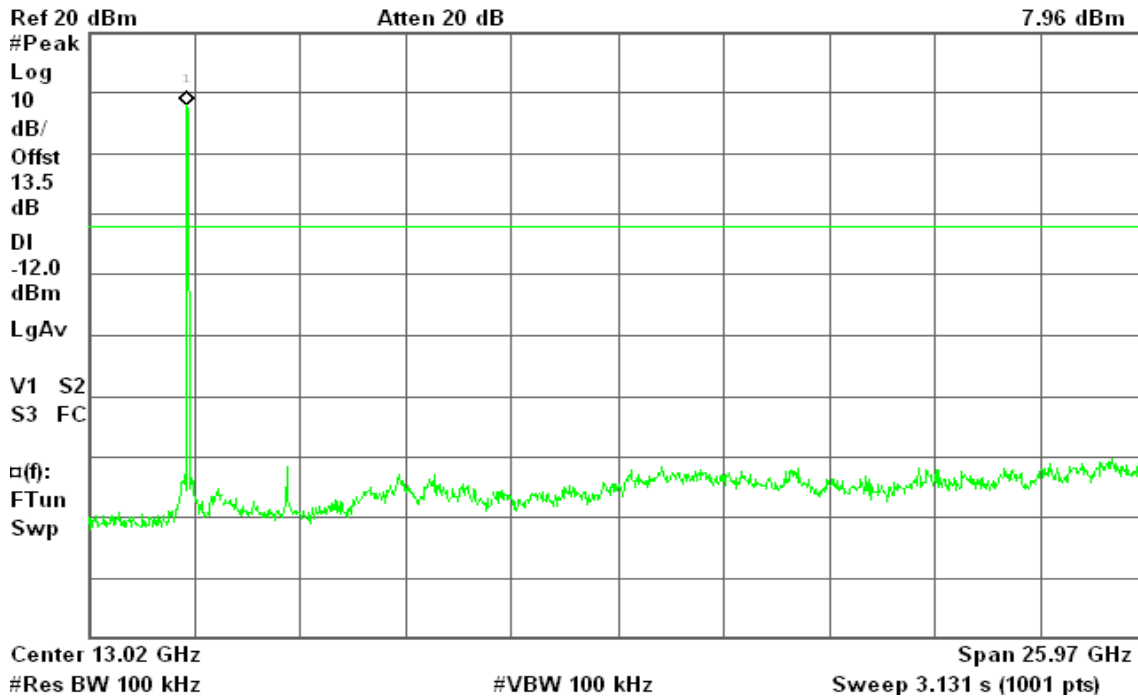


### IEEE 802.11g mode

#### CH Low

Agilent 10:28:34 Oct 13, 2010

R T

Mkr1 2.42 GHz  
3.50 dBm

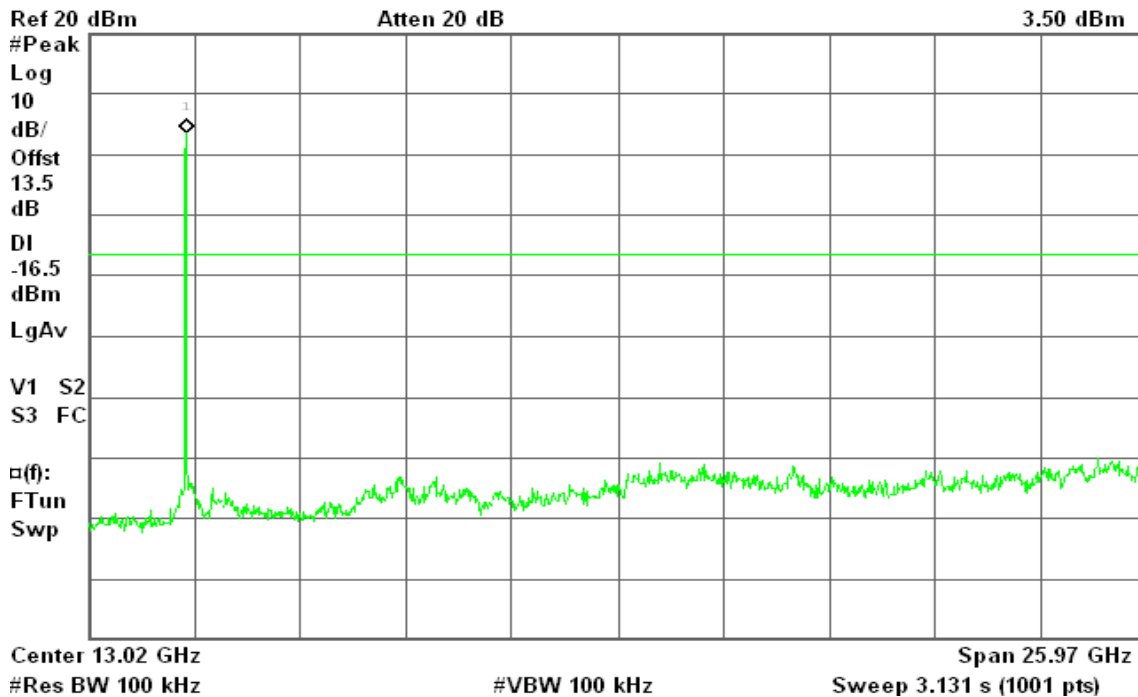






### CH Mid

Agilent 10:34:25 Oct 13, 2010

R T

Mkr1 2.45 GHz  
4.70 dBm

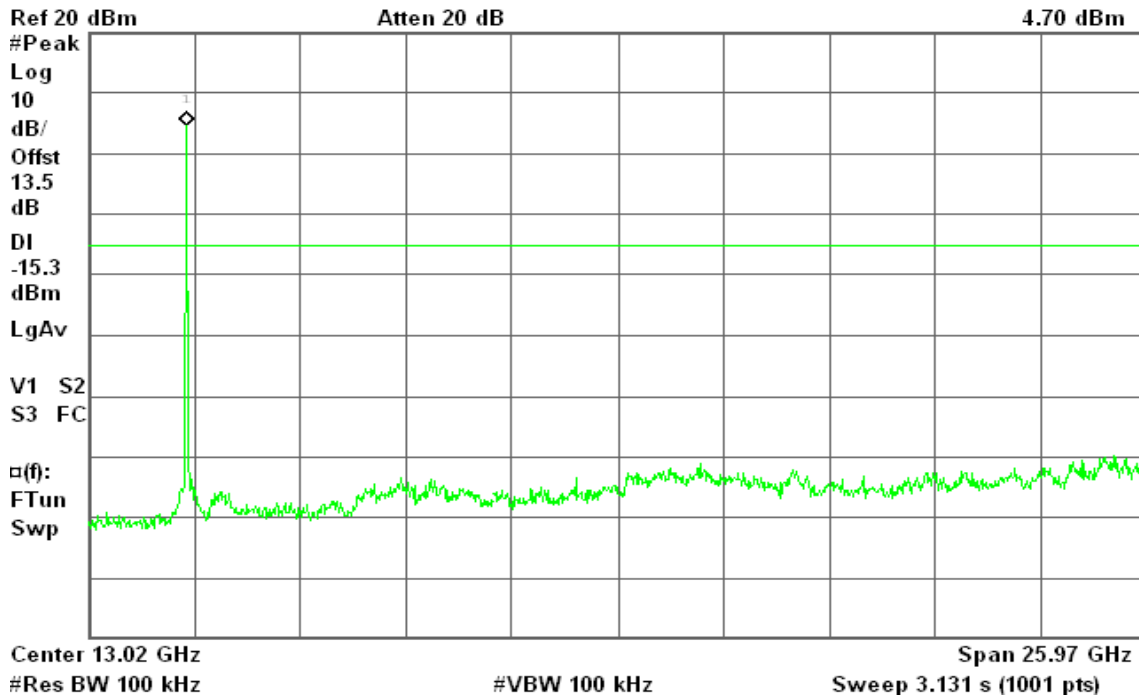


### CH High

Agilent 10:37:52 Oct 13, 2010

R T

Mkr1 2.45 GHz  
6.71 dBm

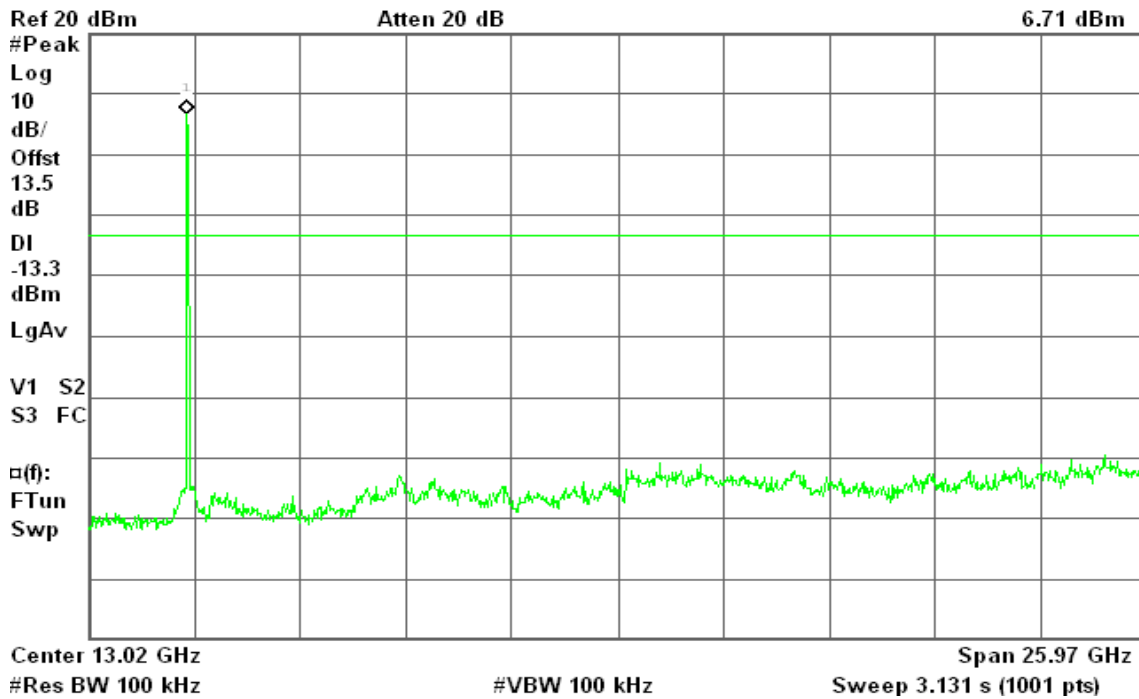




### draft 802.11n Standard-20 MHz Channel mode

#### CH Low

Agilent 10:47:47 Oct 13, 2010


R T

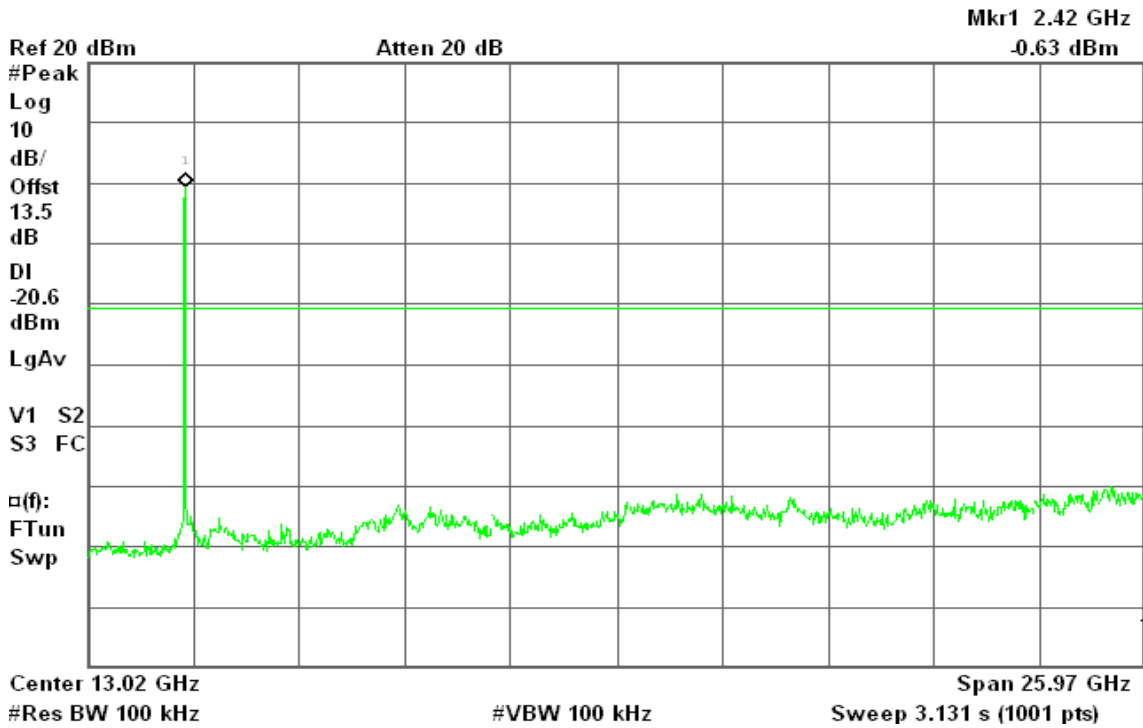

#### CH Mid

Agilent 10:56:51 Oct 13, 2010

R T

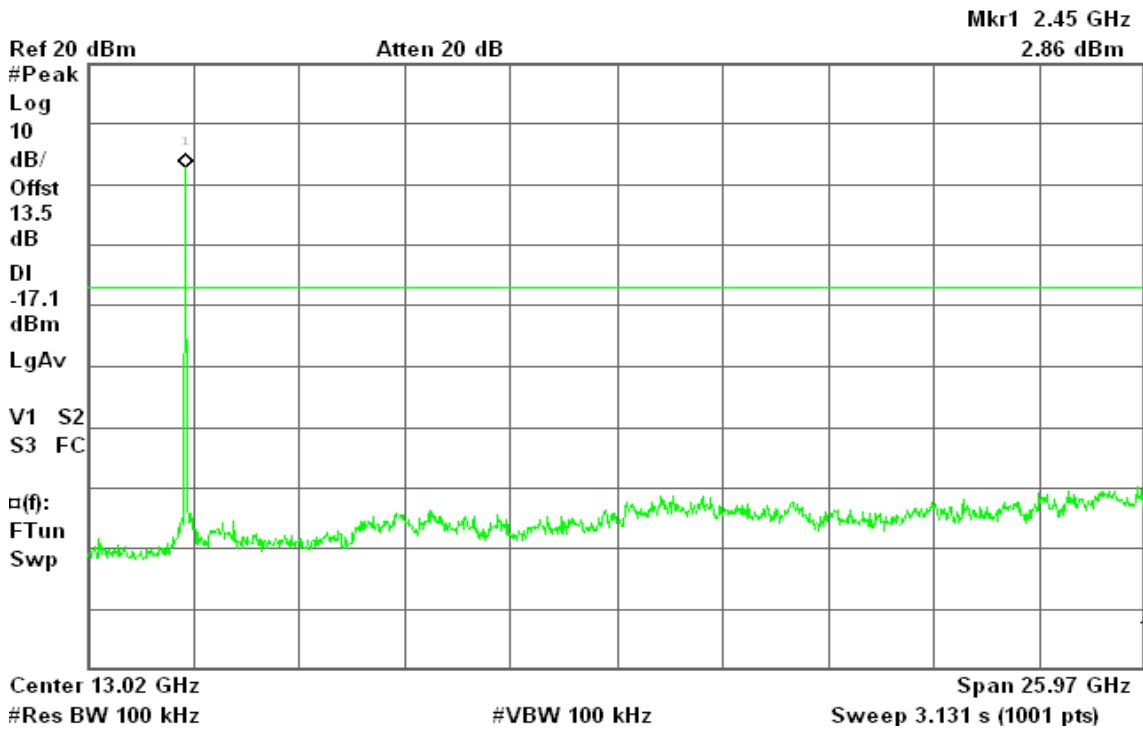




### CH High

Agilent 11:02:38 Oct 13, 2010

R T

Mkr1 2.47 GHz  
2.89 dBm

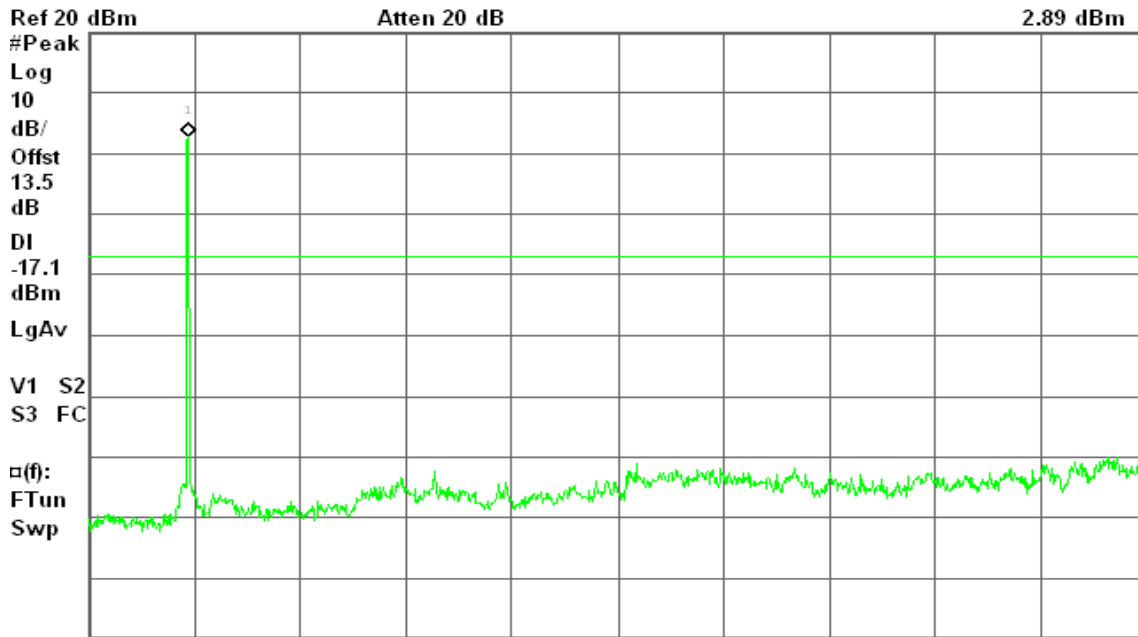

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)


### draft 802.11n Wide-40 MHz Channel mode

### CH Low

Agilent 11:20:43 Oct 13, 2010

R T

Mkr1 2.42 GHz  
-6.47 dBm

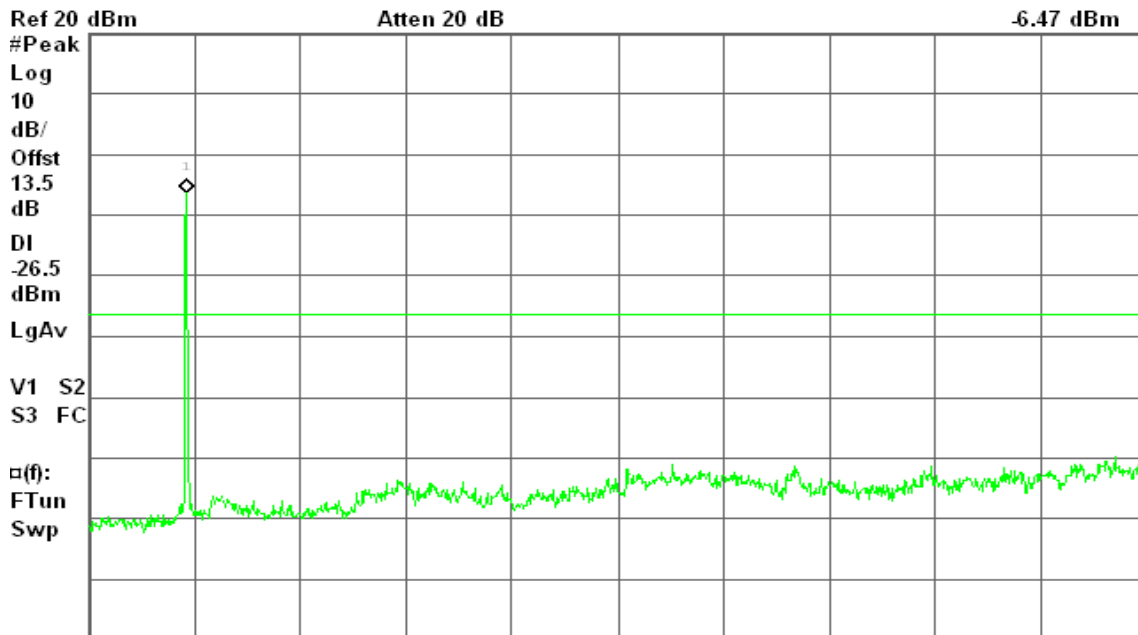

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)




### CH Mid

Agilent 11:09:19 Oct 13, 2010

R T

Mkr1 2.45 GHz  
2.45 dBm

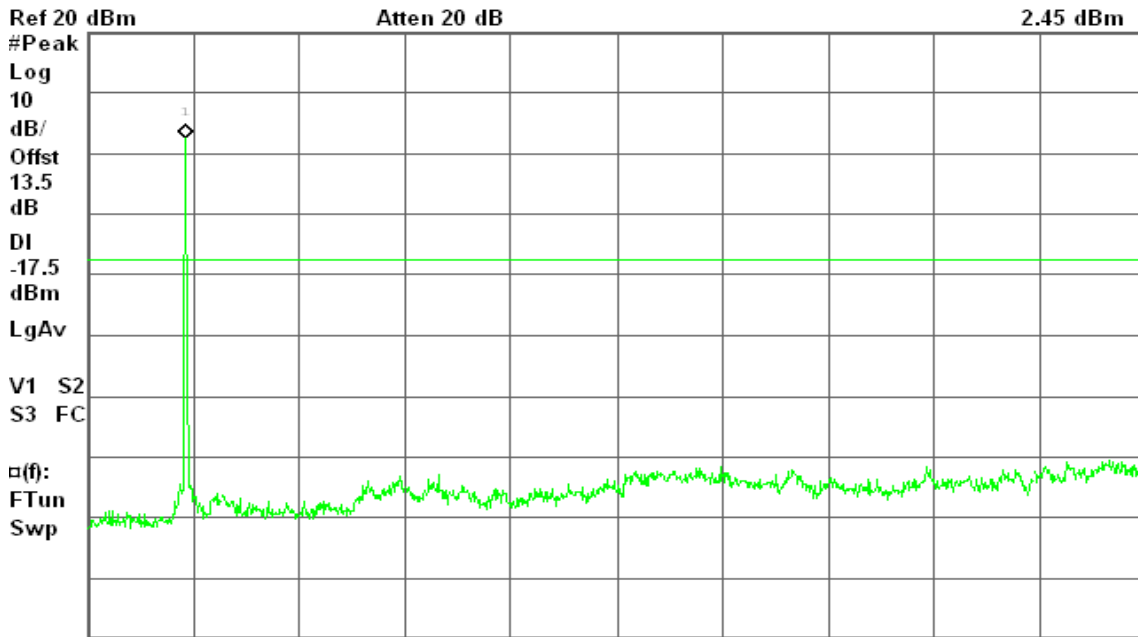

Center 13.02 GHz                      Span 25.97 GHz


#Res BW 100 kHz                      #VBW 100 kHz                      Sweep 3.131 s (1001 pts)

### CH High

Agilent 11:14:42 Oct 13, 2010

R T

Mkr1 2.45 GHz  
-3.86 dBm

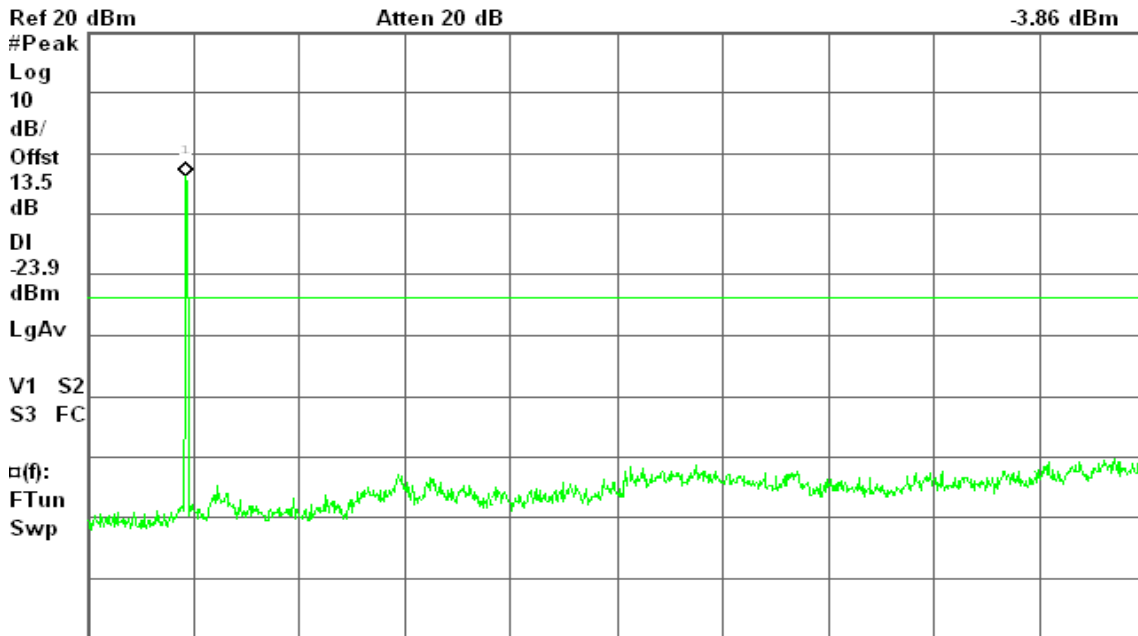

Center 13.02 GHz                      Span 25.97 GHz

#Res BW 100 kHz                      #VBW 100 kHz                      Sweep 3.131 s (1001 pts)




### IEEE 802.11a mode

### CH Low

Agilent 11:14:56 Jul 28, 2010


R T

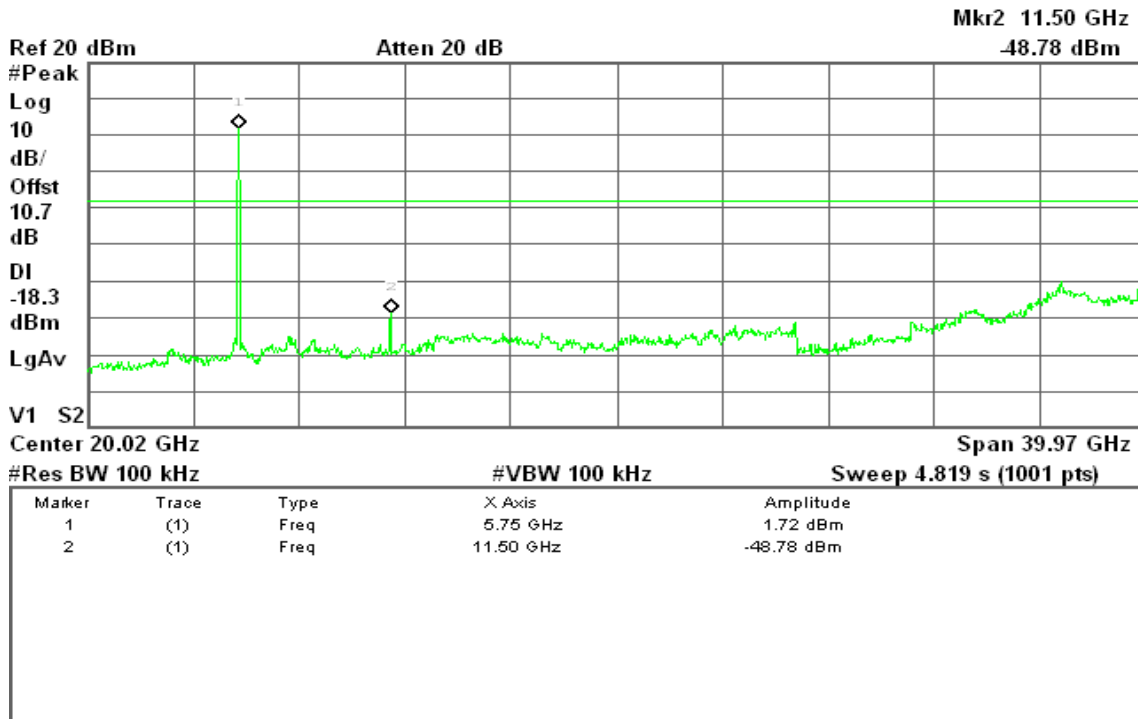

### CH Mid

Agilent 11:19:38 Jul 28, 2010

R T

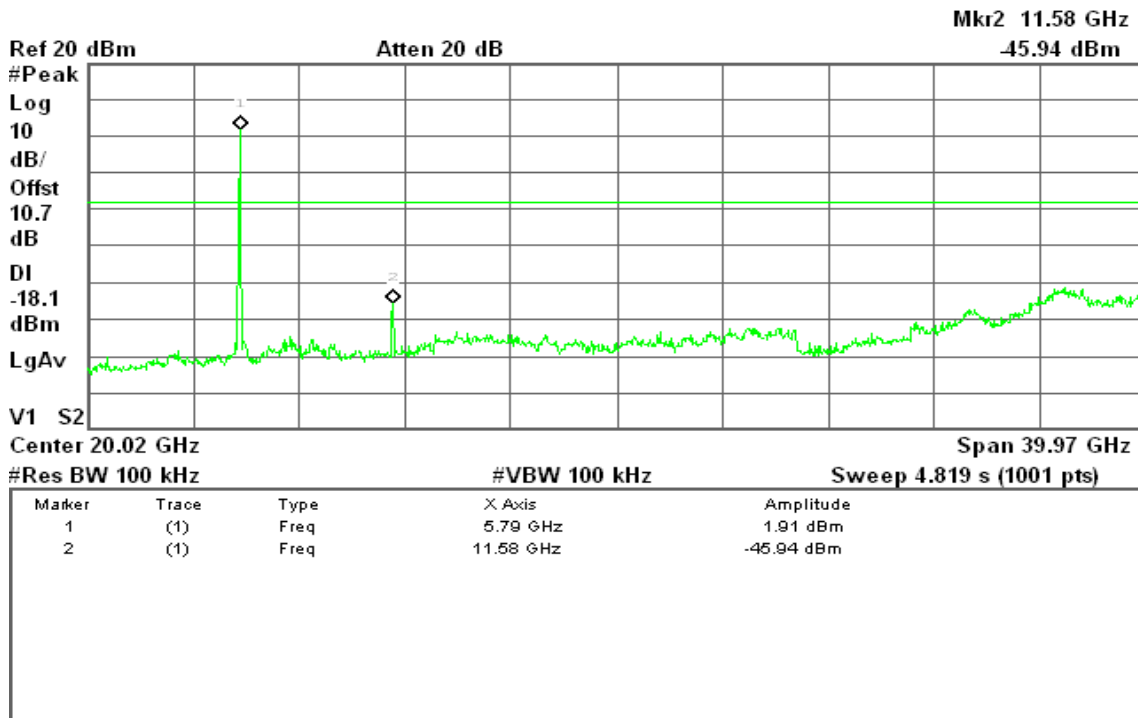




### CH High

Agilent 11:23:56 Jul 28, 2010

R L

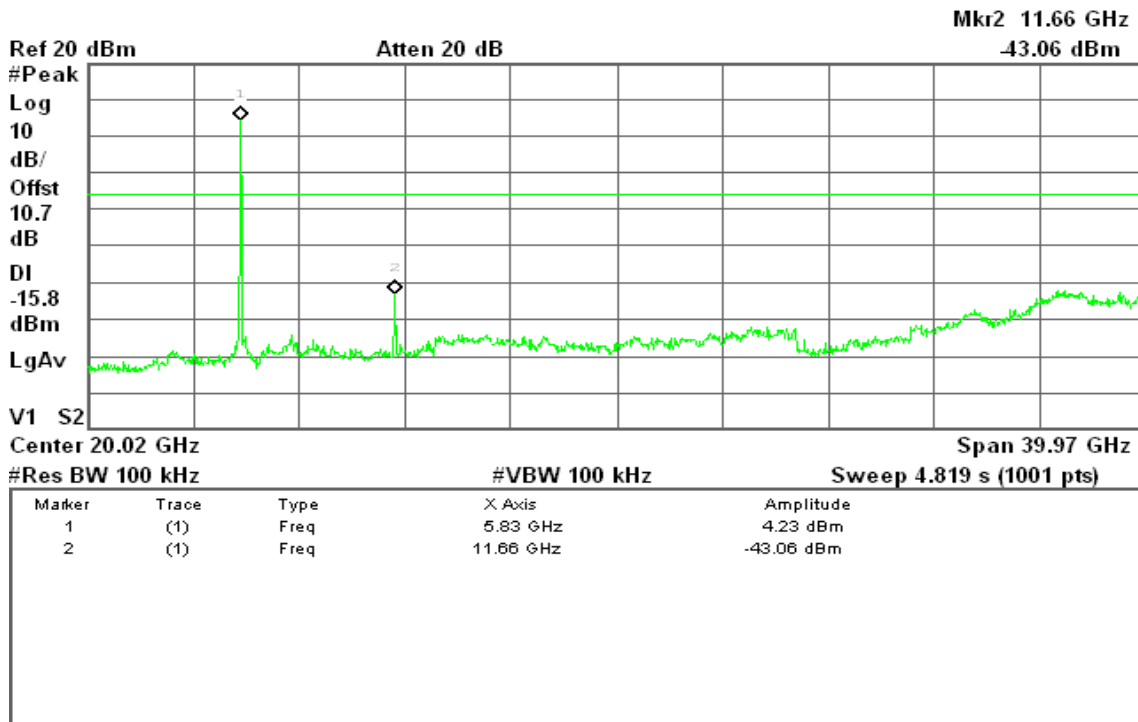


### draft 802.11n Standard-20 MHz Channel mode

### CH Low

Agilent 13:53:46 Jul 28, 2010

R T

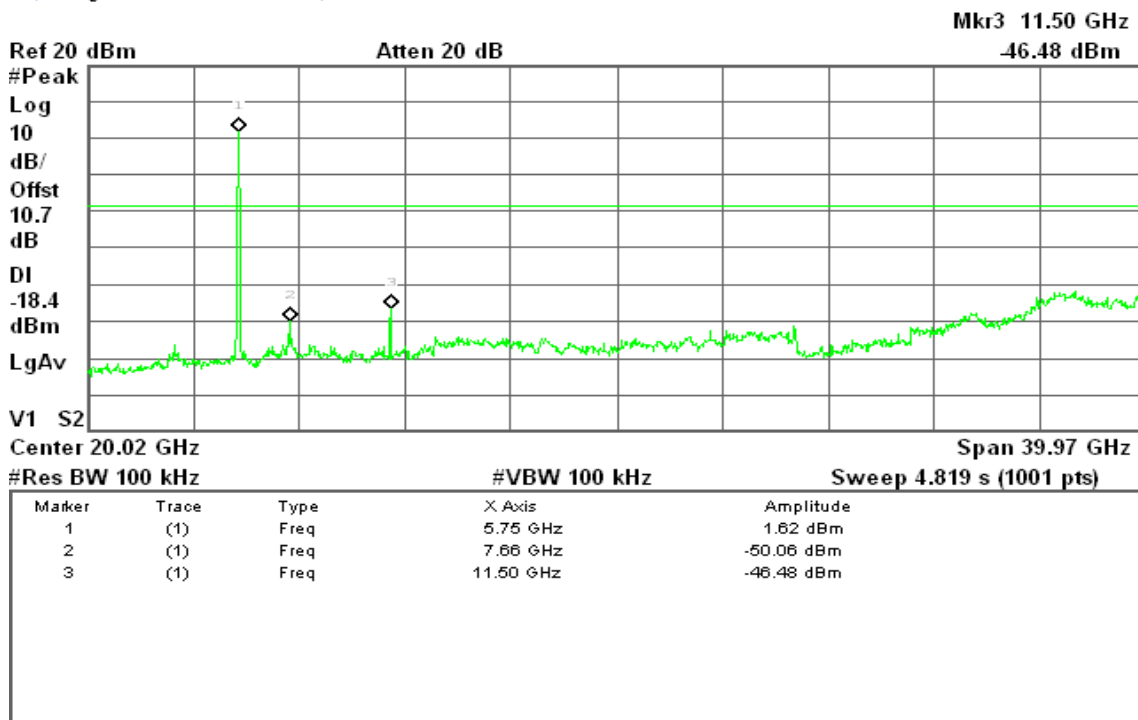




CH Mid

Agilent 13:57:26 Jul 28, 2010


R T

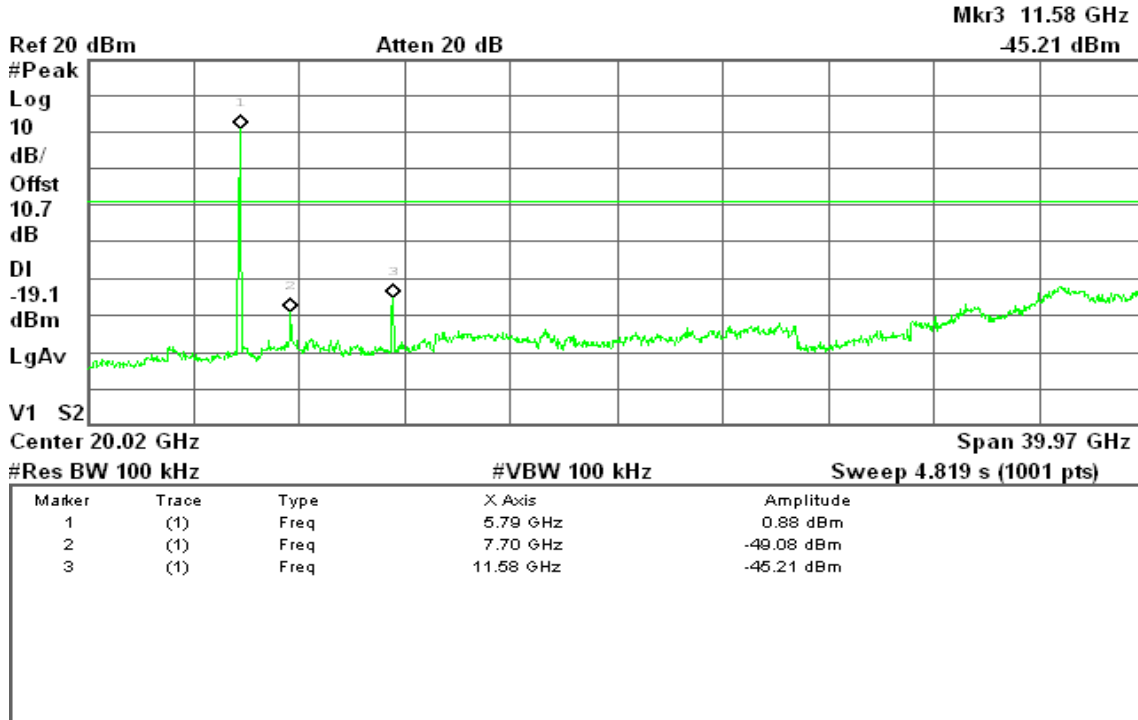

CH High

Agilent 14:01:28 Jul 28, 2010

R L

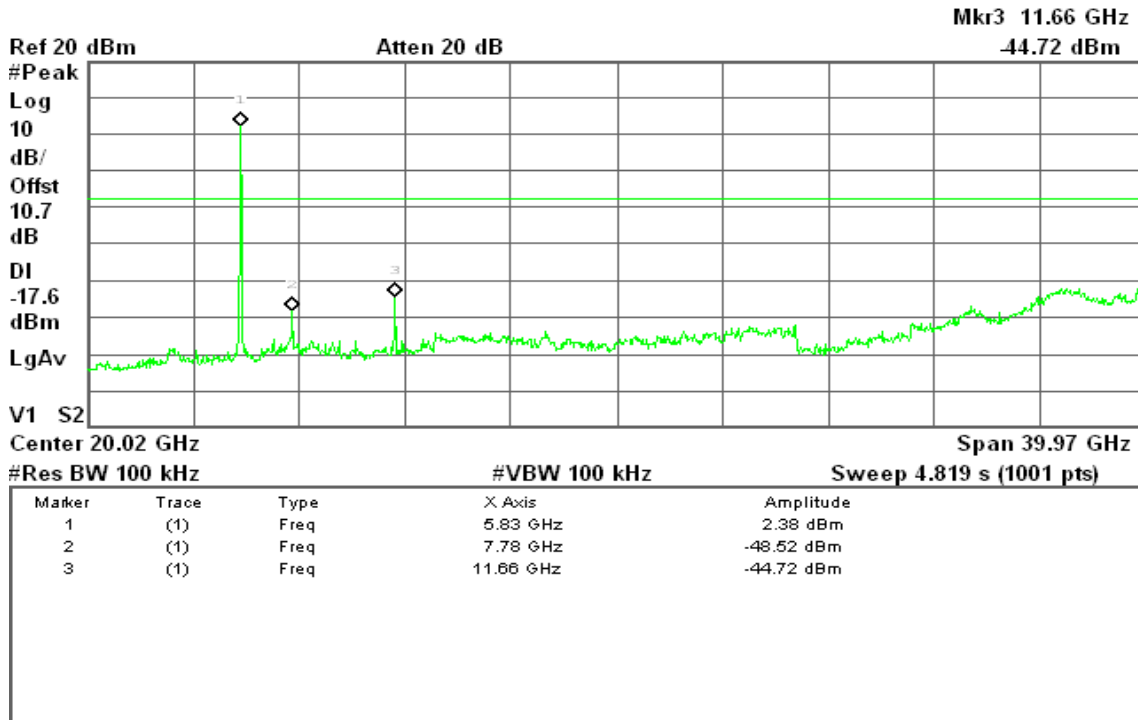




draft 802.11n Wide-40 MHz Channel mode

CH Low

Agilent 17:34:26 Jul 28, 2010


R T

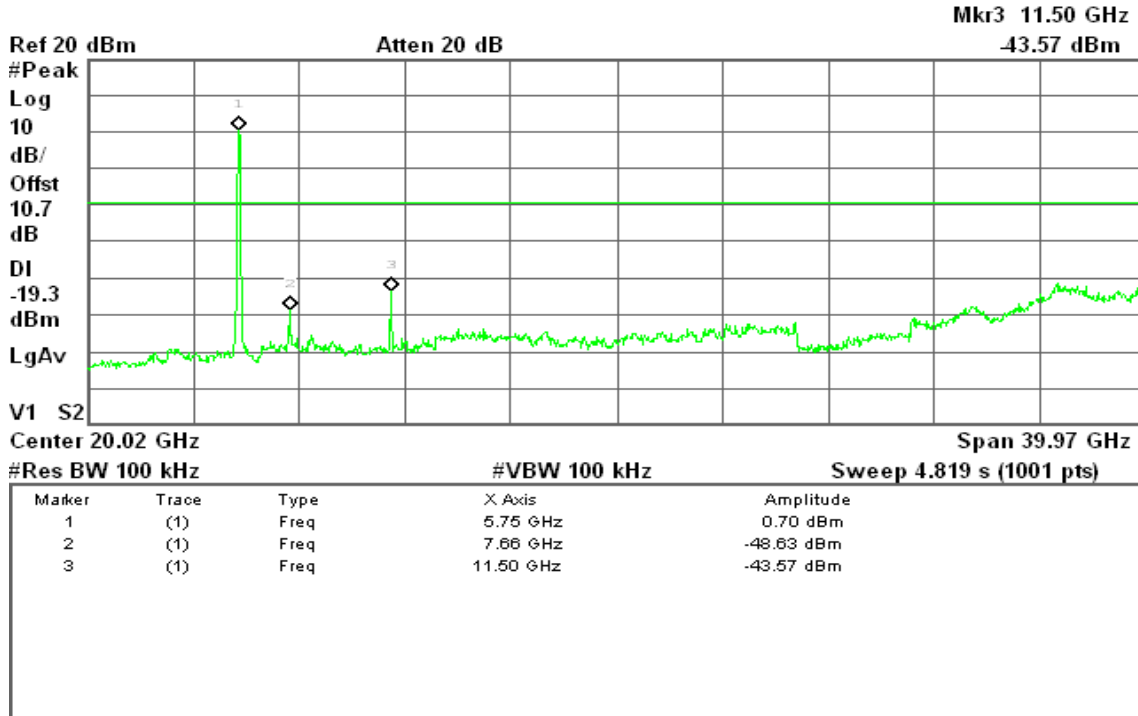

CH High

Agilent 17:38:16 Jul 28, 2010

R T

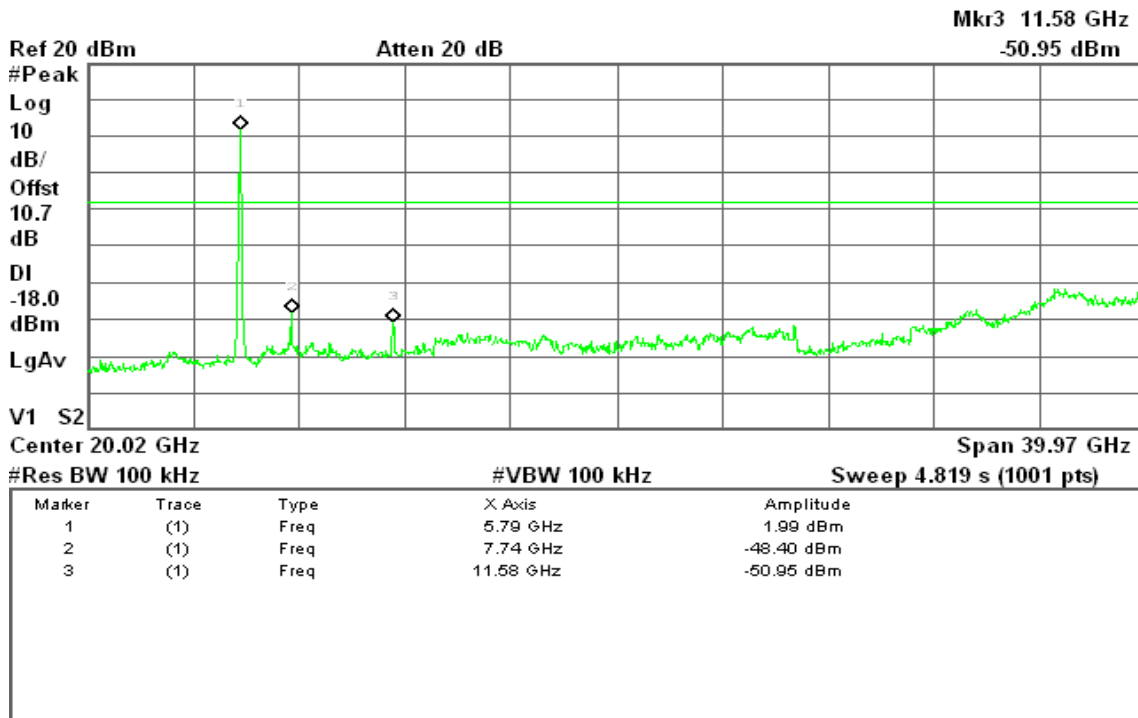





## 7.6.2 Radiated Emissions

### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the above emission table, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




### Test Configuration

#### 9kHz ~ 30MHz

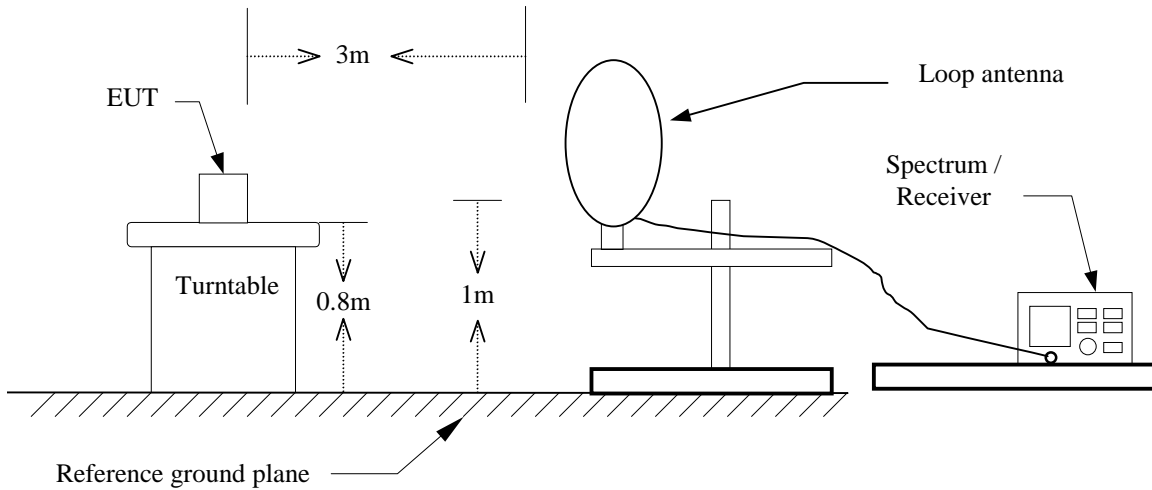


#### 30MHz ~ 1 GHz

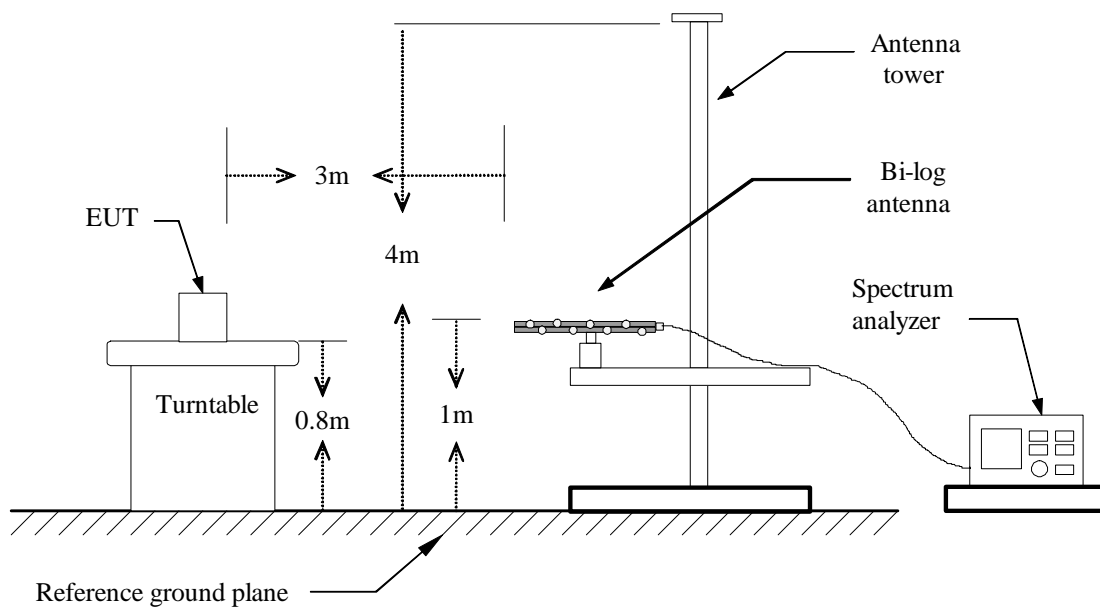



Above 1 GHz

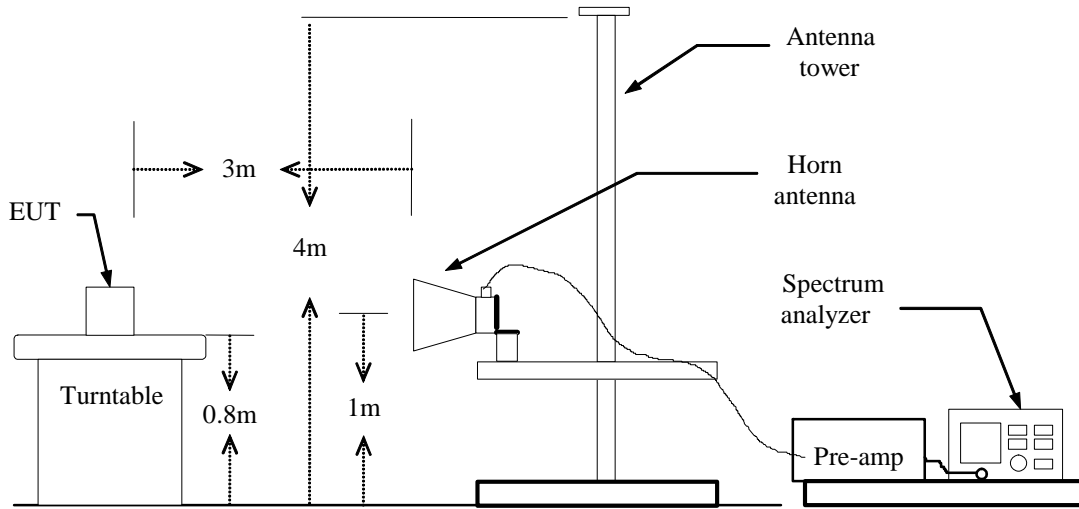



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:  
Below 1GHz:  
RBW=100kHz / VBW=300kHz / Sweep=AUTO  
Above 1GHz:  
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



**Below 1 GHz**

**Operation Mode:** Normal Link

**Test Date:** September 10, 2010

**Temperature:** 25°C

**Tested by:** Mark Yang

**Humidity:** 50% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
240.17	V	39.03	-11.09	27.94	46.00	-18.06	Peak
299.98	V	39.92	-9.24	30.68	46.00	-15.32	Peak
324.23	V	36.70	-8.66	28.04	46.00	-17.96	Peak
345.25	V	36.04	-8.16	27.88	46.00	-18.12	Peak
479.43	V	35.26	-5.44	29.81	46.00	-16.19	Peak
647.57	V	32.07	-2.95	29.12	46.00	-16.88	Peak
240.17	H	40.84	-11.09	29.76	46.00	-16.24	Peak
259.57	H	39.23	-10.26	28.97	46.00	-17.03	Peak
400.22	H	36.13	-7.08	29.04	46.00	-16.96	Peak
500.45	H	34.16	-5.14	29.02	46.00	-16.98	Peak
699.30	H	31.64	-2.54	29.10	46.00	-16.90	Peak
959.58	H	28.22	0.44	28.66	46.00	-17.34	Peak

**Remark:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



**Above 1 GHz**

**Operation Mode:** Tx / IEEE 802.11b mode / CH Low

**Test Date:** September 30, 2010

**Temperature:** 25°C

**Tested by:** Mark Yang

**Humidity:** 50% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1286.67	V	59.12	---	-9.11	50.01	---	74.00	54.00	-3.99	Peak
4825.00	V	58.19	51.73	1.18	59.37	52.91	74.00	54.00	-1.09	AVG
N/A										
1463.33	H	58.50	---	-8.82	49.67	---	74.00	54.00	-4.33	Peak
4825.00	H	54.10	49.91	1.18	55.28	51.09	74.00	54.00	-2.91	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11b mode / CH Mid

Test Date: September 30, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1360.00	V	58.64	---	-8.99	49.65	---	74.00	54.00	-4.35	Peak
4875.00	V	55.44	51.94	1.16	56.60	53.10	74.00	54.00	-0.90	AVG
N/A										
1460.00	H	58.92	---	-8.83	50.10	---	74.00	54.00	-3.90	Peak
4875.00	H	50.73	---	1.16	51.89	---	74.00	54.00	-2.11	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11b mode / CH High

Test Date: September 30, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1503.33	V	64.52	60.80	-8.73	55.79	52.07	74.00	54.00	-1.93	AVG
4925.00	V	54.87	51.18	1.14	56.01	52.32	74.00	54.00	-1.68	AVG
N/A										
1496.67	H	64.67	61.37	-8.77	55.90	52.60	74.00	54.00	-1.40	AVG
4925.00	H	53.74	44.61	1.14	54.88	45.75	74.00	54.00	-8.25	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: Tx / IEEE 802.11g mode / CH Low

Test Date: September 30, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1573.33	V	58.81	---	-8.08	50.73	---	74.00	54.00	-3.27	Peak
N/A										
1440.00	H	58.83	---	-8.86	49.97	---	74.00	54.00	-4.03	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11g mode/ CH Mid

Test Date: September 30, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1596.67	V	57.46	---	-7.87	49.59	---	74.00	54.00	-4.41	Peak
N/A										
1586.67	H	58.67	---	-7.96	50.71	---	74.00	54.00	-3.29	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11g mode/ CH High

Test Date: September 30, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	71.89	47.25	-8.76	63.13	38.49	74.00	54.00	-15.51	AVG
N/A										
1500.00	H	64.78	50.37	-8.76	56.02	41.61	74.00	54.00	-12.39	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: September 30, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1453.33	V	59.20	---	-8.84	50.36	---	74.00	54.00	-3.64	Peak
N/A										
1476.67	H	59.01	---	-8.80	50.22	---	74.00	54.00	-3.78	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

**Test Date:** September 30, 2010

**Temperature:** 25°C

**Tested by:** Mark Yang

**Humidity:** 50% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
N/A										
1293.33	H	59.20	---	-9.10	50.10	---	74.00	54.00	-3.90	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Standard-20 MHz Channel mode / CH High

**Test Date:** September 30, 2010

**Temperature:** 25°C

**Tested by:** Mark Yang

**Humidity:** 50% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1503.33	V	65.87	45.73	-8.73	57.14	37.00	74.00	54.00	-17.00	AVG
N/A										
1463.33	H	58.72	---	-8.82	49.90	---	74.00	54.00	-4.10	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: September 30, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1550.00	V	58.82	---	-8.30	50.52	---	74.00	54.00	-3.48	Peak
N/A										
1323.33	H	58.68	---	-9.05	49.63	---	74.00	54.00	-4.37	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid

Test Date: September 30, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1316.67	V	58.18	---	-9.06	49.12	---	74.00	54.00	-4.88	Peak
N/A										
1523.33	H	58.16	---	-8.54	49.61	---	74.00	54.00	-4.39	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH High

Test Date: September 30, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1590.00	V	59.13	---	-7.93	51.20	---	74.00	54.00	-2.80	Peak
N/A										
1526.67	H	59.01	---	-8.51	50.49	---	74.00	54.00	-3.51	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode/ CH Low

Test Date: July 27, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2010.00	V	51.87	---	-4.12	47.75	---	74.00	54.00	-6.25	Peak
2660.00	V	52.26	---	-2.19	50.07	---	74.00	54.00	-3.93	Peak
N/A										
1923.33	H	52.17	---	-4.86	47.31	---	74.00	54.00	-6.69	Peak
2453.33	H	51.72	---	-2.80	48.92	---	74.00	54.00	-5.08	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode/ CH Mid

Test Date: July 27, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2083.33	V	51.60	---	-3.90	47.70	---	74.00	54.00	-6.30	Peak
2406.67	V	51.91	---	-2.94	48.97	---	74.00	54.00	-5.03	Peak
2750.00	V	51.55	---	-1.93	49.62	---	74.00	54.00	-4.38	Peak
N/A										
1313.33	H	53.54	---	-9.07	44.47	---	74.00	54.00	-9.53	Peak
2173.33	H	51.82	---	-3.63	48.19	---	74.00	54.00	-5.81	Peak
2963.33	H	51.56	---	-1.31	50.25	---	74.00	54.00	-3.75	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode/ CH High

Test Date: July 27, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1326.67	V	53.94	---	-9.05	44.89	---	74.00	54.00	-9.11	Peak
1760.00	V	53.07	---	-6.36	46.71	---	74.00	54.00	-7.29	Peak
2263.33	V	51.81	---	-3.37	48.44	---	74.00	54.00	-5.56	Peak
N/A										
1446.67	H	53.72	---	-8.85	44.87	---	74.00	54.00	-9.13	Peak
2210.00	H	51.62	---	-3.52	48.10	---	74.00	54.00	-5.90	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

**Test Date:** July 27, 2010

**Temperature:** 23°C

**Tested by:** Wolf Huang

**Humidity:** 51% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1226.67	V	53.60	---	-9.21	44.39	---	74.00	54.00	-9.61	Peak
1993.33	V	52.13	---	-4.21	47.92	---	74.00	54.00	-6.08	Peak
2326.67	V	51.80	---	-3.18	48.62	---	74.00	54.00	-5.38	Peak
N/A										
1646.67	H	52.32	---	-7.41	44.91	---	74.00	54.00	-9.09	Peak
1823.33	H	53.29	---	-5.78	47.51	---	74.00	54.00	-6.49	Peak
2216.67	H	51.93	---	-3.50	48.43	---	74.00	54.00	-5.57	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: July 27, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1210.00	V	53.23	---	-9.24	43.99	---	74.00	54.00	-10.01	Peak
1873.33	V	52.91	---	-5.32	47.59	---	74.00	54.00	-6.41	Peak
2140.00	V	52.07	---	-3.73	48.34	---	74.00	54.00	-5.66	Peak
N/A										
1396.67	H	53.06	---	-8.93	44.13	---	74.00	54.00	-9.87	Peak
2233.33	H	52.23	---	-3.45	48.77	---	74.00	54.00	-5.23	Peak
2520.00	H	51.57	---	-2.60	48.97	---	74.00	54.00	-5.03	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Standard-20 MHz Channel mode / CH High

**Test Date:** July 27, 2010

**Temperature:** 23°C

**Tested by:** Wolf Huang

**Humidity:** 51% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1790.00	V	52.23	---	-6.09	46.14	---	74.00	54.00	-7.86	Peak
2106.67	V	51.80	---	-3.83	47.97	---	74.00	54.00	-6.03	Peak
2453.33	V	51.76	---	-2.80	48.96	---	74.00	54.00	-5.04	Peak
N/A										
1706.67	H	53.35	---	-6.85	46.49	---	74.00	54.00	-7.51	Peak
2036.67	H	51.46	---	-4.04	47.42	---	74.00	54.00	-6.58	Peak
2296.67	H	51.96	---	-3.27	48.70	---	74.00	54.00	-5.30	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: July 27, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1313.33	V	53.46	---	-9.07	44.39	---	74.00	54.00	-9.61	Peak
1753.33	V	53.85	---	-6.42	47.42	---	74.00	54.00	-6.58	Peak
2423.33	V	53.03	---	-2.89	50.14	---	74.00	54.00	-3.86	Peak
N/A										
2150.00	H	51.52	---	-3.70	47.82	---	74.00	54.00	-6.18	Peak
2650.00	H	51.13	---	-2.22	48.91	---	74.00	54.00	-5.09	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH High

Test Date: July 27, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2093.33	V	52.43	---	-3.87	48.56	---	74.00	54.00	-5.44	Peak
2183.33	V	52.12	---	-3.60	48.52	---	74.00	54.00	-5.48	Peak
N/A										
1583.33	H	52.88	---	-7.99	44.89	---	74.00	54.00	-9.11	Peak
1850.00	H	53.00	---	-5.53	47.47	---	74.00	54.00	-6.53	Peak
2376.67	H	51.30	---	-3.03	48.27	---	74.00	54.00	-5.73	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### TEST RESULTS


The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



**Test Data**

**Operation Mode:** Normal Link  
**Temperature:** 19°C  
**Humidity:** 66% RH

**Test Date:** August 23, 2010  
**Tested by:** Vic Lin  
**Line:** L1

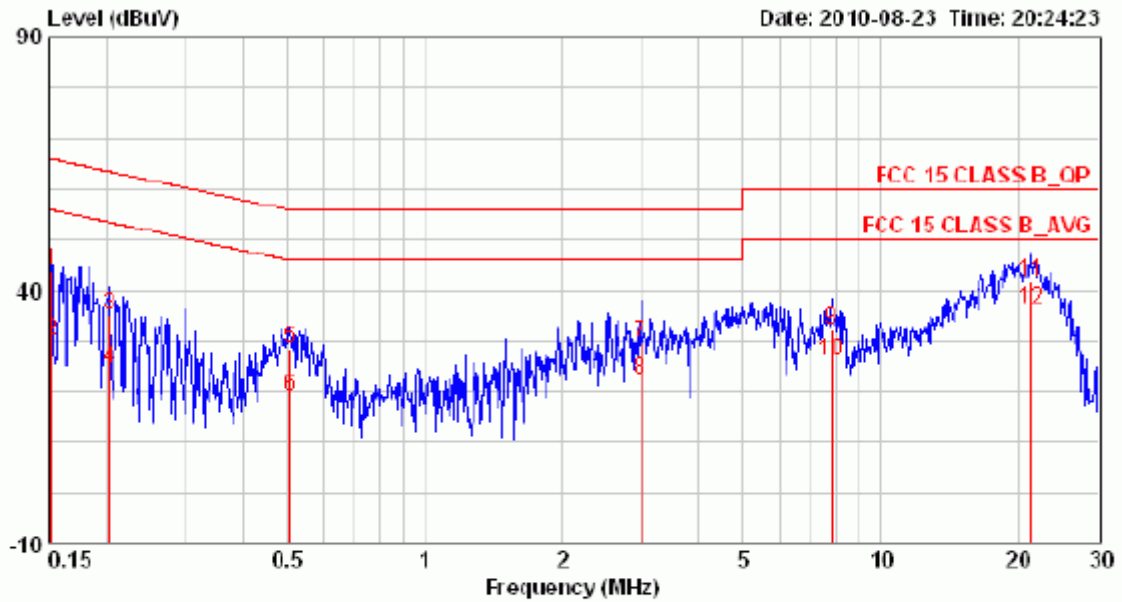

Freq. MHz	Corr. Factor dB	Reading Value dBuV		Emission Level dBuV		Limit dBuV		Margin dB	
		Q. P.	Ave.	Q. P.	Ave.	Q. P.	Ave.	Q. P.	Ave.
0.152	0.05	43.04	29.90	43.09	29.95	65.91	55.91	-22.02	-25.96
0.203	0.06	34.96	24.26	35.02	24.32	63.49	53.49	-28.47	-29.17
0.507	0.06	28.34	18.70	28.40	18.76	56.00	46.00	-27.60	-27.24
2.978	0.16	29.54	22.02	29.70	22.18	56.00	46.00	-26.30	-23.82
7.810	0.29	31.83	25.77	32.12	26.06	60.00	50.00	-27.88	-23.94
21.373	0.53	41.18	35.60	41.71	36.13	60.00	50.00	-18.29	-13.87

**Remark:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Operation Mode: Normal Link


Test Date: August 23, 2010

Temperature: 19°C

Tested by: Vic Lin

Humidity: 66% RH

Line: L2

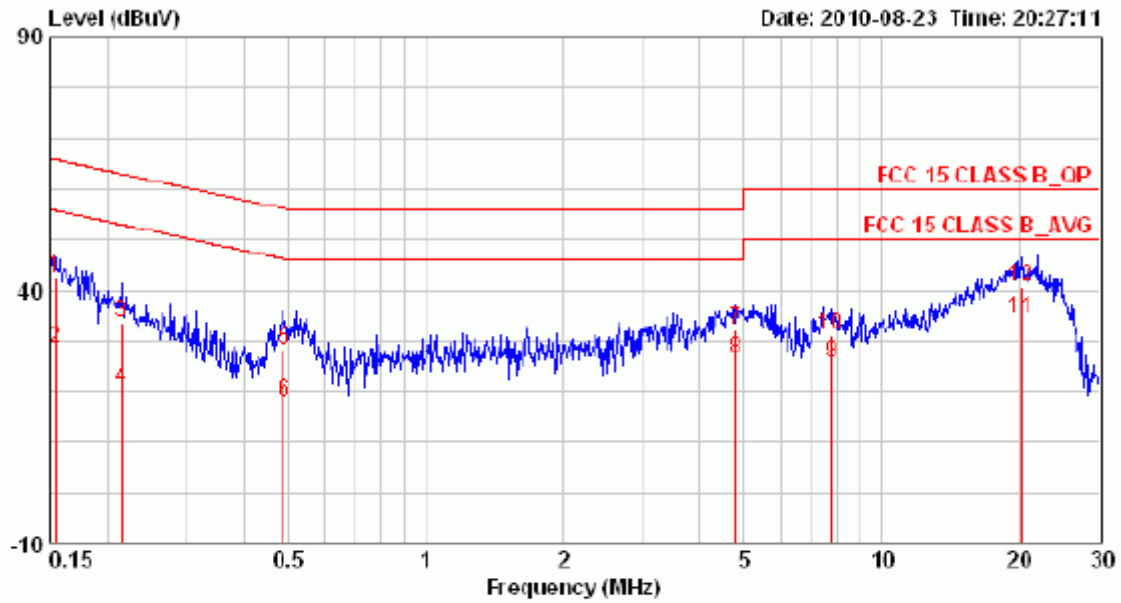

Freq. MHz	Corr. Factor dB	Reading Value dBuV		Emission Level dBuV		Limit dBuV		Margin dB	
		Q. P.	Ave.	Q. P.	Ave.	Q. P.	Ave.	Q. P.	Ave.
0.154	0.06	42.16	28.24	42.22	28.30	65.78	55.78	-23.56	-27.48
0.215	0.06	33.36	20.34	33.42	20.40	63.01	53.01	-29.59	-32.61
0.489	0.06	27.90	17.71	27.96	17.77	56.19	46.19	-28.23	-28.42
4.772	0.19	31.81	26.23	32.00	26.42	56.00	46.00	-24.00	-19.58
7.769	0.27	30.78	25.30	31.05	25.57	60.00	50.00	-28.95	-24.43
20.270	0.48	39.96	33.79	40.44	34.27	60.00	50.00	-19.56	-15.73

**Remark:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



## APPENDIX I RADIO FREQUENCY EXPOSURE

### LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

### EUT Specification

<b>EUT</b>	NOTEBOOK COMPUTER
<b>Frequency band (Operating)</b>	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input type="checkbox"/> Others: <u>Bluetooth: 2.402GHz ~ 2.480GHz</u>
<b>Device category</b>	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm <sup>2</sup> ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm <sup>2</sup> )
<b>Antenna diversity</b>	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
<b>Max. output power</b>	IEEE 802.11b mode: 24.92 dBm (310.45mW) IEEE 802.11g mode: 28.01 dBm (632.41mW) draft 802.11n Standard-20 MHz Channel mode: 27.07 dBm (509.33mW) draft 802.11n Wide-40 MHz Channel mode: 27.04 dBm (505.82mW)
<b>Antenna gain (Max)</b>	IEEE 802.11b/g mode: 2.6 dBi (Numeric gain: 1.81)
<b>Evaluation applied</b>	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation* <input type="checkbox"/> N/A
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>The maximum output power is <u>28.01dBm (632.41mW) at 2412MHz (with 1.81 numeric antenna gain.)</u></li> <li>DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.</li> </ol>	

### TEST RESULTS

No non-compliance noted.

Remark: Please refer to the separated SAR report.



<b>EUT</b>	NOTEBOOK COMPUTER
<b>Frequency band (Operating)</b>	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input checked="" type="checkbox"/> WLAN: 5.725GHz ~ 5.850GHz <input type="checkbox"/> Others: <u>Bluetooth: 2.402GHz ~ 2.480GHz</u>
<b>Device category</b>	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm <sup>2</sup> ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm <sup>2</sup> )
<b>Antenna diversity</b>	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
<b>Max. output power</b>	IEEE 802.11a mode: 22.02 dBm (159.22mW) draft 802.11n Standard-20 MHz Channel mode: 20.5 dBm (112.20 mW) draft 802.11n Wide-40 MHz Channel mode: 20.6 dBm (114.81mW)
<b>Antenna gain (Max)</b>	IEEE 802.11a: 3.97 dBi (Numeric gain: 2.49)
<b>Evaluation applied</b>	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation* <input type="checkbox"/> N/A
<b>Remark:</b>	
1. <i>The maximum output power is <u>22.02 dBm (159.22mW)</u> at <u>5785MHz</u> (with <u>2.49 numeric antenna gain.</u>)</i> 2. <i>DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.</i>	

**TEST RESULTS**

*No non-compliance noted.*

*Remark: Please refer to the separated SAR report.*