



Test Report

For

Applicant : Mitac Technology Corp.

Equipment Type : Tablet Computer

Model : CA35

FCC ID : MAU100

Report No. : 003H023FI



Test Report Certification

Quietek Corporation

No.75-1, Wang-Yeh Valley, Yung-Hsing, Chiung-Lin,
Hsin-Chu County, Taiwan, R.O.C.
Tel : 886-3-592-8858, Fax: 886-3-592-8859
E-Mail : quietek@ms24.hinet.net

Accredited by NIST(NVLAP), VCCI, BSMI, DNV, TUV

Applicant : Mitac Technology Corp.
Address : 3F. No. 1, Innovation Rd. 2, Hsinchu Science-Based Industrial
Park, Hsinchu, Taiwan, R.O.C.
Equipment Type : Tablet Computer
Model : CA35
FCC ID. : MAU100
Measurement Standard : CISPR 22/1994
Measurement Procedure : ANSI C63.4 /1992
Operation Voltage : 120VAC/60Hz
Classification : Class B
Test Result : Complied
Test Date : March 28, 2000
Report No. : 003H023FI



The Test Results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented by: Shelly Fan

Test Engineer: Arthur Liu

Approved: Kevin Wang



TABLE OF CONTENTS

	Description	Page
1.	GENERAL INFORMATION.....	4
1.1	EUT Description	4
1.2	Tested System Details.....	5
1.3	EUT Configuration.....	7
1.4	EUT Exercise Software	8
1.5	Test performed	8
1.6	Test Facility	9
2.	CONDUCTED EMISSION.....	10
2.1	Test Equipment List.....	10
2.2	Test Setup	10
2.3	Limits	10
2.4	Test Procedure.....	11
2.5	Test Results.....	11
3.	RADIATED EMISSION	12
3.1	Test Equipment	12
3.2	Test Setup	12
3.3	Limits	13
3.4	Test Procedure.....	13
3.5	Test Results.....	13
4.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	14
5.	ATTACHMENT	15
	ATTACHMENT 1: SUMMARY OF TEST RESULTS	
	ATTACHMENT 2: EUT TEST PHOTOGRAPHS	
	ATTACHMENT 3: EUT DETAILED PHOTOGRAPHS	



1. General Information

1.1 EUT Description

Applicant	: Mitac Technology Corp.
Address	: 3F. No. 1, Innovation Rd. 2, Hsinchu Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.
Equipment Type	: Tablet Computer
Model	: CA35
FCC ID	: MAU100
Operation Voltage	: 120VAC/60Hz
Mother Board	: PWAiPWA, CA35
CPU	: Intel Pentium III / 500MHz
Hard Disk Driver	: FUJISU ,MHH2064AT, S/N: 01071766
Control Card	: PWAiPWA, CA35
FAX Modem Card	: ASKEY, V1456VOL42M
Switching Power Supply	: LIEN CHANG, BSD-CA35
Inverter 13.3"	: SUMIDA, IV16122/T
Inverter 12.1"	: SUMIDA, IV37076/T
LCD 13.3"	: ACER GROUP CO., D091303
LCD 12.1"	: MITSUBISHI, AA121SJ03
Keyboard (infrared)	: Mitac, FDC-3402 ILAN, F19603H
Power Adapter	: Cable In: Non-Shielded, 1.8m Cable Out: Non-Shielded, 1.2m, A ferrite core bonded

Remark:

- 1.The EUT is a Tablet Computer with one serial port, one VGA port, one PS2 Mouse, one PS2 keyboard, one LAN port, one Microphone port and one USB port.
- 2.The CPU of EUT is 100MHz and the maximum resolution is 800*600.
- 3.QuieTek has verified the construction and function in typical operation, them shown in this test report.



1.2 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

1.2.1 Tablet Computer(EUT)

Model Number : CA35
Serial Number : N/A
FCC ID : MAU100
Manufacturer : Mitac
Power Adapter : ILAN, F19603H
Cable In: Non-Shielded, 1.8m
Cable Out: Non-Shielded, 1.2m, A ferrite core bonded.
RJ11 : Non-Shielded, 1.2m
LAN Cable (STP) : Non-Shielded, 3m
1394 Cable : Shielded, 6m

1.2.2 Monitor

Model Number : CM752ET-311
Serial Number : T8F006364
FCC ID : DoC
Manufacturer : HITACHI
Data Cable : Shielded, 1.5m
Power Cord : Shielded, 1.8m

1.2.3 Keyboard

Model Number : 6311-TW4C
Serial Number : 916590704C91F24437
FCC ID : DoC
Manufacturer : ACER
Data Cable : Shielded, 1.8m

1.2.4 Modem

Model Number : 1414
Serial Number : 980033032
FCC ID : IFAXDM1414
Manufacturer : ACEEX
Data Cable : Shielded, 1.5m
Power Adapter : ACCEX, SCP41-91000A
Cable Output : Shielded, 1.5m



1.2.5 Modem

Model Number : 1414
Serial Number : 980033039
FCC ID : IFAXDM1414
Manufacturer : ACEEX
Data Cable : Shielded, 1.5m
Power Adapter : ACCEX, SCP41-91000A
Cable Output : Shielded, 1.5m

1.2.6 Mouse

Model Number : M-S34
Serial Number : LZB75078428
FCC ID : DZL211029
Manufacturer : HP
Data Cable : Shielded, 1.8m

1.2.7 Joystick

Model Number : JPD110
Serial Number : 9814A15646
FCC ID : DoC
Manufacturer : Maxxtro
Data Cable : Shielded, 1.7m

1.2.8 Video Camera

Model Number : Vcam 3X
Serial Number : N/A
FCC ID : DoC
Manufacturer : Mustek
Data Cable (USB) : Shielded, 1.5m

1.2.9 Walkman


Model Number : TB-21984
Serial Number : N/A
FCC ID : DoC
Manufacturer : TOBISHI
Data Cable : Non-Shielded, 1.6m



1.2.10 Speaker

Model Number : J-009
Serial Number : 97-C-019790-T
FCC ID : DoC
Manufacturer : JS
Data Cable : Non-Shielded, 1.2m

1.3 EUT Configuration

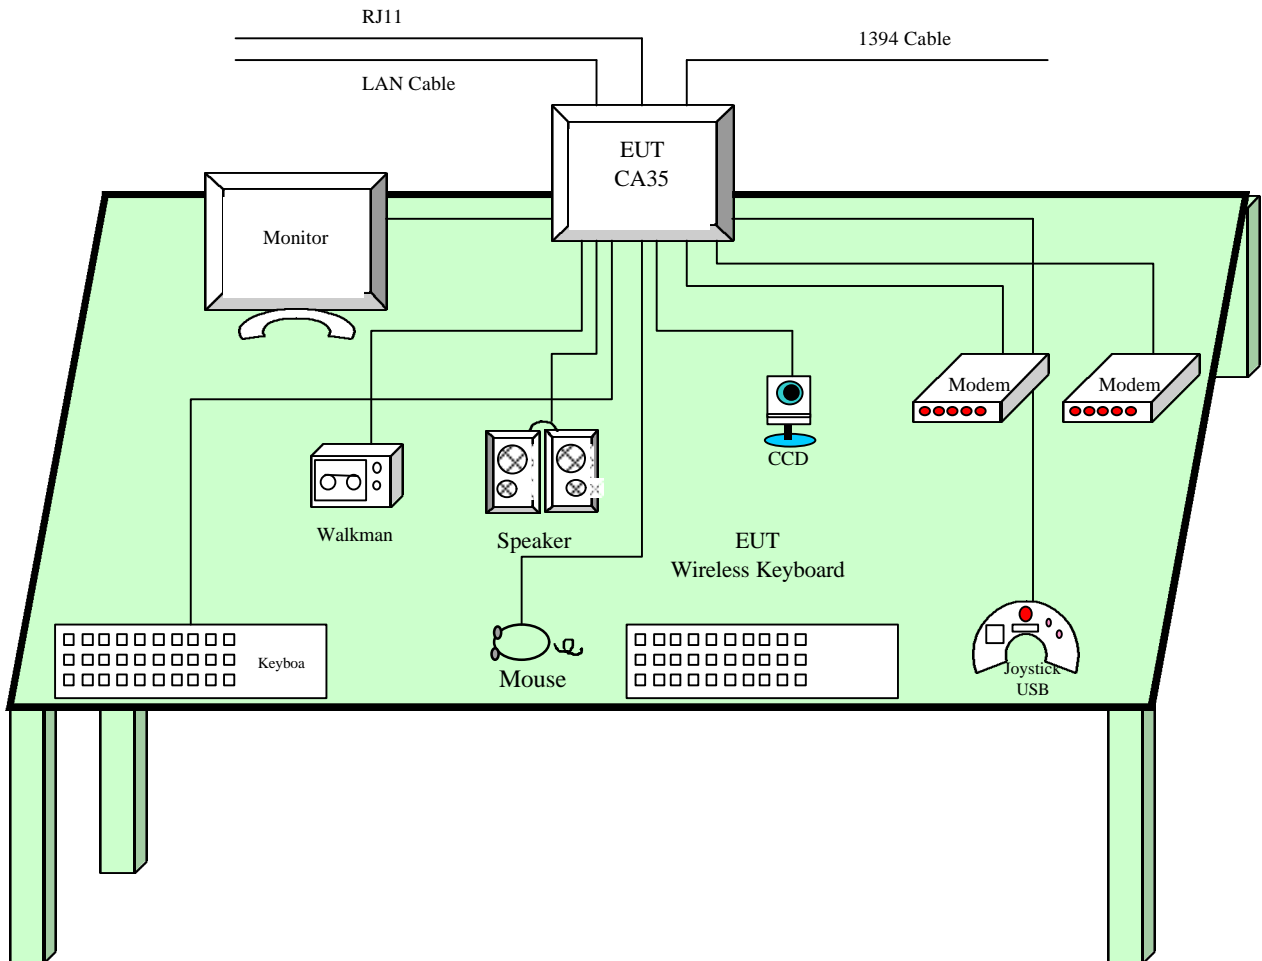

1.4 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1.4.1 Setup the EUT and simulators as shown on 1.3.
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 The EUT reads data from disk.
- 1.4.4 The EUT sends “H” pattern to monitor.
- 1.4.5 The EUT reads and writes data into and from modem.
- 1.4.6 The EUT will read data from floppy disk and then writes the data into floppy disk , same operation for hard disk.

1.5 Test performed

Conducted emissions were investigated over the frequency range from **0.15MHz to 30MHz** using a receiver bandwidth of 9kHz.

Radiated emissions were investigated over the frequency range from **30MHz to 1000MHz** using a receiver bandwidth of 120kHz. Radiated testing was performed at an antenna to EUT distance of 10 meters



1.6 Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2



September 30, 1998 Accreditation on NVLAP
NVLAP Lab Code: 200347-0

February 23, 1999 Accreditation on DNV
Statement No. : 413-99-LAB11



December 8, 1998 Registration on VCCI
Registration No. for No.2 Shielded Room C-858
Registration No. for No.1 Open Area Test Site R-823
Registration No. for No.2 Open Area Test Site R-835



January 04, 1999 Accreditation on TÜV Rheinland
Certificate No.: I9865712-9901



Name of firm : QuieTek Corporation

Site location : No.75-1, Wang-Yeh Valley, Yung-Hsing Tsuen,
Chiung-Lin, Hsin-Chu County, Taiwan, R.O.C.



2. Conducted Emission


2.1 Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 1999	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 1999	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 1999	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	N0.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2 Test Setup

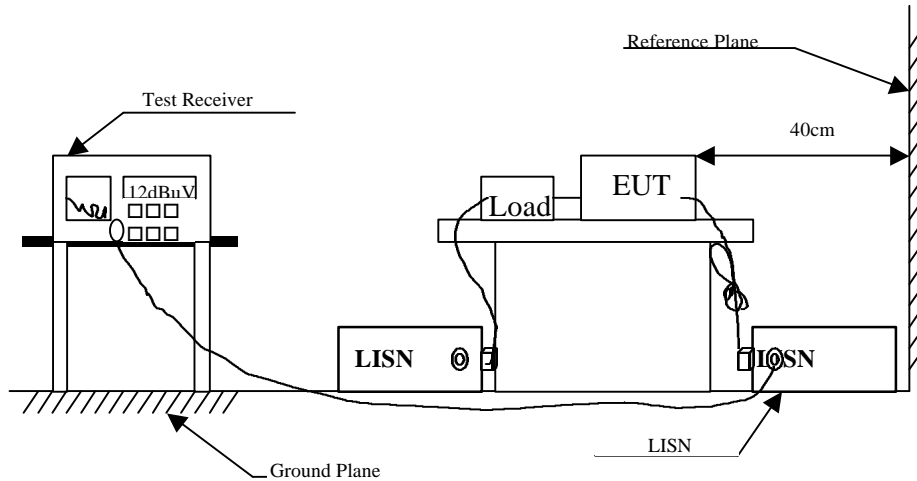

2.3 Limits

Remarks : In the above table, the tighter limit applies at the band edges.

2.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 /1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

2.5 Test Results

The conducted emission from the EUT is measured and shown in Attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.



3. Radiated Emission


3.1 Test Equipment

The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X Test Receiver	R & S	ESCS 30 / 825442/14	May, 1999
	Spectrum Analyzer	Advantest	R3261C / 71720140	May, 1999
	Pre-Amplifier	HP	8447D/3307A01812	May, 1999
	X Bilog Antenna	Chase	CBL6112B / 12452	Sep., 1999
	X Horn Antenna	EM	EM6917 / 103325	May, 1999
Site # 2	X Test Receiver	R & S	ESCS 30 / 825442/17	May, 1999
	Spectrum Analyzer	Advantest	R3261C / 71720609	May, 1999
	Pre-Amplifier	HP	8447D/3307A01814	May, 1999
	X Bilog Antenna	Chase	CBL6112B / 2455	Sep., 1999
	X Horn Antenna	EM	EM6917 / 103325	May, 1999

- Note:
1. All equipment upon which need to calibrated are with calibration period of 1 year.
 - 2.. Mark "X" test instruments are used to measure the final test results.

3.2 Test Setup

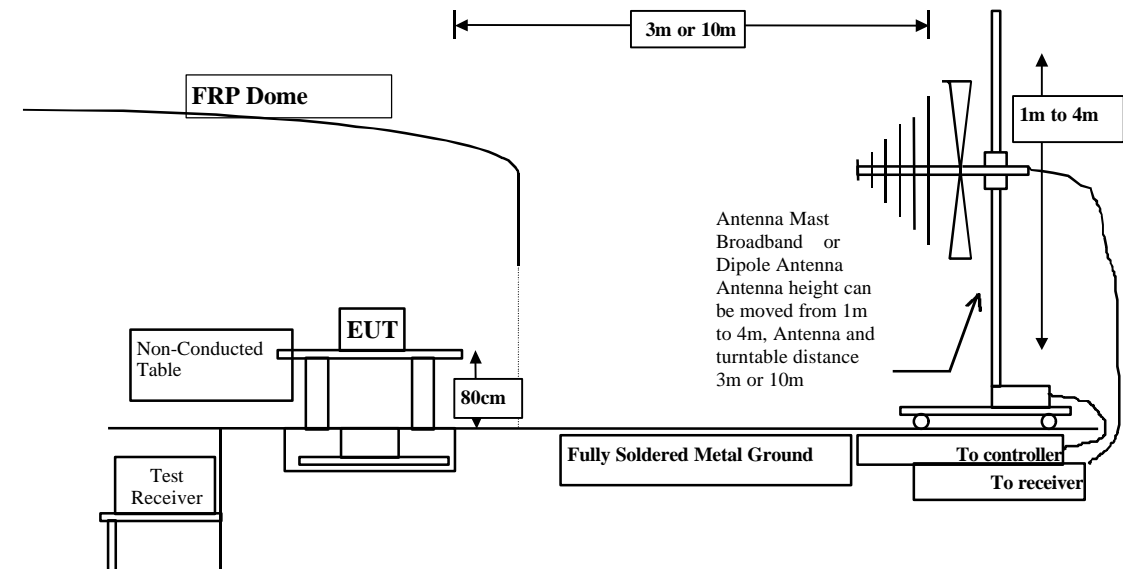

3.3 Limits

CISPR 22 Limits					FCC Part 15 Subpart B				
Frequency	Class A		Class B		Frequency	Class A		Class B	
MHz	Distance (m)	dBuV/m	Distance (m)	dBuV/m		uV/m	dBuV/m	uV/m	dBuV/m
30 – 230	10	40	10	30	30 – 88	90	39	100	40.0
230 – 1000	10	47	10	37	88 – 216	150	43.5	150	43.5
					216 – 960	210	46.5	200	46.0
					960 - 2000	300	49.5	500	54.0

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Line Voltage (dBuV/m) = 20 log RF Line Voltage (uV/m)

3.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters . The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4 /1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz.

3.5 Test Results

The radiated emission from the EUT is measured and shown in Attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.

4. EMI Reduction Method During Compliance Testing

No modification was made during testing.



5. Attachment

Attachment 1: Summary of Test Results	Number of Pages: 5
Attachment 2: EUT Test Photographs	Number of Pages: 2
Attachment 3: EUT Detailed Photographs	Number of Pages: 23



Attachment 1 : Summary of Test Results

The test results in the emission was performed according to the requirements of measurement standard and process. Quietek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission is listed as the attached data.

All the tests were carried out with the EUT in normal operation, which was defined as:

Mode 1 : CA35

The EUT passed all the tests.

The uncertainty is calculated in accordance with NAMAS NIS 81, The total uncertainty for this test is as follows:

Emission Test

- Uncertainty in the Conducted Emission Test: < ± 2.0 dB
- Uncertainty in the field strength measured: < ± 4.0 dB



CONDUCTED EMISSION DATA

Date of Test : Mar. 28, 2000 EUT : CA35
 Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency	Cable Loss	LISN Factor	Reading Level	Measurement Level	Limits
MHz	dB	dB	Line1	Line1	dBuV
			dBuV	dBuV	
* 0.179	0.01	0.10	46.78	46.89	64.53
0.240	0.02	0.10	42.89	43.01	62.10
0.298	0.04	0.10	40.77	40.91	60.29
0.478	0.06	0.10	38.07	38.23	56.37
0.719	0.08	0.10	37.19	37.37	56.00
1.021	0.10	0.10	34.13	34.33	56.00
Average:					
0.179	0.01	0.10	41.50	41.61	54.53
0.240	0.02	0.10	41.20	41.32	52.10
0.298	0.04	0.10	38.60	38.74	50.30
0.478	0.06	0.10	37.70	37.86	46.37
0.719	0.08	0.10	37.10	37.28	46.00
1.021	0.10	0.10	32.60	32.80	46.00

Remarks :

1. “ * ” means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test : March 28, 2000 EUT : Tablet Computer
 Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level Line2 dBuV	Measurement Level Line2 dBuV	Limits dBuV
0.177	0.01	0.10	45.33	45.44	64.61
0.239	0.02	0.10	42.51	42.63	62.13
0.299	0.04	0.10	41.05	41.19	60.27
0.419	0.05	0.10	39.53	39.68	57.47
* 0.537	0.07	0.10	38.25	38.42	56.00
0.716	0.08	0.10	37.39	37.57	56.00

Average:

0.177	0.01	0.10	40.40	40.51	54.63
0.239	0.02	0.10	41.50	41.62	52.13
0.299	0.04	0.10	39.00	39.14	50.27
0.419	0.05	0.10	38.90	39.05	47.47
0.537	0.07	0.10	38.20	38.37	46.00
0.716	0.08	0.10	37.10	37.28	46.00

Remarks :

1. “ * ” means that this data is the worst emission level.



RADIATED EMISSION DATA

Date of Test : March 28, 2000 EUT : Tablet Computer
 Test Mode : Mde 1 Test Site : No.1 Open Test Site

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Horizontal	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
55.882	1.40	5.73	0.00	9.65	16.78	13.22	30.00	395	76
193.510	2.73	9.15	0.00	10.11	21.99	8.01	30.00	395	203
232.542	3.10	10.57	0.00	13.94	27.61	9.39	37.00	395	4
265.380	3.42	13.81	0.00	6.84	24.07	12.93	37.00	395	77
298.930	3.75	13.33	0.00	11.36	28.44	8.56	37.00	395	51
332.170	3.92	13.64	0.00	4.24	21.80	15.20	37.00	291	20
* 786.620	6.29	20.11	0.00	4.59	30.99	6.01	37.00	272	23
995.710	7.38	21.27	0.00	1.99	30.64	6.36	37.00	259	100

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



RADIATED EMISSION DATA

Date of Test : March 28, 2000 EUT : Tablet Computer
 Test Mode : Mde 1 Test Site : No.1 Open Test Site

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Vertical	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
232.440	3.10	10.41	0.00	11.57	25.08	11.92	37.00	99	31
249.197	3.26	12.23	0.00	7.52	23.01	13.99	37.00	109	84
298.925	3.75	13.54	0.00	9.57	26.86	10.14	37.00	99	70
558.222	5.10	18.61	0.00	6.35	30.06	6.94	37.00	238	84
589.965	5.27	18.33	0.00	7.01	30.61	6.39	37.00	238	30
* 786.162	6.28	19.12	0.00	5.30	30.70	6.30	37.00	199	17
995.640	7.38	20.67	0.00	1.19	29.24	7.76	37.00	192	91

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss.

