



INPUT: 19V = 4.74A

MODEL: B300

CAUTION: For use with power supply model ADP-90SB BB
Pour utiliser avec alimentation modèle ADP-90SB BB




This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference; and (2) this device must accept any interference, received, including interference that may cause undesired operation.

CAUTION: This surface is hot, avoid continuous body contact and do not place this notebook on your lap while it is operating.

S/N:

REF:

MADE IN CHINA 99

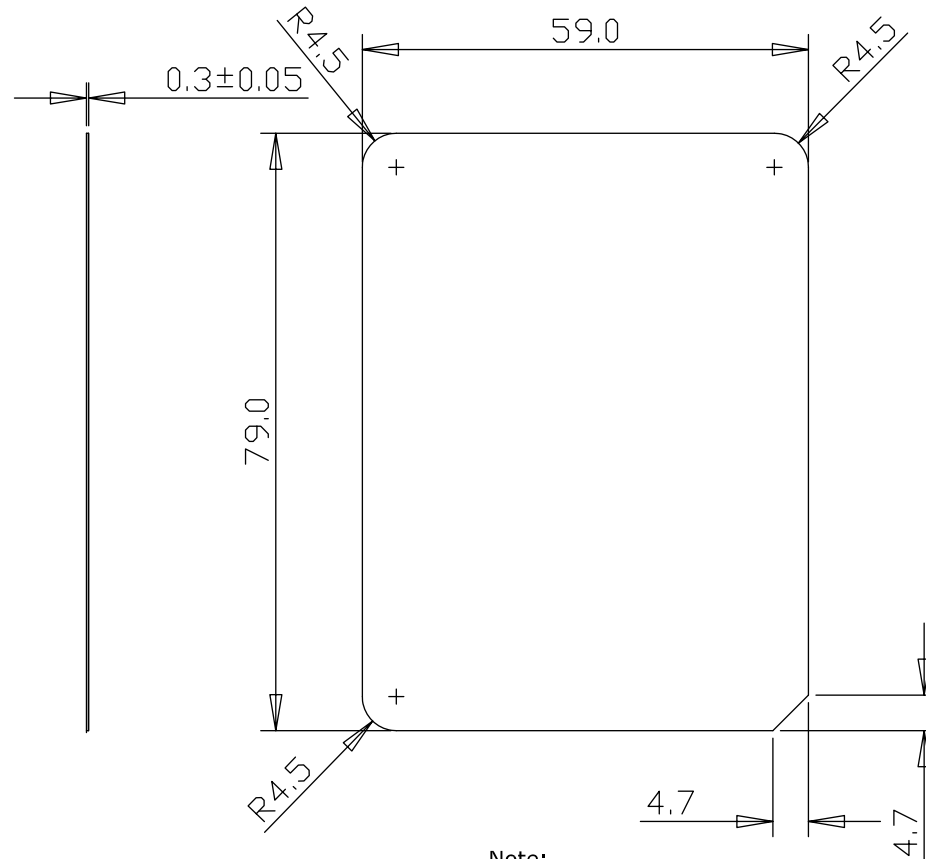

Note:

1. MATERIAL: 霧面PC(FR65),t 0.254,防火係數94-0, IT MUST BE APPROVED BY UL & CSA STANDARD
2. LABEL SHOULD HAVE PRESSURE SENSITIVE ADHESIVE WITH PROTECTIVE RELEASE LINER ON THE BACK SIDE.
3. COLORS:TEXT FOREGROUND : Pantone Cool Gray 3C
BACKGROUND: Pantone black
4. LABEL MANUFACTURER MUST USE A PROCESS & MATERIALS THOSE WHICH HAVE BEEN APPROVED BY UL & CSA
5. ADHESIVE: SONY T4000
6. 依RD承認 SAMPLE 為準
7. 成品需符合GP要求

ITEM	CONTENTS OF CHANGE	RVS	CHK	APV	M/D/Y	TOL ±	Plg	Met	Ins	Por	Cab	Pac	Gas	PCB	DATE	MATERIAL	SEE NOTES	TREATMENT	REMARK			
															Jan-07-2008							
					//	RANGE	0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.1	UNIT	MM	SCALE	--	DRAWING NAME	TF041-LABEL; RATING, MAU303	
					//		6~30	0.1	0.1	.15	.25	1	1	0.5	0.1	DRAWN	DESIGNED	CHECKED	APPROVED	MATERIAL NO.	MF	
					//		30~80	0.1	.15	0.2	0.3	2	1.5	1	0.1							R
					//		80~180	.15	.15	.25	0.3	2	2	1	.15							
					//		180~315	.15	0.2	0.3	0.4	2.5	2	1	.15							
					//		315~800	0.2	0.3	0.4	0.5	3	3	2	.15							

MITAC Technology Corp.