


A B C D E F



Note:

1. MATERIAL:PC(FR65),t 0.254,防火係數94-V0, IT MUST BE APPROVED BY UL & CSA STANDARD
2. LABEL SHOULD HAVE PRESSURE SENSITIVE ADHESIVE WITH PROTECTIVE RELEASE LINER ON THE BACK SIDE.
3. COLORS:TEXT FOREGROUND:GRAY 7 ; BACKGROUND:TAC-11A19
4. LABEL MANUFACTURER MUST USE A PROCESS & MATERIALS THOSE WHICH HAVE BEEN APPROVED BY UL & CSA
5. ADHESIVE: 3M467
6. 依RD承認為準
7. 成品需符合GP要求

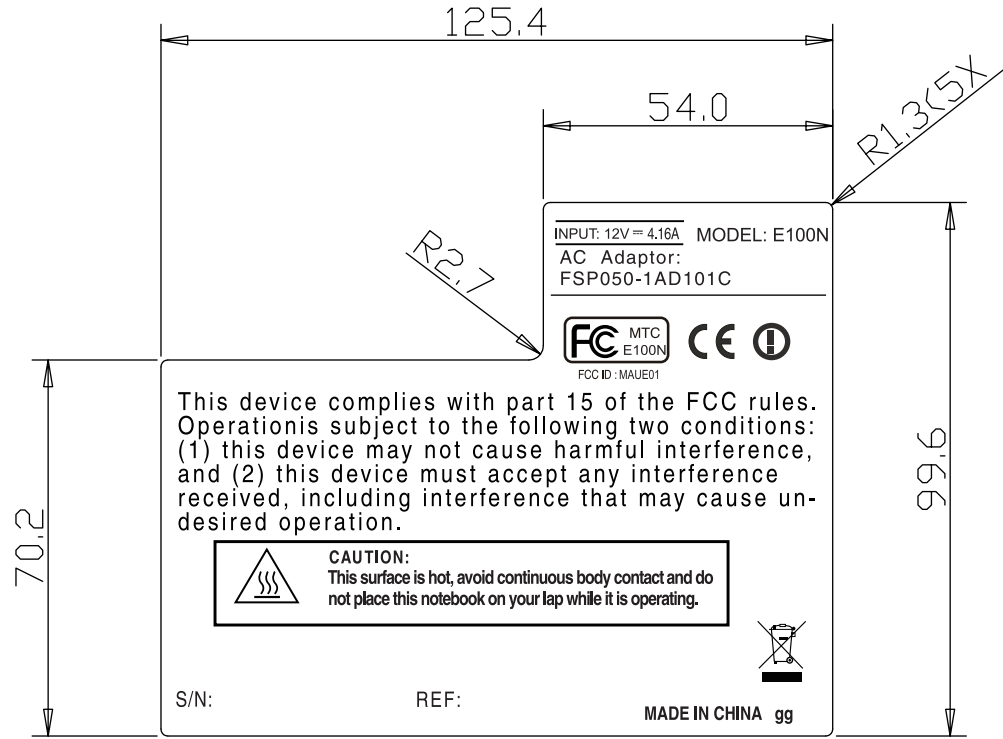

| ITEM | CONTENTS OF CHANGE | RVS | CHK | APV | M/D/Y | TOL ± | DATE: Oct.-12-2007 | | | | | | | | | | MATERIAL | SEE NOTES | TREATMENT | PROJECTION | | | | | | |
|------|--------------------|-----|-----|-----|-------|-------|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-------|----------|-----------|-----------|--------------|-----------------------------|-----|------|-------|---|----|
| | | | | | | | M1 | M2 | S1 | S2 | P1 | P2 | C | B | | | | | | | | | | | | |
| | | | | | | RANGE | 0~6 | .05 | 0.1 | .15 | 0.2 | .05 | 0.1 | 0.5 | .15 | UNIT | MM | SCALE | 1.00 | DRAWING NAME | TF041-LABEL;RATING,MP,E100N | | | | | |
| | | | | | | | 6~30 | .01 | 0.2 | .15 | .25 | 0.1 | .15 | 1 | .15 | DRAWN | DESIGNED | CHECKED | APPROVED | MATERIAL NO. | MF | 242 | 8177 | 00003 | R | 00 |
| | | | | | | | 30~80 | .15 | .25 | 0.2 | 0.3 | 0.2 | 0.4 | 2 | .25 | | | | | | | | | | | |
| | | | | | | | 80~180 | .15 | 0.3 | .25 | .45 | 0.4 | 0.8 | 3 | .25 | | | | | | | | | | | |
| | | | | | | | 180~315 | 0.2 | 0.5 | 0.4 | 0.6 | 0.6 | 1.2 | 3 | 0.3 | | | | | | | | | | | |
| | | | | | | | 315~800 | 0.3 | 0.8 | 0.7 | 1.1 | 0.8 | 1.5 | 4 | 0.5 | | | | | | | | | | | |

MITAC Technology Corp.

A B C D E F