


A B C D E F

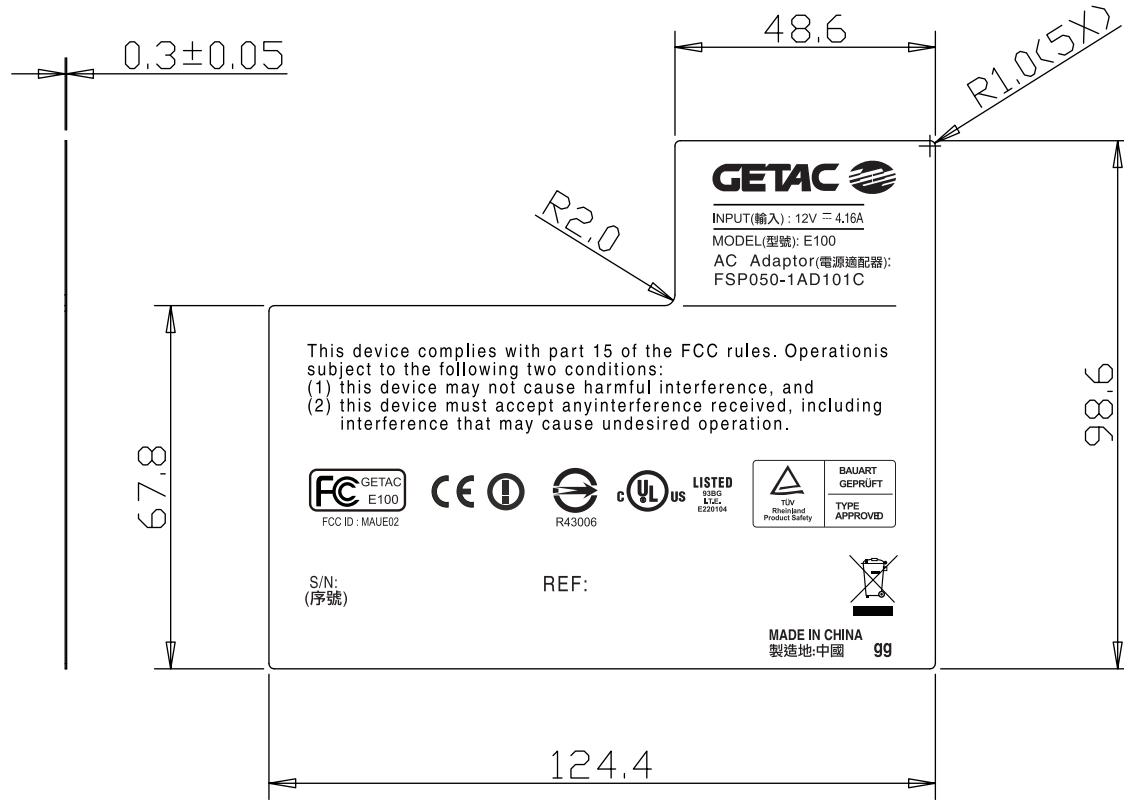

Note:

1. MATERIAL:PC(FR65),t 0.254,防火係數94-V0, IT MUST BE APPROVED BY UL & CSA STANDARD
2. LABEL SHOULD HAVE PRESSURE SENSITIVE ADHESIVE WITH PROTECTIVE RELEASE LINER ON THE BACK SIDE.
3. COLORS:TEXT FOREGROUND:GRAY 7 ; BACKGROUND:TAC-11A19
4. LABEL MANUFACTURER MUST USE A PROCESS & MATERIALS THOSE WHICH HAVE BEEN APPROVED BY UL & CSA
5. ADHESIVE: SONY T4000
6. 依RD承認為準
7. 成品需符合GP要求

					TOL ±	○					DATE	Dec-07-2007	MATERIAL	SEE NOTES	TREATMENT	PROJECTION								
					RANGE	M1	M2	S1	S2	P1	P2	C	B	UNIT	SCALE	1.00	DRAWING NAME							
				//	0~6	.05	0.1	.15	0.2	.05	0.1	0.5	.15	MM			TF041-LABEL;RATING,MP,E100							
				//	6~30	0.1	0.2	.15	.25	0.1	.15	1	.15											
				//	30~80	.15	.25	0.2	0.3	0.2	0.4	2	.25	DRAWN	DESIGNED	CHECKED	APPROVED	MATERIAL NO.	MF				R	00
				//	80~180	.15	0.3	.25	.45	0.4	0.8	3	.25					MITAC Technology Corp.						
				//	180~315	0.2	0.5	0.4	0.6	0.6	1.2	3	0.3											
ITEM	CONTENTS OF CHANGE	RVS	CHK	APV	M/D/Y	315~800	0.3	0.8	0.7	1.1	0.8	1.5	4	0.5										

A B C D E

