



FCC Radio Test Report

FCC ID: MCLCS-E340W

This report concerns (check one) : Original Grant Class I Change

Issued Date : Sep. 12, 2013
Project No. : 1308C100
Equipment : Cisco Edge 340
Model Name : CS-E340W
Applicant : HON HAI Precision Ind. Co., Ltd.
Address : 5F-1, 5, Hsin-An Road, Hsinchu
Science-Based Industrial Park, Hsinchu,
Taiwan

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Aug. 12, 2013

Date of Test: Aug. 12, 2013 ~ Sep. 11, 2013

Neutron Engineering Inc.

No.3, Jinshagang 1st Road, ShiXia,
Dalang Town, Dong Guan, China.

TEL: 0769-8318-3000

FAX: 0769-8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (NML) of R.O.C., or National Institute of Standards and Technology (NIST) of U.S.A.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION	14
4.1.2 MEASUREMENT INSTRUMENTS LIST	14
4.1.3 TEST PROCEDURE	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	15
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	23
4.2.1 RADIATED EMISSION LIMITS	23
4.2.2 MEASUREMENT INSTRUMENTS LIST	24
4.2.3 TEST PROCEDURE	24
4.2.4 DEVIATION FROM TEST STANDARD	25
4.2.5 TEST SETUP	25
4.2.6 EUT OPERATING CONDITIONS	26
4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ	27
4.2.8 TEST RESULTS - ABOVE 1000MHZ	64
5 . 26dB SPECTRUM BANDWIDTH	128
5.1 APPLIED PROCEDURES / LIMIT	128
5.1.1 MEASUREMENT INSTRUMENTS LIST	128
5.1.2 TEST PROCEDURE	128
5.1.3 DEVIATION FROM STANDARD	128
5.1.4 TEST SETUP	128
5.1.5 EUT OPERATION CONDITIONS	128
5.1.6 TEST RESULTS	129
6 . MAXIMUM CONDUCTED OUTPUT POWER	141



Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	141
6.1.1 MEASUREMENT INSTRUMENTS LIST	141
6.1.2 TEST PROCEDURE	141
6.1.3 DEVIATION FROM STANDARD	142
6.1.4 TEST SETUP	142
6.1.5 EUT OPERATION CONDITIONS	142
6.1.6 TEST RESULTS	143
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	173
7.1 APPLIED PROCEDURES / LIMIT	173
7.1.1 MEASUREMENT INSTRUMENTS LIST	173
7.1.2 TEST PROCEDURE	173
7.1.3 DEVIATION FROM STANDARD	173
7.1.4 TEST SETUP	173
7.1.5 EUT OPERATION CONDITIONS	173
7.1.6 TEST RESULTS	174
8 . POWER SPECTRAL DENSITY TEST	198
8.1 APPLIED PROCEDURES / LIMIT	198
8.1.1 MEASUREMENT INSTRUMENTS LIST	198
8.1.2 TEST PROCEDURE	198
8.1.3 DEVIATION FROM STANDARD	198
8.1.4 TEST SETUP	198
8.1.5 EUT OPERATION CONDITIONS	198
9 . PEAK EXCURSION MEASUREMENT	229
9.1 APPLIED PROCEDURES / LIMIT	229
9.1.1 MEASUREMENT INSTRUMENTS LIST	229
9.1.2 TEST PROCEDURE	229
9.1.3 DEVIATION FROM STANDARD	229
9.1.4 TEST SETUP	230
9.1.5 EUT OPERATION CONDITIONS	230
9.1.6 TEST RESULTS	231
10 . FREQUENCY STABILITY MEASUREMENT	243
10.1 APPLIED PROCEDURES / LIMIT	243
10.1.1 MEASUREMENT INSTRUMENTS LIST	243
10.1.2 TEST PROCEDURE	243
10.1.3 DEVIATION FROM STANDARD	243
10.1.4 TEST SETUP	244
10.1.5 EUT OPERATION CONDITIONS	244
10.1.6 TEST RESULTS	245
11. EUT TEST PHOTO	251



1. CERTIFICATION

Equipment : Cisco Edge 340
Brand Name : Cisco
Model Name : CS-E340W
Applicant : HON HAI Precision Ind. Co., Ltd.
Manufacturer : Hon Hai Precision Ind Co, Ltd
Address : Hsinchu Science Park Branch Office 5F-1 5, Hsin-an Rd Hsinchu Science
Based Industrial Park Hsinchu, Taiwan
Factory : HONG FU JIN PRECISION INDUSTRY (SHEN ZHEN) CO LTD
Address : Bldg D10, F21, No 2, 2 nd DONGGUAN RD, 10 th YOUSONG INDUSTRIAL
DISTRICT, LONGHUA TOWN, BAOAN, SHENZHEN, GUANGDONG, CHINA.
Date of Test : Aug. 12, 2013 ~ Sep. 11, 2013
Test Item : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.4 : 2009;
FCC KDB 789033 D01 General UNII Test Procedures v01r03 .

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

This test report consists of 253 pages in total.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-4-1308C100) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the 5150MHz~5250MHz Mode part of the product.

Testing Engineer : David Mao
(David Mao)
Technical Manager : Leo Hung
(Leo Hung)
Authorized Signatory : Steven Lu
(Steven Lu)



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Peak Excursion	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792
 Neutron's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Cisco Edge 340	
Brand Name	Cisco	
Model Name	CS-E340W	
Mode Different	N/A	
Product Description	Operation Frequency	Band 1:5150MHz~5250MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	11a:6/ 9/12/18/24/36/48/54Mbps 11n:300Mbps
	Antenna Designation	Please see note 3.(Page 10)
	Antenna Gain(Peak)	
	Output Power (Max.)- Integral Antenna Band 1	802.11a: 15.10dBm 802.11n (20M): 16.10dBm 802.11n (40M): 10.41dBm
	Output Power (Max.)- Dipole Antenna with external cable Band 1	802.11a: 15.13dBm 802.11n (20M): 15.95dBm 802.11n (40M): 10.24dBm
	More details of EUT technical specification, please refer to the User's Manual.	
Power Source	DC Voltage supplied from AC/DC adapter #1 Brand /Model name: LITEON /PA-1600-2A-LF #2 Brand /Model name: DELTA /EADP-60MB B #3 PoE	
Power Rating	#1 I/P 100-240V 50-60Hz 2A O/P 12V 5A #2 I/P 100-240V 50-60Hz 1.5A O/P 12V 5A #3 DC 48V	
Connecting I/O Port(s)	USB port*4 IR Extension port Console port RS232 port Audio out port Audio in port HDMI port VGA port Gigabit Ethernet port Power SD card 802.11a/b/g/n	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2. Channel List:

802.11a / 802.11n 20M		802.11n 40M	
Band 1		Band 1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

3. Antenna Specification:

Group 1

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	FOXCONN	FX01G64-0G-EF	Integral Antenna	N/A	3.0
2	FOXCONN	FX01G64-0G-EF	Integral Antenna	N/A	1.9

Group 2

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
3	FOXCONN	FX01G67-0G-EF	Dipole Antenna	Revise-SMA Connector	3.59
4	FOXCONN	FX01G67-0G-EF	Dipole Antenna	Revise-SMA Connector	3.59

Note:

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}**, that is Directional gain=3.59 for Dipole antenna and Directional gain=3.0 for Integral Antenna.

This external dipole antenna can be connected to the EUT either directly or by a external cable, after assessing it is the worst case when the antenna is connected to the EUT by the external cable.

4.

Operating Mode	2TX
TX Mode	
802.11a	V (ANT 1 & ANT 2 or ANT 3 & ANT 4)
802.11n(20MHz)	V (ANT 1 & ANT 2 or ANT 3 & ANT 4)
802.11n(40MHz)	V (ANT 1 & ANT 2 or ANT 3 & ANT 4)



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48(Band 1)
Mode 2	TX N20 Mode / CH36, CH40, CH48(Band 1)
Mode 3	TX N40 Mode / CH38, CH46 (Band 1)
Mode 4	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 4	TX Mode

Note: For Conducted test, the Dipole antenna with external cable is found to be the worst case and recorded.

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48(Band 1)
Mode 2	TX N20 Mode / CH36, CH40, CH48(Band 1)
Mode 3	TX N40 Mode / CH38, CH46 (Band 1)

Note: For Radiated Below 1G test, the 802.11a mode is found to be the worst case and recorded.



3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product


Integral Antenna			
Test software version	RT5x9x_V1.0.8.0_AP		
Frequency	5180 MHz	5200MHz	5240 MHz
A Mode	1A	1B	1D
Frequency	5180 MHz	5200MHz	5240 MHz
N20 Mode	1C	1D	1F
Frequency	5190 MHz	5230MHz	
N40 Mode	13	14	

Dipole Antenna with external cable			
Test software version	RT5x9x_V1.0.8.0_AP		
Frequency	5180 MHz	5200MHz	5240 MHz
A Mode	1A	1C	1C
Frequency	5180 MHz	5200MHz	5240 MHz
N20 Mode	1D	1E	1F
Frequency	5190 MHz	5230MHz	
N40 Mode	16	15	




3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted:

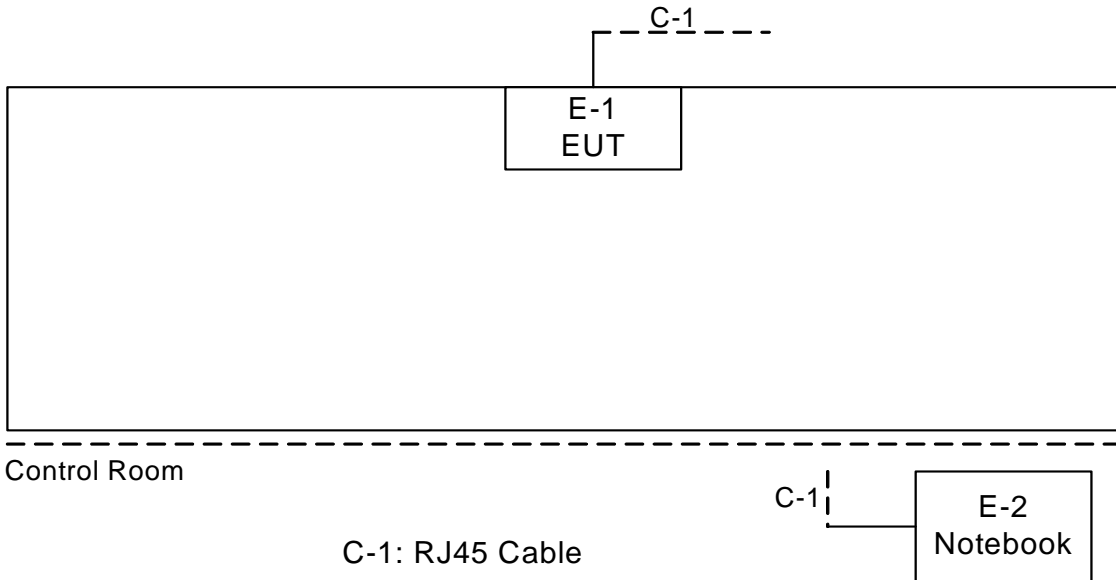

Radiated Mode:

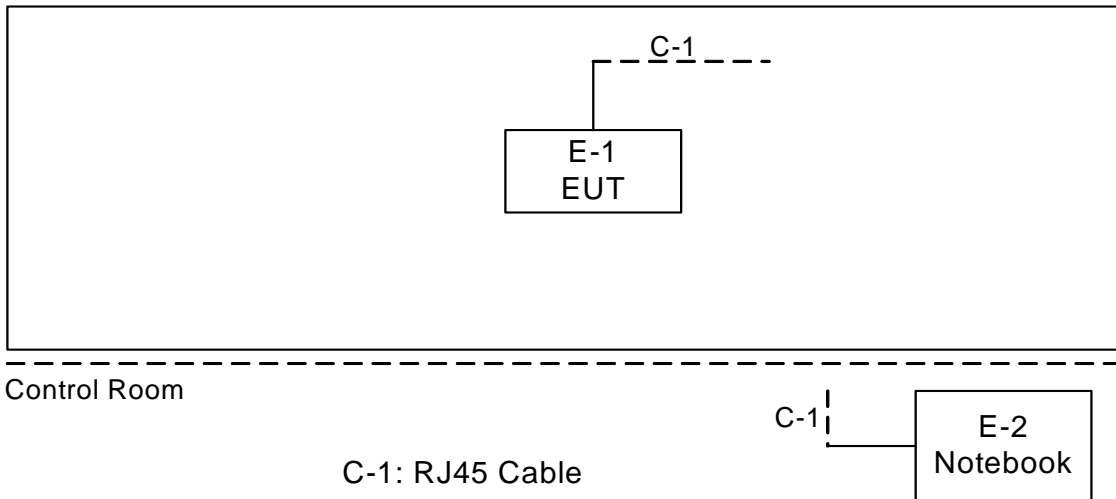

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	10m	Between the EUT and a Notebook



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Cisco Edge 340	Cisco	CS-E340W	MCLCS-E340W	N/A	EUT
E-2	Notebook	DELL	Inspiron 14-N4030	DOC	N/A	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in m in 『Length』 column.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Apr. 25, 2014
2	LISN	R&S	ENV216	100087	Nov.16, 2013
3	Test Cable	N/A	C_17	N/A	Mar.15, 2014
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	Apr. 25, 2014
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Apr. 25, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of Equipment List is One Year.
 The test was performed in DG-C02.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

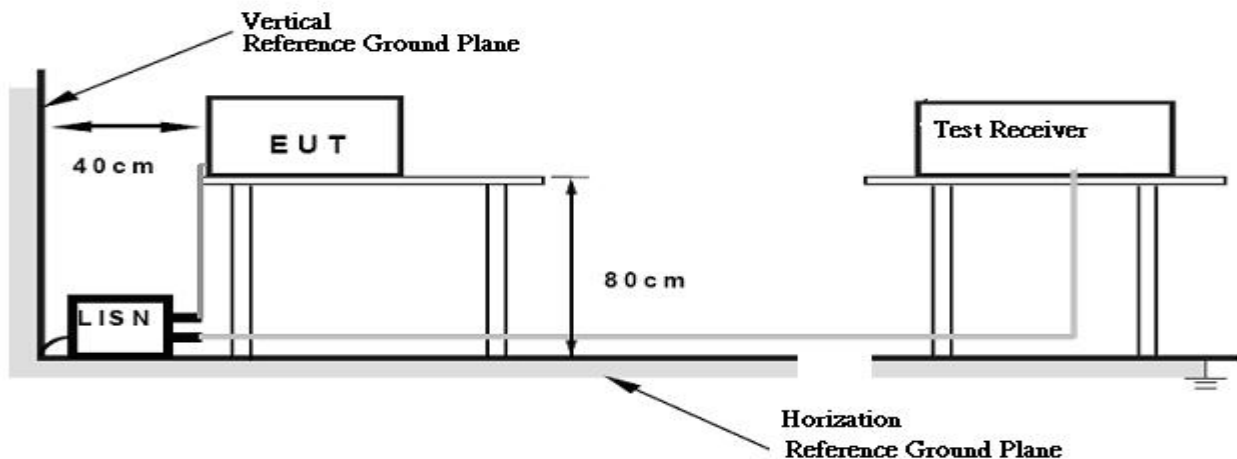

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.




4.1.7 TEST RESULTS

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.




EUT:	Cisco Edge 340	Model Name:	CS-E340W
Temperature:	24 °C	Relative Humidity:	55 %
Test Power:	AC 120V/60Hz	Phase:	Line
Test Mode :	TX Mode/Adapter:PA-1600-2A-LF		

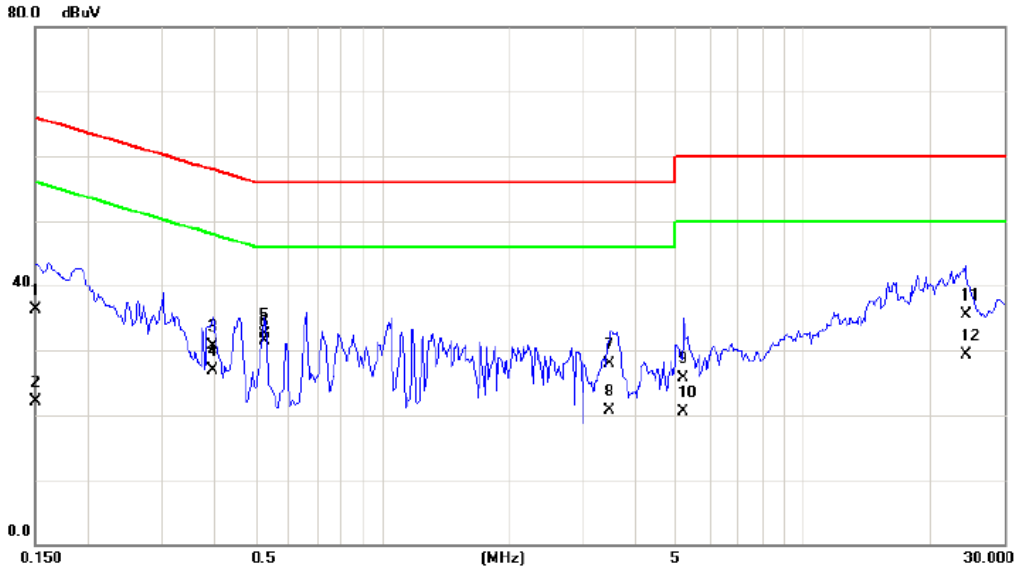

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	26.75	9.61	36.36	66.00	-29.64	QP	
2		0.1500	12.45	9.61	22.06	56.00	-33.94	AVG	
3		0.3961	20.95	9.66	30.61	57.93	-27.32	QP	
4		0.3961	17.15	9.66	26.81	47.93	-21.12	AVG	
5		0.5250	22.75	9.68	32.43	56.00	-23.57	QP	
6	*	0.5250	21.85	9.68	31.53	46.00	-14.47	AVG	
7		3.4883	18.15	9.83	27.98	56.00	-28.02	QP	
8		3.4883	10.95	9.83	20.78	46.00	-25.22	AVG	
9		5.2031	15.85	9.91	25.76	60.00	-34.24	QP	
10		5.2031	10.55	9.91	20.46	50.00	-29.54	AVG	
11		24.2773	24.55	10.86	35.41	60.00	-24.59	QP	
12		24.2773	18.35	10.86	29.21	50.00	-20.79	AVG	




EUT:	Cisco Edge 340	Model Name:	CS-E340W
Temperature:	24 °C	Relative Humidity:	55 %
Test Power:	AC 120V/60Hz	Phase:	Neutral
Test Mode :	TX Mode/Adapter:PA-1600-2A-LF		

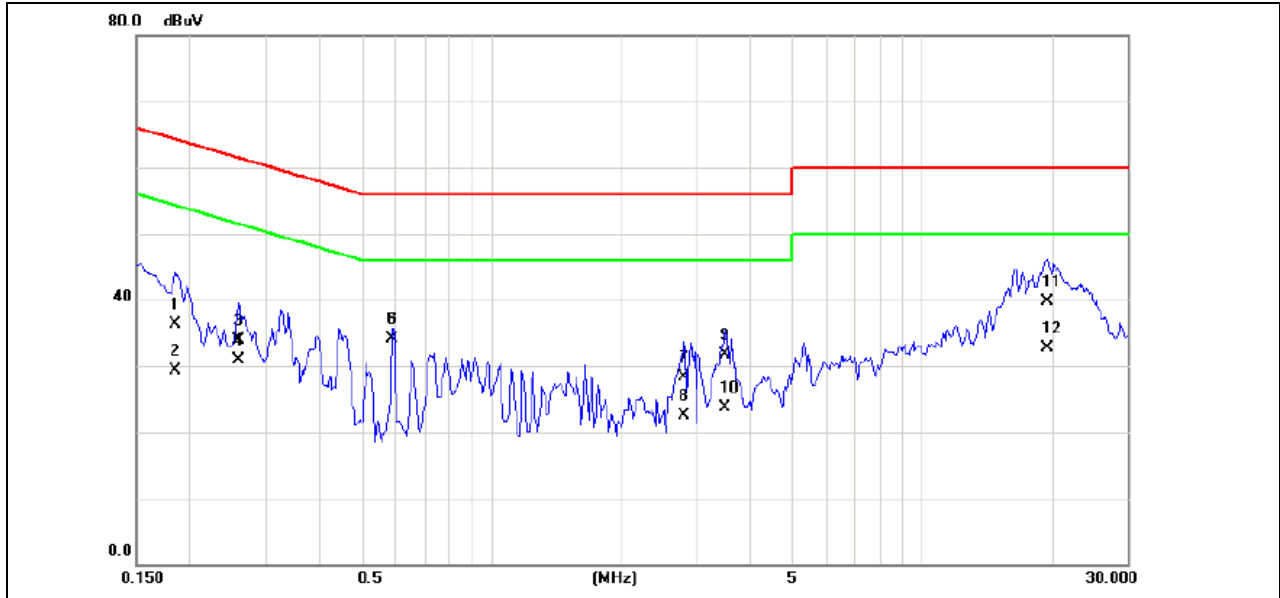

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1852	26.67	9.62	36.29	64.25	-27.96	QP	
2	0.1852	19.67	9.62	29.29	54.25	-24.96	AVG	
3	0.2594	24.27	9.62	33.89	61.45	-27.56	QP	
4	0.2594	21.36	9.62	30.98	51.45	-20.47	AVG	
5	0.5914	24.47	9.69	34.16	56.00	-21.84	QP	
6 *	0.5914	24.36	9.69	34.05	46.00	-11.95	AVG	
7	2.8220	18.56	9.80	28.36	56.00	-27.64	QP	
8	2.8220	12.66	9.80	22.46	46.00	-23.54	AVG	
9	3.4922	21.86	9.83	31.69	56.00	-24.31	QP	
10	3.4922	13.86	9.83	23.69	46.00	-22.31	AVG	
11	19.5508	29.07	10.58	39.65	60.00	-20.35	QP	
12	19.5508	22.17	10.58	32.75	50.00	-17.25	AVG	




EUT:	Cisco Edge 340	Model Name:	CS-E340W
Temperature:	24 °C	Relative Humidity:	55 %
Test Power:	AC 120V/60Hz	Phase:	Line
Test Mode :	TX Mode /Adapter:EADP-60MB B		

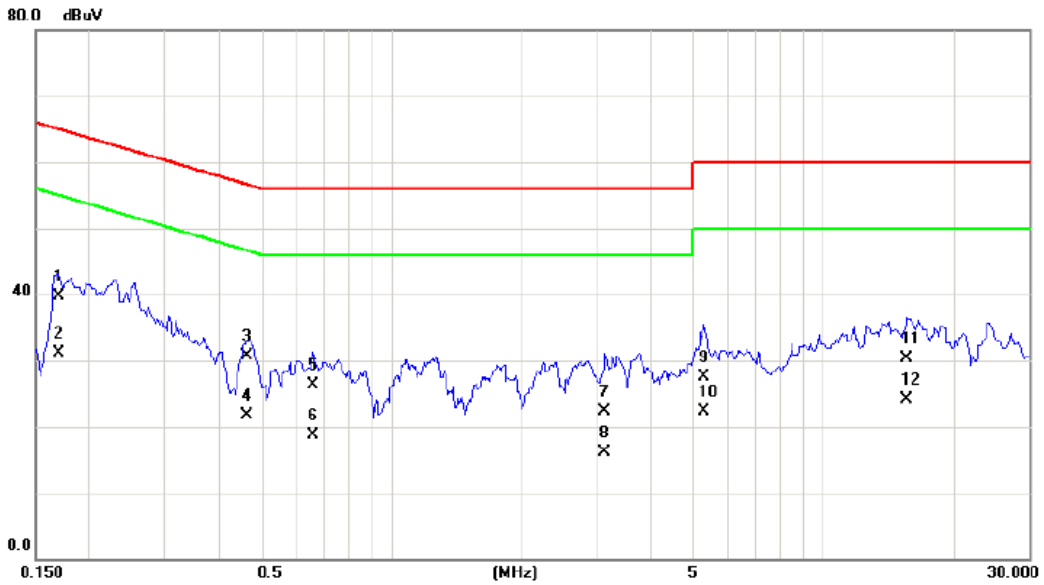

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1695	30.02	9.61	39.63	64.98	-25.35	QP	
2	*	0.1695	21.42	9.61	31.03	54.98	-23.95	AVG	
3		0.4625	21.12	9.67	30.79	56.65	-25.86	QP	
4		0.4625	12.02	9.67	21.69	46.65	-24.96	AVG	
5		0.6578	16.52	9.69	26.21	56.00	-29.79	QP	
6		0.6578	9.02	9.69	18.71	46.00	-27.29	AVG	
7		3.1328	12.52	9.82	22.34	56.00	-33.66	QP	
8		3.1328	6.22	9.82	16.04	46.00	-29.96	AVG	
9		5.3047	17.52	9.91	27.43	60.00	-32.57	QP	
10		5.3047	12.42	9.91	22.33	50.00	-27.67	AVG	
11		15.6953	20.02	10.38	30.40	60.00	-29.60	QP	
12		15.6953	13.82	10.38	24.20	50.00	-25.80	AVG	




EUT:	Cisco Edge 340	Model Name:	CS-E340W
Temperature:	24 °C	Relative Humidity:	55 %
Test Power:	AC 120V/60Hz	Phase:	Neutral
Test Mode :	TX Mode /Adapter:EADP-60MB B		

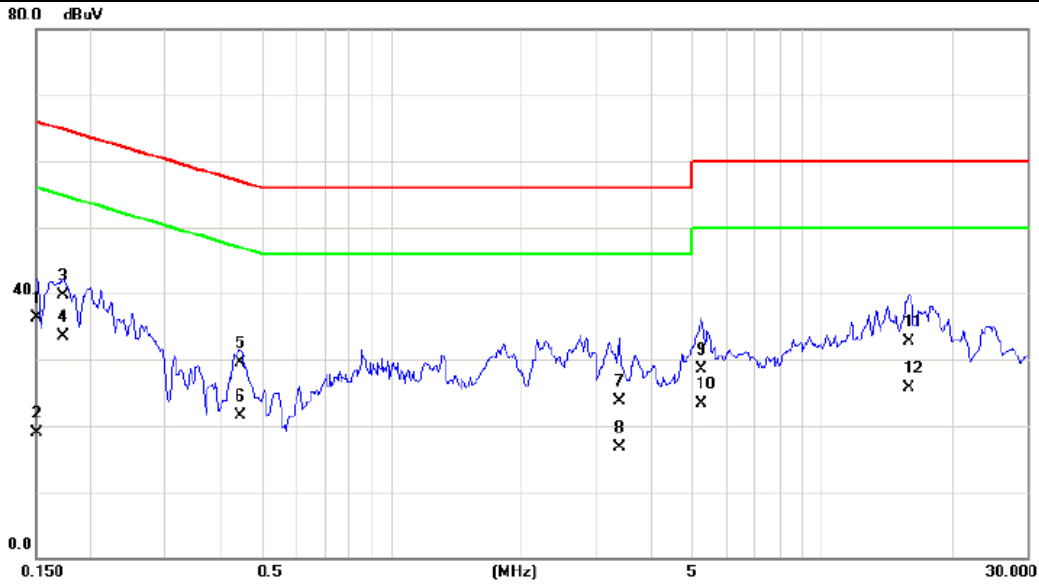

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1508	26.72	9.60	36.32	65.96	-29.64	QP	
2		0.1508	9.32	9.60	18.92	55.96	-37.04	AVG	
3		0.1734	30.02	9.60	39.62	64.80	-25.18	QP	
4	*	0.1734	23.82	9.60	33.42	54.80	-21.38	AVG	
5		0.4470	19.92	9.66	29.58	56.93	-27.35	QP	
6		0.4470	11.92	9.66	21.58	46.93	-25.35	AVG	
7		3.3906	13.92	9.87	23.79	56.00	-32.21	QP	
8		3.3906	6.92	9.87	16.79	46.00	-29.21	AVG	
9		5.2617	18.62	9.98	28.60	60.00	-31.40	QP	
10		5.2617	13.42	9.98	23.40	50.00	-26.60	AVG	
11		15.9531	21.92	10.73	32.65	60.00	-27.35	QP	
12		15.9531	15.02	10.73	25.75	50.00	-24.25	AVG	




EUT:	Cisco Edge 340	Model Name:	CS-E340W
Temperature:	24 °C	Relative Humidity:	55 %
Test Power:	AC 120V/60Hz	Phase:	Line
Test Mode :	TX Mode /POE		

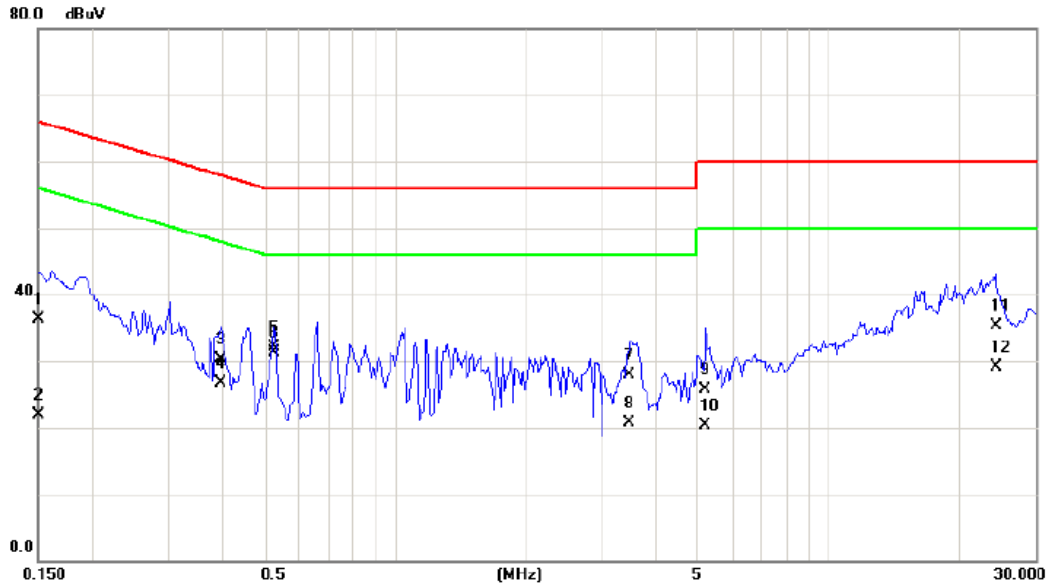

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1500	26.66	9.61	36.27	66.00	-29.73	QP	
2	0.1500	12.33	9.61	21.94	56.00	-34.06	AVG	
3	0.3961	20.65	9.66	30.31	57.93	-27.62	QP	
4	0.3961	17.01	9.66	26.67	47.93	-21.26	AVG	
5	0.5250	22.45	9.68	32.13	56.00	-23.87	QP	
6 *	0.5250	21.65	9.68	31.33	46.00	-14.67	AVG	
7	3.4883	18.03	9.83	27.86	56.00	-28.14	QP	
8	3.4883	10.87	9.83	20.70	46.00	-25.30	AVG	
9	5.2031	15.76	9.91	25.67	60.00	-34.33	QP	
10	5.2031	10.39	9.91	20.30	50.00	-29.70	AVG	
11	24.2773	24.47	10.86	35.33	60.00	-24.67	QP	
12	24.2773	18.24	10.86	29.10	50.00	-20.90	AVG	



EUT:	Cisco Edge 340	Model Name:	CS-E340W
Temperature:	24 °C	Relative Humidity:	55 %
Test Power:	AC 120V/60Hz	Phase:	Neutral
Test Mode :	TX Mode /POE		

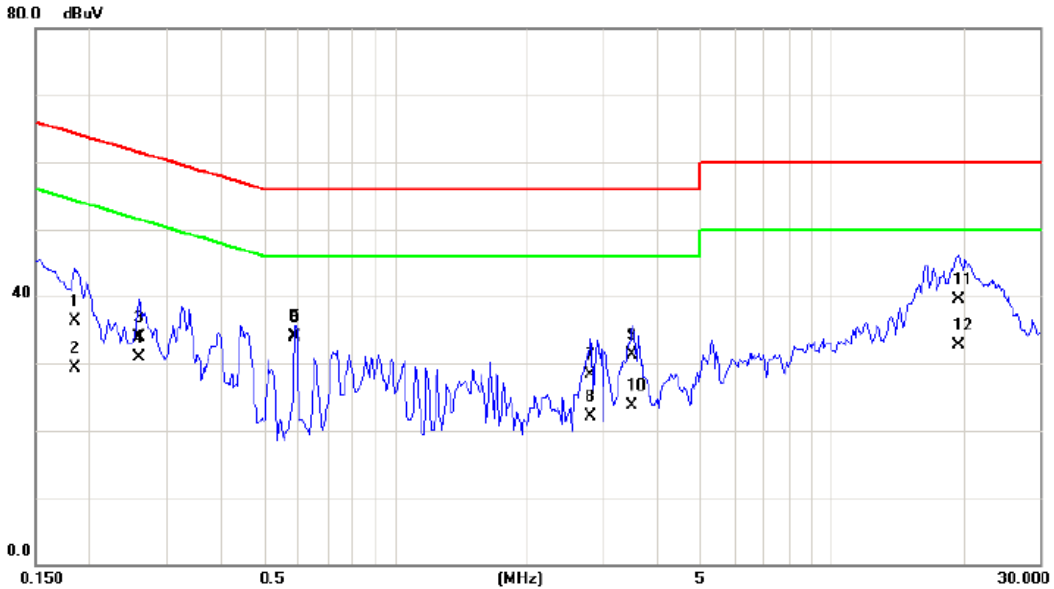

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1852	26.65	9.62	36.27	64.25	-27.98	QP	
2		0.1852	19.65	9.62	29.27	54.25	-24.98	AVG	
3		0.2594	24.22	9.62	33.84	61.45	-27.61	QP	
4		0.2594	21.33	9.62	30.95	51.45	-20.50	AVG	
5		0.5914	24.44	9.69	34.13	56.00	-21.87	QP	
6	*	0.5914	24.25	9.69	33.94	46.00	-12.06	AVG	
7		2.8220	18.50	9.80	28.30	56.00	-27.70	QP	
8		2.8220	12.32	9.80	22.12	46.00	-23.88	AVG	
9		3.4922	21.45	9.83	31.28	56.00	-24.72	QP	
10		3.4922	13.88	9.83	23.71	46.00	-22.29	AVG	
11		19.5508	29.00	10.58	39.58	60.00	-20.42	QP	
12		19.5508	22.11	10.58	32.69	50.00	-17.31	AVG	



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Notes

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBµV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27	68.3
	-17	78.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Apr. 25, 2014
2	Amplifier	HP	8447D	2944A09673	Apr. 25, 2014
3	Test Receiver	R&S	ESCI	100382	Apr. 25, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014
5	Antenna	ETS	3115	00075789	Apr. 25, 2014
6	Amplifier	Agilent	8449B	3008A02274	Apr. 25, 2014
7	Spectrum	Agilent	E4408B	US39240143	Nov. 16, 2013
8	Test Cable	HUBER+SUHNER	C-45	N/A	Apr. 30, 2014
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Apr. 25, 2014
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Apr. 25, 2014
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct. 23, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

The test was performed in DG-CB03.

4.2.3 TEST PROCEDURE


- a. The measuring distance of at 1.5m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP


Radiated Emission Test Set-Up Frequency 30 - 1000MHz

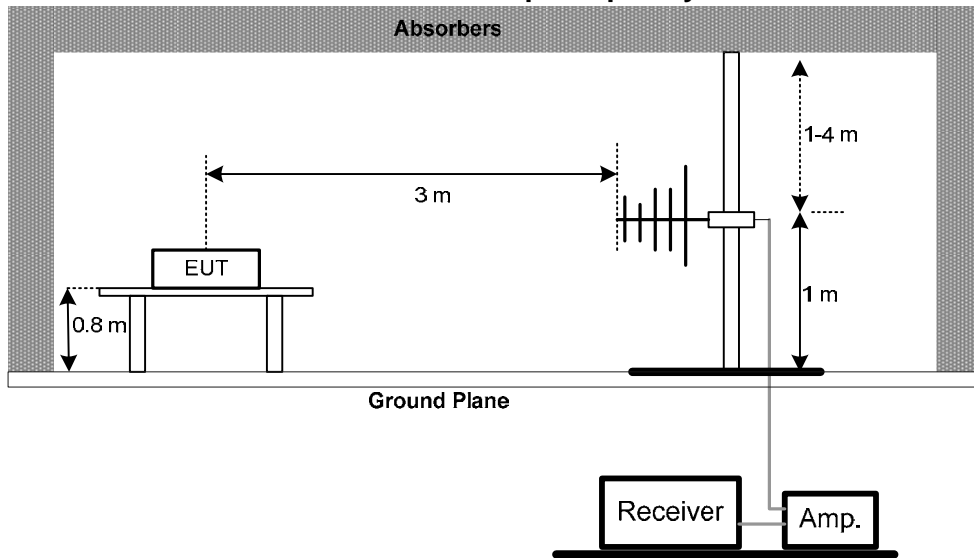

Radiated Emission Test Set-Up Frequency Above 1 GHz

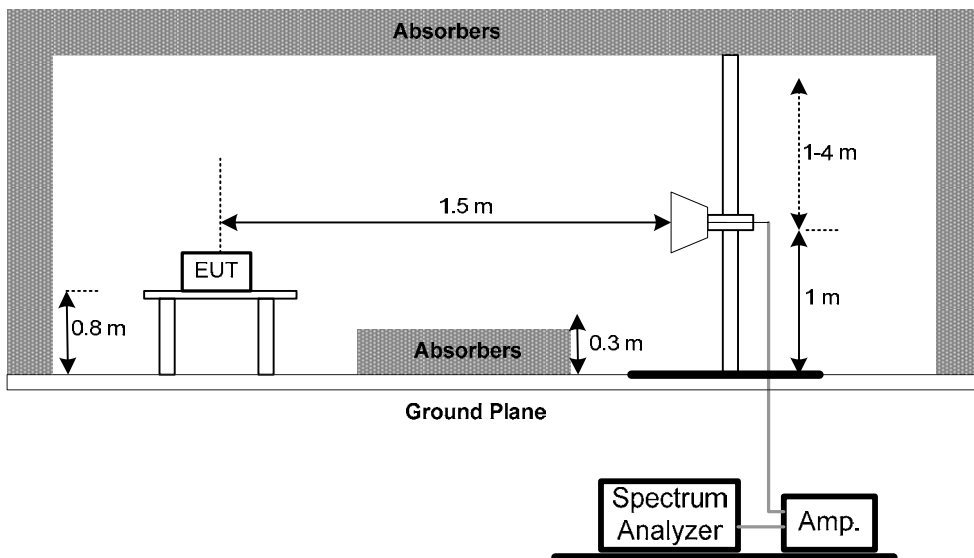

Radiated emissions below 30MHz

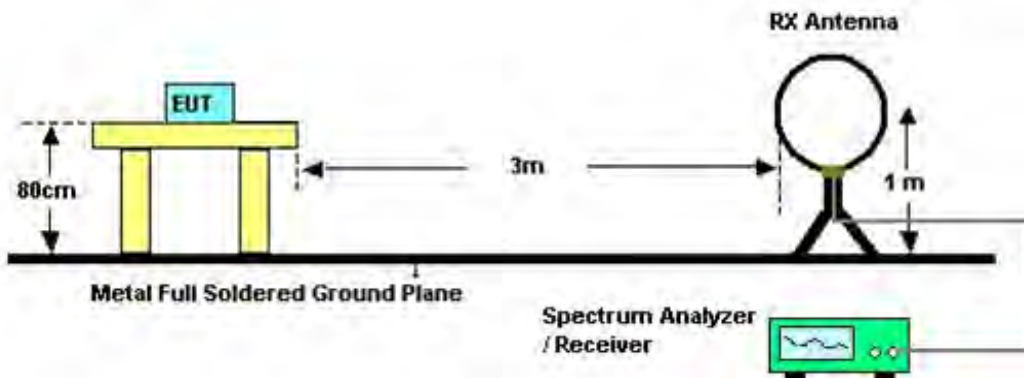

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz/Adapter: PA-1600-2A-LF/Integral Antenna		
Phase:	Vertical		

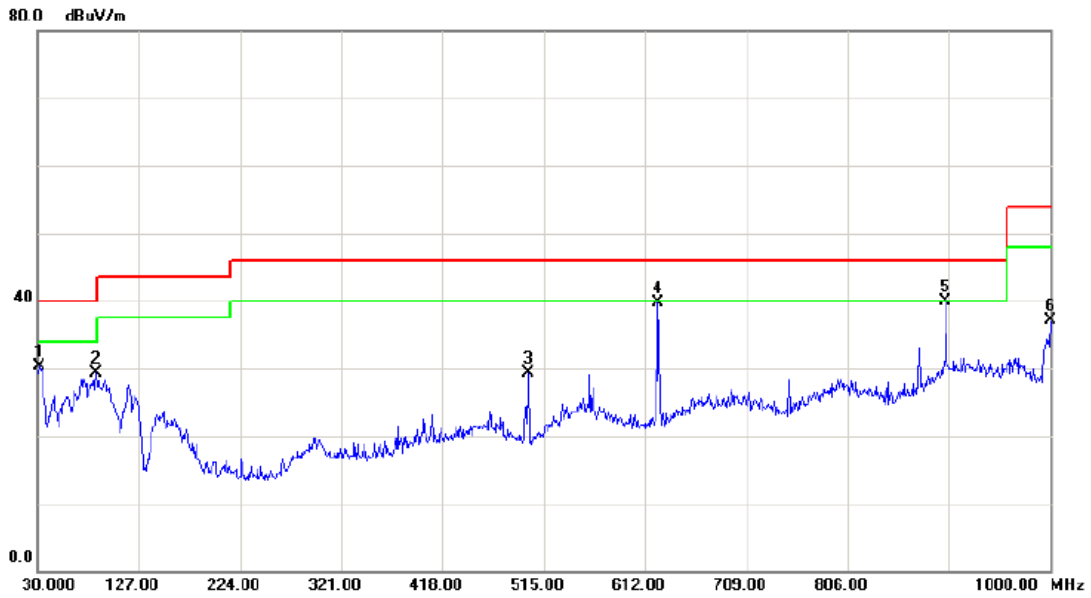

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.19	-14.86	30.33	40.00	-9.67	peak	
2		86.2600	46.04	-16.78	29.26	40.00	-10.74	peak	
3		500.4500	39.84	-10.50	29.34	46.00	-16.66	peak	
4		624.6100	46.70	-7.06	39.64	46.00	-6.36	peak	
5	*	900.0900	39.19	0.63	39.82	46.00	-6.18	peak	
6		1000.000	37.63	-0.54	37.09	54.00	-16.91	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz/Adapter: PA-1600-2A-LF/Integral Antenna		
Phase:	Horizontal		

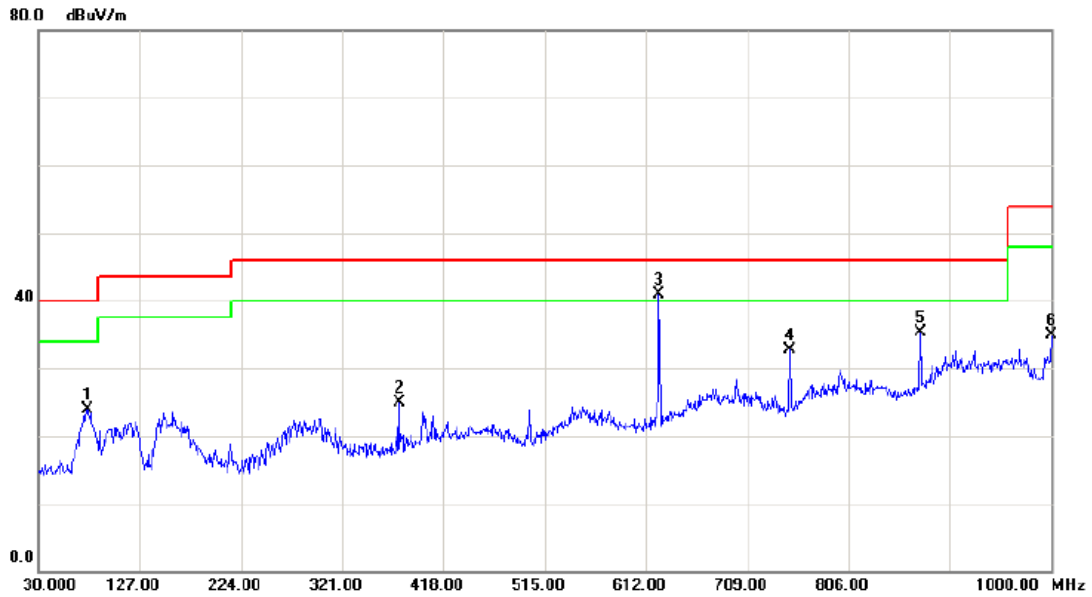

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		76.5600	40.01	-16.06	23.95	40.00	-16.05	peak	
2		375.3200	35.39	-10.56	24.83	46.00	-21.17	peak	
3	*	624.6100	47.87	-7.06	40.81	46.00	-5.19	peak	
4		749.7400	38.02	-5.30	32.72	46.00	-13.28	peak	
5		874.8700	37.01	-1.78	35.23	46.00	-10.77	peak	
6		1000.000	35.50	-0.54	34.96	54.00	-19.04	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz/Adapter: PA-1600-2A-LF/Integral Antenna		
Phase:	Vertical		

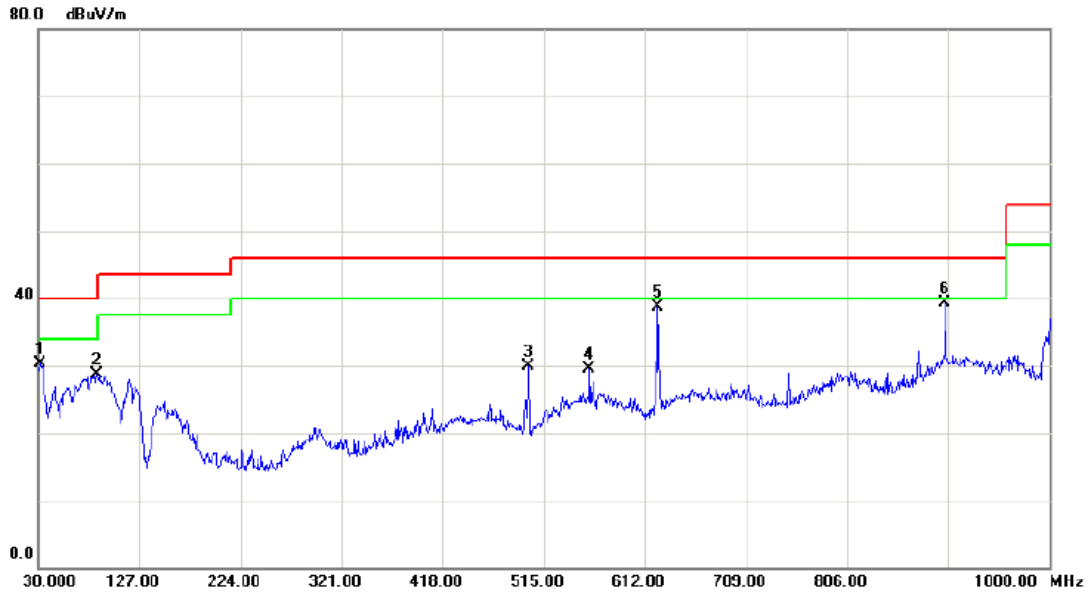

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.19	-14.86	30.33	40.00	-9.67	peak	
2		86.2600	45.54	-16.78	28.76	40.00	-11.24	peak	
3		500.4500	40.34	-10.50	29.84	46.00	-16.16	peak	
4		558.6500	35.79	-6.25	29.54	46.00	-16.46	peak	
5		624.6100	45.70	-7.06	38.64	46.00	-7.36	peak	
6	*	900.0900	38.69	0.63	39.32	46.00	-6.68	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz/Adapter: PA-1600-2A-LF/Integral Antenna		
Phase:	Horizontal		

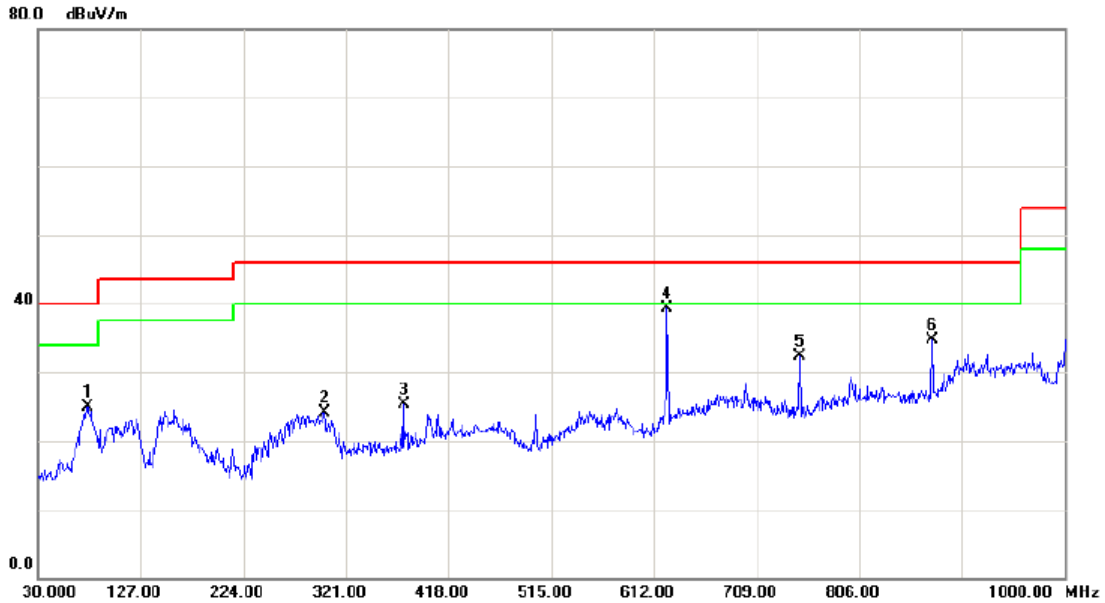

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		76.5600	41.01	-16.06	24.95	40.00	-15.05	peak	
2		300.6300	35.03	-10.95	24.08	46.00	-21.92	peak	
3		375.3200	35.89	-10.56	25.33	46.00	-20.67	peak	
4	*	624.6100	46.37	-7.06	39.31	46.00	-6.69	peak	
5		749.7400	37.52	-5.30	32.22	46.00	-13.78	peak	
6		874.8700	36.51	-1.78	34.73	46.00	-11.27	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz/Adapter: PA-1600-2A-LF/Integral Antenna		
Phase:	Vertical		

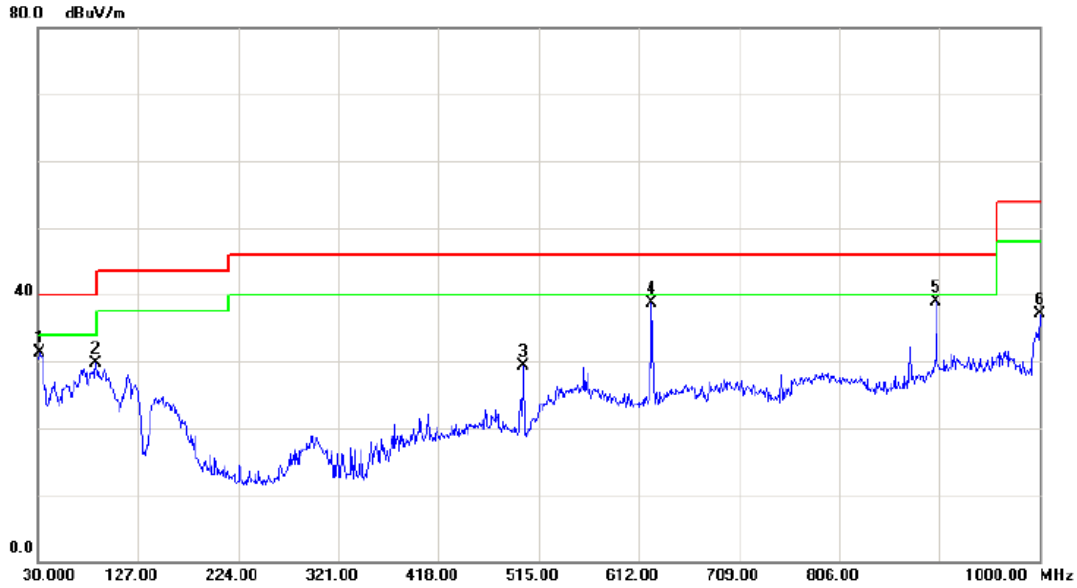

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	31.9400	46.19	-14.86	31.33	40.00	-8.67	peak	
2	86.2600	46.54	-16.78	29.76	40.00	-10.24	peak	
3	500.4500	39.84	-10.50	29.34	46.00	-16.66	peak	
4	624.6100	45.70	-7.06	38.64	46.00	-7.36	peak	
5 *	900.0900	38.19	0.63	38.82	46.00	-7.18	peak	
6	1000.000	37.63	-0.54	37.09	54.00	-16.91	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz/Adapter: PA-1600-2A-LF/Integral Antenna		
Phase:	Horizontal		

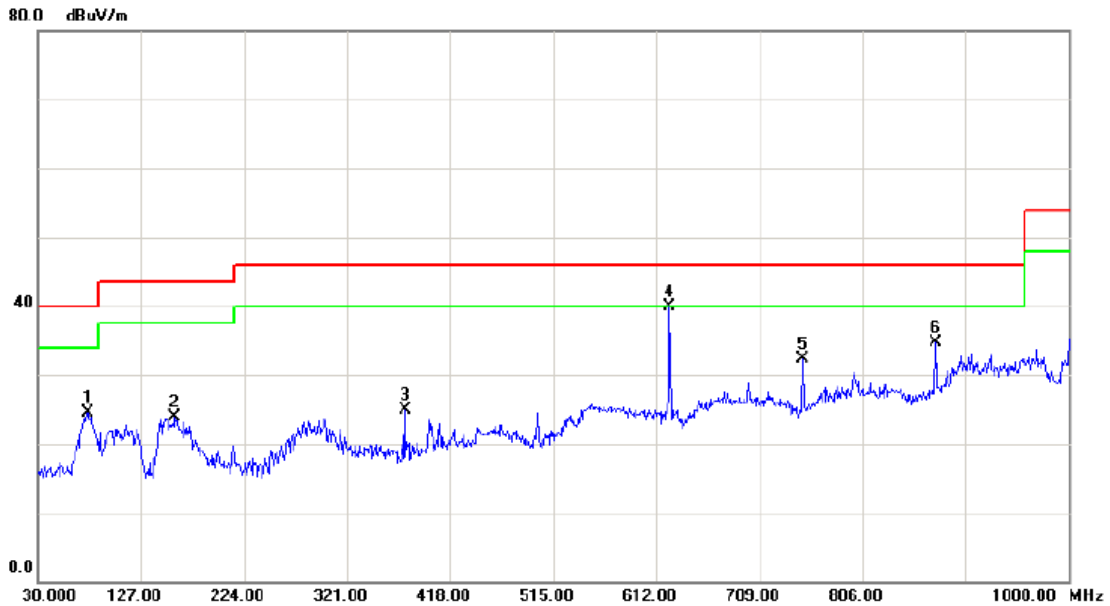

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		76.5600	40.51	-16.06	24.45	40.00	-15.55	peak	
2		159.0100	36.82	-12.83	23.99	43.50	-19.51	peak	
3		375.3200	35.39	-10.56	24.83	46.00	-21.17	peak	
4	*	624.6100	46.87	-7.06	39.81	46.00	-6.19	peak	
5		749.7400	37.52	-5.30	32.22	46.00	-13.78	peak	
6		874.8700	36.51	-1.78	34.73	46.00	-11.27	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz/Adapter:EADP-60MB B/Integral Antenna		
Phase:	Vertical		

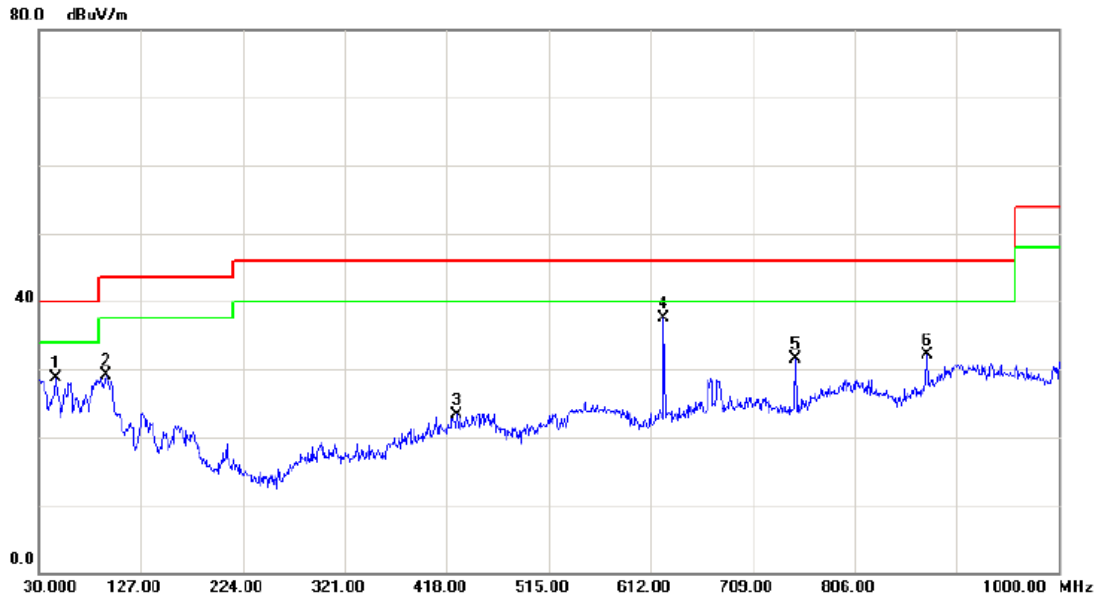

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		45.5200	42.57	-13.95	28.62	40.00	-11.38	peak	
2		94.0200	45.90	-16.85	29.05	43.50	-14.45	peak	
3		427.7000	32.48	-9.19	23.29	46.00	-22.71	peak	
4	*	624.6100	44.55	-7.06	37.49	46.00	-8.51	peak	
5		749.7400	36.78	-5.30	31.48	46.00	-14.52	peak	
6		874.8700	33.87	-1.78	32.09	46.00	-13.91	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz/Adapter: EADP-60MB B/Integral Antenna		
Phase:	Horizontal		

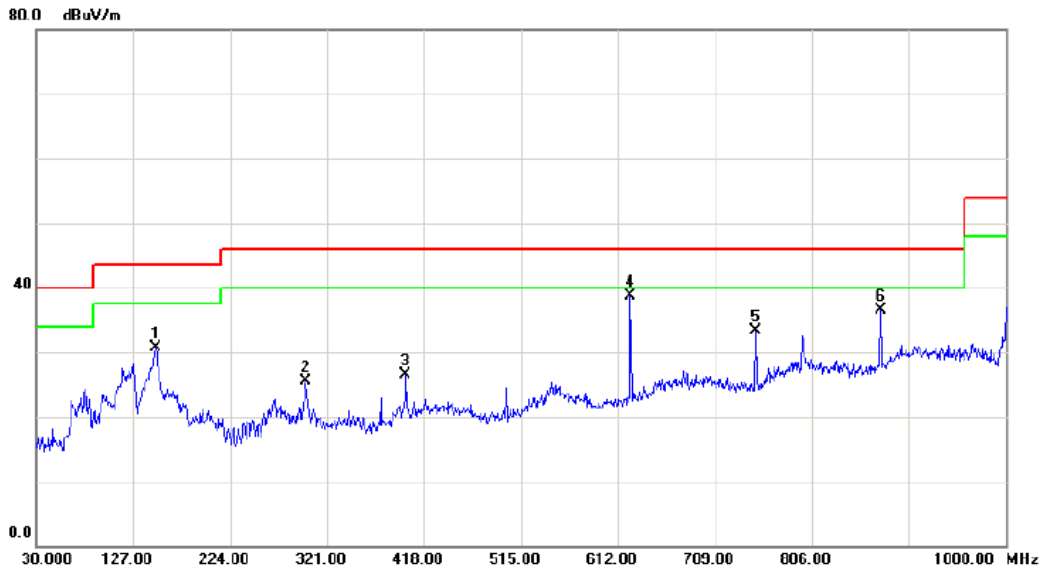

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	44.37	-13.61	30.76	43.50	-12.74	peak	
2		299.6600	36.42	-10.97	25.45	46.00	-20.55	peak	
3		399.5700	36.28	-9.79	26.49	46.00	-19.51	peak	
4	*	624.6100	45.84	-7.06	38.78	46.00	-7.22	peak	
5		749.7400	38.52	-5.30	33.22	46.00	-12.78	peak	
6		874.8700	38.20	-1.78	36.42	46.00	-9.58	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz/Adapter: EADP-60MB B/Integral Antenna		
Phase:	Vertical		

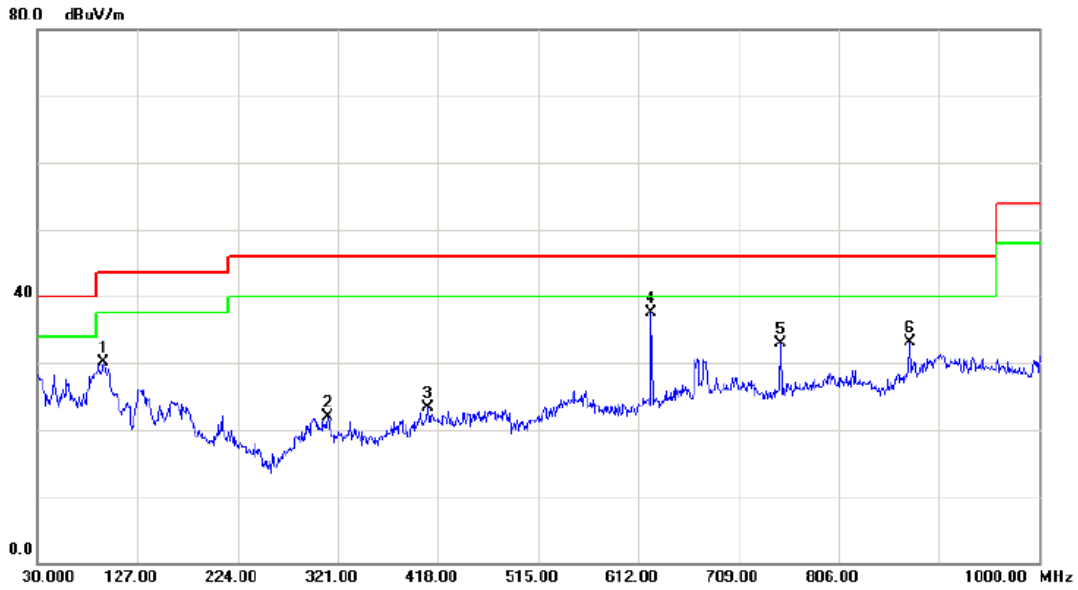

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	94.0200	46.90	-16.85	30.05	43.50	-13.45	peak	
2	311.3000	32.94	-11.05	21.89	46.00	-24.11	peak	
3	408.3000	32.94	-9.60	23.34	46.00	-22.66	peak	
4 *	624.6100	44.55	-7.06	37.49	46.00	-8.51	peak	
5	749.7400	38.28	-5.30	32.98	46.00	-13.02	peak	
6	874.8700	34.87	-1.78	33.09	46.00	-12.91	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz/Adapter: EADP-60MB B/Integral Antenna		
Phase:	Horizontal		

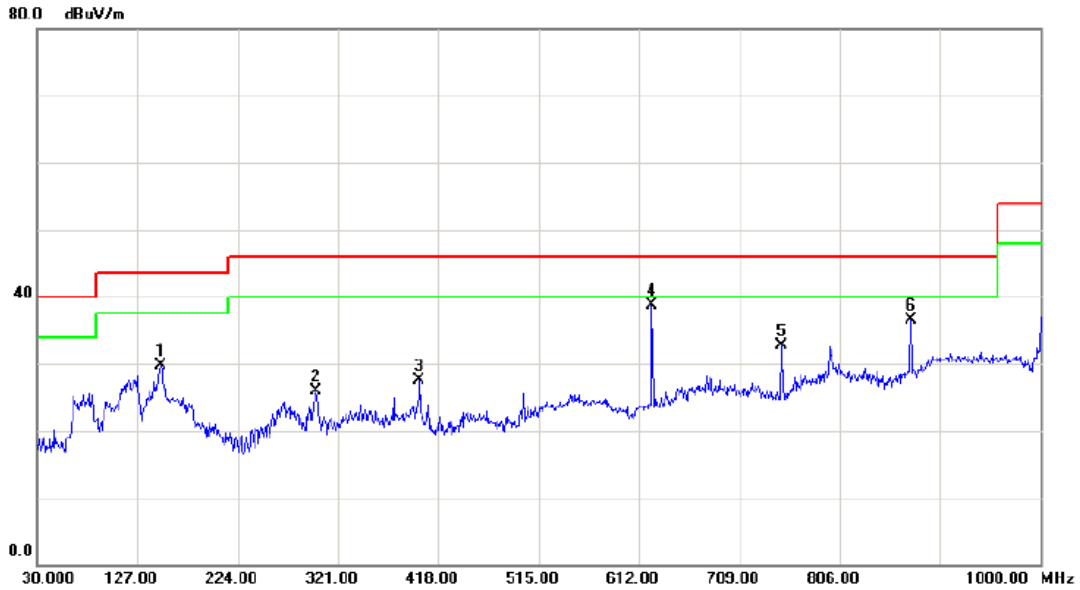

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	43.37	-13.61	29.76	43.50	-13.74	peak	
2		299.6600	36.92	-10.97	25.95	46.00	-20.05	peak	
3		399.5700	37.28	-9.79	27.49	46.00	-18.51	peak	
4	*	624.6100	45.84	-7.06	38.78	46.00	-7.22	peak	
5		749.7400	38.02	-5.30	32.72	46.00	-13.28	peak	
6		874.8700	38.20	-1.78	36.42	46.00	-9.58	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz/Adapter: EADP-60MB B/Integral Antenna		
Phase:	Vertical		

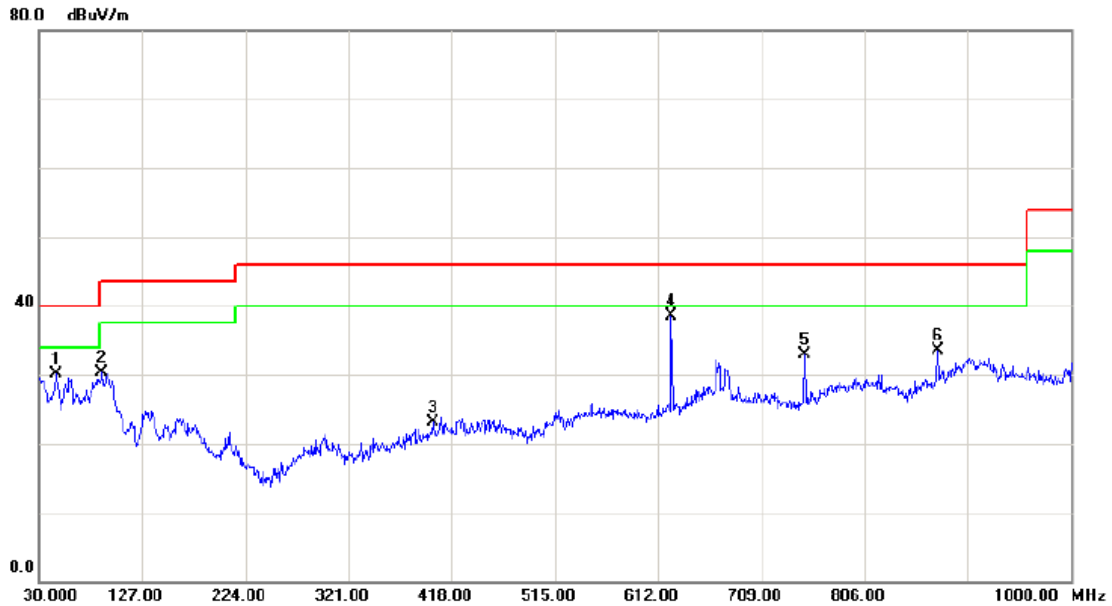

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		45.5200	44.07	-13.95	30.12	40.00	-9.88	peak	
2		89.1700	47.07	-16.80	30.27	43.50	-13.23	peak	
3		400.5400	32.82	-9.77	23.05	46.00	-22.95	peak	
4	*	624.6100	45.55	-7.06	38.49	46.00	-7.51	peak	
5		749.7400	38.28	-5.30	32.98	46.00	-13.02	peak	
6		874.8700	35.37	-1.78	33.59	46.00	-12.41	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz/Adapter: EADP-60MB B/Integral Antenna		
Phase:	Horizontal		

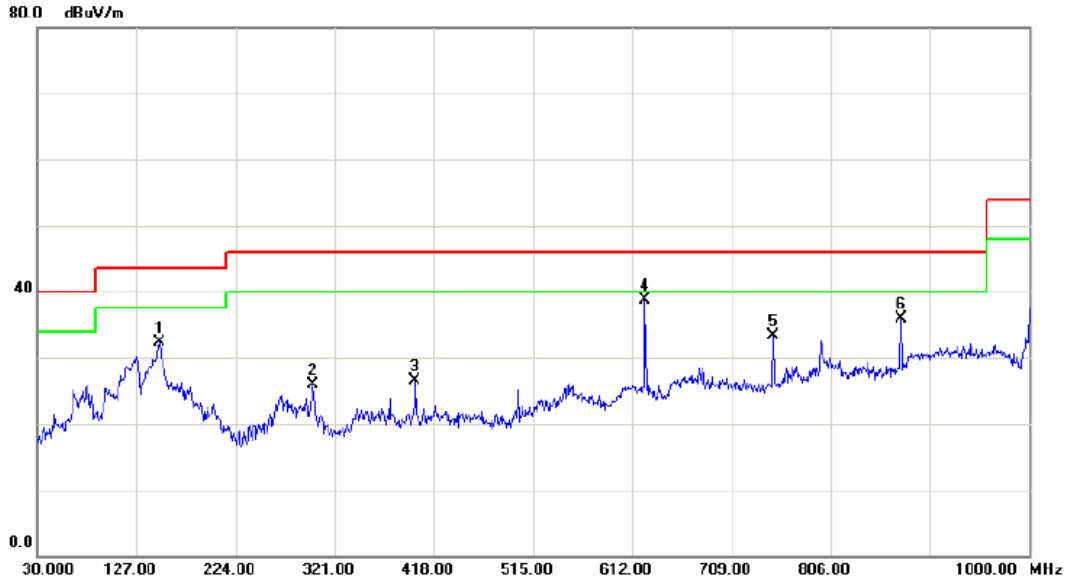

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	149.3100	45.87	-13.61	32.26	43.50	-11.24	peak	
2	299.6600	36.92	-10.97	25.95	46.00	-20.05	peak	
3	399.5700	36.28	-9.79	26.49	46.00	-19.51	peak	
4 *	624.6100	45.84	-7.06	38.78	46.00	-7.22	peak	
5	749.7400	38.52	-5.30	33.22	46.00	-12.78	peak	
6	874.8700	37.70	-1.78	35.92	46.00	-10.08	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz/Adapter: PA-1600-2A-LF/Dipole Antenna with external cable		
Phase:	Vertical		

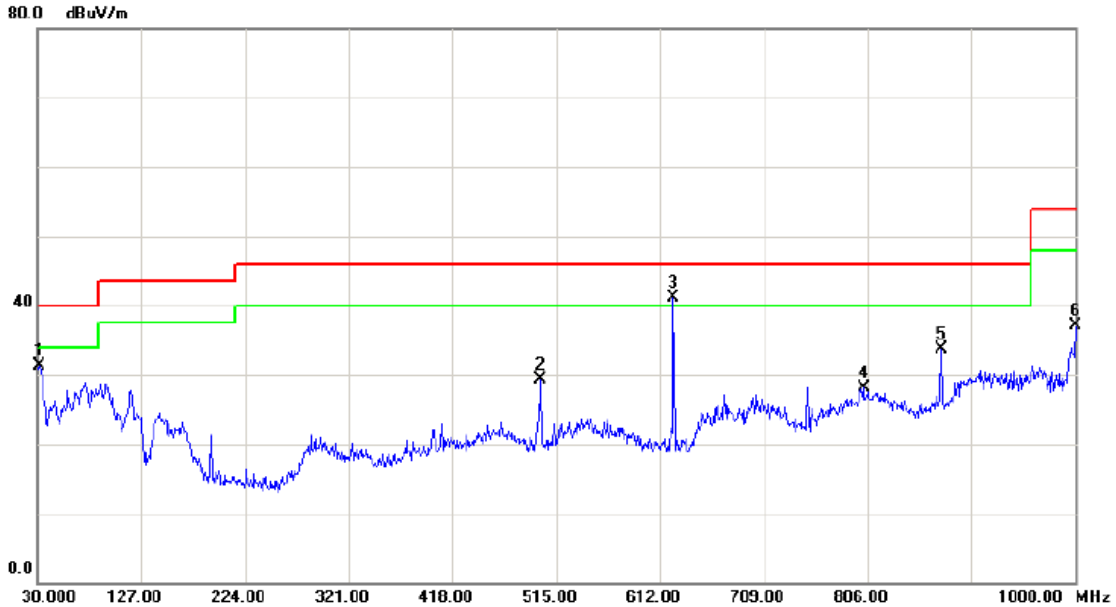

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	31.9400	46.18	-14.86	31.32	40.00	-8.68	peak	
2	500.4500	39.75	-10.50	29.25	46.00	-16.75	peak	
3 *	624.6100	48.10	-7.06	41.04	46.00	-4.96	peak	
4	802.1200	29.85	-1.72	28.13	46.00	-17.87	peak	
5	874.8700	35.41	-1.78	33.63	46.00	-12.37	peak	
6	1000.000	37.73	-0.54	37.19	54.00	-16.81	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz/Adapter: PA-1600-2A-LF/Dipole Antenna with external cable		
Phase:	Horizontal		

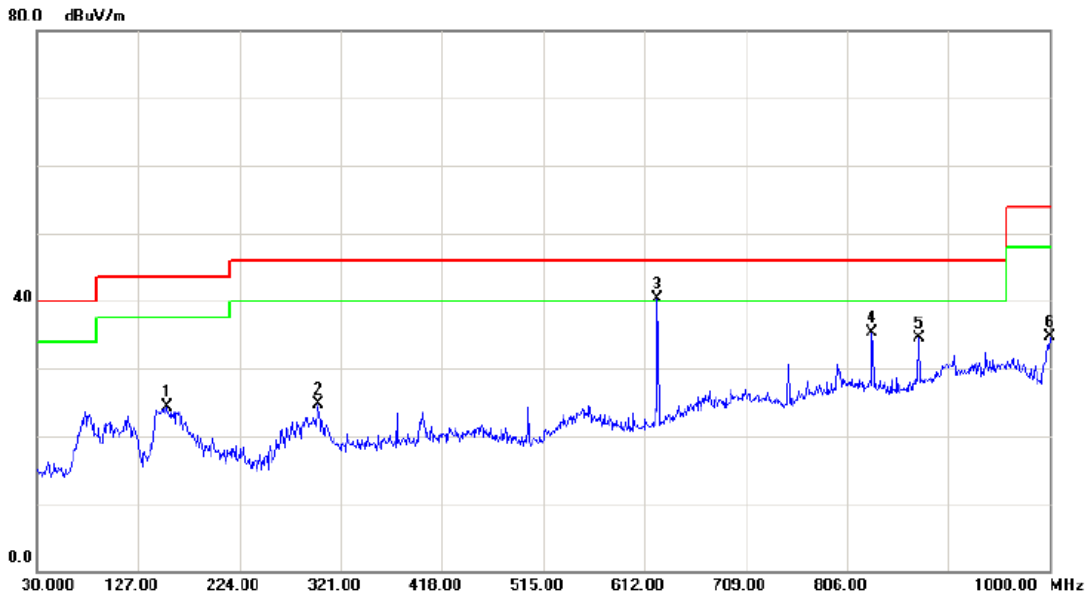

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		155.1300	37.43	-13.13	24.30	43.50	-19.20	peak	
2		299.6600	35.68	-10.97	24.71	46.00	-21.29	peak	
3	*	624.6100	47.37	-7.06	40.31	46.00	-5.69	peak	
4		830.2500	38.43	-3.15	35.28	46.00	-10.72	peak	
5		874.8700	36.24	-1.78	34.46	46.00	-11.54	peak	
6		1000.000	35.15	-0.54	34.61	54.00	-19.39	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz/Adapter: PA-1600-2A-LF/Dipole Antenna with external cable		
Phase:	Vertical		

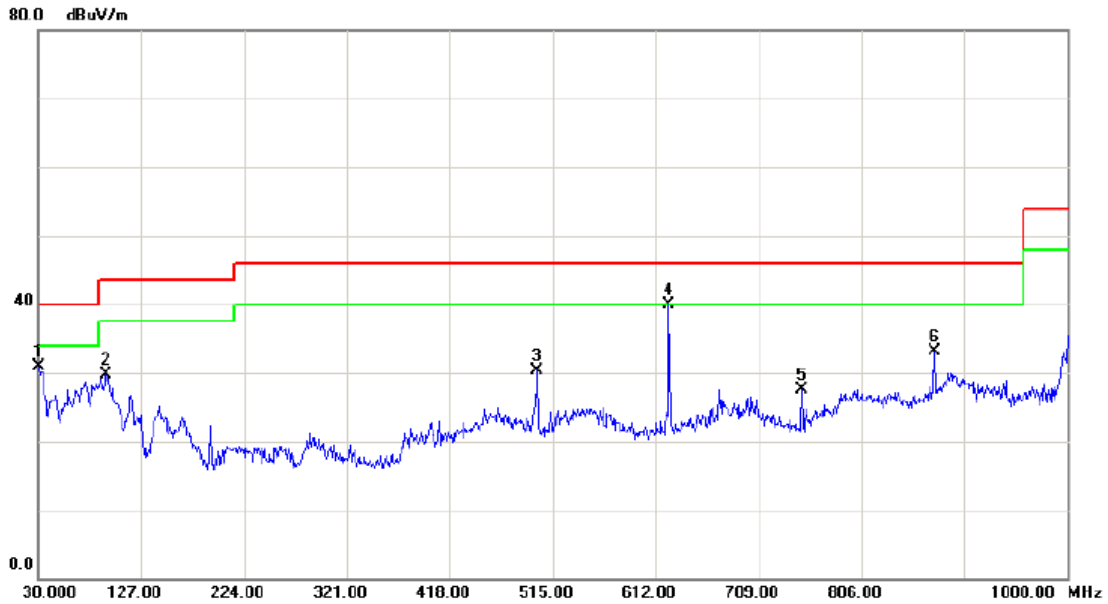

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		30.9700	45.95	-15.01	30.94	40.00	-9.06	peak	
2		94.0200	46.51	-16.85	29.66	43.50	-13.84	peak	
3		500.4500	40.71	-10.50	30.21	46.00	-15.79	peak	
4	*	624.6100	47.06	-7.06	40.00	46.00	-6.00	peak	
5		749.7400	32.77	-5.30	27.47	46.00	-18.53	peak	
6		874.8700	34.87	-1.78	33.09	46.00	-12.91	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz/Adapter: PA-1600-2A-LF/Dipole Antenna with external cable		
Phase:	Horizontal		

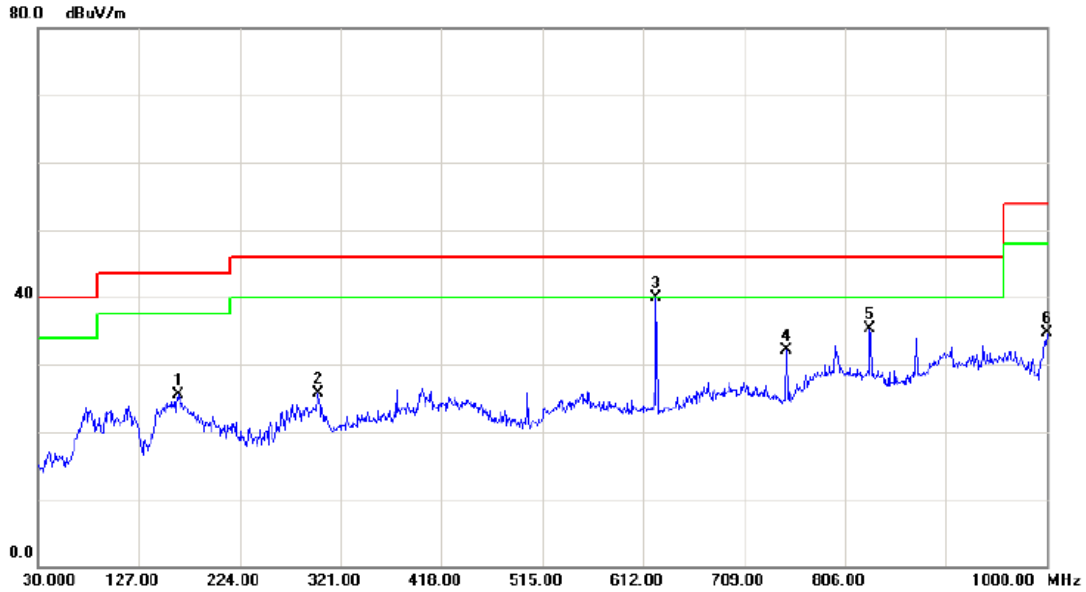

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	164.8300	38.21	-12.79	25.42	43.50	-18.08	peak	
2	299.6600	36.68	-10.97	25.71	46.00	-20.29	peak	
3 *	624.6100	46.87	-7.06	39.81	46.00	-6.19	peak	
4	749.7400	37.49	-5.30	32.19	46.00	-13.81	peak	
5	830.2500	38.43	-3.15	35.28	46.00	-10.72	peak	
6	1000.000	35.15	-0.54	34.61	54.00	-19.39	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz/Adapter: PA-1600-2A-LF/Dipole Antenna with external cable		
Phase:	Vertical		

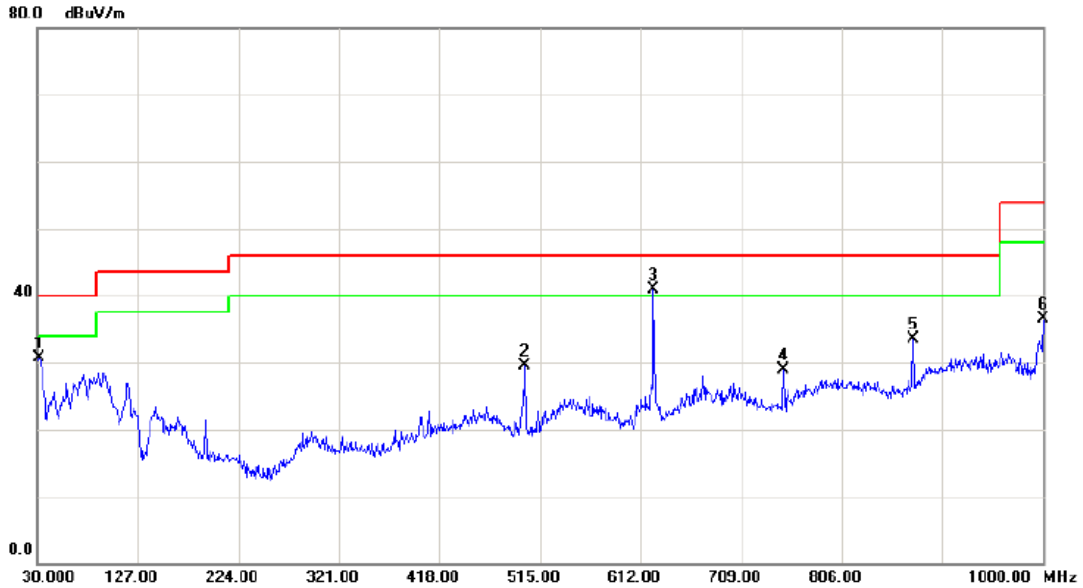

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.49	-14.86	30.63	40.00	-9.37	peak	
2		500.4500	40.07	-10.50	29.57	46.00	-16.43	peak	
3	*	624.6100	47.91	-7.06	40.85	46.00	-5.15	peak	
4		749.7400	34.13	-5.30	28.83	46.00	-17.17	peak	
5		874.8700	35.23	-1.78	33.45	46.00	-12.55	peak	
6		1000.000	37.04	-0.54	36.50	54.00	-17.50	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz/Adapter: PA-1600-2A-LF/Dipole Antenna with external cable		
Phase:	Horizontal		

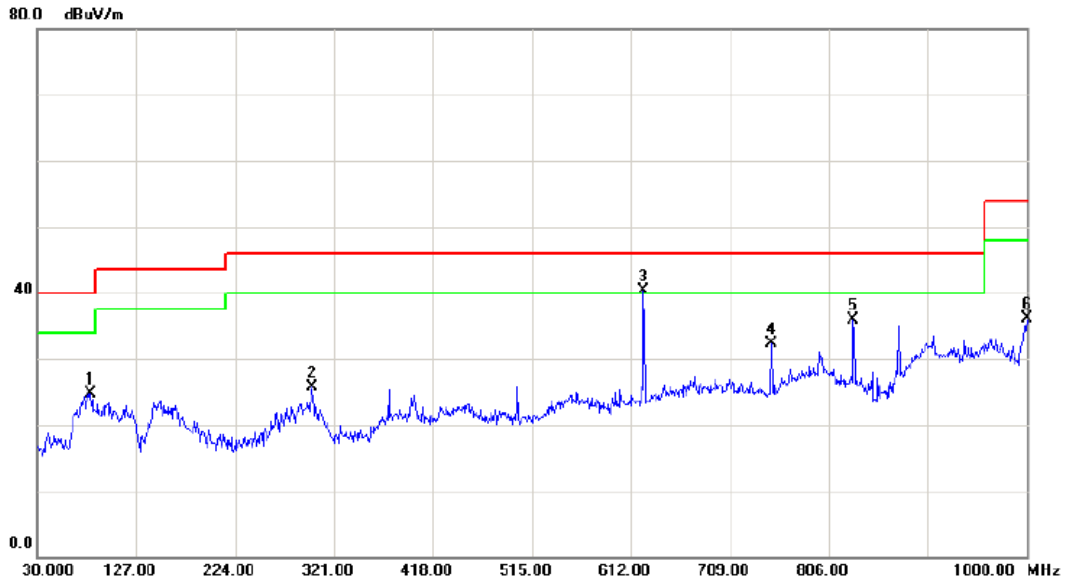

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	82.3800	41.28	-16.63	24.65	40.00	-15.35	peak	
2	299.6600	36.72	-10.97	25.75	46.00	-20.25	peak	
3 *	624.6100	47.41	-7.06	40.35	46.00	-5.65	peak	
4	749.7400	37.53	-5.30	32.23	46.00	-13.77	peak	
5	830.2500	38.97	-3.15	35.82	46.00	-10.18	peak	
6	1000.000	36.69	-0.54	36.15	54.00	-17.85	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz/Adapter:EADP-60MB B/Dipole Antenna with external cable		
Phase:	Vertical		

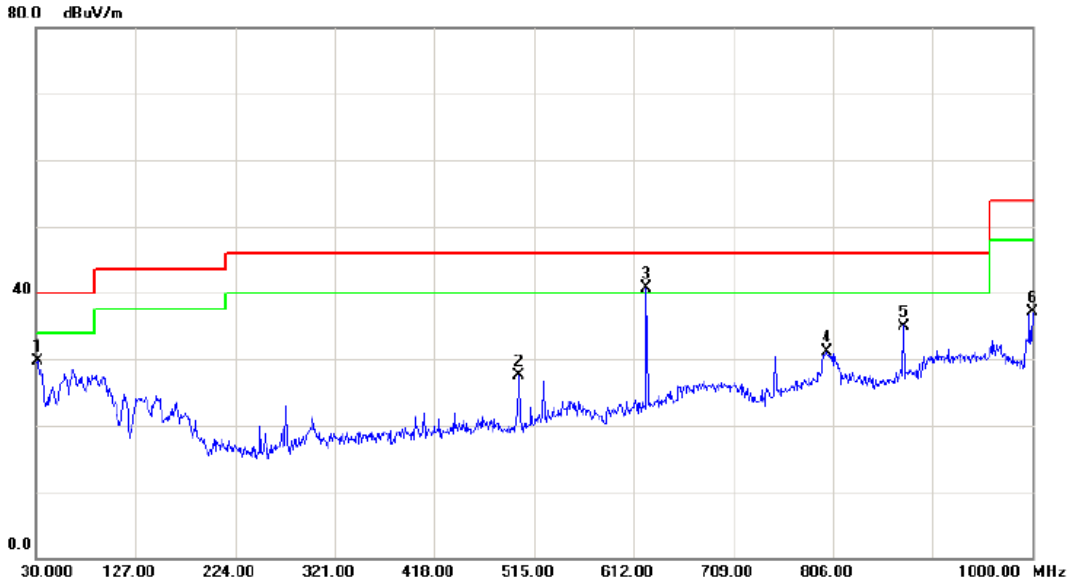

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	44.53	-14.86	29.67	40.00	-10.33	peak	
2		500.4500	38.01	-10.50	27.51	46.00	-18.49	peak	
3	*	624.6100	47.85	-7.06	40.79	46.00	-5.21	peak	
4		800.1800	32.81	-1.62	31.19	46.00	-14.81	peak	
5		874.8700	36.78	-1.78	35.00	46.00	-11.00	peak	
6		1000.000	37.69	-0.54	37.15	54.00	-16.85	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz/Adapter: EADP-60MB B/Dipole Antenna with external cable		
Phase:	Horizontal		

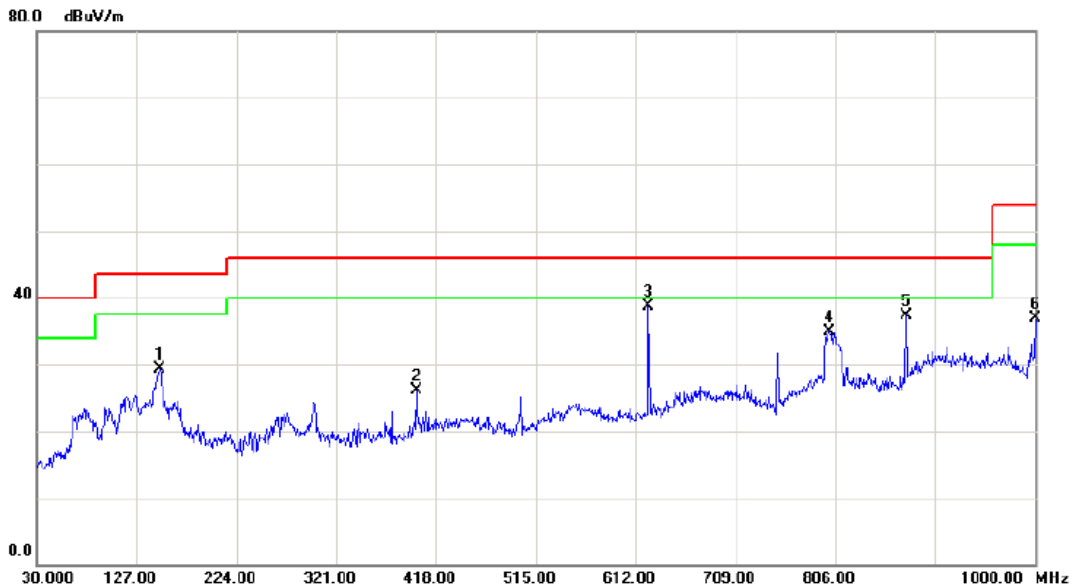

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	42.93	-13.61	29.32	43.50	-14.18	peak	
2		398.6000	35.90	-9.82	26.08	46.00	-19.92	peak	
3	*	624.6100	45.78	-7.06	38.72	46.00	-7.28	peak	
4		800.1800	36.51	-1.62	34.89	46.00	-11.11	peak	
5		874.8700	39.03	-1.78	37.25	46.00	-8.75	peak	
6		1000.000	37.39	-0.54	36.85	54.00	-17.15	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz/Adapter: EADP-60MB B/Dipole Antenna with external cable		
Phase:	Vertical		

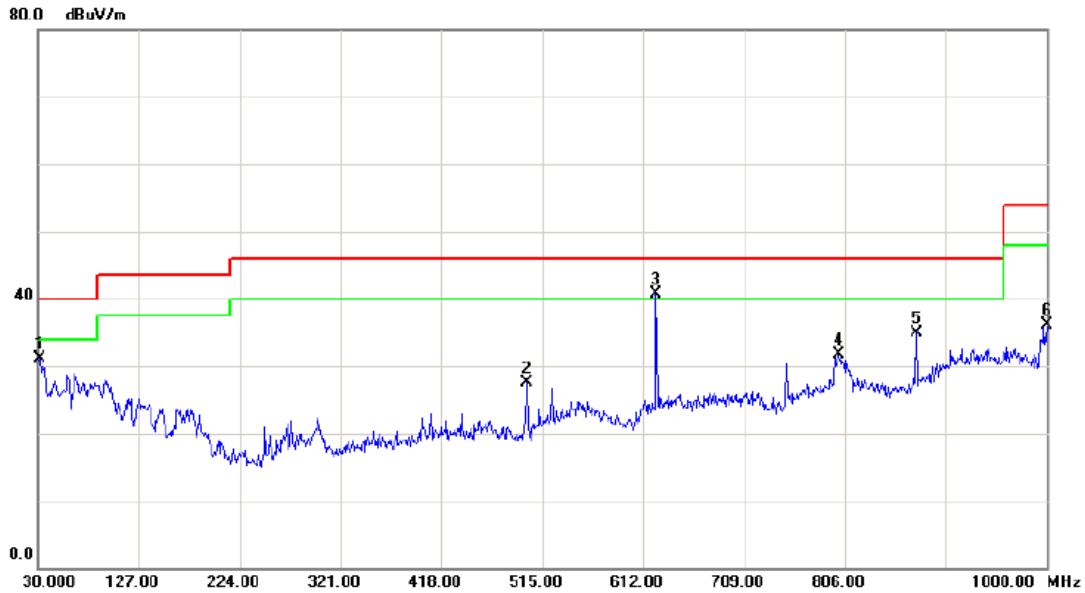

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	46.03	-14.86	31.17	40.00	-8.83	peak	
2		500.4500	38.01	-10.50	27.51	46.00	-18.49	peak	
3	*	624.6100	47.85	-7.06	40.79	46.00	-5.21	peak	
4		800.1800	33.31	-1.62	31.69	46.00	-14.31	peak	
5		874.8700	36.78	-1.78	35.00	46.00	-11.00	peak	
6		1000.000	36.69	-0.54	36.15	54.00	-17.85	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz/Adapter: EADP-60MB B/Dipole Antenna with external cable		
Phase:	Horizontal		

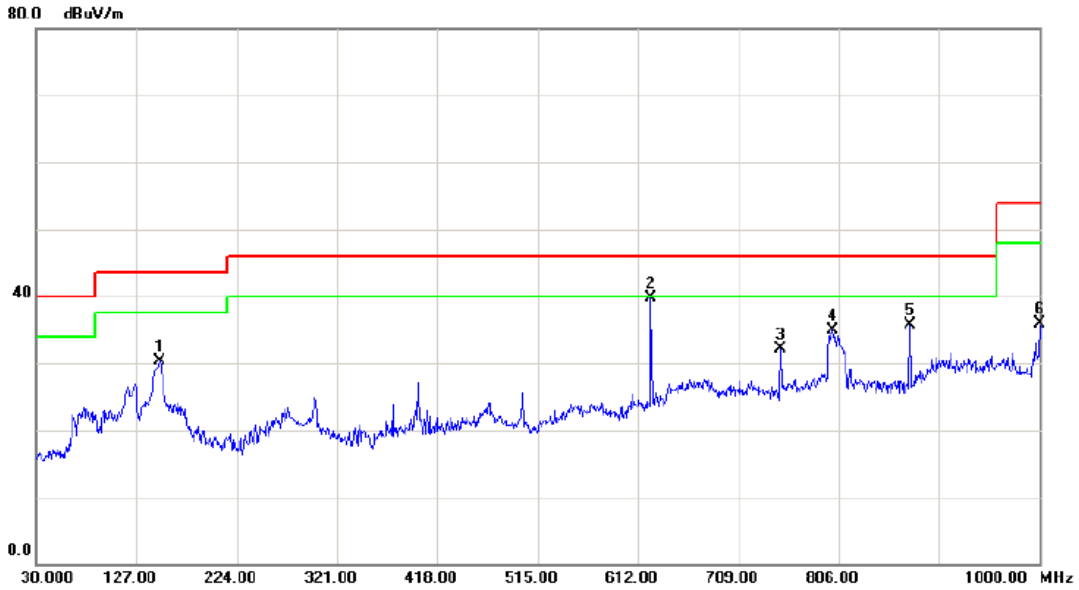

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	43.93	-13.61	30.32	43.50	-13.18	peak	
2	*	624.6100	46.78	-7.06	39.72	46.00	-6.28	peak	
3		749.7400	37.47	-5.30	32.17	46.00	-13.83	peak	
4		800.1800	36.51	-1.62	34.89	46.00	-11.11	peak	
5		874.8700	37.53	-1.78	35.75	46.00	-10.25	peak	
6		1000.000	36.39	-0.54	35.85	54.00	-18.15	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz/Adapter: EADP-60MB B/Dipole Antenna with external cable		
Phase:	Vertical		

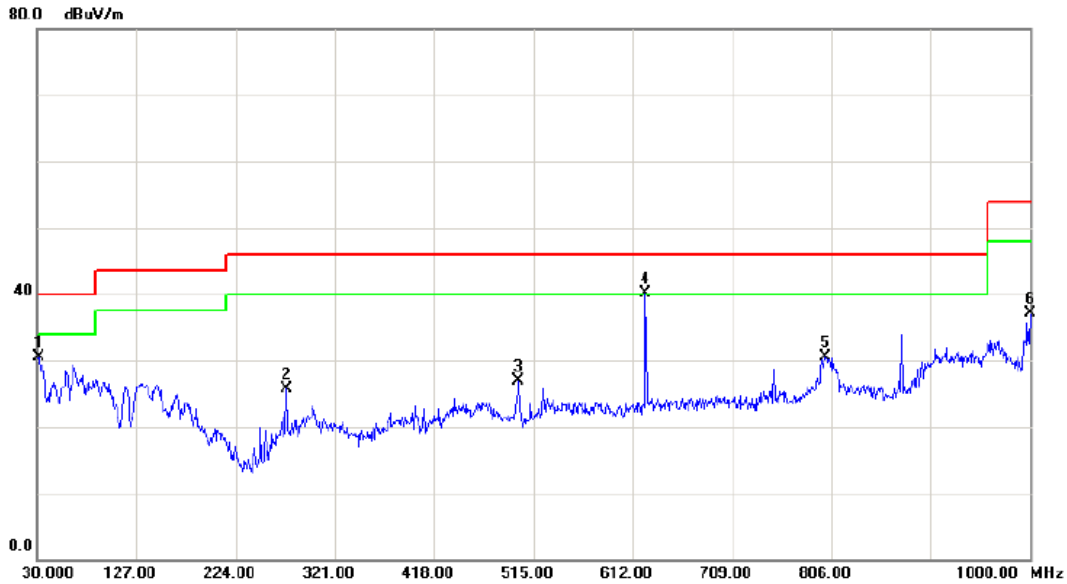

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.42	-14.86	30.56	40.00	-9.44	peak	
2		273.4700	39.34	-13.55	25.79	46.00	-20.21	peak	
3		500.4500	37.40	-10.50	26.90	46.00	-19.10	peak	
4	*	624.6100	47.25	-7.06	40.19	46.00	-5.81	peak	
5		800.1800	32.21	-1.62	30.59	46.00	-15.41	peak	
6		1000.0000	37.58	-0.54	37.04	54.00	-16.96	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz/Adapter: EADP-60MB B/Dipole Antenna with external cable		
Phase:	Horizontal		

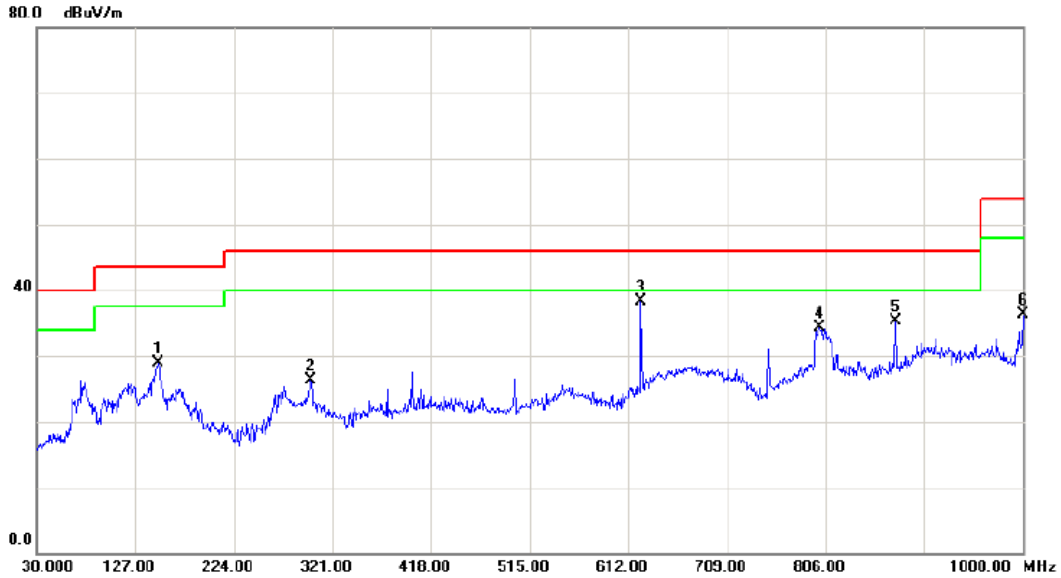

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	42.43	-13.61	28.82	43.50	-14.68	peak	
2		299.6600	37.29	-10.97	26.32	46.00	-19.68	peak	
3	*	624.6100	45.28	-7.06	38.22	46.00	-7.78	peak	
4		800.1800	36.01	-1.62	34.39	46.00	-11.61	peak	
5		874.8700	37.03	-1.78	35.25	46.00	-10.75	peak	
6		1000.000	36.89	-0.54	36.35	54.00	-17.65	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz / POE/ Integral Antenna		
Phase:	Vertical		

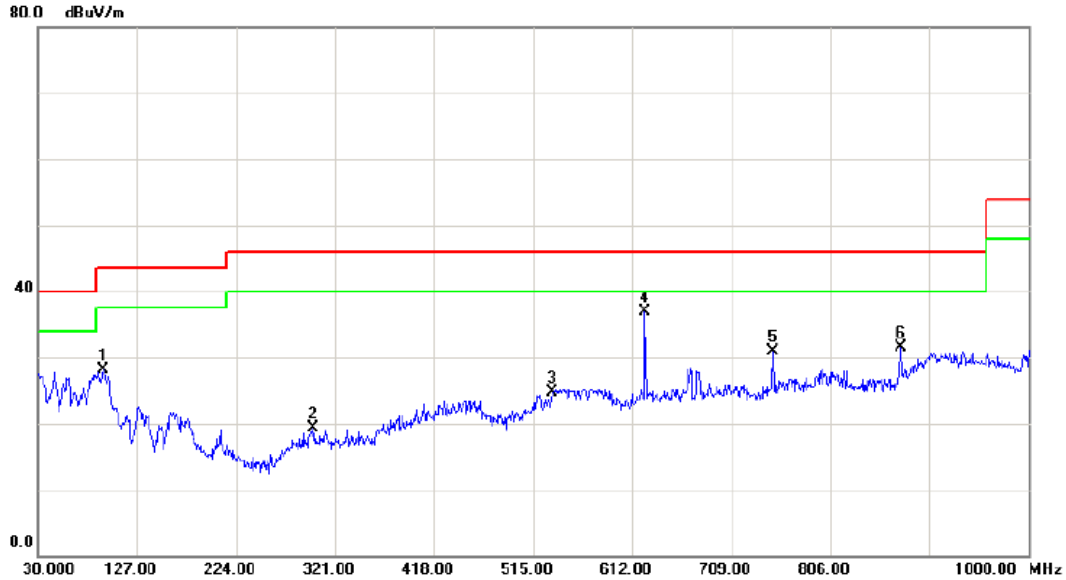

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		94.0200	44.90	-16.85	28.05	43.50	-15.45	peak	
2		299.6600	30.27	-10.97	19.30	46.00	-26.70	peak	
3		533.4300	32.06	-7.41	24.65	46.00	-21.35	peak	
4	*	624.6100	44.05	-7.06	36.99	46.00	-9.01	peak	
5		749.7400	36.28	-5.30	30.98	46.00	-15.02	peak	
6		874.8700	33.37	-1.78	31.59	46.00	-14.41	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz / POE/ Integral Antenna		
Phase:	Horizontal		

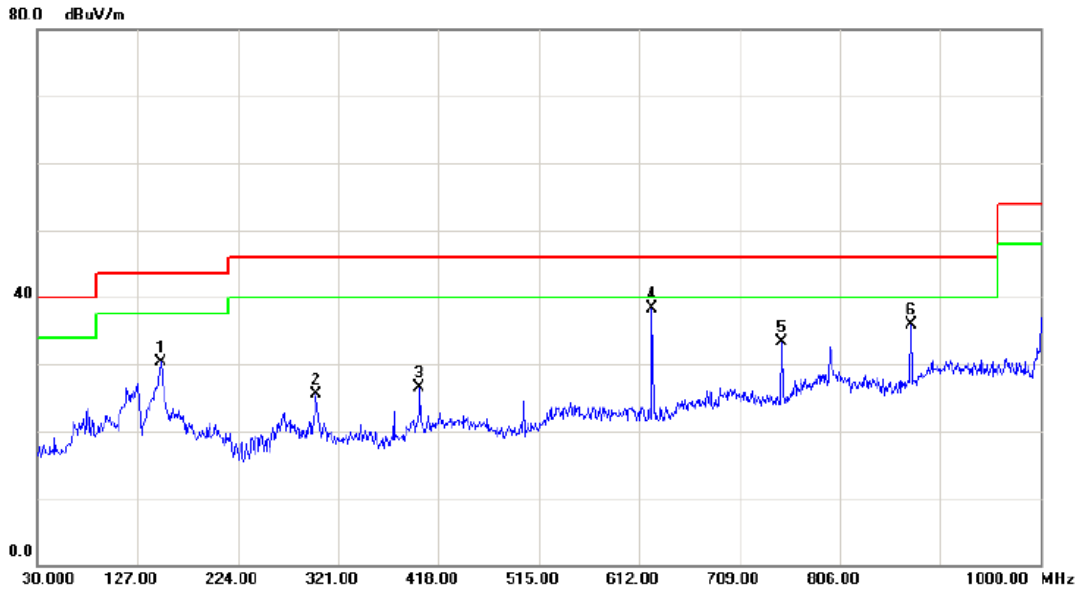

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBUv/m	Over dB	Detector	Comment
1		149.3100	43.87	-13.61	30.26	43.50	-13.24	peak	
2		299.6600	36.42	-10.97	25.45	46.00	-20.55	peak	
3		399.5700	36.28	-9.79	26.49	46.00	-19.51	peak	
4	*	624.6100	45.34	-7.06	38.28	46.00	-7.72	peak	
5		749.7400	38.52	-5.30	33.22	46.00	-12.78	peak	
6		874.8700	37.70	-1.78	35.92	46.00	-10.08	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz / POE/ Integral Antenna		
Phase:	Vertical		

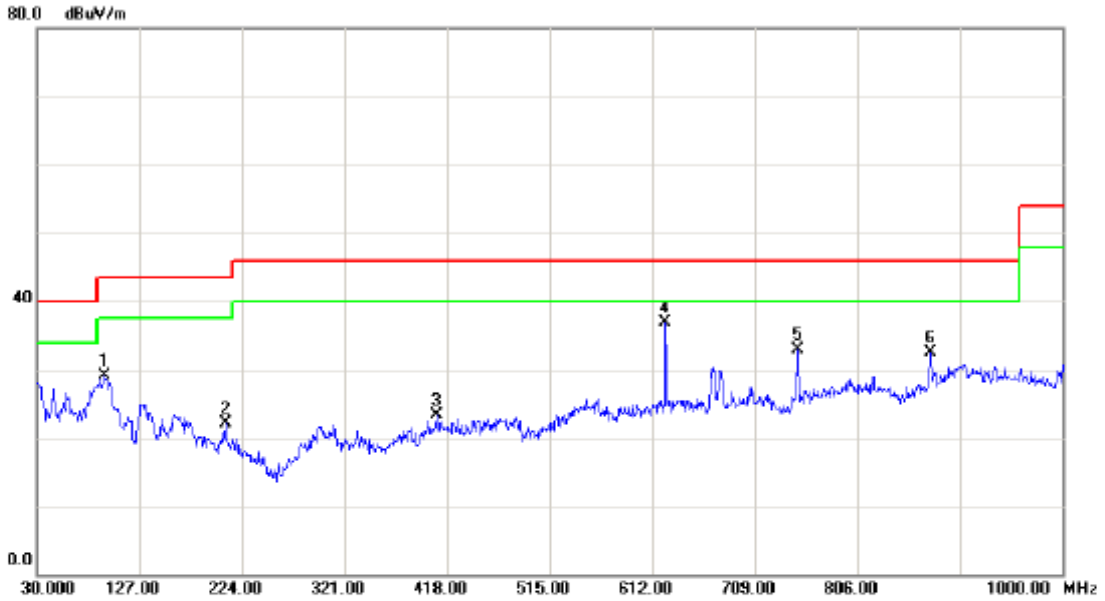

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		94.0200	45.90	-16.85	29.05	43.50	-14.45	peak	
2		208.4800	37.25	-15.14	22.11	43.50	-21.39	peak	
3		408.3000	32.94	-9.60	23.34	46.00	-22.66	peak	
4	*	624.6100	44.05	-7.06	36.99	46.00	-9.01	peak	
5		749.7400	38.28	-5.30	32.98	46.00	-13.02	peak	
6		874.8700	34.37	-1.78	32.59	46.00	-13.41	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz / POE/ Integral Antenna		
Phase:	Horizontal		

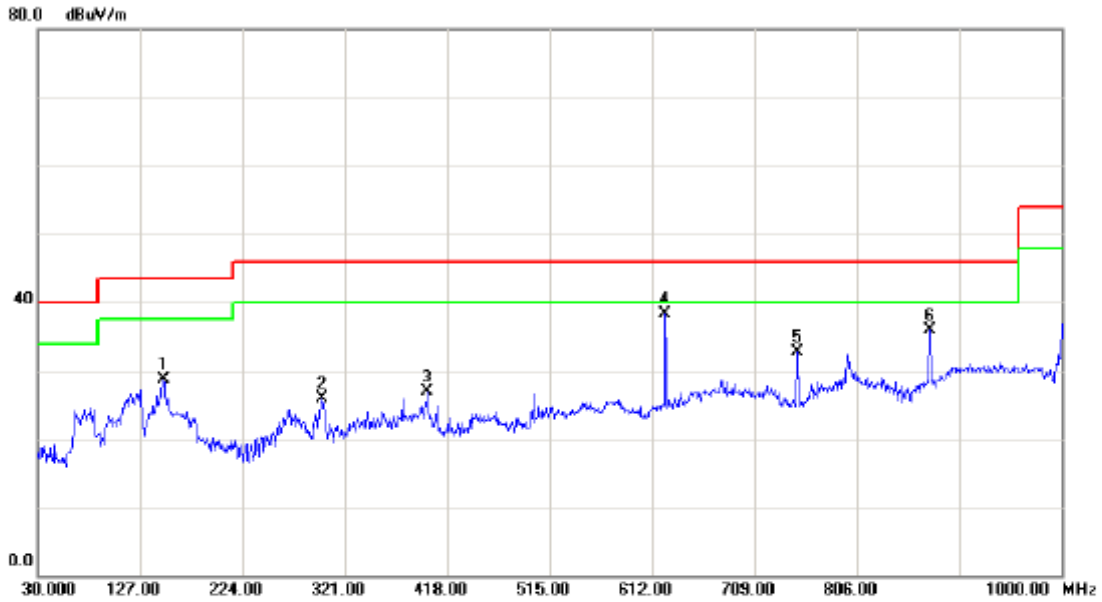

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	149.3100	42.37	-13.61	28.76	43.50	-14.74	peak	
2	299.6600	36.92	-10.97	25.95	46.00	-20.05	peak	
3	399.5700	36.78	-9.79	26.99	46.00	-19.01	peak	
4 *	624.6100	45.34	-7.06	38.28	46.00	-7.72	peak	
5	749.7400	38.02	-5.30	32.72	46.00	-13.28	peak	
6	874.8700	37.70	-1.78	35.92	46.00	-10.08	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz / POE/ Integral Antenna		
Phase:	Vertical		

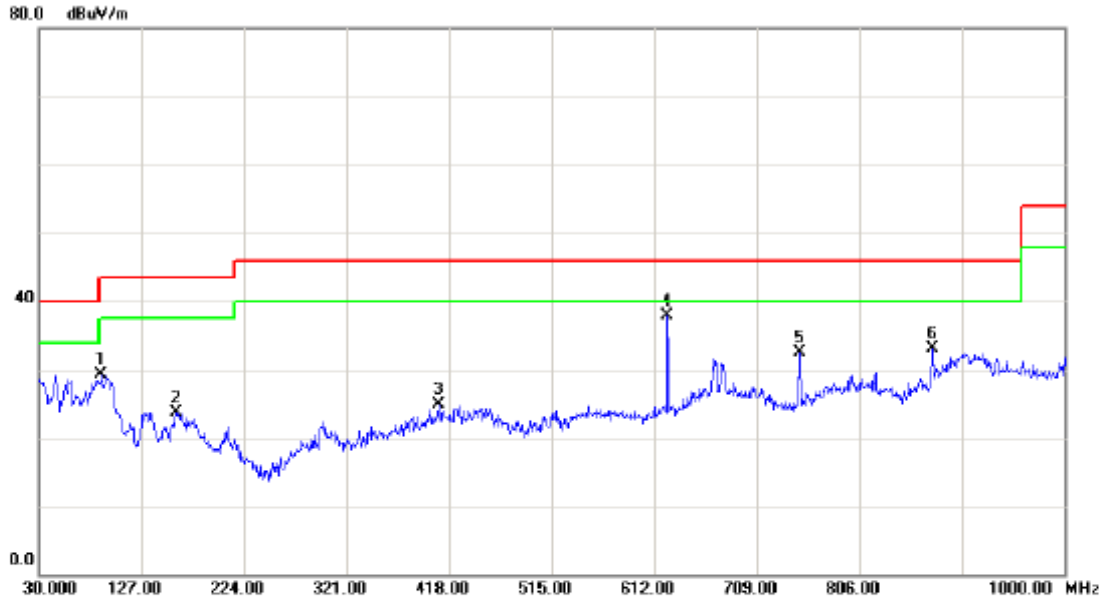

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	89.1700	46.07	-16.80	29.27	43.50	-14.23	peak	
2	159.9800	36.47	-12.75	23.72	43.50	-19.78	peak	
3	408.3000	34.44	-9.60	24.84	46.00	-21.16	peak	
4 *	624.6100	45.05	-7.06	37.99	46.00	-8.01	peak	
5	749.7400	37.78	-5.30	32.48	46.00	-13.52	peak	
6	874.8700	34.87	-1.78	33.09	46.00	-12.91	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz / POE/ Integral Antenna		
Phase:	Horizontal		

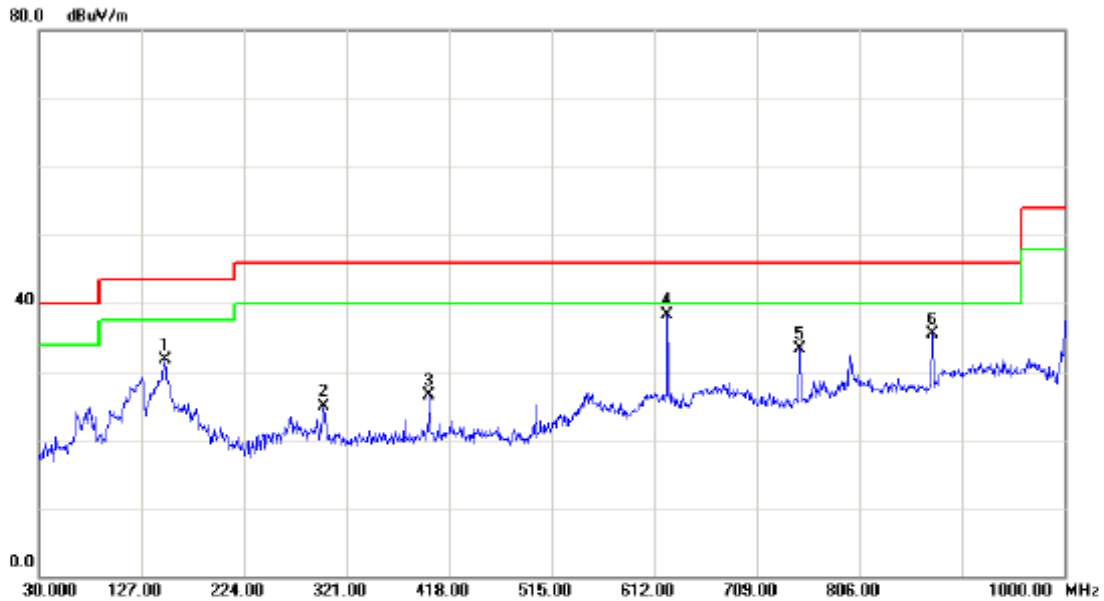

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	45.37	-13.61	31.76	43.50	-11.74	peak	
2		299.6600	35.92	-10.97	24.95	46.00	-21.05	peak	
3		399.5700	36.28	-9.79	26.49	46.00	-19.51	peak	
4	*	624.6100	45.34	-7.06	38.28	46.00	-7.72	peak	
5		749.7400	38.52	-5.30	33.22	46.00	-12.78	peak	
6		874.8700	37.20	-1.78	35.42	46.00	-10.58	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz / POE / Dipole Antenna with external cable		
Phase:	Vertical		

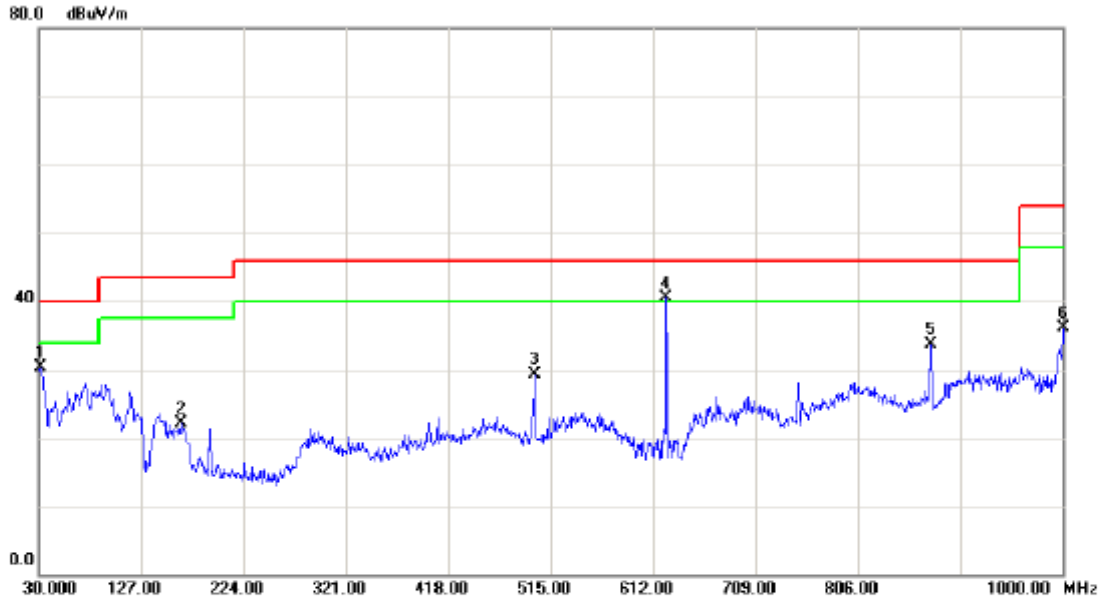

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.18	-14.86	30.32	40.00	-9.68	peak	
2		164.8300	34.81	-12.79	22.02	43.50	-21.48	peak	
3		500.4500	39.75	-10.50	29.25	46.00	-16.75	peak	
4	*	624.6100	47.60	-7.06	40.54	46.00	-5.46	peak	
5		874.8700	35.41	-1.78	33.63	46.00	-12.37	peak	
6		1000.000	36.73	-0.54	36.19	54.00	-17.81	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz / POE / Dipole Antenna with external cable		
Phase:	Horizontal		

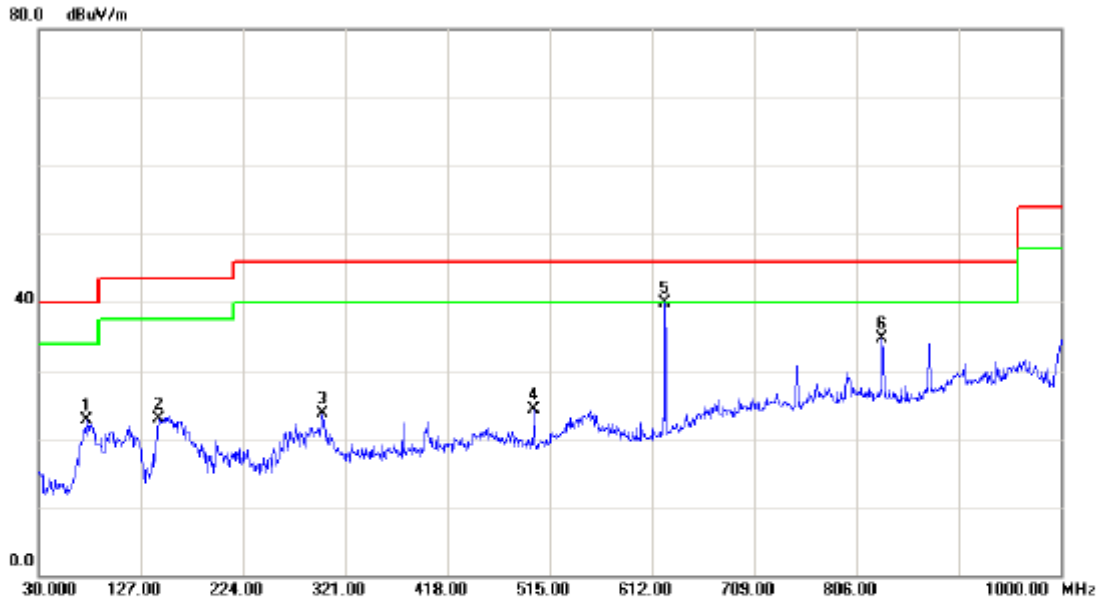

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		75.5900	38.74	-15.94	22.80	40.00	-17.20	peak	
2		144.4600	36.95	-14.11	22.84	43.50	-20.66	peak	
3		299.6600	34.68	-10.97	23.71	46.00	-22.29	peak	
4		500.4500	34.73	-10.50	24.23	46.00	-21.77	peak	
5	*	624.6100	46.87	-7.06	39.81	46.00	-6.19	peak	
6		830.2500	37.93	-3.15	34.78	46.00	-11.22	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz / POE / Dipole Antenna with external cable		
Phase:	Vertical		

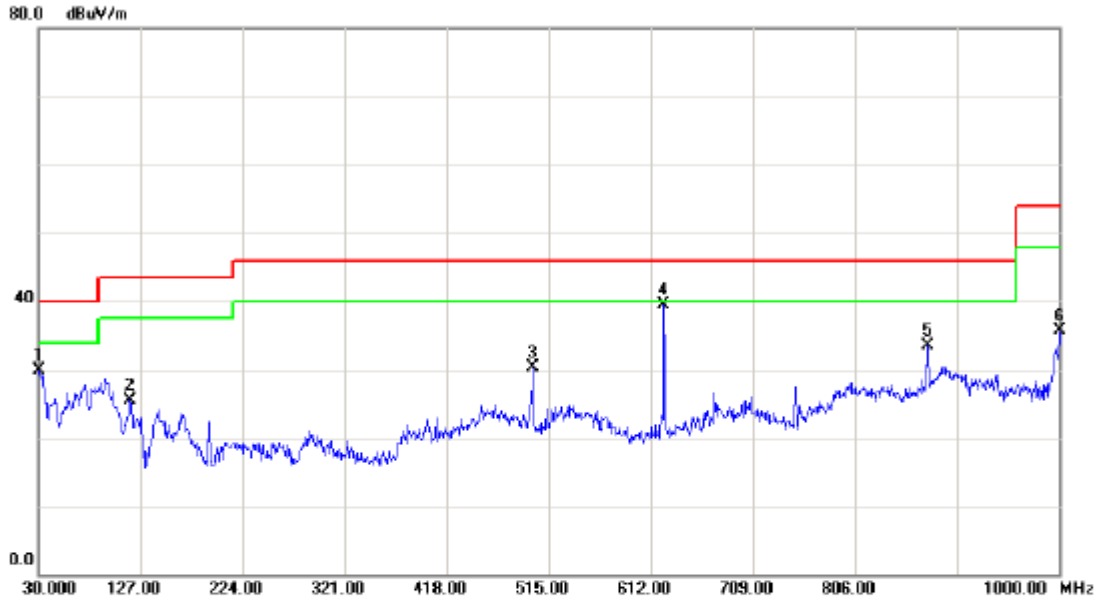

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	30.9700	44.95	-15.01	29.94	40.00	-10.06	peak	
2	117.3000	39.82	-14.22	25.60	43.50	-17.90	peak	
3	500.4500	40.71	-10.50	30.21	46.00	-15.79	peak	
4 *	624.6100	46.56	-7.06	39.50	46.00	-6.50	peak	
5	874.8700	35.37	-1.78	33.59	46.00	-12.41	peak	
6	1000.0000	36.19	-0.54	35.65	54.00	-18.35	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz / POE / Dipole Antenna with external cable		
Phase:	Horizontal		

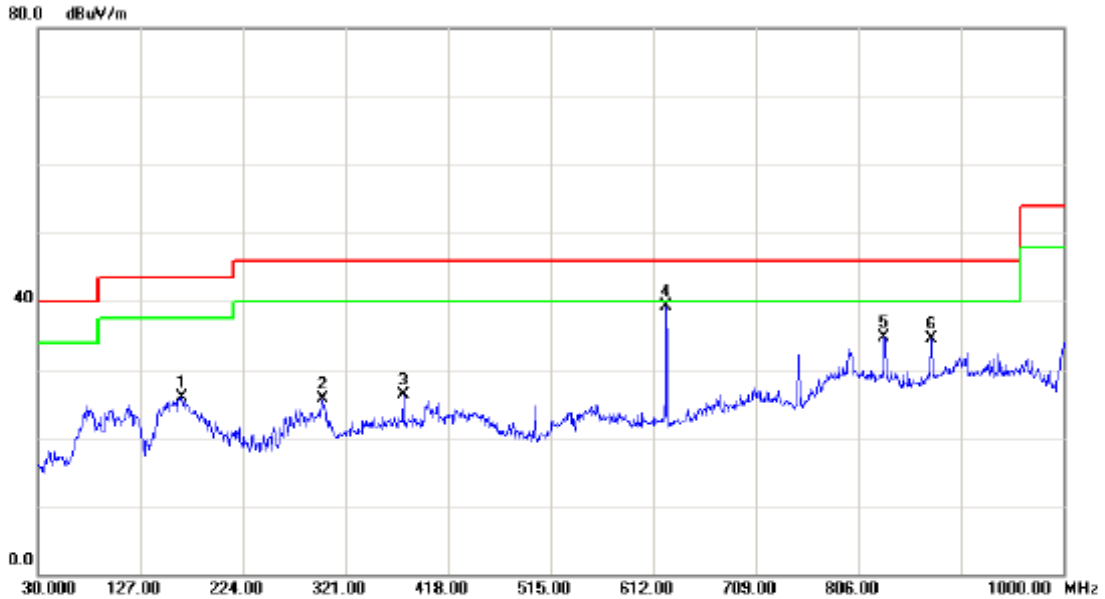

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		166.7700	38.80	-12.80	26.00	43.50	-17.50	peak	
2		299.6600	36.68	-10.97	25.71	46.00	-20.29	peak	
3		375.3200	36.87	-10.56	26.31	46.00	-19.69	peak	
4	*	624.6100	46.37	-7.06	39.31	46.00	-6.69	peak	
5		830.2500	37.93	-3.15	34.78	46.00	-11.22	peak	
6		874.8700	36.24	-1.78	34.46	46.00	-11.54	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz / POE / Dipole Antenna with external cable		
Phase:	Vertical		

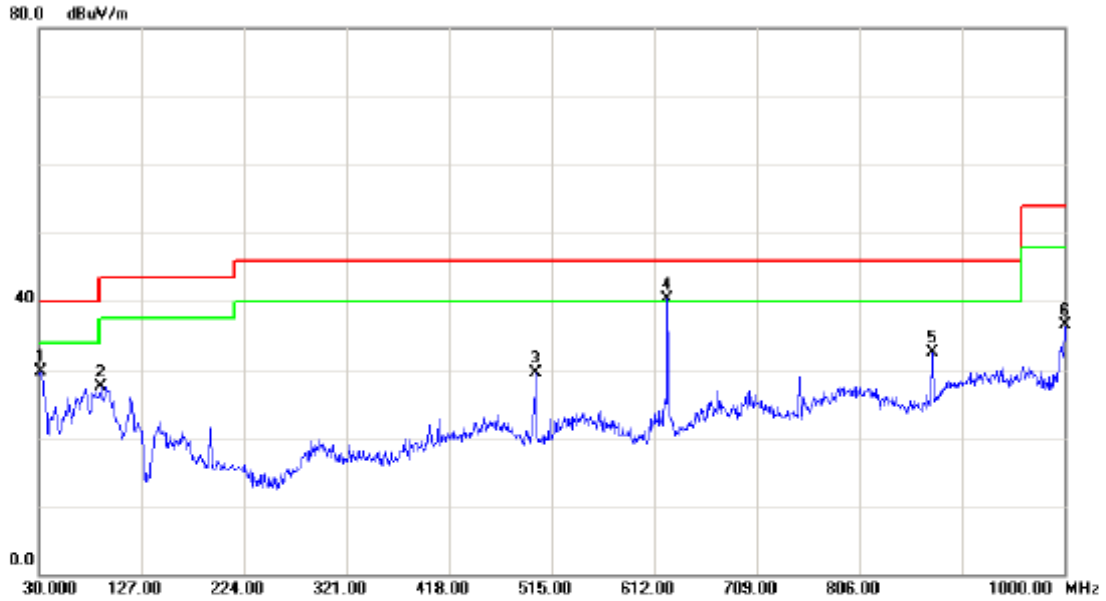

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	31.9400	44.49	-14.86	29.63	40.00	-10.37	peak	
2	89.1700	44.34	-16.80	27.54	43.50	-15.96	peak	
3	500.4500	40.07	-10.50	29.57	46.00	-16.43	peak	
4 *	624.6100	47.41	-7.06	40.35	46.00	-5.65	peak	
5	874.8700	34.23	-1.78	32.45	46.00	-13.55	peak	
6	1000.0000	37.04	-0.54	36.50	54.00	-17.50	peak	



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz / POE / Dipole Antenna with external cable		
Phase:	Horizontal		

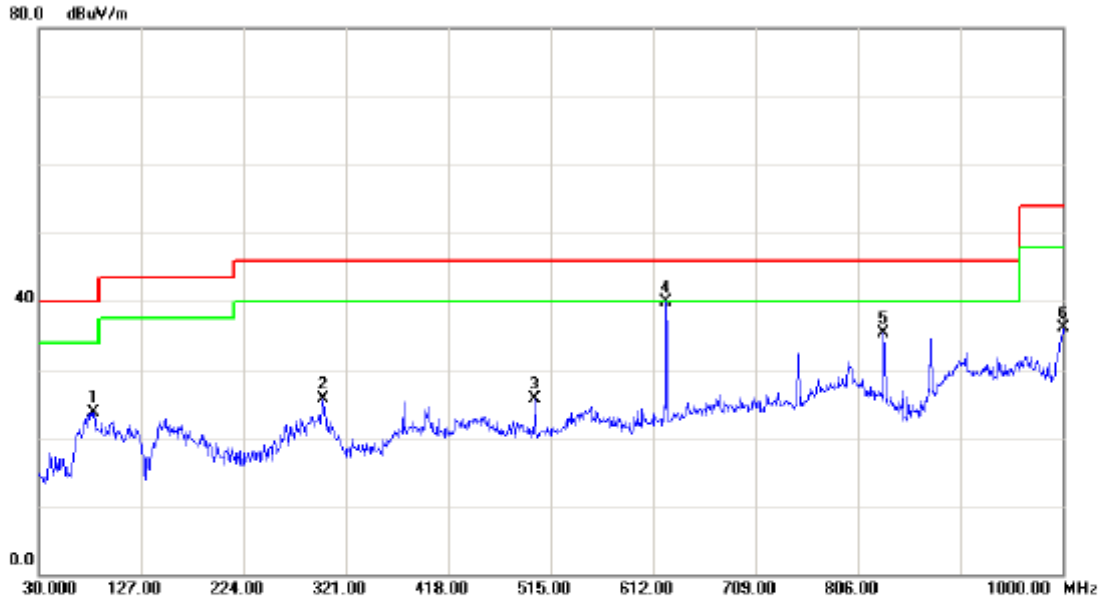

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		82.3800	40.28	-16.63	23.65	40.00	-16.35	peak	
2		299.6600	36.72	-10.97	25.75	46.00	-20.25	peak	
3		500.4500	36.27	-10.50	25.77	46.00	-20.23	peak	
4	*	624.6100	46.91	-7.06	39.85	46.00	-6.15	peak	
5		830.2500	38.47	-3.15	35.32	46.00	-10.68	peak	
6		1000.0000	36.69	-0.54	36.15	54.00	-17.85	peak	



4.2.8 TEST RESULTS - ABOVE 1000MHZ

EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBUV/m)		Act.(dBm)		Limit(dBUV/m)		Limit(dBm)		Note
		Peak (dBUV)	AV (dBUV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	12.75	3.24	42.72	55.47	45.96	-49.30	-58.81	68.30	54.00	-27.00	-41.30	X/E
5175.60	V	58.60	51.20	42.78	101.38	93.98	-3.39	-10.79					X/F
10355.15	V	41.58	30.17	16.03	57.61	46.20	-47.16	-58.57	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)

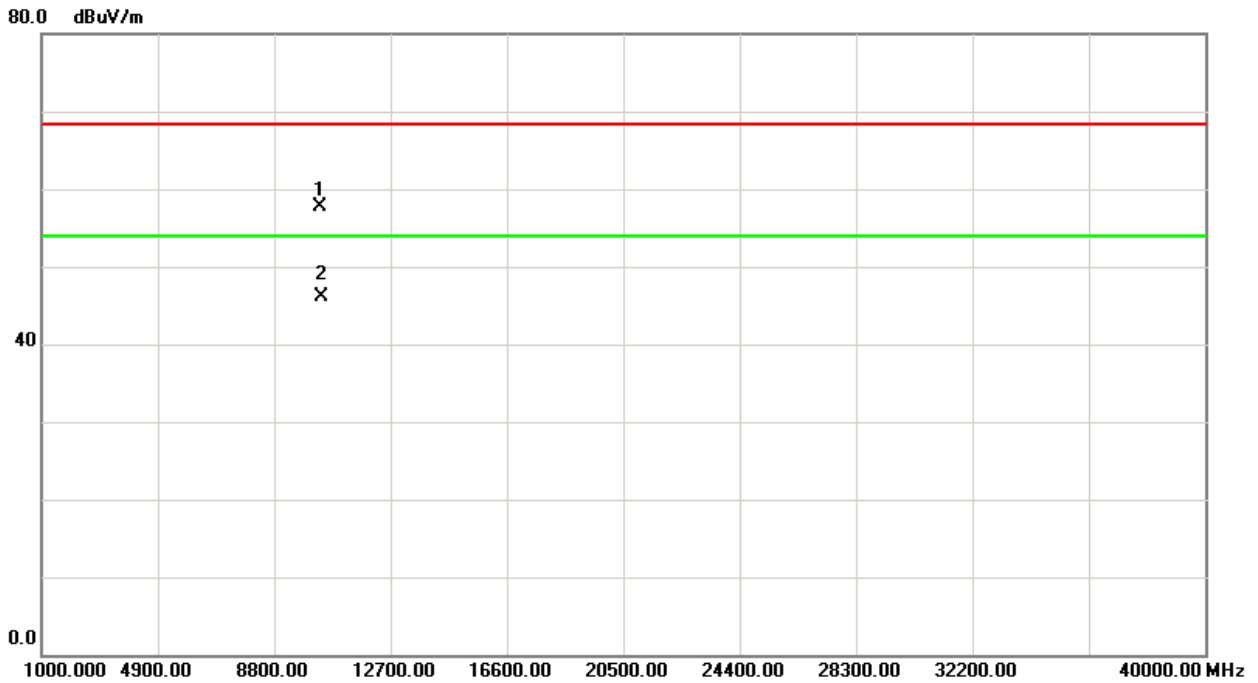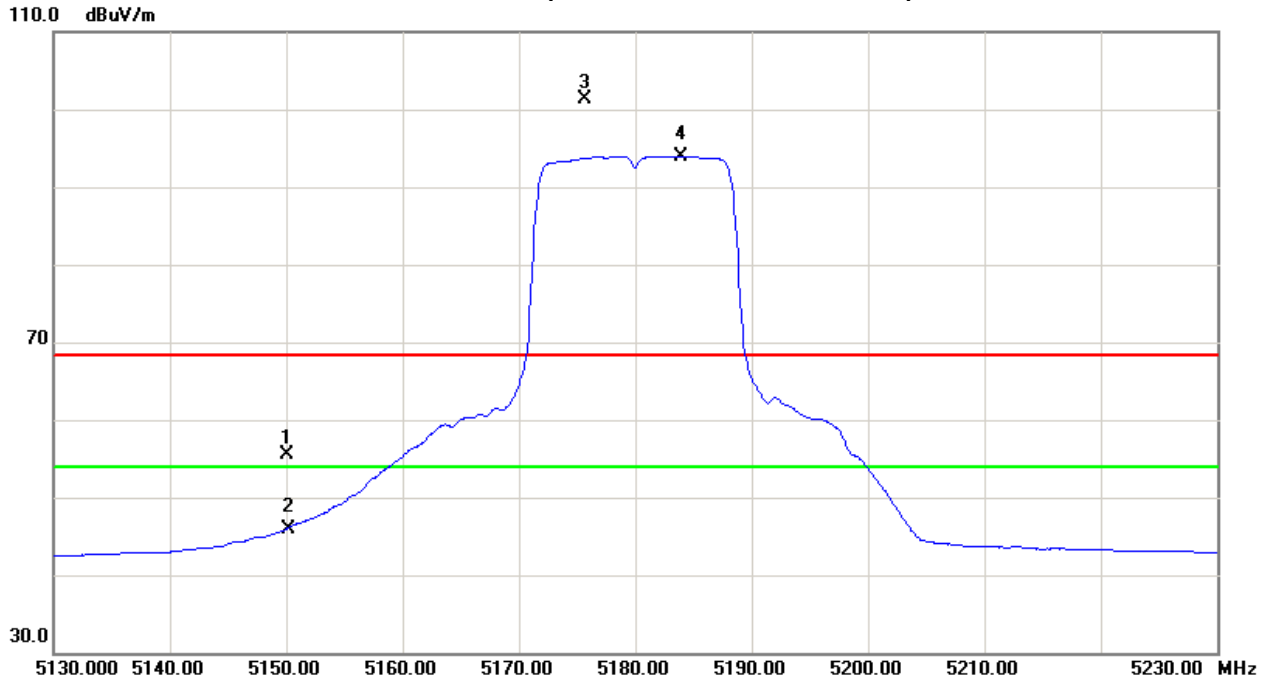



Neutron Engineering Inc.

EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	15.24	7.51	42.72	57.96	50.23	-46.81	-54.54	68.30	54.00	-27.00	-41.30	X/E
5174.00	H	61.88	55.25	42.78	104.66	98.03	-0.11	-6.74					X/F
10361.00	H	41.28	30.35	16.02	57.30	46.37	-47.47	-58.40	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis: X
Band 1/CH36(Above 1000 MHz, Horizontal)

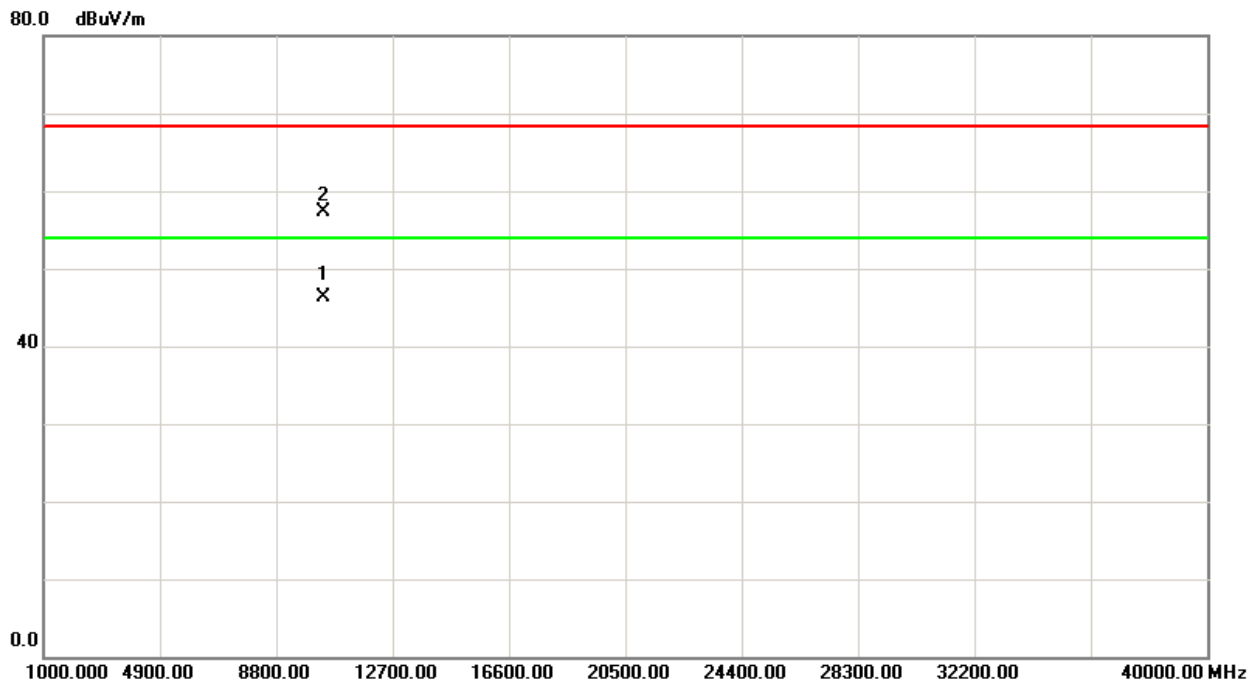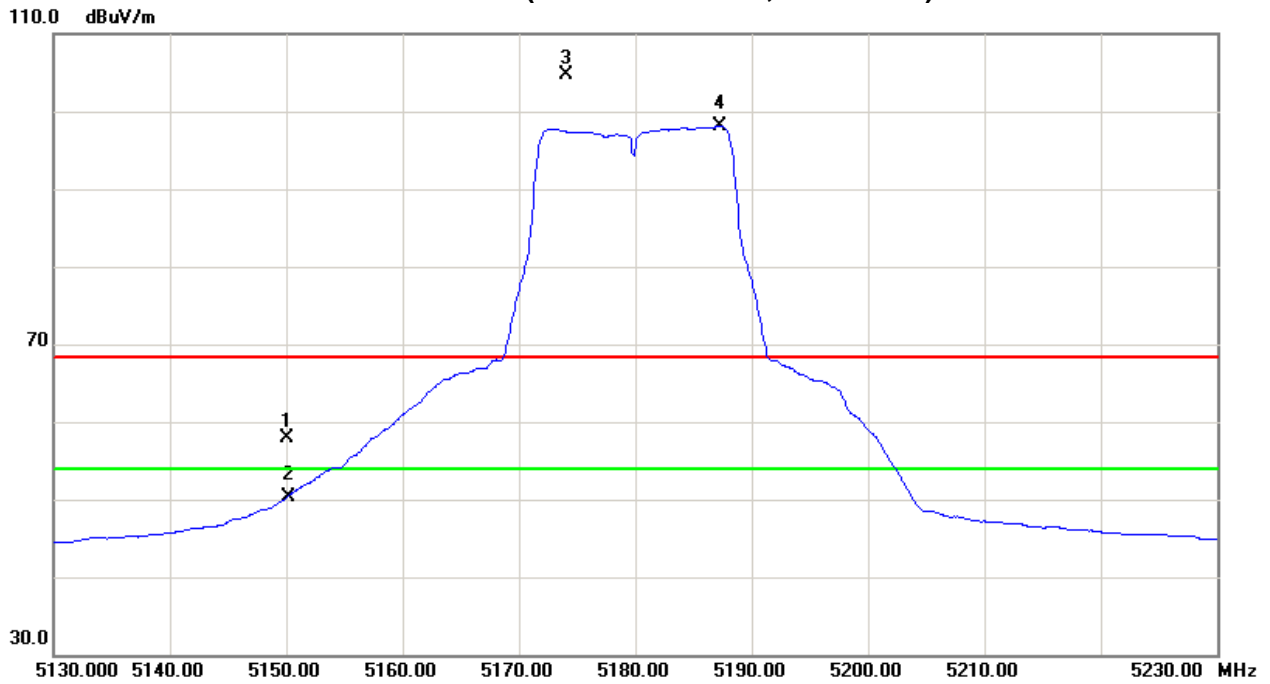



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5195.40	V	58.71	51.41	42.83	101.54	94.24	-3.23	-10.53					X/F
10401.15	V	41.45	30.35	15.96	57.41	46.31	-47.36	-58.46	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)

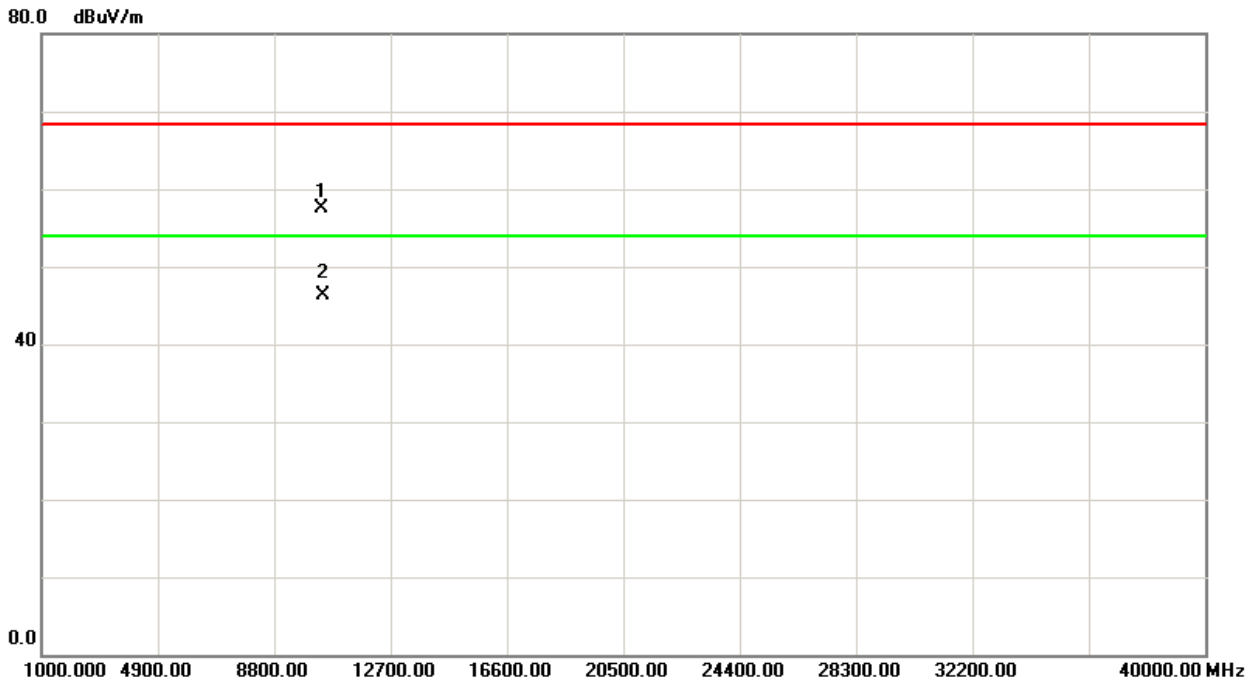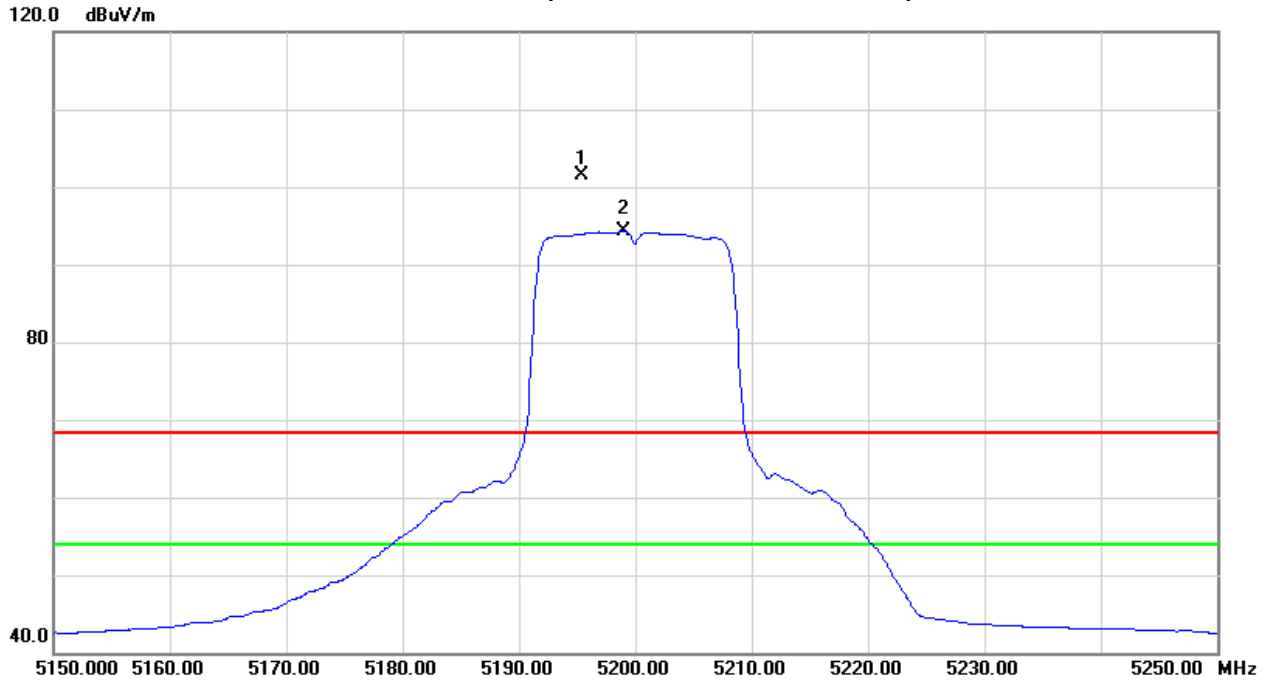



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5192.60	H	62.14	54.89	42.83	104.97	97.72	0.20	-7.05					X/F
10401.25	H	41.75	30.56	15.96	57.71	46.52	-47.06	-58.25	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)

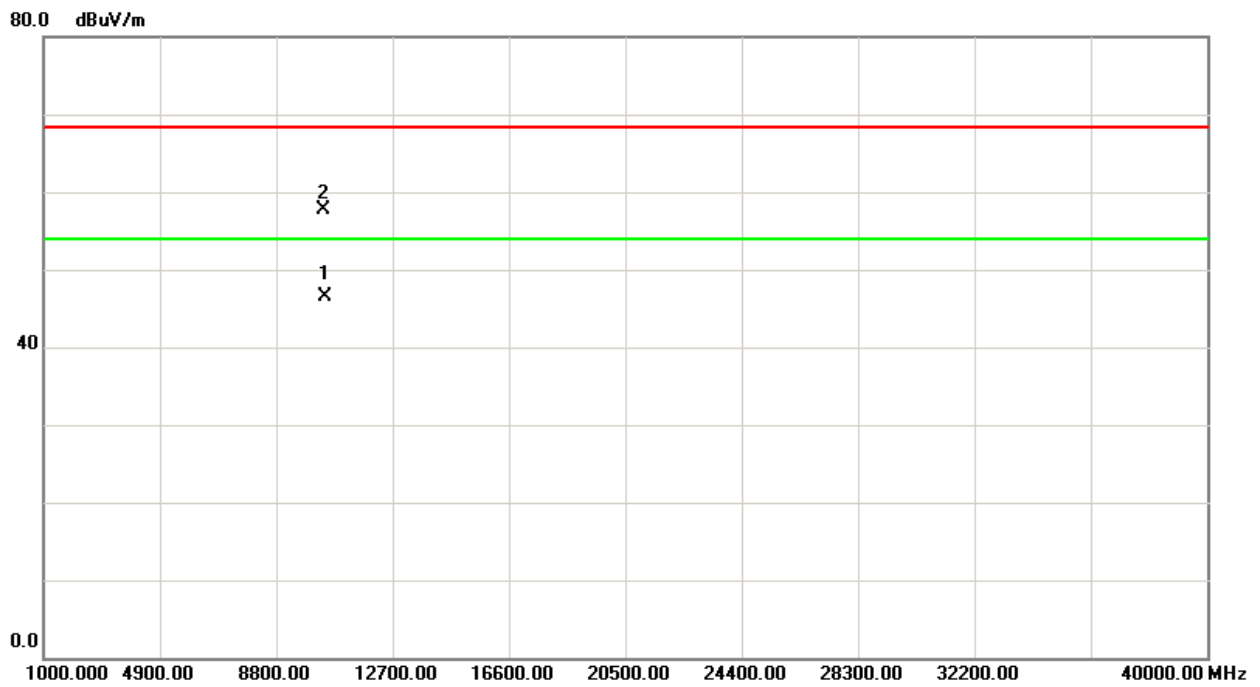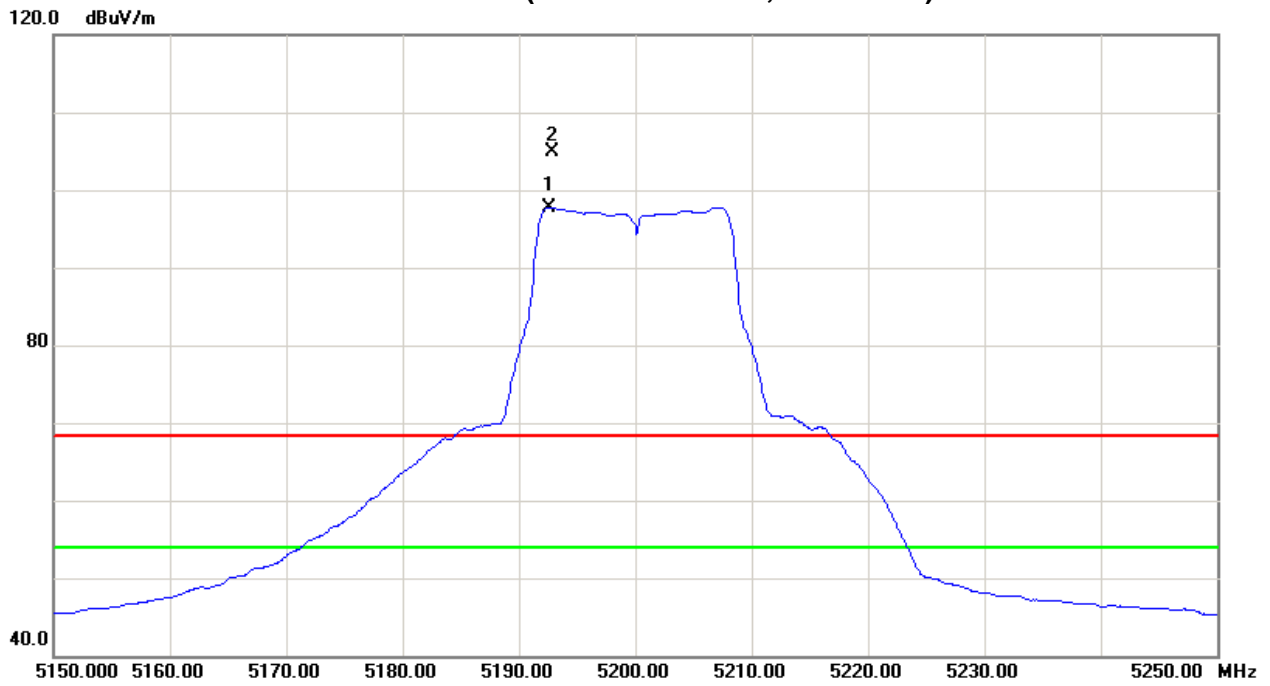



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5236.10	V	59.05	51.81	42.93	101.98	94.74	-2.79	-10.03					X/F
10481.15	V	41.38	30.37	15.85	57.23	46.22	-47.54	-58.55	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)

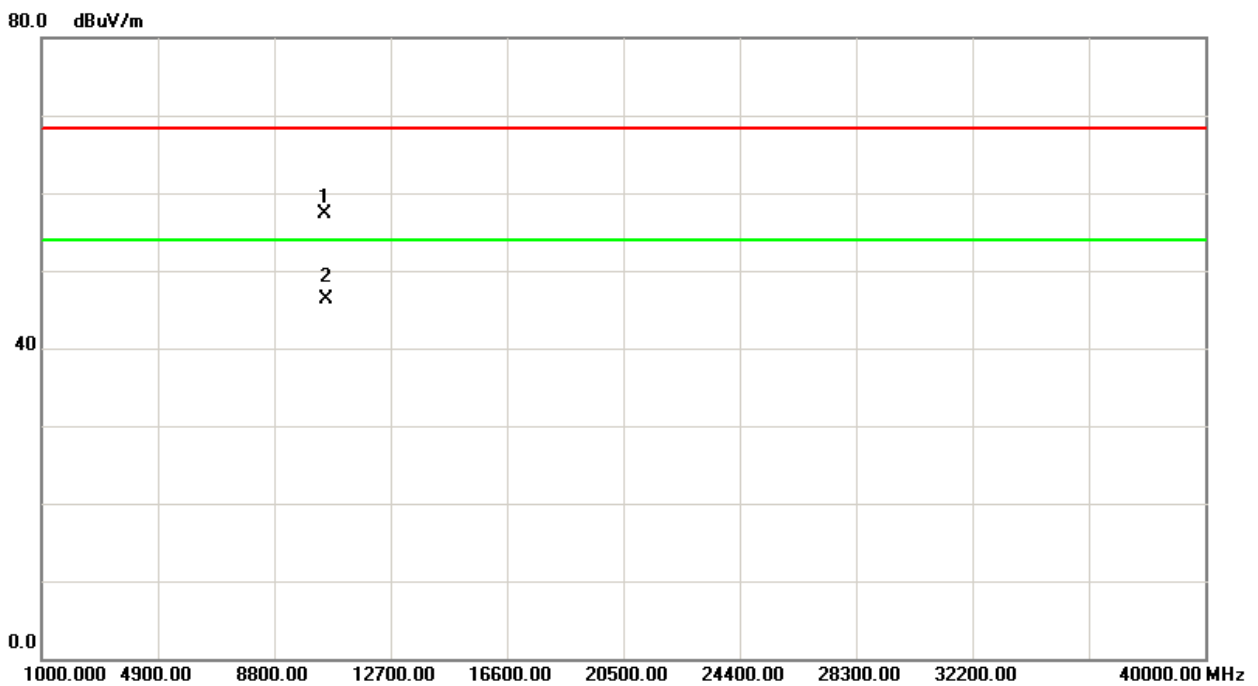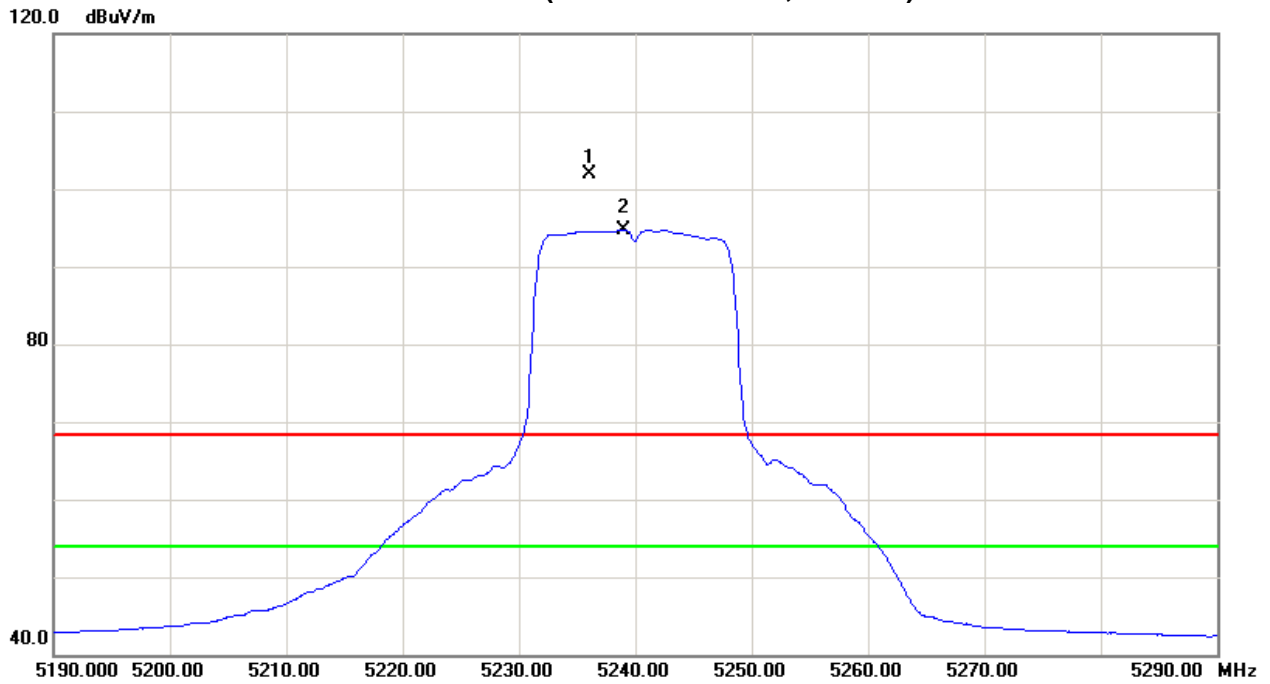



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5235.40	H	62.15	55.19	42.92	105.07	98.11	0.30	-6.66					X/F
10481.20	H	41.68	30.58	15.85	57.53	46.43	-47.24	-58.34	85.07	78.11	-10.23	-17.19	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)

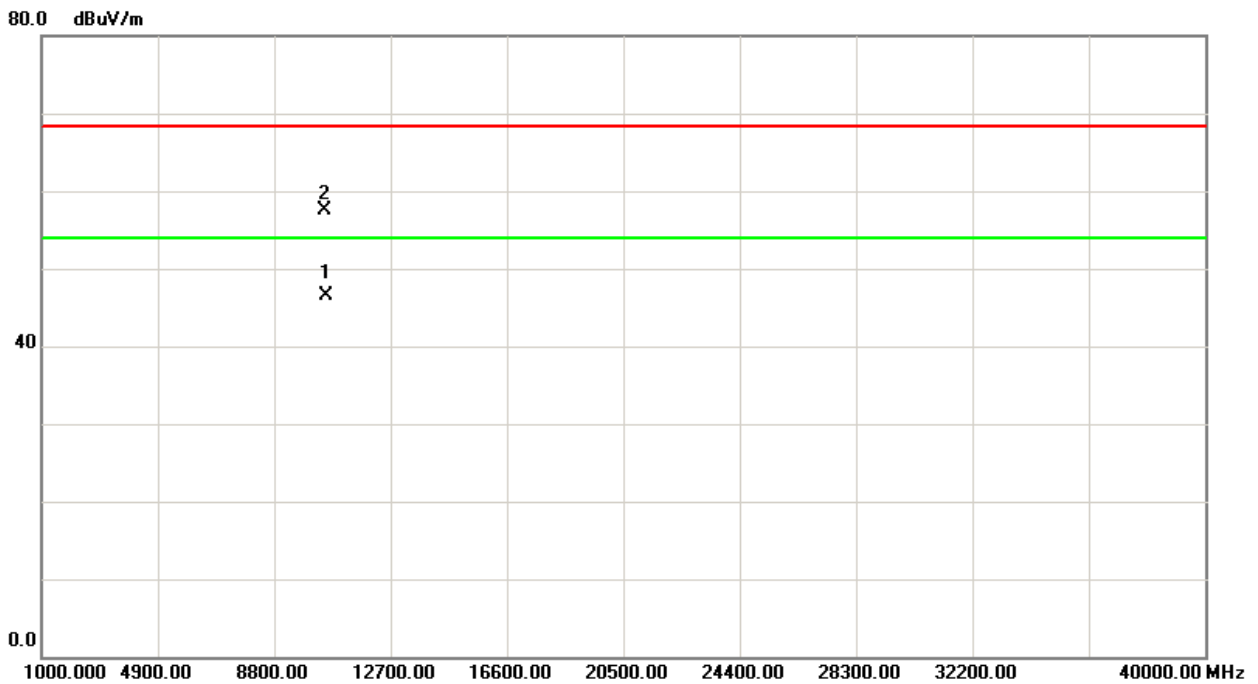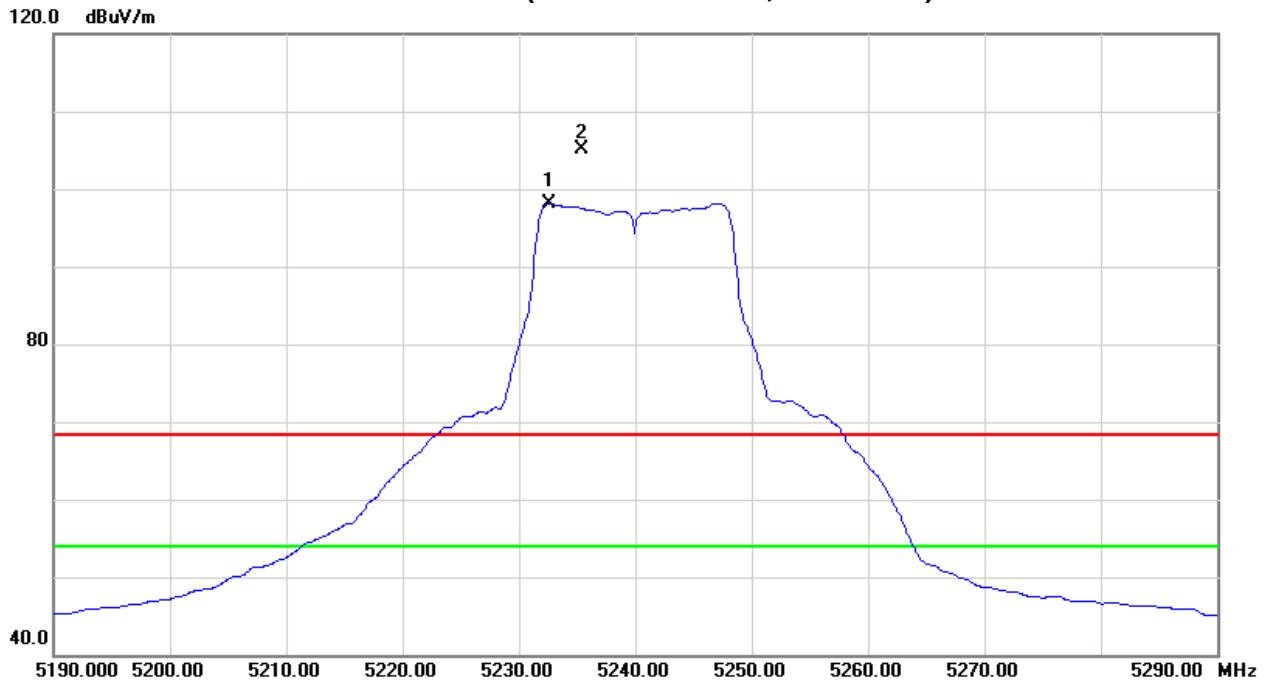



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	17.29	4.27	42.72	60.01	46.99	-44.76	-57.78	68.30	54.00	-27.00	-41.30	X/E
5175.70	V	60.44	52.70	42.78	103.22	95.48	-1.55	-9.29					X/F
10355.15	V	40.57	30.25	16.03	56.60	46.28	-48.17	-58.49	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis: X
Band 1/CH36(Above 1000 MHz, Vertical)

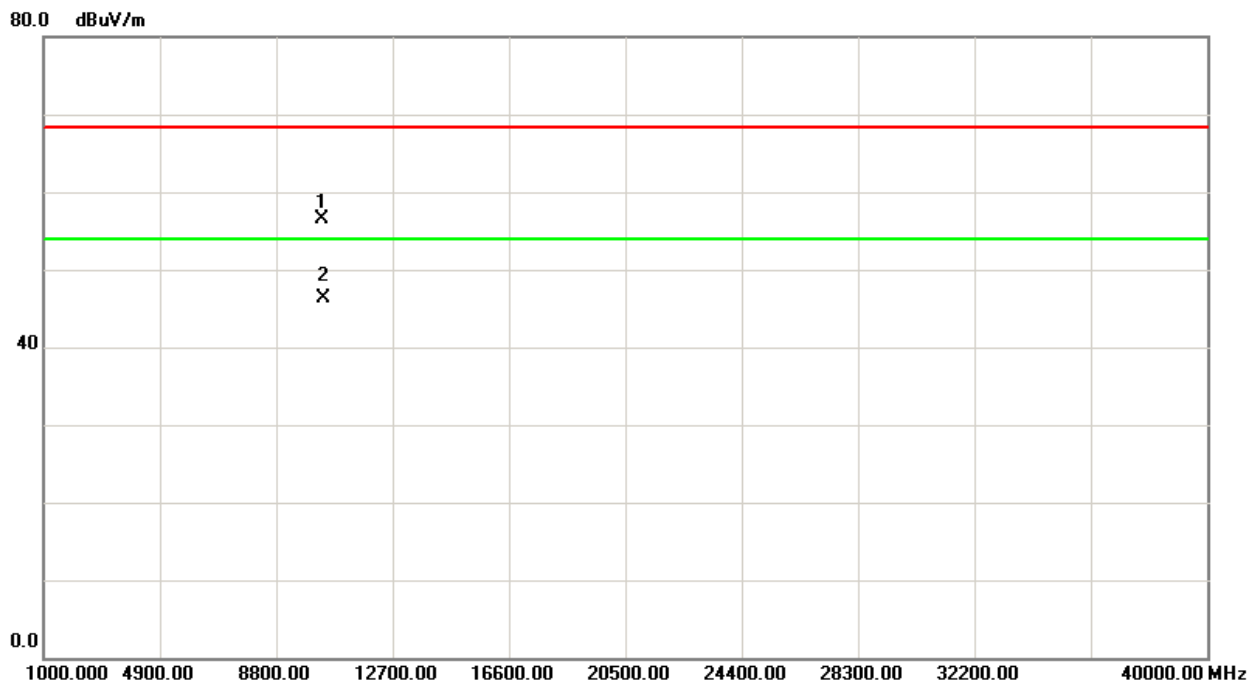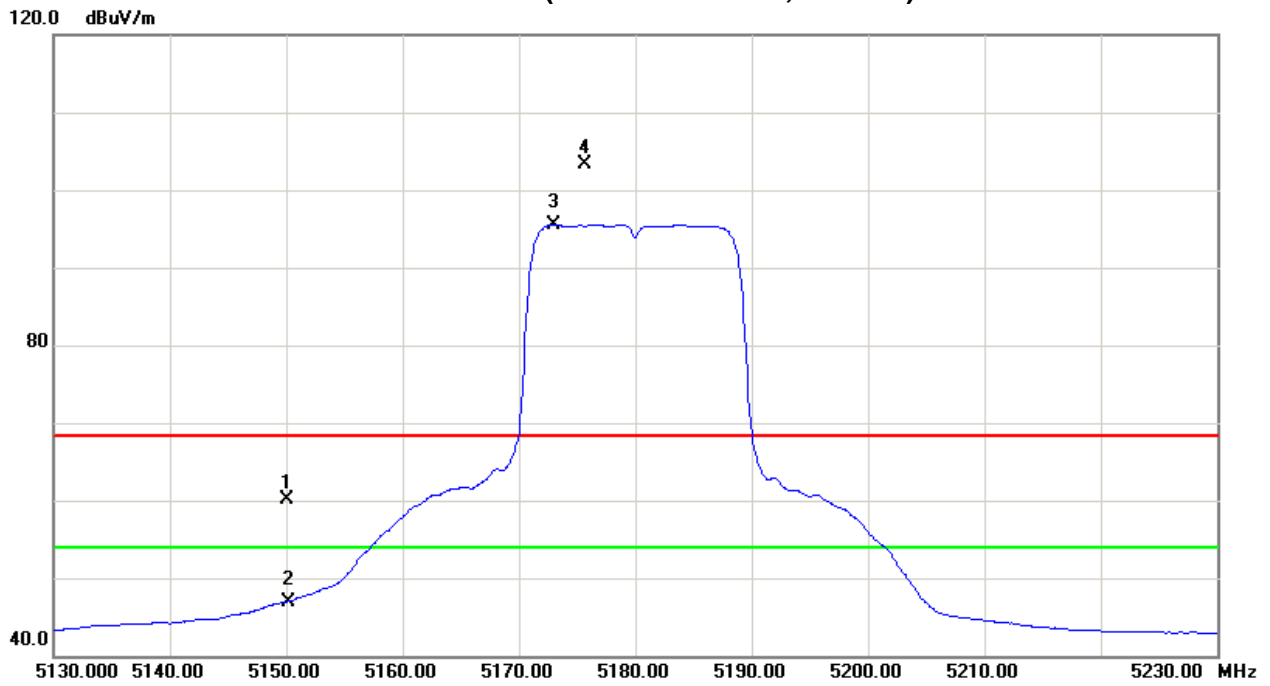



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	12.98	2.73	42.72	55.70	45.45	-49.07	-59.32	68.30	54.00	-27.00	-41.30	X/E
5182.50	H	63.10	53.91	42.80	105.90	96.71	1.13	-8.06					X/F
10363.00	H	40.86	30.12	16.02	56.88	46.14	-47.89	-58.63	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)

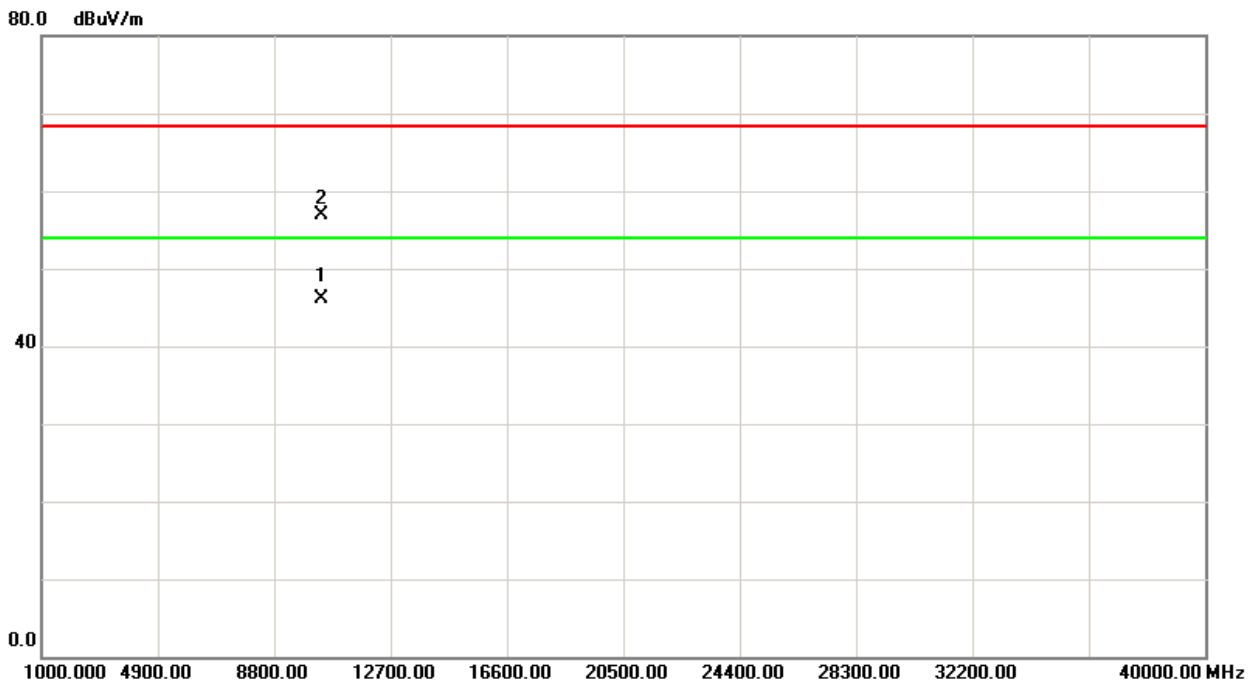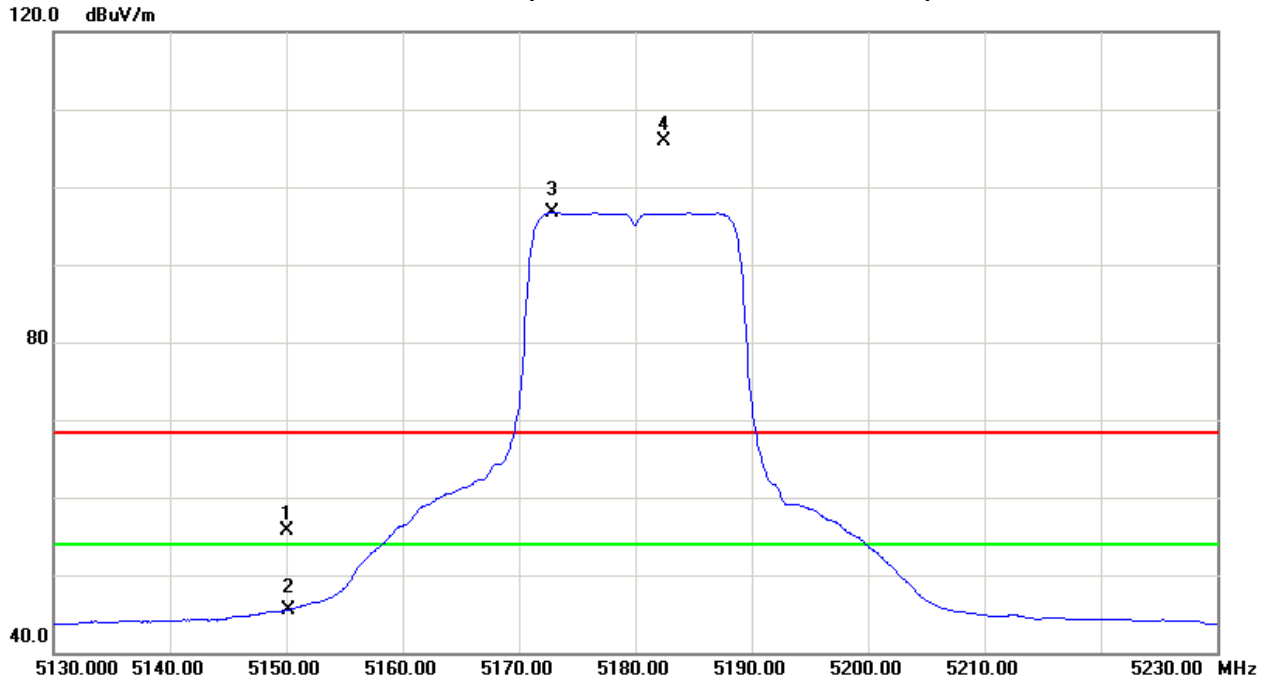



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5194.50	V	60.81	52.64	42.83	103.64	95.47	-1.13	-9.30					X/F
10404.30	V	40.83	30.25	15.96	56.79	46.21	-47.98	-58.56	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)

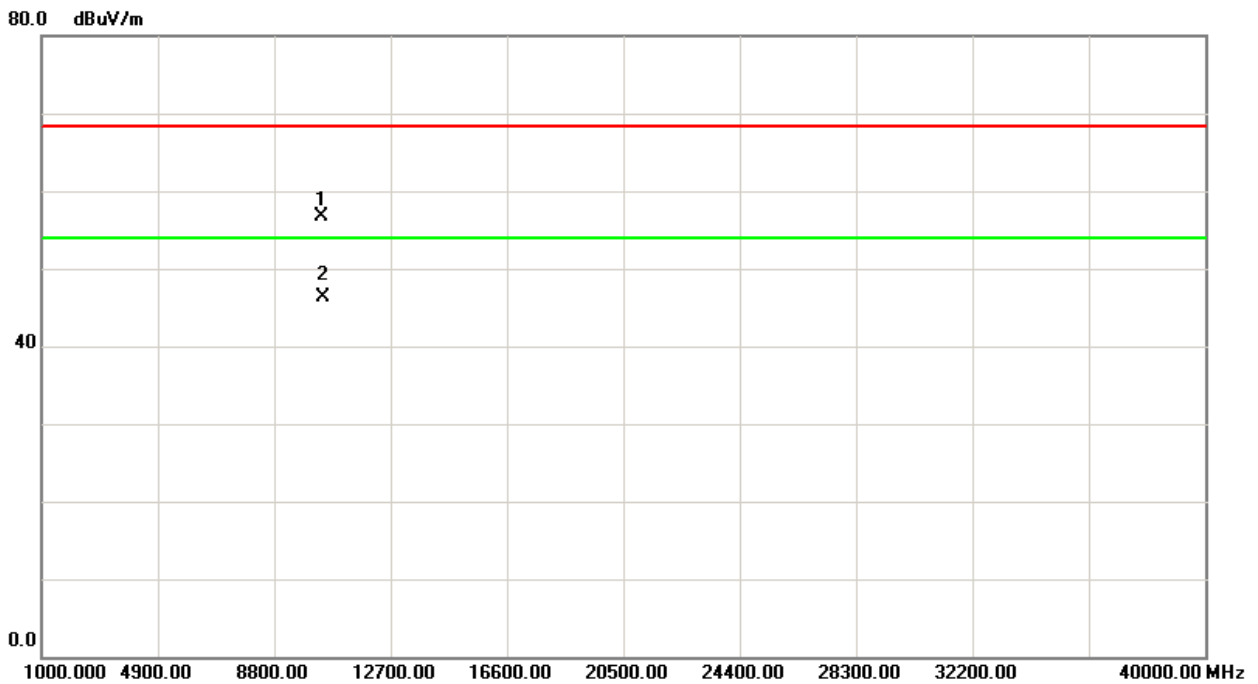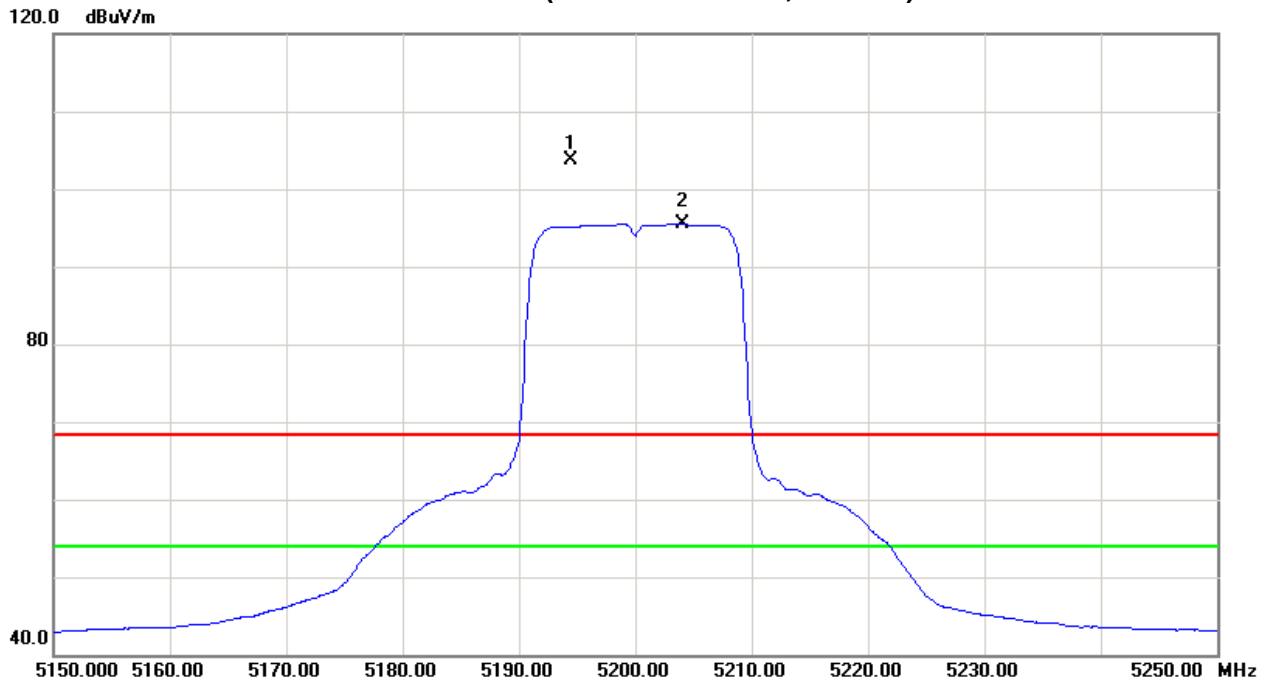



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5194.40	H	62.81	53.96	42.83	105.64	96.79	0.87	-7.98					X/F
10405.30	H	40.95	30.48	15.97	56.92	46.45	-47.85	-58.32	85.64	76.79	-9.66	-18.51	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis: X
Band 1/CH40(Above 1000 MHz, Horizontal)

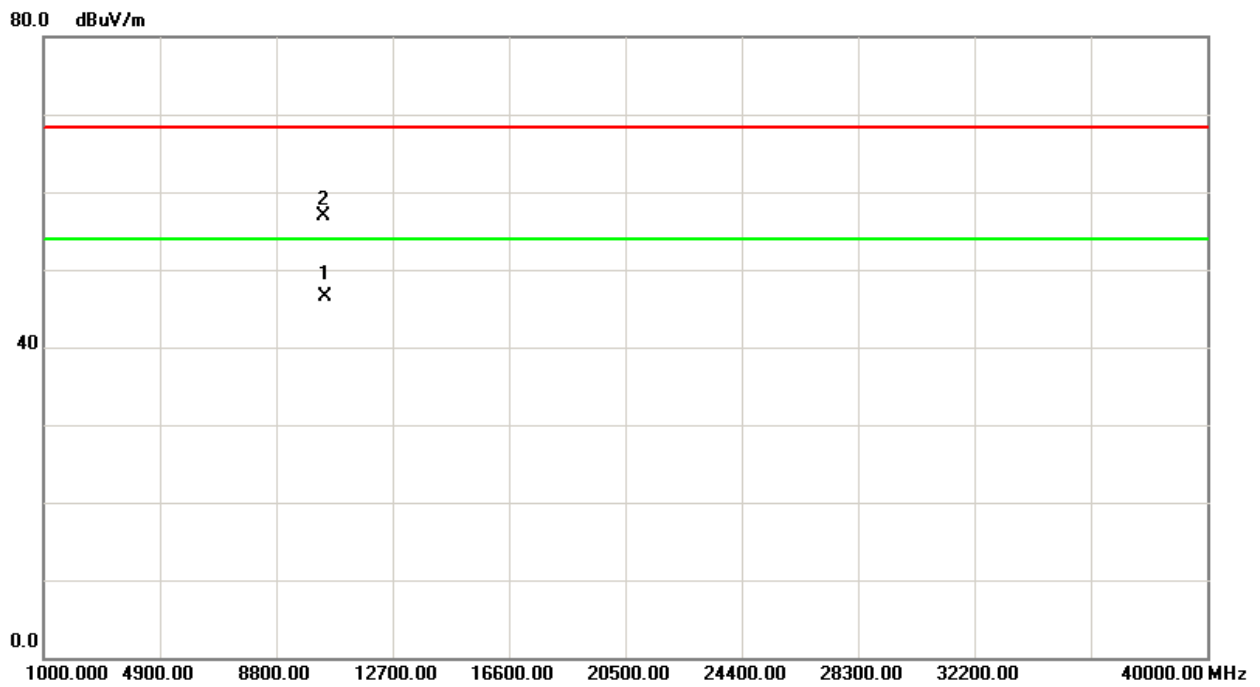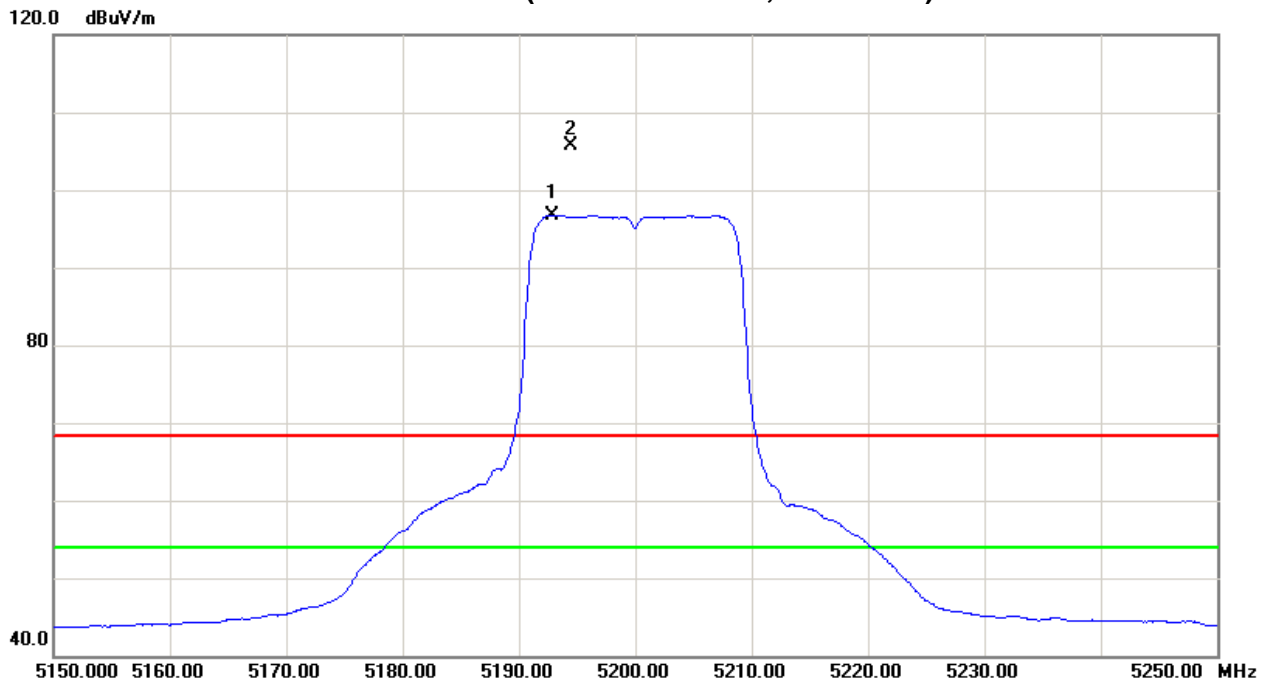



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5236.30	V	60.48	52.68	42.93	103.41	95.61	-1.36	-9.16					X/F
10485.15	V	40.67	30.31	15.84	56.51	46.15	-48.26	-58.62	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)

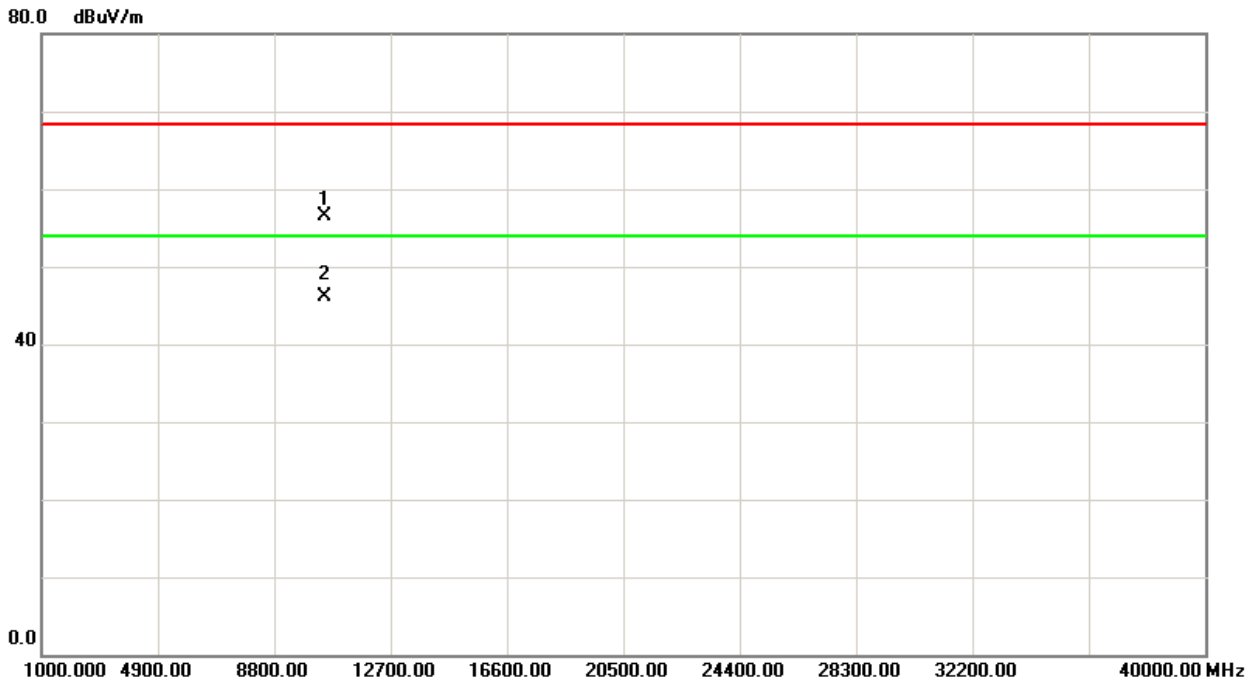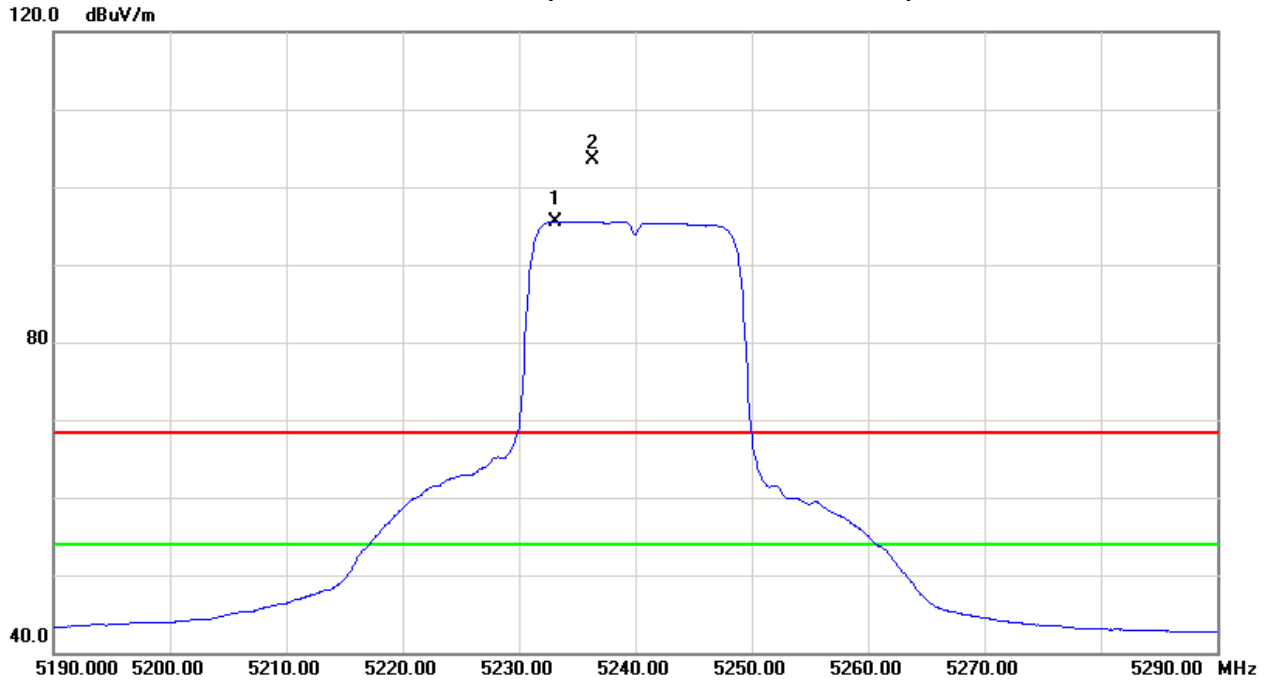



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5233.00	H	64.29	55.28	42.92	107.21	98.20	2.44	-6.57					X/F
10481.58	H	40.86	30.65	15.84	56.70	46.49	-48.07	-58.28	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)

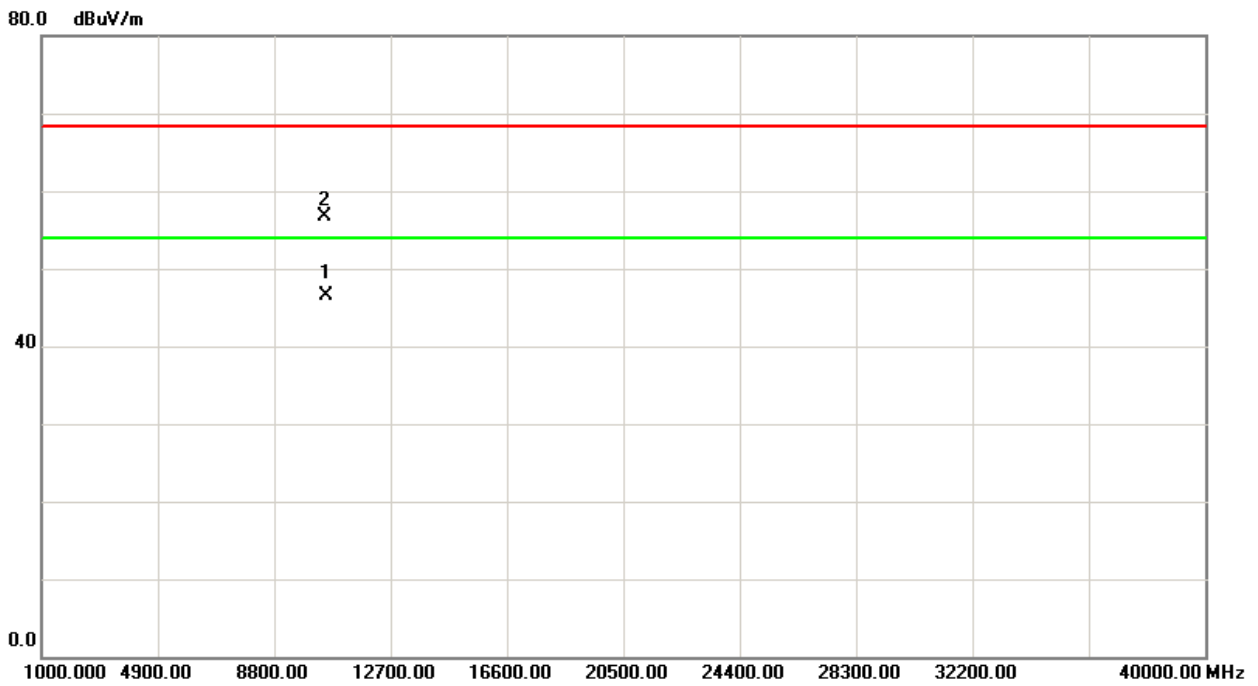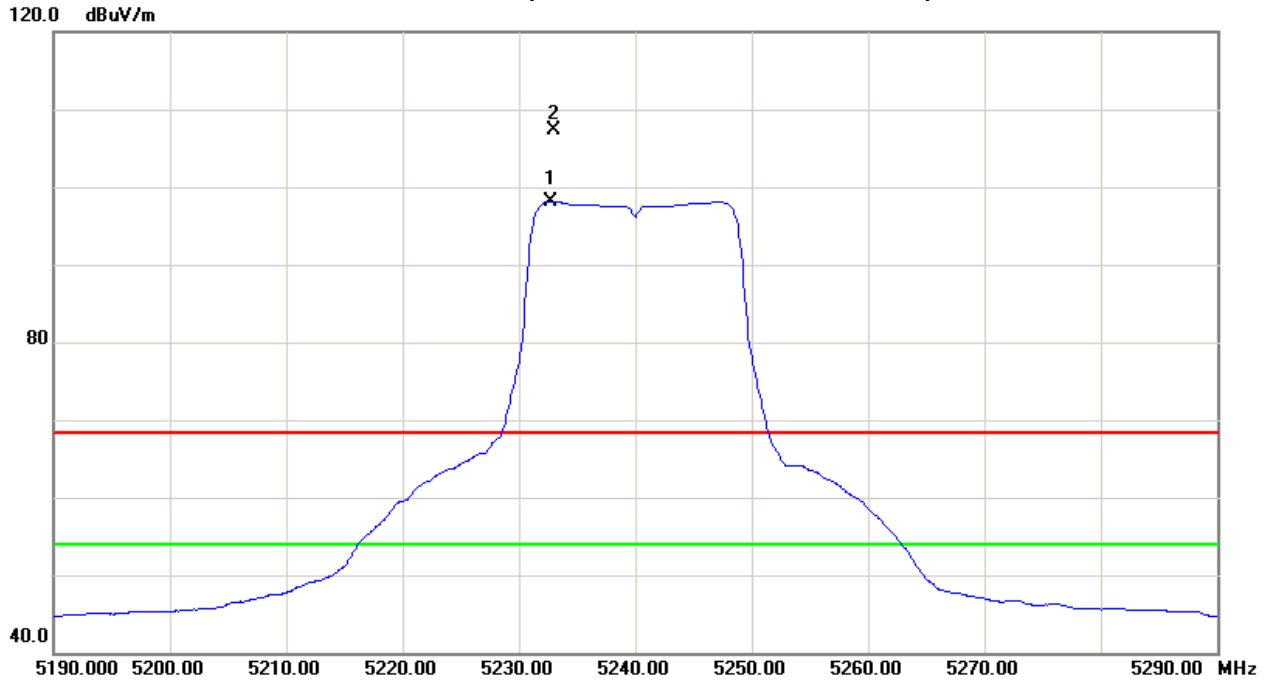



Neutron Engineering Inc.

EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	11.37	2.68	42.72	54.09	45.40	-50.68	-59.37	68.30	54.00	-27.00	-41.30	X/E
5185.40	V	52.79	44.02	42.81	95.60	86.83	-9.17	-17.94					X/F
10371.15	V	37.35	26.57	16.01	53.36	42.58	-51.41	-62.19	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Vertical)

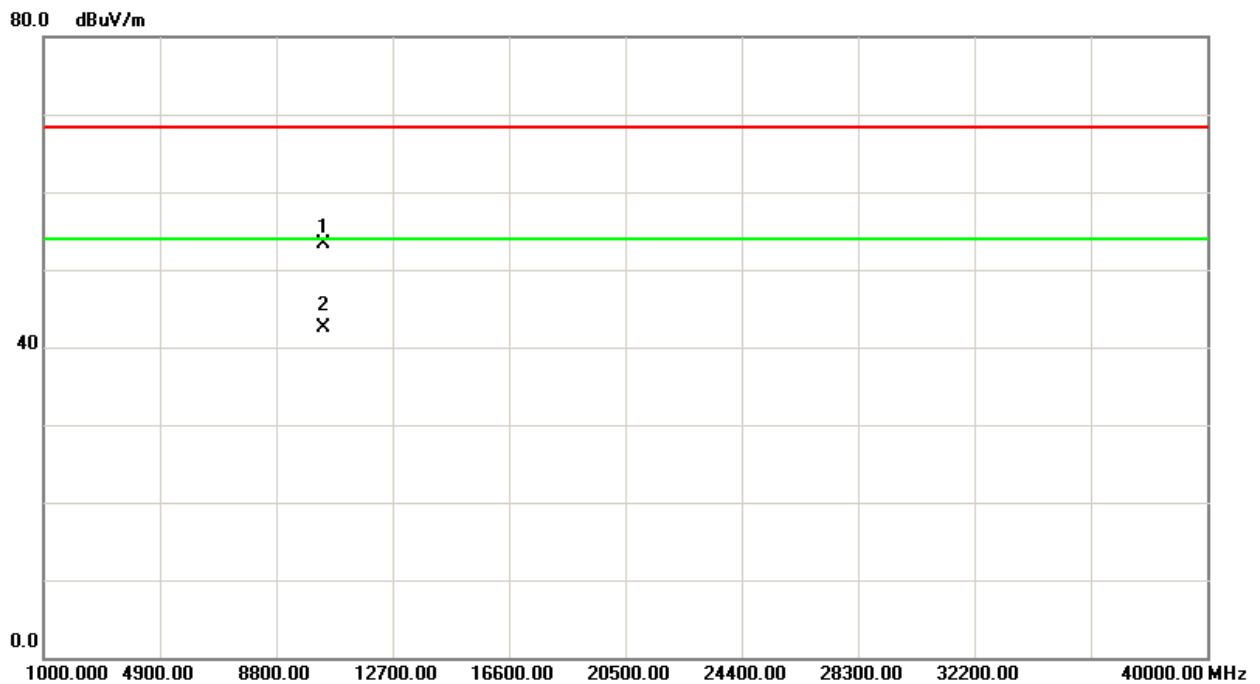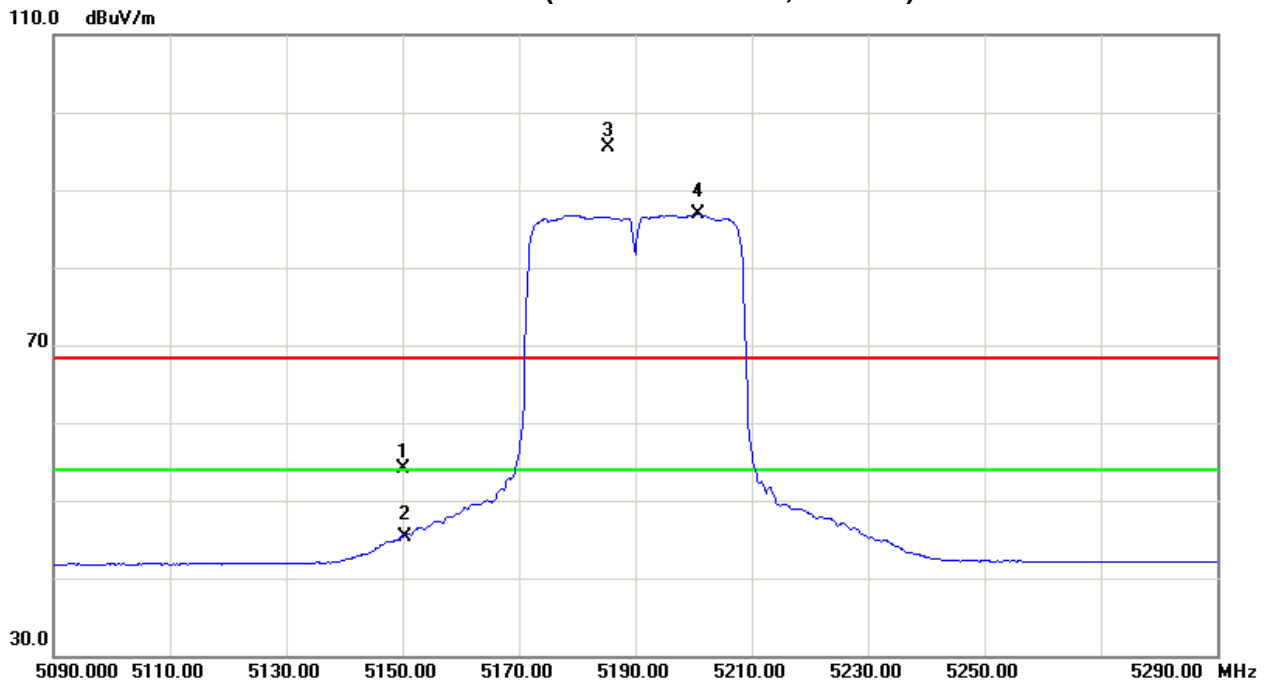



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	12.41	2.66	42.72	55.13	45.38	-49.64	-59.39	68.30	54.00	-27.00	-41.30	X/E
5191.40	H	56.43	45.55	42.82	99.25	88.37	-5.52	-16.40					X/F
10386.15	H	37.87	26.87	15.98	53.85	42.85	-50.92	-61.92	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Horizontal)

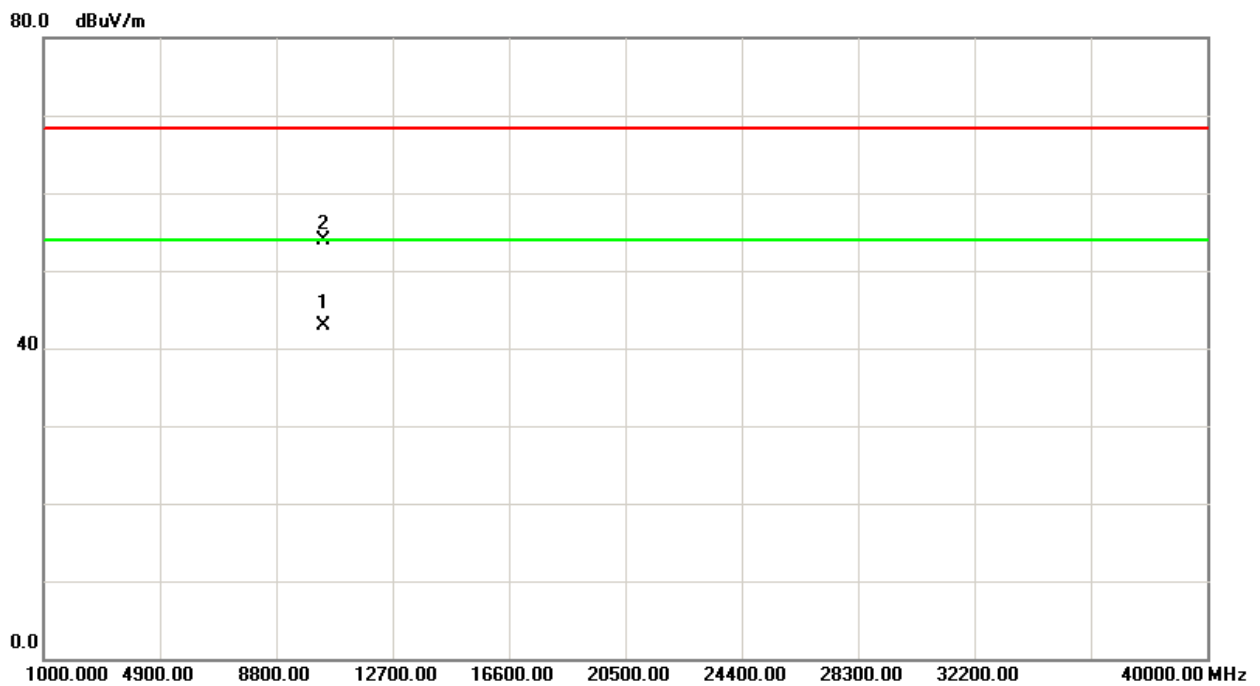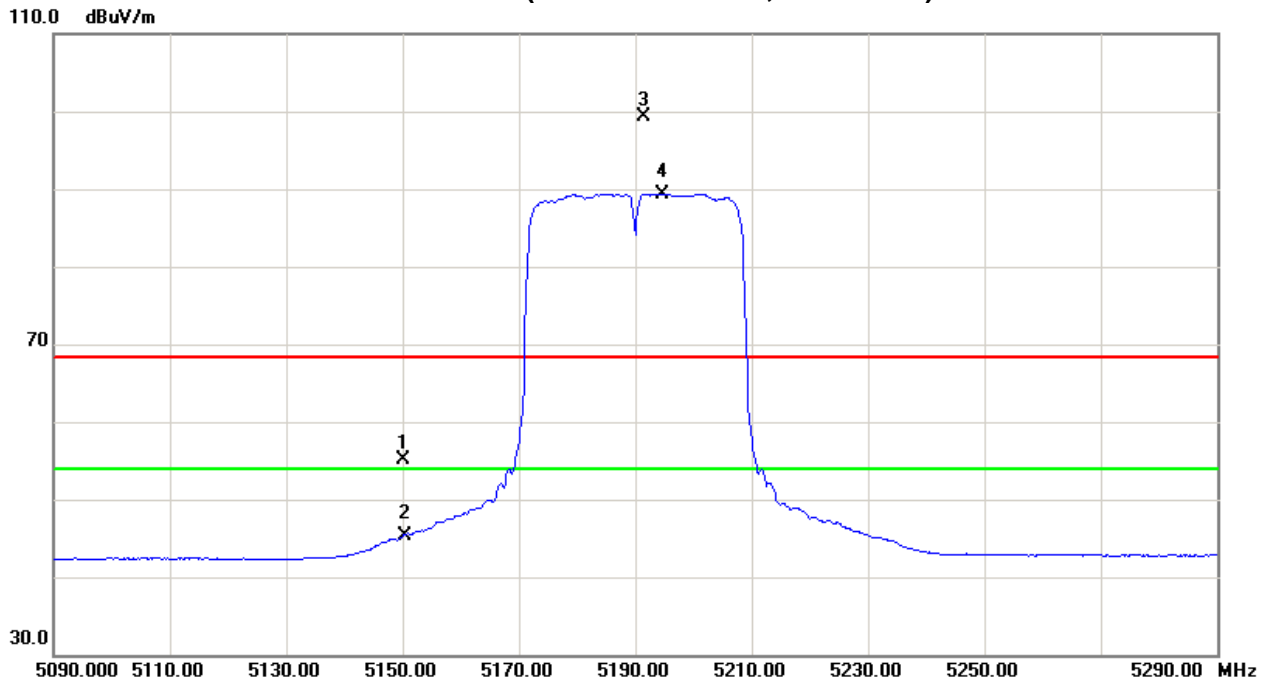



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5230MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5225.40	V	52.06	44.44	42.90	94.96	87.34	-9.81	-17.43					X/F
10455.16	V	37.15	26.37	15.89	53.04	42.26	-51.73	-62.51	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Vertical)

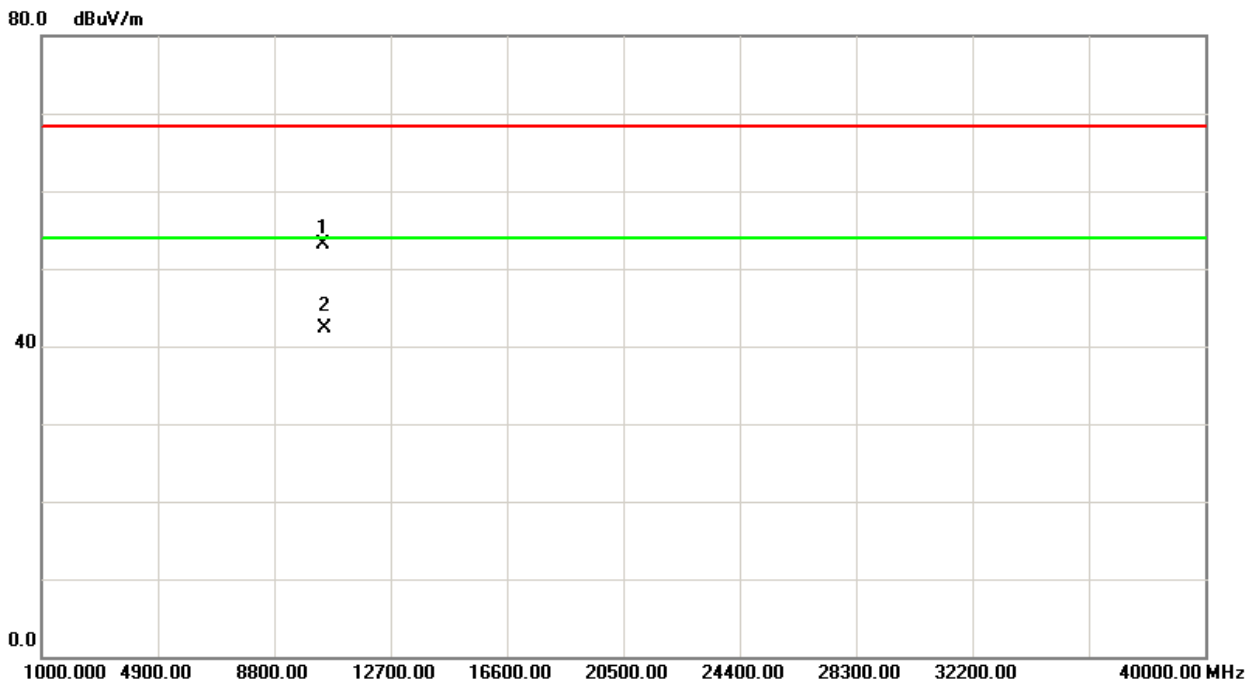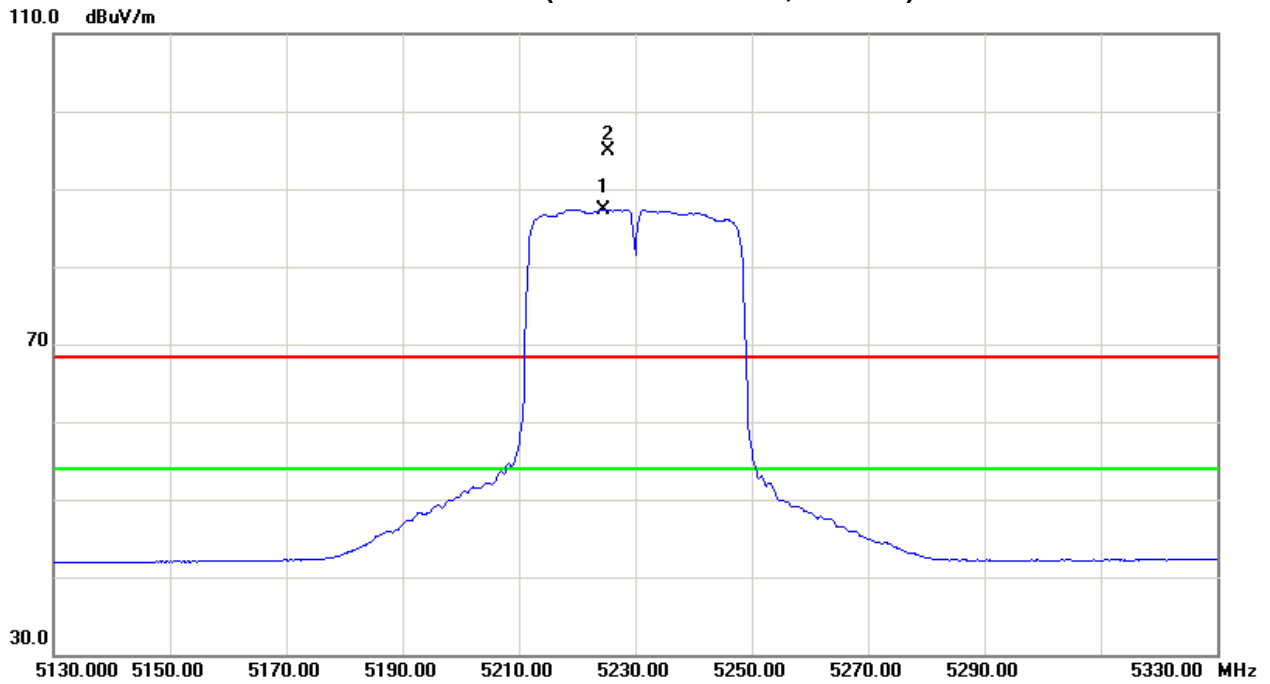



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5230MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5231.20	H	58.39	48.98	42.92	101.31	91.90	-3.46	-12.87					X/F
10456.05	H	37.56	26.58	15.89	53.45	42.47	-51.32	-62.30	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Horizontal)

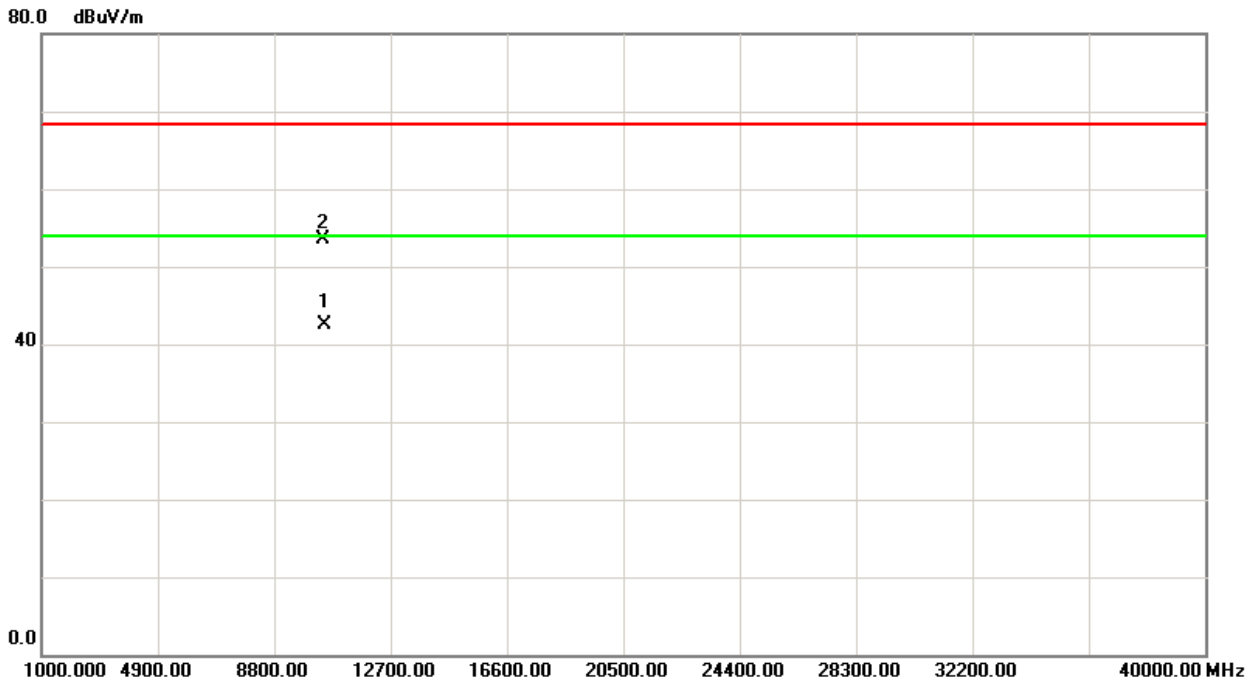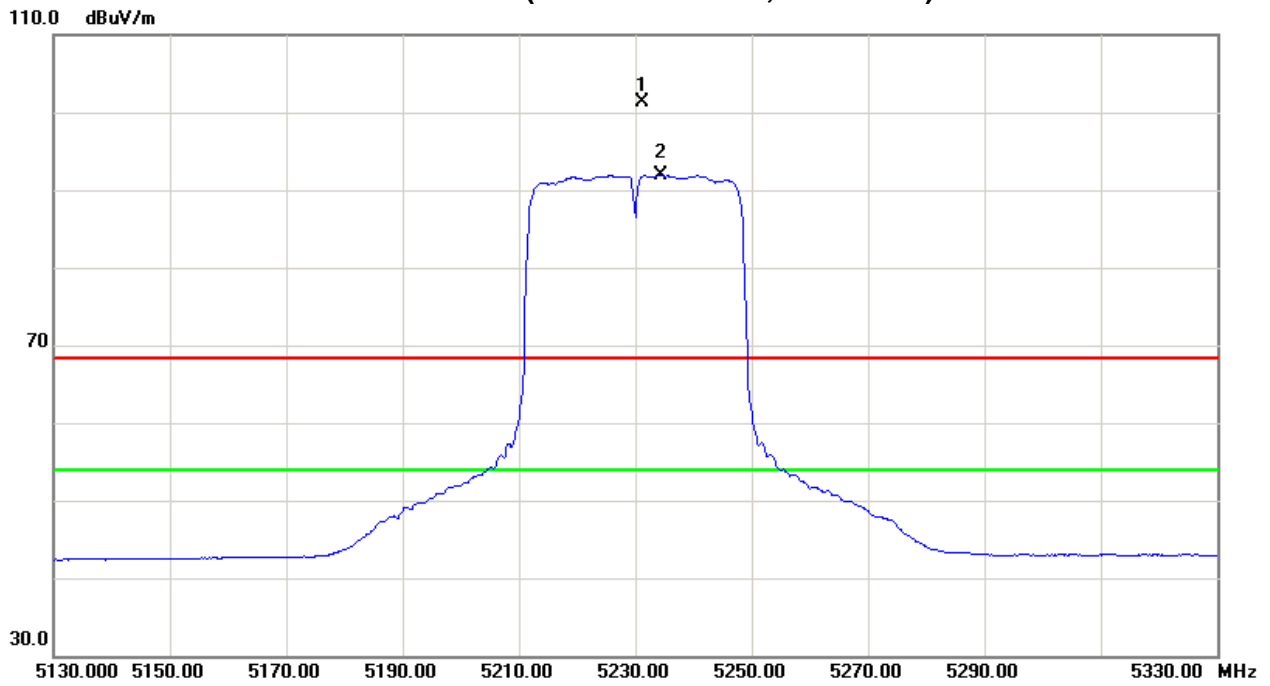



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBUV/m)		Act.(dBm)		Limit(dBUV/m)		Limit(dBm)		Note
		Peak (dBUV)	AV (dBUV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	21.38	7.93	42.72	64.10	50.65	-40.67	-54.12	68.30	54.00	-27.00	-41.30	X/E
5177.80	V	64.41	56.94	42.78	107.19	99.72	2.42	-5.05					X/F
10361.90	V	41.49	30.68	16.02	57.51	46.70	-47.26	-58.07	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)

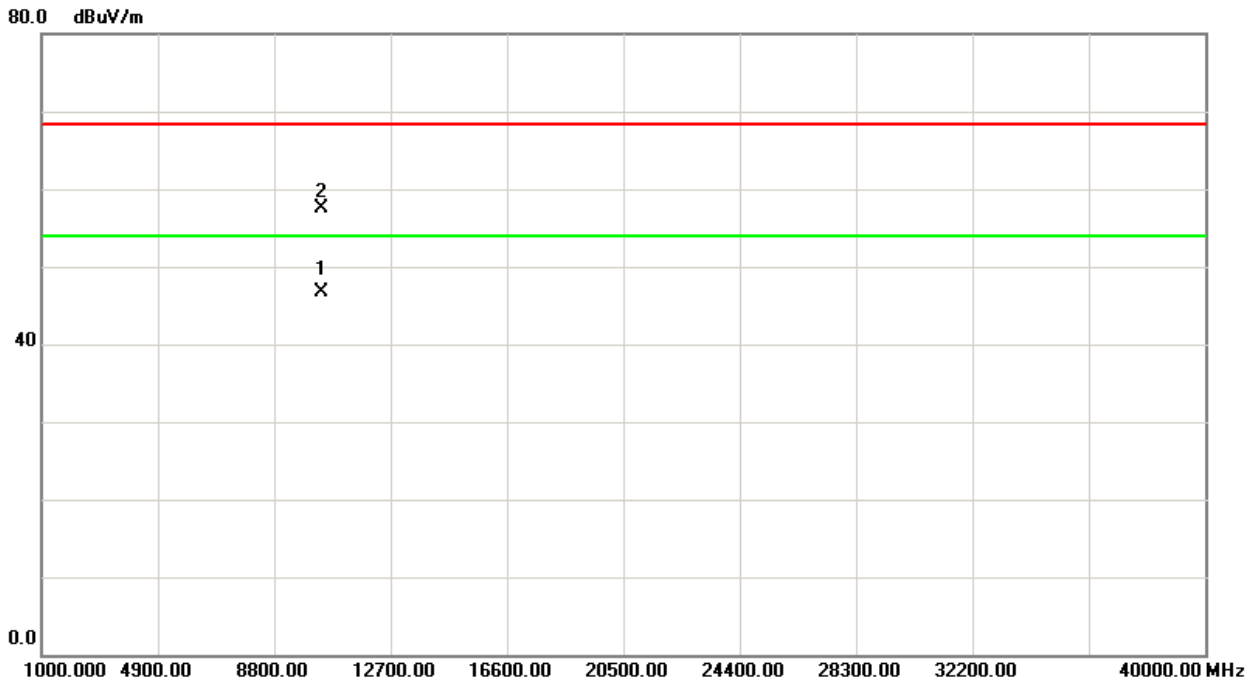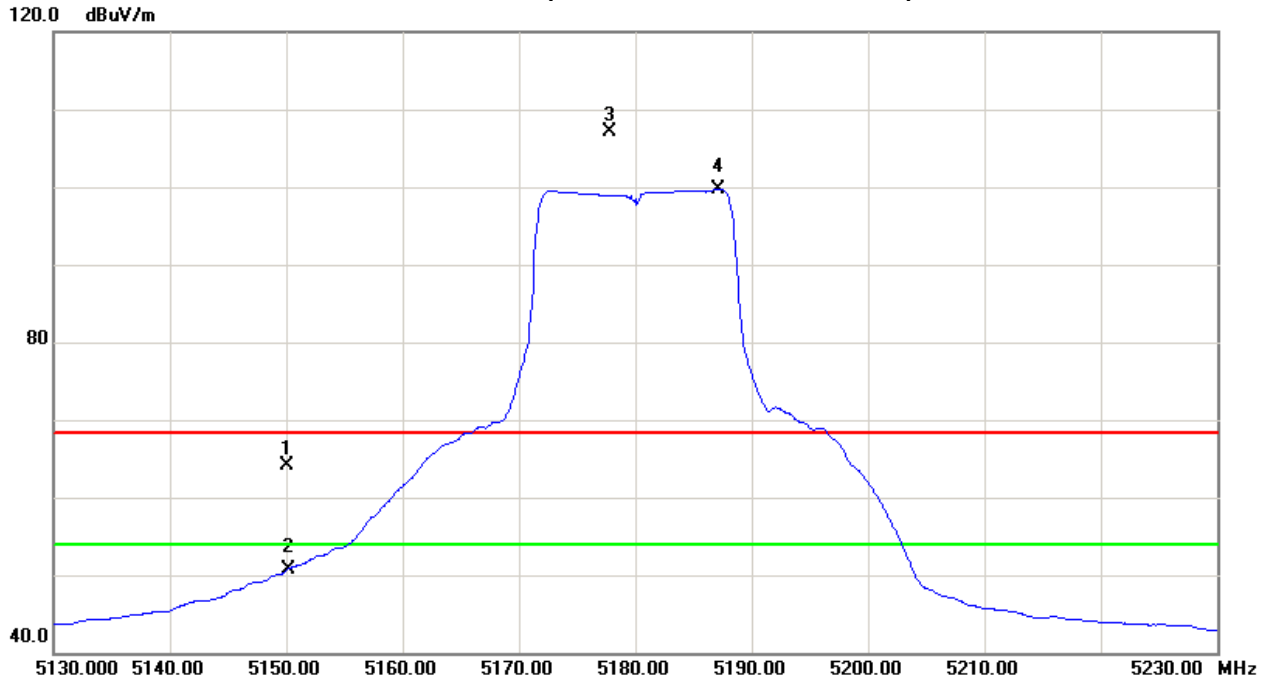



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	10.15	0.63	42.72	52.87	43.35	-51.90	-61.42	68.30	54.00	-27.00	-41.30	X/E
5176.20	H	52.89	45.90	42.78	95.67	88.68	-9.10	-16.09					X/F
10354.95	H	40.30	29.90	16.04	56.34	45.94	-48.43	-58.83	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)

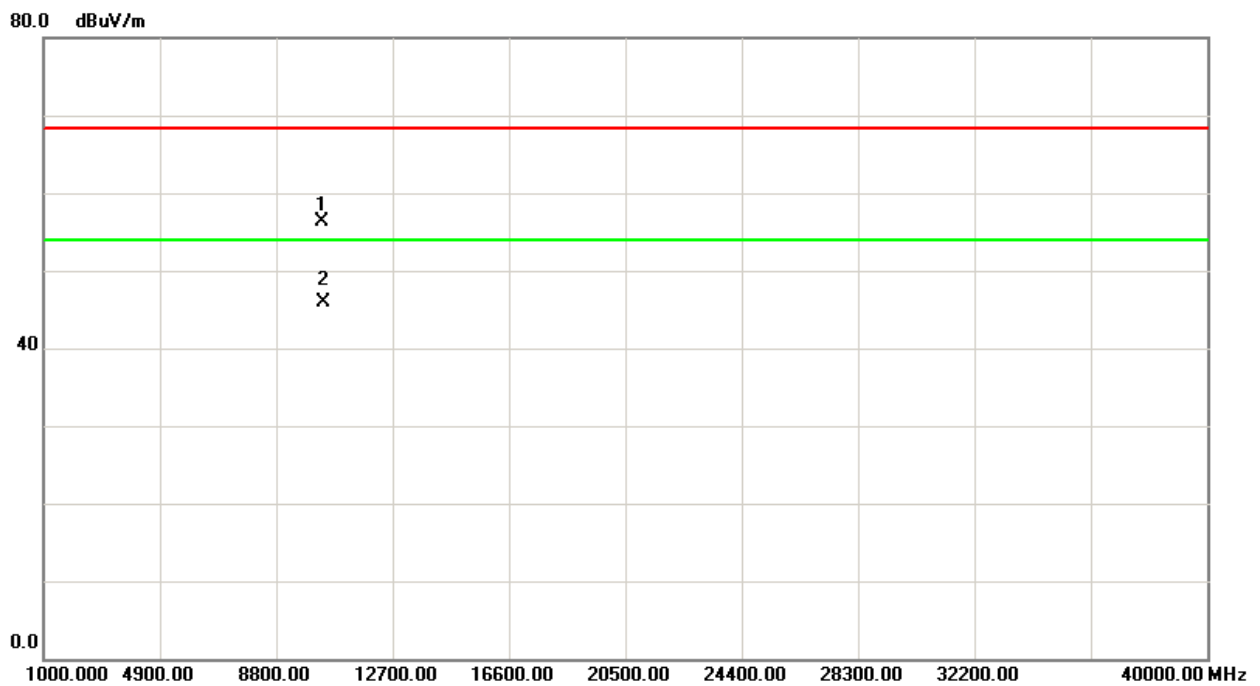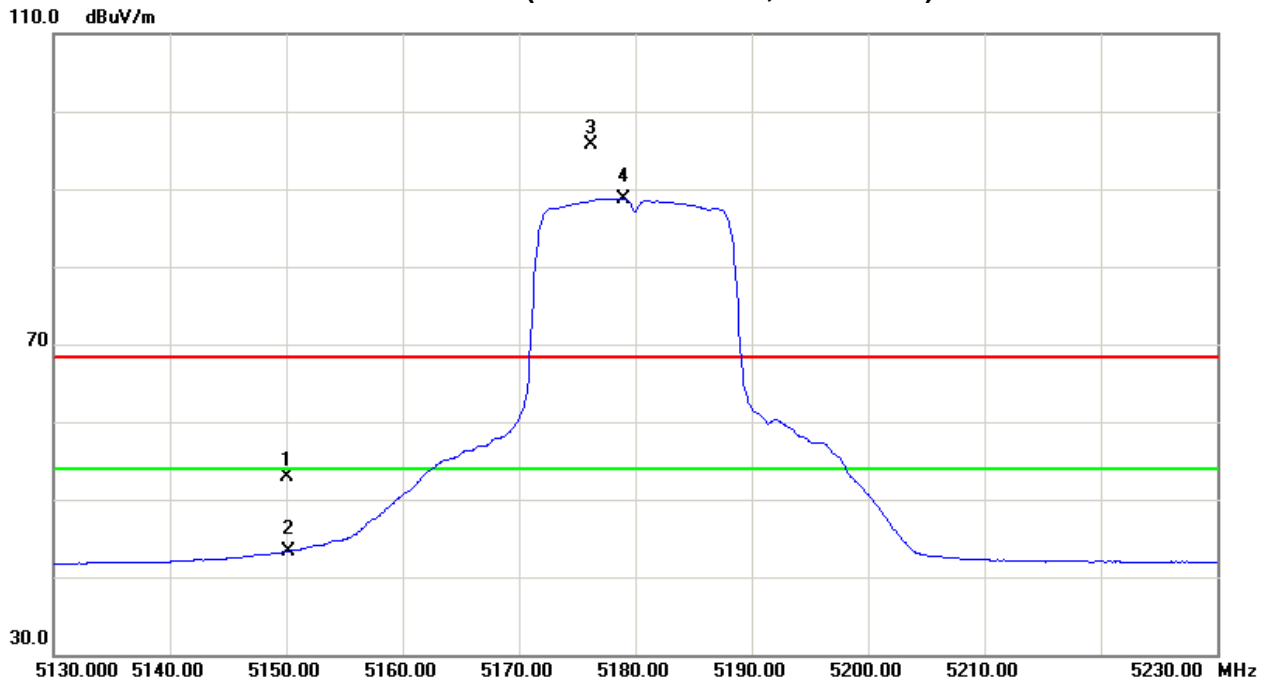



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5192.90	V	64.21	55.93	42.83	107.04	98.76	2.27	-6.01					X/F
10401.17	V	41.45	30.35	15.96	57.41	46.31	-47.36	-58.46	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)

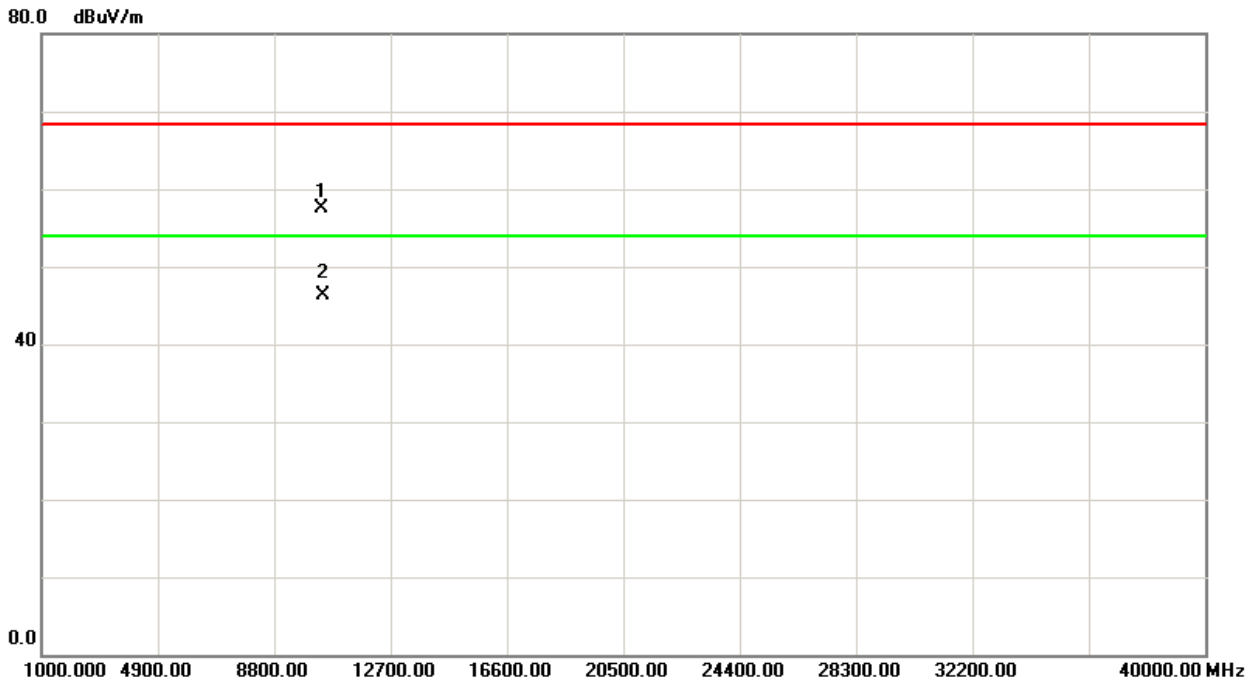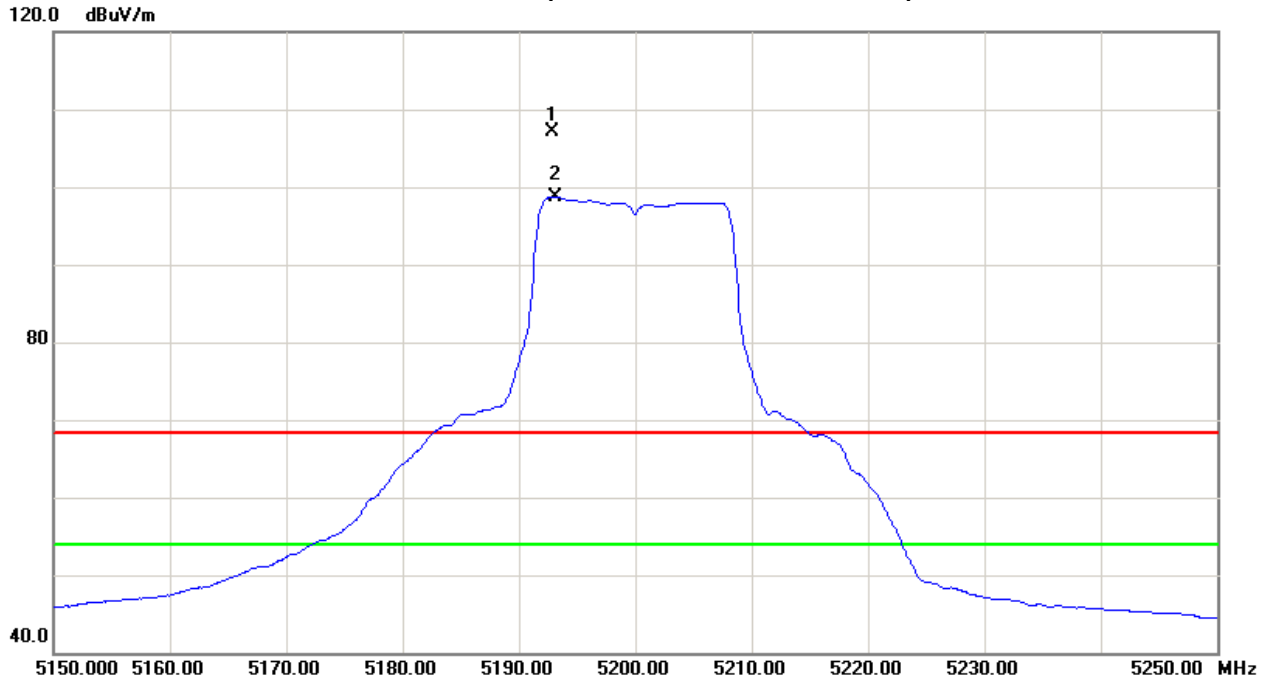



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5197.50	H	54.00	46.56	42.84	96.84	89.40	-7.93	-15.37					X/F
10401.25	H	40.75	29.56	15.96	56.71	45.52	-48.06	-59.25	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)

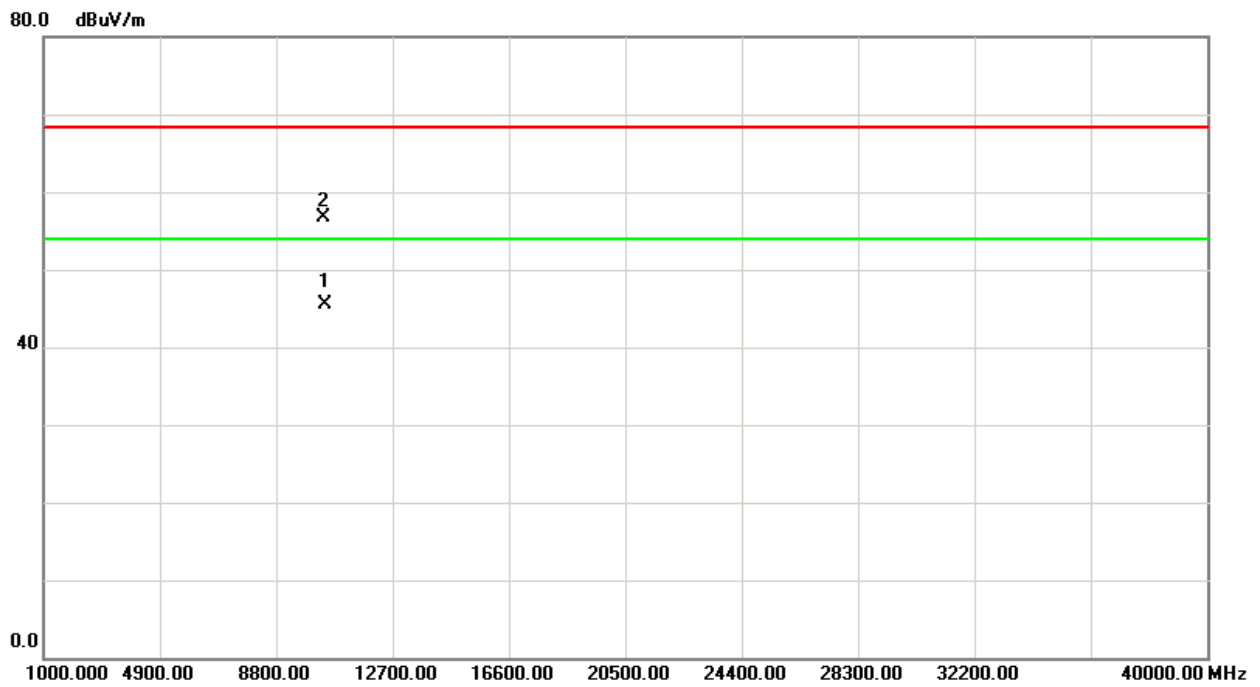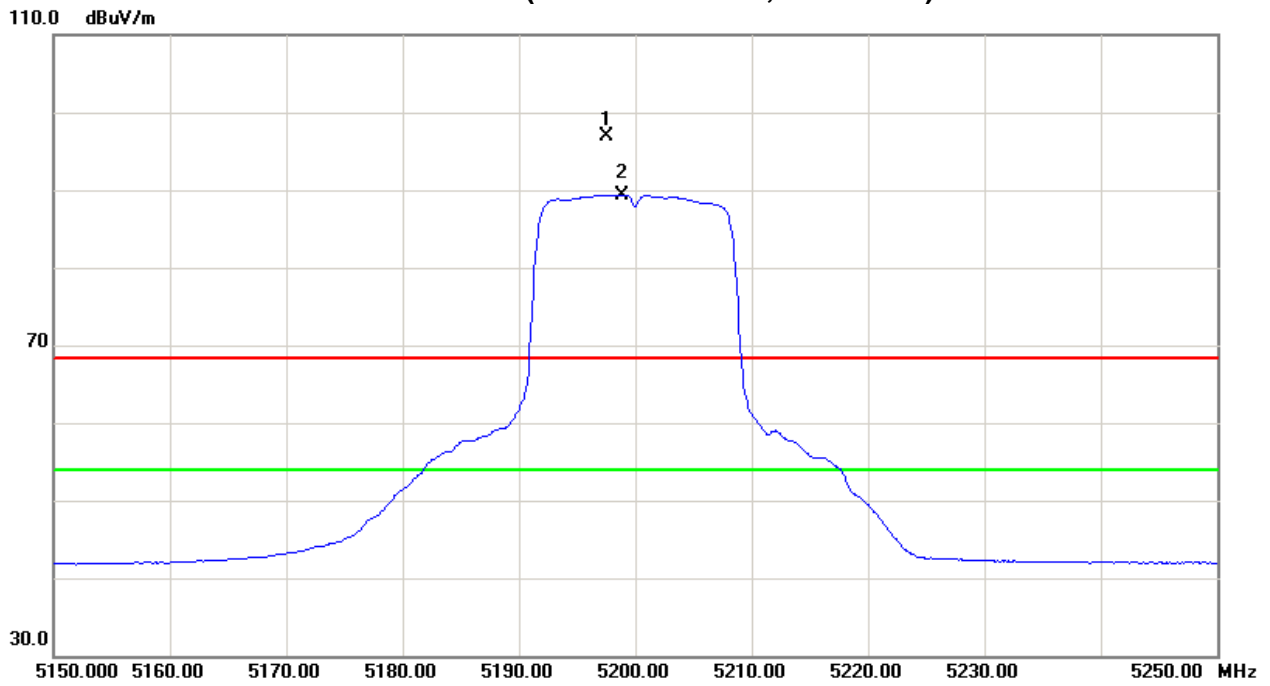



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5234.40	V	64.17	56.00	42.93	107.10	98.93	2.33	-5.84					X/F
10480.35	V	41.38	30.37	15.85	57.23	46.22	-47.54	-58.55	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)

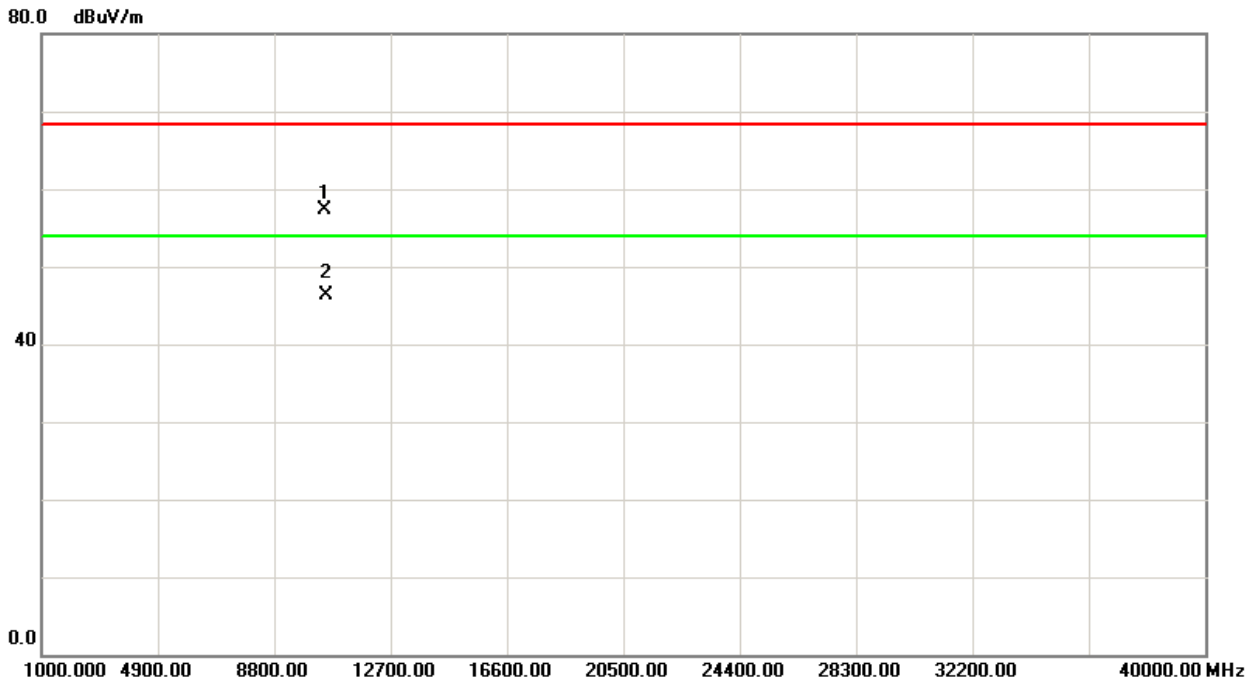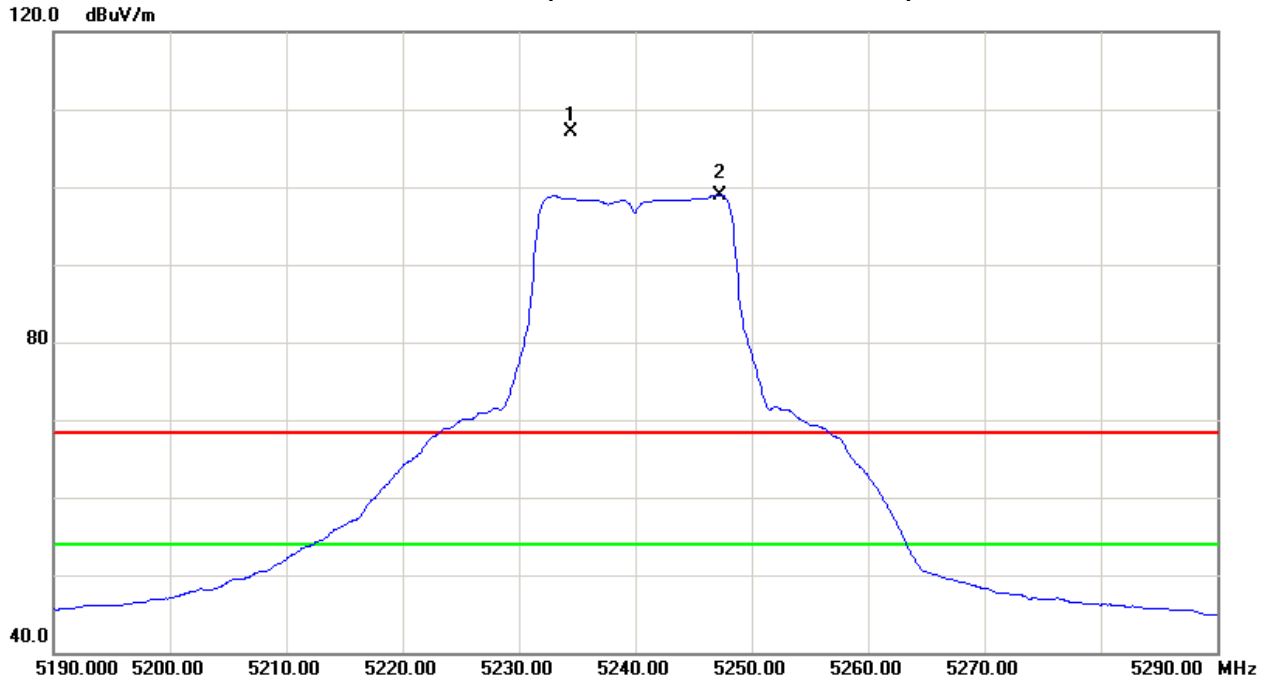



Neutron Engineering Inc.

EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5235.60	H	54.55	47.26	42.93	97.48	90.19	-7.29	-14.58					X/F
10481.20	H	40.68	29.58	15.85	56.53	45.43	-48.24	-59.34	77.48	70.19	-17.82	-25.11	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)

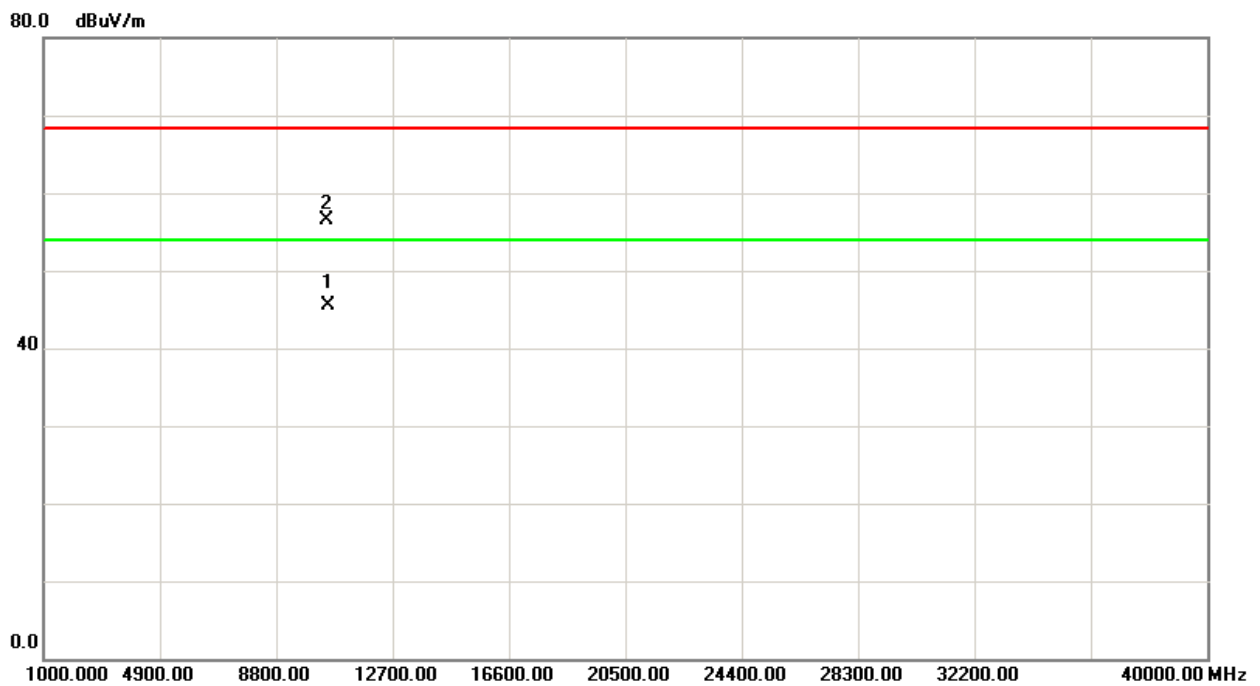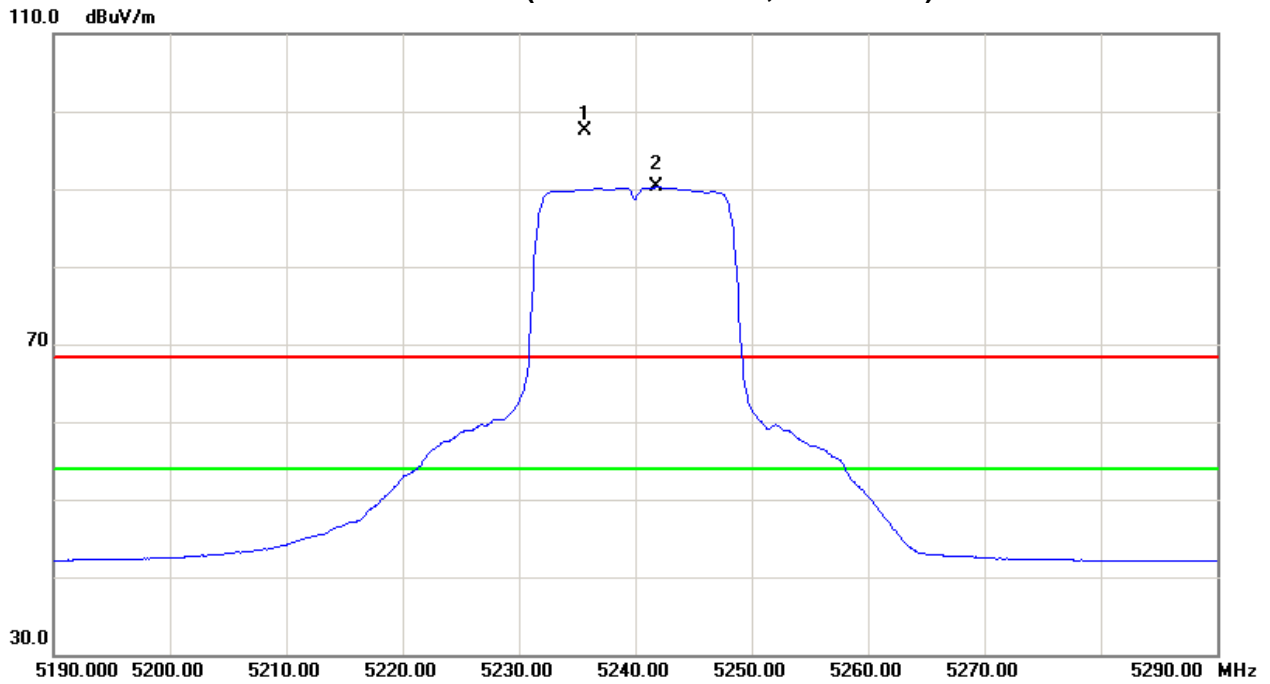



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	15.42	4.71	42.72	58.14	47.43	-46.63	-57.34	68.30	54.00	-27.00	-41.30	X/E
5185.70	V	62.61	53.53	42.78	105.39	96.31	0.62	-8.46					X/F
10355.15	V	40.52	30.25	16.03	56.55	46.28	-48.22	-58.49	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)

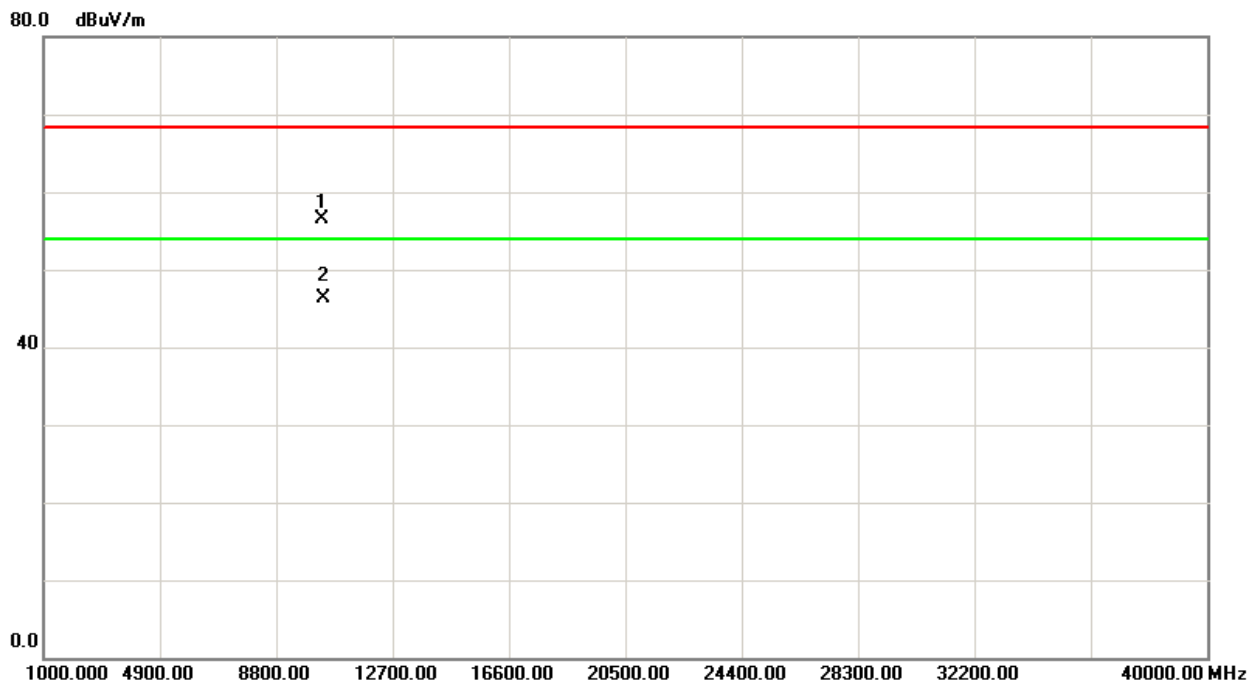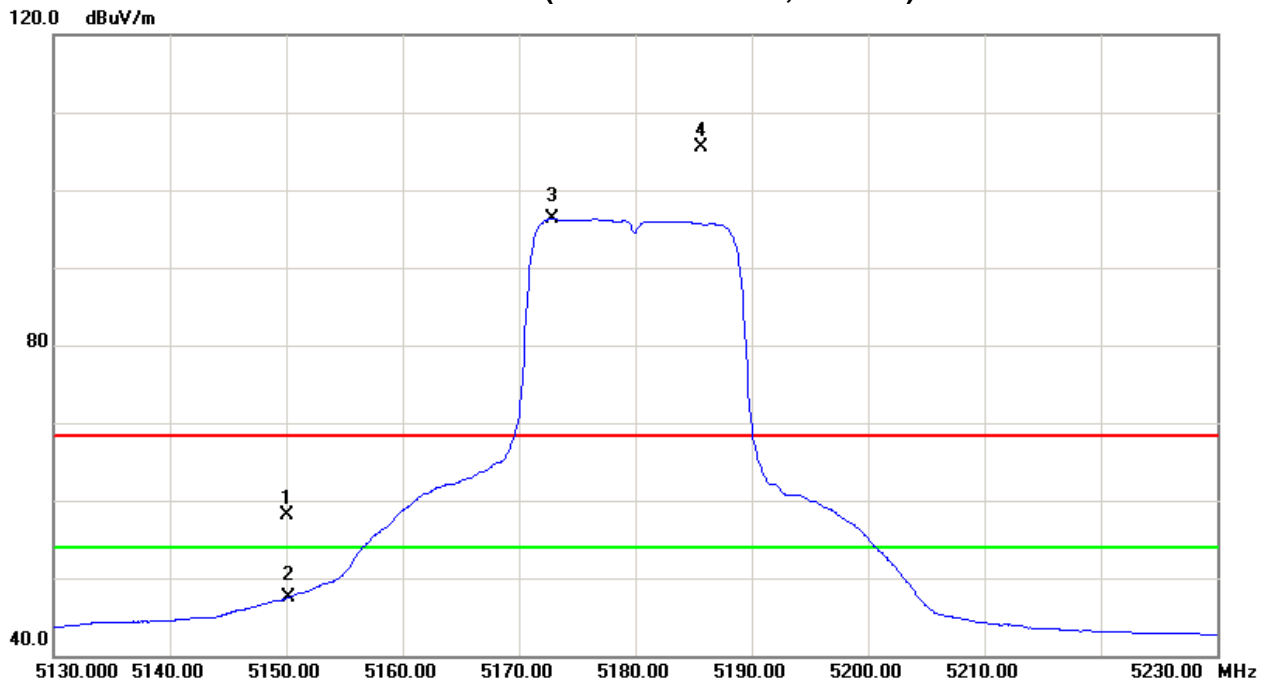



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	8.18	-0.03	42.72	50.90	42.69	-53.87	-62.08	68.30	54.00	-27.00	-41.30	X/E
5181.40	H	53.99	44.92	42.80	96.79	87.72	-7.98	-17.05					X/F
10363.00	H	40.25	29.12	16.02	56.27	45.14	-48.50	-59.63	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)

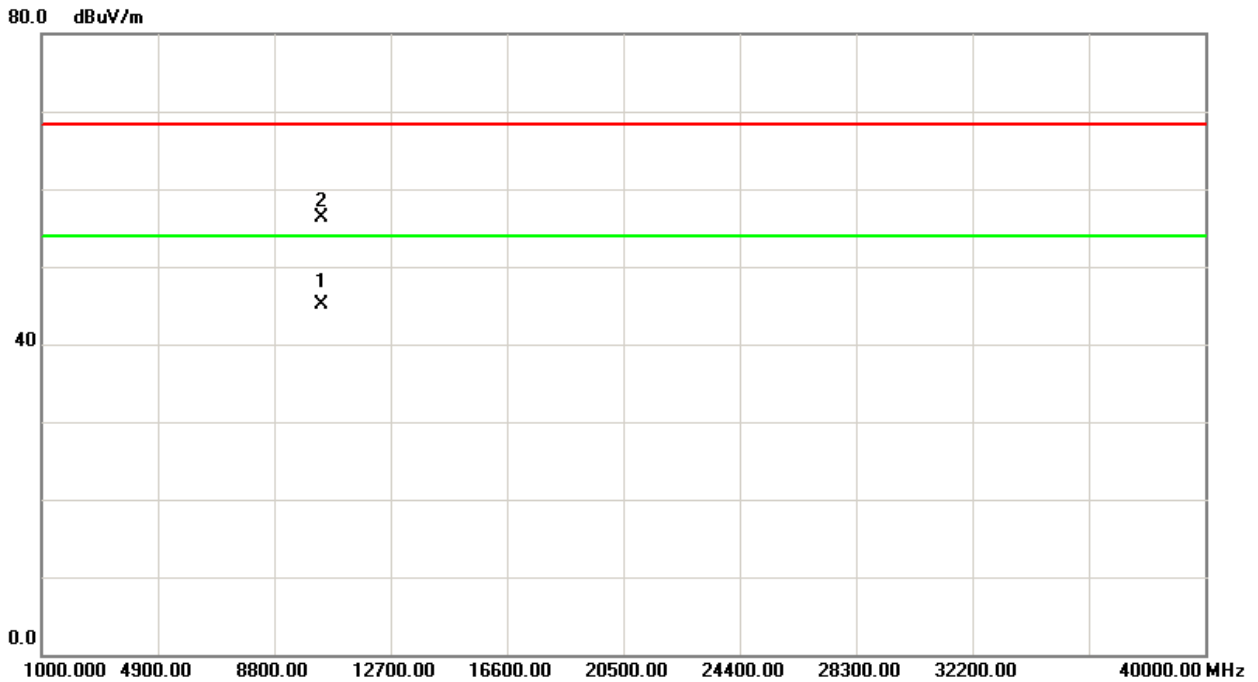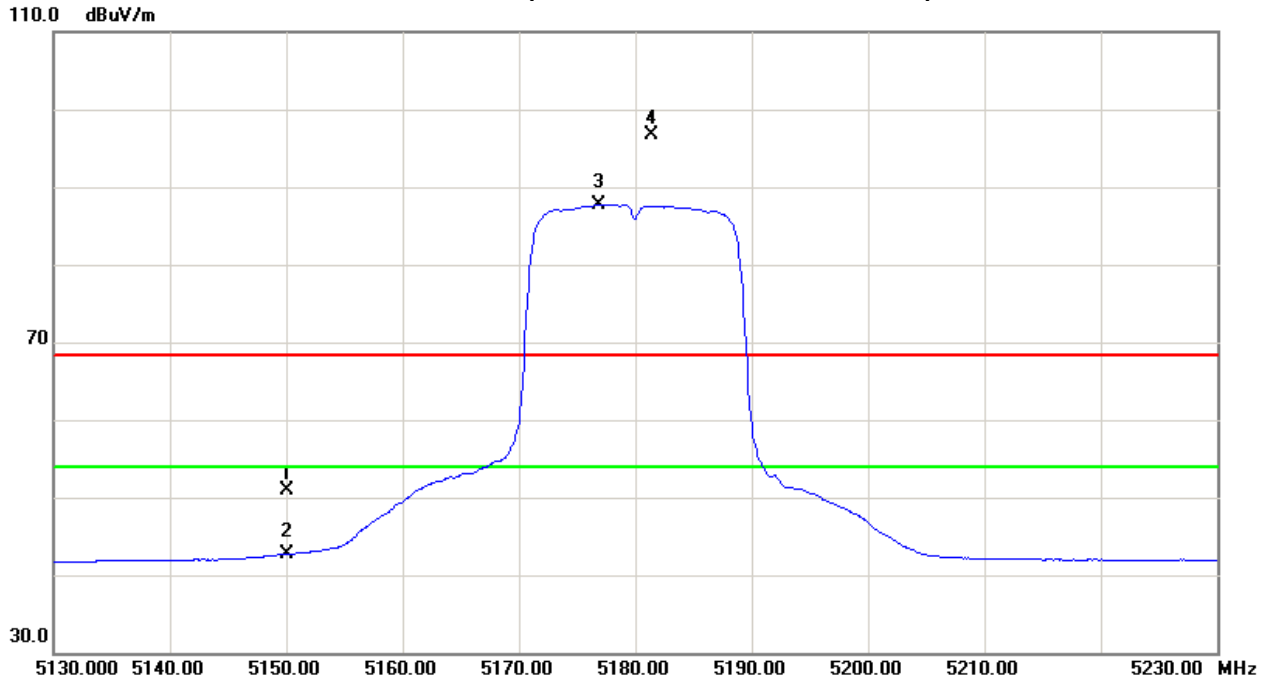



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5193.10	V	61.95	53.25	42.83	104.78	96.08	0.01	-8.69					X/F
10404.30	V	40.83	30.25	15.96	56.79	46.21	-47.98	-58.56	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)

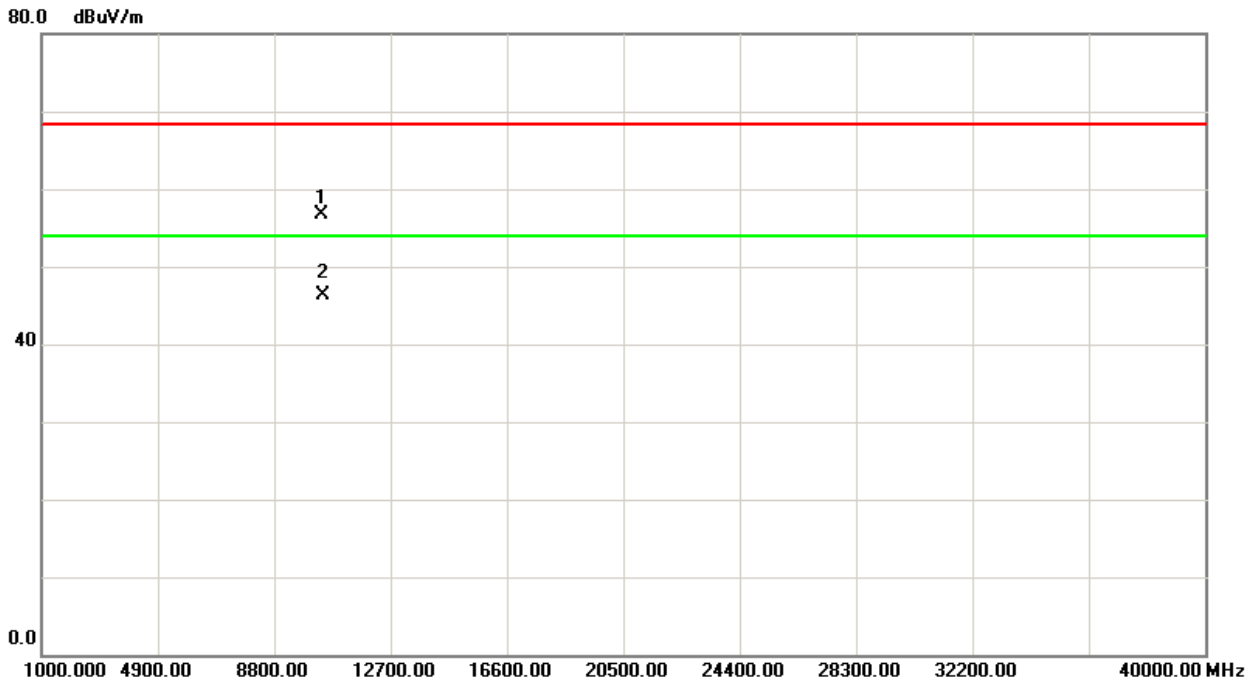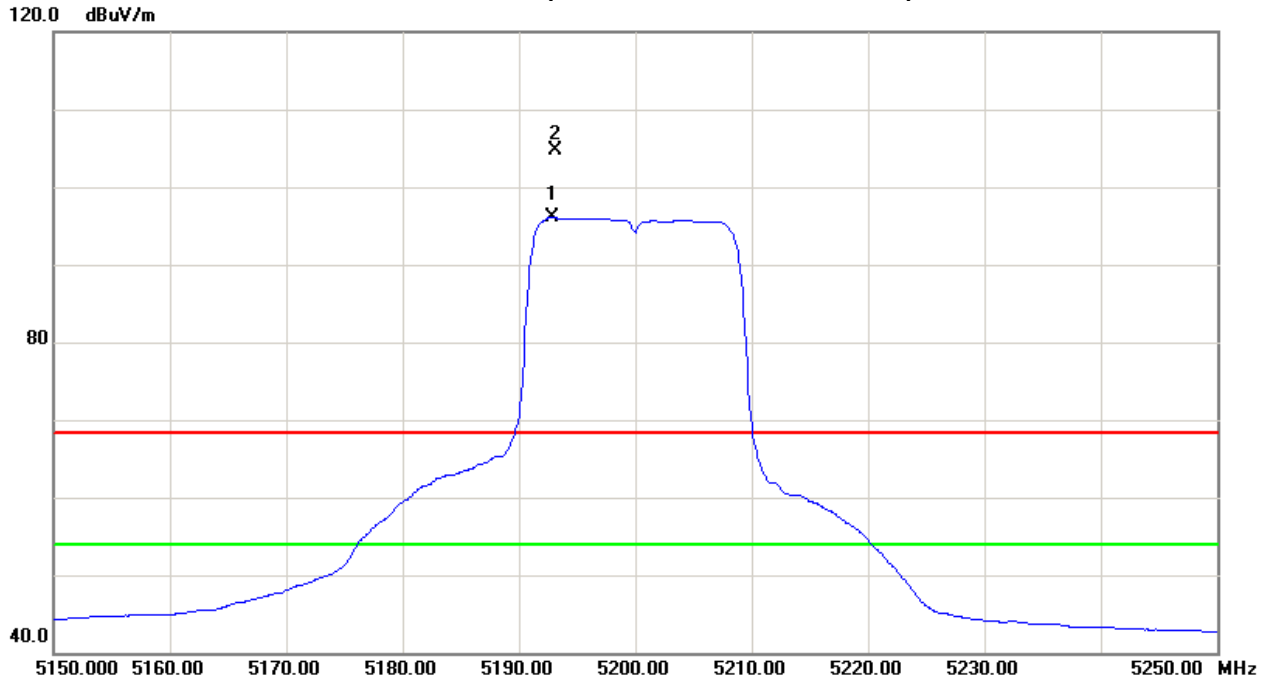



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5198.40	H	54.93	45.53	42.84	97.77	88.37	-7.00	-16.40					X/F
10405.00	H	40.42	29.48	15.97	56.39	45.45	-48.38	-59.32	77.77	68.37	-17.53	-26.93	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)

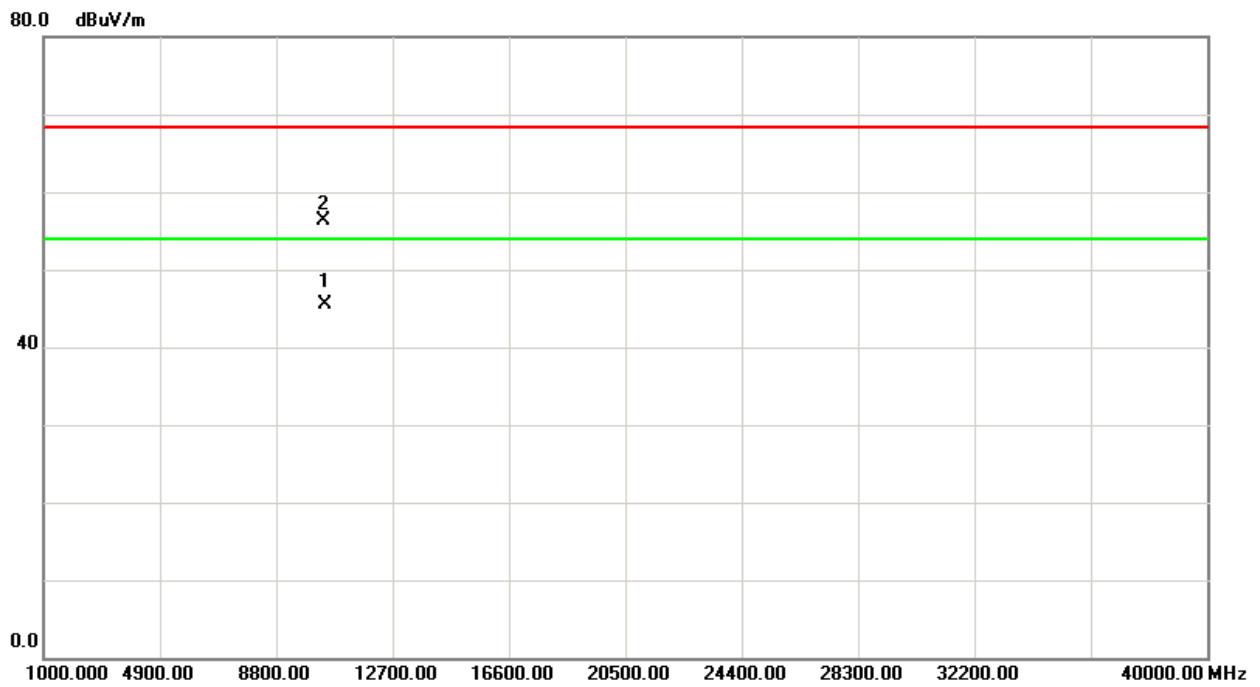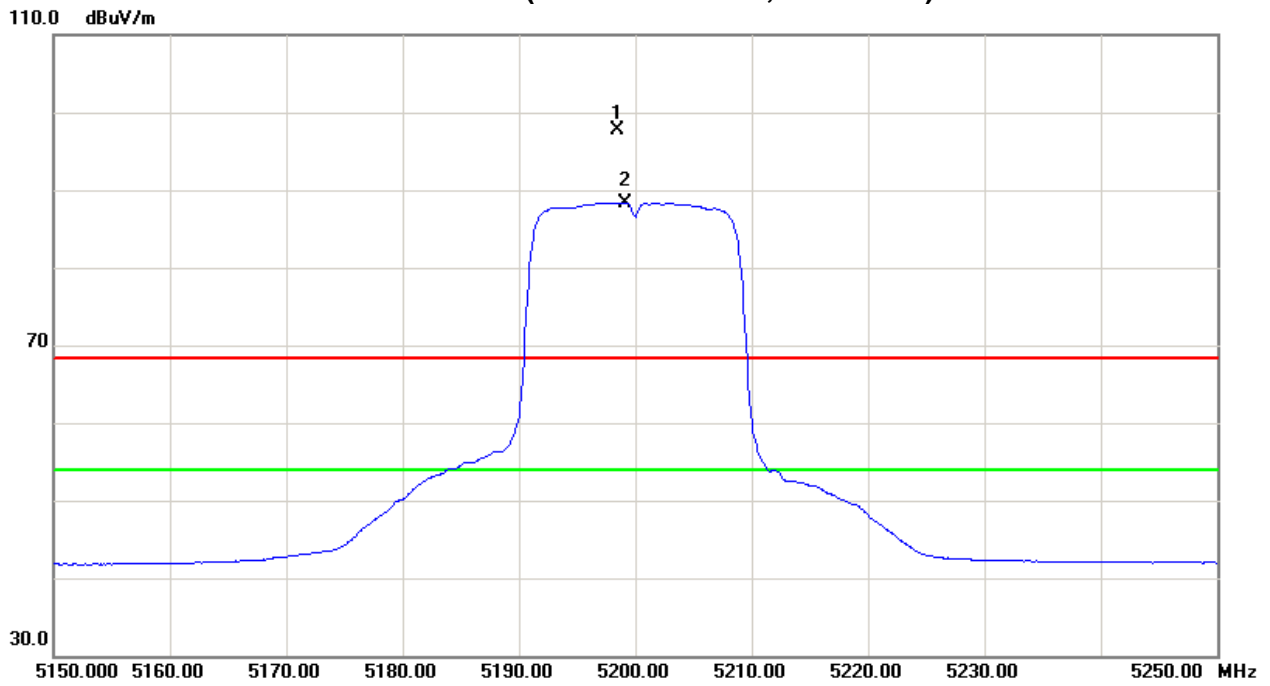



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5246.90	V	64.05	54.66	42.96	107.01	97.62	2.24	-7.15					X/F
10485.15	V	40.67	30.31	15.84	56.51	46.15	-48.26	-58.62	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)

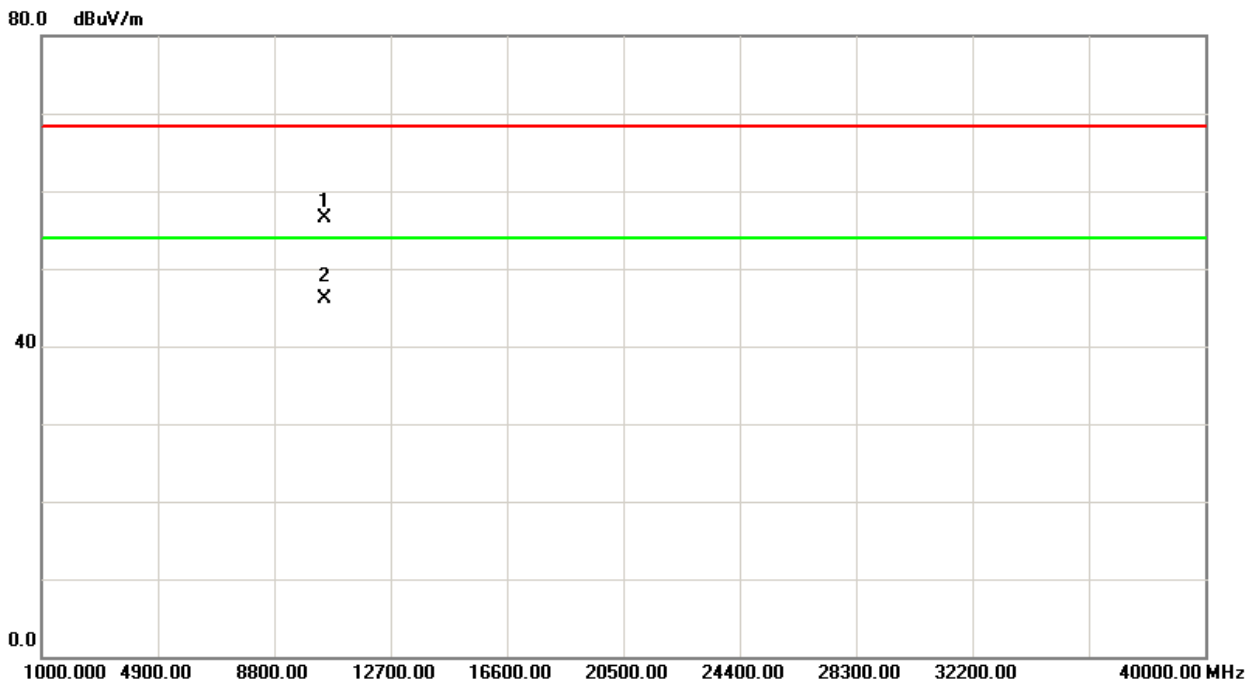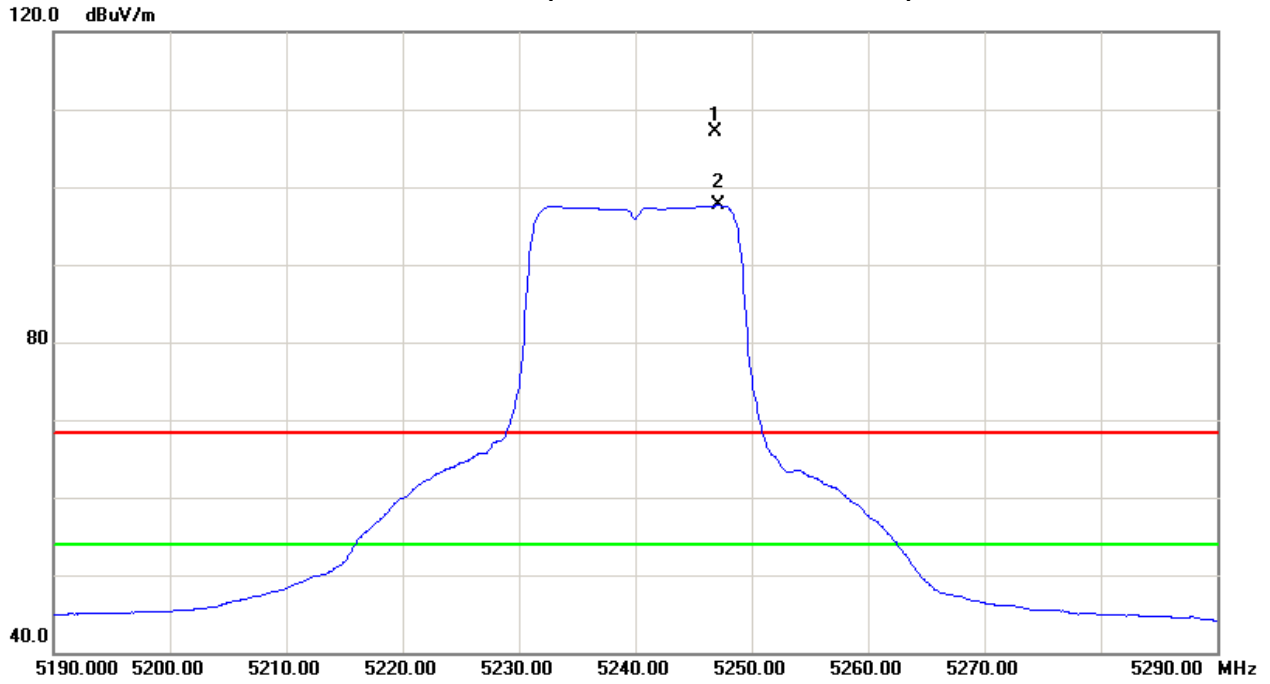



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5236.90	H	52.74	44.26	42.93	95.67	87.19	-9.10	-17.58					X/F
10481.58	H	40.25	30.58	15.84	56.09	46.42	-48.68	-58.35	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)

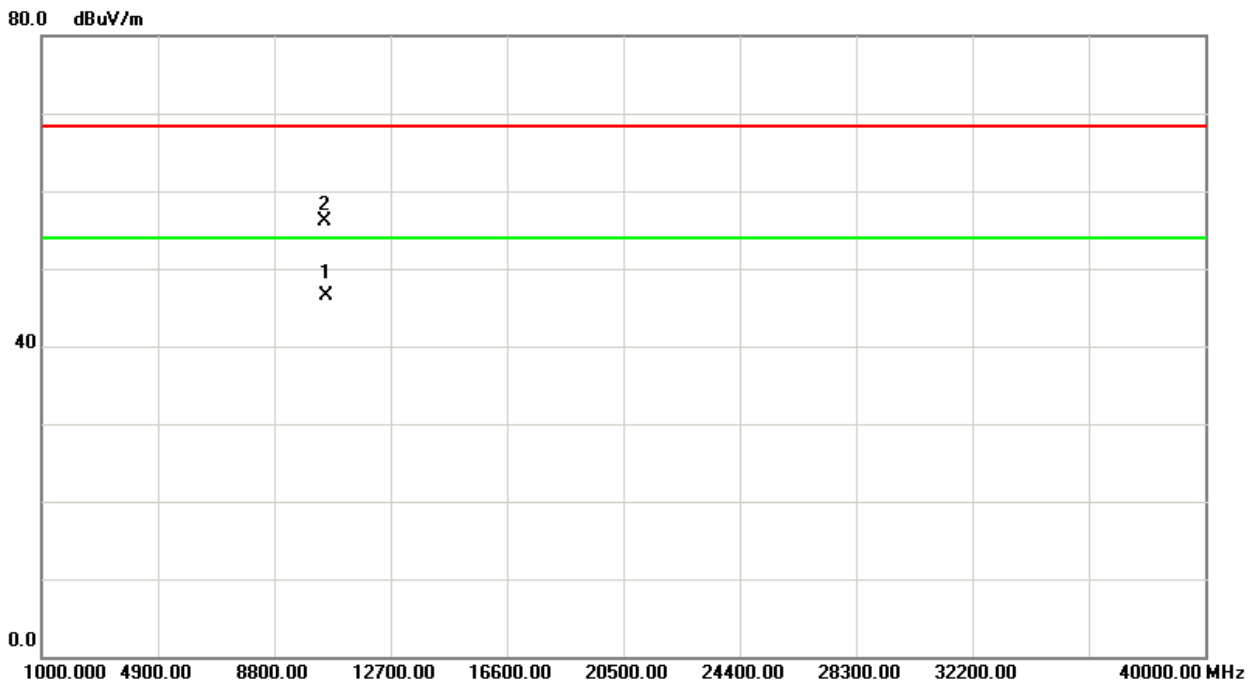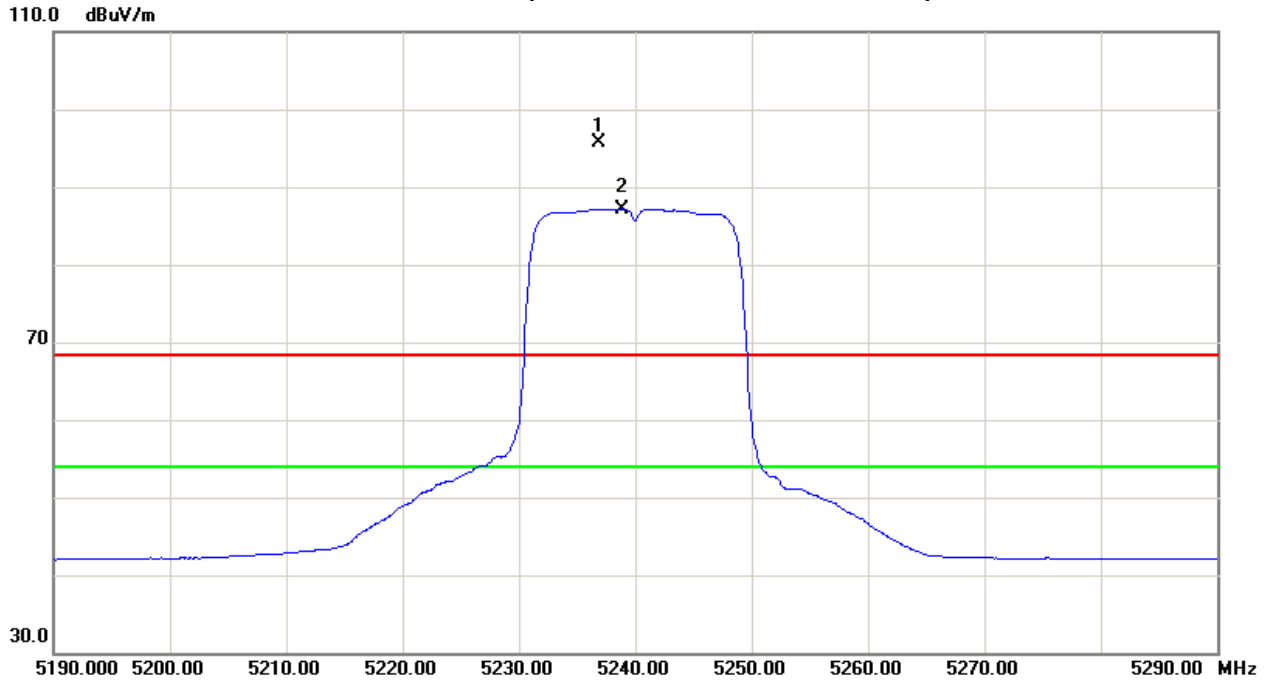



Neutron Engineering Inc.

EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	15.44	5.93	42.72	58.16	48.65	-46.61	-56.12	68.30	54.00	-27.00	-41.30	X/E
5182.60	V	55.07	46.28	42.80	97.87	89.08	-6.90	-15.69					X/F
10371.15	V	37.34	26.57	16.01	53.35	42.58	-51.42	-62.19	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.