

# FCC Test Report

Equipment : Wireless Gateway  
Brand Name : ufiSpace  
Model No. : GML820U-915U  
FCC ID : MCLGML820U-915U  
Standard : 47 CFR FCC Part 15.247  
Operating Band : 2400 MHz – 2483.5 MHz  
Function :  Point-to-multipoint;  Point-to-point  
Applicant : Hon Hai Precision Ind. Co., Ltd.  
5F-1, 5, Hsin-An Road Hsinchu Science-Based  
Industrial Park Hsinchu, Taiwan  
Manufacturer : Hon Hai Precision Ind. Co., Ltd.  
5F-1, 5, Hsin-An Road Hsinchu Science-Based  
Industrial Park Hsinchu, Taiwan

The product sample received on Dec. 09, 2016 and completely tested on Mar. 28, 2017. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

  
Cliff Chang  
SPORTON INTERNATIONAL INC.





# Table of Contents

- 1 GENERAL DESCRIPTION .....5**
- 1.1 Information.....5
- 1.2 Testing Applied Standards .....6
- 1.3 Testing Location Information .....7
- 1.4 Measurement Uncertainty .....7
- 2 TEST CONFIGURATION OF EUT .....8**
- 2.1 Test Channel Mode .....8
- 2.2 The Worst Case Measurement Configuration.....9
- 2.3 EUT Operation during Test .....9
- 2.4 Accessories .....10
- 2.5 Support Equipment.....11
- 2.6 Test Setup Diagram .....12
- 3 TRANSMITTER TEST RESULT .....15**
- 3.1 AC Power-line Conducted Emissions .....15
- 3.2 DTS Bandwidth .....17
- 3.3 Maximum Conducted Output Power .....18
- 3.4 Power Spectral Density .....20
- 3.5 Emissions in Non-restricted Frequency Bands .....22
- 3.6 Emissions in Restricted Frequency Bands.....23
- 4 TEST EQUIPMENT AND CALIBRATION DATA .....27**

**APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS**

**APPENDIX B. TEST RESULTS OF DTS BANDWIDTH**

**APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER**

**APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY**

**APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS**

**APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS**

**APPENDIX G. TEST PHOTOS**

**PHOTOGRAPHS OF EUT V01**



### Summary of Test Result

Conformance Test Specifications				
Report Clause	Ref. Std. Clause	Description	Limit	Result
1.1.2	15.203	Antenna Requirement	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	FCC 15.207	Complied
3.2	15.247(a)	DTS Bandwidth	≥500kHz	Complied
3.3	15.247(b)	Maximum Conducted Output Power	Power [dBm]:30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/3kHz]:8	Complied
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	Non-Restricted Bands: > 30 dBc	Complied
3.6	15.247(d)	Emissions in Restricted Frequency Bands	Restricted Bands: FCC 15.209	Complied



### Revision History

Report No.	Version	Description	Issued Date
FR6D0726-01AA	Rev. 01	Initial issue of report	May 31, 2017



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	1TX
2.4-2.4835GHz	802.11g	20	1TX
2.4-2.4835GHz	802.11n HT20	20	1TX
2.4-2.4835GHz	802.11n HT40	40	1TX
2.4-2.4835GHz	802.11n HT20	20	2TX

Note:

- 2.4G is the 2.4GHz Band (2.4-2.4835GHz).
- 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- BWch is the nominal channel bandwidth.
- Nss-Min is the minimum number of spatial streams.
- Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.
- Contain WWAN Module: WWAN Module (FCC ID: QISME906S-158)



1.1.2 Antenna Information

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	FIT	ANTP2M2-CZZ07-EH	PIFA Antenna	I-PEX	2.75
2	FIT	ANTP2M2-CZZ08-EH	PIFA Antenna	I-PEX	1.83

Note: For IEEE 802.11b/g, 802.11n 20MHz MCS0~MCS7 and 802.11n 40MHz MCS0 ~ MCS7 mode <1TX/1RX>:

Only Ant. 1(Port1) can be used as transmitting antenna and receiving antenna.

For IEEE mode 802.11n 20MHz MCS8~MCS15 <2TX/2RX>:

Ant. 1 (Port 1) and Ant. 2 (Port 2) can be used as transmitting/receiving antennas.

Ant. 1 (Port 1) and Ant. 2 (Port 2) could transmit and receive simultaneously.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)
802.11b	0.954	0.205
802.11g	0.918	0.372
802.11n HT20	0.886	0.526
802.11n HT40	0.769	1.141

1.1.4 EUT Operational Condition

EUT Power Type	From PoE		
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/>	Without beamforming

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 558074 D01 v04
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01



### 1.3 Testing Location Information

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Gino Huang	20°C / 54%	Mar. 28, 2017
Radiated	03CH01-CB	Joy Tseng	22°C / 54%	Mar. 23, 2017   Mar. 28, 2017
AC Conduction	CO01-CB	Da Deng	22°C / 53%	Mar. 27, 2017

Test site Designation No. TW0006 with FCC.  
 Test site registered number IC 4086D with Industry Canada.

### 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74 x10 <sup>-8</sup>	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

Mode	Power Setting
802.11b_(1Mbps)_1TX	-
2412MHz	20000
2437MHz	20000
2462MHz	20000
802.11g_(6Mbps)_1TX	-
2412MHz	20000
2437MHz	20000
2462MHz	20000
802.11n HT20_Nss1,(MCS0)_1TX	-
2412MHz	20000
2437MHz	20000
2462MHz	20000
802.11n HT40_Nss1,(MCS0)_1TX	-
2422MHz	12000
2437MHz	20000
2452MHz	20000
802.11n HT20_Nss1,(MCS0)_2TX	-
2412MHz	16500
2437MHz	20000
2462MHz	17000





## 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral
<b>Operating Mode</b>	Normal Link
1	EUT Normal Link (Function:LoRa+Wi-fi+GPS+LTE Band 2)

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
<b>Test Condition</b>	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	Emissions in Restricted Frequency Bands
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
<b>Operating Mode &lt; 1GHz</b>	Normal Link
1	EUT in Y axis Normal Link (Function: LoRa+WLAN 2.4GHz+GPS+LTE Band 2)
2	EUT in Z axis Normal Link (Function: LoRa+WLAN 2.4GHz+GPS+LTE Band 2)
For operating mode 1 is the worst case and it was record in this test report.	
<b>Operating Mode &gt; 1GHz</b>	CTX
The EUT was performed at Y axis and Z axis position for Radiated emission test below 1GHz, and the worst case was found at Y axis. So the maesurement above 1GHz will follow this same test configuration.	
1	EUT in Y axis

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
<b>Operating Mode</b>	
1	LoRa+WLAN 2.4GHz+GPS+LTE
Refer to Sporton Test Report No.: FA6D0726-01AA for Co-location RF Exposure Evaluation.	

Note: The PoE is for measurement only, would not be marketed.

Power	Brand Holder	Model
PoE	GOSPELL DIGITAL TECHNOLOGY CO.,LTD	G0720-480-050



## **2.3 EUT Operation during Test**

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

## **2.4 Accessories**

<b>Accessories</b>
Ground cable*1: Non-shielded 1m Antenna cable*3: Shielded 0.7m Wall-mounted rack*1



## 2.5 Support Equipment

For Test Site No: CO01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook *2	DELL	E6430	DoC
2	LTE Base station	Anritsu	MT8820C	DoC
3	GPS Simulator	WELNAVIGATE	GS-100	DoC
4	LoRa	Foxconn	IoT ISM Band Car Trackers	PY3AC785S
5	AP Router	Planex	GW-AP54SGX	KA220030603014-1
6	SIM Card	NA	NA	DoC
7	PoE	GOSPELL DIGITAL TECHNOLOGY CO.,LTD	G0720-480-050	DoC

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook*2	DELL	E4300	DoC
2	LTE base station	Anritsu	MT8820C	N/A
3	GPS Simulator	WELNAVIGATE	GS-100	N/A
4	WLAN AP	NETGEAR	WNDR3300v2	PY309300116
5	SIM Card	N/A	N/A	DoC
6	POE	GOSPELL DIGITAL TECHNOLOGY CO.,LTD	G0720-480-050	DoC
7	LoRa	Foxconn	IoT ISM Band Car Trackers	DoC


For Test Site No: 03CH01-CB (above 1GHz)


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E4300	DoC
2	POE	GOSPELL DIGITAL TECHNOLOGY CO.,LTD	G0720-480-050	DoC

For Test Site No: TH01-CB


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E4300	DoC
2	POE	GOSPELL DIGITAL TECHNOLOGY CO.,LTD	G0720-480-050	DoC

## 2.6 Test Setup Diagram

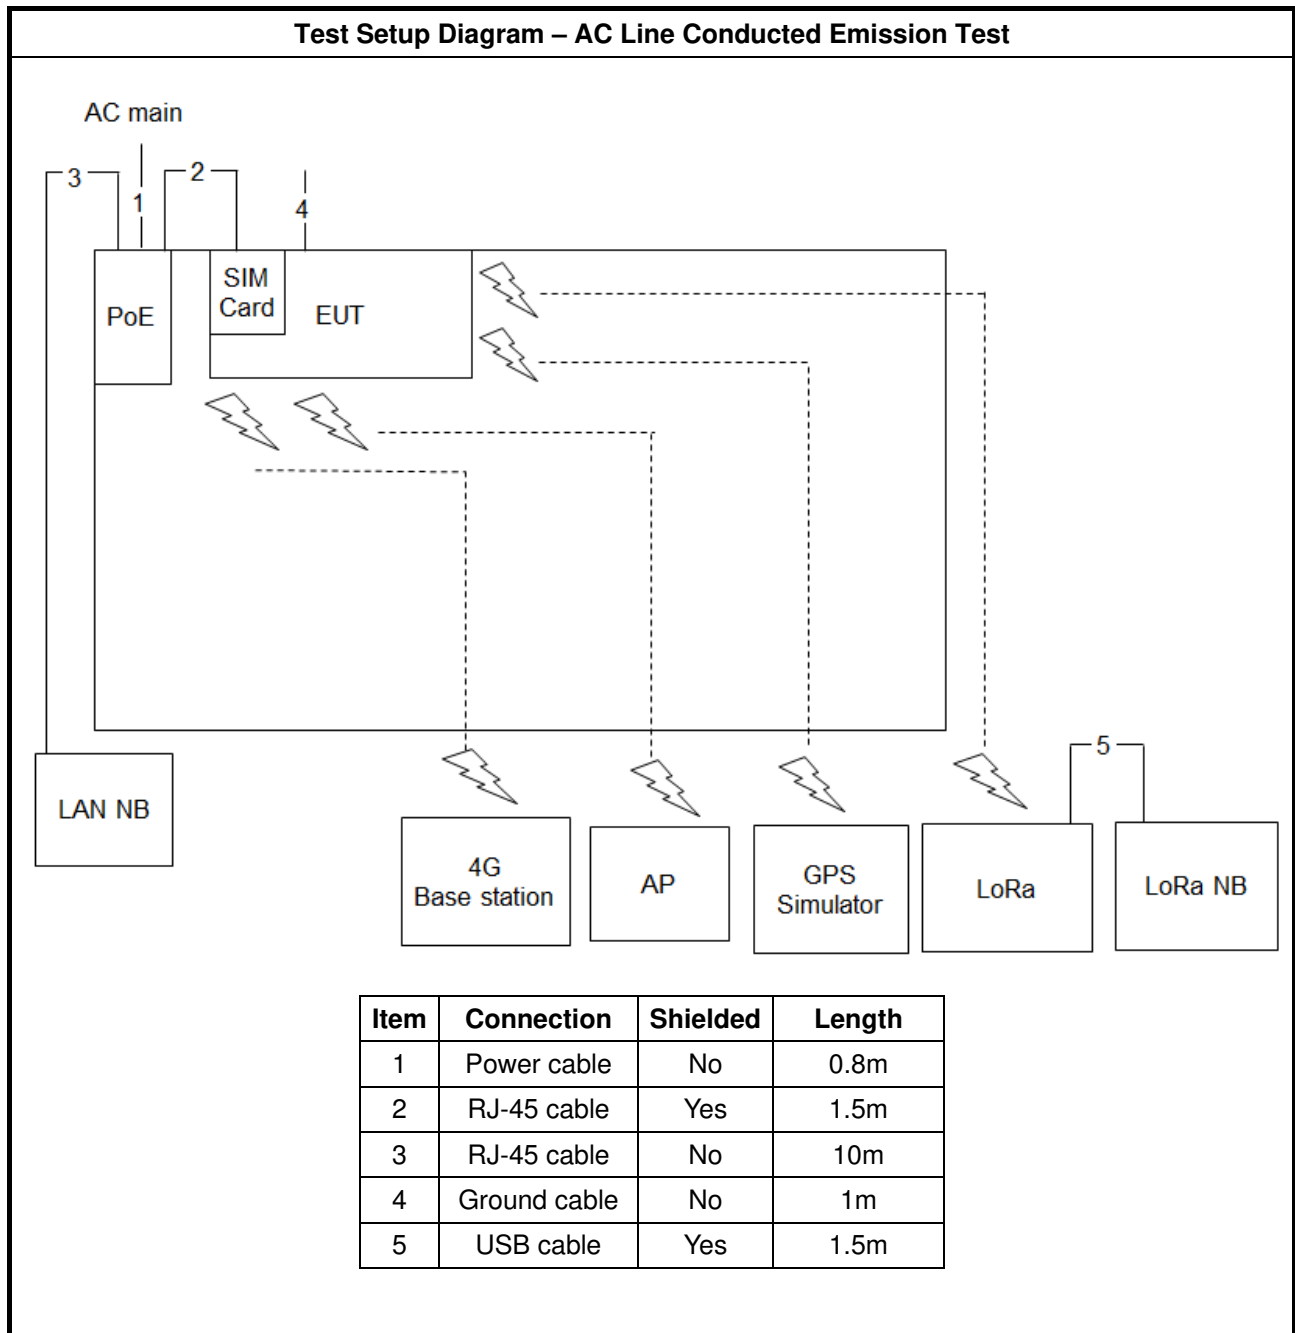

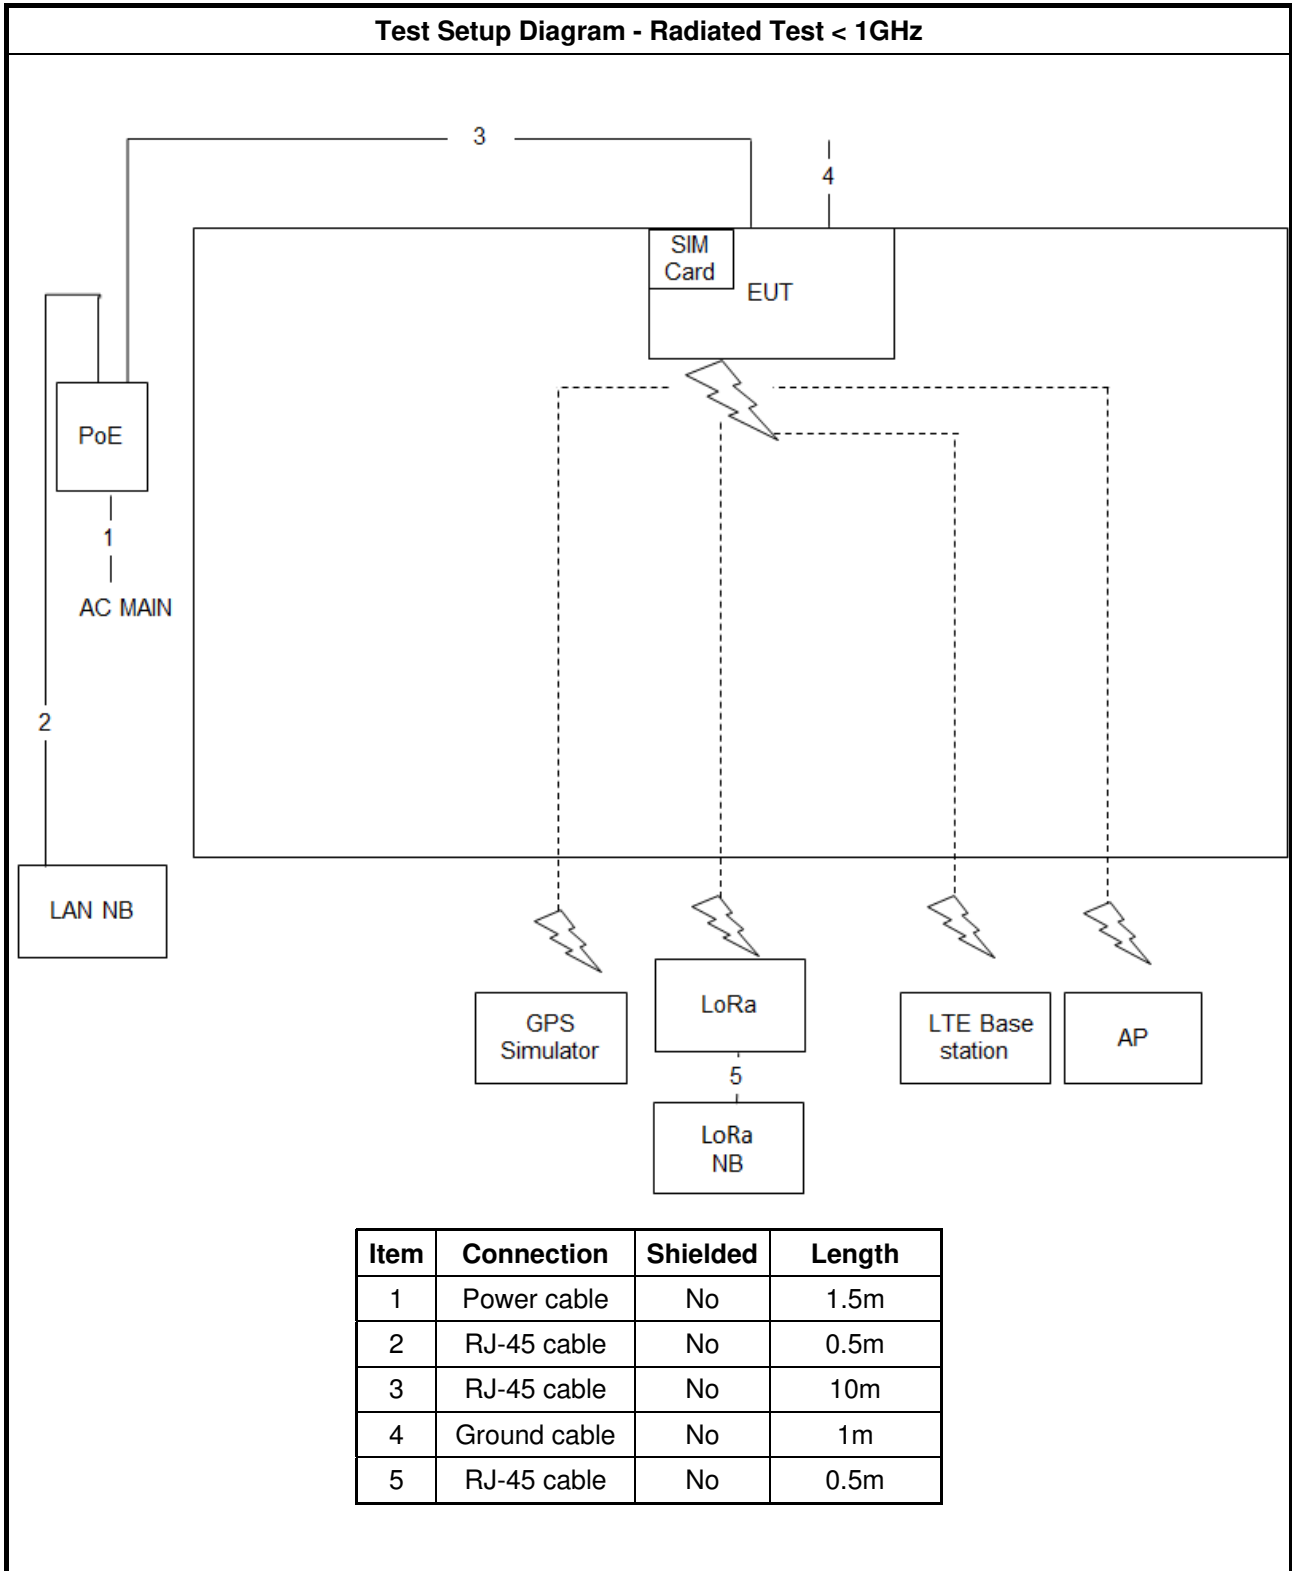

Test Setup Diagram - Radiated Test > 1GHz

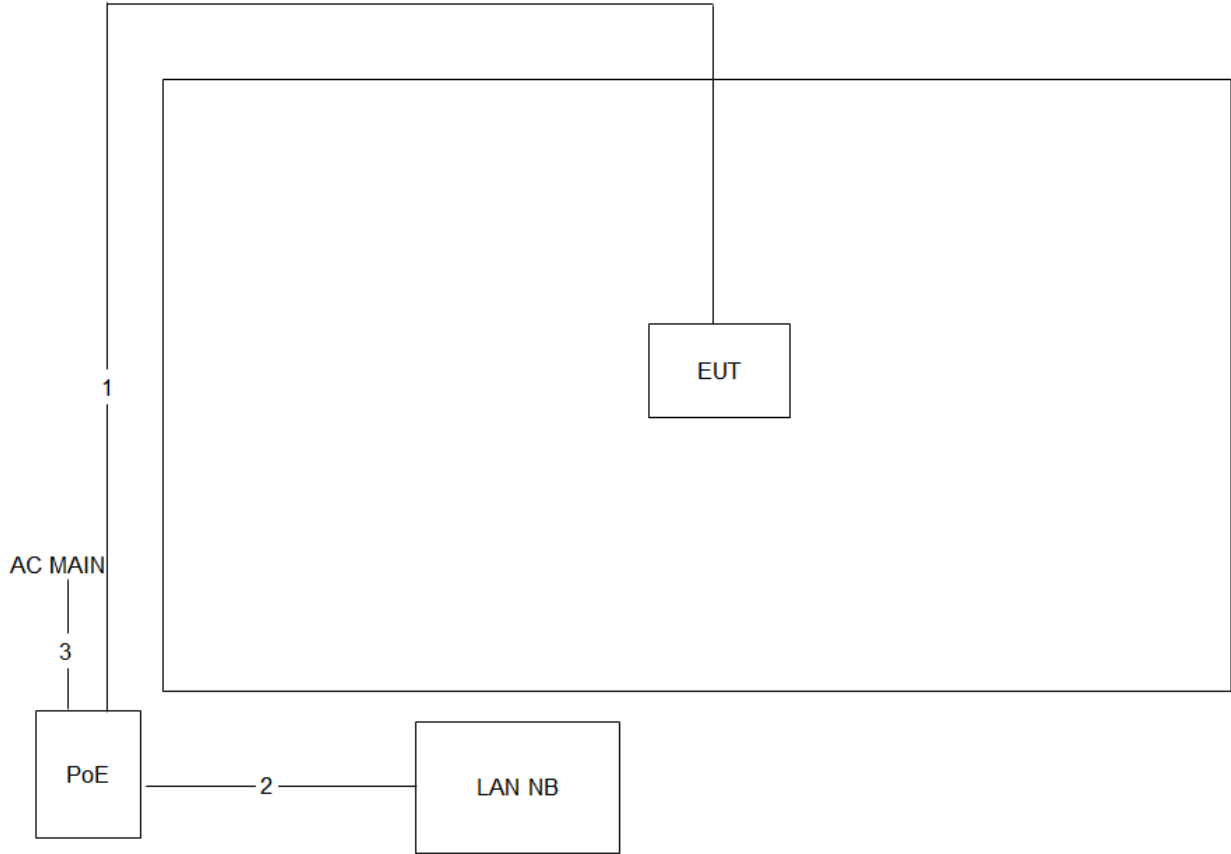

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	Power cable	No	1.5m

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

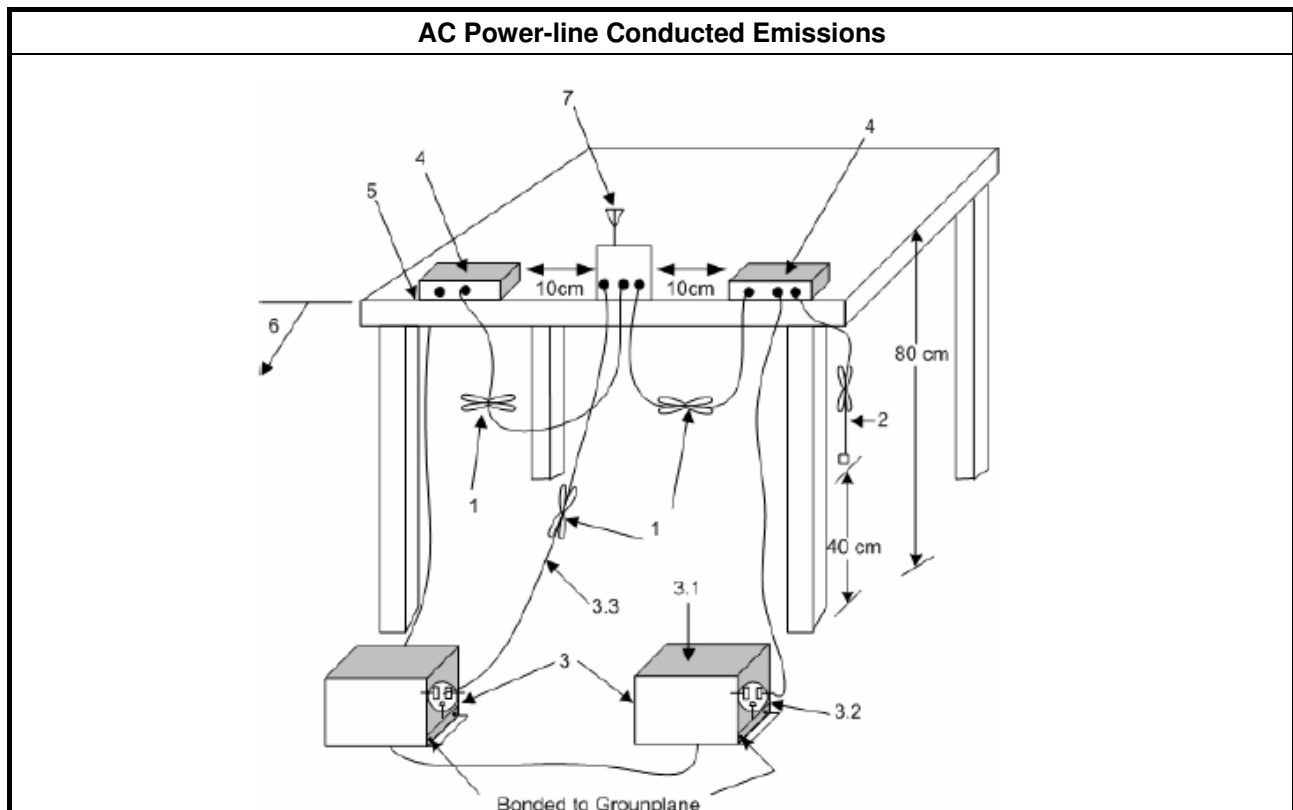



### **3.1.5 Test Result of AC Power-line Conducted Emissions**

Refer as Appendix A



### 3.2 DTS Bandwidth

#### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
<b>Systems using digital modulation techniques:</b>
<ul style="list-style-type: none"> <li>▪ 6 dB bandwidth <math>\geq</math> 500 kHz.</li> </ul>


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>▪ For the emission bandwidth shall be measured using one of the options below:</li> </ul>
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

#### 3.2.4 Test Setup

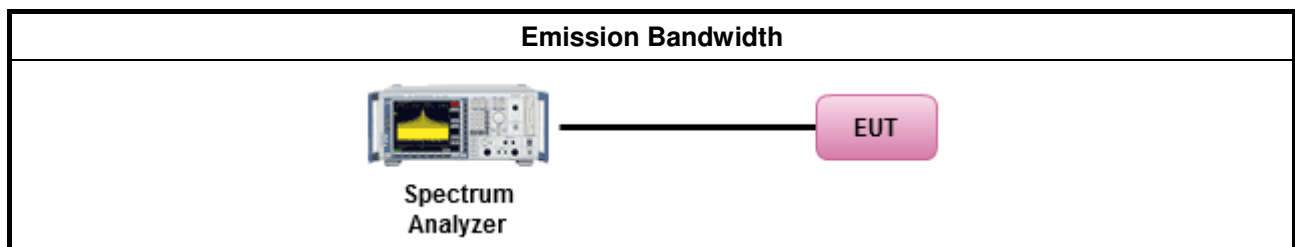

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
$P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>Maximum Peak Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.2 Option 2 (peak power meter for VBW ≥ DTS BW)
<ul style="list-style-type: none"> <li>Maximum Conducted Output Power</li> </ul>	
[duty cycle ≥ 98% or external video / power trigger]	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
RF power meter and average over on/off periods with duty factor or gated trigger	
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.3 Method AVGPm-G (using an RF average power meter).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.2 PKPM1 Peak power meter method.
<ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>	
<ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP calculation could be following as methods:  <math>P_{total} = P_1 + P_2 + \dots + P_n</math>                      (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>	

### 3.3.4 Test Setup

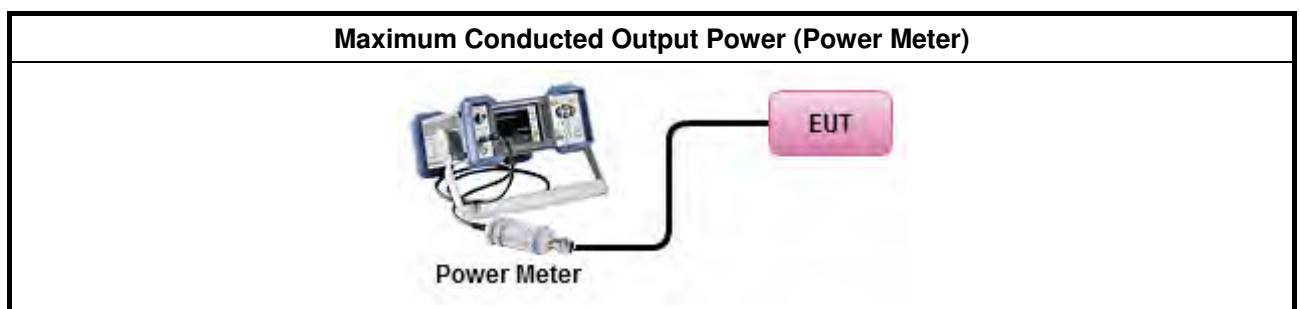

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> <li>Power Spectral Density (PSD) ≤ 8 dBm/3kHz</li> </ul>


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).</li> </ul>
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak). [duty cycle ≥ 98% or external video / power trigger]
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-2 (slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-1 Alt (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<ul style="list-style-type: none"> <li>For conducted measurement. <ul style="list-style-type: none"> <li>If The EUT supports multiple transmit chains using options given below: <ul style="list-style-type: none"> <li> <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. </li> <li> <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, </li> <li> <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit. </li> </ul> </li> </ul> </li> </ul>

### 3.4.4 Test Setup

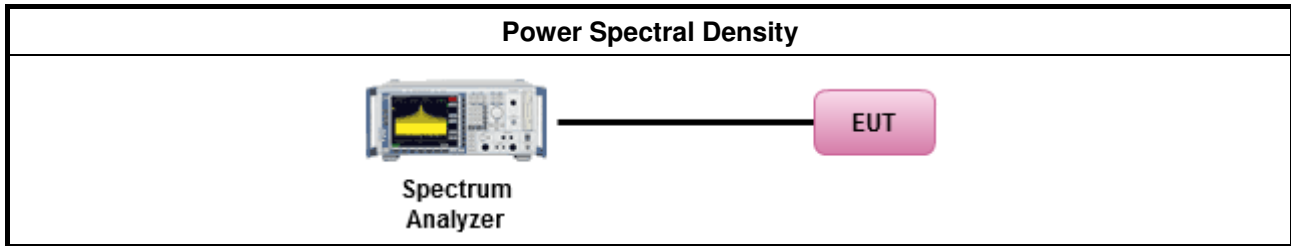

### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.</li> </ul>

#### 3.5.4 Test Setup

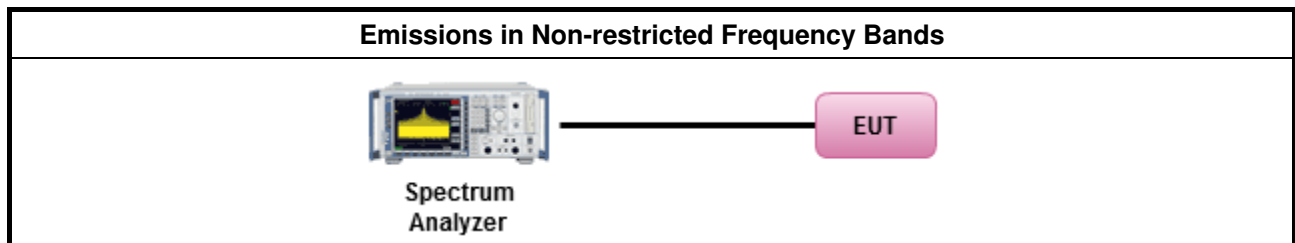

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.





### 3.6.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li> </ul>	
<ul style="list-style-type: none"> <li>▪ Refer as ANSI C63.10, clause 6.9.2.2 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.</li> </ul>
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq$ 98%)
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq$ 1/T).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.4 measurement procedure peak limit.
<ul style="list-style-type: none"> <li>▪ For the transmitter band-edge emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074 clause 13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074, clause 13.2 (ANSI C63.10, clause 6.9.3) for marker-delta method for band-edge measurements.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).</li> </ul>
<ul style="list-style-type: none"> <li>▪ For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2.</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below:                (1) Measure and sum the spectra across the outputs or                (2) Measure and add 10 log(N) dB</li> </ul>
	<ul style="list-style-type: none"> <li>▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.</li> </ul>



### 3.6.4 Test Setup

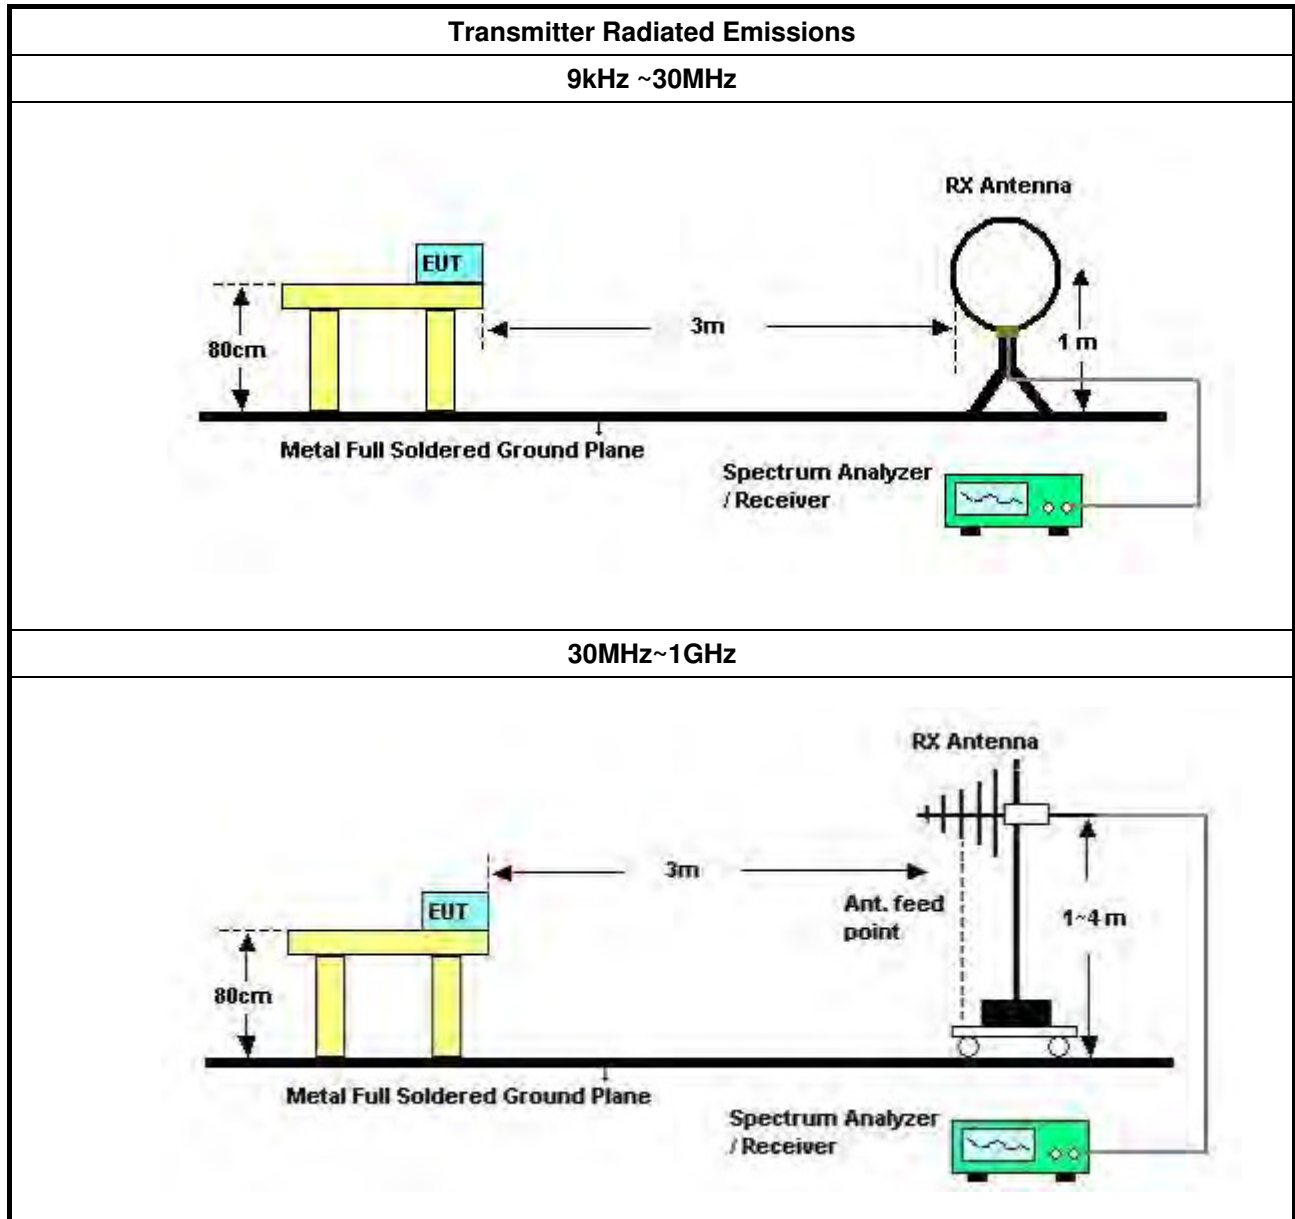

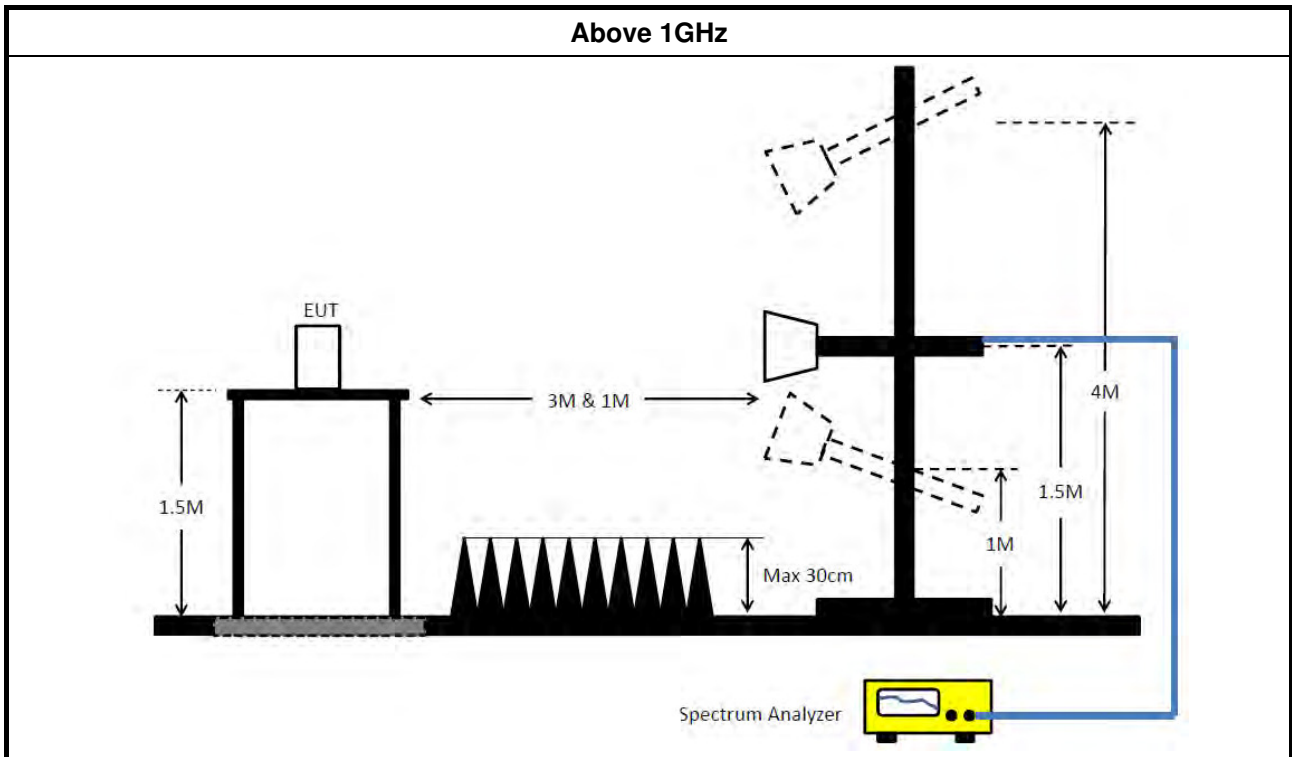

### 3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

### 3.6.6 Test Result of Transmitter Radiated Unwanted Emissions

Refer as Appendix F



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 23, 2017	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 14, 2016	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 21, 2016	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 30, 2016	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 10, 2016	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 25, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 13, 2017	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 16, 2017	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jun. 28, 2016	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 21, 2016	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 26, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 22, 2016	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*\*” Calibration Interval of instruments listed above is two years.

N.C.R means Non-Calibration required.



# AC Power-line Conducted Emissions Result


Appendix A

AC Power-line Conducted Emissions Result																																																																																																																																										
Operating Mode	1	Power Phase	Neutral																																																																																																																																							
Operating Function	Normal Link																																																																																																																																									
<div style="display: flex; justify-content: space-between;"> <div> <p>Level (dBuV)</p> <p style="text-align: right;">Date: 2017-03-27 Time: 16:07:10</p> </div> </div>																																																																																																																																										
<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>LISN</th> <th>Remark</th> <th>Pol/Phase</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th></th> <th></th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.1500</td><td>45.72</td><td>-10.28</td><td>56.00</td><td>35.74</td><td>9.94</td><td>Average</td><td>NEUTRAL</td></tr> <tr><td>2</td><td>0.1500</td><td>60.50</td><td>-5.50</td><td>66.00</td><td>50.52</td><td>9.94</td><td>QP</td><td>NEUTRAL</td></tr> <tr><td>3</td><td>0.1731</td><td>43.71</td><td>-11.10</td><td>54.81</td><td>33.71</td><td>9.96</td><td>Average</td><td>NEUTRAL</td></tr> <tr><td>4</td><td>0.1731</td><td>53.89</td><td>-10.92</td><td>64.81</td><td>43.89</td><td>9.96</td><td>QP</td><td>NEUTRAL</td></tr> <tr><td>5</td><td>0.4305</td><td>39.68</td><td>-7.56</td><td>47.24</td><td>29.68</td><td>9.96</td><td>Average</td><td>NEUTRAL</td></tr> <tr><td>6</td><td>0.4305</td><td>50.04</td><td>-7.20</td><td>57.24</td><td>40.04</td><td>9.96</td><td>QP</td><td>NEUTRAL</td></tr> <tr><td>7</td><td>0.4661</td><td>38.00</td><td>-8.58</td><td>46.58</td><td>27.99</td><td>9.97</td><td>Average</td><td>NEUTRAL</td></tr> <tr><td>8</td><td>0.4661</td><td>48.61</td><td>-7.97</td><td>56.58</td><td>38.60</td><td>9.97</td><td>QP</td><td>NEUTRAL</td></tr> <tr><td>9</td><td>1.3168</td><td>30.99</td><td>-15.01</td><td>46.00</td><td>20.94</td><td>9.98</td><td>Average</td><td>NEUTRAL</td></tr> <tr><td>10</td><td>1.3168</td><td>41.94</td><td>-14.06</td><td>56.00</td><td>31.89</td><td>9.98</td><td>QP</td><td>NEUTRAL</td></tr> <tr><td>11</td><td>19.8445</td><td>36.25</td><td>-13.75</td><td>50.00</td><td>25.71</td><td>10.29</td><td>Average</td><td>NEUTRAL</td></tr> <tr><td>12</td><td>19.8445</td><td>43.48</td><td>-16.52</td><td>60.00</td><td>32.94</td><td>10.29</td><td>QP</td><td>NEUTRAL</td></tr> </tbody> </table>					Freq	Level	Over	Limit	Read	LISN	Remark	Pol/Phase		MHz	dBuV	Limit	Line	Level	Factor						dB	dBuV	dBuV	dB			1	0.1500	45.72	-10.28	56.00	35.74	9.94	Average	NEUTRAL	2	0.1500	60.50	-5.50	66.00	50.52	9.94	QP	NEUTRAL	3	0.1731	43.71	-11.10	54.81	33.71	9.96	Average	NEUTRAL	4	0.1731	53.89	-10.92	64.81	43.89	9.96	QP	NEUTRAL	5	0.4305	39.68	-7.56	47.24	29.68	9.96	Average	NEUTRAL	6	0.4305	50.04	-7.20	57.24	40.04	9.96	QP	NEUTRAL	7	0.4661	38.00	-8.58	46.58	27.99	9.97	Average	NEUTRAL	8	0.4661	48.61	-7.97	56.58	38.60	9.97	QP	NEUTRAL	9	1.3168	30.99	-15.01	46.00	20.94	9.98	Average	NEUTRAL	10	1.3168	41.94	-14.06	56.00	31.89	9.98	QP	NEUTRAL	11	19.8445	36.25	-13.75	50.00	25.71	10.29	Average	NEUTRAL	12	19.8445	43.48	-16.52	60.00	32.94	10.29	QP	NEUTRAL
	Freq	Level	Over	Limit	Read	LISN	Remark	Pol/Phase																																																																																																																																		
	MHz	dBuV	Limit	Line	Level	Factor																																																																																																																																				
			dB	dBuV	dBuV	dB																																																																																																																																				
1	0.1500	45.72	-10.28	56.00	35.74	9.94	Average	NEUTRAL																																																																																																																																		
2	0.1500	60.50	-5.50	66.00	50.52	9.94	QP	NEUTRAL																																																																																																																																		
3	0.1731	43.71	-11.10	54.81	33.71	9.96	Average	NEUTRAL																																																																																																																																		
4	0.1731	53.89	-10.92	64.81	43.89	9.96	QP	NEUTRAL																																																																																																																																		
5	0.4305	39.68	-7.56	47.24	29.68	9.96	Average	NEUTRAL																																																																																																																																		
6	0.4305	50.04	-7.20	57.24	40.04	9.96	QP	NEUTRAL																																																																																																																																		
7	0.4661	38.00	-8.58	46.58	27.99	9.97	Average	NEUTRAL																																																																																																																																		
8	0.4661	48.61	-7.97	56.58	38.60	9.97	QP	NEUTRAL																																																																																																																																		
9	1.3168	30.99	-15.01	46.00	20.94	9.98	Average	NEUTRAL																																																																																																																																		
10	1.3168	41.94	-14.06	56.00	31.89	9.98	QP	NEUTRAL																																																																																																																																		
11	19.8445	36.25	-13.75	50.00	25.71	10.29	Average	NEUTRAL																																																																																																																																		
12	19.8445	43.48	-16.52	60.00	32.94	10.29	QP	NEUTRAL																																																																																																																																		
<p>Note 1: "&gt;20dB" means emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																																										



# AC Power-line Conducted Emissions Result

Appendix A

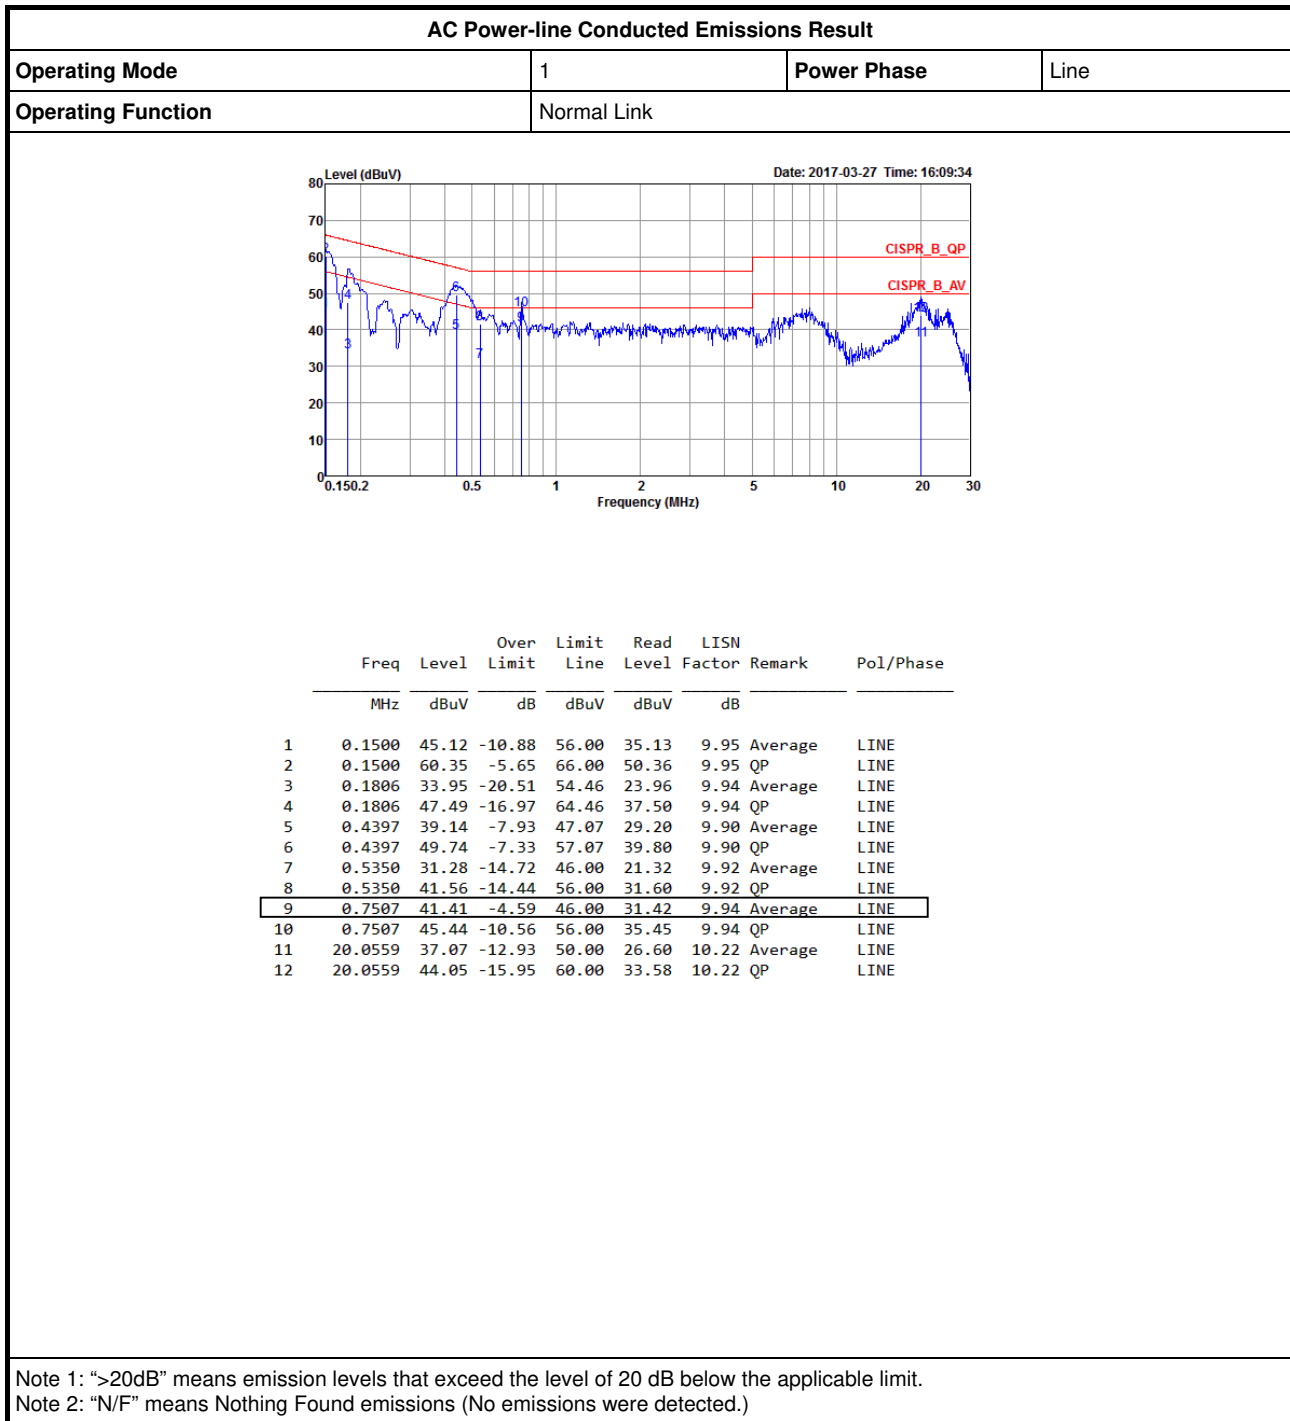



Summary




Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
802.11b_(1Mbps)_1TX	-	-	-	-	-
2.4-2.4835GHz	9.975M	14.668M	14M7G1D	9.475M	14.568M
802.11g_(6Mbps)_1TX	-	-	-	-	-
2.4-2.4835GHz	15.075M	16.942M	16M9D1D	12.475M	16.267M
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2.4-2.4835GHz	14.975M	17.491M	17M5D1D	14.475M	17.466M
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2.4-2.4835GHz	32.5M	35.832M	35M8D1D	31.25M	35.682M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;  
 Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth;




Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11b_(1Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	9.925M	14.668M
2437MHz	Pass	500k	9.975M	14.643M
2462MHz	Pass	500k	9.475M	14.568M
802.11g_(6Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	13.5M	16.267M
2437MHz	Pass	500k	15.075M	16.942M
2462MHz	Pass	500k	12.475M	16.317M
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-
2412MHz	Pass	500k	14.525M	17.466M
2437MHz	Pass	500k	14.975M	17.491M
2462MHz	Pass	500k	14.475M	17.466M
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-
2422MHz	Pass	500k	31.25M	35.682M
2437MHz	Pass	500k	32.5M	35.832M
2452MHz	Pass	500k	31.3M	35.832M


Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;

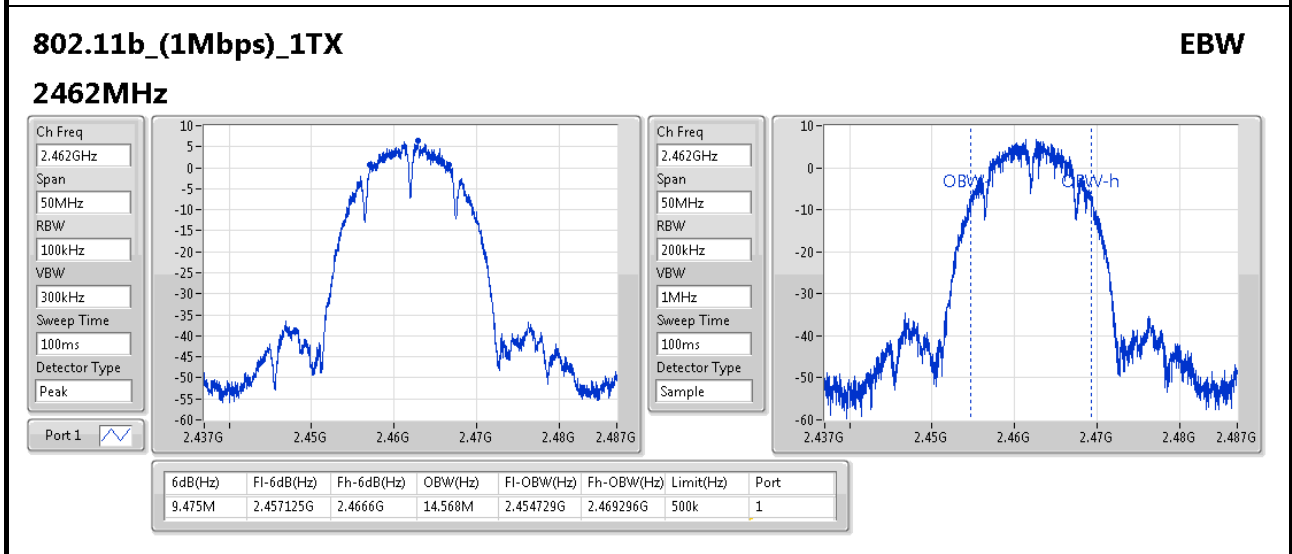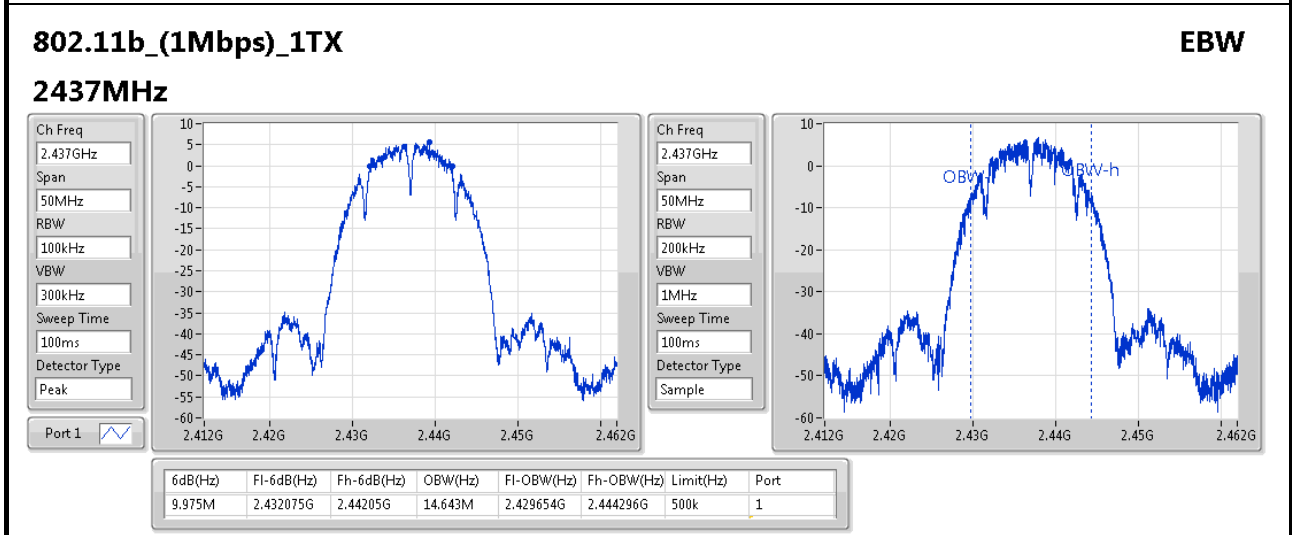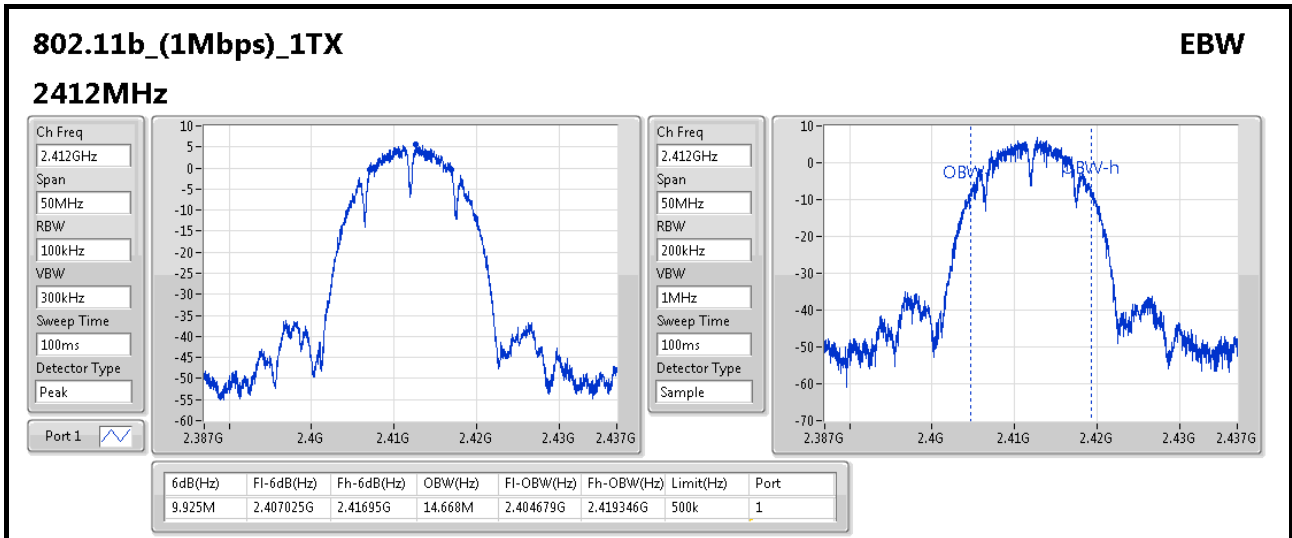



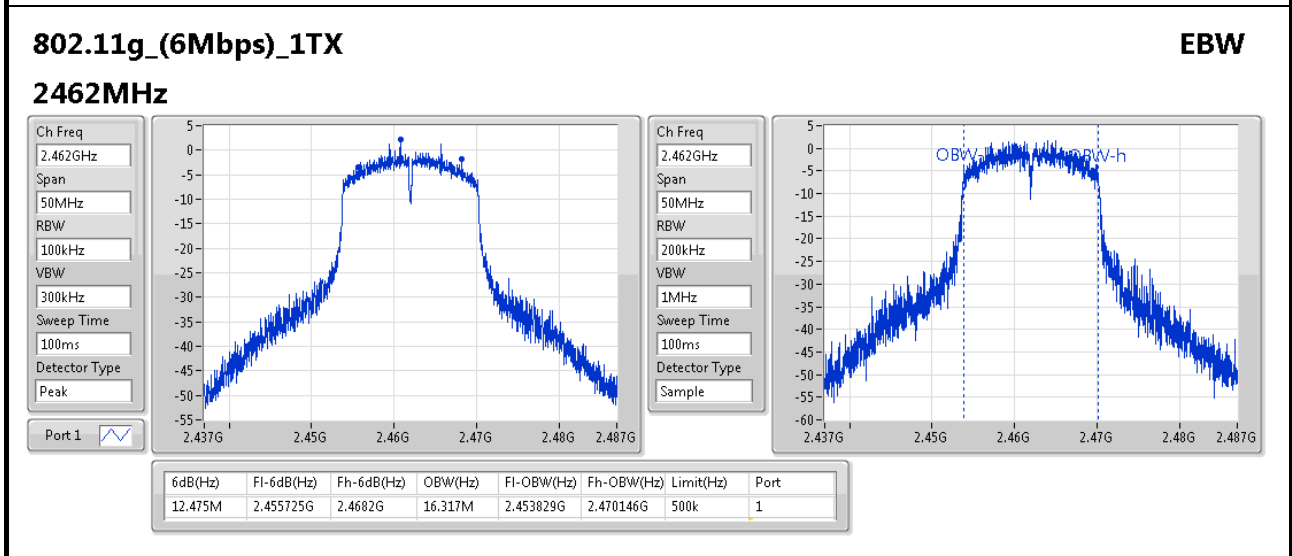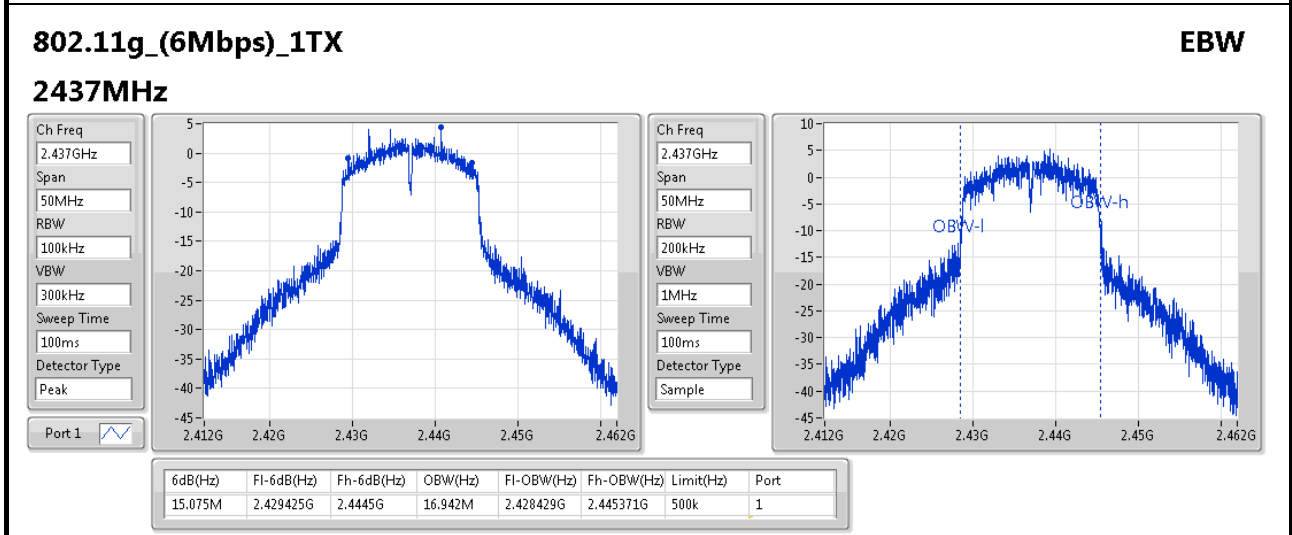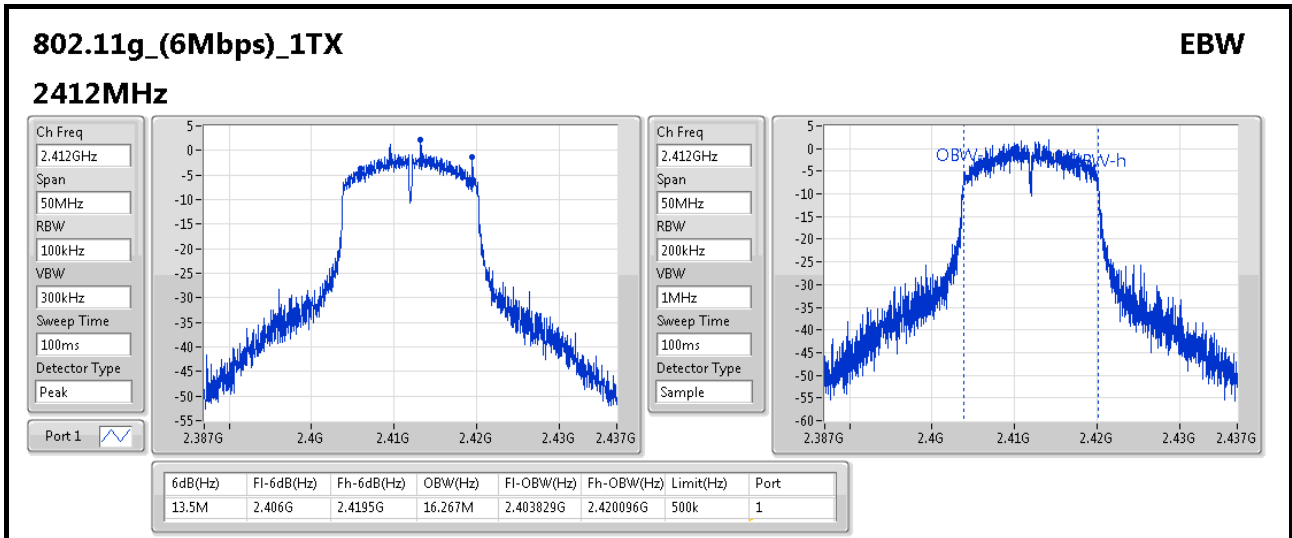

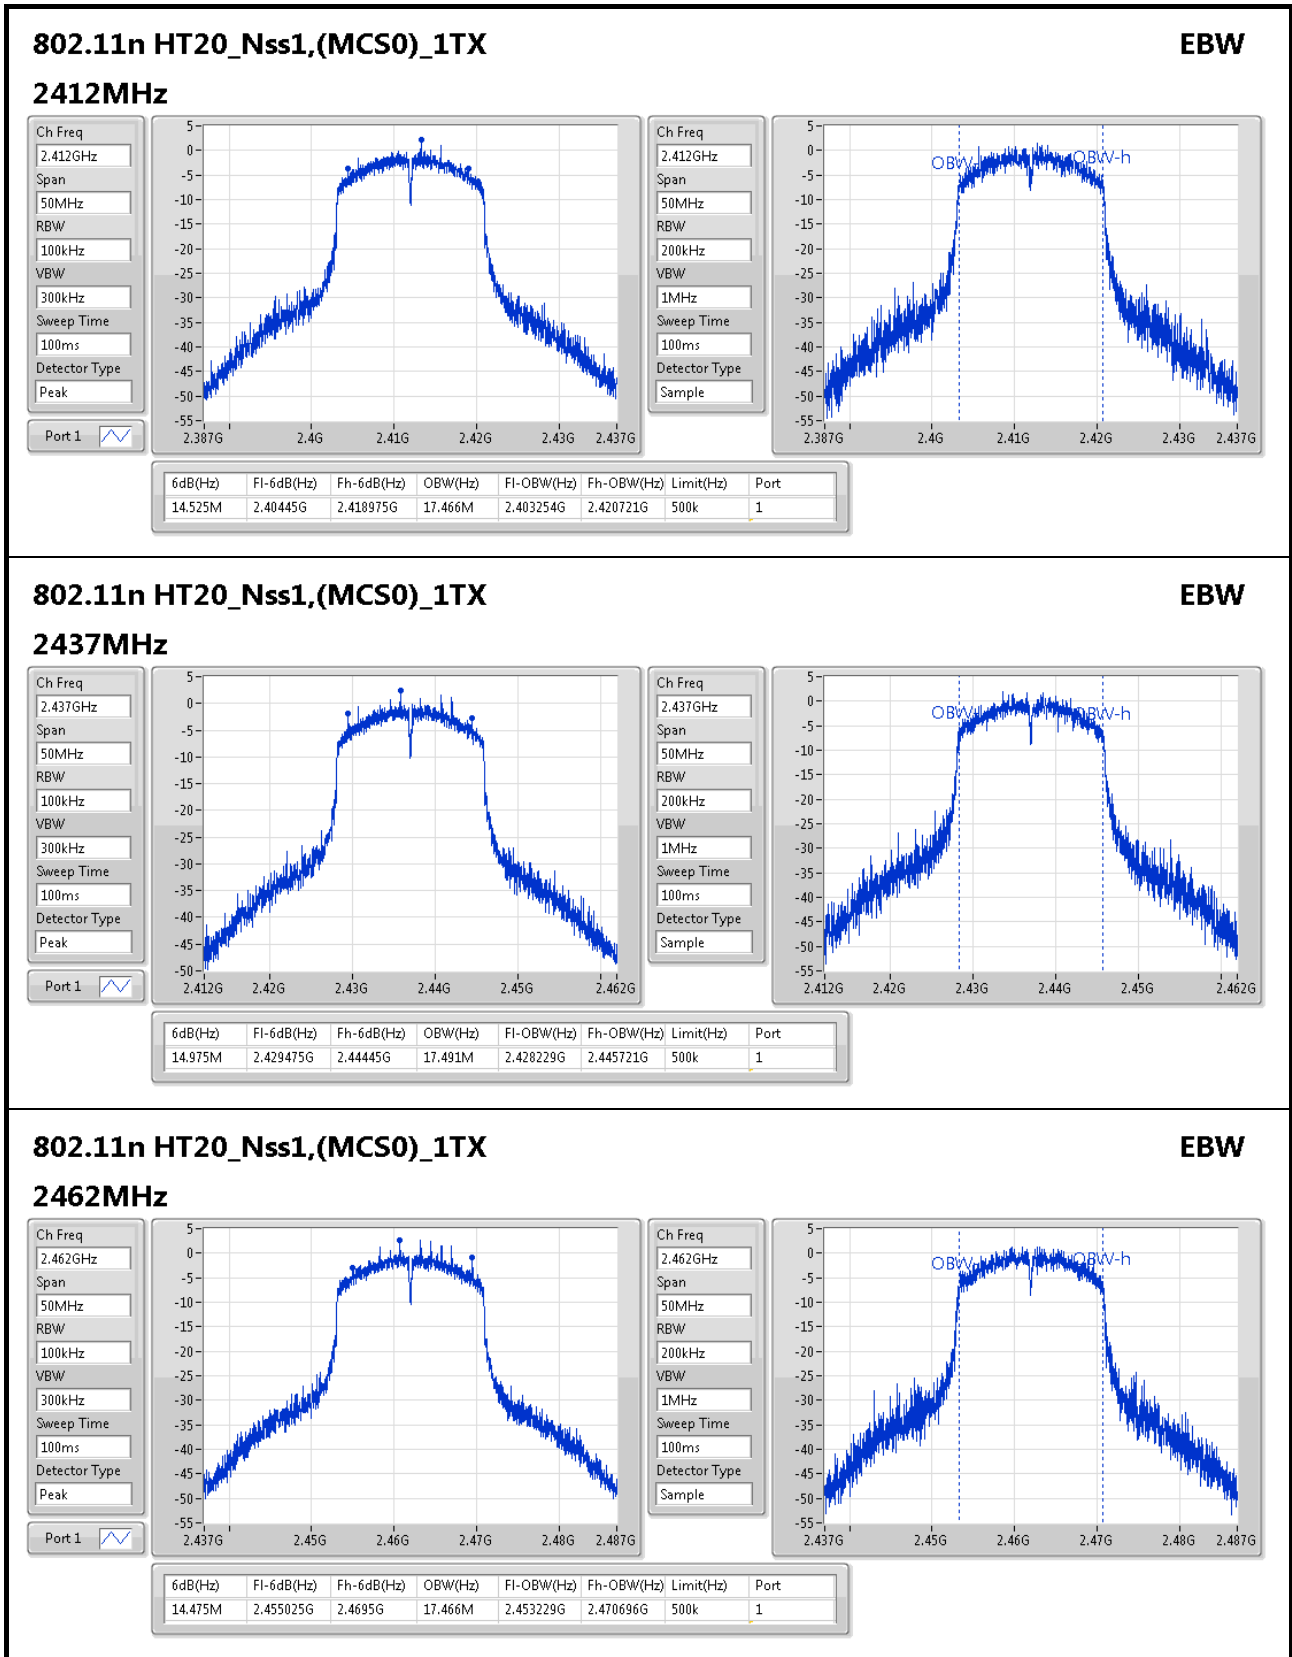

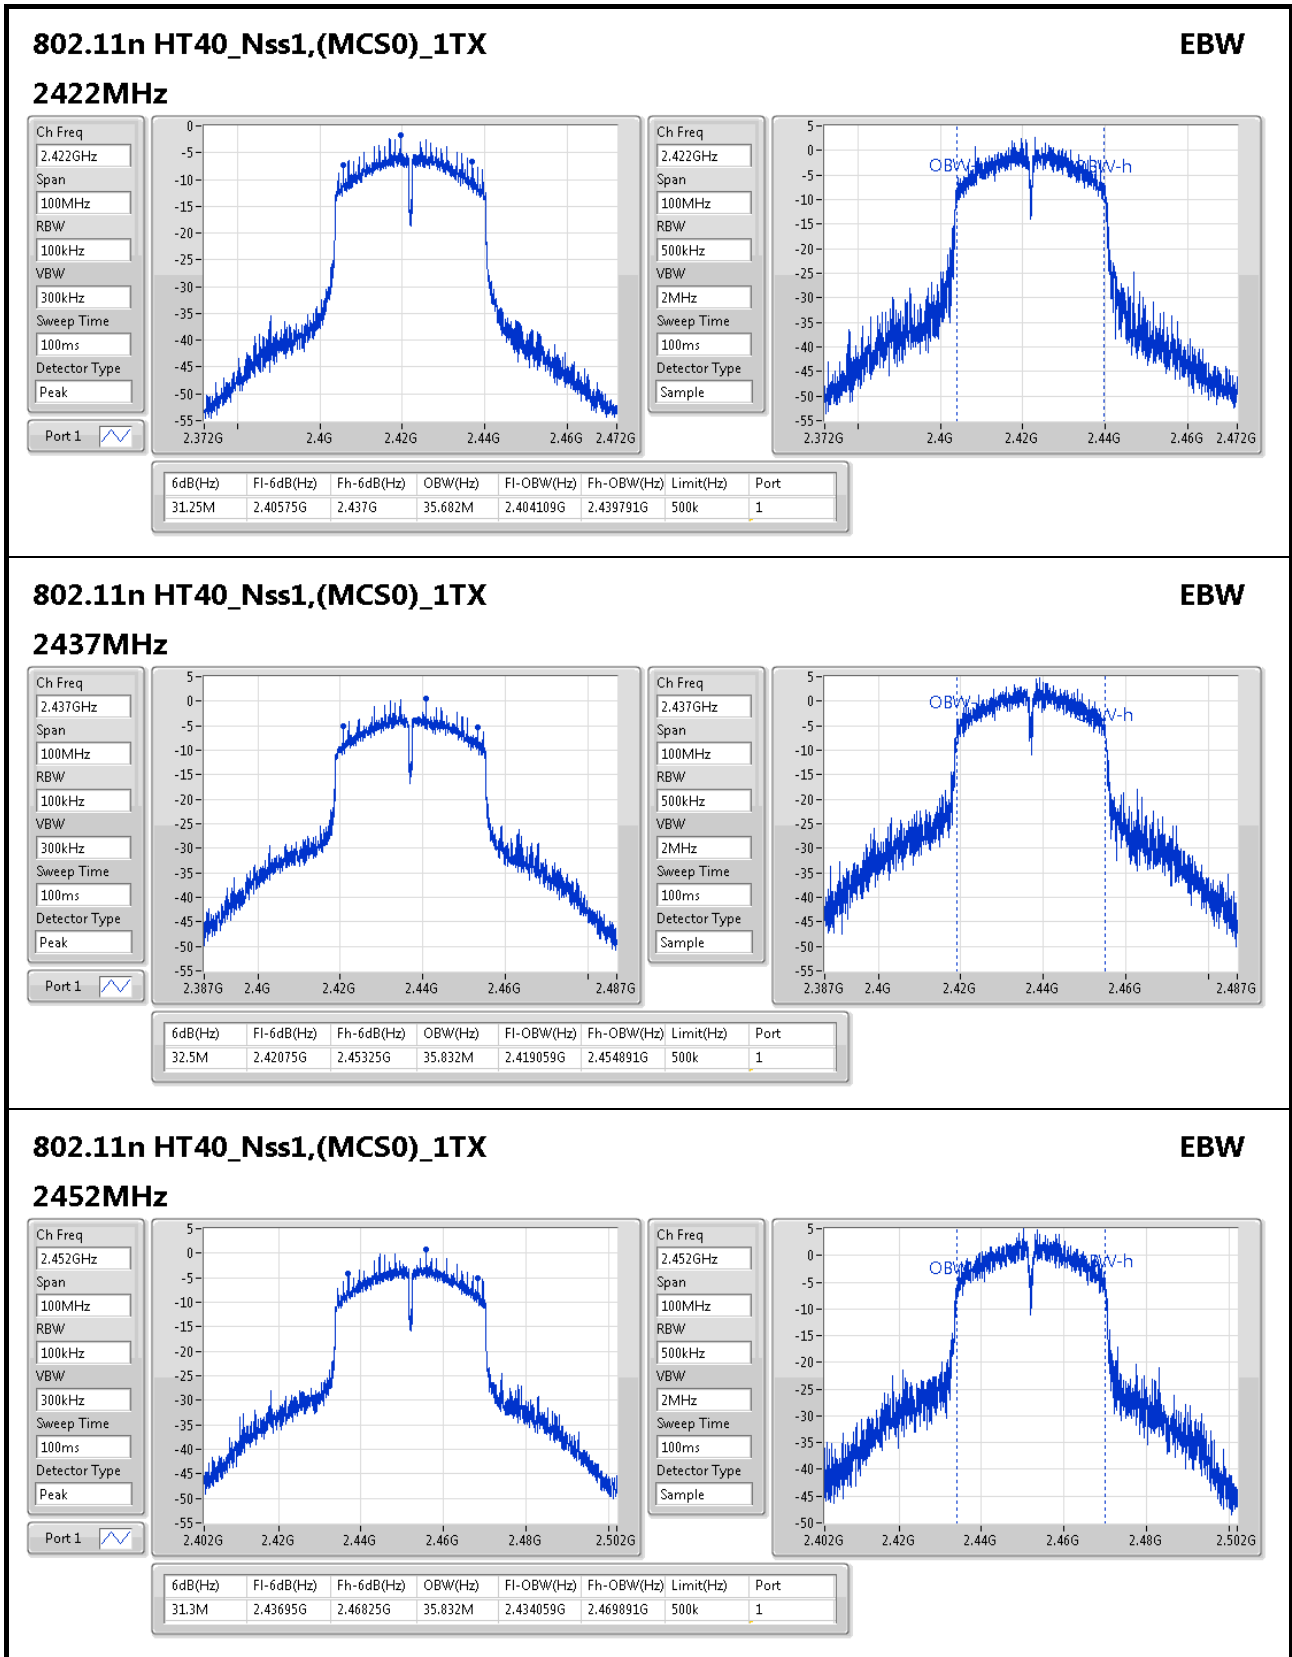



**Summary**


Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-
2.4-2.4835GHz	15.65M	17.566M	17M6D1D	14.975M	17.491M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	15.075M	17.516M	15.075M	17.491M
2437MHz	Pass	500k	14.975M	17.541M	15.65M	17.566M
2462MHz	Pass	500k	15M	17.541M	15.1M	17.491M

**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

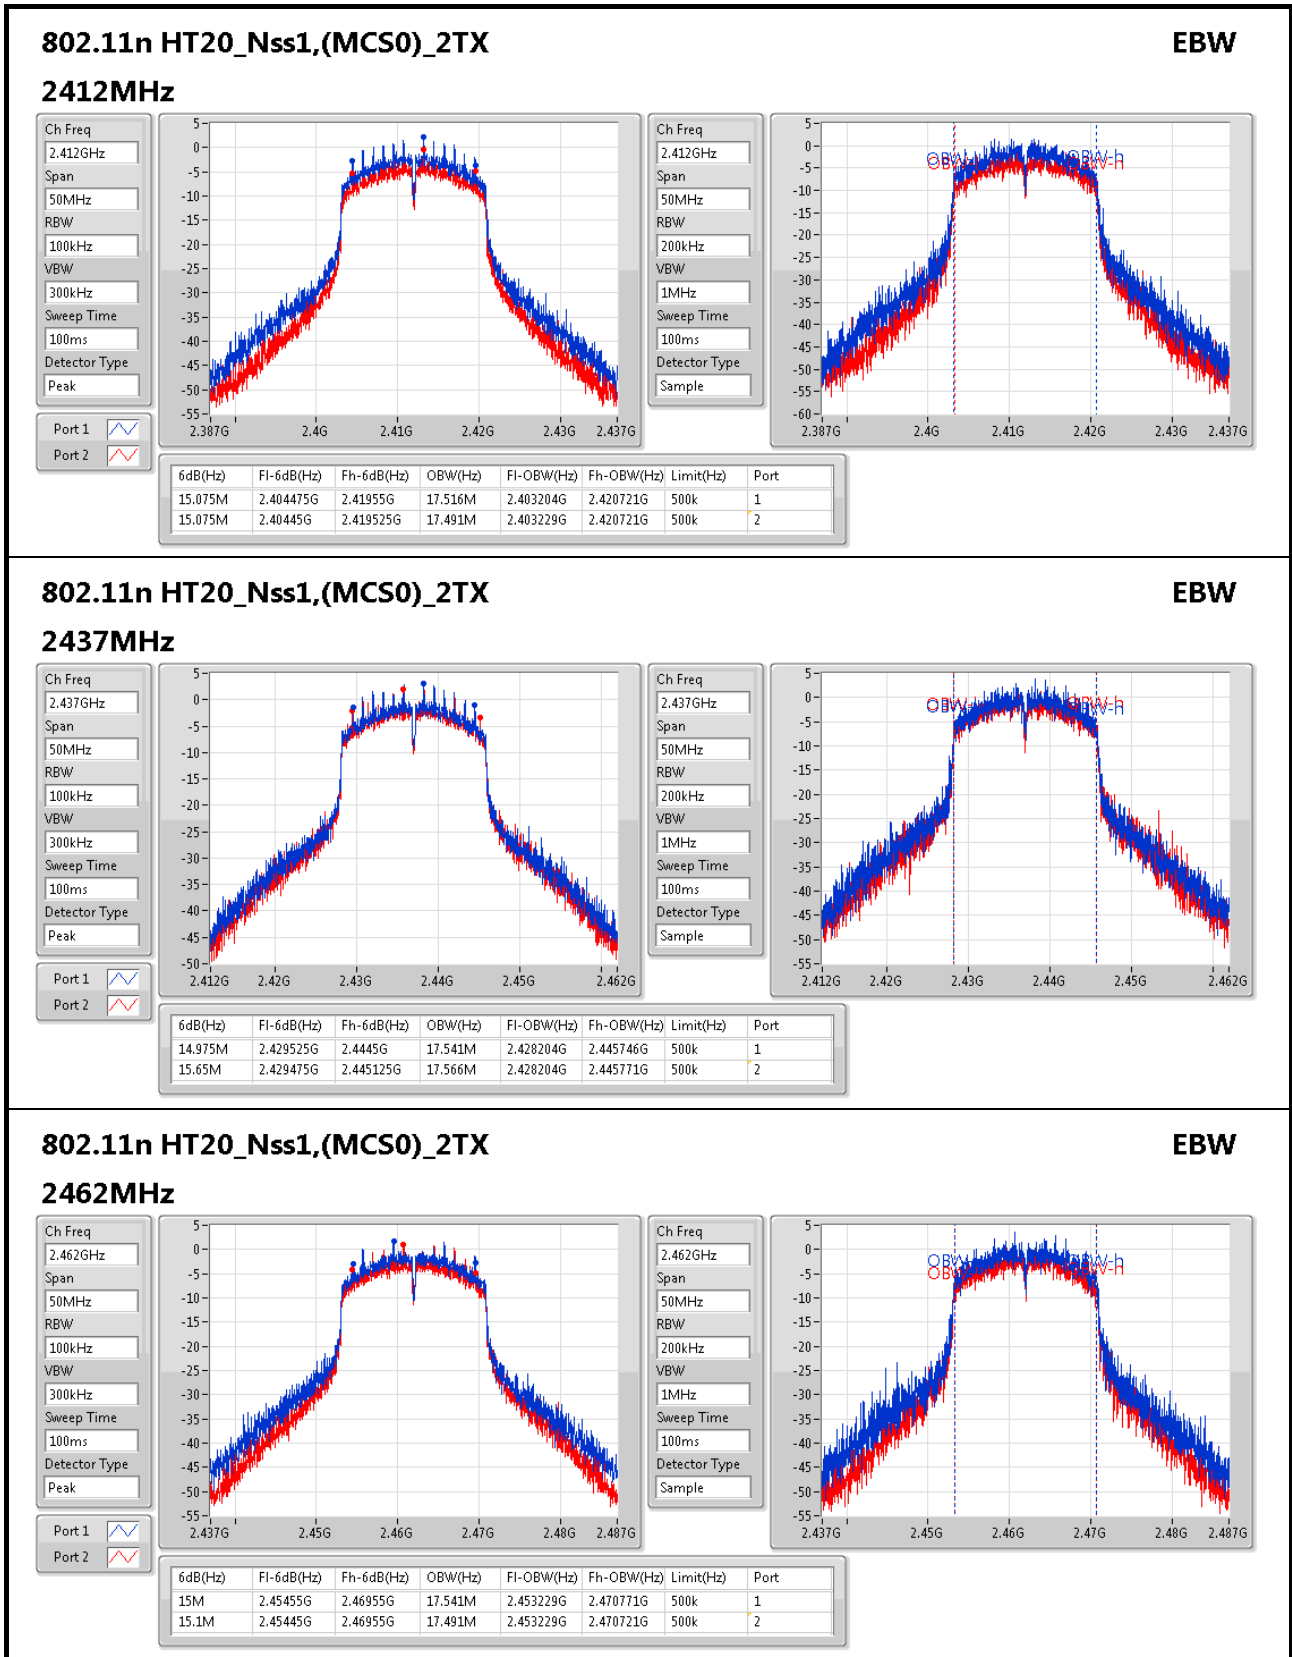



**Summary**

Mode	Total Power (dBm)	Total Power (W)
802.11b_(1Mbps)_1TX	-	-
2.4-2.4835GHz	15.84	0.03837
802.11g_(6Mbps)_1TX	-	-
2.4-2.4835GHz	12.78	0.01897
802.11n HT20_Nss1,(MCS0)_1TX	-	-
2.4-2.4835GHz	12.77	0.01892
802.11n HT40_Nss1,(MCS0)_1TX	-	-
2.4-2.4835GHz	13.33	0.02153

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.75	15.56	15.56	30.00
2437MHz	Pass	2.75	15.84	15.84	30.00
2462MHz	Pass	2.75	15.68	15.68	30.00
802.11g_(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.75	12.69	12.69	30.00
2437MHz	Pass	2.75	12.78	12.78	30.00
2462MHz	Pass	2.75	12.53	12.53	30.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	2.75	12.73	12.73	30.00
2437MHz	Pass	2.75	12.77	12.77	30.00
2462MHz	Pass	2.75	12.72	12.72	30.00
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	2.75	10.87	10.87	30.00
2437MHz	Pass	2.75	13.33	13.33	30.00
2452MHz	Pass	2.75	13.19	13.19	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	Total Power (dBm)	Total Power (W)
802.11n HT20_Nss1,(MCS0)_2TX	-	-
2.4-2.4835GHz	15.80	0.03802

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	2.75	12.07	10.69	14.44	30.00
2437MHz	Pass	2.75	13.18	12.35	15.80	30.00
2462MHz	Pass	2.75	12.71	11.40	15.11	30.00

DG = Directional Gain; Port X = Port X output power



**Summary**

Mode	PD (dBm/RBW)
802.11b_(1Mbps)_1TX	-
2.4-2.4835GHz	-6.83
802.11g_(6Mbps)_1TX	-
2.4-2.4835GHz	-12.03
802.11n HT20_Nss1,(MCS0)_1TX	-
2.4-2.4835GHz	-11.62
802.11n HT40_Nss1,(MCS0)_1TX	-
2.4-2.4835GHz	-14.02

RBW=3kHz.


**Result**


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.75	-6.83	-6.83	8.00
2437MHz	Pass	2.75	-7.93	-7.93	8.00
2462MHz	Pass	2.75	-7.77	-7.77	8.00
802.11g_(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.75	-12.03	-12.03	8.00
2437MHz	Pass	2.75	-12.30	-12.30	8.00
2462MHz	Pass	2.75	-12.38	-12.38	8.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	2.75	-12.56	-12.56	8.00
2437MHz	Pass	2.75	-11.66	-11.66	8.00
2462MHz	Pass	2.75	-11.62	-11.62	8.00
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	2.75	-16.08	-16.08	8.00
2437MHz	Pass	2.75	-15.28	-15.28	8.00
2452MHz	Pass	2.75	-14.02	-14.02	8.00


DG = Directional Gain; RBW=3kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;



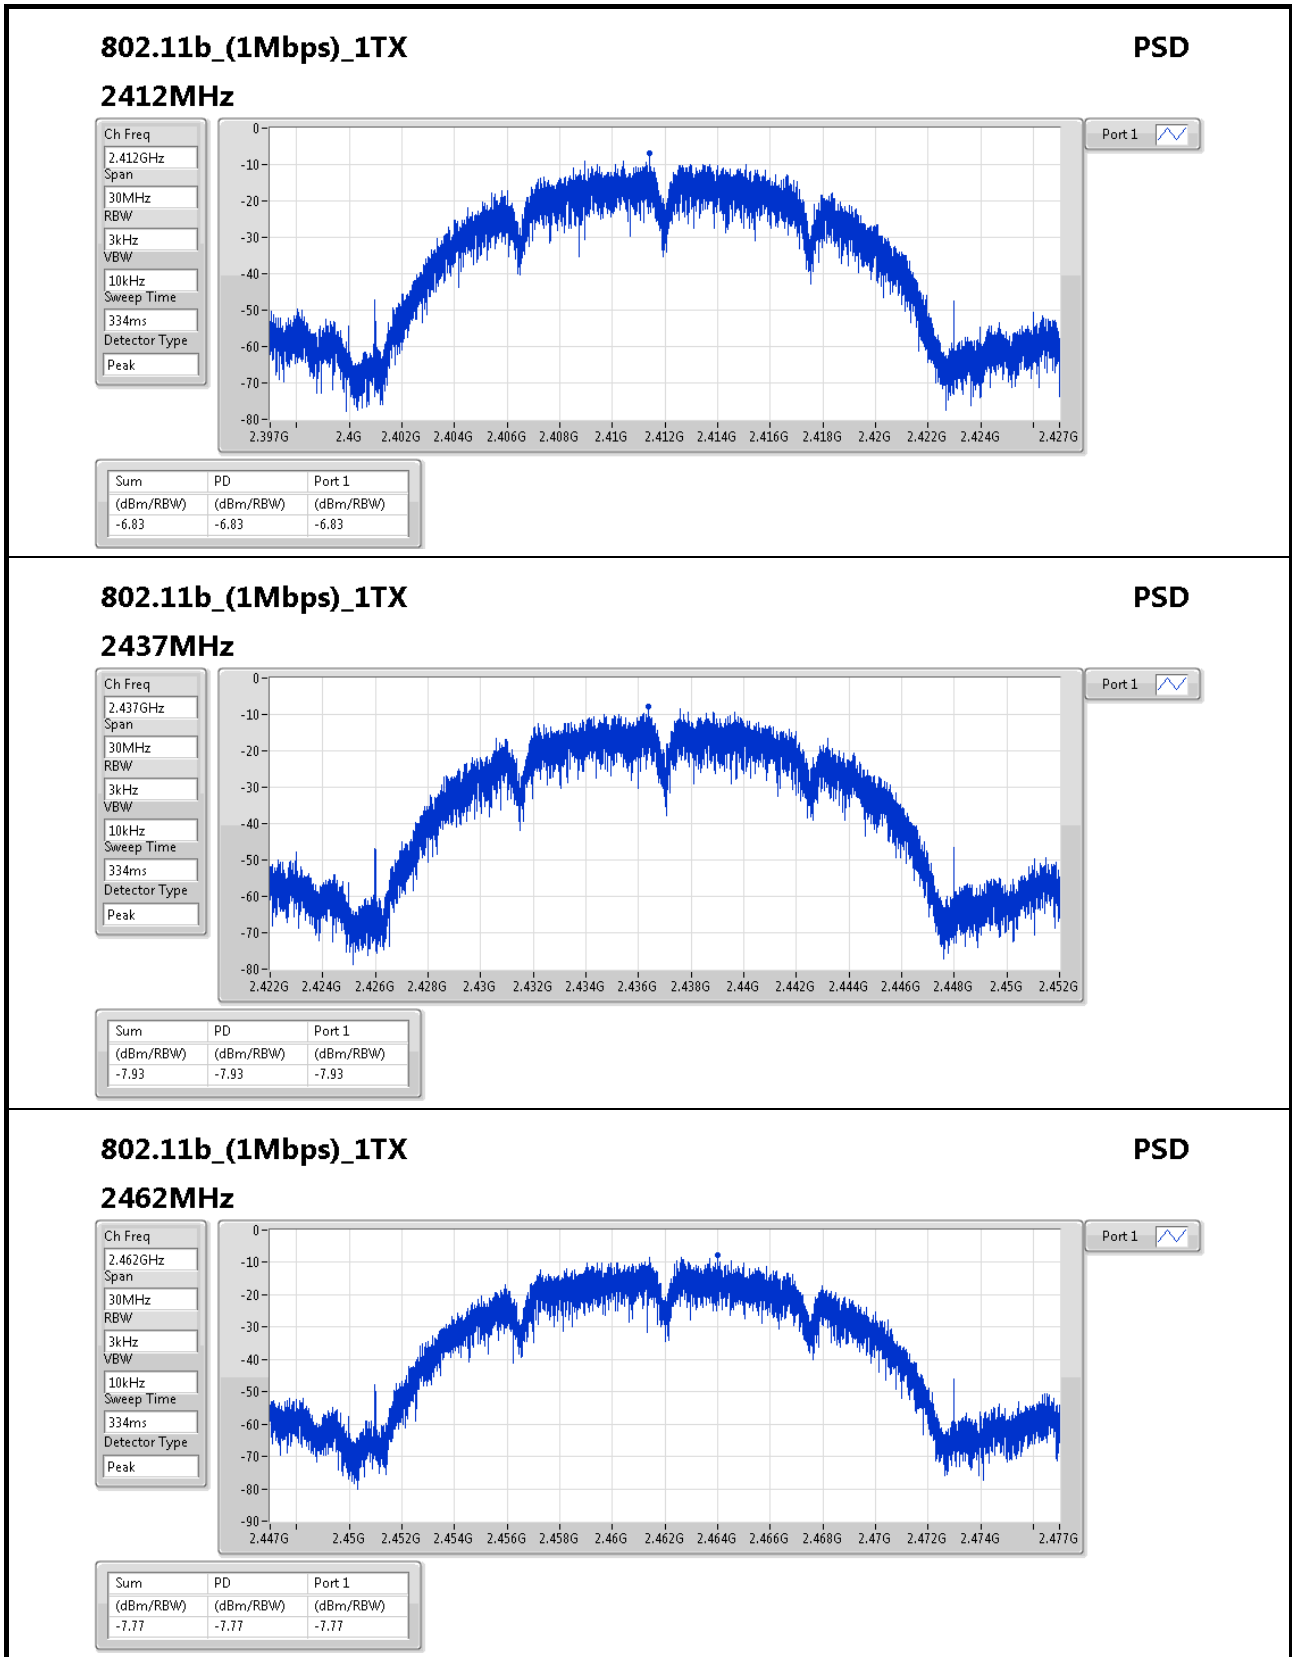

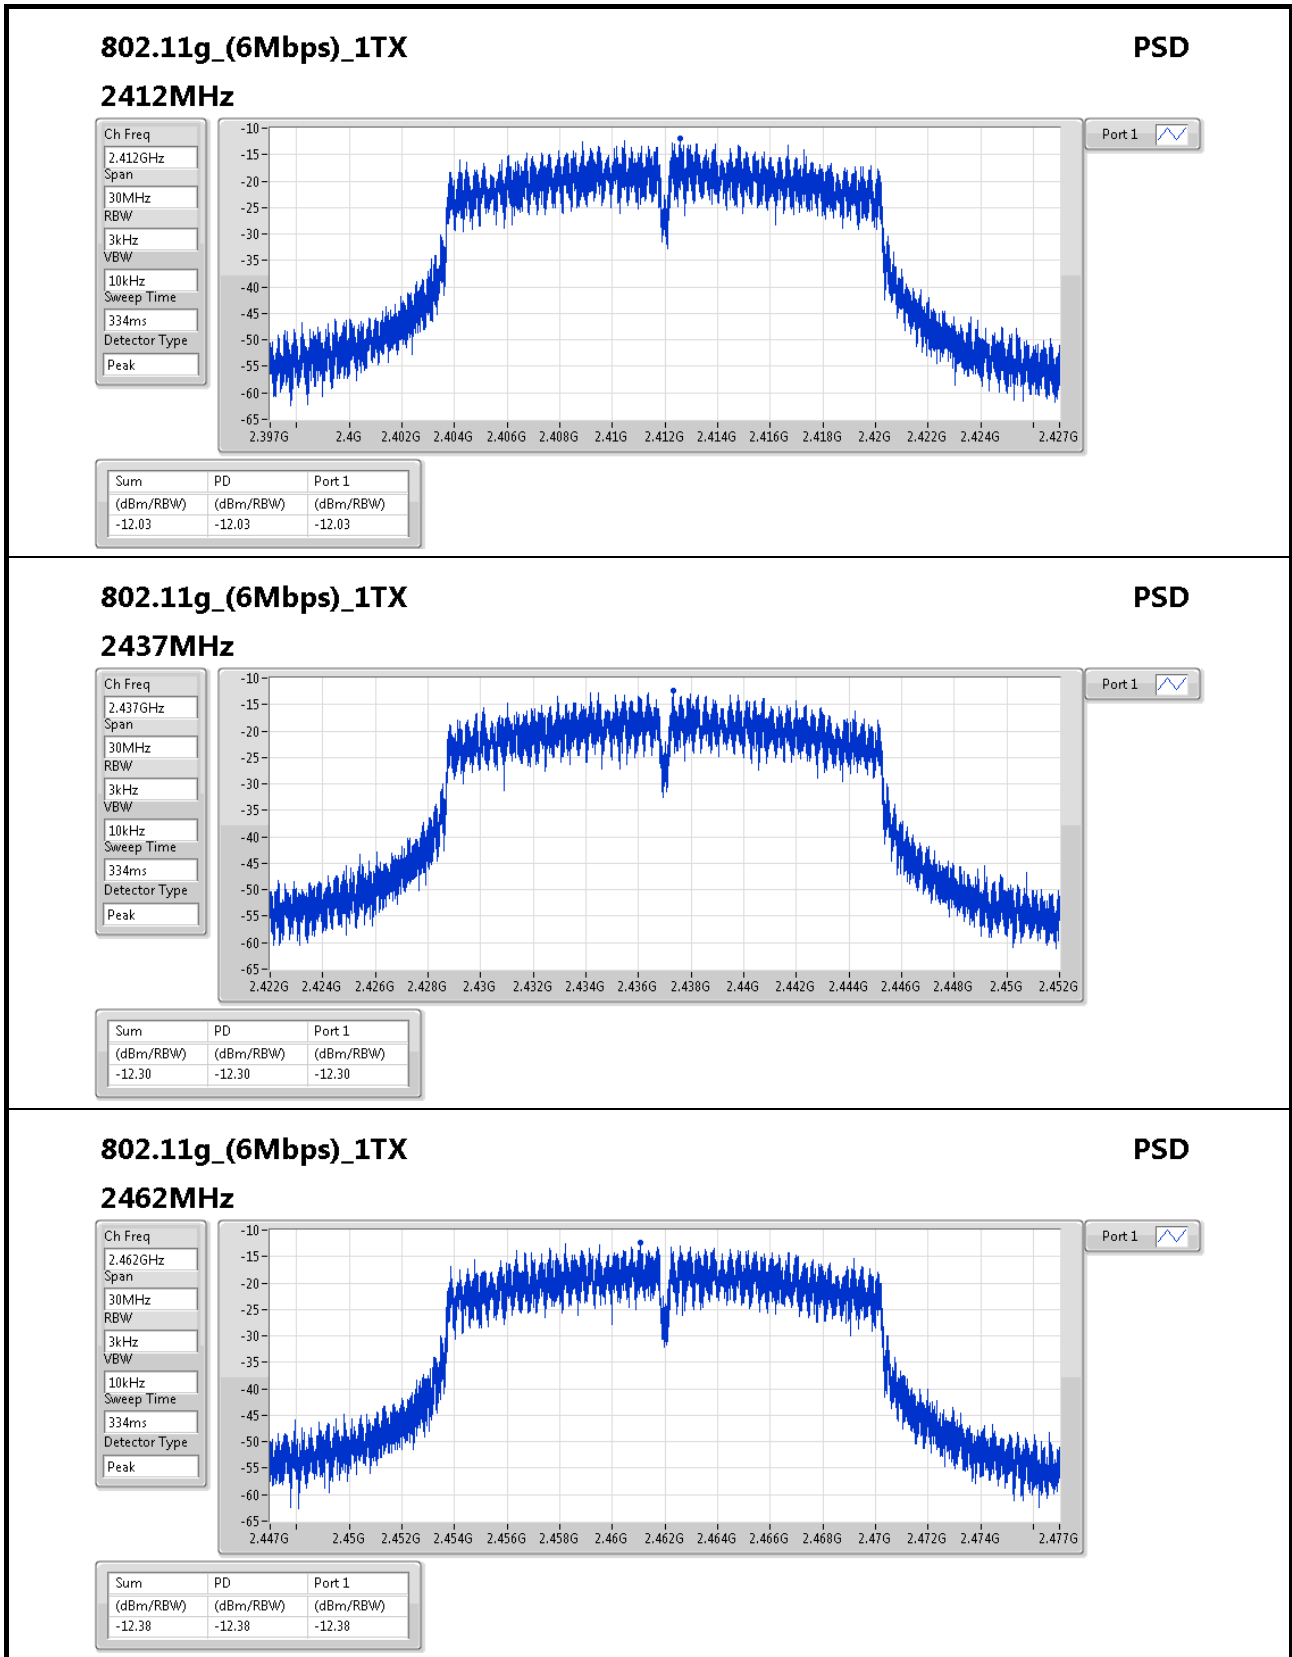

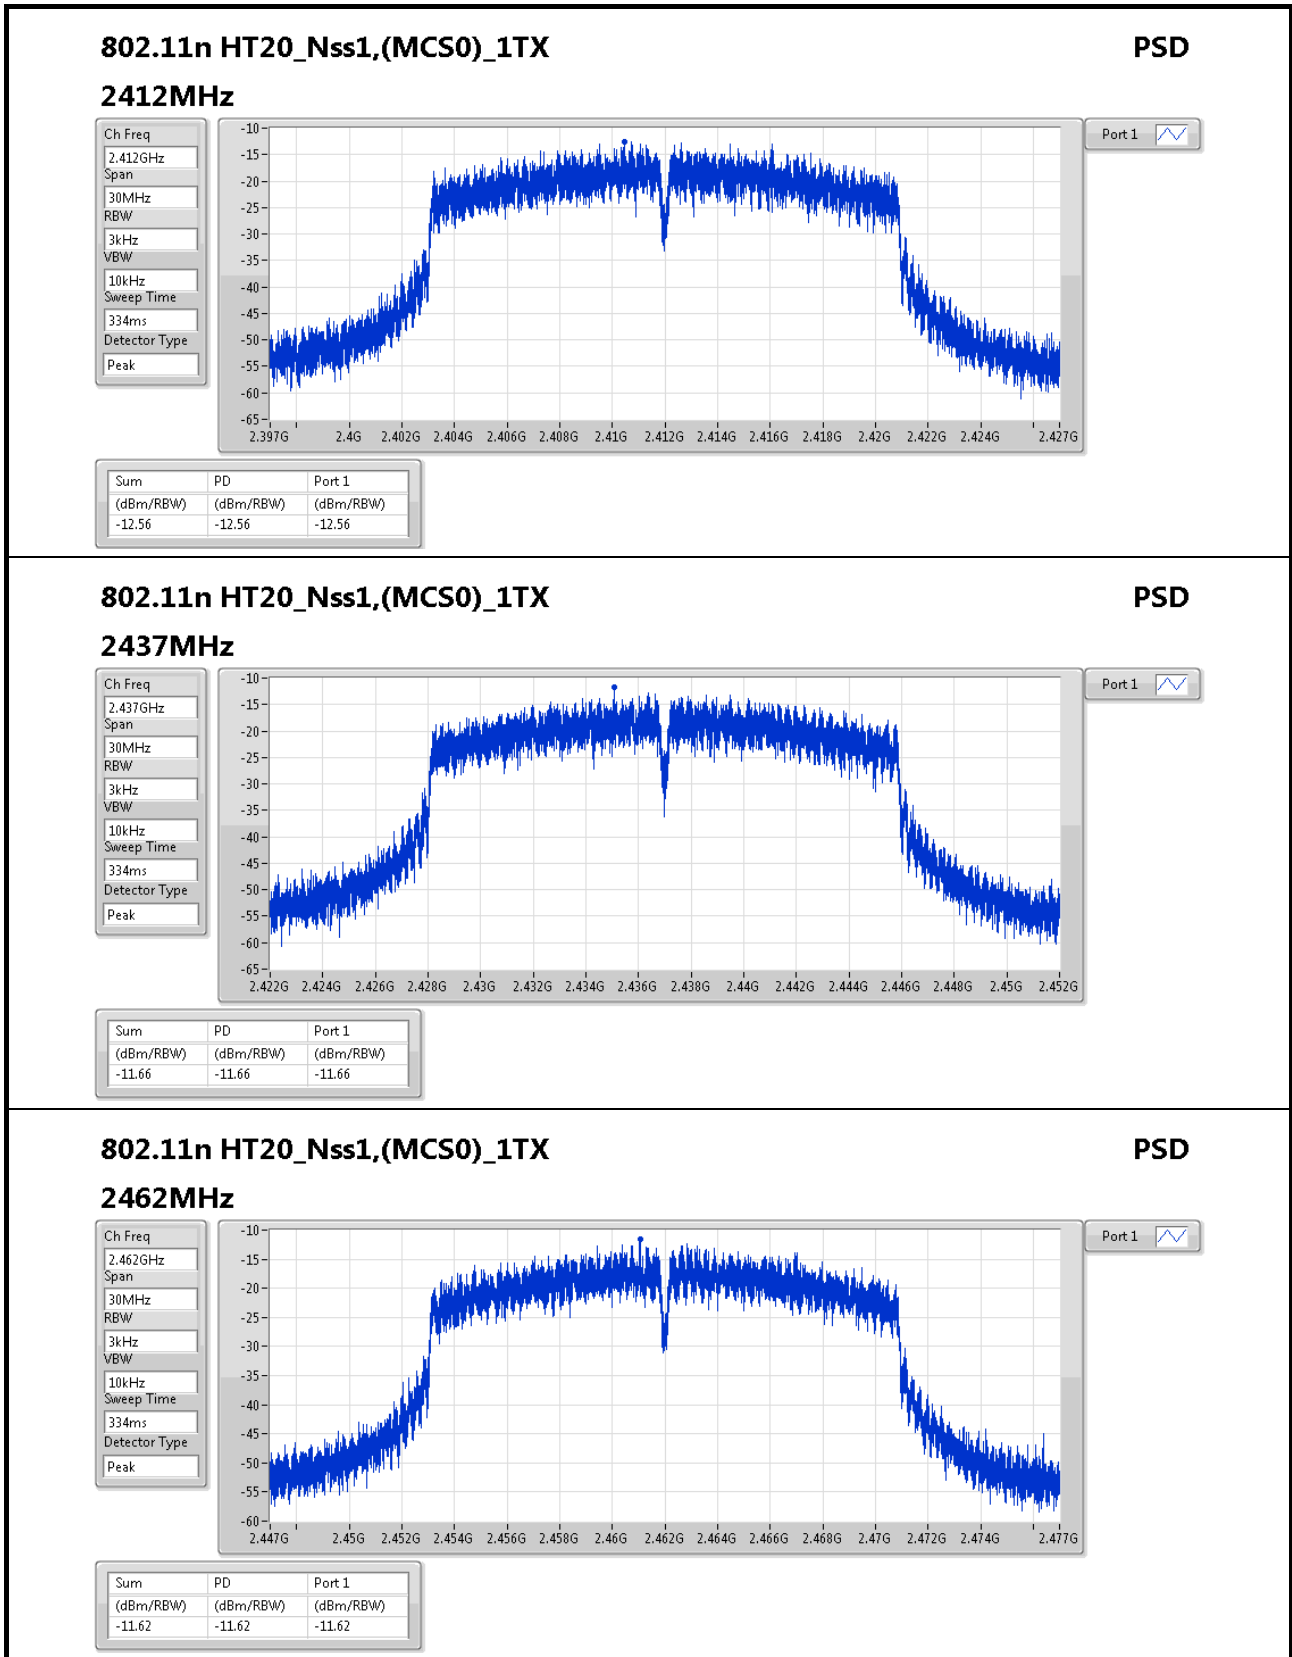

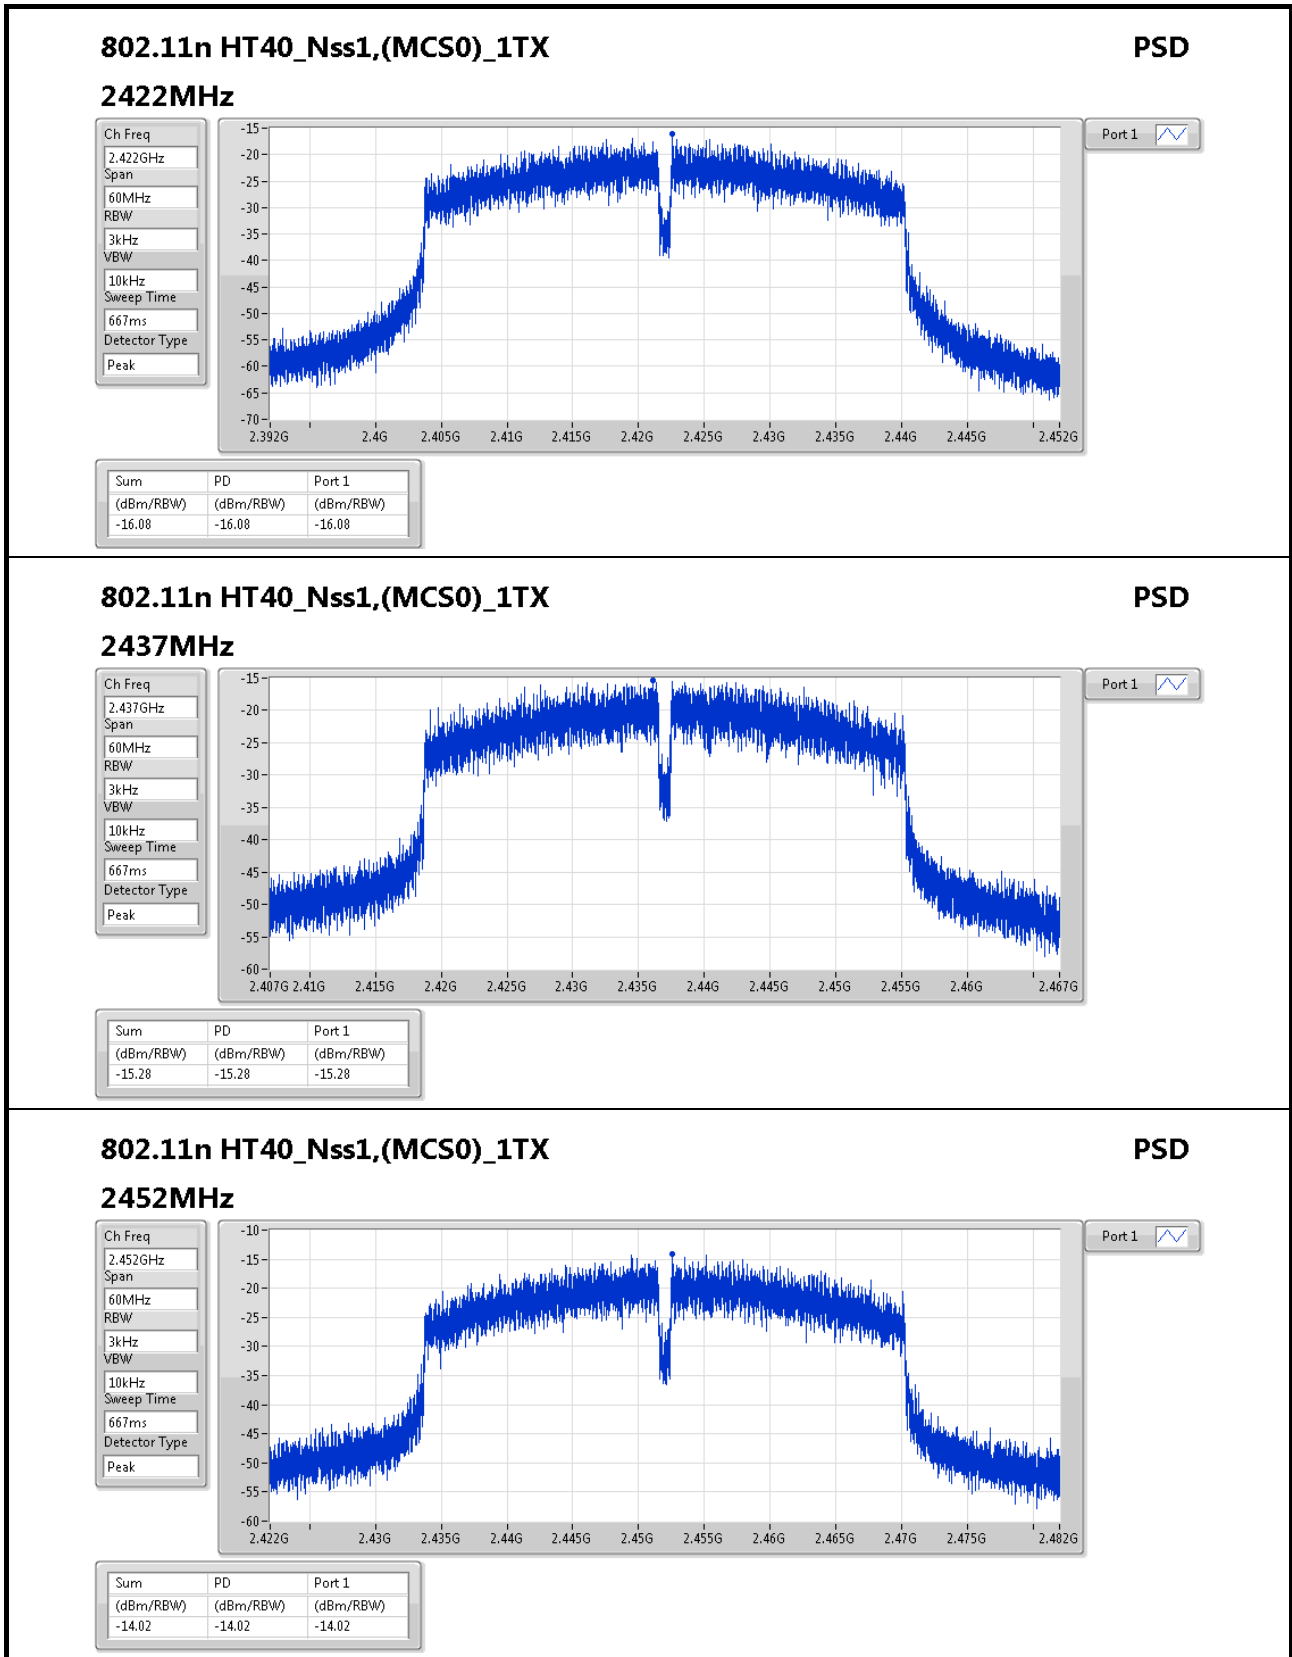
**802.11n HT40\_Nss1,(MCS0)\_1TX**
**PSD**

**2452MHz**

Ch Freq  
2.452GHz

Span  
60MHz

RBW  
3kHz

VBW  
10kHz

Sweep Time  
667ms

Detector Type  
Peak

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.02	-14.02	-14.02



**Summary**

Mode	PD (dBm/RBW)
802.11n HT20_Nss1,(MCS0)_2TX	-
2.4-2.4835GHz	-9.29


RBW=3kHz.

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.31	-12.69	-14.77	-11.73	8.00
2437MHz	Pass	5.31	-11.14	-11.86	-9.29	8.00
2462MHz	Pass	5.31	-11.56	-12.87	-10.70	8.00

DG = Directional Gain; RBW=3kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

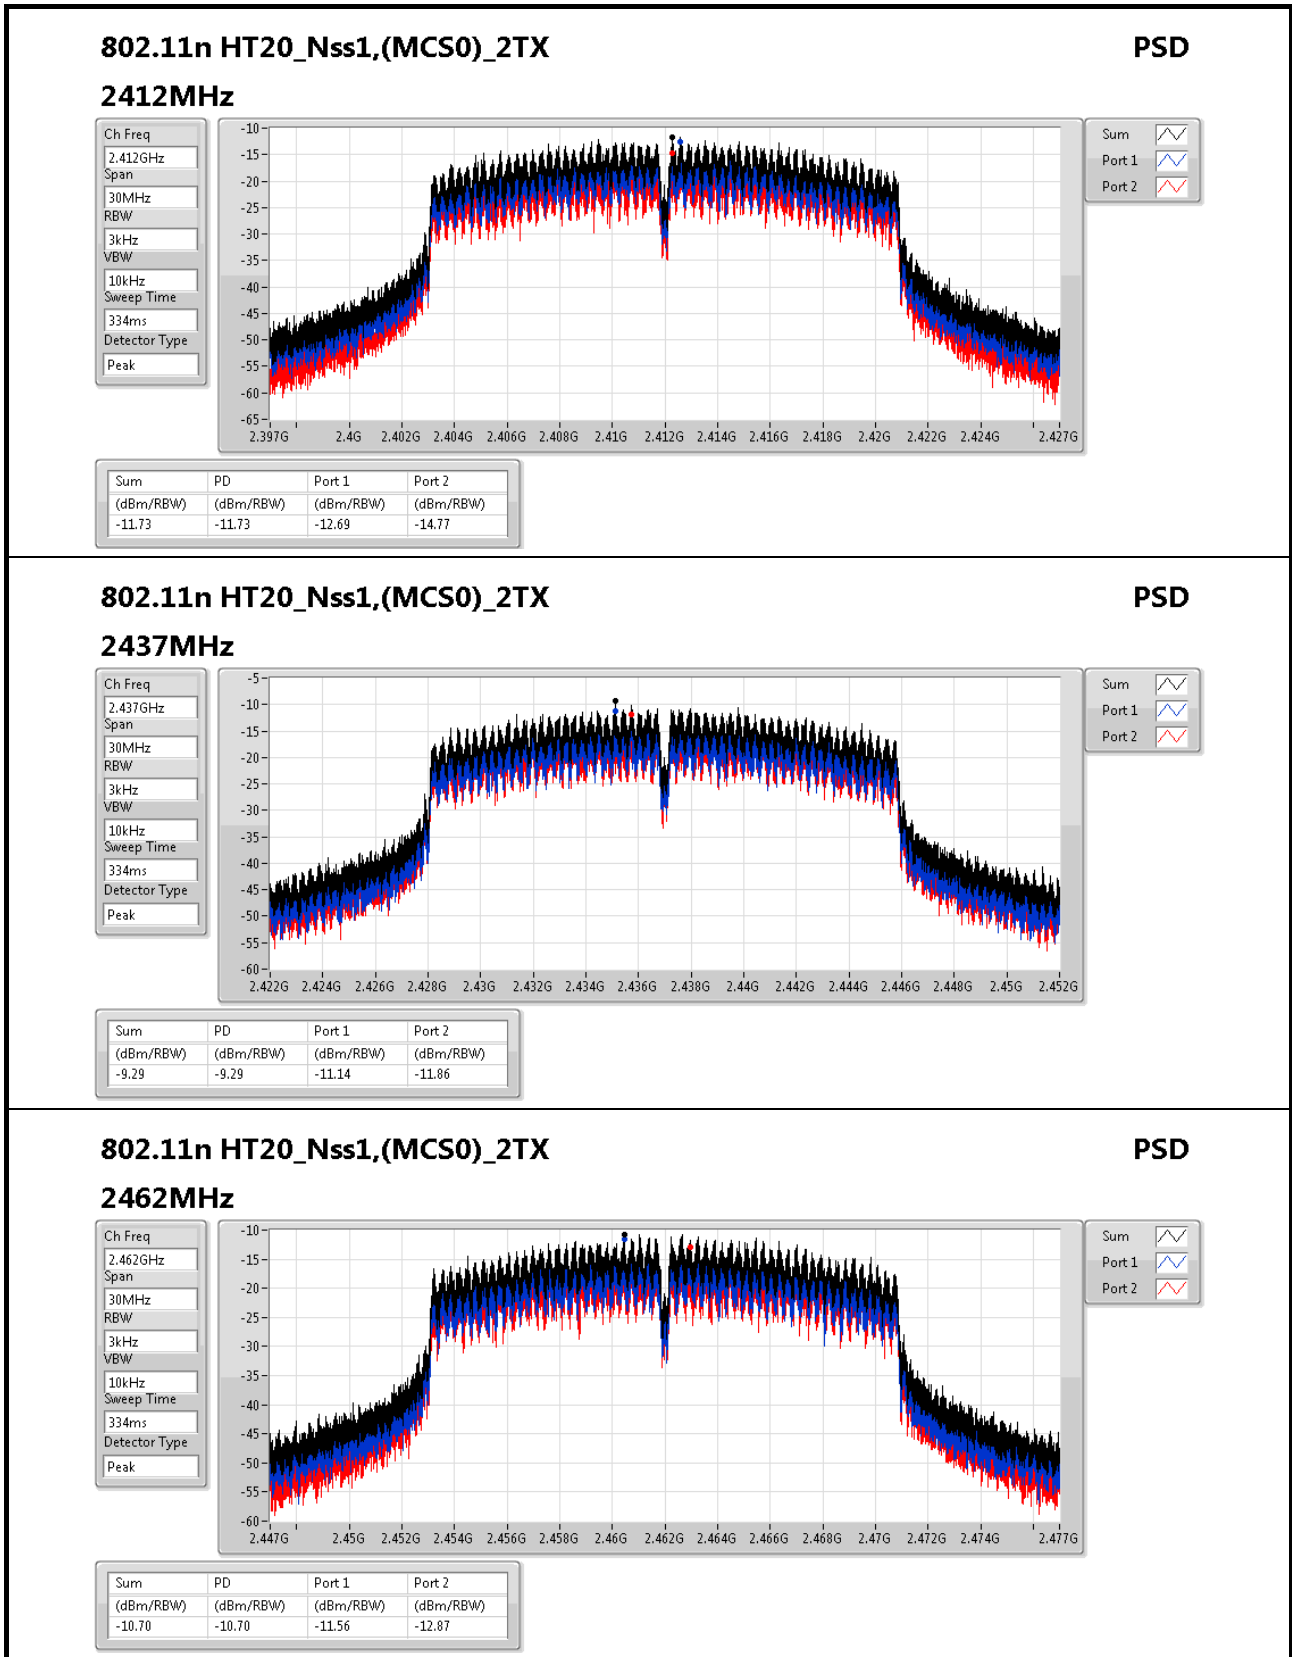




**Summary**


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2.4-2.4835GHz	Pass	2.438243G	2.18	-27.82	49.805M	-56.13	2.39992G	-27.89	2.51526G	-59.46	16.422406G	-53.09	1


**Result**


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.436239G	5.14	-24.86	49.805M	-58.43	2.39688G	-35.83	2.51758G	-57.05	24.640376G	-53.20	1
2437MHz	Pass	2.436239G	5.14	-24.86	49.805M	-58.80	2.39048G	-56.65	2.48782G	-56.33	24.789283G	-53.78	1
2462MHz	Pass	2.436239G	5.14	-24.86	49.805M	-58.26	2.39088G	-60.50	2.48686G	-49.73	24.853903G	-52.43	1
802.11g_(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.432064G	3.42	-26.58	34.66M	-61.27	2.39984G	-28.58	2.5143G	-59.38	24.752759G	-53.60	1
2437MHz	Pass	2.432064G	3.42	-26.58	49.805M	-59.10	2.39984G	-45.73	2.48358G	-52.40	16.422406G	-53.30	1
2462MHz	Pass	2.432064G	3.42	-26.58	49.805M	-61.05	2.39504G	-60.29	2.48382G	-44.66	24.730282G	-53.42	1
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.438243G	2.18	-27.82	49.805M	-56.13	2.39992G	-27.89	2.51526G	-59.46	16.422406G	-53.09	1
2437MHz	Pass	2.438243G	2.18	-27.82	33.495M	-57.75	2.39736G	-54.41	2.48542G	-57.77	21.420617G	-52.37	1
2462MHz	Pass	2.438243G	2.18	-27.82	49.805M	-56.47	2.39776G	-60.25	2.48358G	-41.42	16.756744G	-53.47	1
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.440748G	0.36	-29.64	49.465M	-60.81	2.3992G	-34.06	2.4859G	-58.33	21.774753G	-52.99	1
2437MHz	Pass	2.440748G	0.36	-29.64	34.58M	-61.18	2.39952G	-33.24	2.48366G	-43.64	23.4631G	-53.25	1
2452MHz	Pass	2.440748G	0.36	-29.64	794.86M	-62.06	2.39888G	-43.33	2.4843G	-31.18	16.69569G	-52.56	1

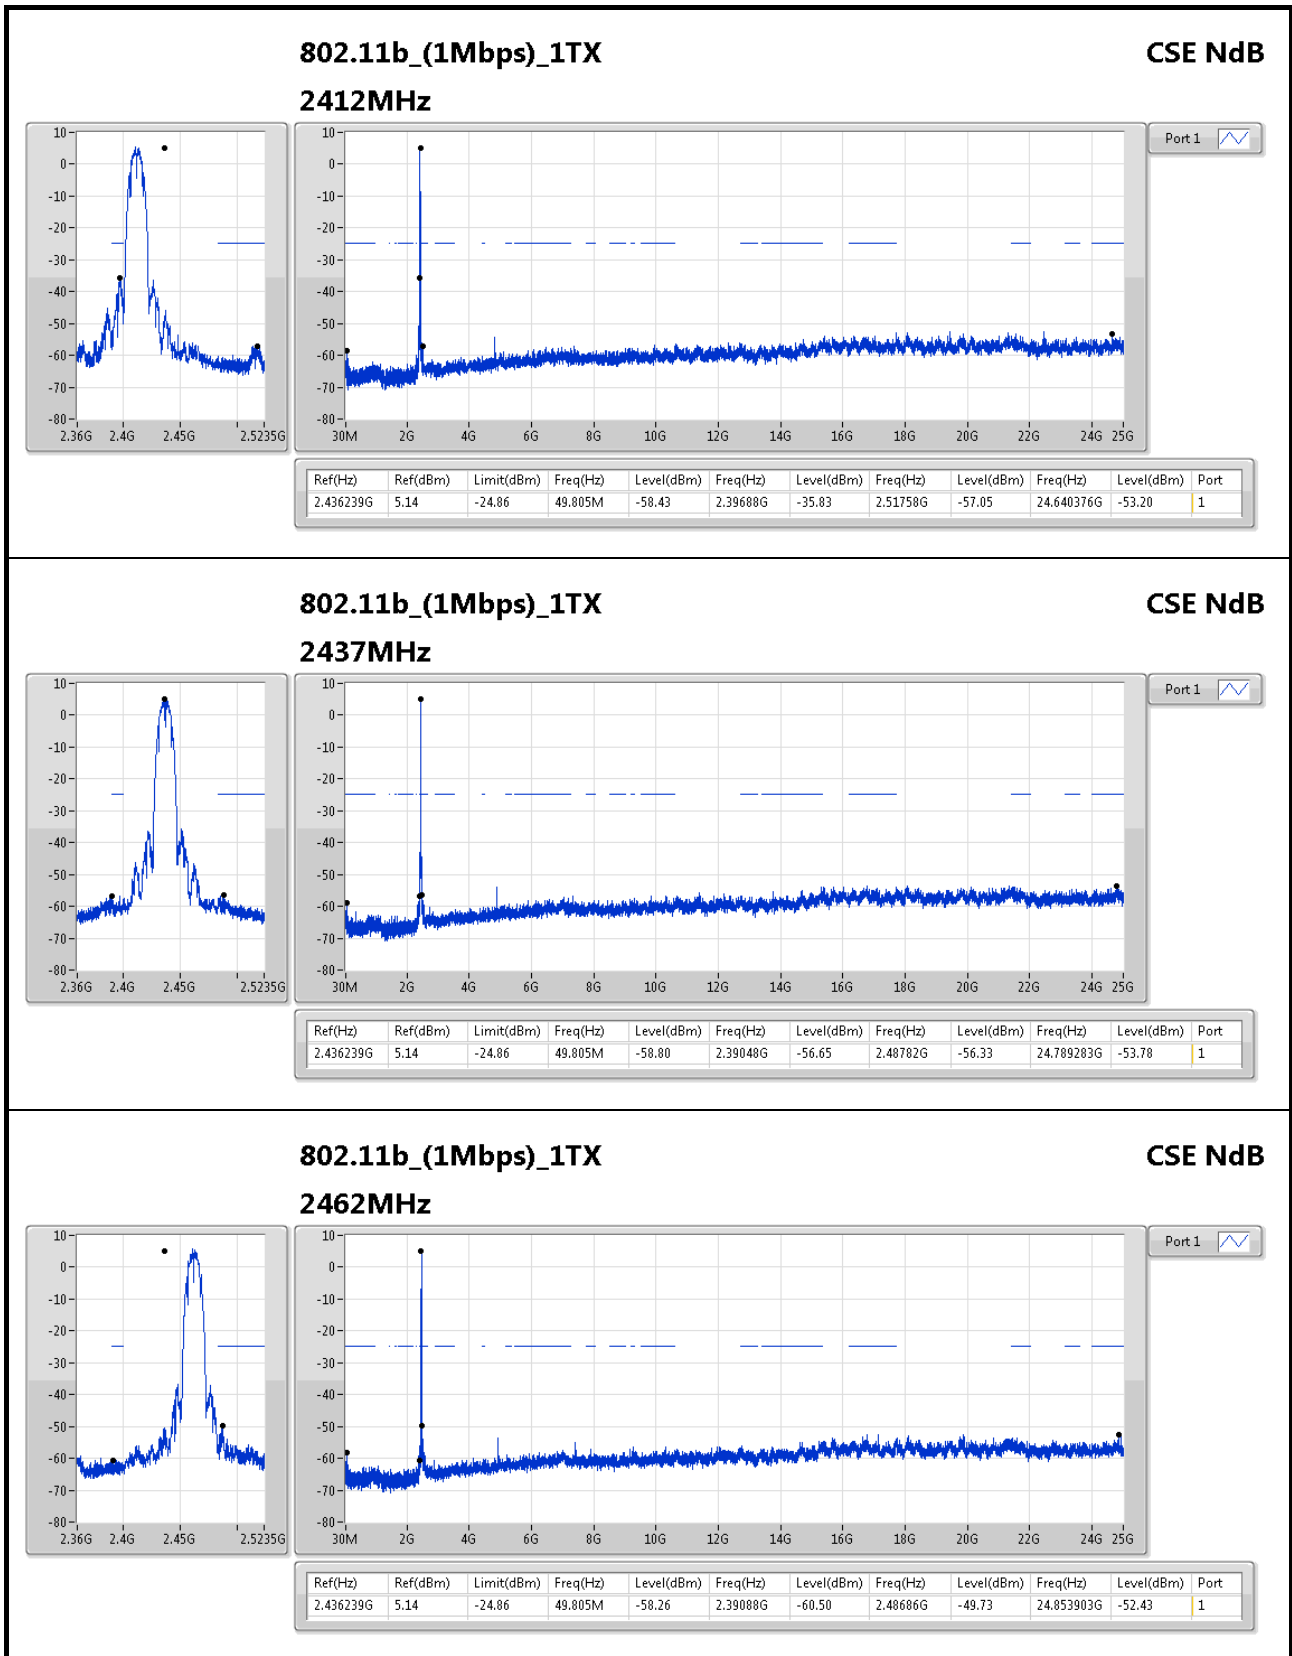



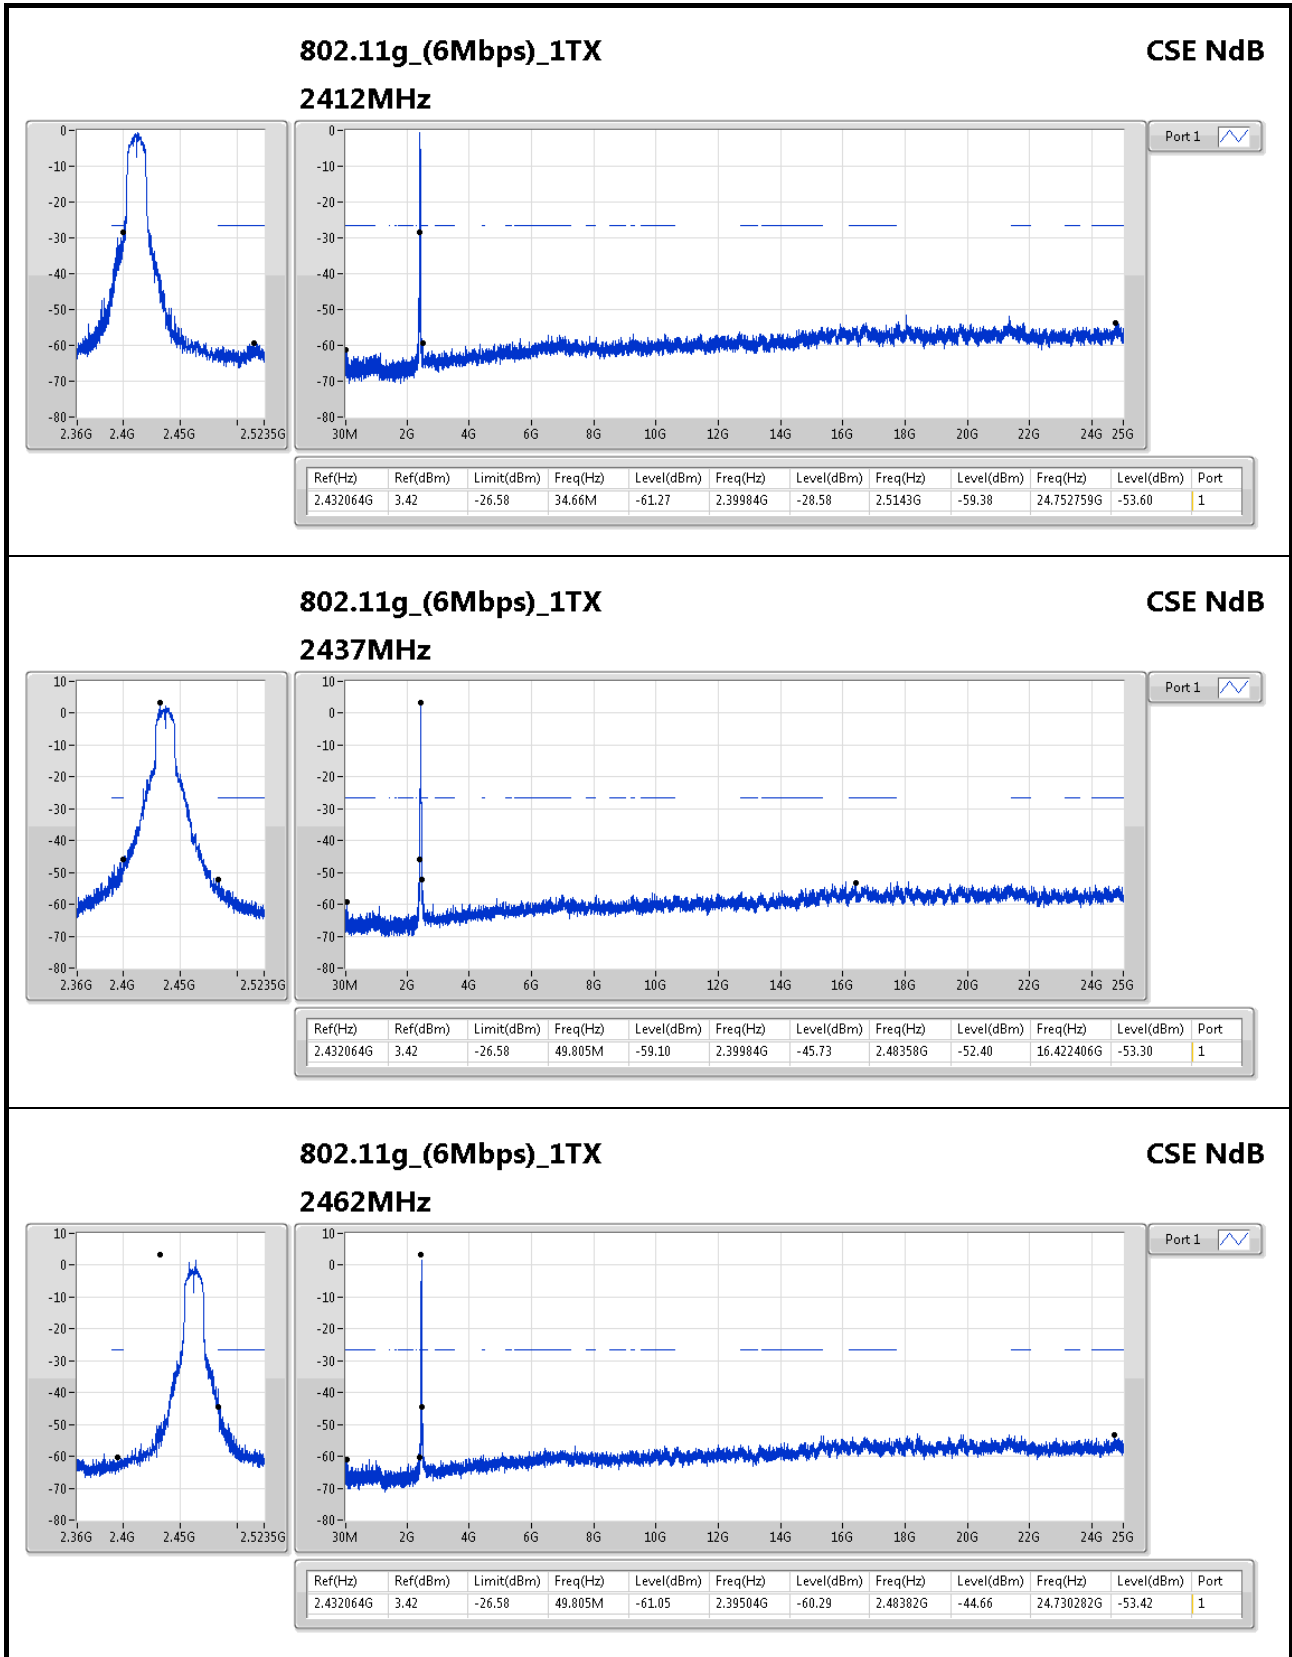

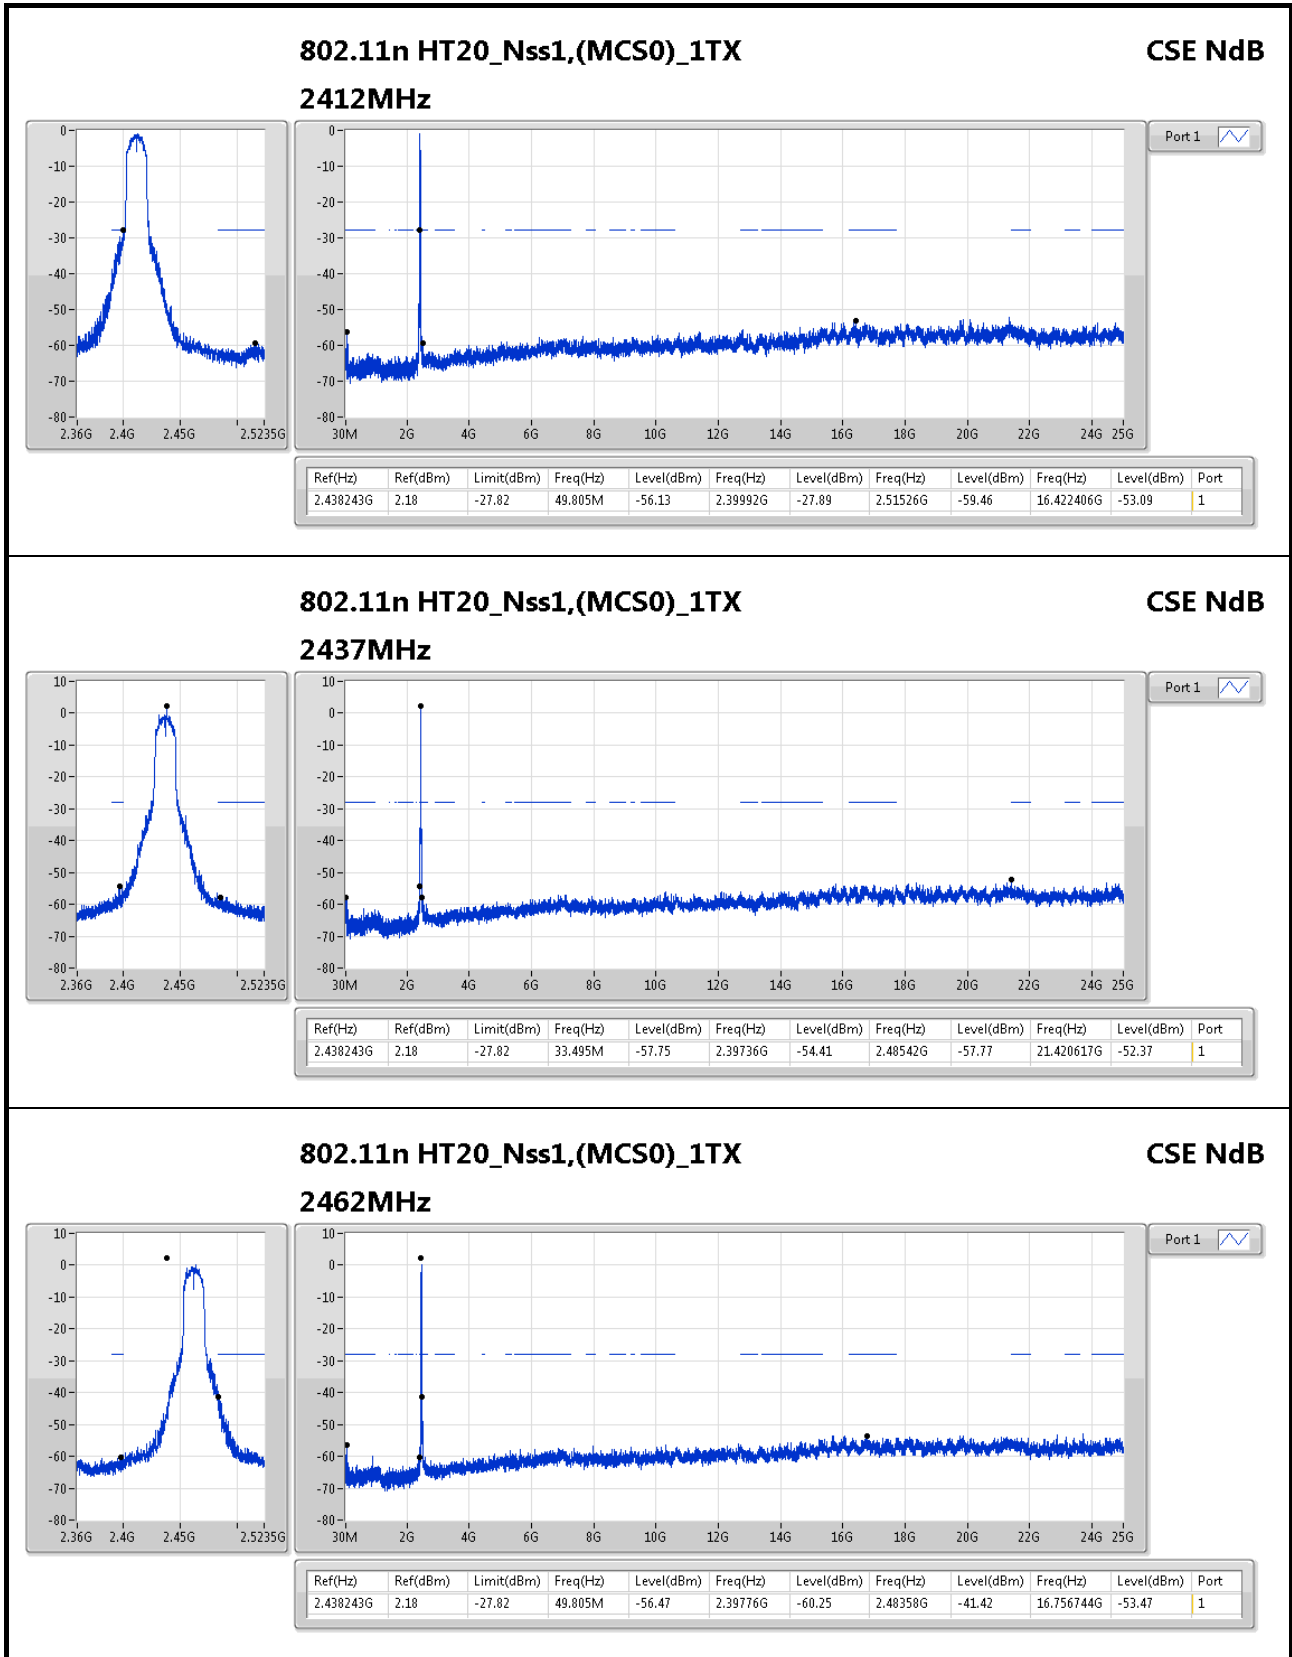

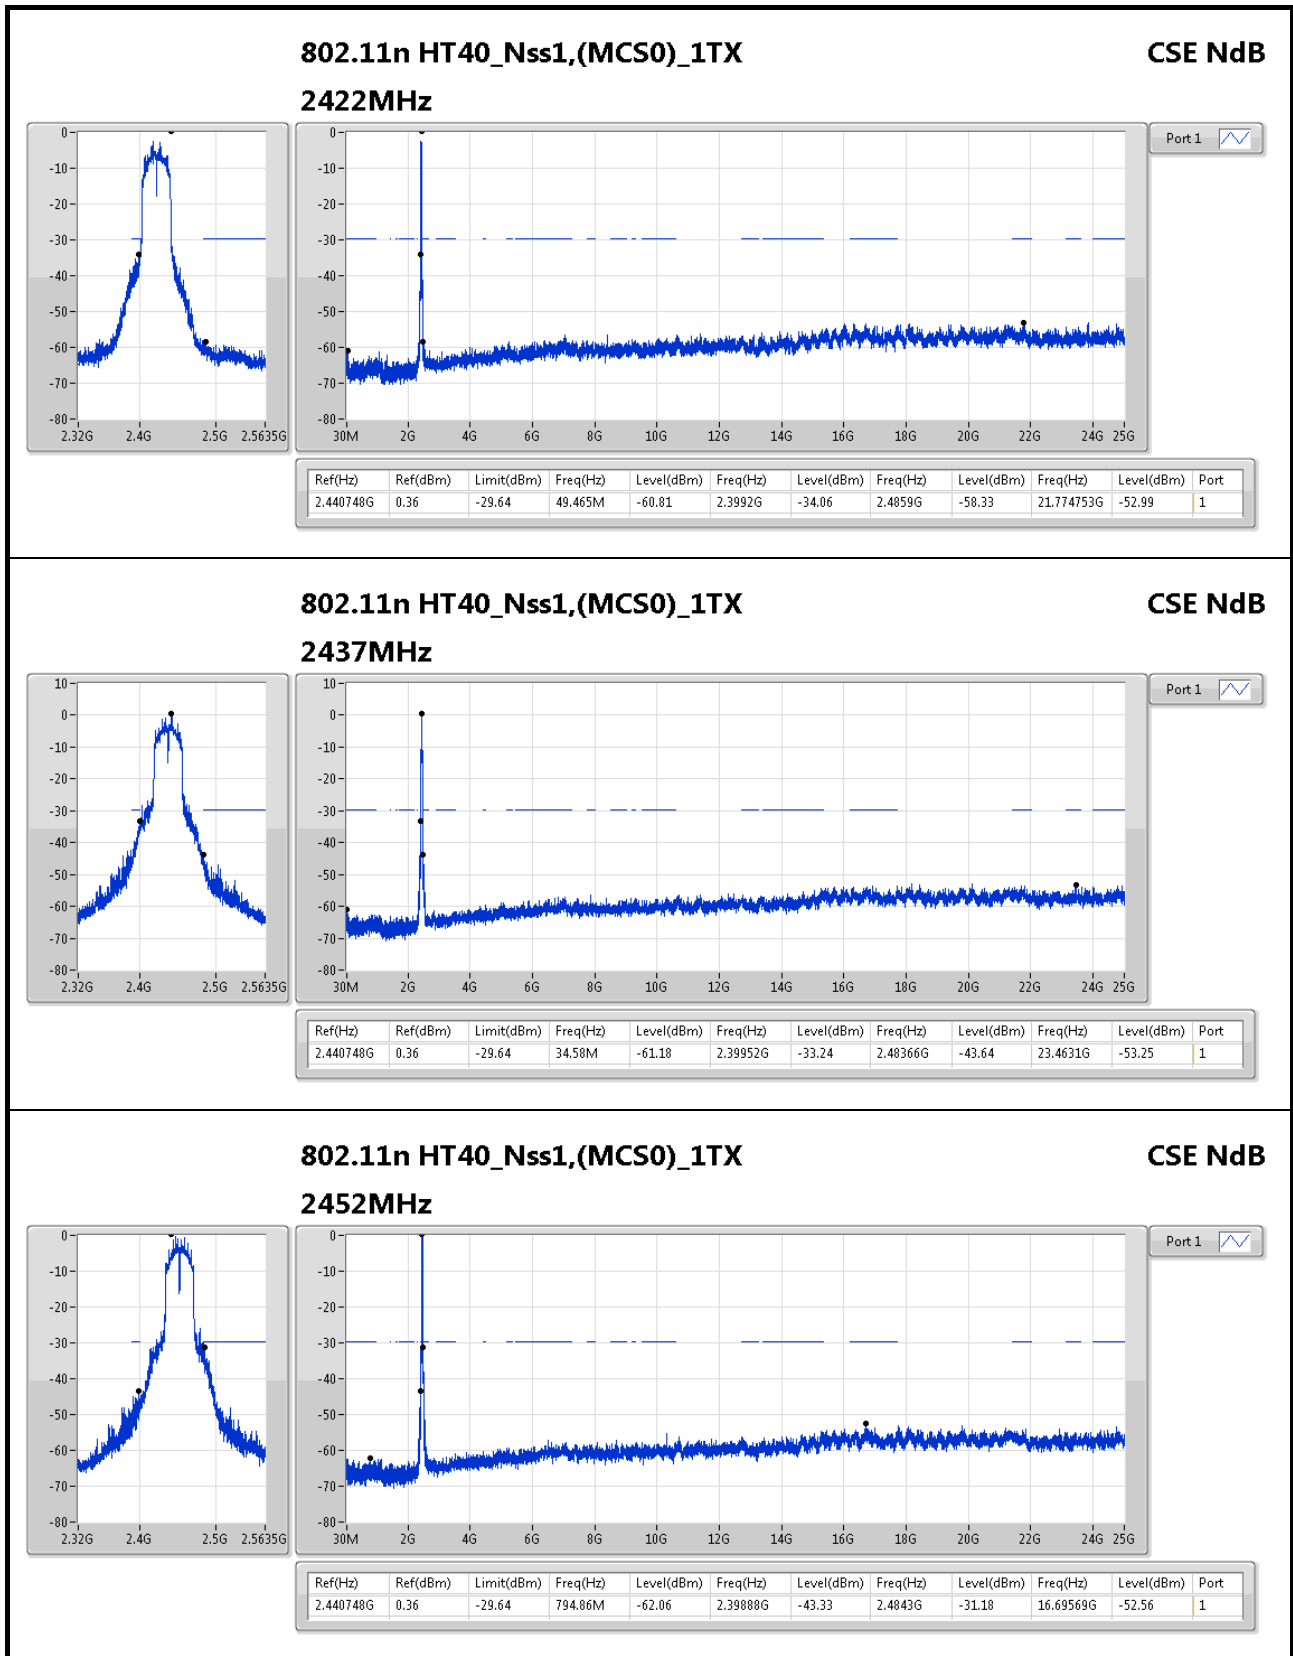

**802.11n HT40\_Nss1,(MCS0)\_1TX**

**2452MHz**

**CSE NdB**





Port 1 




**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2.4-2.4835GHz	Pass	2.435738G	2.97	-27.03	49.805M	-61.01	2.39768G	-27.48	2.48638G	-60.08	21.740908G	-52.67	1

**Result**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.435738G	2.97	-27.03	49.805M	-61.01	2.39768G	-27.48	2.48638G	-60.08	21.740908G	-52.67	1
2412MHz	Pass	2.435738G	2.97	-27.03	49.805M	-61.86	2.39952G	-31.54	2.4847G	-60.40	24.837045G	-52.86	2
2437MHz	Pass	2.435738G	2.97	-27.03	49.805M	-61.67	2.39664G	-51.44	2.48606G	-56.64	21.763384G	-53.07	1
2437MHz	Pass	2.435738G	2.97	-27.03	49.805M	-61.26	2.39584G	-52.44	2.48734G	-55.65	17.178178G	-53.13	2
2462MHz	Pass	2.435738G	2.97	-27.03	752.3M	-61.89	2.39608G	-60.25	2.4839G	-38.77	16.751125G	-52.24	1
2462MHz	Pass	2.435738G	2.97	-27.03	31.165M	-60.83	2.39536G	-60.96	2.48406G	-44.42	16.759553G	-53.03	2

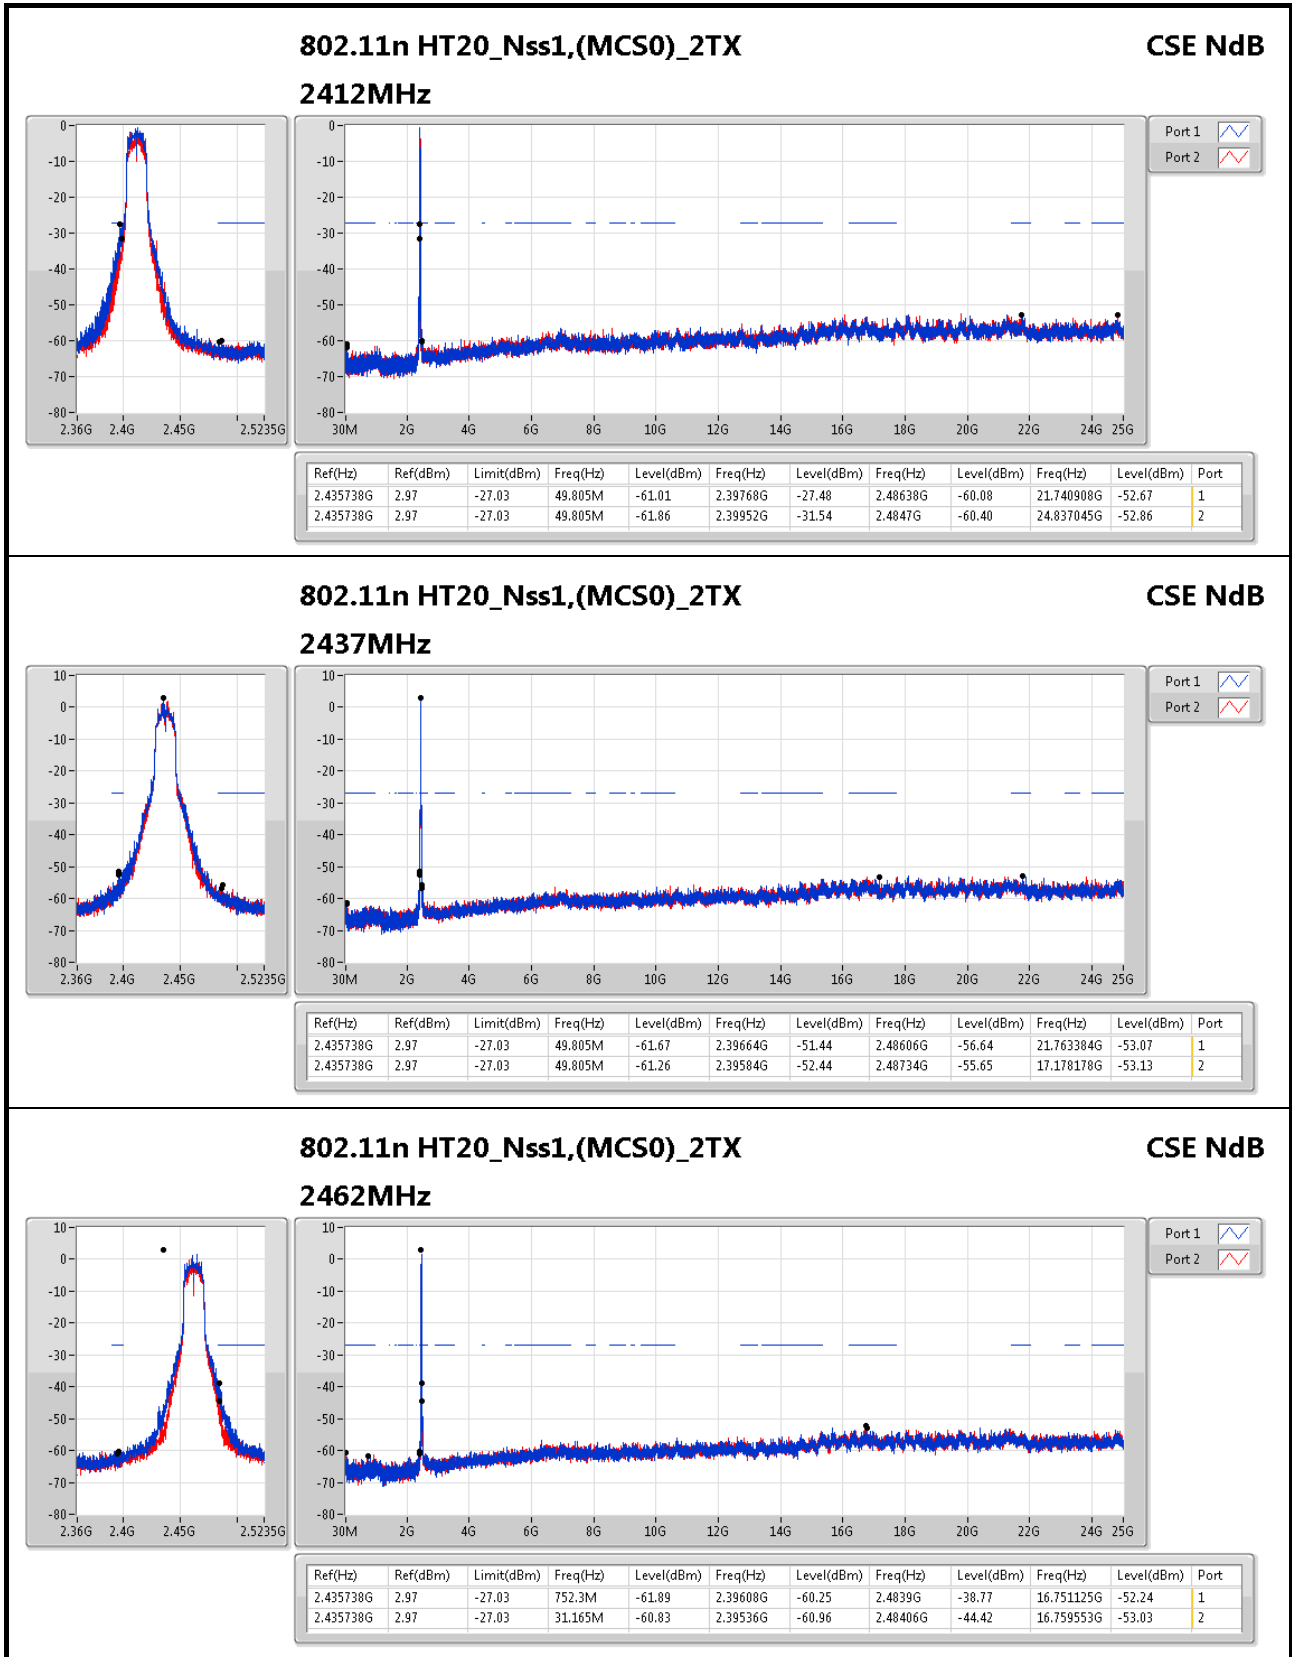



# RSE below 1GHz Result

RSE below 1GHz Result																																																																																																			
Operating Mode	1	Polarization	Horizontal																																																																																																
Operating Function	Normal Link																																																																																																		
<div style="display: flex; justify-content: space-between;"> <div> <p>Level (dBuV/m)</p> <p style="text-align: right;">Date: 2017-03-23 Time: 21:10:32</p> </div> <div style="text-align: right;"> <p>FCC CLASS-B 5dB</p> </div> </div>																																																																																																			
<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>CableAntenna</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>35.82</td> <td>34.01</td> <td>40.00</td> <td>-5.99</td> <td>42.87</td> <td>0.57</td> <td>22.18</td> <td>31.61</td> <td>200</td> <td>2 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>236.61</td> <td>33.82</td> <td>46.00</td> <td>-12.18</td> <td>46.64</td> <td>1.47</td> <td>17.67</td> <td>31.96</td> <td>125</td> <td>174 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>3</td> <td>475.23</td> <td>35.80</td> <td>46.00</td> <td>-10.20</td> <td>42.66</td> <td>2.14</td> <td>23.27</td> <td>32.27</td> <td>200</td> <td>142 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>4</td> <td>504.33</td> <td>36.59</td> <td>46.00</td> <td>-9.41</td> <td>43.01</td> <td>2.19</td> <td>23.72</td> <td>32.33</td> <td>150</td> <td>193 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>5</td> <td>789.51</td> <td>35.13</td> <td>46.00</td> <td>-10.87</td> <td>38.16</td> <td>2.97</td> <td>26.50</td> <td>32.50</td> <td>100</td> <td>315 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>6</td> <td>875.84</td> <td>36.59</td> <td>46.00</td> <td>-9.41</td> <td>38.78</td> <td>2.90</td> <td>27.40</td> <td>32.49</td> <td>100</td> <td>81 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>					Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		1	35.82	34.01	40.00	-5.99	42.87	0.57	22.18	31.61	200	2 Peak	HORIZONTAL	2	236.61	33.82	46.00	-12.18	46.64	1.47	17.67	31.96	125	174 Peak	HORIZONTAL	3	475.23	35.80	46.00	-10.20	42.66	2.14	23.27	32.27	200	142 Peak	HORIZONTAL	4	504.33	36.59	46.00	-9.41	43.01	2.19	23.72	32.33	150	193 Peak	HORIZONTAL	5	789.51	35.13	46.00	-10.87	38.16	2.97	26.50	32.50	100	315 Peak	HORIZONTAL	6	875.84	36.59	46.00	-9.41	38.78	2.90	27.40	32.49	100	81 Peak	HORIZONTAL
	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg																																																																																									
1	35.82	34.01	40.00	-5.99	42.87	0.57	22.18	31.61	200	2 Peak	HORIZONTAL																																																																																								
2	236.61	33.82	46.00	-12.18	46.64	1.47	17.67	31.96	125	174 Peak	HORIZONTAL																																																																																								
3	475.23	35.80	46.00	-10.20	42.66	2.14	23.27	32.27	200	142 Peak	HORIZONTAL																																																																																								
4	504.33	36.59	46.00	-9.41	43.01	2.19	23.72	32.33	150	193 Peak	HORIZONTAL																																																																																								
5	789.51	35.13	46.00	-10.87	38.16	2.97	26.50	32.50	100	315 Peak	HORIZONTAL																																																																																								
6	875.84	36.59	46.00	-9.41	38.78	2.90	27.40	32.49	100	81 Peak	HORIZONTAL																																																																																								
<p>Note 1: "&gt;20dB" means emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																			



# RSE below 1GHz Result

RSE below 1GHz Result																																																																																																			
Operating Mode	1	Polarization	Vertical																																																																																																
Operating Function	Normal Link																																																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>CableAntenna</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>38.73</td> <td>36.88</td> <td>40.00</td> <td>-3.12</td> <td>47.38</td> <td>0.59</td> <td>20.56</td> <td>31.65</td> <td>300</td> <td>1 QP</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>52.31</td> <td>36.23</td> <td>40.00</td> <td>-3.77</td> <td>52.89</td> <td>0.70</td> <td>14.40</td> <td>31.76</td> <td>100</td> <td>331 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>3</td> <td>56.19</td> <td>36.98</td> <td>40.00</td> <td>-3.02</td> <td>54.54</td> <td>0.73</td> <td>13.48</td> <td>31.77</td> <td>125</td> <td>276 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>4</td> <td>62.01</td> <td>36.62</td> <td>40.00</td> <td>-3.38</td> <td>55.10</td> <td>0.75</td> <td>12.56</td> <td>31.79</td> <td>100</td> <td>65 QP</td> <td>VERTICAL</td> </tr> <tr> <td>5</td> <td>560.59</td> <td>37.30</td> <td>46.00</td> <td>-8.70</td> <td>42.62</td> <td>2.31</td> <td>24.76</td> <td>32.39</td> <td>100</td> <td>172 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>6</td> <td>592.60</td> <td>38.05</td> <td>46.00</td> <td>-7.95</td> <td>43.08</td> <td>2.42</td> <td>24.96</td> <td>32.41</td> <td>100</td> <td>169 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>					Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		1	38.73	36.88	40.00	-3.12	47.38	0.59	20.56	31.65	300	1 QP	VERTICAL	2	52.31	36.23	40.00	-3.77	52.89	0.70	14.40	31.76	100	331 Peak	VERTICAL	3	56.19	36.98	40.00	-3.02	54.54	0.73	13.48	31.77	125	276 Peak	VERTICAL	4	62.01	36.62	40.00	-3.38	55.10	0.75	12.56	31.79	100	65 QP	VERTICAL	5	560.59	37.30	46.00	-8.70	42.62	2.31	24.76	32.39	100	172 Peak	VERTICAL	6	592.60	38.05	46.00	-7.95	43.08	2.42	24.96	32.41	100	169 Peak	VERTICAL
	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg																																																																																									
1	38.73	36.88	40.00	-3.12	47.38	0.59	20.56	31.65	300	1 QP	VERTICAL																																																																																								
2	52.31	36.23	40.00	-3.77	52.89	0.70	14.40	31.76	100	331 Peak	VERTICAL																																																																																								
3	56.19	36.98	40.00	-3.02	54.54	0.73	13.48	31.77	125	276 Peak	VERTICAL																																																																																								
4	62.01	36.62	40.00	-3.38	55.10	0.75	12.56	31.79	100	65 QP	VERTICAL																																																																																								
5	560.59	37.30	46.00	-8.70	42.62	2.31	24.76	32.39	100	172 Peak	VERTICAL																																																																																								
6	592.60	38.05	46.00	-7.95	43.08	2.42	24.96	32.41	100	169 Peak	VERTICAL																																																																																								
<p>Note 1: "&gt;20dB" means emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
2.4-2.4835GHz	Pass	AV	2.3896G	53.96	54.00	-0.04	32.67	3	V	313	2.26	-



### 802.11b\_(1Mbps)\_1TX

### 2412MHz\_TX

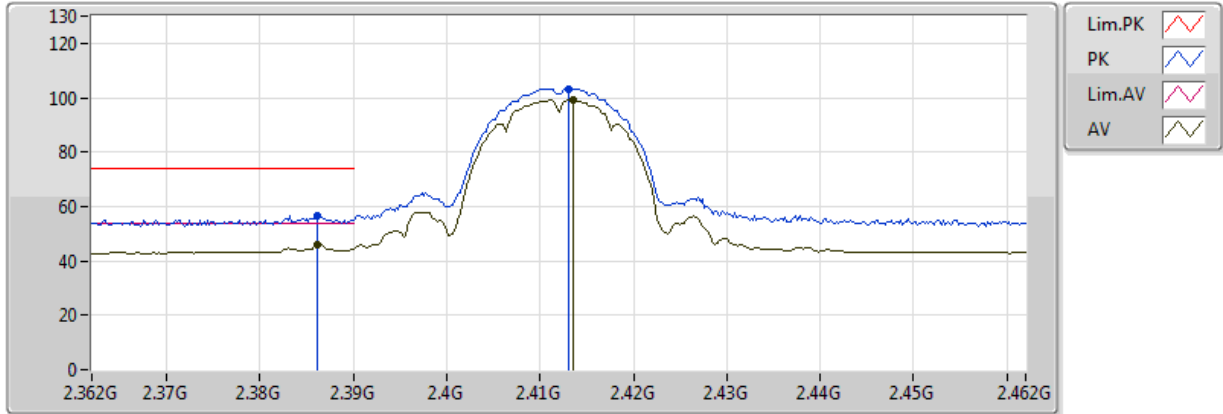


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3862G	45.96	54.00	-8.04	31.04	3	V	21	2.50	-
AV	2.4136G	98.97	Inf	-Inf	31.00	3	V	21	2.50	-
PK	2.3862G	56.42	74.00	-17.58	31.04	3	V	21	2.50	-
PK	2.413G	103.25	Inf	-Inf	31.00	3	V	21	2.50	-

### 802.11b\_(1Mbps)\_1TX

### 2412MHz\_TX

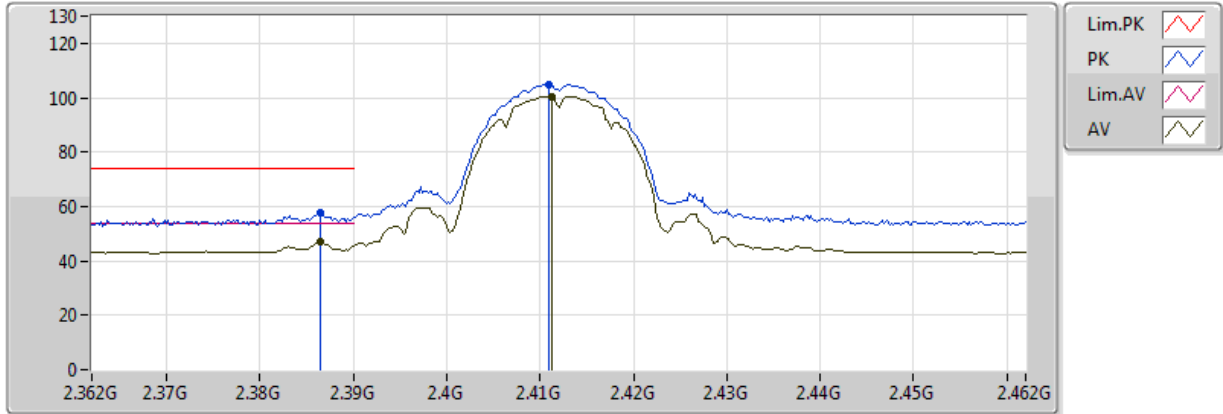


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3864G	47.01	54.00	-6.99	31.04	3	H	9	1.45	-
AV	2.4112G	100.45	Inf	-Inf	31.01	3	H	9	1.45	-
PK	2.3864G	57.48	74.00	-16.52	31.04	3	H	9	1.45	-
PK	2.411G	104.72	Inf	-Inf	31.01	3	H	9	1.45	-

### 802.11b\_(1Mbps)\_1TX

### 2412MHz\_TX

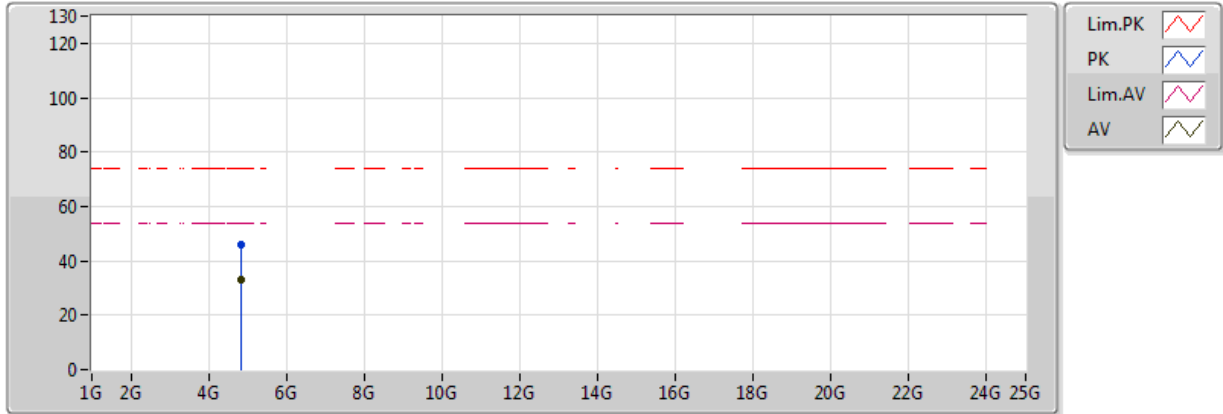


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.82404G	33.13	54.00	-20.87	3.40	3	V	342	1.14	-
PK	4.82422G	46.17	74.00	-27.83	3.40	3	V	342	1.14	-



### 802.11b\_(1Mbps)\_1TX

### 2412MHz\_TX

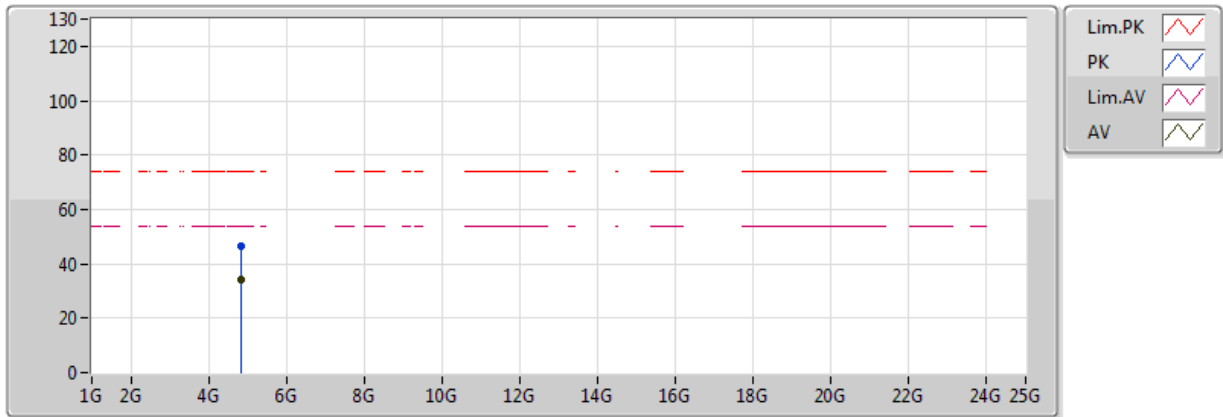


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.82402G	34.29	54.00	-19.71	3.40	3	H	66	2.99	-
PK	4.82393G	46.71	74.00	-27.29	3.40	3	H	66	2.99	-

### 802.11b\_(1Mbps)\_1TX

### 2437MHz\_TX

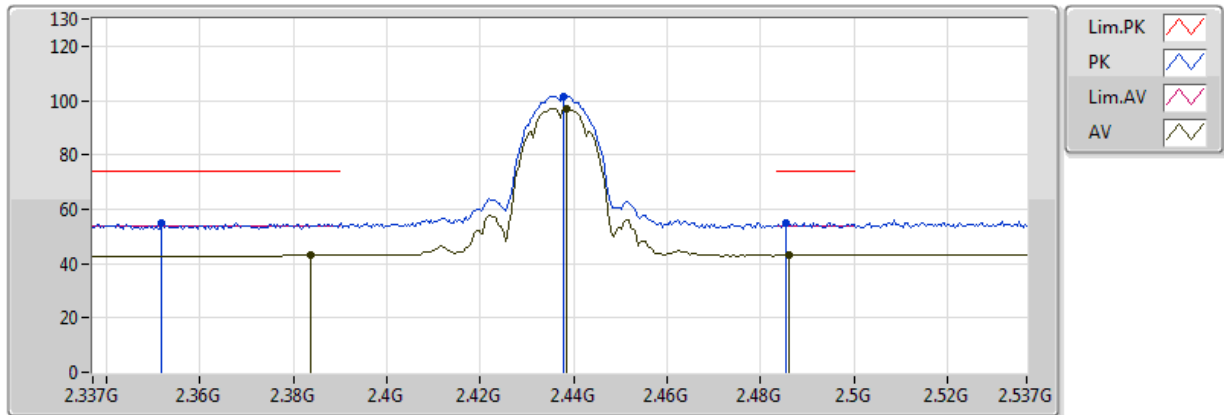


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3838G	43.12	54.00	-10.88	31.04	3	V	17	2.44	-
AV	2.4386G	97.12	Inf	-Inf	30.97	3	V	17	2.44	-
AV	2.4862G	43.12	54.00	-10.88	30.92	3	V	17	2.44	-
PK	2.3518G	54.75	74.00	-19.25	31.09	3	V	17	2.44	-
PK	2.4378G	101.58	Inf	-Inf	30.97	3	V	17	2.44	-
PK	2.4854G	55.12	74.00	-18.88	30.92	3	V	17	2.44	-

### 802.11b\_(1Mbps)\_1TX

### 2437MHz\_TX

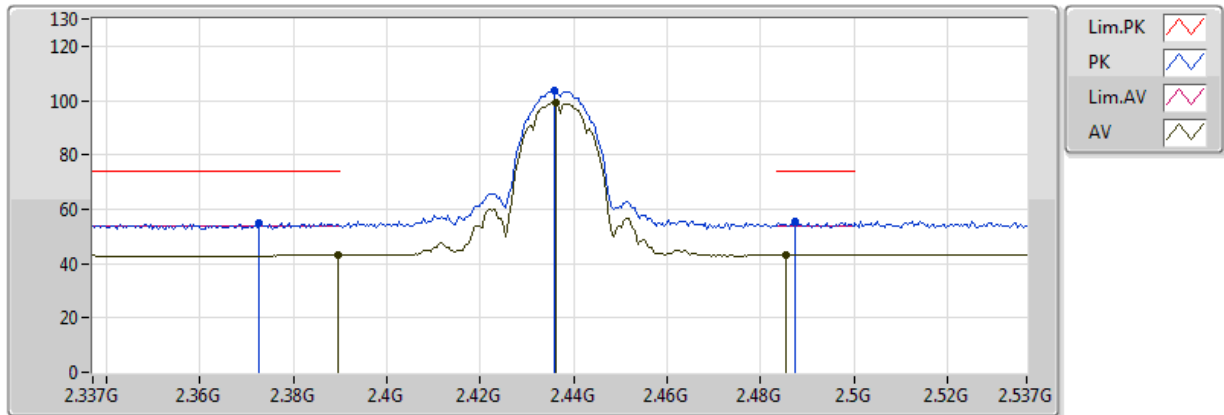


20170327  
 EUT Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3894G	43.41	54.00	-10.59	31.04	3	H	11	1.07	-
AV	2.4362G	99.11	Inf	-Inf	30.98	3	H	11	1.07	-
AV	2.4854G	43.16	54.00	-10.84	30.92	3	H	11	1.07	-
PK	2.3726G	55.00	74.00	-19.00	31.06	3	H	11	1.07	-
PK	2.4358G	103.46	Inf	-Inf	30.98	3	H	11	1.07	-
PK	2.4874G	55.52	74.00	-18.48	30.92	3	H	11	1.07	-



### 802.11b\_(1Mbps)\_1TX

### 2437MHz\_TX

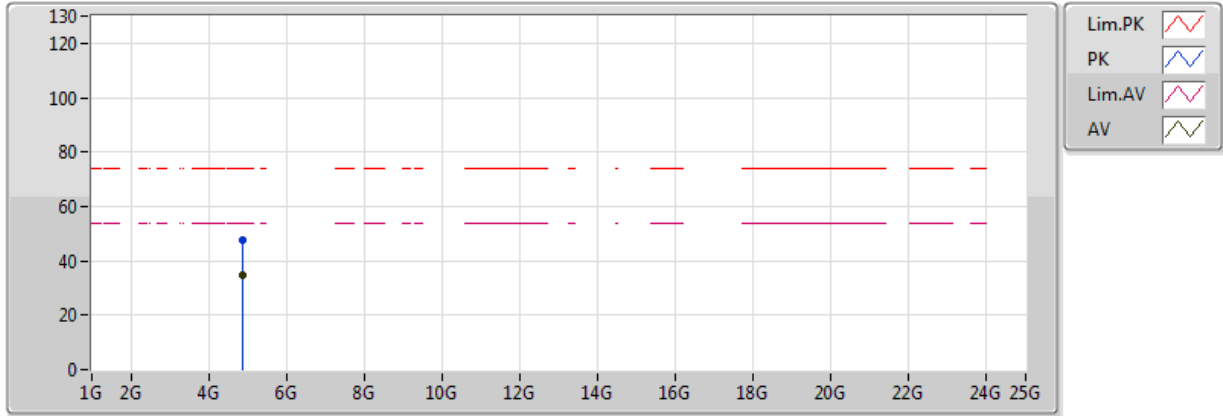


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.87394G	34.82	54.00	-19.18	3.84	3	V	25	1.50	-
PK	4.87394G	47.49	74.00	-26.51	3.84	3	V	25	1.50	-

### 802.11b\_(1Mbps)\_1TX

### 2437MHz\_TX

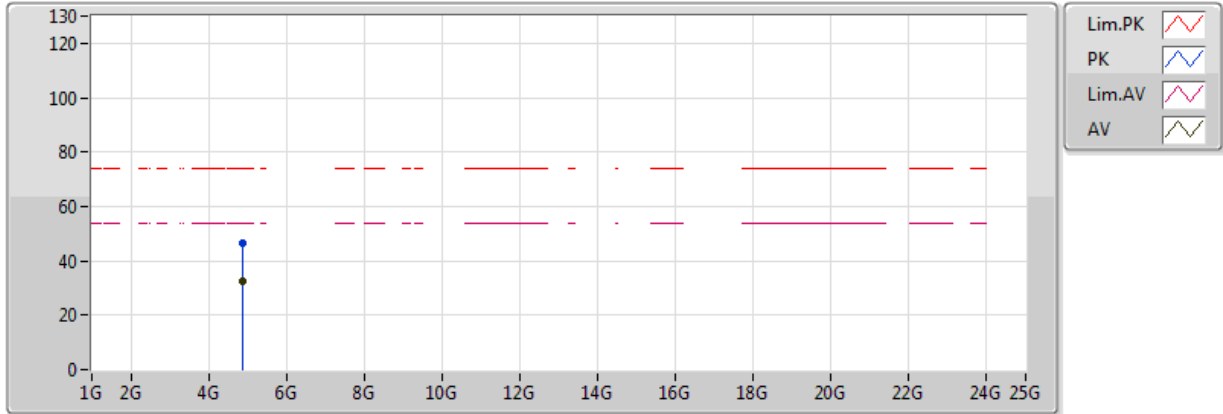


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.87404G	32.72	54.00	-21.28	3.84	3	H	289	1.67	-
PK	4.86946G	46.54	74.00	-27.46	3.82	3	H	289	1.67	-



### 802.11b\_(1Mbps)\_1TX

### 2462MHz\_TX

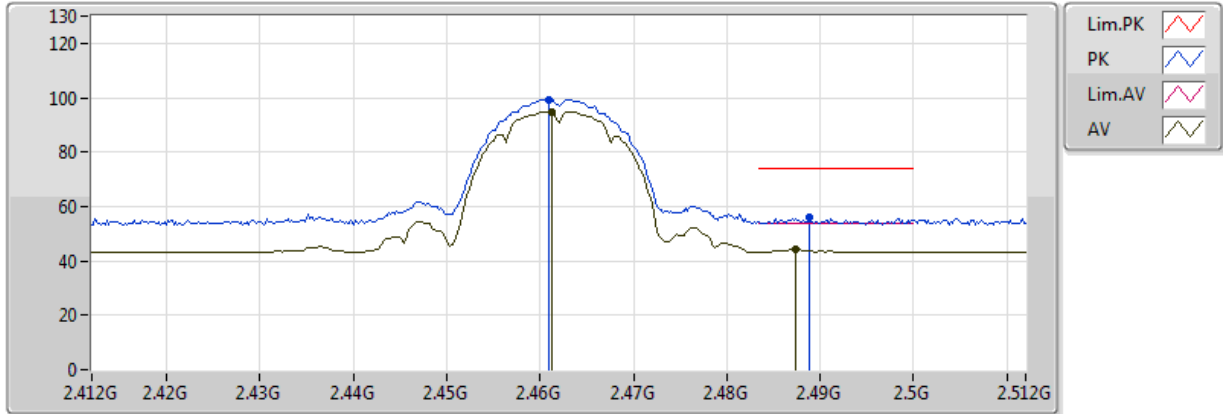


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.4612G	94.79	Inf	-Inf	30.95	3	V	311	1.88	-
AV	2.4874G	44.32	54.00	-9.68	30.92	3	V	311	1.88	-
PK	2.461G	99.19	Inf	-Inf	30.95	3	V	311	1.88	-
PK	2.4888G	56.01	74.00	-17.99	30.91	3	V	311	1.88	-

### 802.11b\_(1Mbps)\_1TX

### 2462MHz\_TX

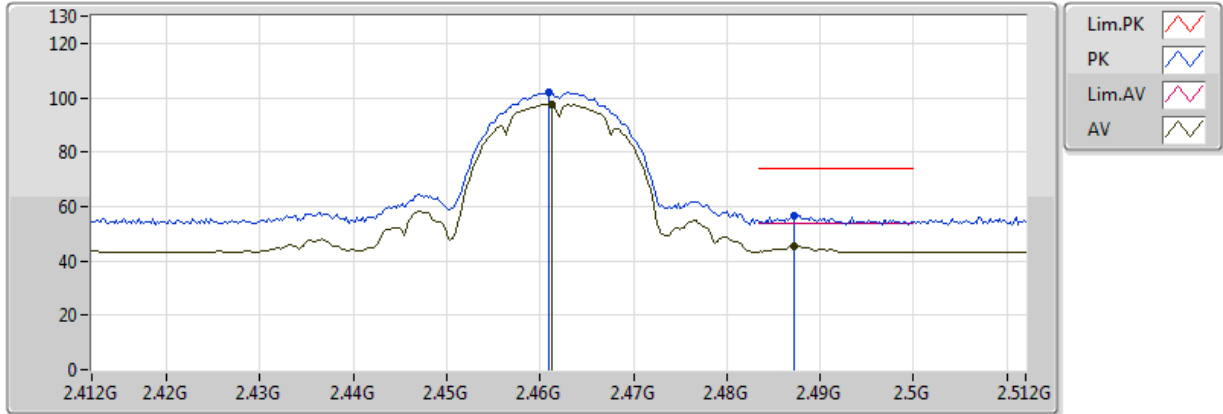


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.4612G	97.49	Inf	-Inf	30.95	3	H	16	1.05	-
AV	2.4872G	45.40	54.00	-8.60	30.92	3	H	16	1.05	-
PK	2.461G	101.85	Inf	-Inf	30.95	3	H	16	1.05	-
PK	2.4872G	56.60	74.00	-17.40	30.92	3	H	16	1.05	-



### 802.11b\_(1Mbps)\_1TX

### 2462MHz\_TX

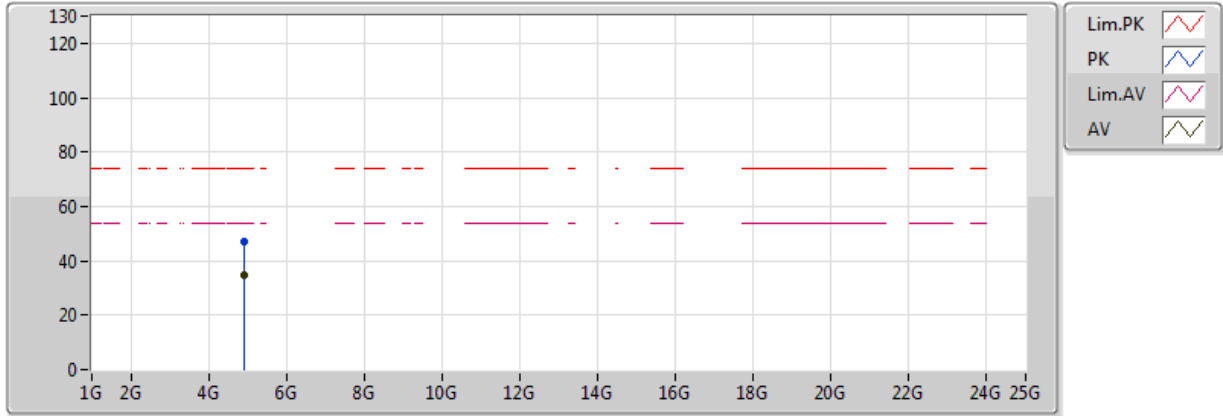


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.92392G	34.63	54.00	-19.37	3.98	3	V	345	1.50	-
PK	4.92394G	46.94	74.00	-27.06	3.98	3	V	345	1.50	-

### 802.11b\_(1Mbps)\_1TX

### 2462MHz\_TX

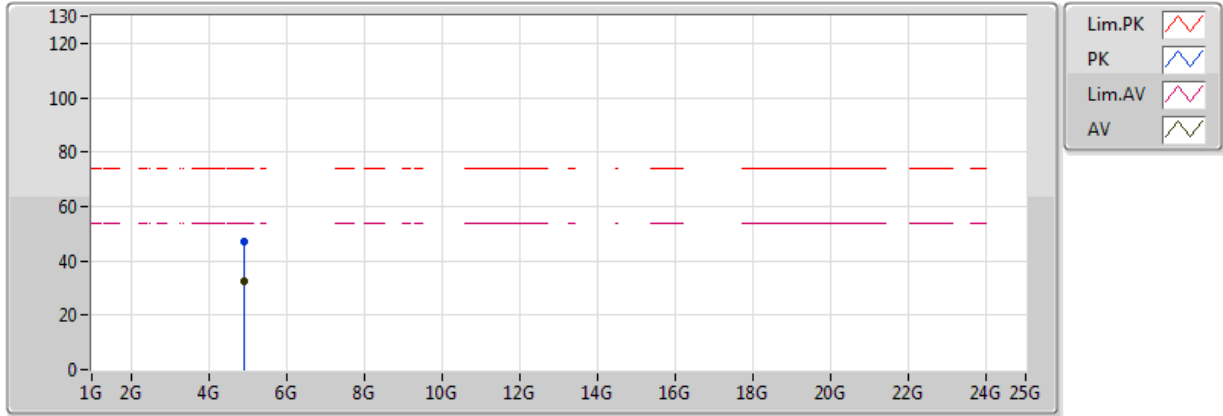


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.9197G	32.23	54.00	-21.77	3.97	3	H	243	1.95	-
PK	4.91948G	46.86	74.00	-27.14	3.97	3	H	243	1.95	-

### 802.11g\_(6Mbps)\_1TX

### 2412MHz\_TX

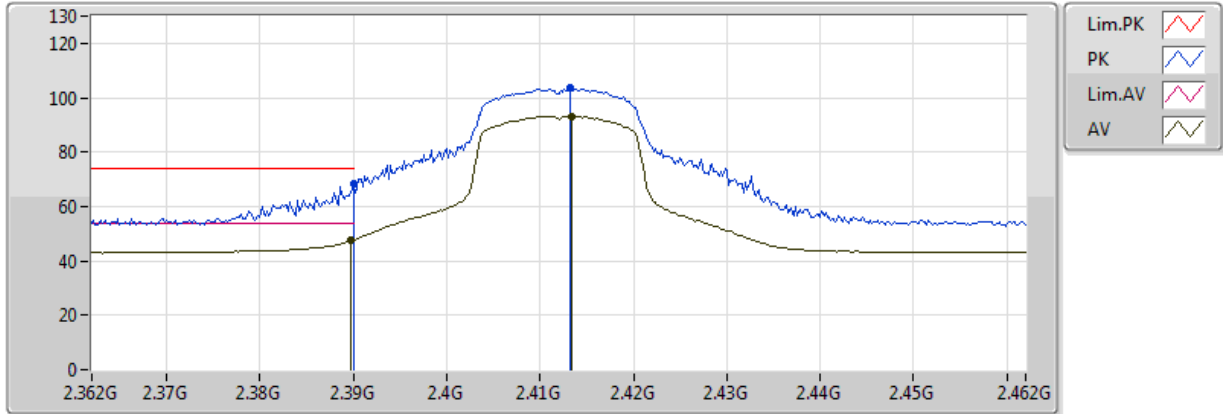


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3898G	47.55	54.00	-6.45	31.04	3	V	22	2.57	-
AV	2.4134G	93.21	Inf	-Inf	31.00	3	V	22	2.57	-
PK	2.389998G	68.49	74.00	-5.51	31.04	3	V	22	2.57	-
PK	2.4132G	103.44	Inf	-Inf	31.00	3	V	22	2.57	-

### 802.11g\_(6Mbps)\_1TX

### 2412MHz\_TX

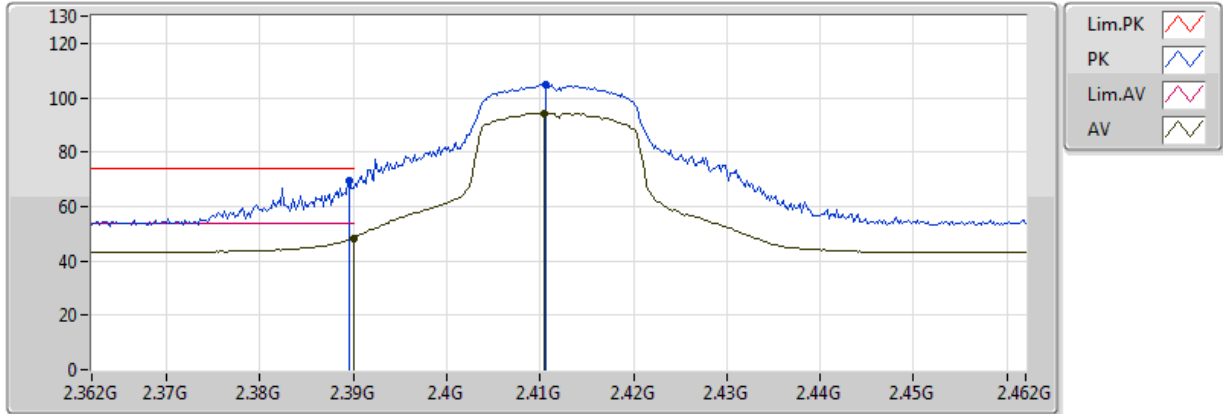


20170327  
EUT\_Y\_1TX  
Setting 20000  
01-W-3  
FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.389998G	48.45	54.00	-5.55	31.04	3	H	10	1.43	-
AV	2.4104G	94.40	Inf	-Inf	31.01	3	H	10	1.43	-
PK	2.3896G	69.36	74.00	-4.64	31.04	3	H	10	1.43	-
PK	2.4106G	105.00	Inf	-Inf	31.01	3	H	10	1.43	-



### 802.11g\_(6Mbps)\_1TX

### 2412MHz\_TX

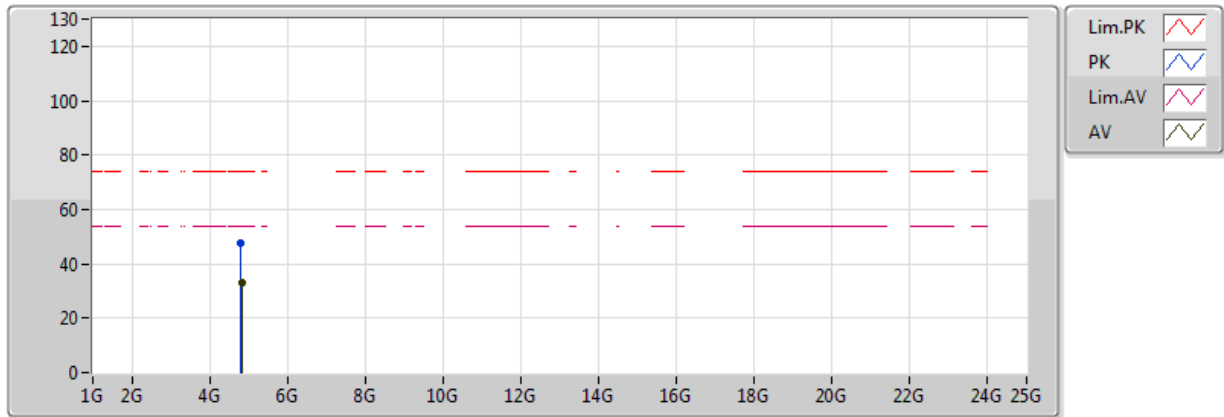


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.83858G	33.24	54.00	-20.76	3.74	3	V	297	2.19	-
PK	4.80906G	47.67	74.00	-26.33	3.66	3	V	297	2.19	-

### 802.11g\_(6Mbps)\_1TX

### 2412MHz\_TX

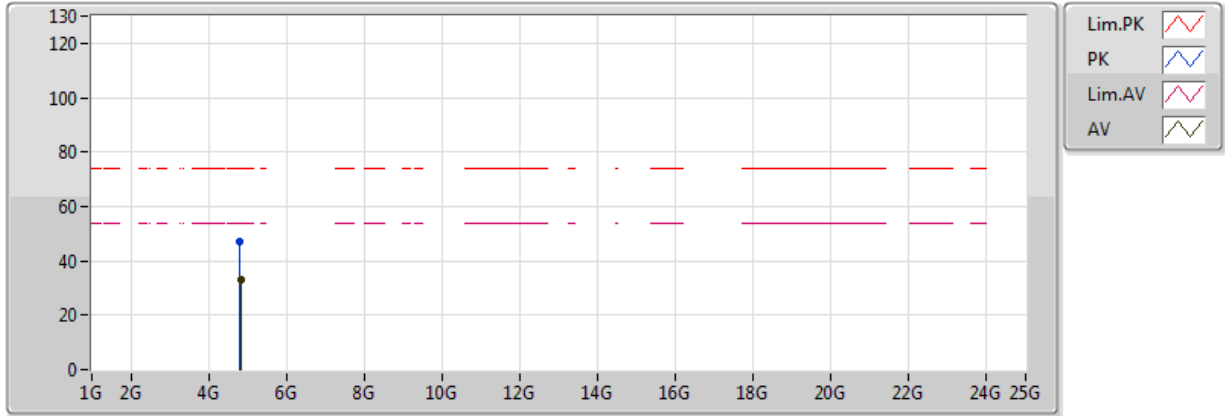


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.83804G	33.19	54.00	-20.81	3.74	3	H	201	1.17	-
PK	4.81044G	47.11	74.00	-26.89	3.66	3	H	201	1.17	-



### 802.11g\_(6Mbps)\_1TX

### 2437MHz\_TX

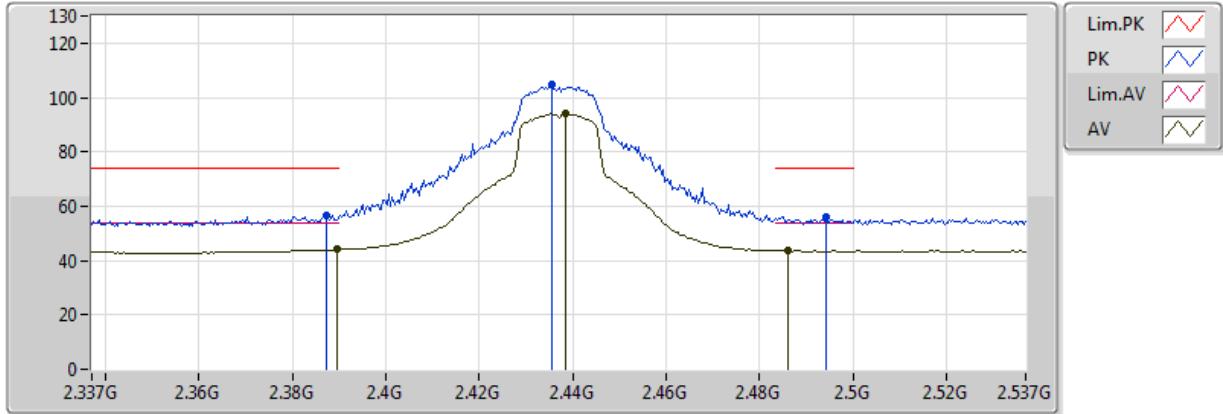


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3894G	44.05	54.00	-9.95	31.04	3	V	25	2.45	-
AV	2.4386G	94.10	Inf	-Inf	30.97	3	V	25	2.45	-
AV	2.4862G	43.56	54.00	-10.44	30.92	3	V	25	2.45	-
PK	2.3874G	56.73	74.00	-17.27	31.04	3	V	25	2.45	-
PK	2.4354G	104.81	Inf	-Inf	30.98	3	V	25	2.45	-
PK	2.4942G	56.00	74.00	-18.00	30.91	3	V	25	2.45	-

### 802.11g\_(6Mbps)\_1TX

### 2437MHz\_TX

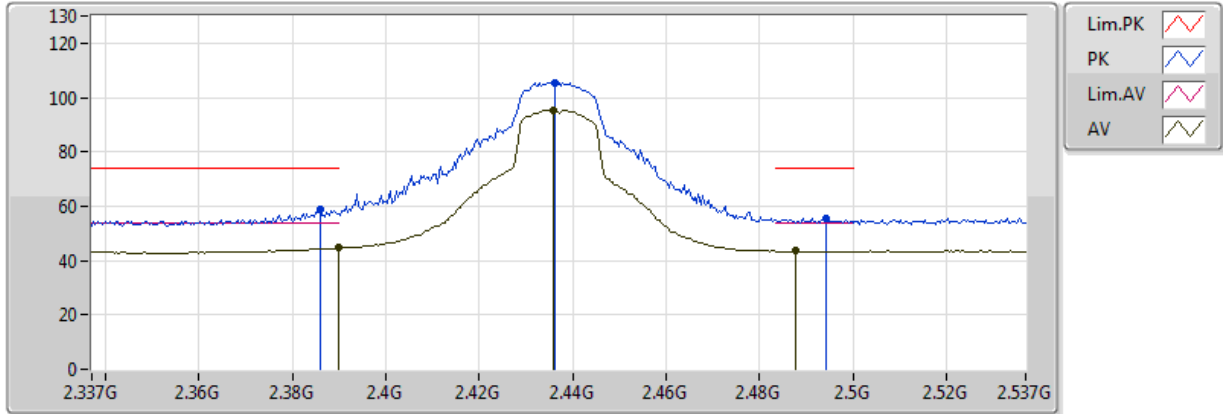


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 01-W-3  
 FSP(100304)

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3898G	44.58	54.00	-9.42	31.04	3	H	12	1.10	-
AV	2.4358G	95.41	Inf	-Inf	30.98	3	H	12	1.10	-
AV	2.4878G	43.47	54.00	-10.53	30.91	3	H	12	1.10	-
PK	2.3858G	58.62	74.00	-15.38	31.04	3	H	12	1.10	-
PK	2.4362G	105.55	Inf	-Inf	30.98	3	H	12	1.10	-
PK	2.4942G	55.46	74.00	-18.54	30.91	3	H	12	1.10	-



### 802.11g\_(6Mbps)\_1TX

### 2437MHz\_TX

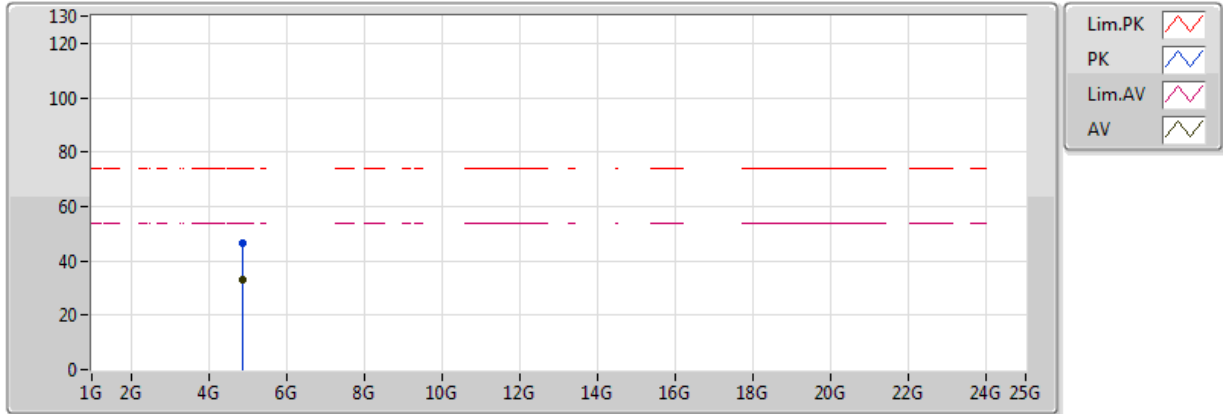


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.86122G	33.02	54.00	-20.98	3.80	3	V	271	1.76	-
PK	4.88726G	46.62	74.00	-27.38	3.87	3	V	271	1.76	-



### 802.11g\_(6Mbps)\_1TX

### 2437MHz\_TX

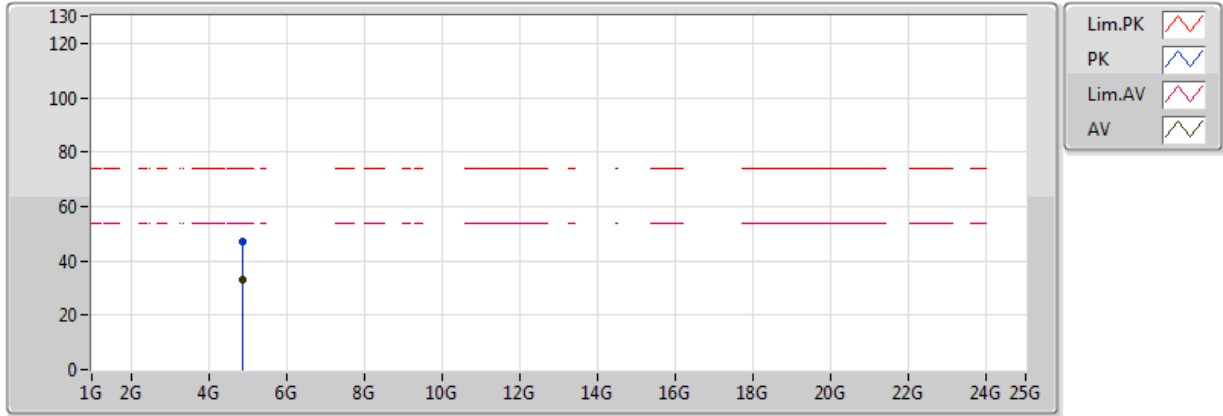


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.8626G	33.08	54.00	-20.92	3.81	3	H	292	1.14	-
PK	4.85918G	47.12	74.00	-26.88	3.80	3	H	292	1.14	-

### 802.11g\_(6Mbps)\_1TX

### 2462MHz\_TX

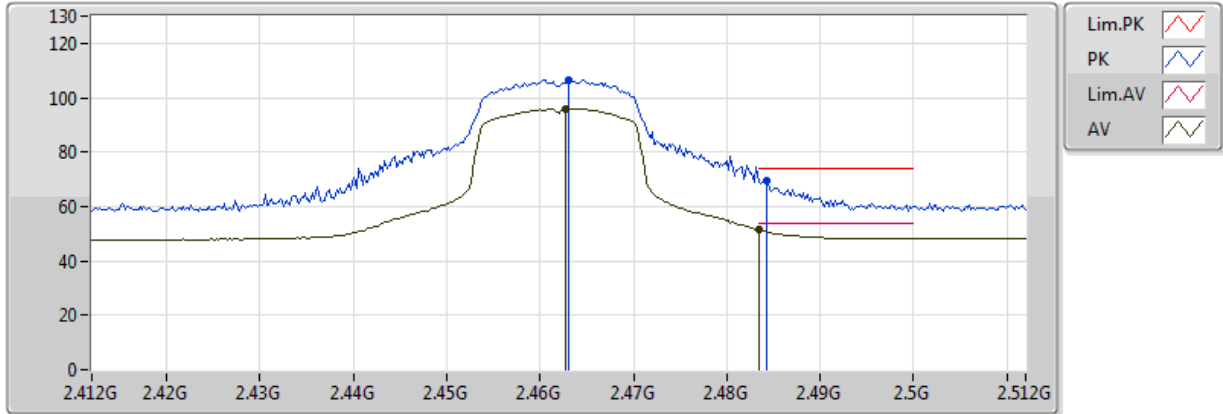


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.4628G	96.08	Inf	-Inf	32.75	3	V	311	1.99	-
AV	2.483502G	51.53	54.00	-2.47	32.78	3	V	311	1.99	-
PK	2.463G	106.55	Inf	-Inf	32.75	3	V	311	1.99	-
PK	2.4842G	69.23	74.00	-4.77	32.78	3	V	311	1.99	-

### 802.11g\_(6Mbps)\_1TX

### 2462MHz\_TX

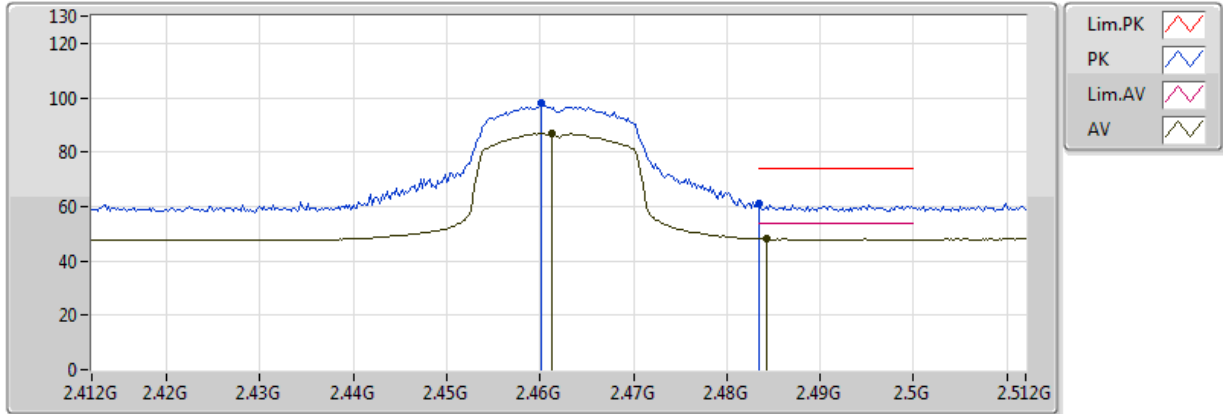


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.4612G	86.95	Inf	-Inf	32.75	3	H	69	1.46	-
AV	2.4842G	47.98	54.00	-6.02	32.78	3	H	69	1.46	-
PK	2.4602G	97.82	Inf	-Inf	32.75	3	H	69	1.46	-
PK	2.483502G	61.08	74.00	-12.92	32.78	3	H	69	1.46	-



### 802.11g\_(6Mbps)\_1TX

### 2462MHz\_TX

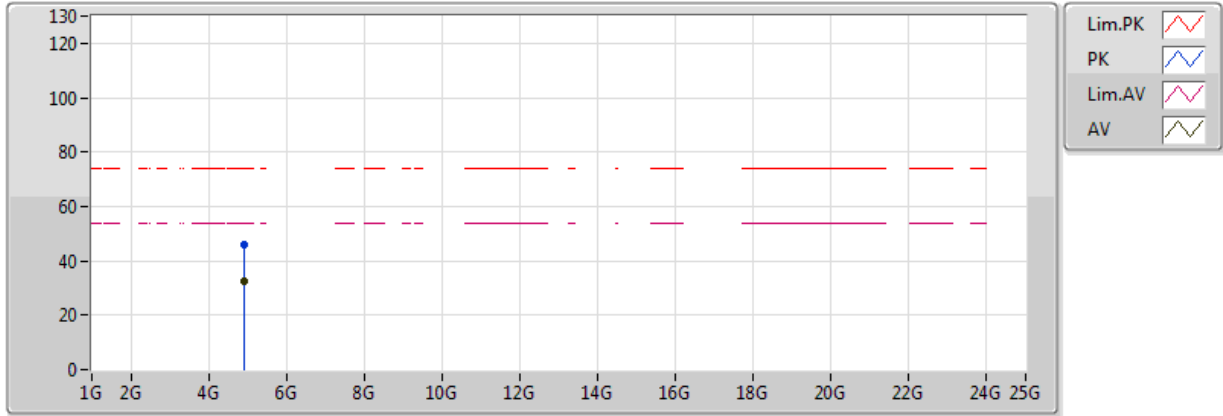


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.9183G	32.71	54.00	-21.29	3.96	3	V	153	1.65	-
PK	4.91476G	46.04	74.00	-27.96	3.95	3	V	153	1.65	-



### 802.11g\_(6Mbps)\_1TX

### 2462MHz\_TX

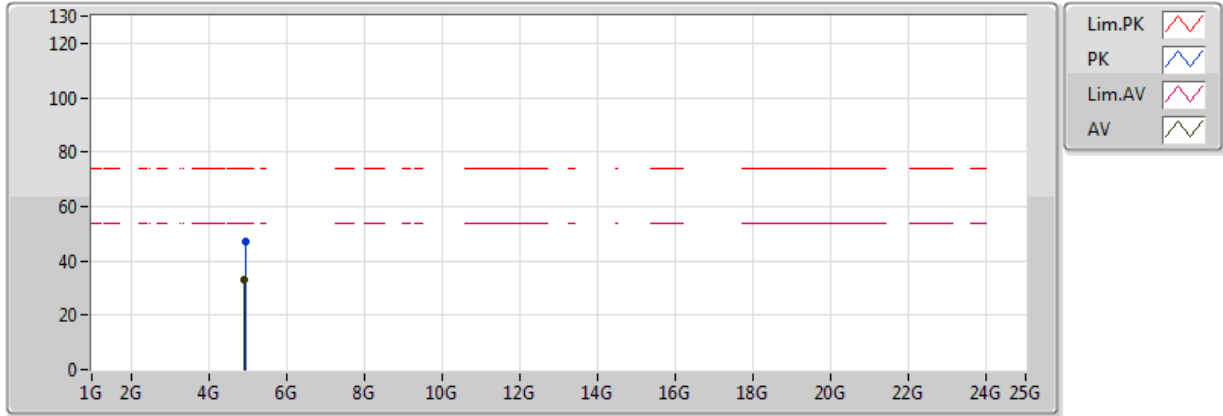


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.91596G	32.81	54.00	-21.19	3.96	3	H	24	1.74	-
PK	4.93804G	46.98	74.00	-27.02	4.02	3	H	24	1.74	-



**802.11n HT20\_Nss1,(MCS0)\_1TX**  
**2412MHz\_TX**

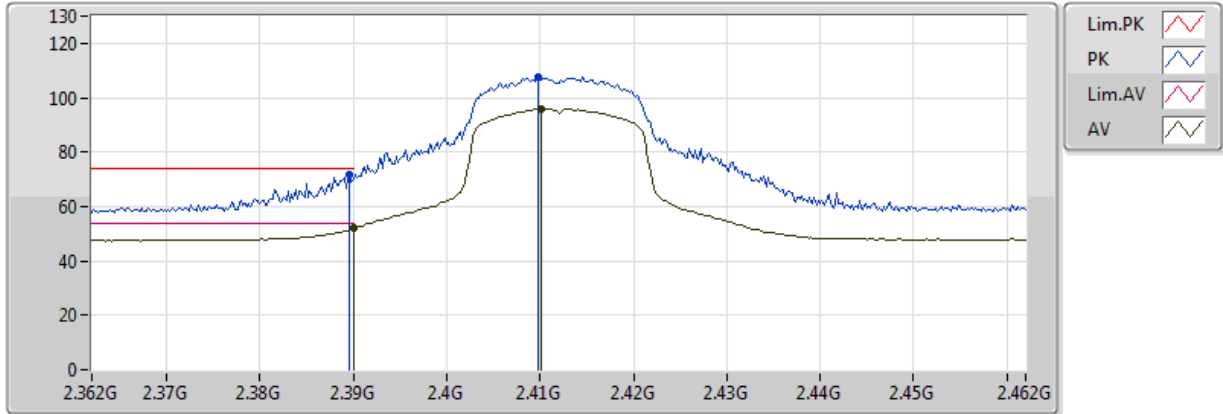


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.39G	51.96	54.00	-2.04	32.67	3	V	331	1.41	-
AV	2.4102G	95.87	Inf	-Inf	32.68	3	V	331	1.41	-
PK	2.3896G	71.72	74.00	-2.28	32.67	3	V	331	1.41	-
PK	2.4098G	107.60	Inf	-Inf	32.68	3	V	331	1.41	-

### 802.11n HT20\_Nss1,(MCS0)\_1TX

### 2412MHz\_TX

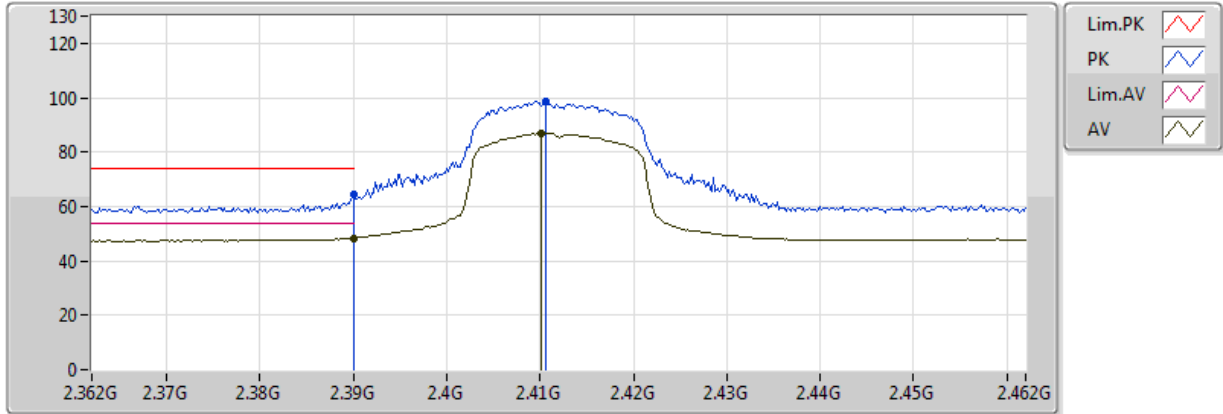


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.39G	48.44	54.00	-5.56	32.67	3	H	330	2.43	-
AV	2.4102G	86.91	Inf	-Inf	32.68	3	H	330	2.43	-
PK	2.39G	64.58	74.00	-9.42	32.67	3	H	330	2.43	-
PK	2.4106G	98.67	Inf	-Inf	32.68	3	H	330	2.43	-



### 802.11n HT20\_Nss1,(MCS0)\_1TX

### 2412MHz\_TX

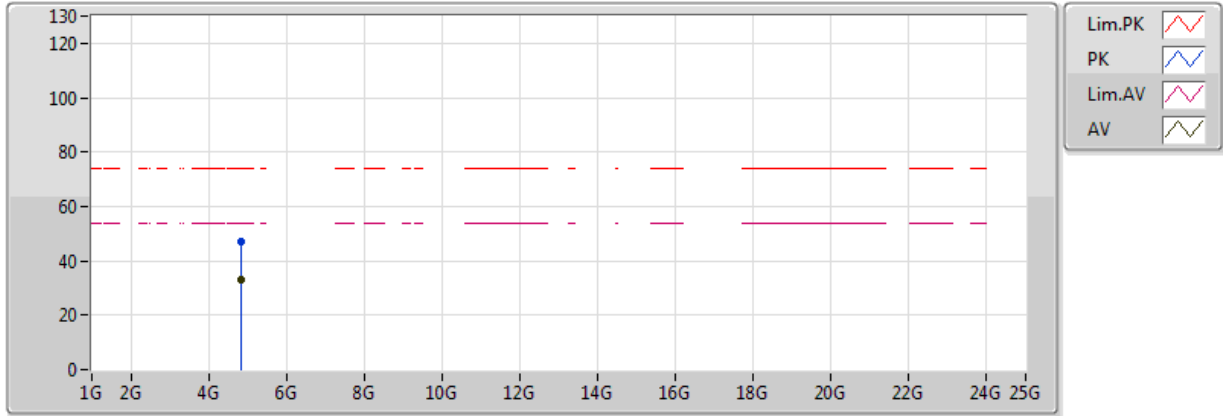


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.83858G	33.17	54.00	-20.83	3.74	3	V	168	1.17	-
PK	4.8324G	47.27	74.00	-26.73	3.72	3	V	168	1.17	-



### 802.11n HT20\_Nss1,(MCS0)\_1TX

### 2412MHz\_TX

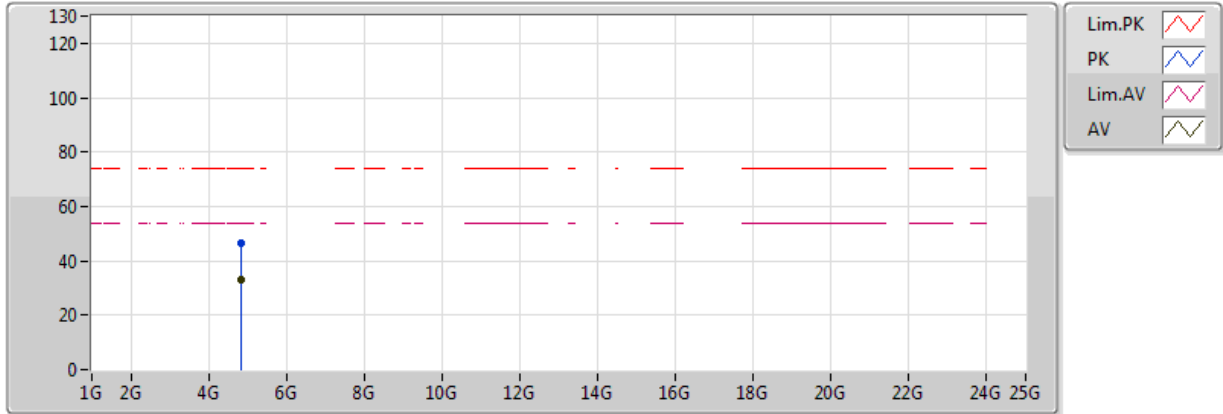


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.83684G	33.19	54.00	-20.81	3.73	3	H	17	2.48	-
PK	4.82898G	46.61	74.00	-27.39	3.71	3	H	17	2.48	-

### 802.11n HT20\_Nss1,(MCS0)\_1TX

### 2437MHz\_TX

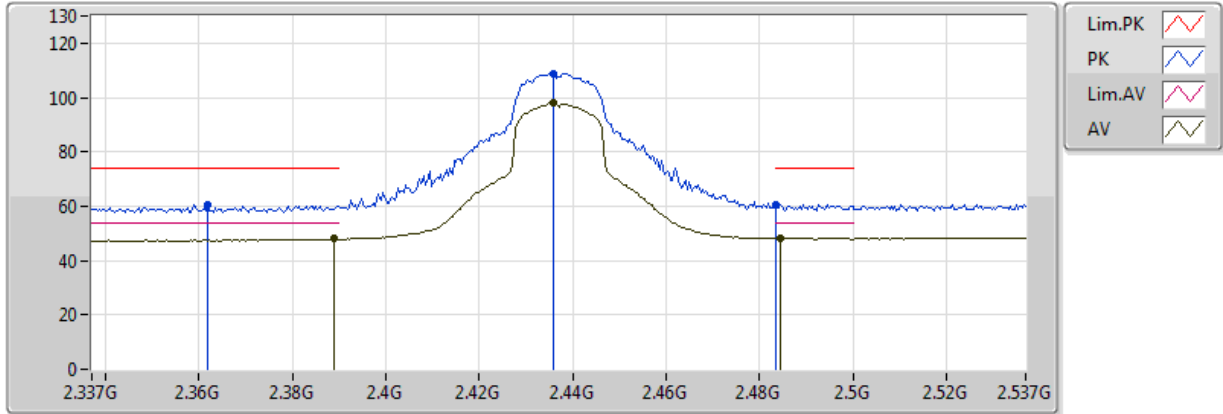


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.389G	47.99	54.00	-6.01	32.67	3	V	313	2.20	-
AV	2.4358G	97.87	Inf	-Inf	32.72	3	V	313	2.20	-
AV	2.4846G	48.21	54.00	-5.79	32.78	3	V	313	2.20	-
PK	2.3618G	60.58	74.00	-13.42	32.66	3	V	313	2.20	-
PK	2.4358G	108.71	Inf	-Inf	32.72	3	V	313	2.20	-
PK	2.483502G	60.67	74.00	-13.33	32.78	3	V	313	2.20	-

### 802.11n HT20\_Nss1,(MCS0)\_1TX

### 2437MHz\_TX

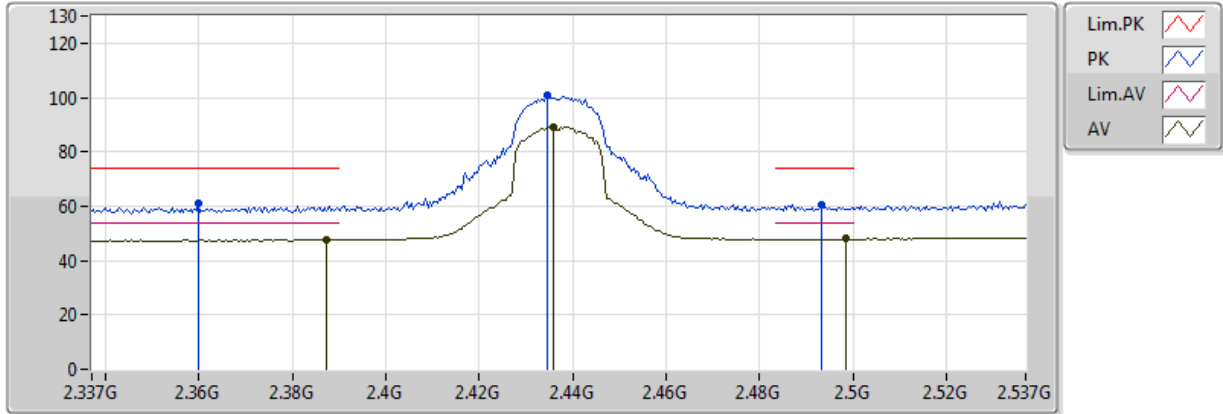


20170327  
EUT Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3874G	47.60	54.00	-6.40	32.67	3	H	323	2.33	-
AV	2.4358G	89.12	Inf	-Inf	32.72	3	H	323	2.33	-
AV	2.4986G	47.97	54.00	-6.03	32.80	3	H	323	2.33	-
PK	2.3598G	60.96	74.00	-13.04	32.66	3	H	323	2.33	-
PK	2.4346G	100.62	Inf	-Inf	32.71	3	H	323	2.33	-
PK	2.4934G	60.68	74.00	-13.32	32.79	3	H	323	2.33	-

### 802.11n HT20\_Nss1,(MCS0)\_1TX

### 2437MHz\_TX

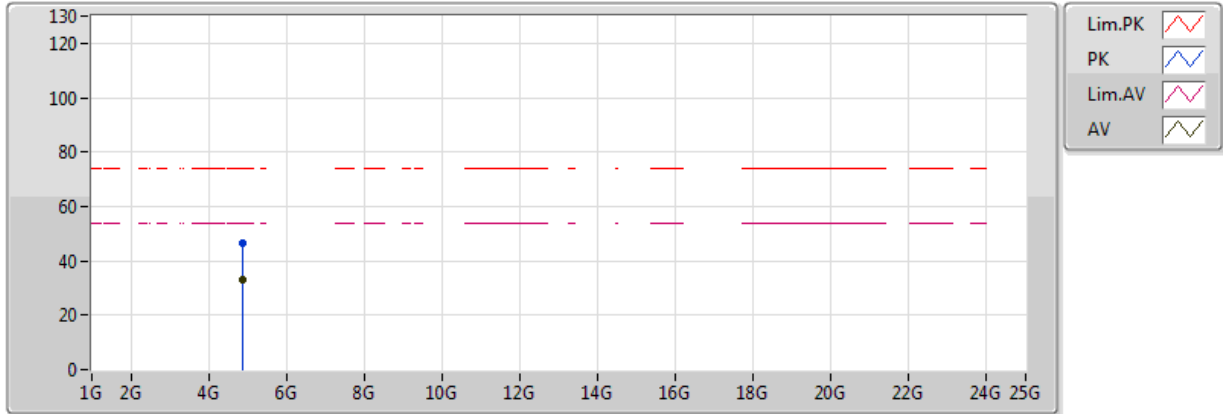


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.859G	32.93	54.00	-21.07	3.80	3	V	108	1.87	-
PK	4.859G	46.36	74.00	-27.64	3.80	3	V	108	1.87	-

### 802.11n HT20\_Nss1,(MCS0)\_1TX

### 2437MHz\_TX

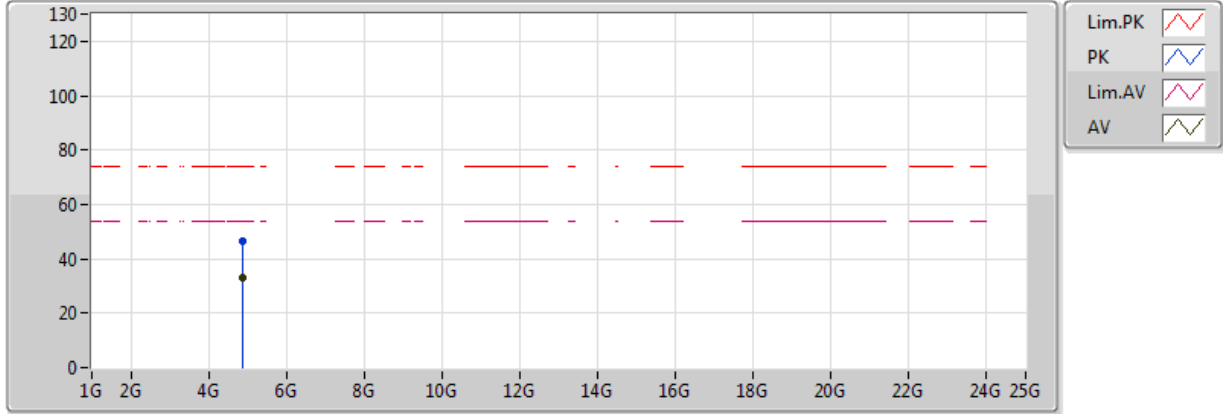


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.8599G	32.83	54.00	-21.17	3.80	3	H	135	2.26	-
PK	4.87562G	46.70	74.00	-27.30	3.84	3	H	135	2.26	-



### 802.11n HT20\_Nss1,(MCS0)\_1TX

### 2462MHz\_TX

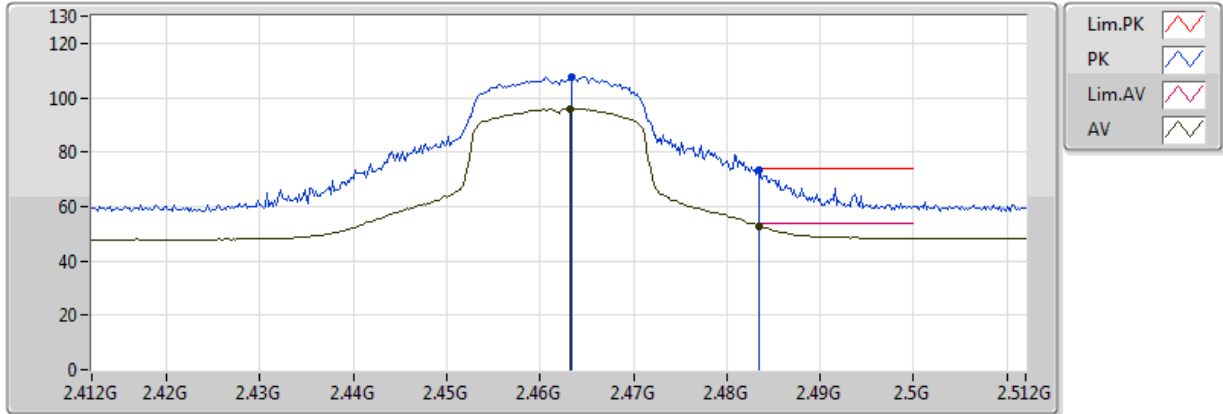


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.4632G	96.01	Inf	-Inf	32.75	3	V	307	2.19	-
AV	2.483502G	52.84	54.00	-1.16	32.78	3	V	307	2.19	-
PK	2.4634G	107.67	Inf	-Inf	32.75	3	V	307	2.19	-
PK	2.483502G	73.30	74.00	-0.70	32.78	3	V	307	2.19	-

### 802.11n HT20\_Nss1,(MCS0)\_1TX

### 2462MHz\_TX

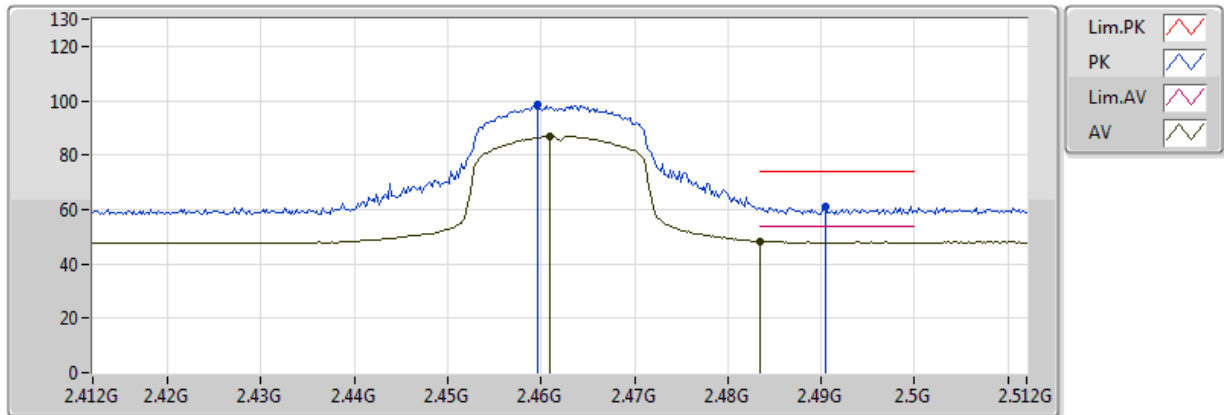


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.461G	86.81	Inf	-Inf	32.75	3	H	60	1.44	-
AV	2.483502G	48.34	54.00	-5.66	32.78	3	H	60	1.44	-
PK	2.4596G	98.66	Inf	-Inf	32.75	3	H	60	1.44	-
PK	2.4904G	61.01	74.00	-12.99	32.79	3	H	60	1.44	-

### 802.11n HT20\_Nss1,(MCS0)\_1TX


### 2462MHz\_TX

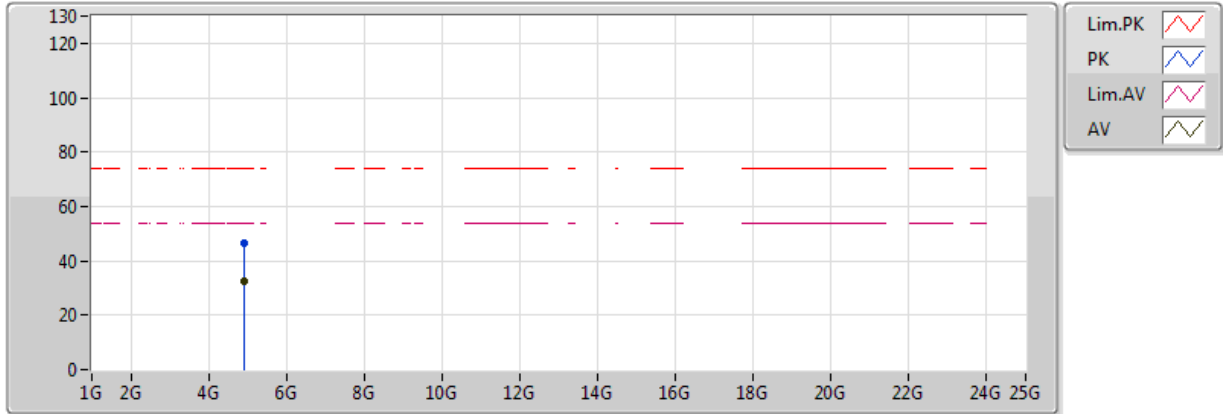

20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.91584G	32.70	54.00	-21.30	3.96	3	V	185	1.36	-
PK	4.915G	46.66	74.00	-27.34	3.95	3	V	185	1.36	-

**802.11n HT20\_Nss1,(MCS0)\_1TX**  
**2462MHz\_TX**

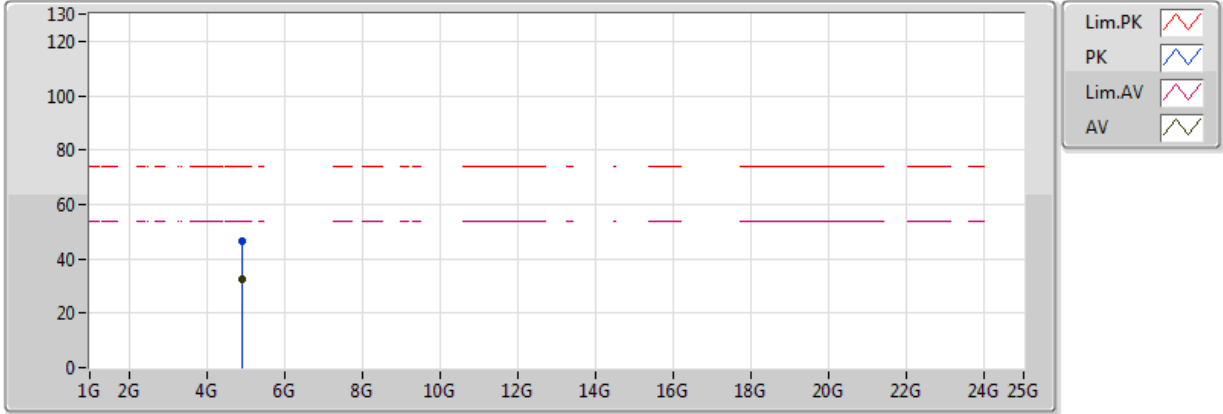


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.91632G	32.76	54.00	-21.24	3.96	3	H	77	1.22	-
PK	4.9243G	46.33	74.00	-27.67	3.98	3	H	77	1.22	-

### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2422MHz\_TX

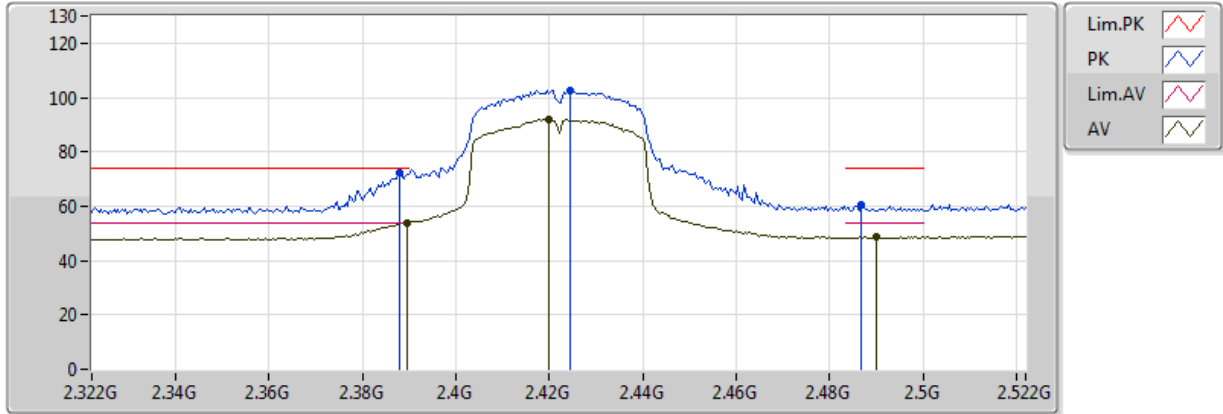


20170327  
 EUT Y\_1TX  
 Setting 12000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3896G	53.96	54.00	-0.04	32.67	3	V	313	2.26	-
AV	2.42G	92.13	Inf	-Inf	32.70	3	V	313	2.26	-
AV	2.49G	48.86	54.00	-5.14	32.79	3	V	313	2.26	-
PK	2.388G	72.37	74.00	-1.63	32.67	3	V	313	2.26	-
PK	2.4244G	102.82	Inf	-Inf	32.70	3	V	313	2.26	-
PK	2.4868G	60.26	74.00	-13.74	32.78	3	V	313	2.26	-

### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2422MHz\_TX

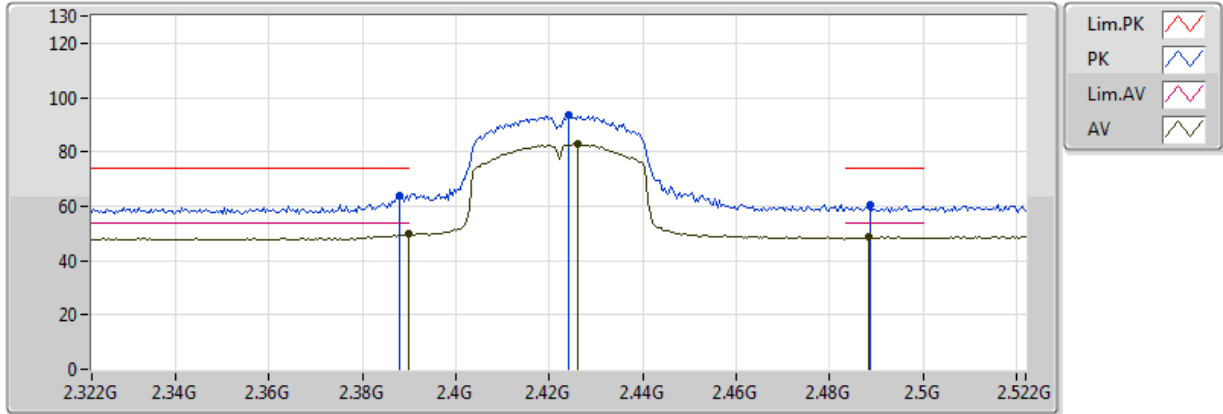


20170327  
EUT\_Y\_1TX  
Setting 12000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.39G	50.01	54.00	-3.99	32.67	3	H	320	2.50	-
AV	2.426G	83.09	Inf	-Inf	32.70	3	H	320	2.50	-
AV	2.4884G	48.68	54.00	-5.32	32.78	3	H	320	2.50	-
PK	2.388G	64.06	74.00	-9.94	32.67	3	H	320	2.50	-
PK	2.424G	93.67	Inf	-Inf	32.70	3	H	320	2.50	-
PK	2.4888G	60.72	74.00	-13.28	32.79	3	H	320	2.50	-



### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2422MHz\_TX

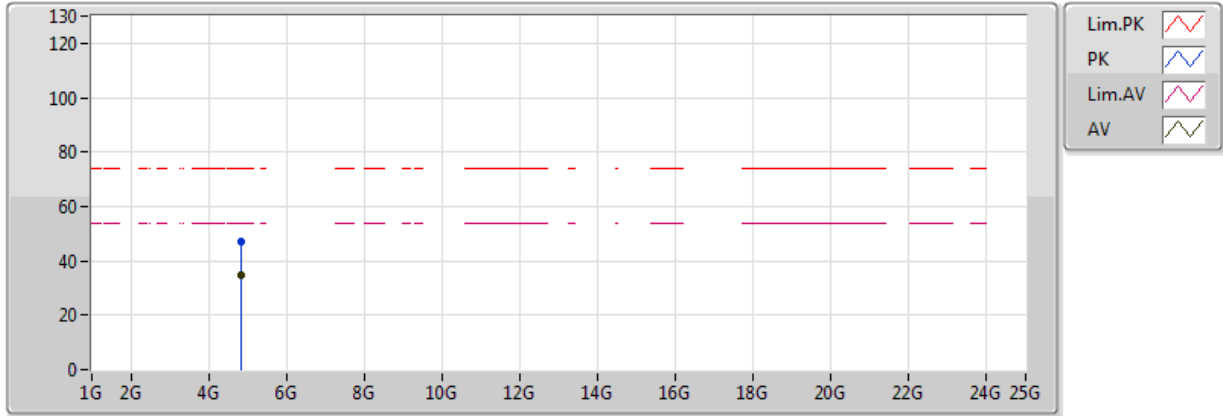


20170327  
EUT\_Y\_1TX  
Setting 12000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.8386G	34.68	54.00	-19.32	3.74	3	V	275	1.08	-
PK	4.83392G	46.90	74.00	-27.10	3.72	3	V	275	1.08	-



### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2422MHz\_TX

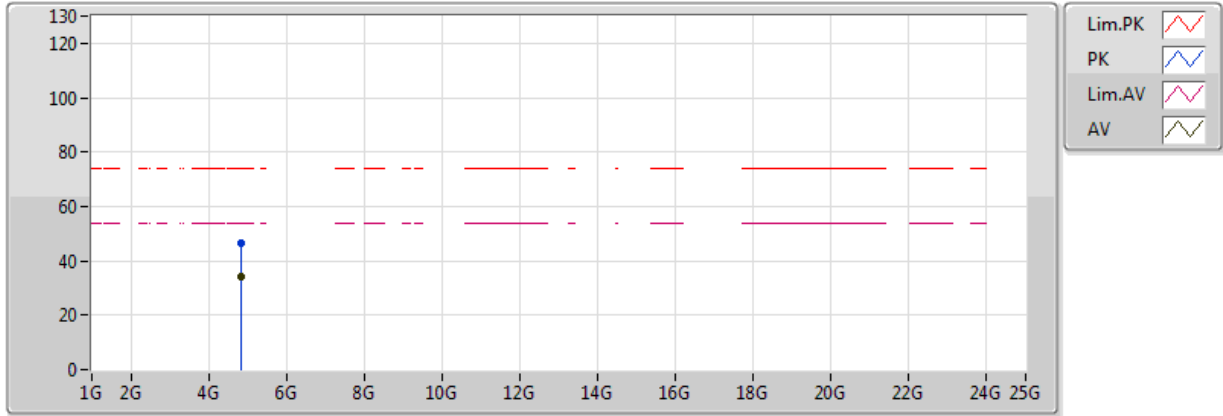


20170327  
 EUT\_Y\_1TX  
 Setting 12000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.83866G	34.46	54.00	-19.54	3.74	3	H	343	1.62	-
PK	4.83296G	46.51	74.00	-27.49	3.72	3	H	343	1.62	-



### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2437MHz\_TX

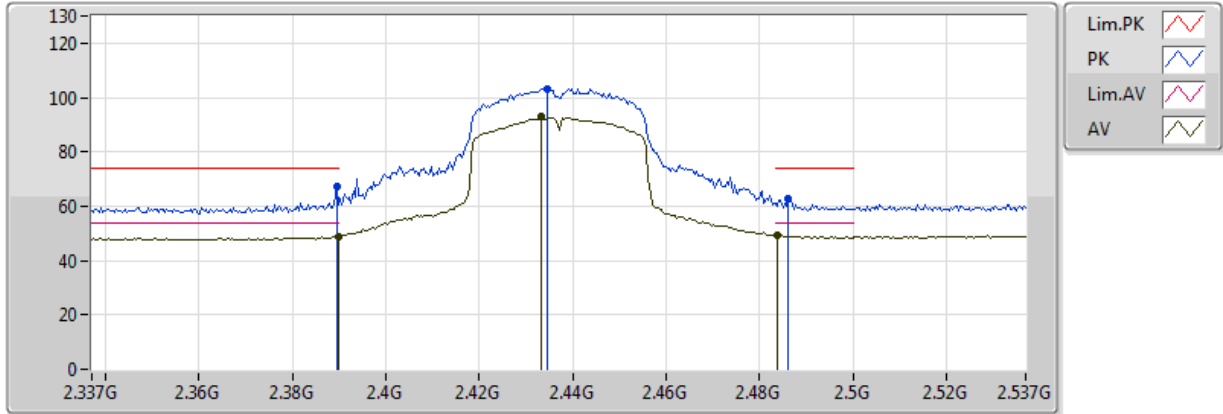


20170327  
EUT Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.389998G	48.88	54.00	-5.12	32.67	3	V	307	2.22	-
AV	2.4334G	92.84	Inf	-Inf	32.71	3	V	307	2.22	-
AV	2.4838G	49.49	54.00	-4.51	32.78	3	V	307	2.22	-
PK	2.3894G	67.01	74.00	-6.99	32.67	3	V	307	2.22	-
PK	2.4346G	103.33	Inf	-Inf	32.71	3	V	307	2.22	-
PK	2.4862G	62.54	74.00	-11.46	32.78	3	V	307	2.22	-

### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2437MHz\_TX

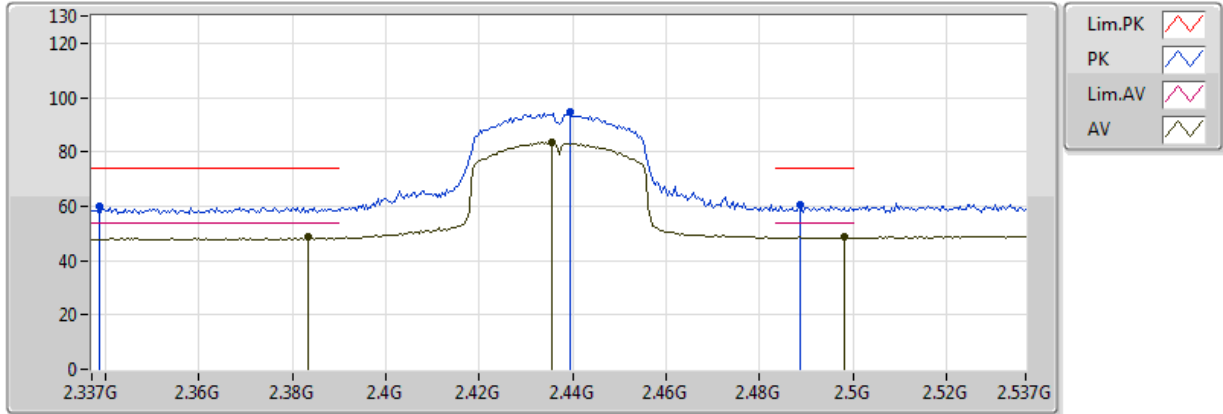


20170327  
EUT Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3834G	48.57	54.00	-5.43	32.67	3	H	323	2.37	-
AV	2.4354G	83.66	Inf	-Inf	32.72	3	H	323	2.37	-
AV	2.4982G	48.83	54.00	-5.17	32.80	3	H	323	2.37	-
PK	2.3386G	59.79	74.00	-14.21	32.65	3	H	323	2.37	-
PK	2.4394G	94.48	Inf	-Inf	32.72	3	H	323	2.37	-
PK	2.4886G	60.34	74.00	-13.66	32.79	3	H	323	2.37	-



### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2437MHz\_TX

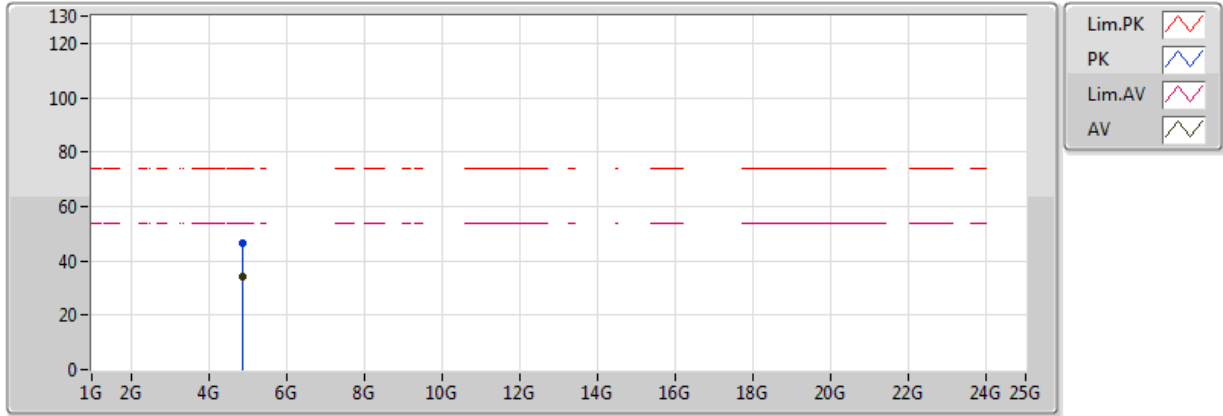


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.86782G	34.09	54.00	-19.91	3.82	3	V	282	1.11	-
PK	4.87976G	46.29	74.00	-27.71	3.85	3	V	282	1.11	-

### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2437MHz\_TX

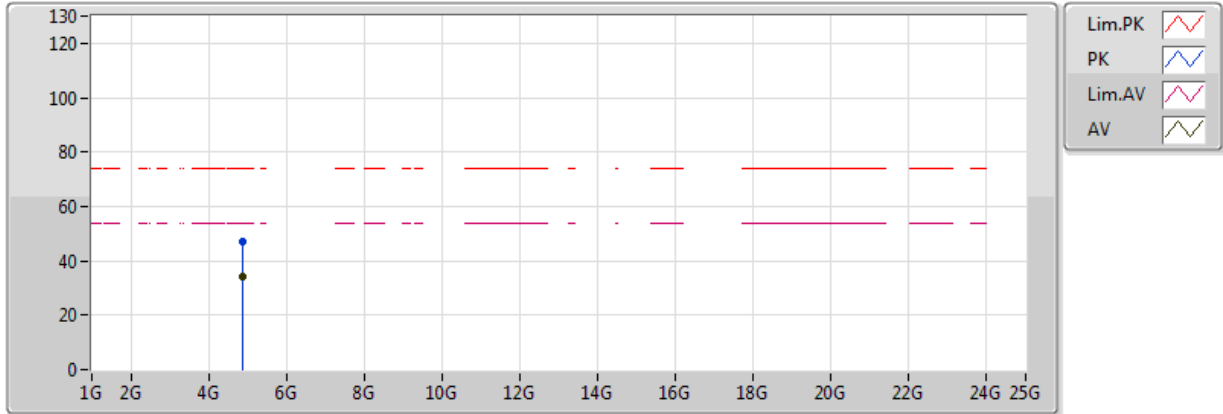


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.86056G	34.24	54.00	-19.76	3.80	3	H	26	1.66	-
PK	4.87022G	46.84	74.00	-27.16	3.83	3	H	26	1.66	-

### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2452MHz\_TX

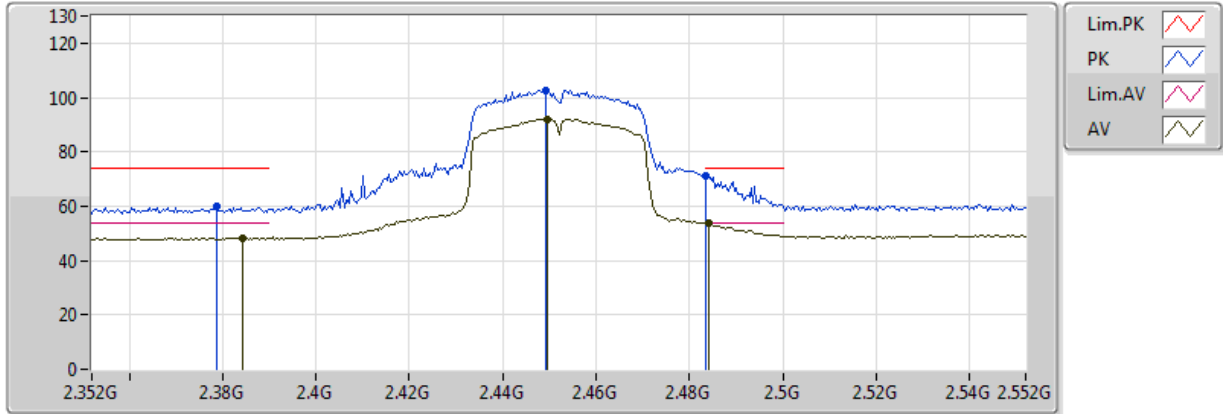


20170327  
EUT Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3844G	48.46	54.00	-5.54	32.67	3	V	312	2.19	-
AV	2.4496G	91.95	Inf	-Inf	32.73	3	V	312	2.19	-
AV	2.484G	53.84	54.00	-0.16	32.78	3	V	312	2.19	-
PK	2.3788G	59.78	74.00	-14.22	32.66	3	V	312	2.19	-
PK	2.4492G	102.80	Inf	-Inf	32.73	3	V	312	2.19	-
PK	2.4836G	70.94	74.00	-3.06	32.78	3	V	312	2.19	-

### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2452MHz\_TX

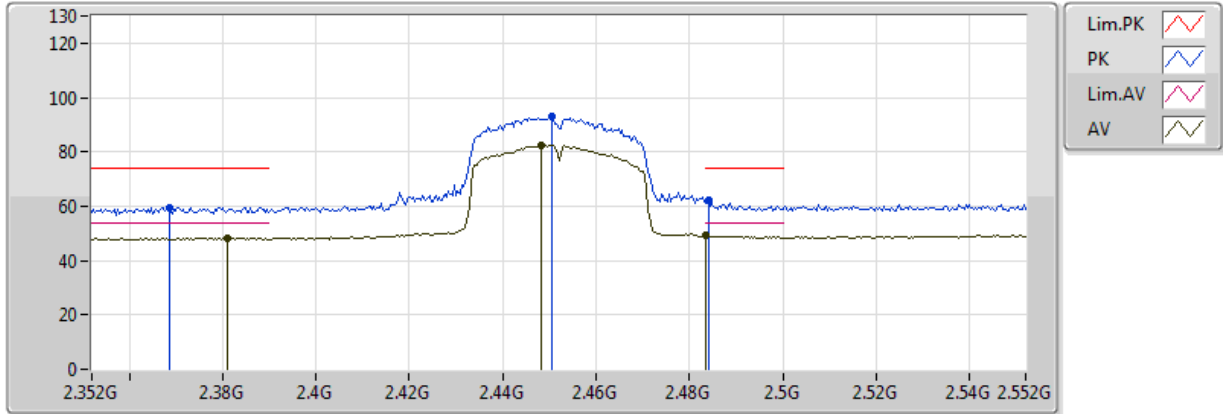


20170327  
EUT\_Y\_1TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3812G	48.34	54.00	-5.66	32.66	3	H	63	1.95	-
AV	2.4484G	82.45	Inf	-Inf	32.73	3	H	63	1.95	-
AV	2.4836G	49.07	54.00	-4.93	32.78	3	H	63	1.95	-
PK	2.3688G	59.65	74.00	-14.35	32.66	3	H	63	1.95	-
PK	2.4504G	92.94	Inf	-Inf	32.74	3	H	63	1.95	-
PK	2.484G	62.20	74.00	-11.80	32.78	3	H	63	1.95	-

### 802.11n HT40\_Nss1,(MCS0)\_1TX

### 2452MHz\_TX

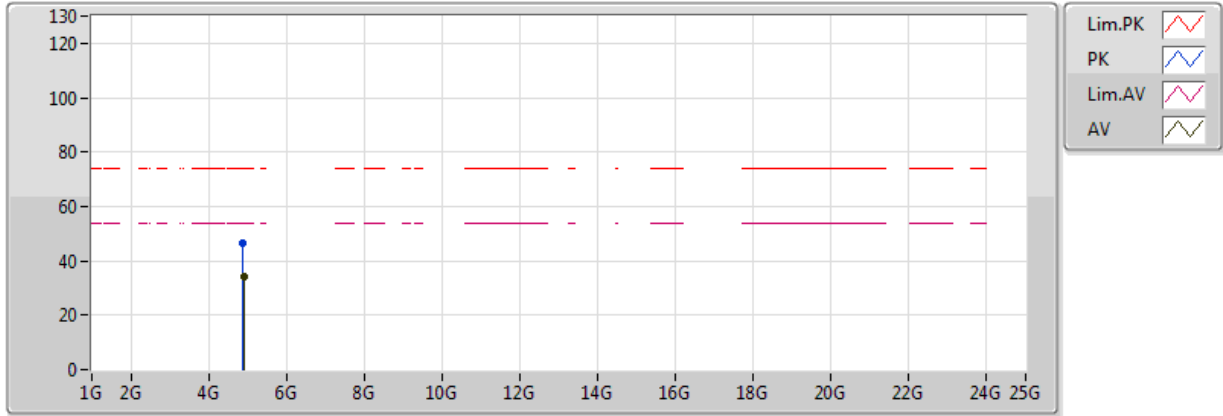


20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.91228G	33.91	54.00	-20.09	3.95	3	V	257	1.80	-
PK	4.89332G	46.58	74.00	-27.42	3.89	3	V	257	1.80	-



802.11n HT40\_Nss1,(MCS0)\_1TX

2452MHz\_TX

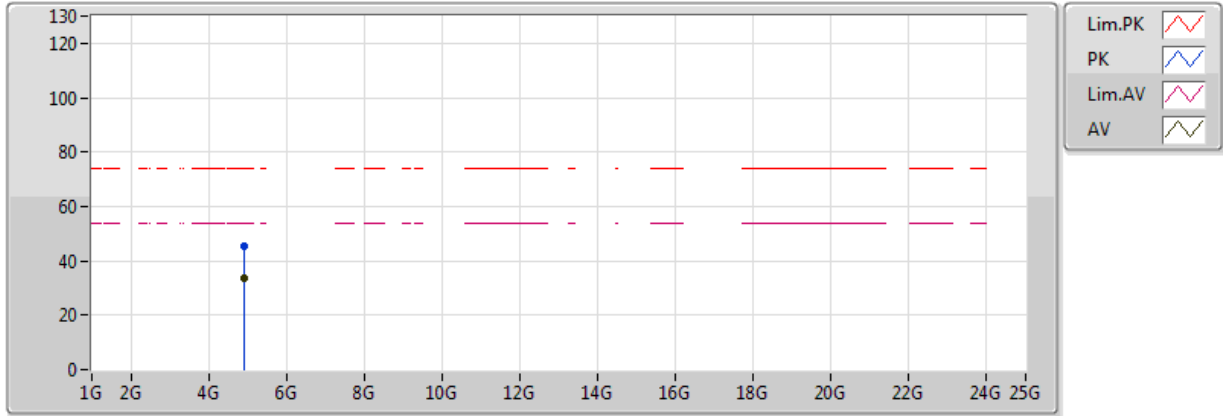

20170327  
 EUT\_Y\_1TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.9076G	33.88	54.00	-20.12	3.93	3	H	162	1.51	-
PK	4.91168G	45.62	74.00	-28.38	3.94	3	H	162	1.51	-






Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
802.11n HT20_Nss1,(MCS8)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2.4-2.4835GHz	Pass	AV	2.4838G	53.89	54.00	-0.11	32.78	3	V	293	1.08	-

### 802.11n HT20\_Nss1,(MCS8)\_2TX 2412MHz\_TX

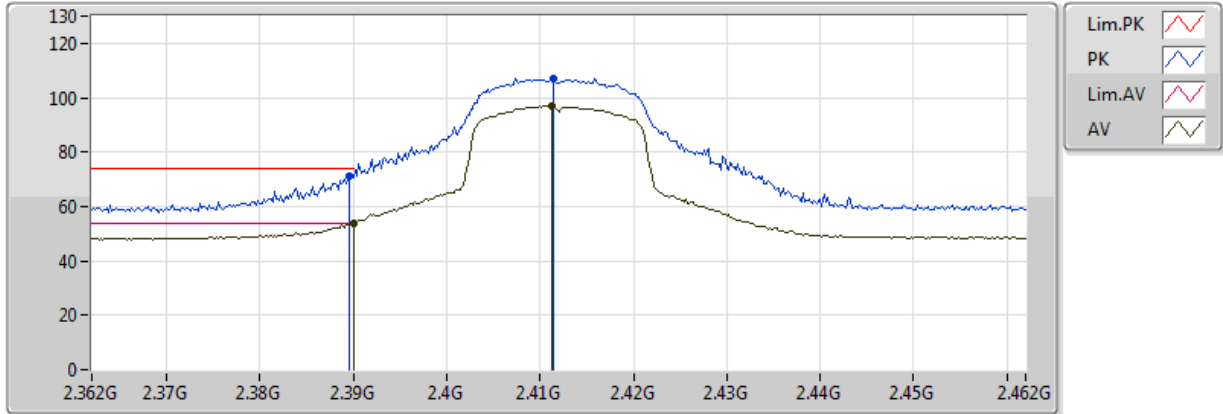


20170327  
EUT Y 2TX  
Setting 16500  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.39G	53.84	54.00	-0.16	32.67	3	V	335	1.46	-
AV	2.4112G	96.81	Inf	-Inf	32.68	3	V	335	1.46	-
PK	2.3896G	71.20	74.00	-2.80	32.67	3	V	335	1.46	-
PK	2.4114G	107.17	Inf	-Inf	32.68	3	V	335	1.46	-

### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2412MHz\_TX

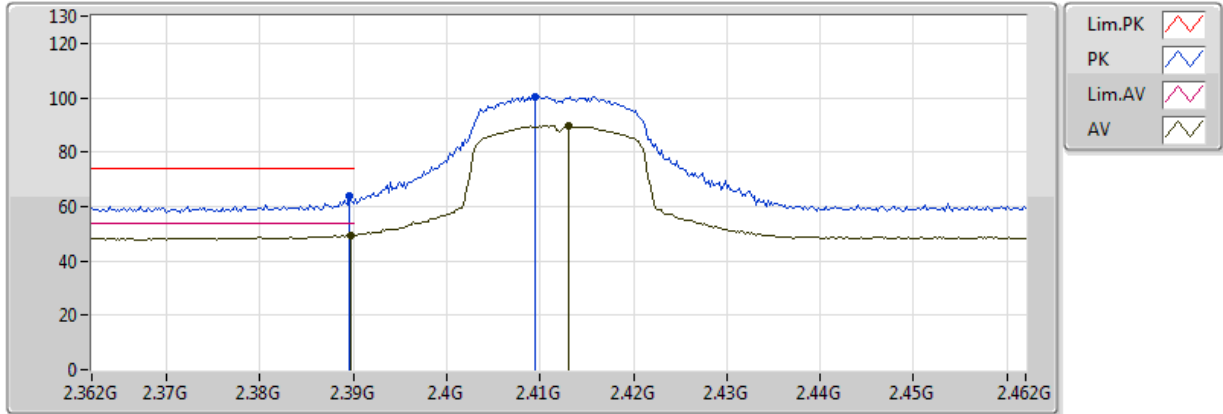


20170327  
 EUT Y 2TX  
 Setting 16500  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3898G	49.27	54.00	-4.73	32.67	3	H	320	2.08	-
AV	2.413G	89.68	Inf	-Inf	32.69	3	H	320	2.08	-
PK	2.3896G	64.12	74.00	-9.88	32.67	3	H	320	2.08	-
PK	2.4094G	100.48	Inf	-Inf	32.68	3	H	320	2.08	-



### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2412MHz\_TX

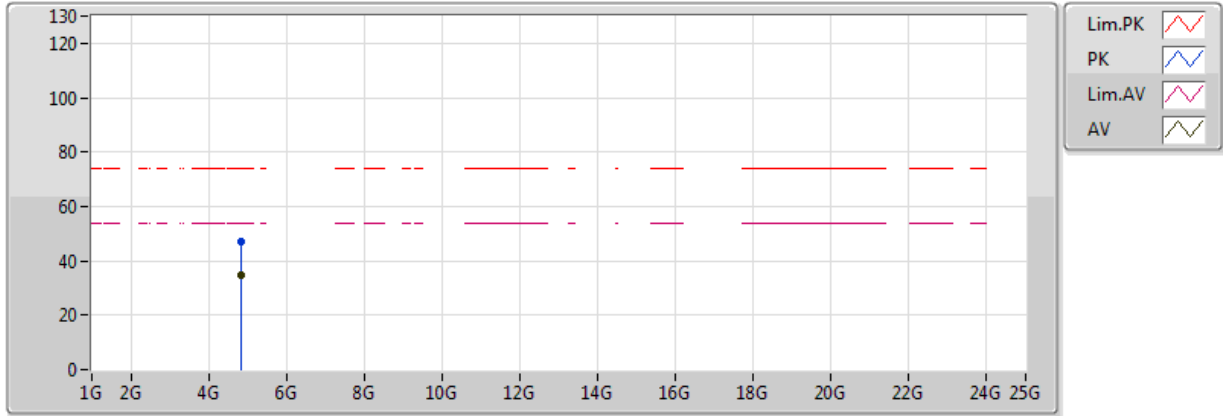


20170327  
 EUT Y 2TX  
 Setting 16500  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.82142G	34.54	54.00	-19.46	3.69	3	V	232	1.05	-
PK	4.83894G	47.15	74.00	-26.85	3.74	3	V	232	1.05	-

### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2412MHz\_TX

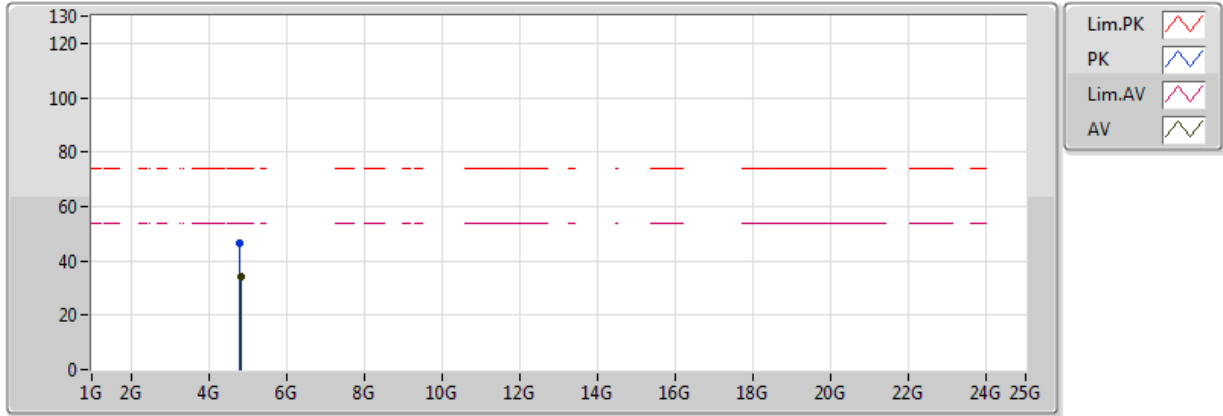


20170327  
EUT Y 2TX  
Setting 16500  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.83696G	34.14	54.00	-19.86	3.73	3	H	109	1.86	-
PK	4.81038G	46.72	74.00	-27.28	3.66	3	H	109	1.86	-

### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2437MHz\_TX

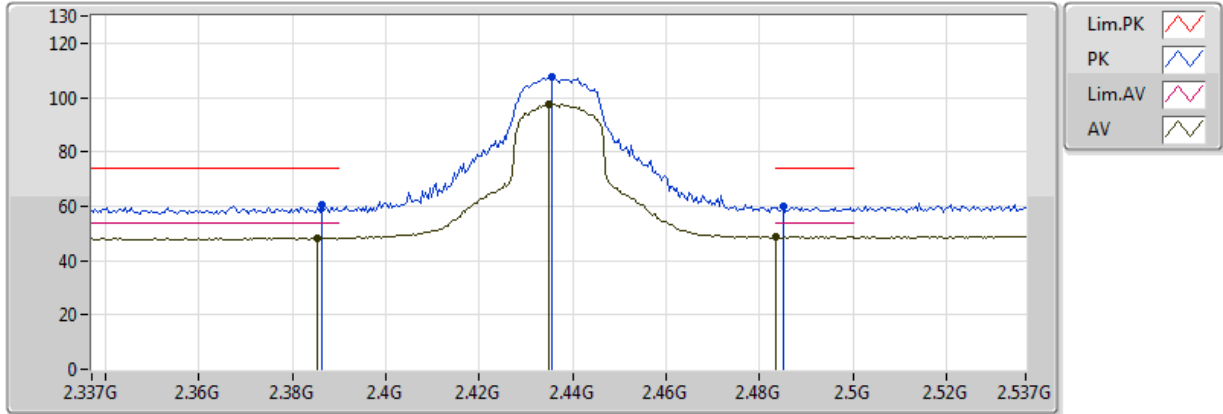


20170327  
 EUT Y 2TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3854G	48.40	54.00	-5.60	32.67	3	V	354	1.79	-
AV	2.435G	97.75	Inf	-Inf	32.72	3	V	354	1.79	-
AV	2.483502G	48.69	54.00	-5.31	32.78	3	V	354	1.79	-
PK	2.3862G	60.26	74.00	-13.74	32.67	3	V	354	1.79	-
PK	2.4354G	107.46	Inf	-Inf	32.72	3	V	354	1.79	-
PK	2.485G	59.79	74.00	-14.21	32.78	3	V	354	1.79	-

### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2437MHz\_TX

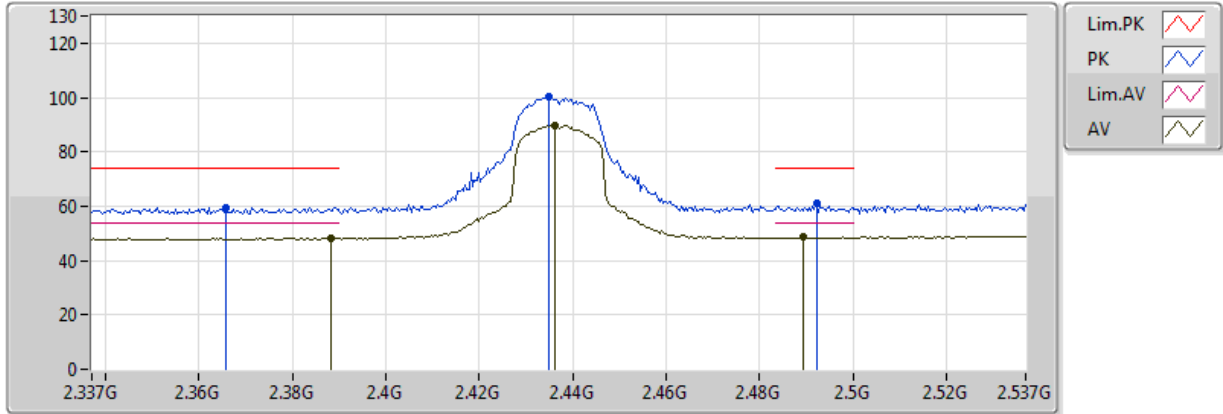


20170327  
EUT Y 2TX  
Setting 20000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.3882G	48.34	54.00	-5.66	32.67	3	H	215	1.11	-
AV	2.4362G	89.76	Inf	-Inf	32.72	3	H	215	1.11	-
AV	2.4894G	48.68	54.00	-5.32	32.79	3	H	215	1.11	-
PK	2.3658G	59.62	74.00	-14.38	32.66	3	H	215	1.11	-
PK	2.435G	100.19	Inf	-Inf	32.72	3	H	215	1.11	-
PK	2.4922G	61.17	74.00	-12.83	32.79	3	H	215	1.11	-



### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2437MHz\_TX

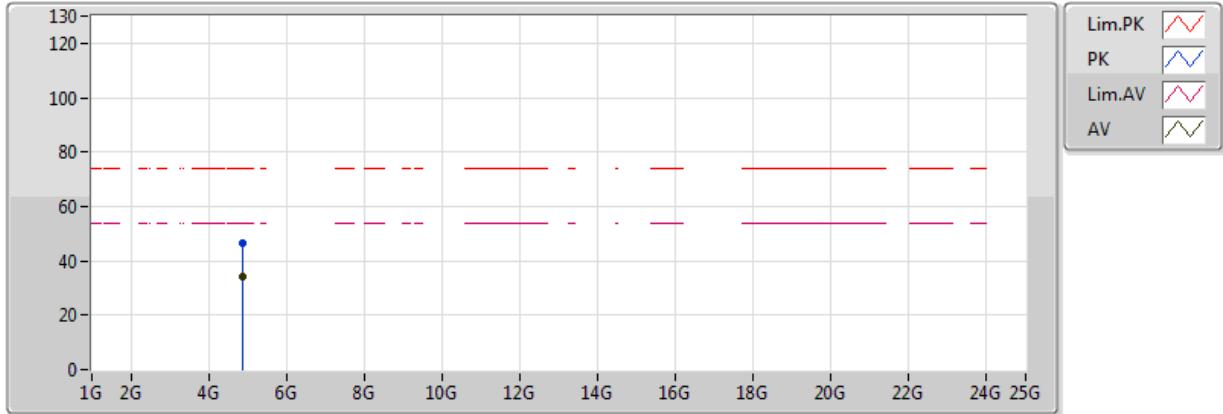

20170327  
 EUT Y 2TX  
 Setting 20000  
 04-J-5  
 FSU


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.87058G	34.46	54.00	-19.54	3.83	3	V	295	2.45	-
PK	4.8836G	46.66	74.00	-27.34	3.86	3	V	295	2.45	-





### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2437MHz\_TX

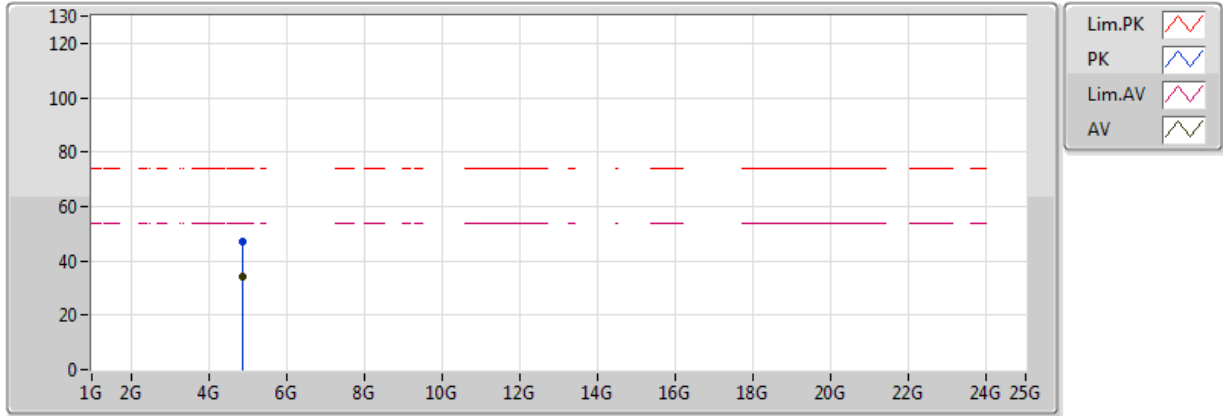


20170327  
 EUT Y 2TX  
 Setting 20000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.8704G	34.06	54.00	-19.94	3.83	3	H	311	1.47	-
PK	4.87778G	47.13	74.00	-26.87	3.85	3	H	311	1.47	-

### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2462MHz\_TX

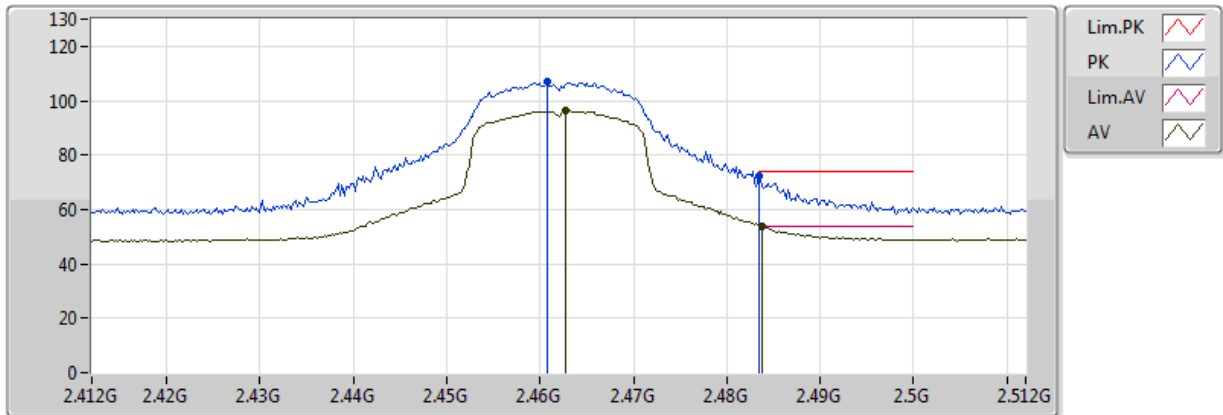


20170327  
EUT Y 2TX  
Setting 17000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.4628G	96.34	Inf	-Inf	32.75	3	V	293	1.08	-
AV	2.4838G	53.89	54.00	-0.11	32.78	3	V	293	1.08	-
PK	2.4608G	107.16	Inf	-Inf	32.75	3	V	293	1.08	-
PK	2.483502G	72.41	74.00	-1.59	32.78	3	V	293	1.08	-

### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2462MHz\_TX

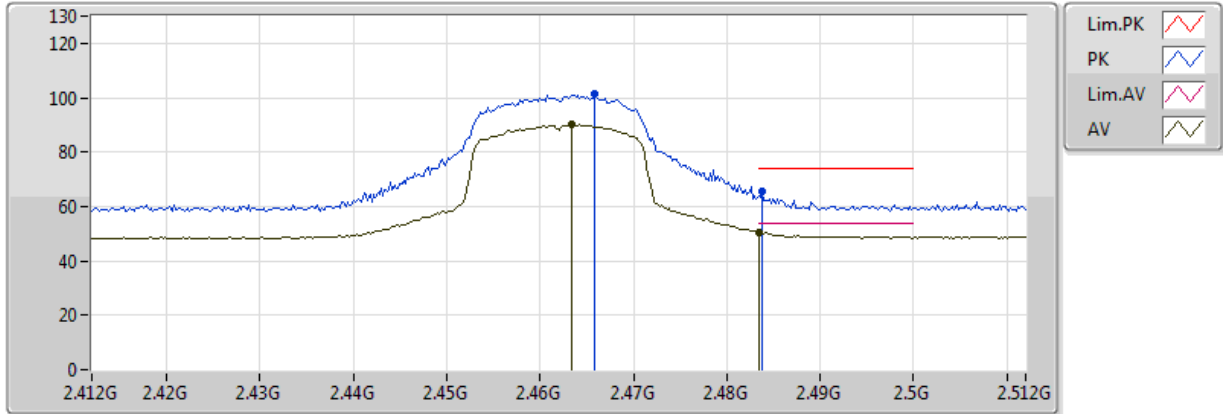


20170327  
EUT Y 2TX  
Setting 17000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	2.4634G	90.16	Inf	-Inf	32.75	3	H	32	1.04	-
AV	2.483502G	50.64	54.00	-3.36	32.78	3	H	32	1.04	-
PK	2.4658G	101.49	Inf	-Inf	32.76	3	H	32	1.04	-
PK	2.4838G	65.34	74.00	-8.66	32.78	3	H	32	1.04	-

### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2462MHz\_TX

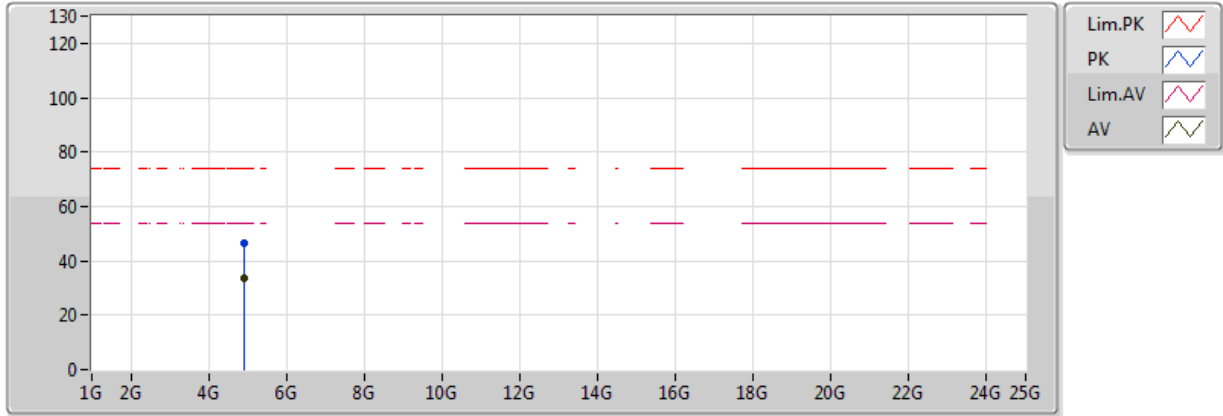


20170327  
 EUT Y 2TX  
 Setting 17000  
 04-J-5  
 FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.92928G	33.66	54.00	-20.34	3.99	3	V	90	1.95	-
PK	4.91956G	46.71	74.00	-27.29	3.97	3	V	90	1.95	-

### 802.11n HT20\_Nss1,(MCS8)\_2TX

### 2462MHz\_TX

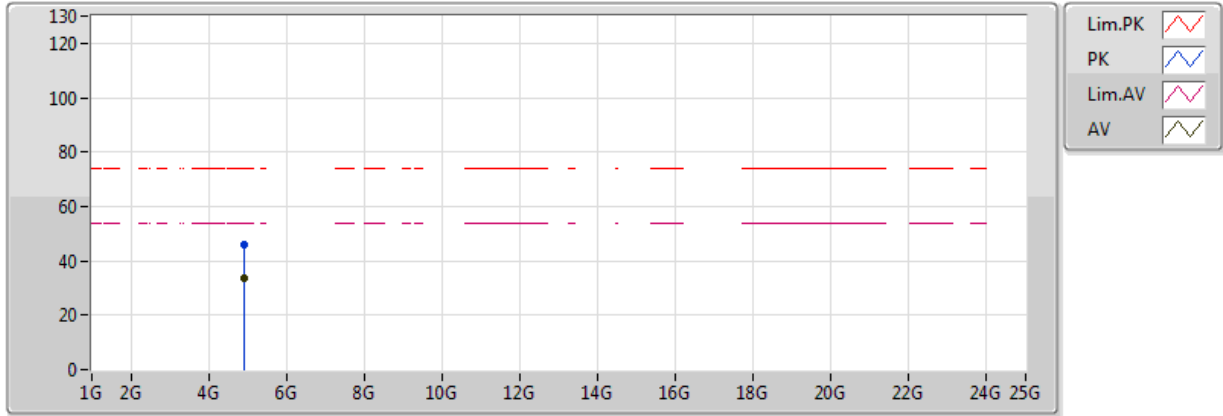

20170327  
EUT Y 2TX  
Setting 17000  
04-J-5  
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	4.91572G	33.75	54.00	-20.25	3.96	3	H	359	1.81	-
PK	4.93144G	45.88	74.00	-28.12	4.00	3	H	359	1.81	-