




# RADIO TEST REPORT


Test Report No. : 11196085S-R2

**Applicant** : HON HAI PRECISION IND. CO., LTD.  
**Type of Equipment** : WIFI 11A/N MODULE  
**Model No.** : MIC-A2  
**FCC ID** : MCLMICA2  
**Test regulation** : FCC Part 15 Subpart E: 2015  
W58 (5745 MHz - 5825 MHz Band) only  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 11196085S-R1. 11196085S-R1 is replaced with this report.

**Date of test:** May 11 to 18, 2016

**Representative test engineer:**   
Shinichi Takano  
Engineer  
Consumer Technology Division

**Approved by:**   
Akio Hayashi  
Leader  
Consumer Technology Division



- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

13-EM-F0429



---

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information.....</b>	<b>4</b>
<b>SECTION 2: Equipment under test (E.U.T.).....</b>	<b>4</b>
<b>SECTION 3: Test specification, procedures &amp; results.....</b>	<b>5</b>
<b>SECTION 4: Operation of E.U.T. during testing.....</b>	<b>8</b>
<b>SECTION 5: Conducted Emission.....</b>	<b>10</b>
<b>SECTION 6: Radiated Spurious Emission and Band Edge Compliance.....</b>	<b>11</b>
<b>SECTION 7: Antenna Terminal Conducted Tests.....</b>	<b>13</b>
<b>APPENDIX 1: Test data .....</b>	<b>14</b>
Conducted Emission .....	14
99 % Occupied Bandwidth.....	15
6 dB Bandwidth .....	19
Maximum Conducted Output Power .....	23
Average Output Power .....	29
Maximum Power Spectral Density .....	31
Radiated Spurious Emission .....	37
Conducted Spurious Emission .....	47
<b>APPENDIX 2: Test instruments .....</b>	<b>48</b>
<b>APPENDIX 3: Photographs of test setup .....</b>	<b>49</b>
Conducted Emission .....	49
Radiated Spurious Emission .....	50
Worst Case Position .....	51

## **SECTION 1: Customer information**

Company Name : HON HAI PRECISION IND. CO., LTD.  
Address : 5F-1, 5 HSIN-AN ROAD  
HSINCHU SCIENCE-BASED INDUSTRIAL PARK  
TAIWAN, R.O.C.  
Telephone Number : 886-3-5784975  
Facsimile Number : 886-3-5775100  
Contact Person : Rio Chen

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : WIFI 11A/N MODULE  
Model No. : MIC-A2  
Serial No. : Refer to Section 4, Clause 4.2  
Rating : DC 3.1 V to DC 5.25 V (Typ: DC 3.3 V)  
Receipt Date of Sample : March 31, 2016  
Country of Mass-production : China  
Condition of EUT : Production model  
Modification of EUT : No Modification by the test lab.

### **2.2 Product Description**

Model: MIC-A2 (referred to as the EUT in this report) is a WIFI 11A/N MODULE.

### **General Specification**

Clock frequency(ies) in the system : 26 MHz

### **Radio Specification**

Radio Type : Transceiver  
Frequency of Operation : 5745 MHz - 5825 MHz, 5755 MHz - 5795 MHz  
Modulation : OFDM  
Power Supply (radio part input) : DC 1.2 V, DC 1.4 V, DC 3.3 V  
Antenna type : PIFA  
Antenna Gain : 2.55 dBi

Remarks: This Wireless Module consists of 1 chip each of 5 GHz band.

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C: 2015, final revised on November 23, 2015  
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted limits  
Section 15.247 Operation within the bands 902-92 8MHz,  
2400-2483.5 MHz, and 5725-5850 MHz

\*Some parts are effective on and after December 17, 2015 or December 23, 2015. The revision does not affect the test specification applied to the EUT.

### **3.2 Procedures and results**

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013	FCC: 15.407 (b) (6) / 15.207	9.0 dB, 0.47718 MHz, N, AV Tx 5825 MHz 11a	Complied	-
	IC: RSS-Gen 8.8	IC: RSS-Gen 8.8			
26 dB Emission Bandwidth	FCC: KDB Publication Number 789033	FCC: 15.407 (a) (1) (2) (3)	See data	N/A	Conducted
	IC: -	IC: -			
Maximum Conducted Output Power	FCC: KDB Publication Number 789033	FCC: 15.407 (a) (1) (2) (3)		Complied	Conducted
	IC: -	IC: RSS-247 6.2.1 (1) 6.2.2 (1) 6.2.3 (1) 6.2.4 (1)			
Maximum Power Spectral Density	FCC: KDB Publication Number 789033	FCC : 15.407 (a) (1) (2) (3)		Complied	Conducted
	IC: -	IC: RSS-247 6.2.1 (1) 6.2.2 (1) 6.2.3 (1) 6.2.4 (1)			
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013 KDB Publication Number 789033	FCC: 15.407 (b), 15.205 and 15.209		3.5 dB 11490.000 MHz, AV, Horizontal Tx 5745 MHz 11a	Complied
	IC: -	IC: RSS-247 6.2.1 (2) 6.2.2 (2) 6.2.3 (2) 6.2.4 (2)			
6 dB Emission Bandwidth	FCC: ANSI C63.10-2013	FCC: 15.407 (e)	See data	Complied	Conducted
	IC: -	IC: RSS-247 6.2.4 (1)			

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\*1) Radiated test was selected over 30 MHz based on section FCC 15.407 (b) and KDB 789033 D02 G.3.b).

\*2) FCC 15.407(b)(4)(ii) was applied based on Note Code 49 of KDB926956 D01 UNII Transition Plan v01r06.

\* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

#### **FCC Part 15.31 (e)**

The RF Module has its own regulator. The RF part is constantly provided voltage (DC 1.2 V, DC 1.4 V, DC 3.3 V). Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

The EUT has a unique coupling/antenna connector (U.FL). Therefore the equipment complies with the requirement.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % Occupied Band Width	RSS-Gen 6.6	IC: -	N/A	N/A	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .  
Shonan EMC Lab.

Item	Frequency range	Uncertainty (+/-)			
		No. 1 SAC / SR	No. 2 SAC / SR	No. 3 SAC / SR	No. 4 SAC / SR
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	2.1 dB	2.1 dB	2.6 dB	2.2 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	2.7 dB	2.7 dB	3.1 dB	-
	30 MHz-300 MHz	4.4 dB	4.4 dB	4.6 dB	-
	300 MHz-1 GHz	5.6 dB	5.5 dB	5.3 dB	-
	1 GHz-13 GHz	5.2 dB	5.2 dB	5.2 dB	-
Radiated emission (Measurement distance: 1 m)	13 GHz-18 GHz	4.9 dB	4.9 dB	4.9 dB	-
	18 GHz-40 GHz	4.9 dB	4.9 dB	4.9 dB	-

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	0.76 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	0.79 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	0.74 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.08 dB
Spurious emission (Conducted) below 1GHz	1.5 dB
Spurious emission (Conducted) 1 GHz-3 GHz	1.7 dB
Spurious emission (Conducted) 3 GHz-18 GHz	2.4 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.5 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.5 dB
Bandwidth Measurement	0.66 %
Duty cycle and Time Measurement	0.012 %

#### Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

#### Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.  
1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN  
Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401  
JAB Accreditation No. RTL02610

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating Mode(s)**

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals -” of TCB Council Workshop October 2009.

<b>Mode</b>	<b>Remarks*</b>
IEEE 802.11a (11a)	6 Mbps, PN9
IEEE 802.11n 20 MHz BW (11n-20)	MCS 0, PN9
IEEE 802.11n 40 MHz BW (11n-40)	MCS 0, PN9
*The worst antenna (Ant: J2) and condition was determined based on the test result of Maximum Conducted Output Power.	
Power settings: -1 (q dBm Index)	
Software: Mtool.exe Version 2.0.1.6	
*This setting of software is the worst case.	
Any conditions under the normal use do not exceed the condition of setting.	
In addition, end users cannot change the settings of the output power of the product.	

\*The details of Operation mode(s)

<b>Test Item</b>	<b>Operating Mode *2)</b>	<b>Tested Frequency</b>
Conducted emission Radiated Spurious Emission (Below 1 GHz) Conducted Spurious Emission	11a Tx *1)	5825 MHz *1)
99 % Occupied Bandwidth, Maximum Conducted Output Power, Maximum Power Spectral Density 6 dB Bandwidth	11a Tx 11n-20 Tx 11n-40 Tx	5745 MHz / 5785 MHz / 5825 MHz (20 MHz band) 5755 MHz / 5795 MHz (40 MHz band)
Radiated Spurious Emission (Above 1 GHz)	11a Tx 11n-40 Tx	5745 MHz / 5785 MHz / 5825 MHz (20 MHz band) 5755 MHz / 5795 MHz (40 MHz band)
*1) The mode was tested as a representative, because it had the highest power at antenna terminal test.		
*2) The worse antenna port was determined based on the test result of Maximum Peak Output Power.		


Measured antenna port:

Maximum peak output power	- Antenna J2 - Antenna J3
Maximum Power Spectral Density, Radiated emission	- Antenna J2 or Antenna J3 *3)
Other tests	- Antenna J2 or Antenna J3 *3)

\*3) The worse antenna port was determined based on the test result of Maximum Peak Output Power.



## 4.2 Configuration and peripherals

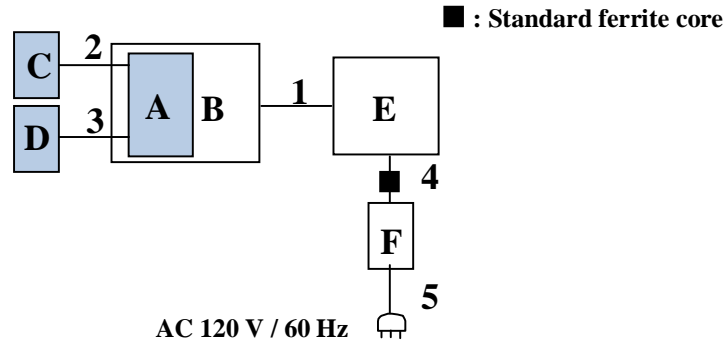

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

### Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	WIFI 11A/N MODULE	MIC-A2	40D28ADFAC91 *1) 40D28ADF7B1E *2)	Hon Hai Precision Ind. Co., Ltd.	EUT
B	MIC A Conversion board V1	-	-	FOXCONN	*3)
C	Antenna	000403713100	1	FOXCONN	EUT
D	Antenna	000403713209	2	FOXCONN	EUT
E	Laptop PC	ThinkPad T43(2668-D59)	L3YHTEL	IBM	-
F	AC Adapter	02K6750	1S02K6750Z1Z2UP2990 S2	IBM	-

\*1) Used for Antenna Terminal conducted test

\*2) Used for Conducted Emission test and Radiated Emission test

\*3) The use of a board does not influence on the test result.

### List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Flat cable	0.23	Unshielded	Unshielded	-
2	Antenna cable	0.18	Shielded	Shielded	Antenna:J2
3	Antenna cable	0.10	Shielded	Shielded	Antenna:J3
4	DC cable	1.5	Unshielded	Unshielded	-
5	AC cable	0.8	Unshielded	Unshielded	-

## **SECTION 5: Conducted Emission**

### **Test Procedure and conditions**

EUT was placed on a platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80 cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a shielded room. The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Detector** : QP and CISPR Average  
**Measurement range** : 0.15 MHz-30 MHz  
**Test data** : APPENDIX  
**Test result** : Pass

## **SECTION 6: Radiated Spurious Emission and Band Edge Compliance**

### **Test Procedure**

< Below 1 GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1 GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1 GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1 GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

Restricted band edge:

Apply to limit in the Section 15. 407(b)(4)(ii) based on Note Code 49 of KDB926956 D01 UNII Transition Plan v01r06.

\*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ (uV/m)} \quad :P \text{ is the e.i.r.p. (Watts)}$$

**Test Antennas are used as below;**

Frequency	30 MHz to 300 MHz	300 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method VB *1) RBW: 1 MHz VBW: 11a: 510 Hz, 11n-40: 1.1 kHz Detector: Peak Trace: Maxhold
Test Distance	3 m	3 m *2) (1 GHz – 13 GHz), 1 m *3) (13 GHz – 40 GHz)	

\*1) The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r02 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E (Issued on April 8, 2016)".

\*2) Distance Factor:  $20 \times \log(4.4 \text{ m}/3.0 \text{ m}) = 3.3 \text{ dB}$

\*3) Distance Factor:  $20 \times \log(1.0 \text{ m}/3.0 \text{ m}) = -9.5 \text{ dB}$

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Subject	Antenna polarization	Carrier (Band edge)	Spurious					
			Below 1 GHz	1 GHz - 6.4 GHz	6.4 GHz - 13 GHz	13 GHz - 18 GHz	18 GHz – 26.5 GHz	26.5 GHz – 40 GHz
Module	Horizontal	Z	X	Z	Z	Z	Y	Y
Antenna		Y	X	Y	X	X	Y	Y
Module	Vertical	Z	X	Z	Z	Z	Y	Y
Antenna		Z	X	Z	Y	X	Y	Y

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement range** : 30 MHz-40 GHz  
**Test data** : APPENDIX  
**Test result** : Pass

## **SECTION 7: Antenna Terminal Conducted Tests**

### **Test Procedure**

The tests were made with below setting connected to the antenna port.

<b>Test</b>	<b>Span</b>	<b>RBW</b>	<b>VBW</b>	<b>Sweep time</b>	<b>Detector</b>	<b>Trace</b>	<b>Instrument used and Test method</b>
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 % to 5 % of OBW	≥ 3 RBW	Auto	Peak	Max Hold	Spectrum Analyzer
6 dB Bandwidth	Enough to capture the emission	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Conducted Output Power	-	-	-	Auto	Average	-	Power Meter (Sensor: 160 MHz BW (SPM-07) (Method PM))
Maximum Power Spectral Density	Encompass the entire EBW	100 kHz *2)	≥ 3 RBW	Auto	RMS Power Averaging (100 times)	Clear Write	Spectrum Analyzer
Conducted Spurious Emission*3)	9 kHz – 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz – 30 MHz	10 kHz	30 kHz				

\* The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r02 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E (Issued on April 8, 2016)".

\*1) Peak hold was applied as Worst-case measurement.

\*2) FCC standard says that RBW is set to be 500 kHz for 5.725 GHz-5.850 GHz, but it is not possible with spectrum analyzer, so  $10\log(500\text{ kHz}/100\text{ kHz})$  was added to the test result.

\*3) In the frequency range below 30 MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9 kHz-150 kHz: RBW = 200 Hz, 150 kHz-30 MHz: RBW = 10 kHz)

The test results and limit are rounded off to two decimals place, so some differences might be observed.

**Test data** : **APPENDIX**

**Test result** : **Pass**

**APPENDIX 1: Test data**

**Conducted Emission**


**DATA OF CONDUCTED EMISSION TEST**

UL Japan, Inc. Shonan EMC Lab. No.2 Shielded Room  
Date : 2016/05/18

Mode : Tx 11a 5825MHz  
Power : DC 3.3V  
Temp./Humi. : 25 deg.C / 51 %RH

Limit1 : FCC 15C (15.207) QP  
Limit2 : FCC 15C (15.207) AV

Engineer : Yohsuke Matsuzawa

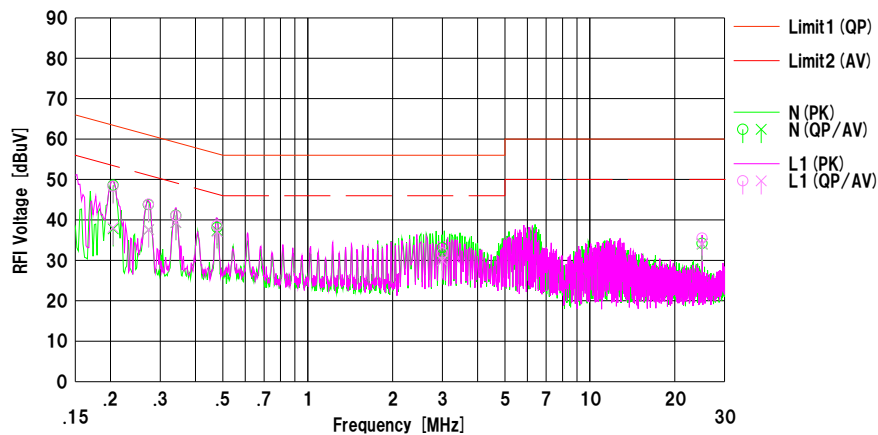

No.	Freq. [MHz]	Reading		C.Fac	Results		Limit		Margin		Phase	Comment
		<QP> [dBuV]	<AV> [dBuV]		<QP> [dBuV]	<AV> [dBuV]	<QP> [dBuV]	<AV> [dBuV]	<QP> [dB]	<AV> [dB]		
1	0.20450	36.00	25.20	12.59	48.59	37.79	63.43	53.43	14.8	15.6	N	
2	0.27284	31.20	25.00	12.59	43.79	37.59	61.03	51.03	17.2	13.4	N	
3	0.34094	28.50	26.70	12.62	41.12	39.32	59.18	49.18	18.0	9.8	N	
4	0.47718	25.50	24.70	12.63	38.13	37.33	56.39	46.39	18.2	9.0	N	
5	2.99948	20.30	19.00	12.80	33.10	31.80	56.00	46.00	22.9	14.2	N	
6	25.00328	20.30	20.10	13.90	34.20	34.00	60.00	50.00	25.8	16.0	N	
7	0.20422	35.70	25.50	12.59	48.29	38.09	63.44	53.44	15.1	15.3	L1	
8	0.27298	31.30	25.00	12.59	43.89	37.59	61.03	51.03	17.1	13.4	L1	
9	0.34092	28.40	26.80	12.62	41.02	39.42	59.18	49.18	18.1	9.7	L1	
10	0.47716	26.00	24.50	12.63	38.63	37.13	56.39	46.39	17.7	9.2	L1	
11	2.99808	19.00	17.10	12.80	31.80	29.90	56.00	46.00	24.2	16.1	L1	
12	25.00288	21.60	20.20	13.90	35.50	34.10	60.00	50.00	24.5	15.9	L1	

Calculation: Result [dBuV] = Reading [dBuV] + C.Fac (LISN+Cable+ATT) [dB]  
LISN: SLS-03

## 99 % Occupied Bandwidth

Test place                      Shonan EMC Lab. No.5 Shielded Room  
Report No.                      11196085S-R2  
Date                              May 13, 2016  
Temperature / Humidity        25deg. C / 52 % RH  
Engineer                        Shinichi Takano  
Mode                              Tx

Tx 11a, Antenna J2

Tested Frequency [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
5745	17.237	-
5785	17.525	-
5825	18.195	-

Tx 11n-20, Antenna J2


Tested Frequency [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
5745	18.272	-
5785	18.344	-
5825	18.823	-

Tx 11n-40, Antenna J2

Tested Frequency [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
5755	36.200	-
5795	36.341	-

## 99 % Occupied Bandwidth

### 11a, Antenna J2

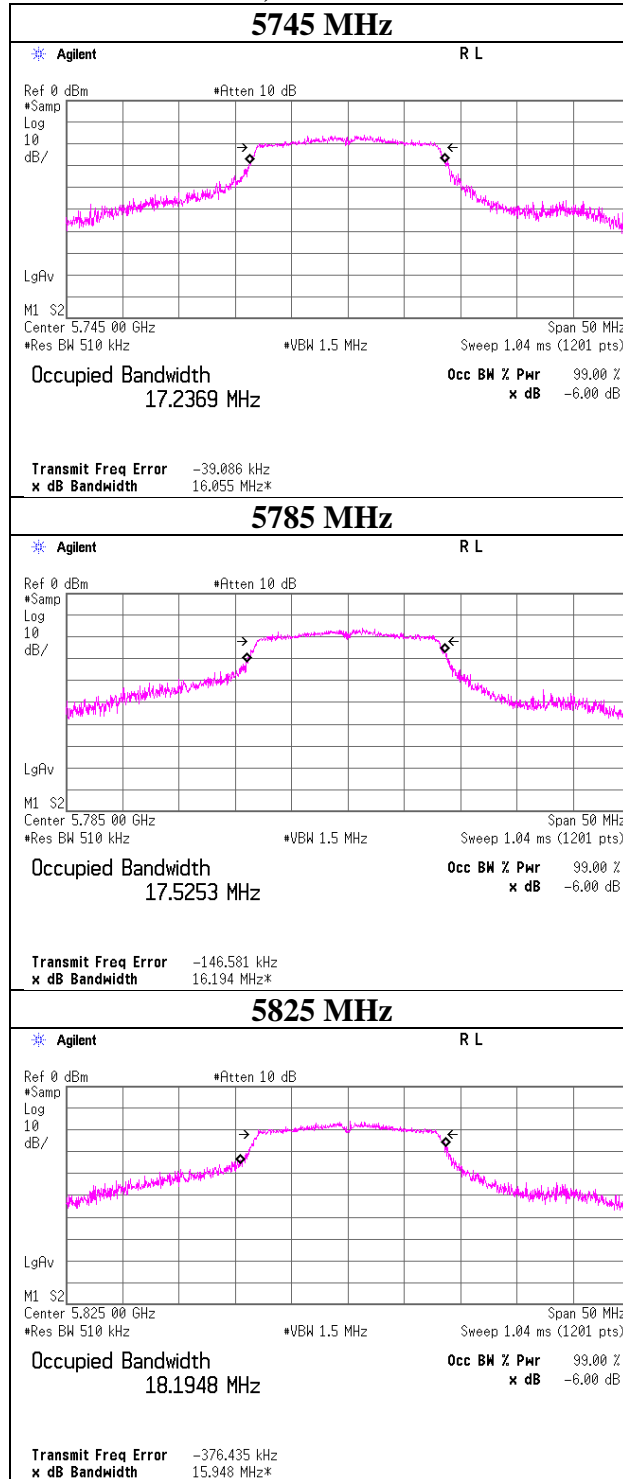

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401




## 99 % Occupied Bandwidth

### 11n-20, Antenna J2

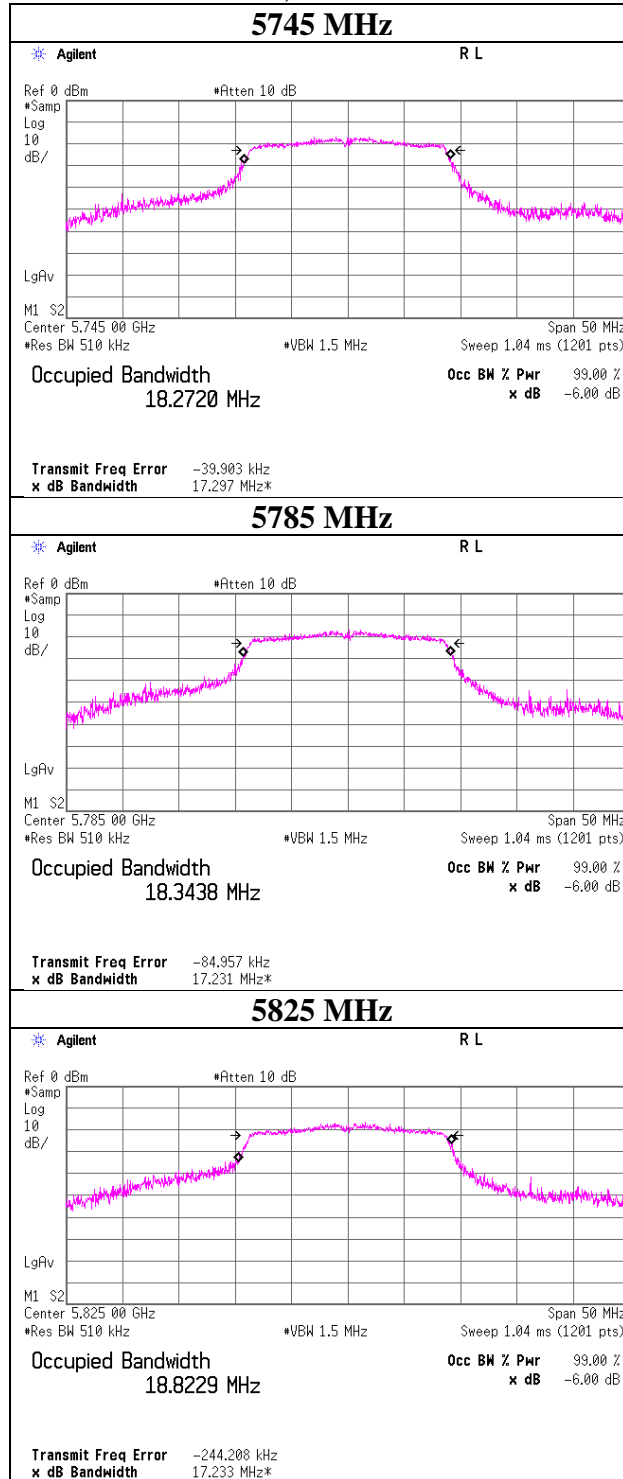

## 99 % Occupied Bandwidth

### 11n-40, Antenna J2

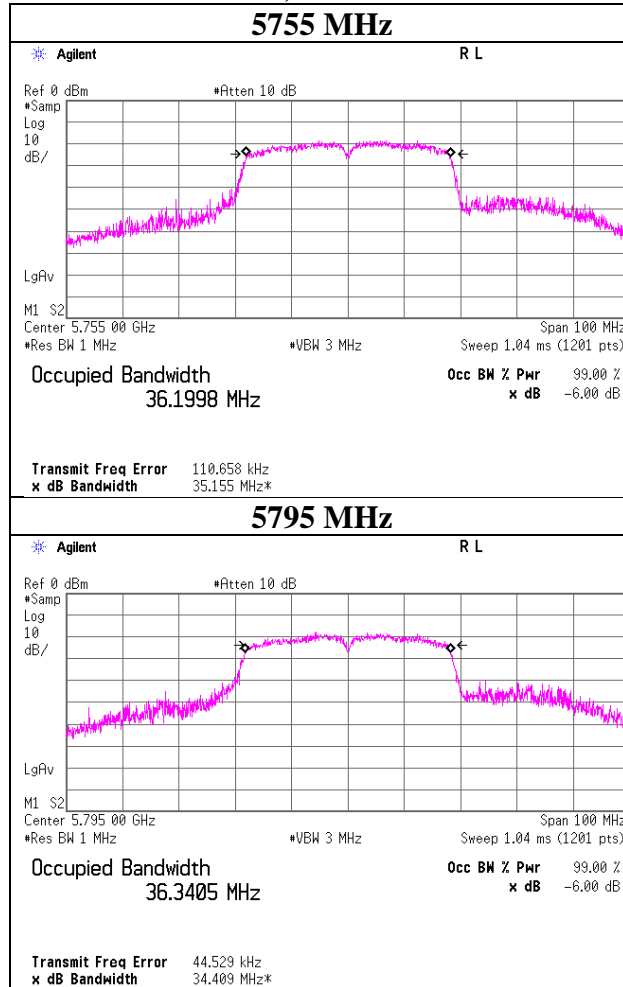

## 6 dB Bandwidth

Test place Shonan EMC Lab. No.5 Shielded Room  
Report No. 11196085S-R2  
Date May 13, 2016  
Temperature / Humidity 25deg. C / 52 % RH  
Engineer Shinichi Takano  
Mode Tx

Tx 11a, Antenna J2

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5745	15.148	> 500
5785	15.064	> 500
5825	15.167	> 500

Tx 11n-20, Antenna J2


Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5745	15.632	> 500
5785	15.108	> 500
5825	15.144	> 500

Tx 11n-40, Antenna J2

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5755	35.157	> 500
5795	35.135	> 500


## 6 dB Bandwidth

### 11a, Antenna J2

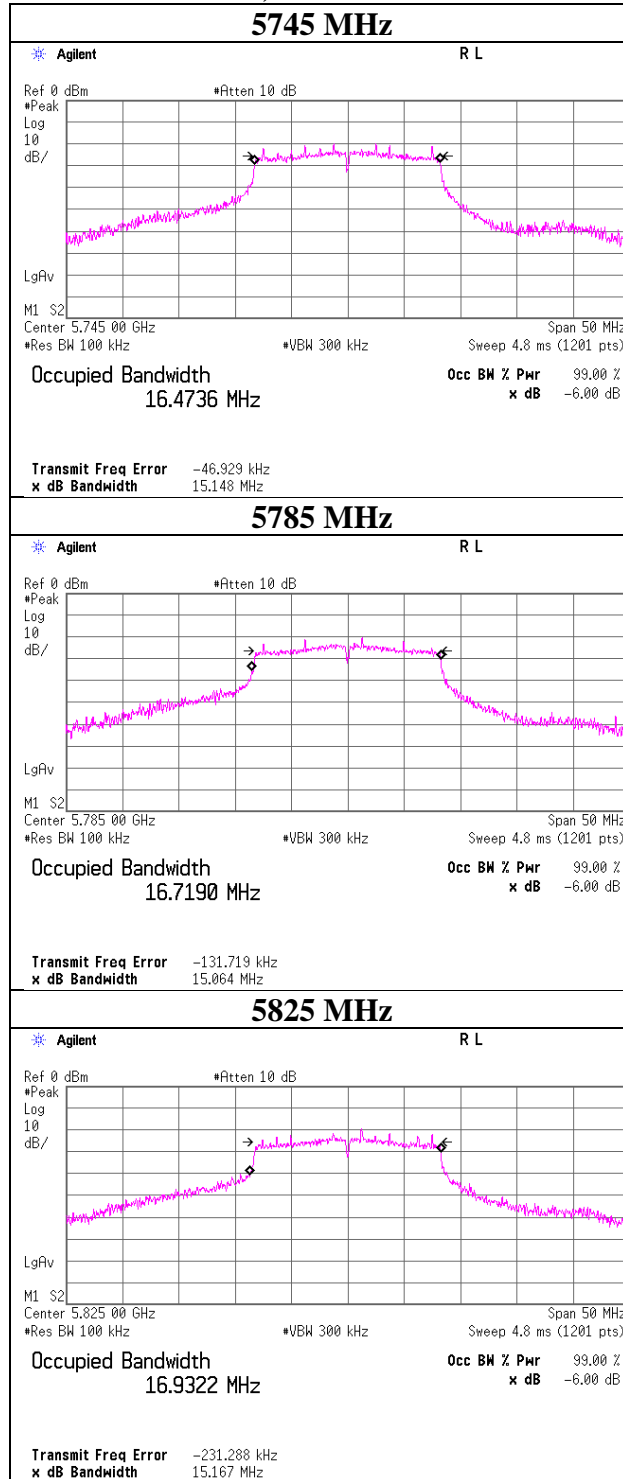


## 6 dB Bandwidth

### 11n-20, Antenna J2

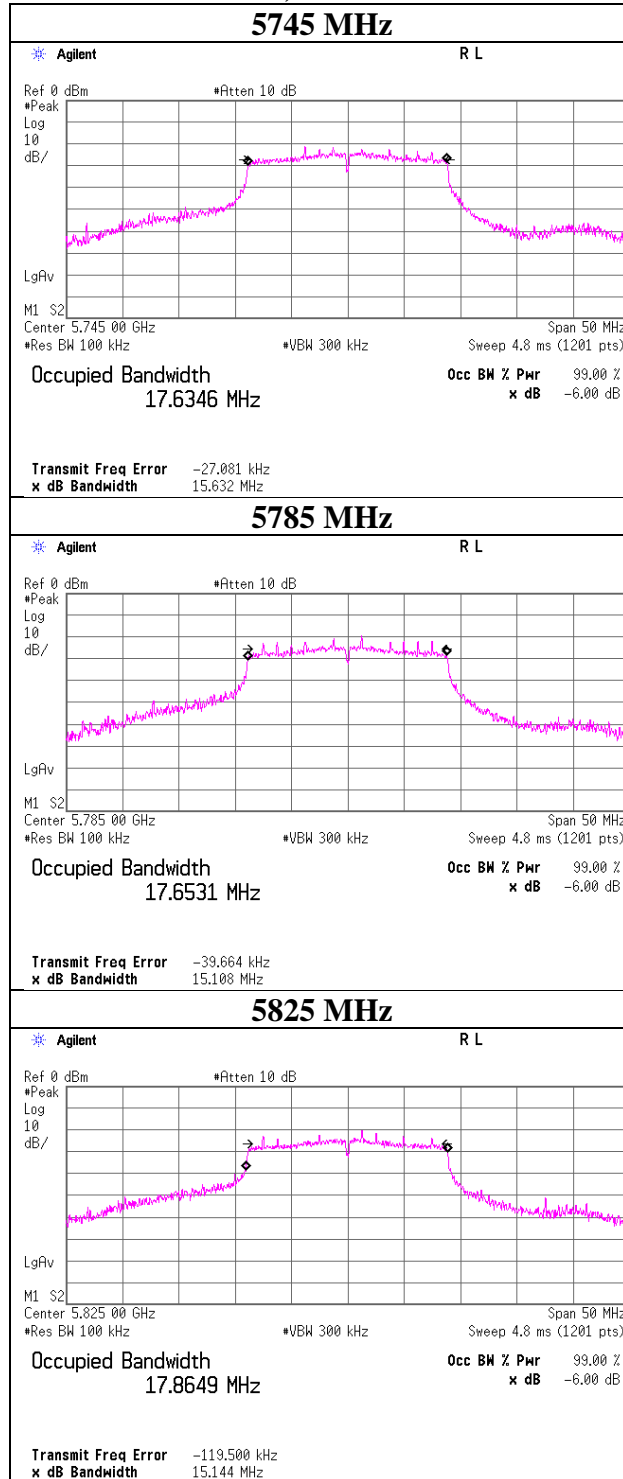

## 6 dB Bandwidth

### 11n-40, Antenna J2

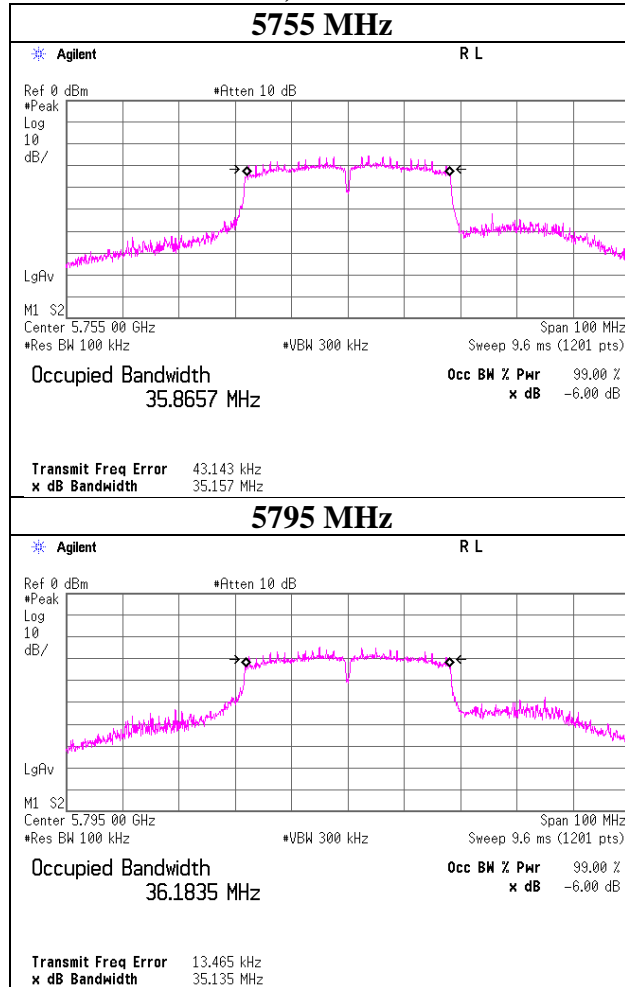

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11196085S-R2  
Date : May 12, 2016  
Temperature / Humidity : 25 deg. C / 51 % RH  
Engineer : Makoto Hosaka  
Mode : Tx 11a

**Antenna J2**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [dBm]	Limit [dBm]	Margin [dB]		
5745	-11.12	1.74	20.10	0.20	2.55	-	-	10.92	12.36	30.00	19.08	13.47	22.23	36.00	22.53
5785	-11.21	1.75	20.11	0.20	2.55	-	-	10.85	12.16	30.00	19.15	13.40	21.88	36.00	22.60
5825	-11.11	1.77	20.12	0.20	2.55	-	-	10.98	12.53	30.00	19.02	13.53	22.54	36.00	22.47

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

## Maximum Conducted Output Power

Test place                   Shonan EMC Lab. No.1 Measurement Room  
Report No.                   11196085S-R2  
Date                            May 12, 2016  
Temperature / Humidity    25 deg. C / 51 % RH  
Engineer                     Makoto Hosaka  
Mode                          Tx 11a

### Antenna J2, 5785 MHz

Mode	Rate Mbps	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11a	6	-11.21	0.20	-11.01	*
	9	-11.60	0.30	-11.30	
	12	-11.69	0.40	-11.29	
	18	-12.02	0.57	-11.45	
	24	-12.04	0.67	-11.37	
	36	-12.32	1.04	-11.28	
	48	-12.97	1.32	-11.65	
	54	-12.98	1.43	-11.55	

### Antenna J3, 5785 MHz

Mode	Rate Mbps	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11a	6	-11.26	0.20	-11.06	
	9	-11.69	0.30	-11.39	
	12	-11.78	0.40	-11.38	
	18	-12.03	0.57	-11.46	
	24	-12.30	0.67	-11.63	
	36	-12.68	1.04	-11.64	
	48	-13.04	1.32	-11.72	
	54	-13.20	1.43	-11.77	

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.



## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11196085S-R2  
Date : May 12, 2016  
Temperature / Humidity : 25 deg. C / 51 % RH  
Engineer : Makoto Hosaka  
Mode : Tx 11n-20 SISO

**Antenna J2**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power			e.i.r.p.				
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [dBm]	Limit [dBm]	Margin [dB]		
5745	-11.20	1.74	20.10	0.22	2.55	-	-	10.86	12.19	30.00	19.14	13.41	21.93	36.00	22.59
5785	-11.11	1.75	20.11	0.22	2.55	-	-	10.97	12.50	30.00	19.03	13.52	22.49	36.00	22.48
5825	-11.28	1.77	20.12	0.22	2.55	-	-	10.83	12.11	30.00	19.17	13.38	21.78	36.00	22.62

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

## Maximum Conducted Output Power

Test place                   Shonan EMC Lab. No.1 Measurement Room  
Report No.                   11196085S-R2  
Date                            May 12, 2016  
Temperature / Humidity    25 deg. C / 51 % RH  
Engineer                     Makoto Hosaka  
Mode                         Tx 11n-20 SISO

### Antenna J2, 5785 MHz

Mode	Rate MCS	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11n HT20	0	-11.11	0.22	-10.89	*
	1	-11.88	0.42	-11.46	
	2	-12.10	0.60	-11.50	
	3	-12.25	0.78	-11.47	
	4	-12.65	0.97	-11.68	
	5	-12.88	1.37	-11.51	
	6	-12.96	1.44	-11.52	
	7	-13.24	1.55	-11.69	

### Antenna J3, 5785 MHz

Mode	Rate Mbps	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11n HT20	0	-11.64	0.22	-11.42	
	1	-11.97	0.42	-11.55	
	2	-12.18	0.60	-11.58	
	3	-12.36	0.78	-11.58	
	4	-12.76	0.97	-11.79	
	5	-13.11	1.37	-11.74	
	6	-13.16	1.44	-11.72	
	7	-13.33	1.55	-11.78	

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11196085S-R2  
Date : May 12, 2016  
Temperature / Humidity : 25 deg. C / 51 % RH  
Engineer : Makoto Hosaka  
Mode : Tx 11n-40 SISO

**Antenna J2**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power			e.i.r.p.				
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [dBm]	Limit [dBm]	Margin [dB]		
5755	-13.92	1.74	20.10	0.43	2.55	-	-	8.35	6.84	30.00	21.65	10.90	12.30	36.00	25.10
5795	-13.83	1.75	20.11	0.43	2.55	-	-	8.46	7.01	30.00	21.54	11.01	12.62	36.00	24.99

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

## Maximum Conducted Output Power

Test place                   Shonan EMC Lab. No.1 Measurement Room  
Report No.                   11196085S-R2  
Date                            May 12, 2016  
Temperature / Humidity    25 deg. C / 51 % RH  
Engineer                     Makoto Hosaka  
Mode                          Tx 11n-40 SISO

### Antenna J2, 5755 MHz

Mode	Rate MCS	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11n HT40	0	-13.92	0.43	-13.49	*
	1	-14.29	0.72	-13.57	
	2	-14.79	1.12	-13.67	
	3	-15.06	1.37	-13.69	
	4	-15.53	1.84	-13.69	
	5	-15.92	2.22	-13.70	
	6	-16.28	2.29	-13.99	
	7	-16.43	2.41	-14.02	

### Antenna J3, 5755 MHz

Mode	Rate Mbps	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11n HT40	0	-13.99	0.43	-13.56	
	1	-14.25	0.72	-13.53	
	2	-14.88	1.12	-13.76	
	3	-15.21	1.37	-13.84	
	4	-15.93	1.84	-14.09	
	5	-16.42	2.22	-14.20	
	6	-16.43	2.29	-14.14	
	7	-16.69	2.41	-14.28	

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11196085S-R2  
Date : May 12, 2016  
Temperature / Humidity : 25 deg. C / 51 % RH  
Engineer : Makoto Hosaka  
Mode : Tx

**Tx 11a, Antenna J2**

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average)	
				[dBm]	[mW]
5745	-11.12	1.74	20.10	10.72	11.80
5785	-11.41	1.75	20.11	10.45	11.09
5825	-11.31	1.77	20.12	10.58	11.43

Sample Calculation:

Result (Timed average) = Reading + Cable Loss + Atten. Loss

**Tx 11n-20, Antenna J2**

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average)	
				[dBm]	[mW]
5745	-11.10	1.74	20.10	10.74	11.86
5785	-11.36	1.75	20.11	10.50	11.22
5825	-11.28	1.77	20.12	10.61	11.51

Sample Calculation:

Result (Timed average) = Reading + Cable Loss + Atten. Loss

**Tx 11n-40, Antenna J2**

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average)	
				[dBm]	[mW]
5755	-13.97	1.74	20.01	7.78	6.00
5795	-13.87	1.75	20.02	7.90	6.17

Sample Calculation:


Result (Timed average) = Reading + Cable Loss + Atten. Loss

### Burst rate confirmation


Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11196085S-R2
Date	May 12, 2016
Temperature / Humidity	27 deg. C / 51 % RH
Engineer	Wataru Kojima
Mode	Tx

#### 11a 6 Mbps

#### 11n-20 MCS0

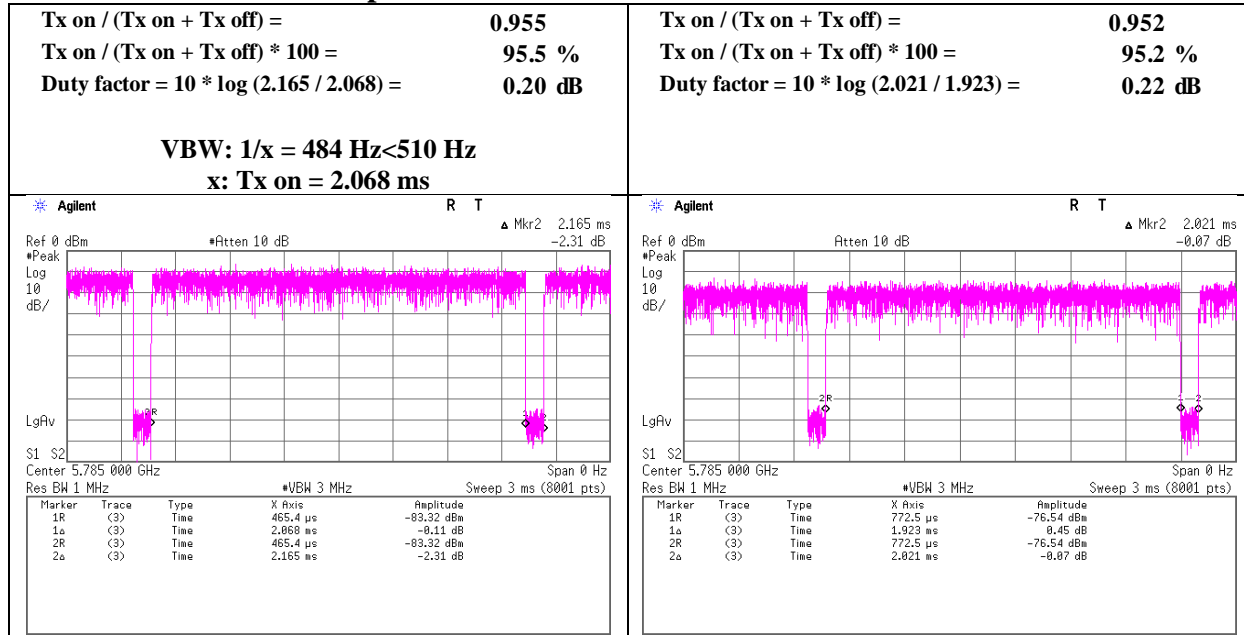

#### 11n-40 MCS0

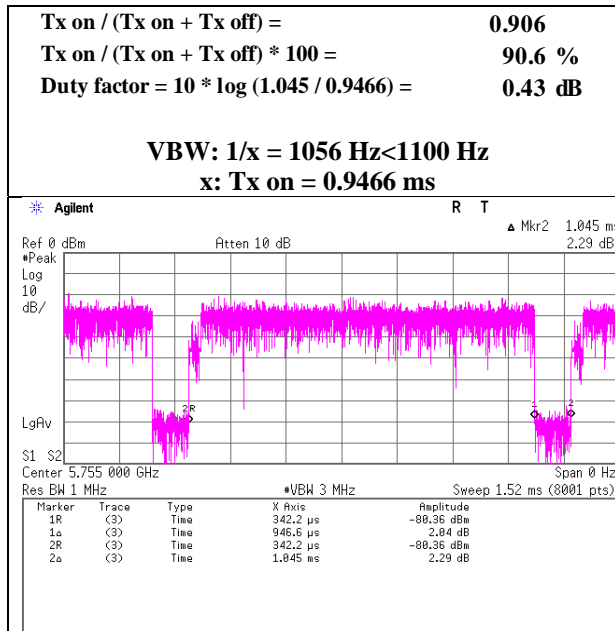

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.5 Shielded Room  
Report No. : 11196085S-R2  
Date : May 13, 2016  
Temperature / Humidity : 25deg. C / 52 % RH  
Engineer : Shinichi Takano  
Mode : Tx 11a, Antenna J2

### Antenna J2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5745	-28.69	1.74	20.10	0.20	2.55	6.99	0.35	30.00	29.66	2.90	36.00	33.11
5785	-29.41	1.75	20.11	0.20	2.55	6.99	-0.36	30.00	30.36	2.19	36.00	33.81
5825	-29.34	1.77	20.12	0.20	2.55	6.99	-0.26	30.00	30.26	2.29	36.00	33.71

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Report No.	11196085S-R2
Date	May 13, 2016
Temperature / Humidity	25deg. C / 52 % RH
Engineer	Shinichi Takano
Mode	Tx 11a, Antenna J2

### 11a, Antenna J2

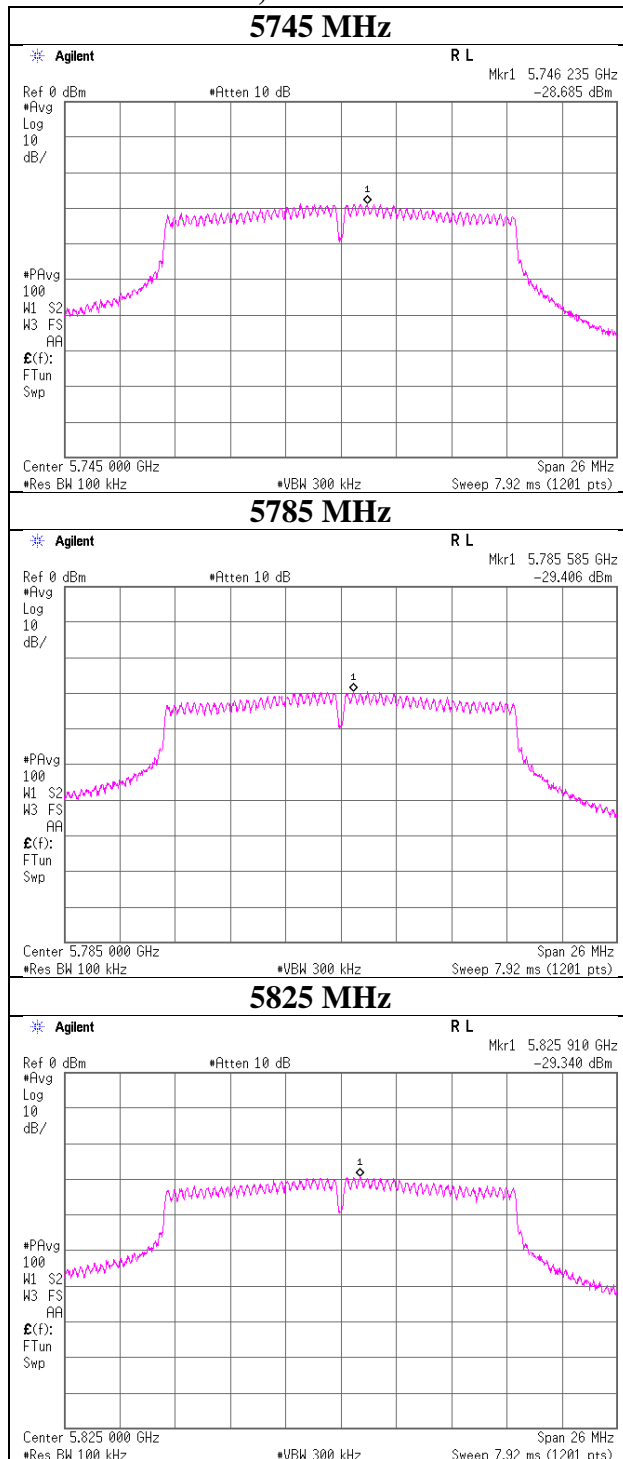



## Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.5 Shielded Room  
Report No. : 11196085S-R2  
Date : May 13, 2016  
Temperature / Humidity : 25deg. C / 52 % RH  
Engineer : Shinichi Takano  
Mode : Tx 11n-20, Antenna J2

### Antenna J2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5745	-29.42	1.74	20.10	0.22	2.55	6.99	-0.37	30.00	30.37	2.18	36.00	33.82
5785	-29.55	1.75	20.11	0.22	2.55	6.99	-0.48	30.00	30.48	2.07	36.00	33.93
5825	-29.64	1.77	20.12	0.22	2.55	6.99	-0.54	30.00	30.54	2.01	36.00	33.99

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Report No.	11196085S-R2
Date	May 13, 2016
Temperature / Humidity	25deg. C / 52 % RH
Engineer	Shinichi Takano
Mode	Tx 11n-20, Antenna J2

### 11n-20, Antenna J2

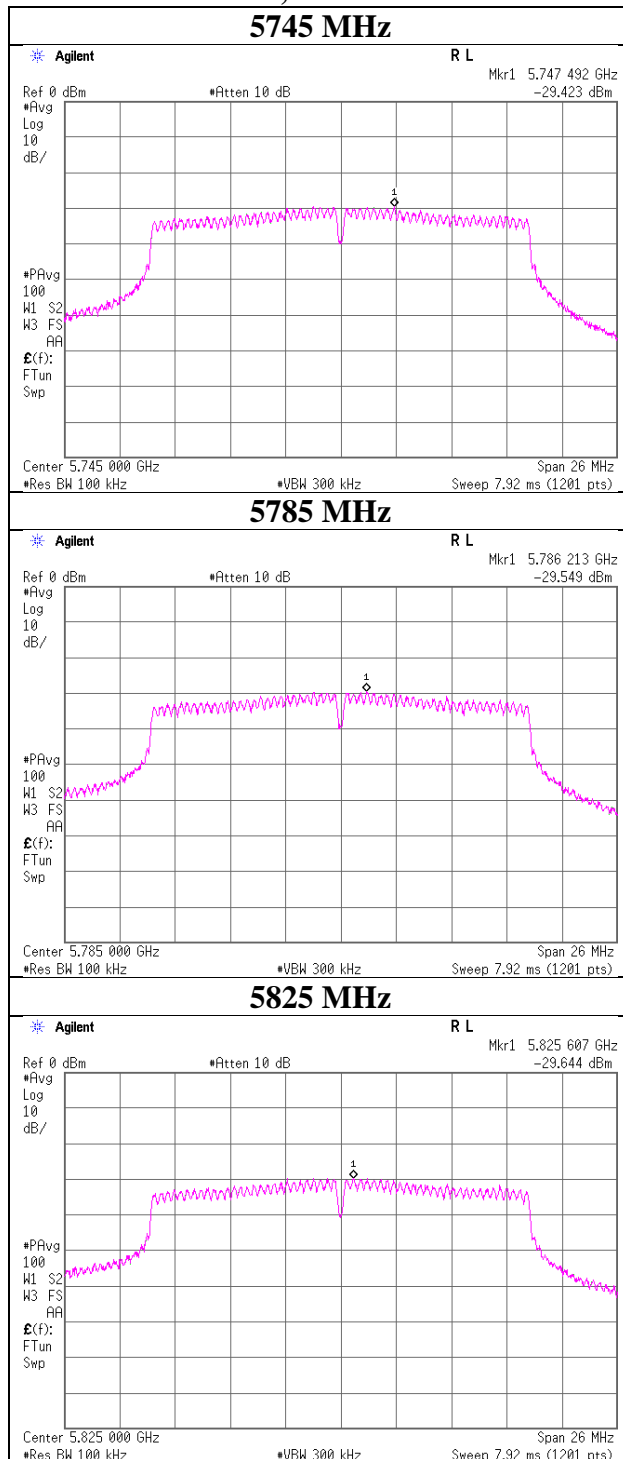

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.5 Shielded Room  
Report No. : 11196085S-R2  
Date : May 13, 2016  
Temperature / Humidity : 25deg. C / 52 % RH  
Engineer : Shinichi Takano  
Mode : Tx 11n-40, Antenna J2

### Antenna J2

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5755	-34.71	1.74	20.10	0.43	2.55	6.99	-5.44	30.00	35.45	-2.90	36.00	38.90
5795	-34.89	1.75	20.11	0.43	2.55	6.99	-5.61	30.00	35.61	-3.06	36.00	39.06

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.5 Shielded Room  
Report No. : 11196085S-R2  
Date : May 13, 2016  
Temperature / Humidity : 25deg. C / 52 % RH  
Engineer : Shinichi Takano  
Mode : Tx 11n-40, Antenna J2

### 11a, Antenna B

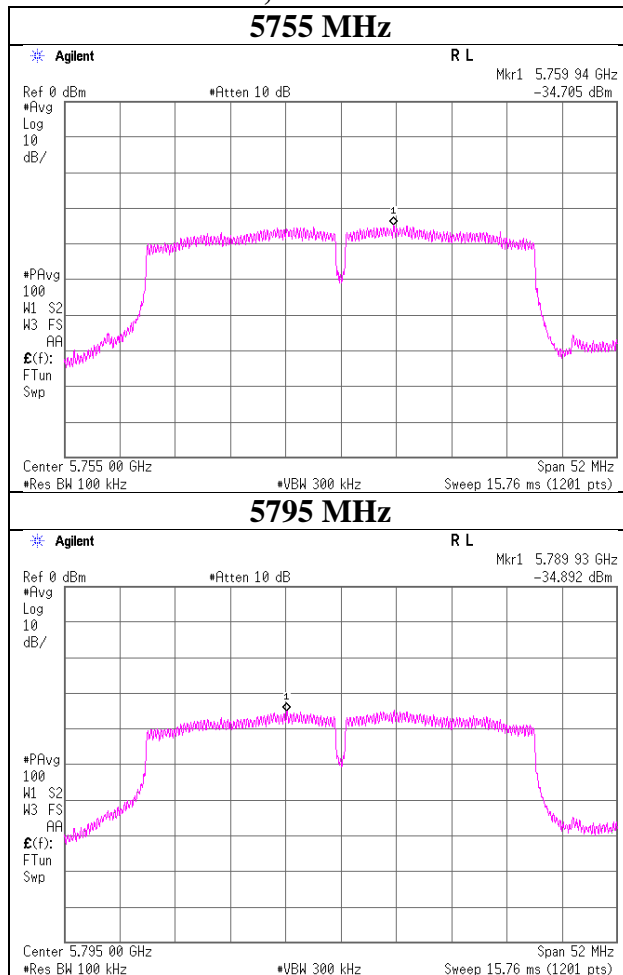

## Radiated Spurious Emission

Test place Shonan EMC Lab.  
Report No. 11196085S-R2  
Semi 3 3 3 1 2  
Anechoic  
Chamber No  
Date May 13, 2016 May 14, 2016 May 15, 2016 May 16, 2016 May 17, 2016  
Temperature / Humidity 24 deg.C / 42 %RH 24 deg.C / 54 %RH 24 deg.C / 52 %RH 23 deg.C / 49 %RH 23 deg.C / 55 %RH  
Engineer Yosuke Ishikawa Hiroyuki Morikawa Kazutaka Takeyama Kazutaka Takeyama Takahiro Suzuki  
Mode (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz -26.5 GHz) (26.5 GHz - 40 GHz)  
Tx 11a 5745 GHz

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	11490.000	PK	48.7	40.0	8.5	38.8	3.3	61.7	73.9	12.2	400	215	
Hori.	17235.000	PK	49.5	42.0	11.4	39.3	-9.5	54.1	73.9	19.8	125	209	
Hori.	22980.000	PK	53.6	40.3	24.1	46.9	-9.5	61.6	73.9	12.3	166	357	
Hori.	11490.000	AV	37.4	40.0	8.5	38.8	3.3	50.4	53.9	3.5	400	215	VBW:510 Hz
Hori.	17235.000	AV	39.2	42.0	11.4	39.3	-9.5	43.8	53.9	10.1	125	209	VBW:510 Hz
Hori.	22980.000	AV	39.6	40.3	24.1	46.9	-9.5	47.6	53.9	6.3	166	357	VBW:510 Hz
Vert.	11490.000	PK	44.8	40.0	8.5	38.8	3.3	57.8	73.9	16.1	150	0	
Vert.	17235.000	PK	49.4	42.0	11.4	39.3	-9.5	54.0	73.9	19.9	131	242	
Vert.	22980.000	PK	51.4	40.3	24.1	46.9	-9.5	59.4	73.9	14.5	174	203	
Vert.	11490.000	AV	33.2	40.0	8.5	38.8	3.3	46.2	53.9	7.7	150	0	VBW:510 Hz
Vert.	17235.000	AV	37.3	42.0	11.4	39.3	-9.5	41.9	53.9	12.0	131	242	VBW:510 Hz
Vert.	22980.000	AV	36.1	40.3	24.1	46.9	-9.5	44.1	53.9	9.8	174	203	VBW:510 Hz

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(4.4 m / 3.0 m) = 3.3 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.5 dB

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5745.000	PK	89.1	32.7	15.8	38.8	3.3	102.1	-	-	Carrier
Hori.	5715.000	PK	47.8	32.6	15.8	38.8	3.3	60.7	82.1	21.4	
Hori.	5725.000	PK	56.0	32.6	15.8	38.8	3.3	68.9	82.1	13.2	
Vert.	5745.000	PK	87.5	32.7	15.8	38.8	3.3	100.5	-	-	Carrier
Vert.	5715.000	PK	45.4	32.6	15.8	38.8	3.3	58.3	80.5	22.2	
Vert.	5725.000	PK	53.1	32.6	15.8	38.8	3.3	66.0	80.5	14.5	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(4.4 m / 3.0 m) = 3.3 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11196085S-R2
Date	May 13, 2016
Temperature / Humidity	24 deg.C / 42 %RH
Engineer	Yosuke Ishikawa
Mode	Tx 11a 5745 GHz

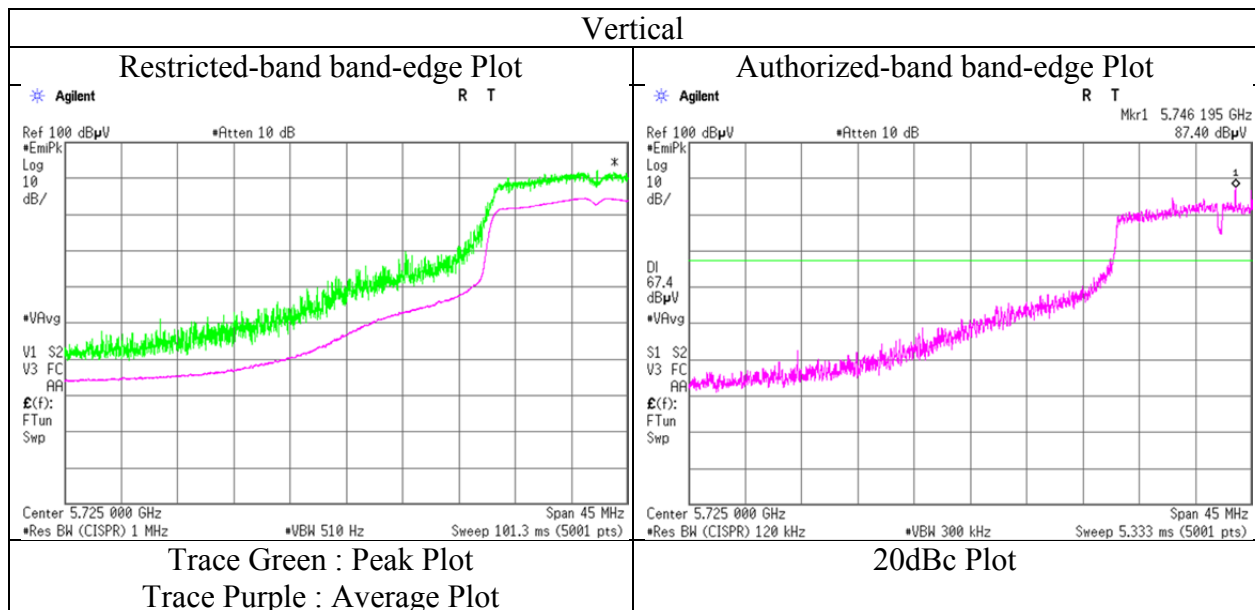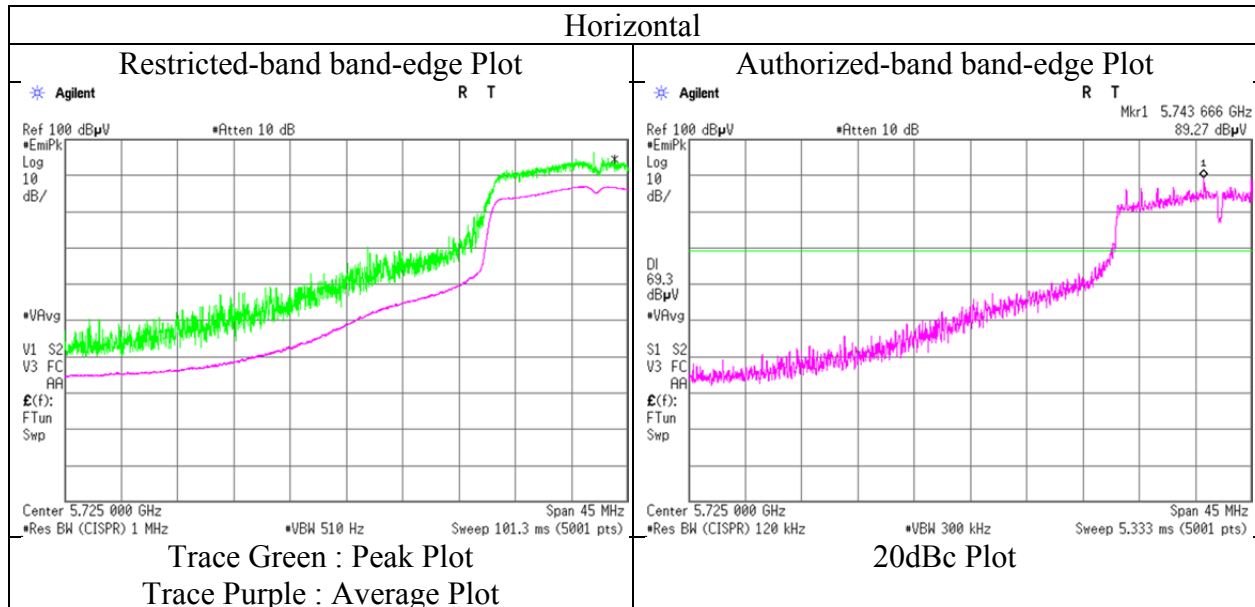

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place Shonan EMC Lab.  
Report No. 11196085S-R2  
Semi 3 3 3 1 2  
Anechoic  
Chamber No  
Date May 13, 2016 May 14, 2016 May 15, 2016 May 16, 2016 May 17, 2016  
Temperature 24 deg.C / 42 %RH 24 deg.C / 54 %RH 24 deg.C / 52 %RH 23 deg.C / 49 %RH 23 deg.C / 55 %RH  
/ Humidity  
Engineer Yosuke Ishikawa Hiroyuki Morikawa Kazutaka Takeyama Kazutaka Takeyama Takahiro Suzuki  
Mode (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz -26.5 GHz) (26.5 GHz - 40 GHz)  
Tx 11a 5785 GHz

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	11570.000	PK	48.2	39.9	8.5	38.9	3.3	61.0	73.9	12.9	333	220	
Hori.	17355.000	PK	51.0	42.4	11.5	39.2	-9.5	56.2	73.9	17.7	142	215	
Hori.	23140.000	PK	51.7	40.3	24.2	46.7	-9.5	60.0	73.9	13.9	162	200	
Hori.	11570.000	AV	36.9	39.9	8.5	38.9	3.3	49.7	53.9	4.2	333	220	VBW:510 Hz
Hori.	17355.000	AV	39.1	42.4	11.5	39.2	-9.5	44.3	53.9	9.6	142	215	VBW:510 Hz
Hori.	23140.000	AV	32.5	40.3	24.2	46.7	-9.5	40.8	53.9	13.1	162	200	VBW:510 Hz
Vert.	11570.000	PK	44.5	39.9	8.5	38.9	3.3	57.3	73.9	16.6	150	0	
Vert.	17355.000	PK	48.5	42.4	11.5	39.2	-9.5	53.7	73.9	20.2	150	255	
Vert.	23140.000	PK	47.0	40.3	24.2	46.7	-9.5	55.3	73.9	18.6	142	132	
Vert.	11570.000	AV	33.5	39.9	8.5	38.9	3.3	46.3	53.9	7.6	150	0	VBW:510 Hz
Vert.	17355.000	AV	36.0	42.4	11.5	39.2	-9.5	41.2	53.9	12.7	150	255	VBW:510 Hz
Vert.	23140.000	AV	30.6	40.3	24.2	46.7	-9.5	38.9	53.9	15.0	142	132	VBW:510 Hz

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz :  $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.3\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab.					
Report No.	11196085S-R2					
Semi Anechoic Chamber No	3	3	3	1	2	2
Date	May 13, 2016	May 14, 2016	May 15, 2016	May 16, 2016	May 17, 2016	May 18, 2016
Temperature / Humidity	24 deg.C / 42 %RH	24 deg.C / 54 %RH	24 deg.C / 52 %RH	23 deg.C / 49 %RH	23 deg.C / 55 %RH	23 deg.C / 50 %RH
Engineer	Yosuke Ishikawa	Hiroyuki Morikawa	Kazutaka Takeyama	Kazutaka Takeyama	Takahiro Suzuki	Takahiro Suzuki
	(1 GHz – 6.4 GHz)	(6.4 GHz – 13 GHz)	(13 GHz – 18 GHz)	(18 GHz – 26.5 GHz)	(26.5 GHz – 40 GHz)	(30 MHz - 1000 MHz)
Mode	Tx 11a 5825 GHz					

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	99.928	QP	46.3	10.1	8.0	31.9	0.0	32.5	43.5	11.0	311	264	
Hori.	133.133	QP	42.4	13.9	8.2	31.8	0.0	32.7	43.5	10.8	210	86	
Hori.	211.755	QP	28.0	16.7	9.1	31.8	0.0	22.0	43.5	21.5	153	251	
Hori.	511.334	QP	30.5	17.7	8.0	31.6	0.0	24.6	46.0	21.4	100	87	
Hori.	906.185	QP	33.6	22.1	9.9	30.8	0.0	34.8	46.0	11.2	100	358	
Hori.	11650.000	PK	47.7	39.9	8.5	39.0	3.3	60.4	73.9	13.5	385	217	
Hori.	17475.000	PK	49.4	42.8	11.5	39.1	-9.5	55.1	73.9	18.8	141	221	
Hori.	23300.000	PK	49.6	40.2	24.2	46.6	-9.5	57.9	73.9	16.0	168	231	
Hori.	11650.000	AV	36.1	39.9	8.5	39.0	3.3	48.8	53.9	5.1	385	217	VBW:510 Hz
Hori.	17475.000	AV	37.3	42.8	11.5	39.1	-9.5	43.0	53.9	10.9	141	221	VBW:510 Hz
Hori.	23300.000	AV	30.6	40.2	24.2	46.6	-9.5	38.9	53.9	15.0	168	231	VBW:510 Hz
Vert.	41.705	QP	37.2	13.8	7.1	31.9	0.0	26.2	40.0	13.8	100	359	
Vert.	290.574	QP	31.1	19.1	9.7	31.7	0.0	28.2	46.0	17.8	100	359	
Vert.	415.388	QP	28.5	16.5	7.4	31.6	0.0	20.8	46.0	25.2	100	356	
Vert.	531.731	QP	34.7	18.0	8.1	31.6	0.0	29.2	46.0	16.8	100	329	
Vert.	762.265	QP	31.1	20.7	9.2	31.4	0.0	29.6	46.0	16.4	100	12	
Vert.	11650.000	PK	45.4	39.9	8.5	39.0	3.3	58.1	73.9	15.8	150	0	
Vert.	17475.000	PK	45.5	42.8	11.5	39.1	-9.5	51.2	73.9	22.7	140	231	
Vert.	23300.000	PK	46.5	40.2	24.2	46.6	-9.5	54.8	73.9	19.1	160	98	
Vert.	11650.000	AV	33.8	39.9	8.5	39.0	3.3	46.5	53.9	7.4	150	0	VBW:510 Hz
Vert.	17475.000	AV	33.0	42.8	11.5	39.1	-9.5	38.7	53.9	15.2	140	231	VBW:510 Hz
Vert.	23300.000	AV	29.9	40.2	24.2	46.6	-9.5	38.2	53.9	15.7	160	98	VBW:510 Hz

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(4.4 m / 3.0 m) = 3.3 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.5 dB

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5825.000	PK	88.8	32.8	15.8	38.8	3.3	101.9	-	-	Carrier
Hori.	5850.000	PK	46.3	32.9	15.8	38.8	3.3	59.5	82.0	22.5	
Hori.	5860.000	PK	41.4	32.9	15.8	38.8	3.3	54.6	82.0	27.4	
Vert.	5825.000	PK	86.0	32.8	15.8	38.8	3.3	99.1	-	-	Carrier
Vert.	5850.000	PK	48.5	32.9	15.8	38.8	3.3	61.7	79.2	17.5	
Vert.	5860.000	PK	41.7	32.9	15.8	38.8	3.3	54.9	79.2	24.3	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(4.4 m / 3.0 m) = 3.3 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN



Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



### Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11196085S-R2
Date	May 13, 2016
Temperature / Humidity	24 deg.C / 42 %RH
Engineer	Yosuke Ishikawa
Mode	Tx 11a 5825 GHz

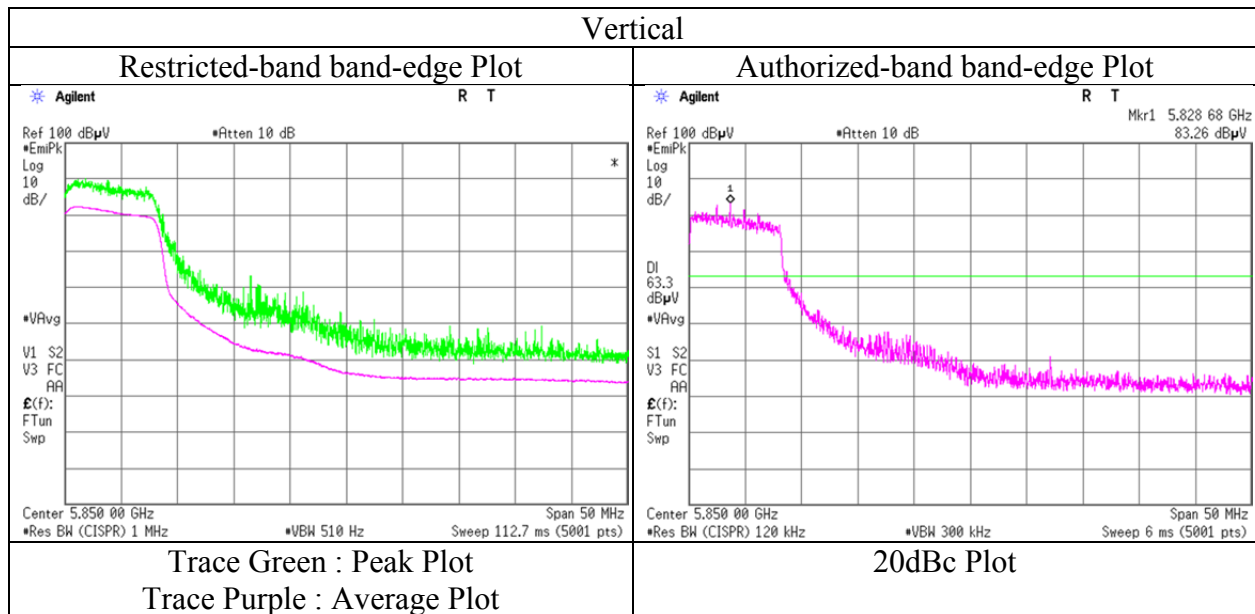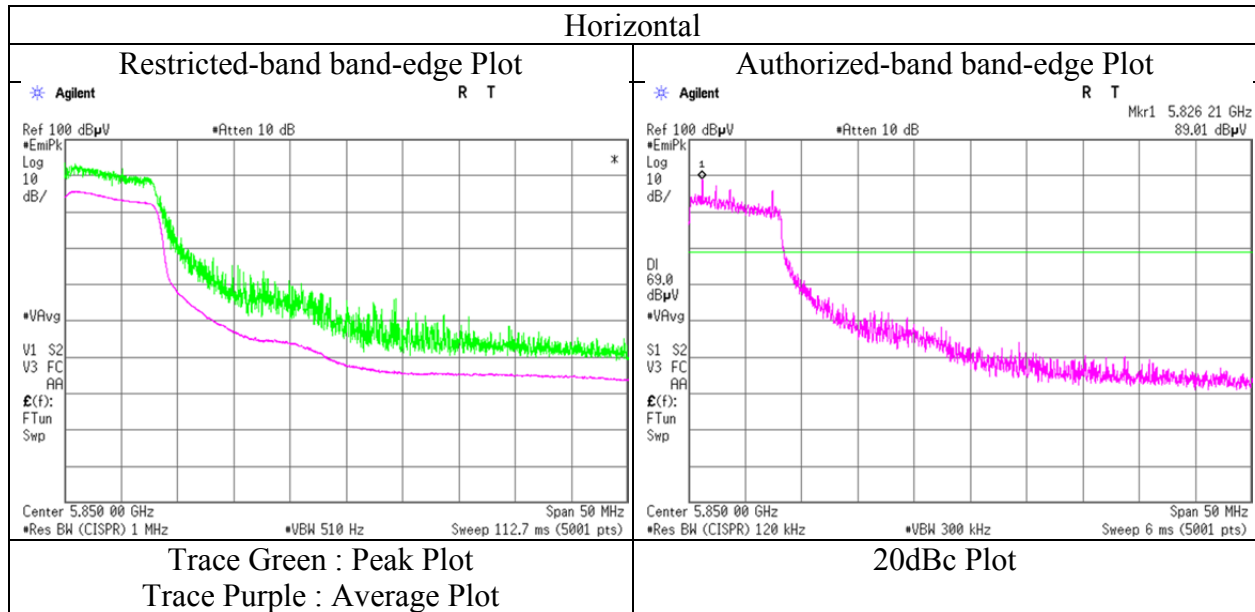

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place Shonan EMC Lab.  
Report No. 11196085S-R2  
Semi 3 3 3 1 2  
Anechoic Chamber No  
Date May 13, 2016 May 14, 2016 May 15, 2016 May 16, 2016 May 17, 2016  
Temperature / Humidity 24 deg.C / 42 %RH 24 deg.C / 54 %RH 24 deg.C / 52 %RH 23 deg.C / 49 %RH 23 deg.C / 55 %RH  
Engineer Yosuke Ishikawa Hiroyuki Morikawa Kazutaka Takeyama Kazutaka Takeyama Takahiro Suzuki  
Mode (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz -26.5 GHz) (26.5 GHz - 40 GHz)  
Tx 11n-40 5755 GHz

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	11510.000	PK	44.5	40.0	8.5	38.8	3.3	57.5	73.9	16.4	150	0	
Hori.	17265.000	PK	48.5	42.1	11.4	39.3	-9.5	53.2	73.9	20.7	144	217	
Hori.	23020.000	PK	43.5	40.3	24.1	46.8	-9.5	51.6	73.9	22.3	182	318	
Hori.	11510.000	AV	33.6	40.0	8.5	38.8	3.3	46.6	53.9	7.3	150	0	VBW:1.1 kHz
Hori.	17265.000	AV	36.0	42.1	11.4	39.3	-9.5	40.7	53.9	13.2	144	217	VBW:1.1 kHz
Hori.	23020.000	AV	33.3	40.3	24.1	46.8	-9.5	41.4	53.9	12.5	182	318	VBW:1.1 kHz
Vert.	11510.000	PK	44.9	40.0	8.5	38.8	3.3	57.9	73.9	16.0	150	0	
Vert.	17265.000	PK	45.7	42.1	11.4	39.3	-9.5	50.4	73.9	23.5	150	0	
Vert.	23020.000	PK	42.8	40.3	24.1	46.8	-9.5	50.9	73.9	23.0	135	203	
Vert.	11510.000	AV	33.5	40.0	8.5	38.8	3.3	46.5	53.9	7.4	150	0	VBW:1.1 kHz
Vert.	17265.000	AV	33.2	42.1	11.4	39.3	-9.5	37.9	53.9	16.0	150	0	VBW:1.1 kHz
Vert.	23020.000	AV	31.6	40.3	24.1	46.8	-9.5	39.7	53.9	14.2	135	203	VBW:1.1 kHz

Result = Reading + Ant. Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(4.4 m / 3.0 m) = 3.3 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.5 dB

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5755.000	PK	82.6	32.7	15.8	38.8	3.3	95.6	-	-	Carrier
Hori.	5715.000	PK	43.4	32.6	15.8	38.8	3.3	56.3	75.7	19.4	
Hori.	5725.000	PK	47.0	32.6	15.8	38.8	3.3	59.9	75.7	15.8	
Vert.	5755.000	PK	80.7	32.7	15.8	38.8	3.3	93.7	-	-	Carrier
Vert.	5715.000	PK	41.0	32.6	15.8	38.8	3.3	53.9	73.7	19.8	
Vert.	5725.000	PK	43.4	32.6	15.8	38.8	3.3	56.3	73.7	17.4	

Result = Reading + Ant. Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(4.4 m / 3.0 m) = 3.3 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11196085S-R2
Date	May 13, 2016
Temperature / Humidity	24 deg.C / 42 %RH
Engineer	Yosuke Ishikawa
Mode	Tx 11n-40 5755 GHz

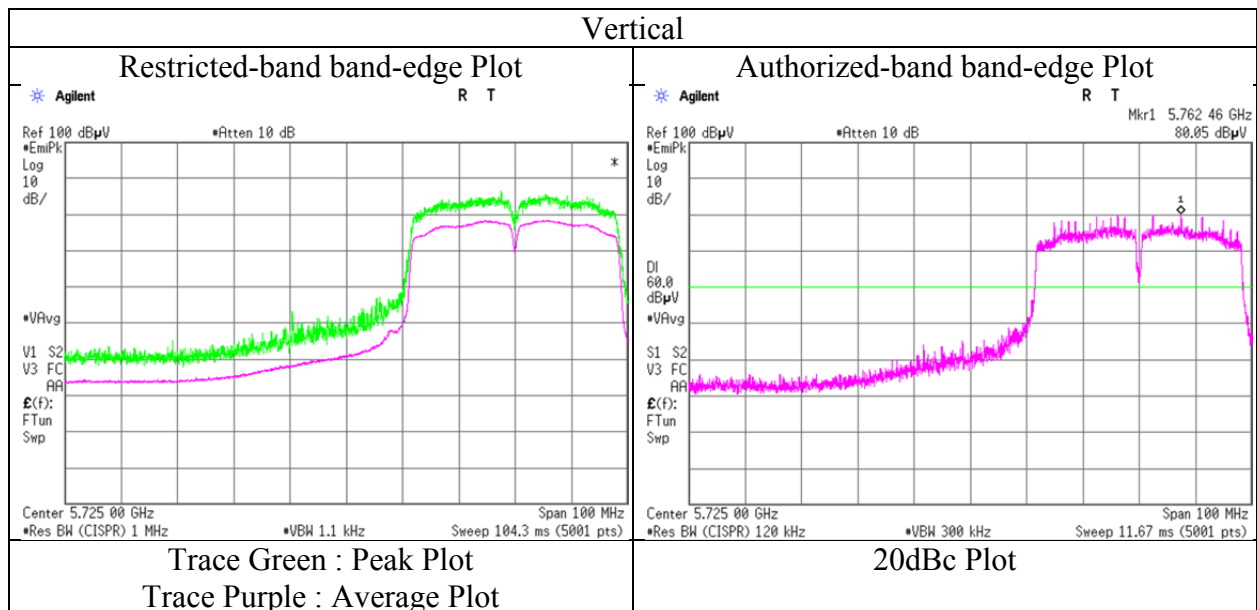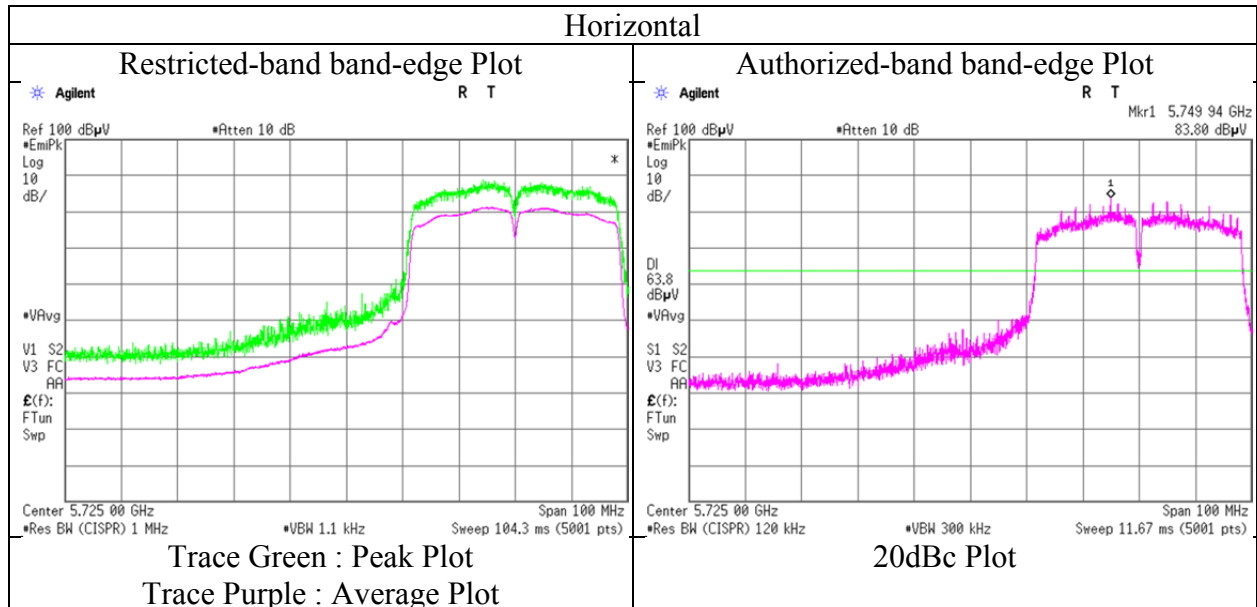

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place           Shonan EMC Lab.  
Report No.           11196085S-R2  
Semi Anechoic Chamber No   3                           3                           3                           1                           2  
Date                 May 13, 2016           May 14, 2016           May 15, 2016           May 16, 2016           May 17, 2016  
Temperature / Humidity   24 deg.C / 42 %RH   24 deg.C / 54 %RH   24 deg.C / 52 %RH   23 deg.C / 49 %RH   23 deg.C / 55 %RH  
Engineer            Yosuke Ishikawa       Hiroyuki Morikawa       Kazutaka Takeyama       Kazutaka Takeyama       Takahiro Suzuki  
                          (1 GHz - 6.4 GHz)     (6.4 GHz – 13 GHz)       (13 GHz – 18 GHz)       (18 GHz – 26.5 GHz)       (26.5 GHz – 40 GHz)  
Mode                Tx 11n-40   5795 GHz

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	11590.000	PK	45.1	39.9	8.5	38.9	3.3	57.9	73.9	16.0	150	0	
Hori.	17385.000	PK	46.6	42.5	11.5	39.2	-9.5	51.9	73.9	22.0	141	221	
Hori.	23180.000	PK	42.7	40.3	24.2	46.7	-9.5	51.0	73.9	22.9	164	305	
Hori.	11590.000	AV	33.9	39.9	8.5	38.9	3.3	46.7	53.9	7.2	150	0	VBW:1.1 kHz
Hori.	17385.000	AV	35.0	42.5	11.5	39.2	-9.5	40.3	53.9	13.6	141	221	VBW:1.1 kHz
Hori.	23180.000	AV	30.9	40.3	24.2	46.7	-9.5	39.2	53.9	14.7	164	305	VBW:1.1 kHz
Vert.	11590.000	PK	45.8	39.9	8.5	38.9	3.3	58.6	73.9	15.3	150	0	
Vert.	17385.000	PK	44.4	42.5	11.5	39.2	-9.5	49.7	73.9	24.2	150	0	
Vert.	23180.000	PK	41.6	40.3	24.2	46.7	-9.5	49.9	73.9	24.0	134	215	
Vert.	11590.000	AV	34.1	39.9	8.5	38.9	3.3	46.9	53.9	7.0	150	0	VBW:1.1 kHz
Vert.	17385.000	AV	33.3	42.5	11.5	39.2	-9.5	38.6	53.9	15.3	150	0	VBW:1.1 kHz
Vert.	23180.000	AV	30.5	40.3	24.2	46.7	-9.5	38.8	53.9	15.1	134	215	VBW:1.1 kHz

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(4.4 m / 3.0 m) = 3.3 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.5 dB

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5795.000	PK	82.5	32.8	15.8	38.8	3.3	95.6	-	-	Carrier
Hori.	5850.000	PK	41.9	32.9	15.8	38.8	3.3	55.1	75.6	20.5	
Hori.	5860.000	PK	39.5	32.9	15.8	38.8	3.3	52.7	75.6	22.9	
Vert.	5795.000	PK	81.1	32.8	15.8	38.8	3.3	94.2	-	-	Carrier
Vert.	5850.000	PK	42.7	32.9	15.8	38.8	3.3	55.9	74.2	18.3	
Vert.	5860.000	PK	38.1	32.9	15.8	38.8	3.3	51.3	74.2	22.9	



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(4.4 m / 3.0 m) = 3.3 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.5 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11196085S-R2
Date	May 13, 2016
Temperature / Humidity	24 deg.C / 42 %RH
Engineer	Yosuke Ishikawa
Mode	Tx 11n-40 5795 GHz

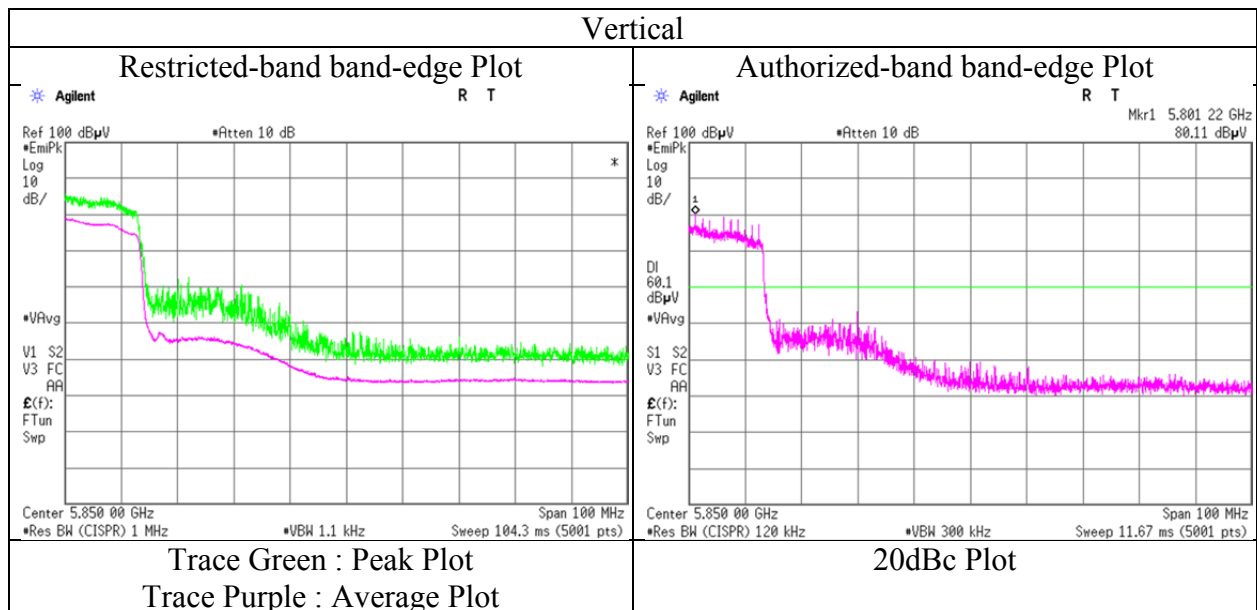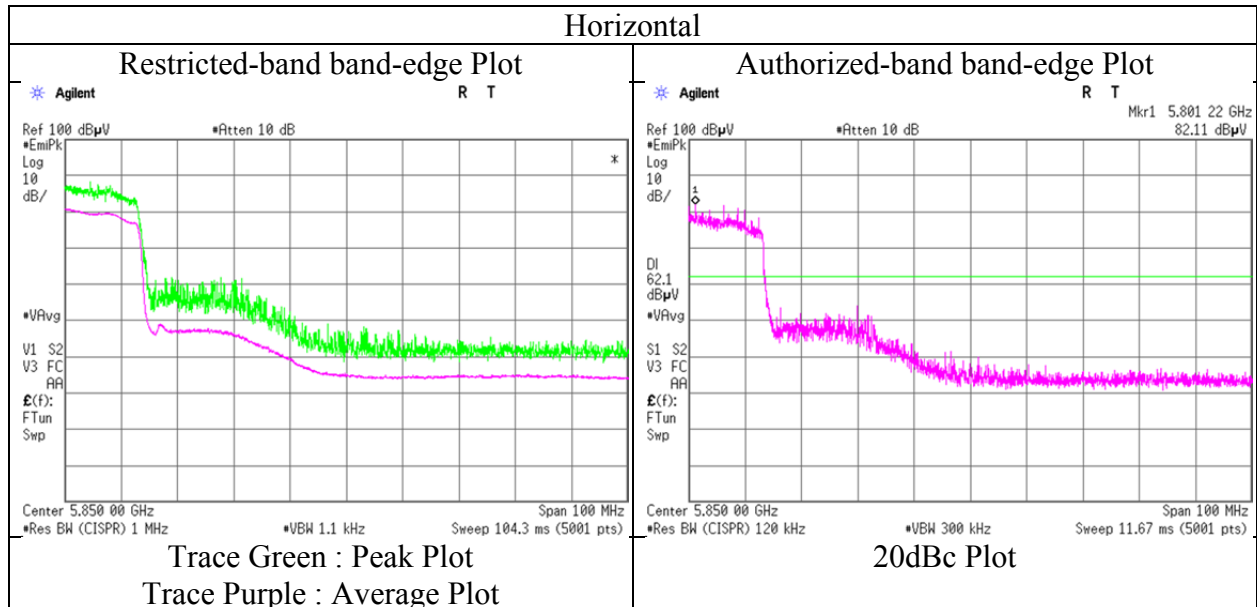

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Plot data, Worst case)**


Test place	Shonan EMC Lab.					
Report No.	11196085S-R2					
Semi Anechoic Chamber No	3	3	3	1	2	2
Date	May 13, 2016	May 14, 2016	May 15, 2016	May 16, 2016	May 17, 2016	May 18, 2016
Temperature / Humidity	24 deg.C / 42 %RH	24 deg.C / 54 %RH	24 deg.C / 52 %RH	23 deg.C / 49 %RH	23 deg.C / 55 %RH	23 deg.C / 50 %RH
Engineer	Yosuke Ishikawa	Hiroyuki Morikawa	Kazutaka Takeyama	Kazutaka Takeyama	Takahiro Suzuki	Takahiro Suzuki
Mode	Tx 11a 5825 GHz					

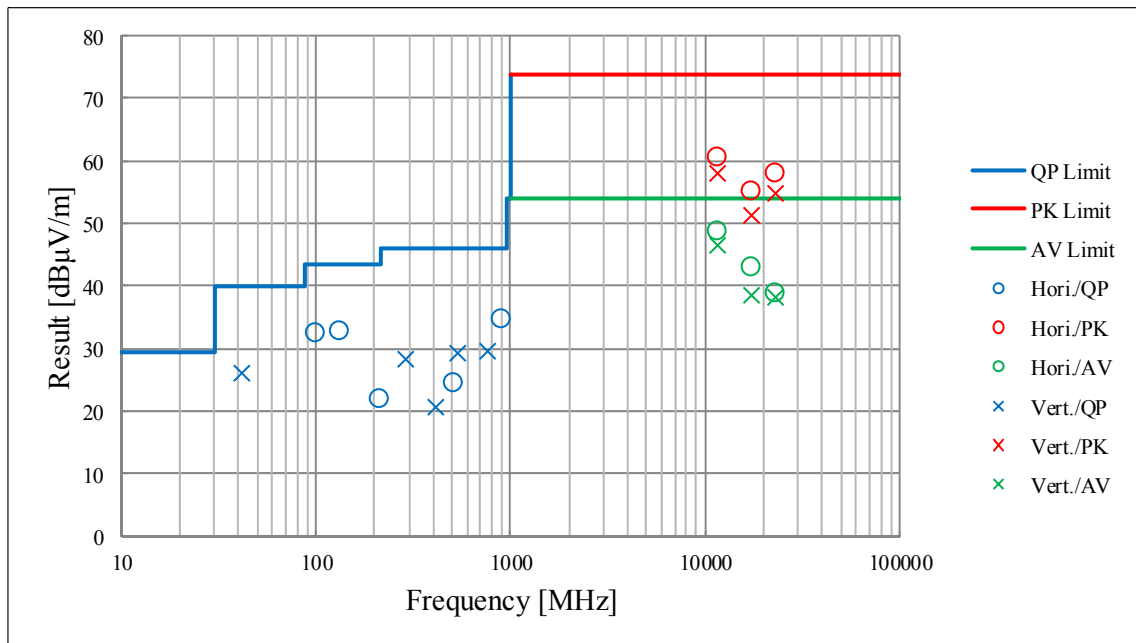

\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

### Conducted Spurious Emission

Test place : Shonan EMC Lab. No.5 Shielded Room  
Report No. : 11196085S-R2  
Date : May 13, 2016  
Temperature / Humidity : 25deg. C / 52 % RH  
Engineer : Shinichi Takano  
Mode : Tx 11a 5825 MHz

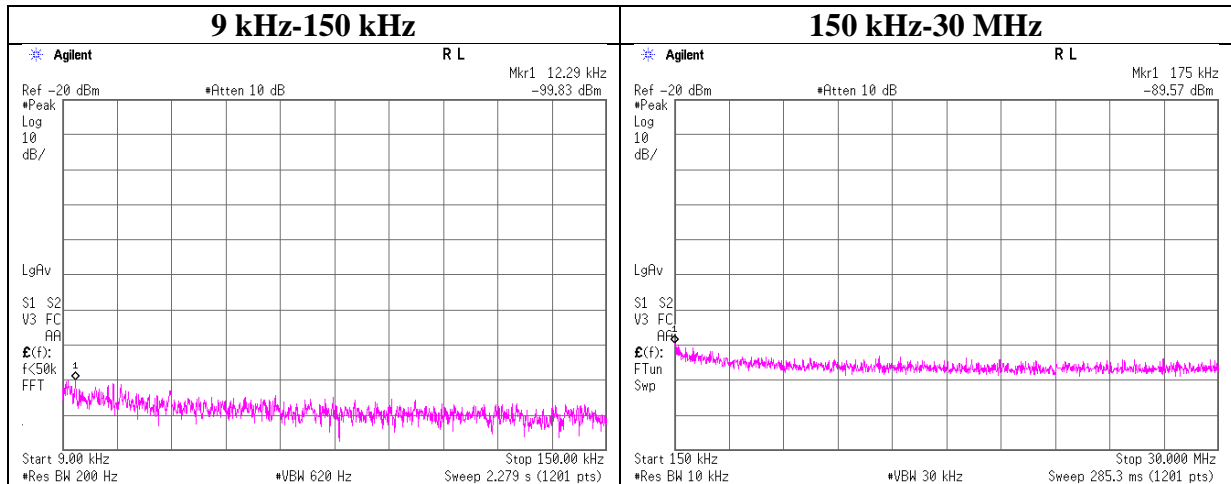

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
12.29	-99.8	0.01	20.2	2.6	2	-74.1	300	6.0	-12.9	45.8	58.7	
175.00	-89.6	0.02	20.2	2.6	2	-63.8	300	6.0	-2.6	22.7	25.3	

$E = \text{EIRP} - 20 \cdot \log(D) + \text{Ground bounce} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP} = \text{Reading} + \text{Cable Loss} + \text{Attenuator} + \text{Antenna Gain} + 10 \cdot \log(N)$

## APPENDIX 2: Test instruments

### Test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
SCC-G12	Coaxial Cable	Suhner	SUCOFLEX 102	30790/2	AT	2016/03/23 * 12
SCC-H11	Microwave cable	RS Pro	R-132G7210 100CO	-	AT	2016/04/18 * 12
SCC-H12	Microwave cable	RS Pro	R-132G7210 100CO	-	AT	2016/04/18 * 12
SPM-07	Power Meter	Agilent	8990B	MY5100272	AT	2016/04/04 * 12
SPSS-04	Power sensor	Agilent	N1923A	MY5326009	AT	2016/04/04 * 12
SAT20-07	Attenuator	Weinschel Corp.	54A-20	31484	AT	2016/04/18 * 12
SRENT-05	Spectrum Analyzer	KEYSIGHT	E4440A	MY46187752	AT	2015/10/05 * 12
SOS-13	Humidity Indicator	Custom	CTH-202	Q.C.17	AT	2015/12/07 * 12
STM-G5	Terminator	Weinschel	M1459A	U6594	AT	2015/07/14 * 12
SSA-03	Spectrum Analyzer	Agilent	E4448A	MY48250152	AT	2015/09/16 * 12
SOS-09	Humidity Indicator	A&D	AD-5681	4061484	AT	2015/12/07 * 12
SAEC-01(NSA)	Semi-Anechoic Chamber	TDK	SAEC-01(NSA)	1	RE	2015/07/13 * 12
SAF-08	Pre Amplifier	TOYO Corporation	HAP18-26W	00000019	RE	2016/03/23 * 12
SCC-G15	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	RE	2016/03/08 * 12
SCC-G33	Coaxial Cable	Junkosha	MWX241-01000KMSKMS	-	RE	2016/04/18 * 12
SHA-04	Horn Antenna	ETS LINDGREN	3160-09	LM3640	RE	2016/03/15 * 12
SOS-01	Humidity Indicator	A&D	AD-5681	4062555	RE	2015/10/22 * 12
STR-01	Test Receiver	Rohde & Schwarz	ESU40	100093	RE	2015/11/06 * 12
SJM-02	Measure	KOMELON	KMC-36	-	RE	-
COTS-SEMI-1	EMI Software	TSJ	TEPTO-DV(RE,CE,RFI,MF)	-	RE	-
STS-01	Digital Hitester	Hioki	3805-50	080997812	RE	2015/11/18 * 12
SHA-06	Horn Antenna	ETS LINDGREN	3160-10	LM3459	RE	2016/03/24 * 12
SAF-10	Pre Amplifier	TOYO Corporation	HAP26-40W	00000010	RE	2016/03/23 * 12
SCC-G19	Coaxial Cable	Suhner	SUCOFLEX 102A	1188/2A	RE	2016/03/08 * 12
SCC-G33	Coaxial Cable	Junkosha	MWX241-01000KMSKMS	-	RE	2016/04/18 * 12
SSA-02	Spectrum Analyzer	Agilent	E4448A	MY48250106	RE	2016/03/23 * 12
SAEC-02(NSA)	Semi-Anechoic Chamber	TDK	SAEC-02(NSA)	2	RE	2015/07/15 * 12
SOS-03	Humidity Indicator	A&D	AD-5681	4063325	RE	2015/10/22 * 12
SCC-B12/B13/S RSE-02	Coaxial Cable&RF Selector	Suhner/Suhner/TOYO	RG223U/141PE/NS4906	-/0901-270(RF Selector)	CE	2016/04/22 * 12
SLS-03	LISN	Rohde & Schwarz	ENV216	100513	CE	2016/02/08 * 12
SAT3-06	Attenuator	JFW	50HF-003N	-	RE	2016/02/25 * 12
SOS-04	Humidity Indicator	A&D	AD-5681	4061512	RE	2015/12/07 * 12
STR-07	Test Receiver	Rohde & Schwarz	ESU26	100484	CE, RE	2015/09/04 * 12
SJM-09	Measure	PROMART	SEN1935	-	CE, RE	-
COTS-SEMI-1	EMI Software	TSJ	TEPTO-DV(RE,CE,RFI,MF)	-	CE, RE	-
STS-02	Digital Hitester	Hioki	3805-50	080997819	CE, RE	2016/03/22 * 12
SAF-02	Pre Amplifier	SONOMA	310N	290212	RE	2016/02/19 * 12
SAT6-02	Attenuator	JFW	50HF-006N	-	RE	2016/02/25 * 12
KAT3-11	Attenuator	JFW IND. INC.	50HF-003N	-	RE	2015/08/31 * 12
SBA-02	Biconical Antenna	Schwarzbeck	BBA9106	91032665	RE	2015/11/02 * 12
SCC-B1/B3/B5/ B7/B8/B13/SRS E-02	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/NS4906	-/0901-270(RF Selector)	RE	2016/04/22 * 12
SCC-B2/B4/B6/ B7/B8/B13/SRS E-02	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/NS4906	-/0901-270(RF Selector)	RE	2016/04/22 * 12
SLA-02	Logperiodic Antenna	Schwarzbeck	UHALP9108A	UHALP 9108-A 0893	RE	2015/11/03 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: CE: Conducted Emission, RE: Radiated Emission, AT: Antenna Terminal Conducted test

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401