

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REOUIREMENT **AND INDUSTRY CANADA RSS 210 CLASS II PC REPORT**

OF

Product Name of Host:	Tablet Computer
Brand Name of Host:	acer
Model No. of Host:	РОКСС
Marketing Name of Host:	SW3-013
Product Name of Module:	802.11abgn+BT4.0 module
Brand Name of Module:	FOXCONN
Model No. of Module:	T77H462
Model Difference:	N/A
FCC ID:	MCLT77H462
IC:	2878D-T77H462
Report No.:	E2/2015/10015
Issue Date:	Mar. 04, 2015
FCC Rule Part:	§15.247, Cat: DSS
IC Rule Part:	RSS-210 issue 8 :2010, Annex 8
	HON HAI PRECISION IND. CO., LTD
Prepared for:	5F-1, 5 Hsin-An Road, Hsinchu Science-Based
	Industrial Park, Taiwan, R.O.C.
	SGS Taiwan Ltd.
Prepared by:	Electronics & Communication Laboratory
	No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333
Solution Contraction	
(TAF)	<i>Note: This report shall not be reproduced except in full, with-</i> <i>out the written approval of SGS Taiwan Ltd. This document</i>
IIac-MRA	may be altered or revised by SGS Taiwan Ltd. personnel only,
Testing Laboratory 0513	and shall be noted in the revision section of the document.



Report No.: E2/2015/10015 Issue Date: Mar. 04, 2015 Page: 2 of 34

VERIFICATION OF COMPLIANCE

Applicant:	HON HAI PRECISION IND. CO., LTD 5F-1, 5 Hsin-An Road, Hsinchu Science-Based Industrial Park, Taiwan,
Product Name of Host: Brand Name of Host:	R.O.C. Tablet Computer
Model No. of Host: Marketing Name of Host:	P0KCC SW3-013
Product Name of Module:	
Brand Name of Module:	FOXCONN
Model No. of Module: Model Difference:	T77H462
FCC ID:	N/A MCLT77H462
IC: File Number:	2878D-T77H462 E2/2015/10015
Date of test: Date of EUT Received:	Jan. 15, 2015 ~ Mar. 03, 2015 Jan. 15, 2015

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and RSS-Gen. issue 3 the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247 and IC RSS 210 issue 8: 2010 Annex 8.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date:	Mar. 04, 2015
Prepared By:	Jazz Huang / Sr. Engineer Tiffany Kao	Date:	Mar. 04, 2015
Approved By:	Tiffany Kao / Clerk Jim Chang	Date:	Mar. 04, 2015
therwise stated the results show	Jim Chang / Asst. Manager	nole(s) are retained for 90 d	avs only



Version

Version No.	Date	Description
00	Mar. 04, 2015	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Table of Contents

1.	GEN	ERAL INFORMATION	5
	1.1.	Product description	5
	1.2.	Related Submittal(s) / Grant (s)	6
	1.3.	Test Methodology	6
	1.4.	Test Facility	6
	1.5.	Special Accessories	6
	1.6.	Equipment Modifications	6
2.	SYST	TEM TEST CONFIGURATION	7
	2.1.	EUT Configuration	7
	2.2.	EUT Exercise	7
	2.3.	Test Procedure	7
	2.4.	Configuration of Tested System	8
3.	SUM	MARY OF TEST RESULTS	8
4.	DES	CRIPTION OF TEST MODES	9
5.	MEA	SUREMENT UNCERTAINTY	10
6.	PEA	K OUTPUT POWER MEASUREMENT	11
	6.1.	Standard Applicable	11
	6.2.	Measurement Equipment Used	11
	6.3.	Test Set-up:	12
	6.4.	Measurement Procedure:	12
	6.5.	Measurement Result	13
7.	SPUI	RIOUS RADIATED EMISSION TEST	19
	7.1.	Standard Applicable	19
	7.2.	Measurement Equipment Used:	20
	7.3.	Test SET-UP:	21
	7.4.	Measurement Procedure:	22
	7.5.	Field Strength Calculation	23
	7.6.	Measurement Result:	23
8.	ANT	ENNA REQUIREMENT	34
	8.1.	Standard Applicable	34
	8.2.	Antenna Connected Construction	34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



1. **GENERAL INFORMATION**

1.1. Product description

Product Name:	Tablet Computer	
Brand Name:	acer	
Model No.:	РОКСС	
Marketing Name of Host:	SW3-013	
Hardware Version:	R1.1	
Software Version:	Win8.1	
Model No. for BT Module:	T77H462	
Module FCC ID:	MCLT77H462	
Module IC:	2878D-T77H462	
Scope:	The test report covers the radiated emissions requirements of the standards referenced in the report to allow system level approval of the module in this specific host.	
Class II Permissive	802.11abgn+BT4.0 module (T77H462) card INSTALLED IN AN	
change:	Tablet Computer	
Data Cable:	Model No.: N/A, Supplier: N/A	
	3.75Vdc form Rechargeable Li-ion Battery or 5.35Vdc from adapter	
Power Supply:	Battery: Model No.: AP15A3R, Supplier: SANYO	
	Adapter:1.Model No.:PA-1100-25, Supplier: LITEON2.Model No.: ADP-10HW A, Supplier: DELTA	

Bluetooth:

Bluetooth Version	Bluetooth V4.0 dual mode +HS
Frequency Range	2402 – 2480MHz
Channel number	79 channels max.
Rated Power	4.86dBm (Peak)
Modulation type	GFSK + /4DQPSK + 8DPSK
Antenna Designation:	PIFA Antenna; Gain: 1.16dBi (Aux)
Type of Emission:	1M24F1D

The EUT is compliance with Bluetooth V4.0+HS standard.

This test report applies for Bluetooth function.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-participant discussed the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>MCLT77H462</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and IC: <u>2878D-T77H462</u> filing to comply with Industry Canada RSS-210 issue 8: 2010 Annex 8.

1.3. Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters. Tested in accordance with FCC Public Notice DA 00-705 – Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333 which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. FCC Registration Number is: 990257. Canada Registration Number: 4620A-4.

1.5. Special Accessories

There is no special accessory used while test was conducted.

1.6. Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 8 and 13 and of ANSI C63.4:2009 and DA 00-705.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



2.4. Configuration of Tested System

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration



Remote Side



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	Bluetooth Test Set	Anritsu	MT8852B	6k00006107	N/A	N/A

3. SUMMARY OF TEST RESULTS

FCC/IC Rules	Description Of Test	Result
§15.247(b)(1) RSS-210 issue 8,§A8.4(2)	Peak Output Power	Compliant
\$15.247(d) \$15.209(a) (f) RSS-Gen \$7.2.5 RSS-210 issue 8,\$A8.5	Spurious Emission	Compliant
§15.203, RSS- Gen issue §7.1.2	Antenna Requirement	Compliant



4. **DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel Low, Mid and High with highest rated data rate were chosen as worst case for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth Transmitter for channel Low, Mid and High the worst case E2 position was reported.

Channel Low: channel 1 at 2402MHz Channel Mid: channel 39 at 2441MHz Channel High: channel 78 at 2480MHz

In comparison with BR and EDR mode, emission carried out by EDR is chosen as the most representative measurement to perform measurement of radiated spurious emission pursuant to Part 15C of 2480MHz. Modulation, EDR, is selected to be performed for 100 kHz Bandwidth Band Edge, due to its characteristics of wider bandwidth.

Data type being used to conduct the measurement: DH1/DH3/DH5 (GFSK) with 1Mbps 2DH1/2DH3/2DH5 (/4 DQPSK) with 2Mbps 3DH1/3DH3/3DH5 (8DPSK) with 3Mbps

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



MEASUREMENT UNCERTAINTY 5.

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 1.55 dB
20dB Bandwidth & 99% Power Bandwidth	+/- 123.36 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB
Frequency Separation	+/- 123.36 Hz
Number of hopping frequency	+/- 123.36 Hz
Time of Occupancy	+/- 123.36 Hz
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC= +/- 1%, AC= +/- 0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
Maggungen ant un containty	180MHz -417MHz: +/- 3.19dB
Measurement uncertainty (Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
(i olulization : vertical)	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.



PEAK OUTPUT POWER MEASUREMENT 6.

6.1. Standard Applicable

According to \$15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: The Limit: 0.125 Watts.

According to RSS-210 issue 8,§A8.4(2), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, the maximum conducted output power shall not exceed 1 W. For all other frequency hopping systems, the maximum peak conducted output power shall not exceed 0.125 W.

6.2. Measurement Equipment Used

SGS Conducted Room									
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015				
Power Meter	Anritsu	ML2496A	1326001	06/21/2014	06/20/2015				
Power Sensor	Anritsu	MA2411B	1315048	06/21/2014	06/20/2015				
Power Sensor	Anritsu	MA2411B	1315049	06/21/2014	06/20/2015				
Coaxial Cable 30cm	WOKEN	00100A1F1A19 5C	RF01	12/19/2014	12/18/2015				
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015				
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015				
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015				
DC Power Supply	Agilent	E3640A	MY53140006	05/31/2014	05/30/2015				


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

時非另有説明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90.tto 為報告未經本公司書面許可,不可能份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



6.3. Test Set-up:



6.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 3. Record the max. reading.
- 4. Repeat above procedures until all default test channel is completed.

NOTE: cable loss as 5.4dB that offsets in the spectrum.



6.5. Measurement Result

BR mode (GFSK):

Frequency (MHz)	Reading Power (dBm)	Output Power (W)	Limit (W)	
2402.00	4.59	0.00288	0.125	
2441.00	4.86	0.00306	0.125	
2480.00	4.48	0.00281	0.125	

EDR mode (π /4DQPSK):


Frequency (MHz)	Reading Power (dBm)	Output Power (W)	Limit (W)
2402.00	3.69	0.00234	0.125
2441.00	3.96	0.00249	0.125
2480.00	3.26	0.00212	0.125

EDR mode (8DPSK):

Frequency (MHz)	Reading Power (dBm)	Output Power (W)	Limit (W)	
2402.00	4.32	0.00270	0.125	
2441.00	4.44	0.00278	0.125	
2480.00	3.65	0.00232	0.125	


*Note: offset 4.38dB. *Note: Refer to next page for plots.



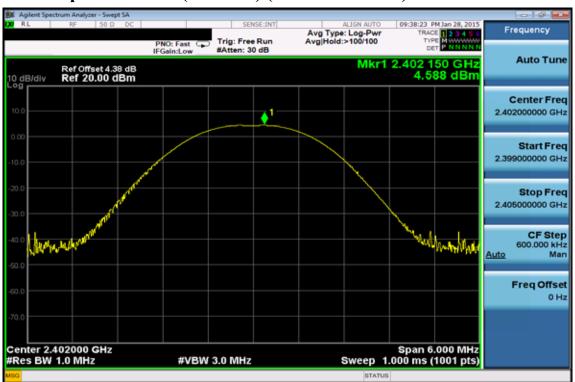

Peak Power Output Data Plot (CH Low) (BR mode GFSK)

Peak Power Output Data Plot (CH Mid) (BR mode GFSK)

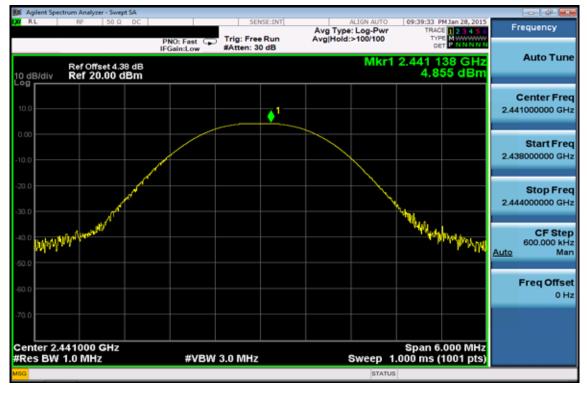

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Peak Power Output Data Plot (CH High) (BR mode GFSK)

Peak Power Output Data Plot (CH Low) (EDR mode $\pi/4DQPSK$)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless other was stated are results and the art report for the form of the state are results and the state are results are results and the state are results tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Peak Power Output Data Plot (CH Mid) (EDR mode $\pi/4DQPSK$)



Peak Power Output Data Plot (CH High) (EDR mode $\pi/4DQPSK$)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless other was stated are results and the art report for the form of the state are results and the state are results are results and the state are results tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Peak Power Output Data Plot (CH Low) (EDR mode 8DPSK)



Peak Power Output Data Plot (CH Mid) (EDR mode 8DPSK)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless other was stated are results and the art report for the form of the state are results and the state are results are results and the state are results tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Peak Power Output Data Plot (CH High) (EDR mode 8DPSK)

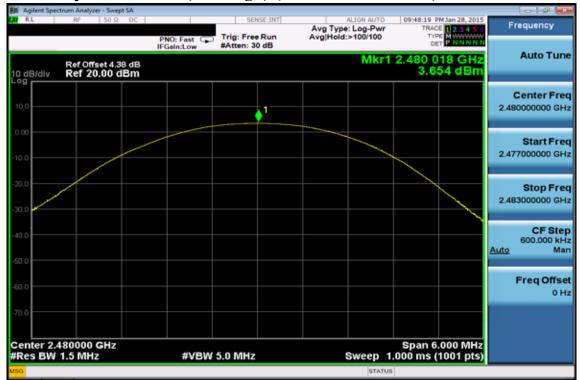

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



SPURIOUS RADIATED EMISSION TEST 7.

7.1. Standard Applicable

According to §15.247(d), Emission at antenna port:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Radiated Spurious Emission

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-Gen §7.2.5 and RSS-210 issue 8,§A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 5 and 6 is not required. In addition, radiated emissions which fall in the restricted bands of Table 3 must also comply with the radiated emission limits specified in Tables 5 and 6 of RSS-GEN.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.2. Measurement Equipment Used:

7.2.1. Radiated emission:

966 Chamber									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
EMI Test Receiver	R&S	ESU 40	100363	04/12/2014	04/11/2015				
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2014	12/08/2015				
Broadband Antenna	TESEQ	CBL 6112D	35240	12/05/2014	12/04/2015				
Horn Antenna	ETS-Lindgren	3117	00143272	12/08/2014	12/07/2015				
Horn Antenna	ETS-Lindgren	3160-09	00117911	11/13/2014	11/12/2015				
Horn Antenna	ETS-Lindgren	3160-10	00117783	11/13/2014	11/12/2015				
Pre Amplifier	EMC Instruments	EMC330	980096	12/19/2014	12/18/2015				
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/19/2014	12/18/2015				
Pre Amplifier	R&S	SCU-18	10204	12/19/2014	12/18/2015				
Pre Amplifier	R&S	SCU-26	100780	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/19/2014	12/18/2015				
Attenuator	WOKEN	218FS-10	RF27	12/19/2014	12/18/2015				
Site NSA	SGS	966 Chamber C	SAC-C	03/05/2014	03/05/2015				
Site VSWR	SGS	966 Chamber C	SAC-C	04/10/2014	04/09/2015				
DC Power Supply	HOLA	DP-3003	D7070035	05/31/2014	05/30/2015				
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.				
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.				
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.				
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.				


NOTE: N.C.R refers to Not Calibrated Required.




7.3. Test SET-UP:

7.3.1. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

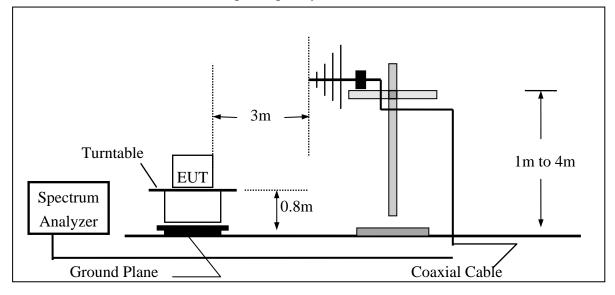

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

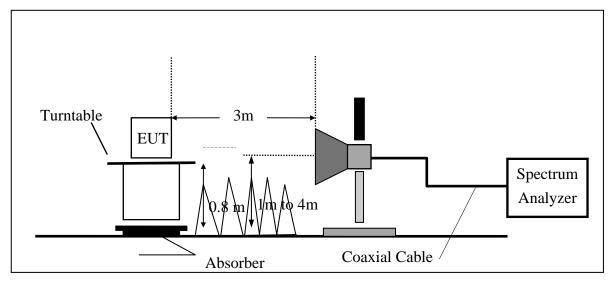

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



7.4. Measurement Procedure:

Radiated Emission:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency of the interest measured were complete.

Auxiliary Procedure (Setting on Spectrum to capture the reading of emission level):

Span = wide enough to fully capture the emission being measured RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz VBW \ge RBW Sweep = auto Detector function = peak Trace = max hold

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



7.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Remark:

- 1. The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)
- 2. Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) Pre Amplifier Gain(dB)

7.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Note: For the tabular table as presents below, "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. "E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



7.6.1 Radia Operation B Fundamenta Operation M EUT Pol.	and l Frequency	- Band Edg :BR :2402 MHz :Bandedge :E2 Plan	,	R mode) Hoppi Test Date Temp./Humi. Engineer Measurement A	C	:2015-02- :25.4 deg :Vito :VERTIC	_C / 57 RH
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	vel	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Peak	Е	42.78	6.36	49.14	74.00	-24.86
2390.00	Average	E	32.41	6.36	38.77	54.00	-15.23
Operation B Fundamenta Operation M EUT Pol.	l Frequency	:BR :2402 MHz :Bandedge :E2 Plan		Test Date Temp./Humi. Engineer Measurement A	antenna Pol.	:2015-02- :25.4 deg :Vito :HORIZC	_C / 57 RH
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	vel	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	$dB\mu V/m$	dB
2390.00	Peak	E	43.15	6.36	49.51	74.00	-24.49
2390.00	Average	Е	32.59	6.36	38.95	54.00	-15.05

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.



Report No.: E2/2015/10015 Issue Date: Mar. 04, 2015 Page: 25 of 34

Operation Ba Fundamenta Operation M EUT Pol.	l Frequency	:BR :2480 MHz :Bandedge H :E2 Plan	HIGH	Test Date Temp./Humi. Engineer Measurement A	ntenna Pol.	:2015-02- :25.4 deg :Vito :VERTIC	_C / 57 RH
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Le	vel	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Peak	Е	49.10	7.14	56.24	74.00	-17.76
2483.50	Average	Е	34.11	7.14	41.25	54.00	-12.75
Operation Ba Fundamenta Operation M EUT Pol.	l Frequency	:BR :2480 MHz :Bandedge H :E2 Plan	HIGH	Test Date Temp./Humi. Engineer Measurement A	antenna Pol.	:2015-02- :25.4 deg :Vito :HORIZO	_C / 57 RH
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Le	vel	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	$dB\mu V/m$	dB
2483.50	Peak	Е	49.98	7.14	57.11	74.00	-16.89
2483.50	Average	Е	33.78	7.14	40.92	54.00	-13.08

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.



Band Edge: (Worst: BR mode) Non-Hopping mOperation Band:BRFundamental Frequency:2402 MHzOperation Mode:Bandedge LOWEUT Pol.:E2 Plan			de Test Date Temp./Humi. Engineer Measurement An	tenna Pol.	:2015-02-24 :25.4 deg_C / 57 RH :Vito :VERTICAL		
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	vel	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Peak	Е	42.51	6.36	48.86	74.00	-25.14
2390.00	Average	Е	32.45	6.36	38.81	54.00	-15.19
Fundamental Frequency:2402 MHzTemOperation Mode:Bandedge LOWEngline		Test Date Temp./Humi. Engineer Measurement An	tenna Pol.	:2015-02- :25.4 deg :Vito :HORIZO	_C / 57 RH		
Freq.	Detector Mode	Note	Spectrum Reading Lev		Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Peak	Е	42.44	6.36	48.79	74.00	-25.21
2390.00	Average	Е	32.63	6.36	38.99	54.00	-15.01

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.



Report No.: E2/2015/10015 Issue Date: Mar. 04, 2015 Page: 27 of 34

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BR :2480 MHz :Bandedge H :E2 Plan	IGH	Test Date Temp./Humi. Engineer Measurement Ant	tenna Pol.	:2015-02- :25.4 deg :Vito :VERTICA	_C / 57 RH
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	vel	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Peak	Е	49.82	7.14	56.96	74.00	-17.04
2483.50	Average	Е	42.32	7.14	49.46	54.00	-4.54
Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BR :2480 MHz :Bandedge H :E2 Plan	IGH	Test Date Temp./Humi. Engineer Measurement Ant	tenna Pol.	:2015-02- :25.4 deg :Vito :HORIZO	_C / 57 RH
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	vel	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	$dB\mu V/m$	$dB\mu V/m$	dB
2483.50	Peak	Е	51.16	7.14	58.30	74.00	-15.70
2483.50	Average	Ε	43.62	7.14	50.76	54.00	-3.24

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.



7.6.2 Radiated Spurious Emission Measurement Result (worst case BR mode)

Operation Band	:BR	Test Date	:2015-02-24
Fundamental Frequency	:2402 MHz	Temp./Humi.	:25.4 deg_C / 57 RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector Mode	Note	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
			-	ID			15
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
35.82	Peak	S	52.41	-16.34	36.07	40.00	-3.93
40.67	Peak	S	51.02	-19.43	31.59	40.00	-8.41
71.71	Peak	S	57.25	-27.63	29.62	40.00	-10.38
96.93	Peak	S	51.74	-24.36	27.38	43.50	-16.12
155.13	Peak	S	47.84	-22.82	25.02	43.50	-18.48
238.55	Peak	S	45.57	-21.28	24.28	46.00	-21.72
4804.00	Peak	Н	40.56	0.23	40.79	74.00	-33.21
4804.00	Average	Н	31.62	0.23	31.85	54.00	-22.15
7206.00	Peak	Н	-				
9608.00	Peak	Н	-				
12010.00	Peak	Н	-				
14412.00	Peak	Н	-				
16814.00	Peak	Н	-				
19216.00	Peak	Н	-				
21618.00	Peak	Н	-				
24020.00	Peak	Н	-				



Report No.: E2/2015/10015 Issue Date: Mar. 04, 2015 Page: 29 of 34

R Test D	Date	:2015-02-24
02 MHz Temp.	/Humi.	:25.4 deg_C / 57 RH
K LOW Engin	eer	:Vito
Plane Measu	rement Antenna Pol.	:HORIZONTAL
C	2 MHz Temp. LOW Engine	2 MHz Temp./Humi. LOW Engineer

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
71.71	Peak	S	55.81	-27.63	28.19	40.00	-11.81
96.93	Peak	S	45.08	-24.36	20.71	43.50	-22.79
159.01	Peak	S	49.21	-23.10	26.12	43.50	-17.38
193.93	Peak	S	49.12	-23.82	25.30	43.50	-18.20
224.97	Peak	S	52.90	-22.67	30.23	46.00	-15.77
838.01	Peak	S	39.88	-9.05	30.83	46.00	-15.17
4804.00	Peak	Н	43.33	0.23	43.56	74.00	-30.44
4804.00	Average	Н	36.58	0.23	36.81	54.00	-17.19
7206.00	Peak	Н	-				
9608.00	Peak	Н	-				
12010.00	Peak	Н	-				
14412.00	Peak	Н	-				
16814.00	Peak	Н	-				
19216.00	Peak	Н	-				
21618.00	Peak	Н	-				
24020.00	Peak	Н	-				



Report No.: E2/2015/10015 Issue Date: Mar. 04, 2015 Page: 30 of 34

Operation Band	:BR	Test Date	:2015-02-24
Fundamental Frequency	:2441 MHz	Temp./Humi.	:25.4 deg_C / 57 RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
40.67	Peak	S	51.20	-19.43	31.76	40.00	-8.24
71.71	Peak	S	57.29	-27.63	29.66	40.00	-10.34
96.93	Peak	S	56.53	-24.36	32.17	43.50	-11.33
155.13	Peak	S	48.68	-22.82	25.86	43.50	-17.64
222.06	Peak	S	46.84	-22.86	23.98	46.00	-22.02
788.54	Peak	S	40.04	-9.87	30.17	46.00	-15.83
4882.00	Peak	Н	40.46	0.06	40.51	74.00	-33.49
4882.00	Average	Н	32.81	0.06	32.87	54.00	-21.13
7323.00	Peak	Н	-				
9764.00	Peak	Н	-				
12205.00	Peak	Н	-				
14646.00	Peak	Н	-				
17087.00	Peak	Н	-				
19528.00	Peak	Н	-				
21969.00	Peak	Н	-				
24410.00	Peak	Н	-				



Report No.: E2/2015/10015 Issue Date: Mar. 04, 2015 Page: 31 of 34

Operation Band	:BR	Test Date	:2015-02-24
Fundamental Frequency	:2441 MHz	Temp./Humi.	:25.4 deg_C / 57 RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL
Operation Mode	:TX MID	Engineer	:Vito

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Detector	Note	Spectrum	Factor	Actual	Limit	Margin
Mode		Reading Level		FS	@3m	
PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
Peak	S	54.67	-28.42	26.25	40.00	-13.75
Peak	S	55.46	-27.63	27.83	40.00	-12.17
Peak	S	47.58	-22.82	24.76	43.50	-18.74
Peak	S	50.11	-24.26	25.85	43.50	-17.65
Peak	S	52.28	-22.53	29.75	46.00	-16.25
Peak	S	42.52	-19.04	23.48	46.00	-22.52
Peak	Н	40.66	0.06	40.72	74.00	-33.28
Average	Н	34.20	0.06	34.26	54.00	-19.74
Peak	S	43.32	4.60	47.92	74.00	-26.08
Average	S	31.33	4.60	35.93	54.00	-18.07
Peak	Н	-				
Peak	Н	-				
Peak	Н	-				
Peak	Н	-				
Peak	Н	-				
Peak	Н	-				
Peak	Н	-				
	Mode PK/QP/AV Peak Peak Peak Peak Peak Peak Average Peak Average Peak Peak Peak Peak Peak Peak	Mode F/H/E/S PK/QP/AV F/H/E/S Peak S Peak H Peak H	ModeReading LevelPK/QP/AVF/H/E/SdBµVPeakS54.67PeakS55.46PeakS47.58PeakS50.11PeakS52.28PeakS42.52PeakH40.66AverageH34.20PeakS31.33PeakH-Pe	Mode Reading Level PK/QP/AV F/H/E/S dBμV dB Peak S 54.67 -28.42 Peak S 55.46 -27.63 Peak S 55.46 -27.63 Peak S 55.46 -27.63 Peak S 50.11 -24.26 Peak S 50.11 -24.26 Peak S 52.28 -22.53 Peak S 42.52 -19.04 Peak S 42.52 -19.04 Peak H 40.66 0.06 Average H 34.20 0.06 Average S 31.33 4.60 Peak S 31.33 4.60 Peak H - - Peak H - - Peak H - - Peak H - - Peak H - <	ModeReading LevelFSPK/QP/AVF/H/E/S $dB\mu V$ dB $dB\mu V/m$ PeakS54.67-28.4226.25PeakS55.46-27.6327.83PeakS55.46-27.6327.83PeakS50.11-24.2625.85PeakS50.11-24.2625.85PeakS52.28-22.5329.75PeakS42.52-19.0423.48PeakH40.660.0640.72AverageH34.200.0634.26PeakS31.334.6035.93PeakHPeakHPeakHPeakHPeakHPeakHPeakHPeakHPeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-PeakH-Peak <td>ModeReading LevelFS$@ 3m$PK/QP/AV$F/H/E/S$$dB\mu V$$dB$$dB\mu V/m$$dB\mu V/m$PeakS$54.67$$-28.42$$26.25$$40.00$PeakS$55.46$$-27.63$$27.83$$40.00$PeakS$55.46$$-27.63$$27.83$$40.00$PeakS$55.46$$-27.63$$27.83$$40.00$PeakS$55.46$$-27.63$$27.83$$40.00$PeakS$55.46$$-27.63$$27.83$$40.00$PeakS$55.46$$-27.63$$27.83$$40.00$PeakS$55.46$$-27.63$$27.83$$40.00$PeakS$50.11$$-24.26$$25.85$$43.50$PeakS$52.28$$-22.53$$29.75$$46.00$PeakH$40.66$$0.06$$40.72$$74.00$AverageH$34.20$$0.06$$34.26$$54.00$PeakH$-1$$-1$$-1$$-1$$-1$$-1$PeakH$-1$$-1$$-1$$-1$$-1$$-1$$-1$$-1$PeakH$-1$$-1$$-1$$-1$$-1$$-1$$-1$$-1$$-1$PeakH$-1$$-1$$-1$$-1$$-1$$-1$$-1$$-1$$-1$$-1$$-1$$-1$$-1$$-1$PeakH$-1$$-1$$-1$$-1$$-1$</td>	ModeReading LevelFS $@ 3m$ PK/QP/AV $F/H/E/S$ $dB\mu V$ dB $dB\mu V/m$ $dB\mu V/m$ PeakS 54.67 -28.42 26.25 40.00 PeakS 55.46 -27.63 27.83 40.00 PeakS 50.11 -24.26 25.85 43.50 PeakS 52.28 -22.53 29.75 46.00 PeakH 40.66 0.06 40.72 74.00 AverageH 34.20 0.06 34.26 54.00 PeakH -1 -1 -1 -1 -1 -1 PeakH -1 -1 -1 -1 -1 -1 -1 -1 PeakH -1 -1 -1 -1 -1 -1 -1 -1 -1 PeakH -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 PeakH -1 -1 -1 -1 -1

Η

24410.00

Peak



Report No.: E2/2015/10015 Issue Date: Mar. 04, 2015 Page: 32 of 34

Operation Band	:BR	Test Date	:2015-02-24
Fundamental Frequency	:2480 MHz	Temp./Humi.	:25.4 deg_C / 57 RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
40.67	Peak	S	51.58	-19.43	32.15	40.00	-7.85
71.71	Peak	S	56.44	-27.63	28.81	40.00	-11.19
100.81	Peak	S	64.41	-23.69	40.72	43.50	-2.78
102.75	Peak	S	63.08	-23.39	39.69	43.50	-3.81
118.27	Peak	S	54.10	-21.60	32.50	43.50	-11.00
237.58	Peak	S	46.18	-21.41	24.78	46.00	-21.22
4960.00	Peak	Н	40.16	0.03	40.19	74.00	-33.81
4960.00	Average	Н	32.29	0.03	32.32	54.00	-21.68
7440.00	Peak	Н	-				
9920.00	Peak	Н	-				
12400.00	Peak	Н	-				
14880.00	Peak	Н	-				
17360.00	Peak	Н	-				
19840.00	Peak	Н	-				
22320.00	Peak	Н	-				
24800.00	Peak	Н	-				



Report No.: E2/2015/10015 Issue Date: Mar. 04, 2015 Page: 33 of 34

Operation Band	:BR	Test Date	:2015-02-24
Fundamental Frequency	:2480 MHz	Temp./Humi.	:25.4 deg_C / 57 RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
71.71	Peak	S	55.70	-27.63	28.07	40.00	-11.93
145.43	Peak	S	52.76	-22.29	30.46	43.50	-13.04
155.13	Peak	S	51.06	-22.82	28.24	43.50	-15.26
224.97	Peak	S	52.74	-22.67	30.07	46.00	-15.93
754.59	Peak	S	39.96	-9.99	29.97	46.00	-16.03
784.66	Peak	S	40.36	-9.99	30.36	46.00	-15.64
4960.00	Peak	Н	41.44	0.03	41.48	74.00	-32.52
4960.00	Average	Н	33.00	0.03	33.03	54.00	-20.97
7440.00	Peak	Н	-				
9920.00	Peak	Н	-				
12400.00	Peak	Н	-				
14880.00	Peak	Н	-				
17360.00	Peak	Н	-				
19840.00	Peak	Н	-				
22320.00	Peak	Н	-				
24800.00	Peak	Н	-				



8. ANTENNA REQUIREMENT

8.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

According to RSS-GEN 7.1.2, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

8.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 1.16dBi, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.