


## FCC LABEL LOCATION

The label will be permanently affixed at a conspicuous location on the device.




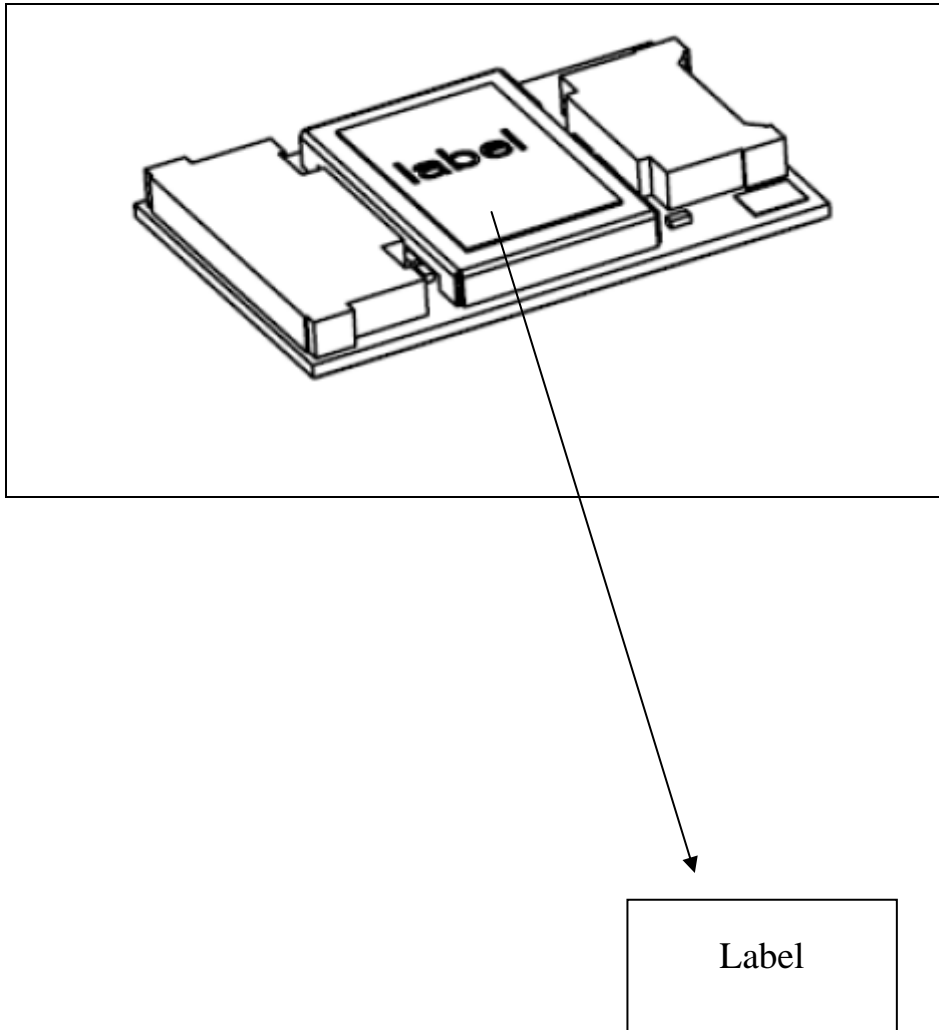


(Fig. 1) FCC ID: MCLT77H747

NOTES:

1. Surface Material:50# Mylar
2. Surface Material tolerance:0.050±0.005mm
3. Surface Material color:white
4. printing color is as color defined in artwork
5. Adhesive:Acrylic
6. Adhesive thickness:0.024+/-0.003mm
7. Adhesion to steel(180°磨钢粘着力):1.6±0.3 kg/25mm
8. Initial Tack (初期力) :2# #/boll
9. Release Power(90°剥离力):5-25 g/25mm
10. Holding Power(持粘力测试法):8# hr/kg/20mm<sup>2</sup>
11. Package Style:Reel or sheet
12. This part must comply with ROHs and HF.

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
0	N/A	N/A	2016/07/06	First Release	hong jun

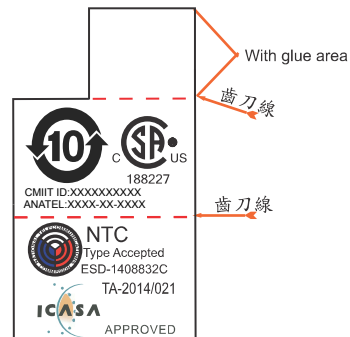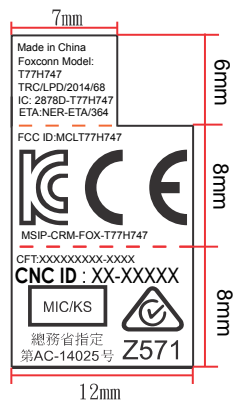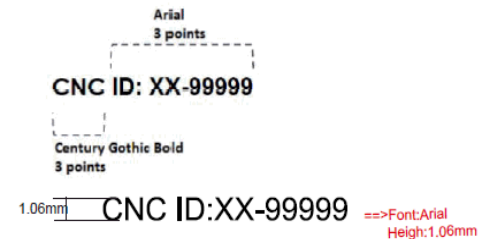

Scale 2:1

Scale 1:1

MATERIAL (SPEC.)										SCALE		<h1>FOXCONN</h1> <p>HON HAI PRECISION IND. CO., LTD. CNSBG</p>					
50# mylar(Matte)										SHEET							
FINISH										1/1		PART NAME					
Select										UNIT		PTT label					
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	V	Label	USR	MM	MODEL	PART NO.	DESIGNED		
0~6		0.05	0.05	0.10											hong jun		
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20			A4	T77H747.10				
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25								
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30								
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50								
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80								
DRAFT TOLERANCE										± 0.2°		CRITICAL DIM. MARK		* * *			
												CUSTOMER MODEL		CUSTOMER PART NO.		APPROVED	