


NOTES:(UNLESS OTHERWISE SPECIFIED)
 1. ALL MATERIALS, FINISHES AND PROCESS MUST COMPLY WITH ROHS DIRECTIVER
 2. LABEL COLOR SHALL MEET CISCO REQUEST, CISCO OSOLO SNOW FOR BACKGROUND COLOR AND P COOL GREY 3 FOR TEXTS AND LINES COLOR
 3. TEXT FONT SHALL BE CISCOSANSTT REGULAR
 4. LABEL MATERIAL:
 (a) SURFACE MATERIAL: 50# POSITIVE VOID POLYESTER
 (b) SURFACE GLOSSINESS: MATTE LIKE MT-11510
 (c) SURFACE MATERIAL COLOR: CISCO OSLO SNOW
 (d) PRINTING TEXT COLOR: PANTONE COOL GREY 3
 (e) ADHESIVE: TBD
 (f) ADHESIVE THICKNESS: TBD
 (g) ADHESIVE TO STELL(180 DEGREE ADHESION): TBD
 (h) INITIAL TACK: TBD
 (i) RELEASE POWER(90 DEGREE): TBD
 (j) HOLDING POWER: TBD

VER.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
01			2012/05/30	First Release	Sally Liao
03			2013/07/10	Change label content, text color and surface finish	Sally Liao
04			2013/10/08	Took away the 12V option on label. Reverted from Pantone Cool Grey 9 to Cool Grey 3. This means same color on text as before (P3 build)	Sally Liao

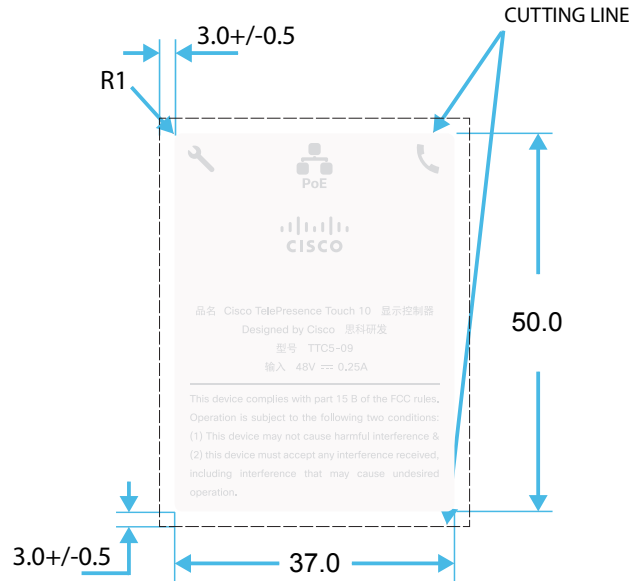


MATERIAL (SPEC.)										SCALE
SEE NOTES										1/1
FINISH										SHEET
SEE NOTES										1/1
Select Dim.	A	B	C	EPS	EPE	BAG	CTN	V Label	USR	UNIT
0~6	0.05	0.05	0.10	0.50	0.50	3.00	2.00	0.20		mm
6~30	0.10	0.15	0.20	0.50	0.50	3.00	2.00	0.20		SIZE A4
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25		
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30		
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50		
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80		
DRAFT TOLERANCE				± 0.2°		CRITICAL DIM. MARK		*		

FOXCONN HON HAI PRECISION IND. CO., LTD.		
MODEL U58V213.00	PART NO. 504.00951.005	DESIGNED Sally Liao
CUSTOMER MODEL IDEFIX	CUSTOMER PART NO.	APPROVED Ken Hung

NOTES:(UNLESS OTHERWISE SPECIFIED)

1. ALL MATERIALS, FINISHES AND PROCESS MUST COMPLY WITH ROHS DIRECTIVER
2. LABEL COLOR SHALL MEET CISCO REQUEST, CISCO OSLO SNOW FOR BACKGROUND COLOR AND PANTONE COOL GREY 3 FOR TEXTS AND LINES COLOR
3. TEXT FONT SHALL BE CISCOSANSTT REGULAR
4. LABEL MATERIAL:
 - (a) SURFACE MATERIAL: 50# EMBOSING WHITE MYLAR HTYL50(EB)
 - (b) SURFACE GLOSSINESS: MATTE LIKE MT-11510
 - (c) SURFACE MATERIAL COLOR: CISCO OSLO SNOW
 - (d) PRINTING TEXT COLOR: PANTONE COOL GREY 3
 - (e) ADHESIVE: F07D
 - (f) ADHESIVE THICKNESS: 0.033+/-0.003 MM
 - (g) ADHESIVE TO STELL(180 DEGREE ADHESION): 1.20+/-0.35 KG/25MM
 - (h) INITIAL TACK: 1.20+/-0.4 KG/25MM
 - (i) RELEASE POWER(90 DEGREE): 26.00+/-10 G/25MM
 - (j) HOLDING POWER: 10.00+/-6 HR/KG/25MM²

VER.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
01			2012/05/30	First Release	Sally Liao
02			2012/07/13	Add P/N, change label material and cutting line	Sally Liao
03			2013/10/17	Keep marks for the countries related to tier 1	Sally Liao
04			2013/10/30	Update certificate NO. for the country related to tier 1	Sally Liao

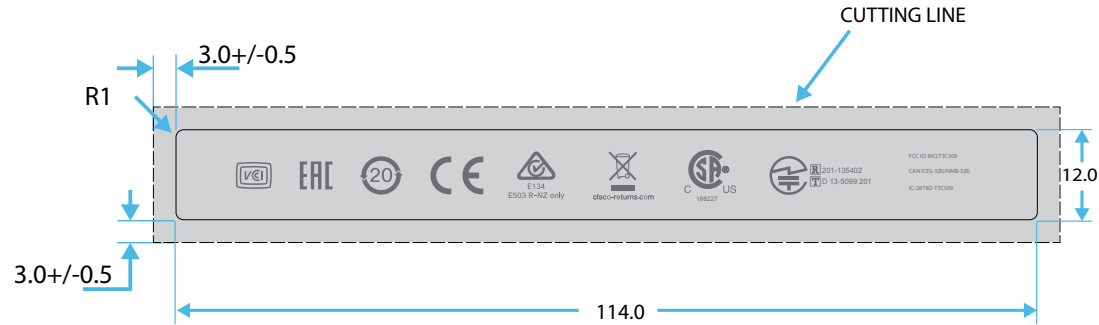

MATERIAL (SPEC.) SEE NOTES		SCALE 1/1	FOXCONN HON HAI PRECISION IND. CO., LTD.										
FINISH SEE NOTES		SHEET 1/1											
Select						UNIT	PART NAME						
Dim	A	B	C	EPS	EPE	BAG	CTN	Label	USR	mm	IDEFIX Safety Label		
0~6	0.05	0.05	0.10					0.20		SIZE	MODEL	PART NO.	DESIGNED
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20		A4	U58V213.00	500.01494.005	Sally Liao
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25					
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30					
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50			CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80			IDEFIX	N/A	Ken Hung
DRAFT TOLERANCE		± 0.2°		CRITICAL DIM. MARK		*							

