



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

BLUETOOTH MODULE 4.0 +EDR/LE

MODEL NUMBER: WIN-B3

FCC ID: MCLWINB3

IC: 2878D- WINB3

REPORT NUMBER: 11J13631-1

ISSUE DATE: MARCH 02, 2011

Prepared for

**HON HAI PRECISION IND. CO., LTD.
5F-1, 5 HSIN-AN ROAD
HSINCHU SCIENCE-BASED INDUSTRIAL PARK
TAIWAN, R.O.C.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	03/02/2011	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY.....	6
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST.....	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	7
5.1. SOFTWARE AND FIRMWARE.....	7
5.2. WORST-CASE CONFIGURATIONS AND MODE.....	7
5.3. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT.....	10
7. ANTENNA PORT TEST RESULTS.....	11
7.1. BASIC DATA RATE GFSK MODULATION.....	11
7.1.1. 20 dB BANDWIDTH.....	11
7.1.2. HOPPING FREQUENCY SEPARATION.....	16
7.1.3. NUMBER OF HOPPING CHANNELS.....	18
7.1.4. AVERAGE TIME OF OCCUPANCY.....	21
7.1.5. OUTPUT POWER.....	25
7.1.6. AVERAGE POWER.....	28
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	29
7.2. ENHANCED DATA RATE 8PSK MODULATION.....	34
7.2.1. 20 dB AND 99% BANDWIDTH.....	34
7.2.2. HOPPING FREQUENCY SEPARATION.....	39
7.2.3. NUMBER OF HOPPING CHANNELS.....	41
7.2.4. AVERAGE TIME OF OCCUPANCY.....	44
7.2.5. OUTPUT POWER.....	48
7.2.6. AVERAGE POWER.....	51
7.2.7. CONDUCTED SPURIOUS EMISSIONS.....	52
7.3. LE GFSK MODULATION.....	57
7.3.1. 20 dB AND 99% BANDWIDTH.....	57
7.3.2. HOPPING FREQUENCY SEPARATION.....	62
7.3.3. NUMBER OF HOPPING CHANNELS.....	64
7.3.4. AVERAGE TIME OF OCCUPANCY.....	67
7.3.5. OUTPUT POWER.....	70
7.3.6. AVERAGE POWER.....	73

7.3.7.	CONDUCTED SPURIOUS EMISSIONS.....	74
8.	RADIATED TEST RESULTS.....	79
8.1.	<i>LIMITS AND PROCEDURE</i>	79
8.2.	<i>TRANSMITTER ABOVE 1 GHz</i>	80
8.2.1.	BASIC DATA RATE GFSK MODULATION	80
8.2.2.	ENHANCED DATA RATE 8PSK MODULATION	85
8.2.1.	LOW ENERGY LE GFSK MODULATION.....	90
8.3.	<i>RECEIVER ABOVE 1 GHz</i>	95
8.3.1.	RECEIVER ABOVE 1 GHz.....	95
8.4.	<i>WORST-CASE BELOW 1 GHz</i>	96
9.	AC POWER LINE CONDUCTED EMISSIONS.....	99
10.	MAXIMUM PERMISSIBLE EXPOSURE	103
11.	SETUP PHOTOS.....	106

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: HON HAI PRECISION IND. CO., LTD.
5F-1, 5 HSIN-AN ROAD
HSINCHU SCIENCE-BASED INDUSTRIAL PARK
TAIWAN, R.O.C.

EUT DESCRIPTION: BLUETOOTH MODULE 4.0 +EDR/LE

MODEL: WIN-B3

SERIAL NUMBER: D86BF7EFD0C6

DATE TESTED: FEBRUARY 15-16, 2011


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



THU CHAN
ENGINEERING MANAGER
UL CCS

DAVID GARCIA
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth 4.0 + EDR/LE Module.

The radio module is manufactured by Hon Hai Precision.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	2.33	1.71
2402 - 2480	Enhanced 8PSK	5.16	3.28
2402 - 2480	LE	2.37	1.73

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an antenna with a maximum gain of 2.91dBi.

5.1. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was BT usb driver, v5.6.0.5301.

The test utility software used during testing was Bluetool, v1.3.5.5.

5.2. WORST-CASE CONFIGURATIONS AND MODE

The worst-case data rate for each mode is determined to be as follows, based on preliminary tests of the chipset utilized in this radio.

All final tests in the GFSK mode were made at 1 Mb/s.

All final tests in the 8PSK mode were made at 3 Mb/s.

All final tests in the LE mode were made at 1 Mb/s.

For radiated emissions below 1 GHz the worst-case configuration is determined to be the mode and channel with the highest output power.

The EUT was investigated in three different positions, X, Y, & Z and turned out the Y was worst-position. This worst position will be set for all radiated emissions testing.

5.3. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Lenovo	T61	L3-A1589	DoC
AC Adapter	Lenovo	PA-1650-171	11S92P1160Z1ZBGH74LH2M	N/A
Conversion Board	Marko	96-9922	2	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	1.0m	N/A
2	DC	1	DC	Unshielded	1.8m	N/A
3	USB	1	USB	Shielded	1.0m	N/A

TEST SETUP

The EUT is connected to a host laptop computer via conversion board with USB cable during the test. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

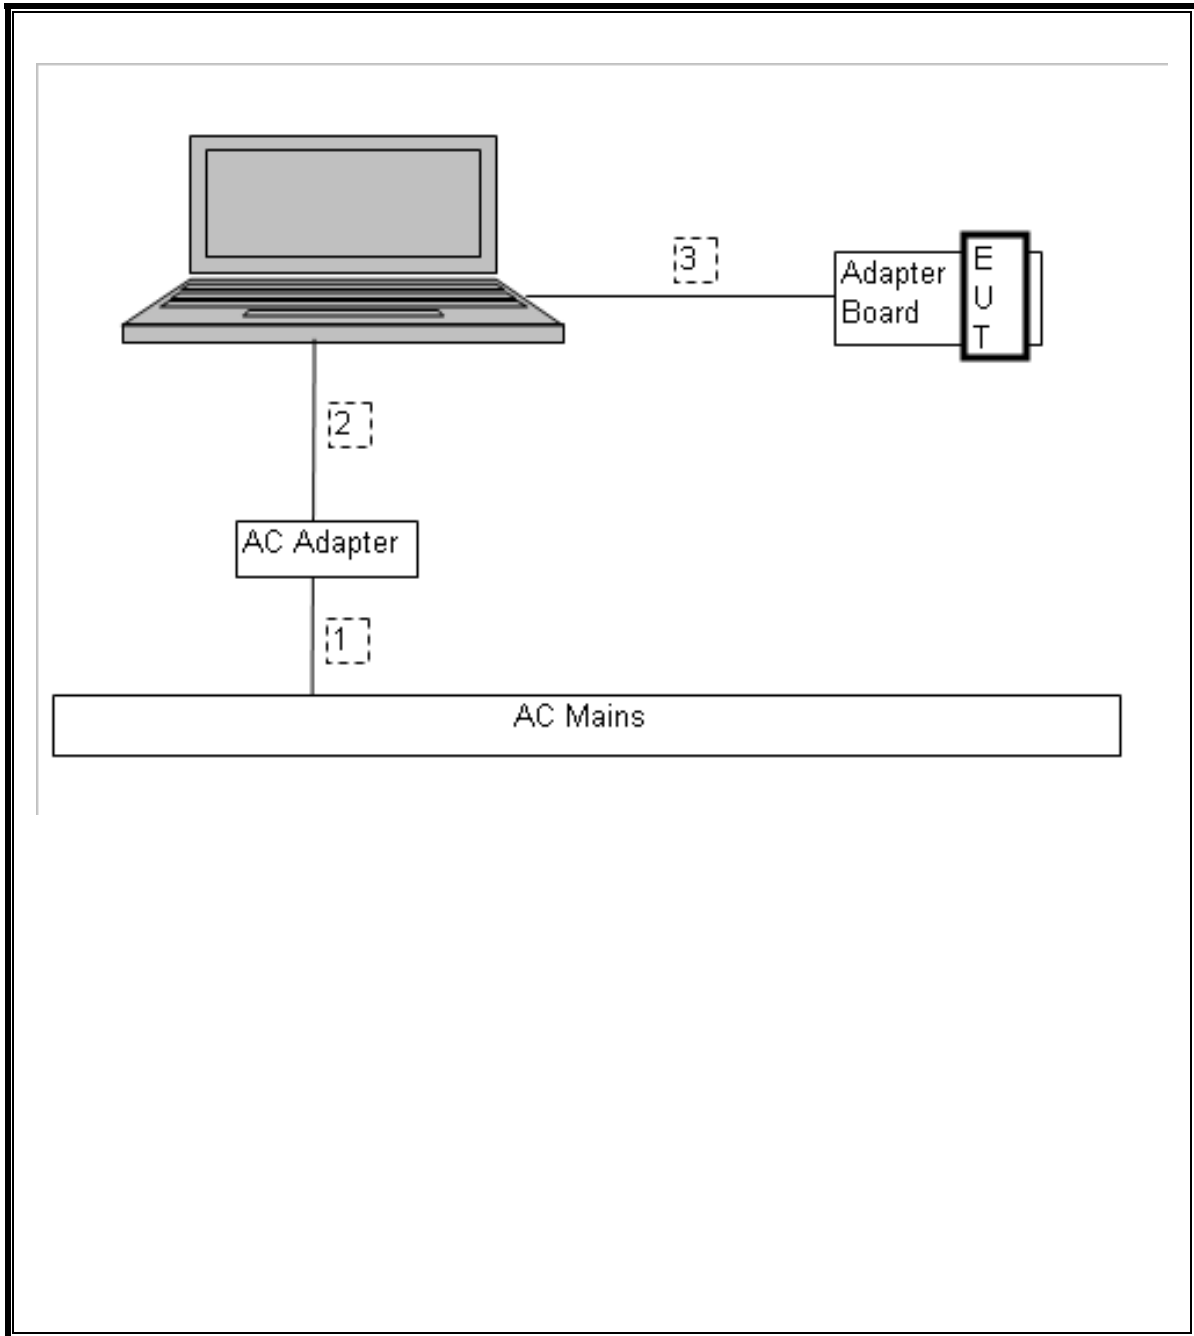

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01176	08/10/11
Antenna, Horn, 18 GHz	EMCO	3115	C00872	06/29/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	07/14/11
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01171	07/12/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	01/27/12
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	05/06/11
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/10/11
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	09/03/11
Power Meter	Agilent / HP	438A	C01068	06/16/11
Power Sensor, 18 GHz	Agilent / HP	8481A	N02782	07/28/11

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB BANDWIDTH

LIMIT


None; for reporting purposes only.

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	831.221	872.2131
Middle	2441	865.009	825.6685
High	2480	917.369	814.7423

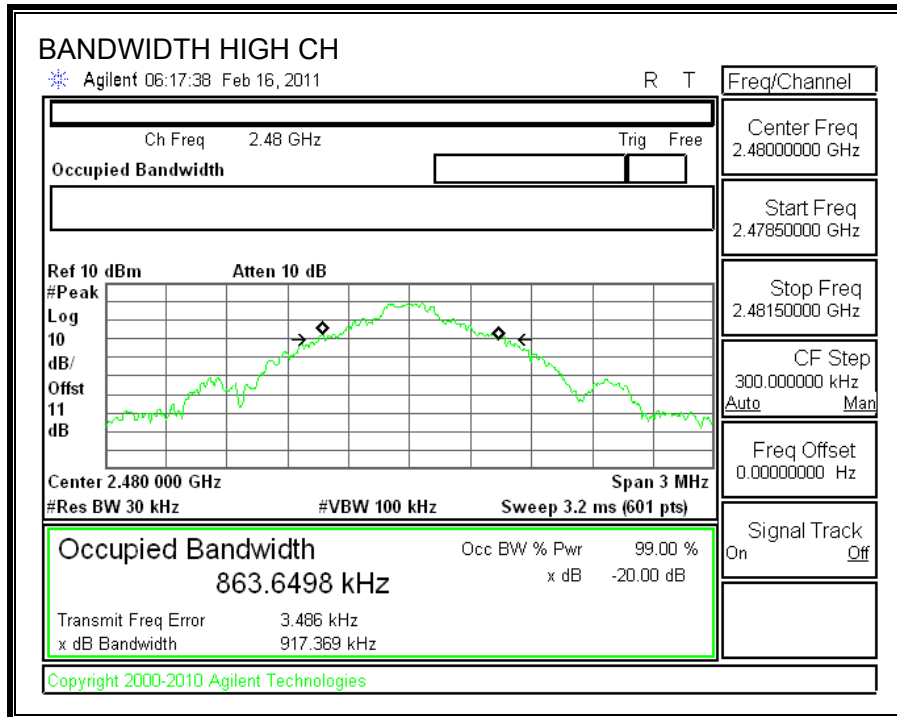

99% BANDWIDTH

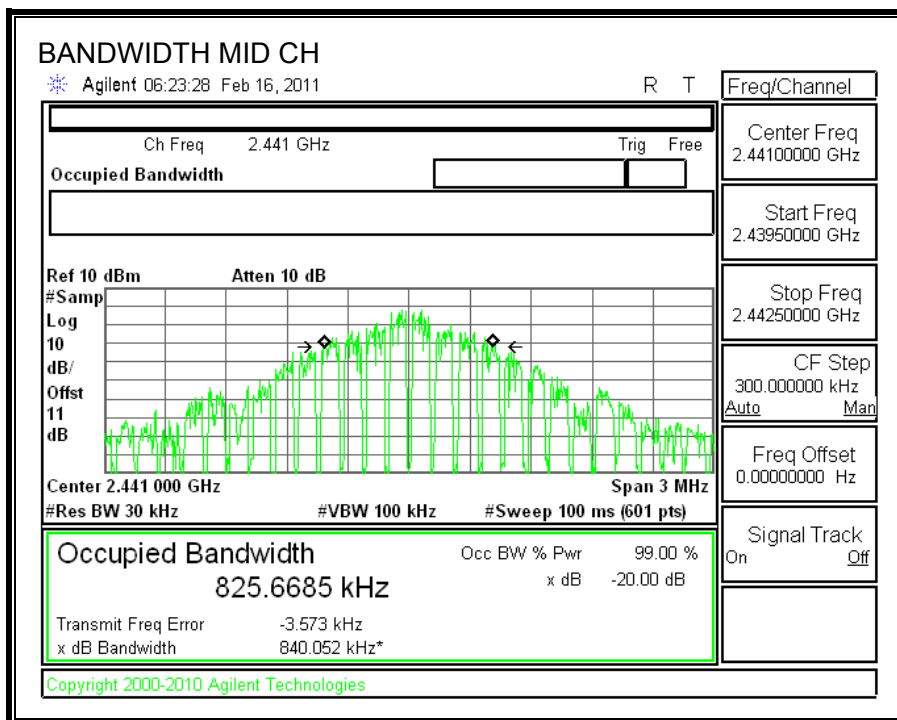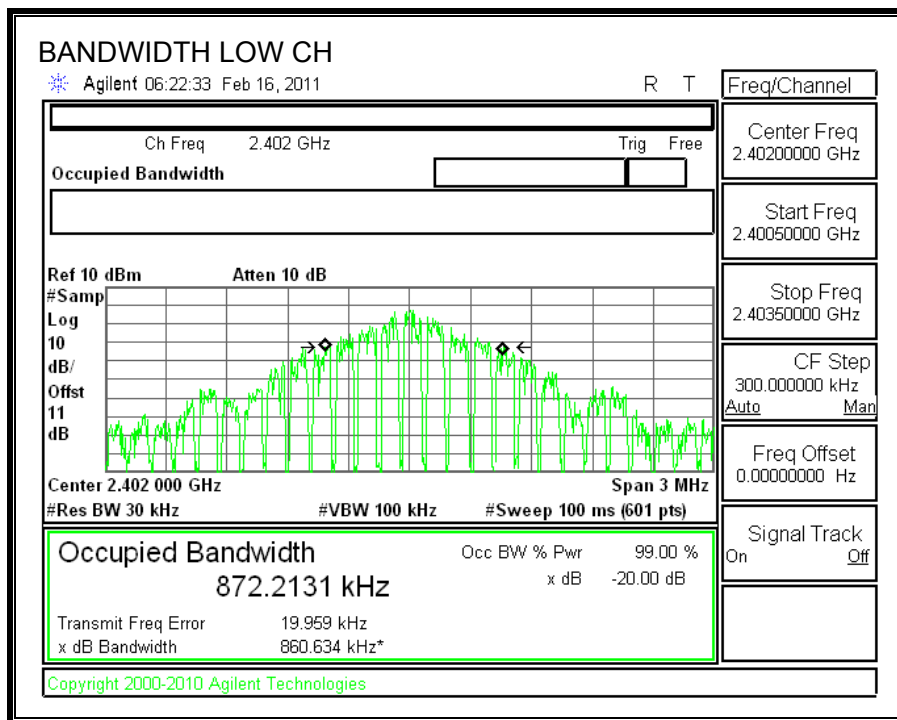

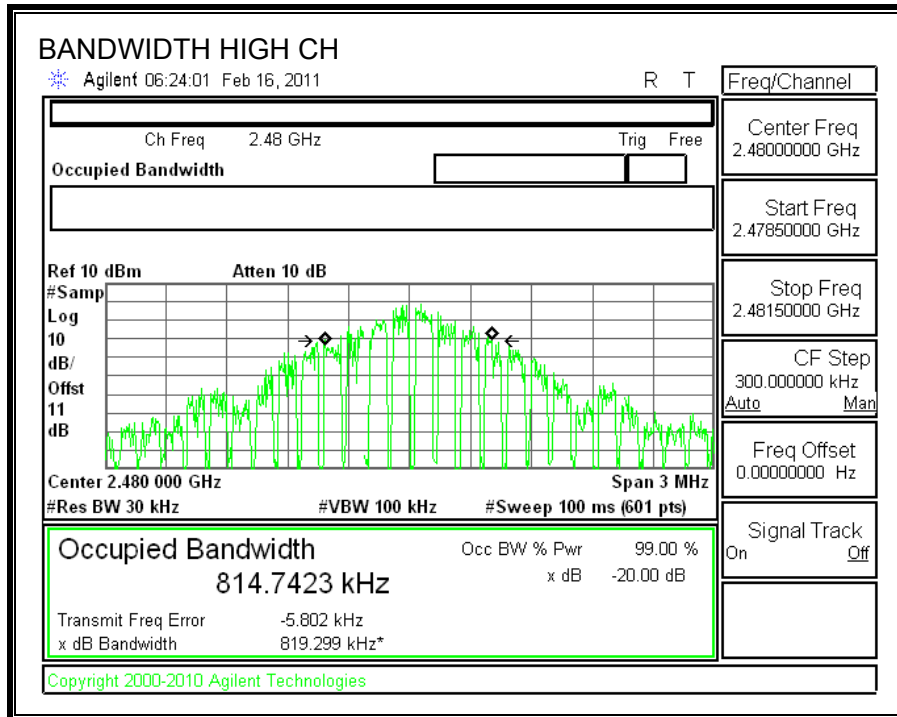

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

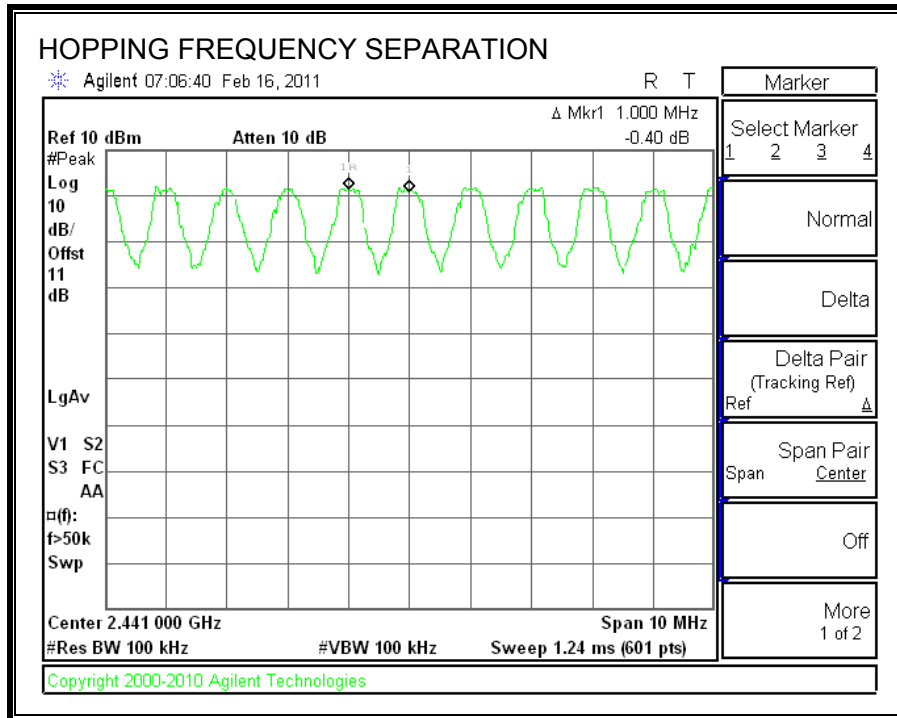

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

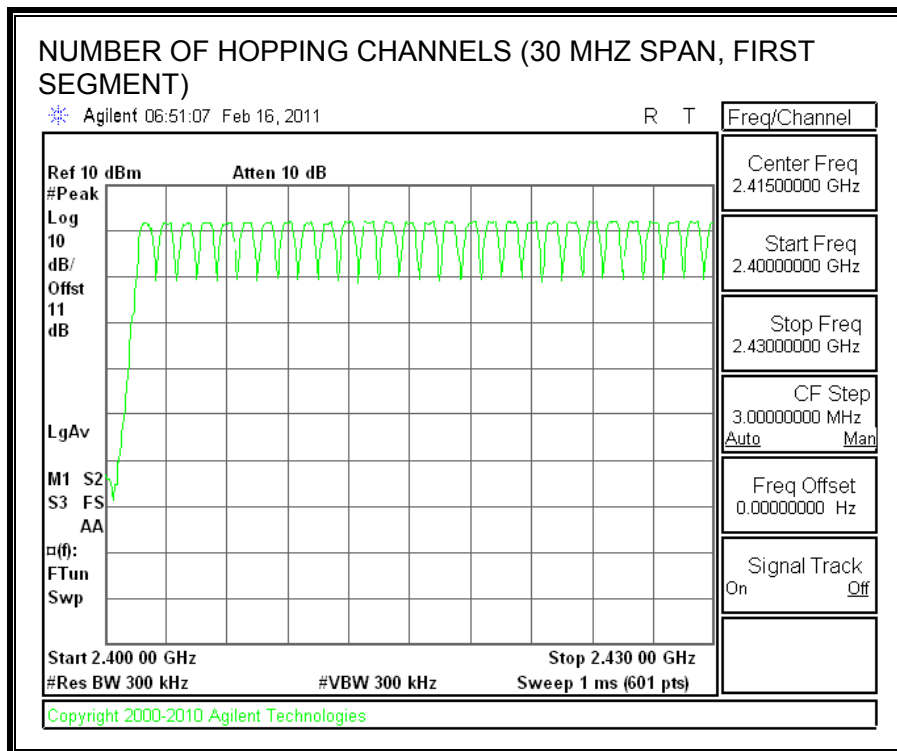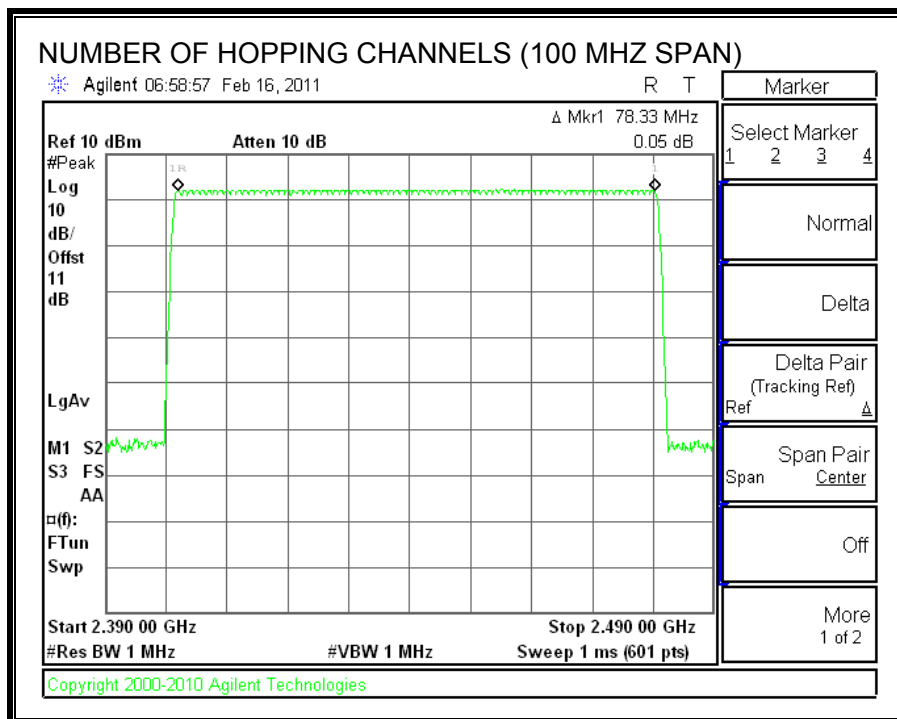

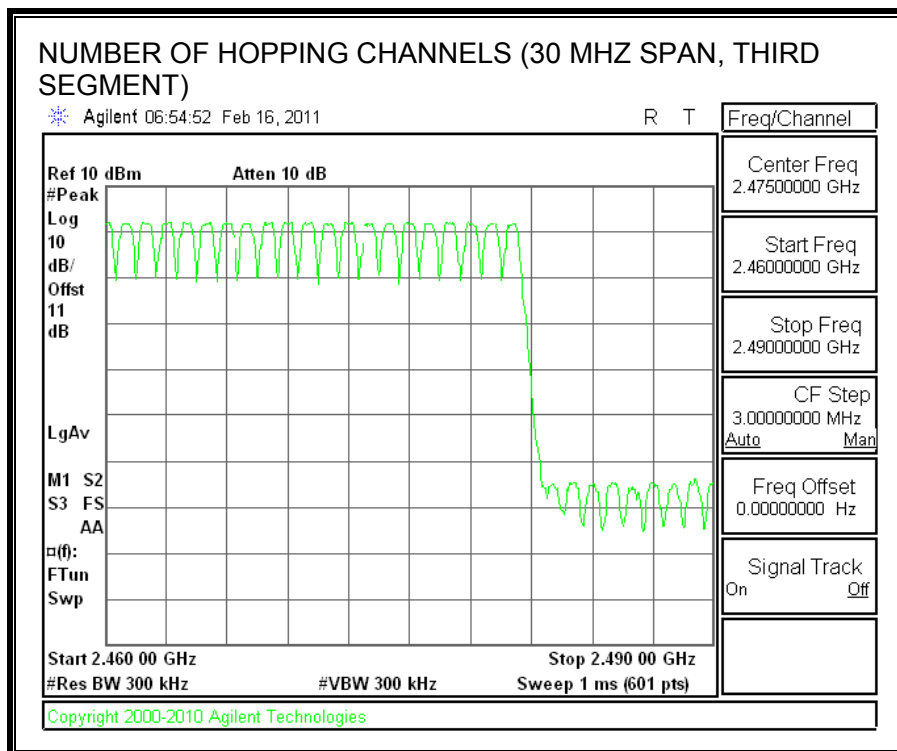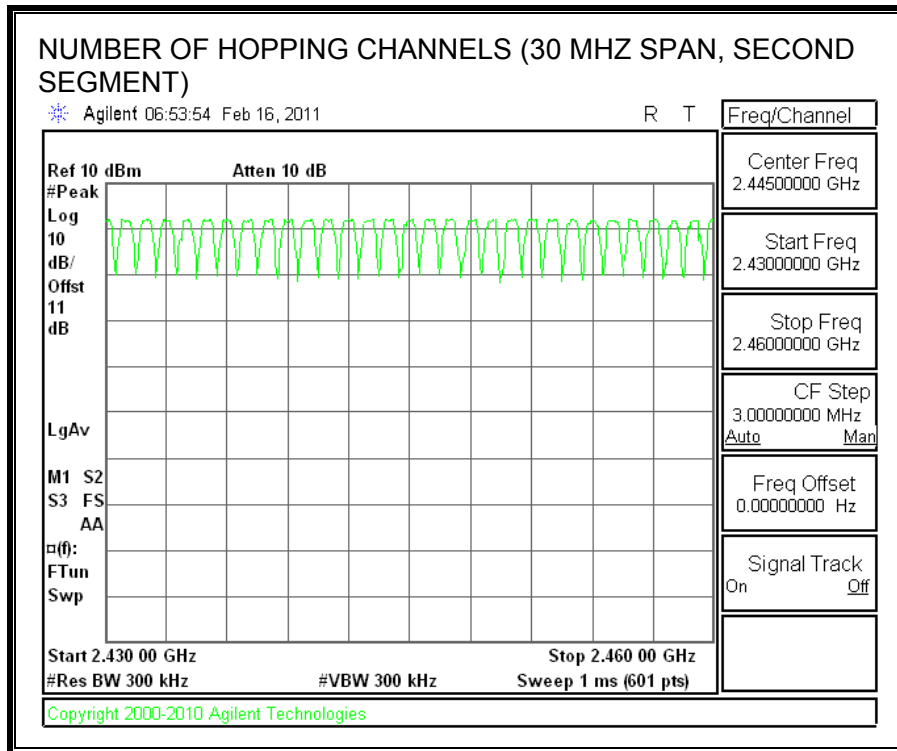

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


RESULTS

GFSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.4367	29	0.127	0.4	0.273
DH3	1.633	15	0.245	0.4	0.155
DH5	2.883	8	0.231	0.4	0.169

DH1

PULSE WIDTH

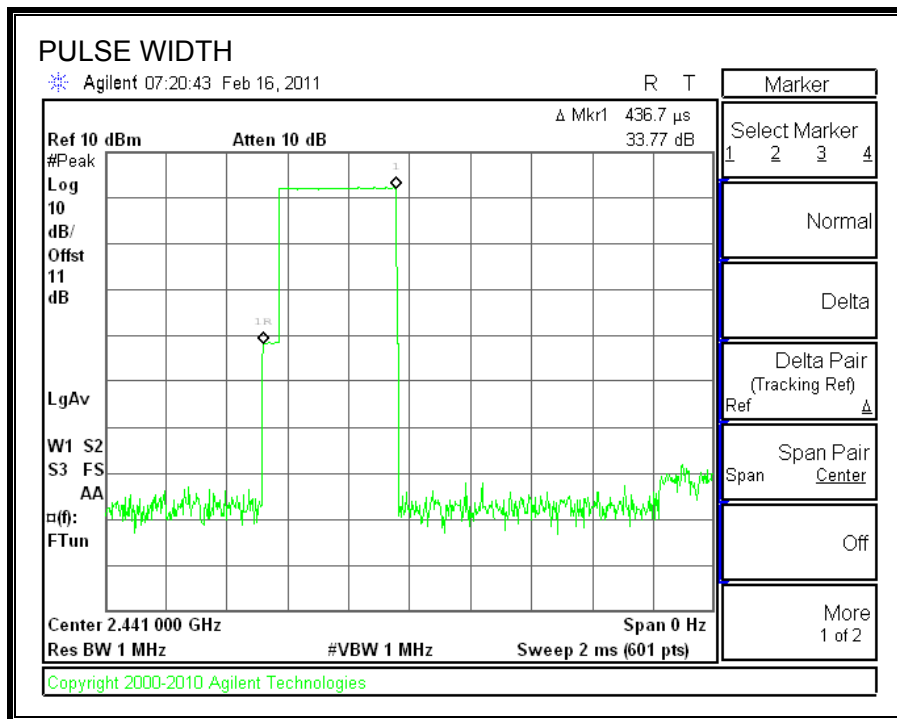


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

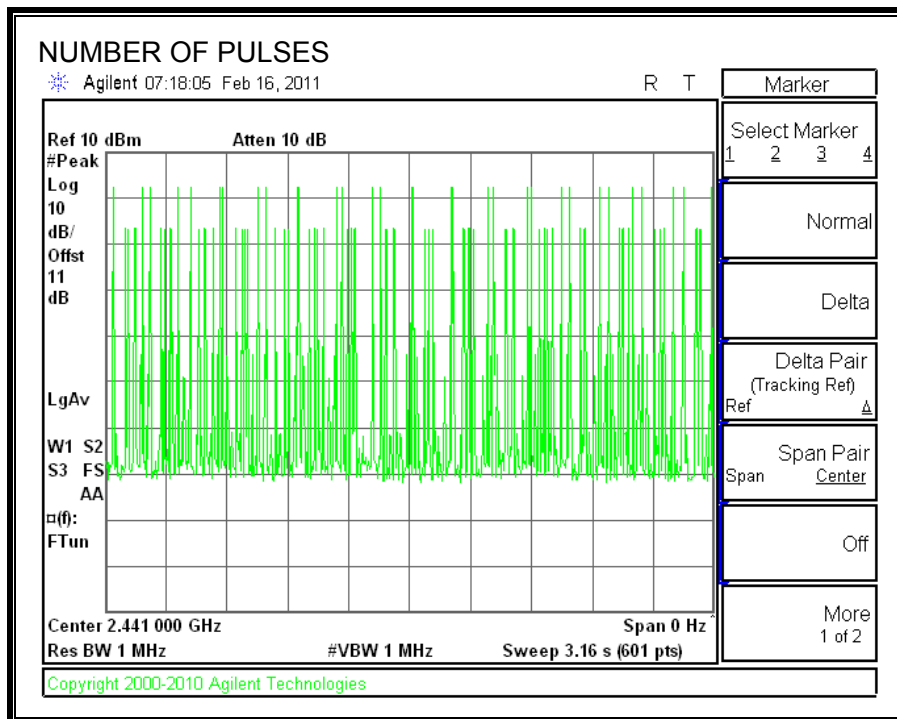


DH3

PULSE WIDTH

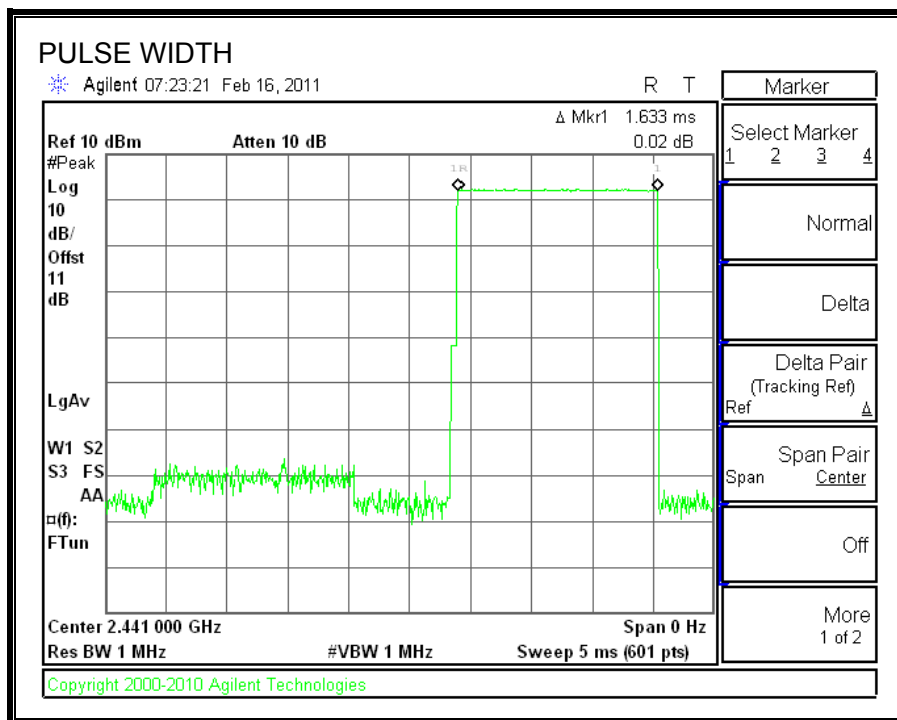


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

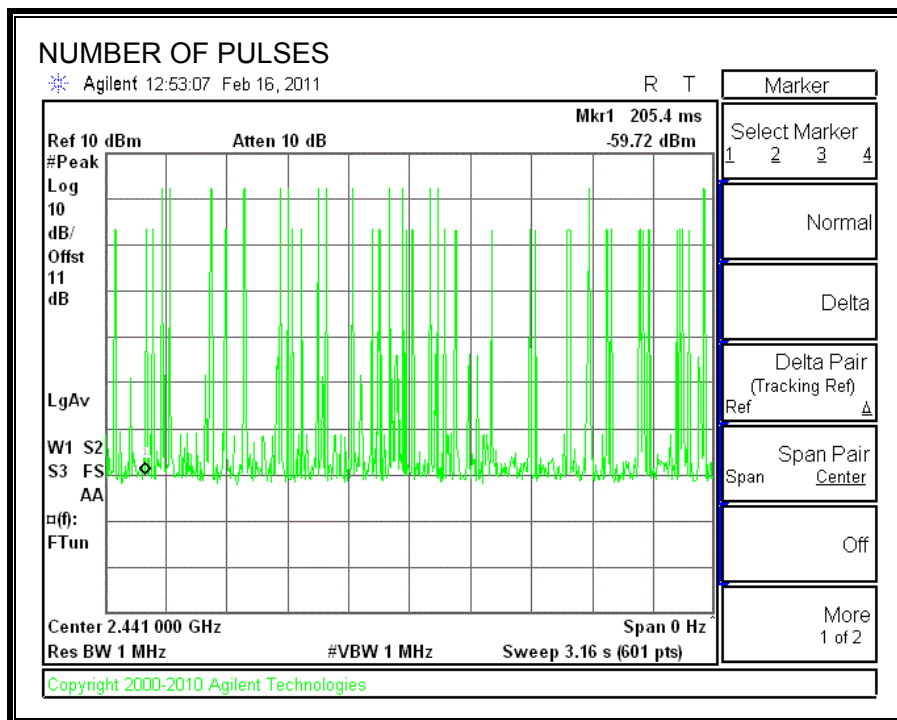


DH5

PULSE WIDTH

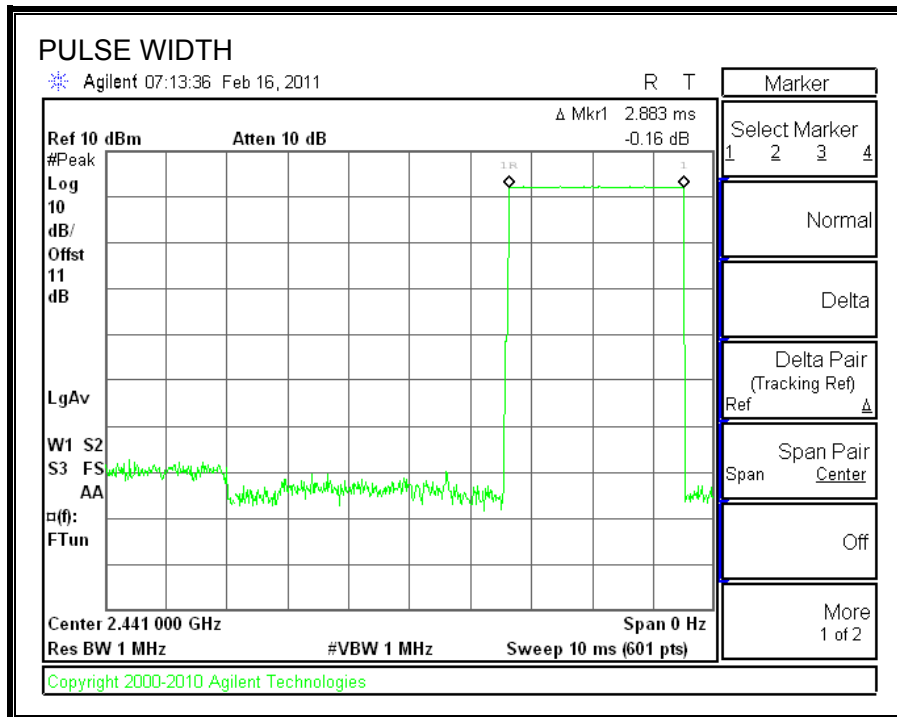

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

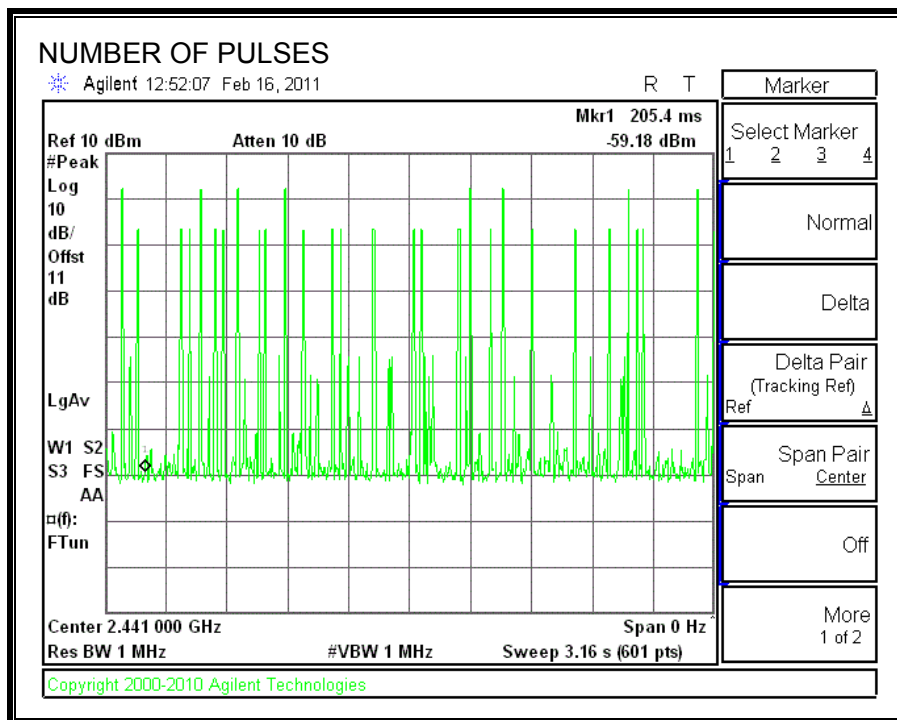

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	2.15	30	-27.85
Middle	2441	2.33	30	-27.67
High	2480	2.15	30	-27.85

OUTPUT POWER

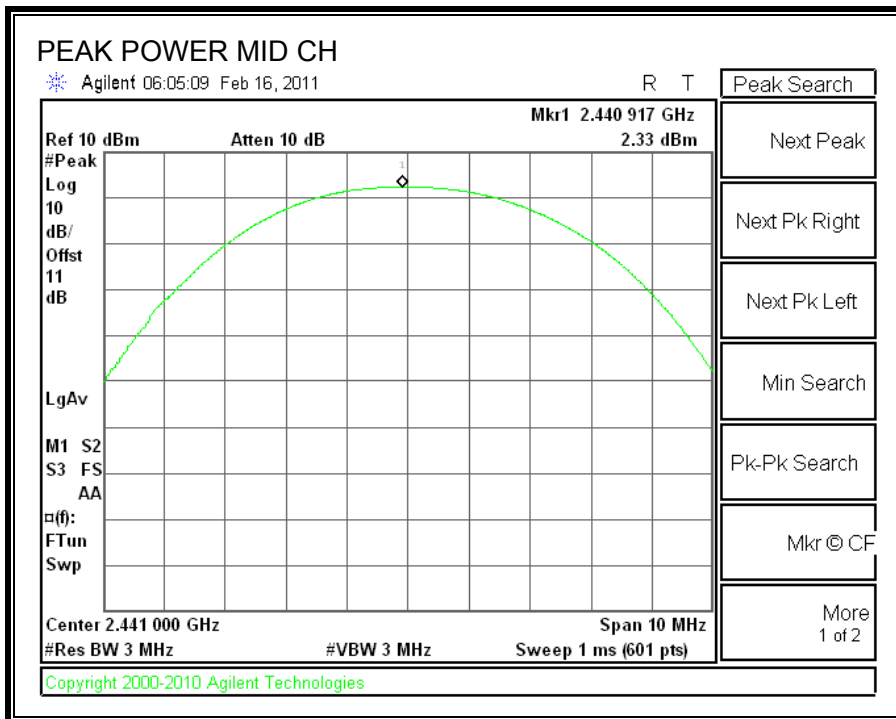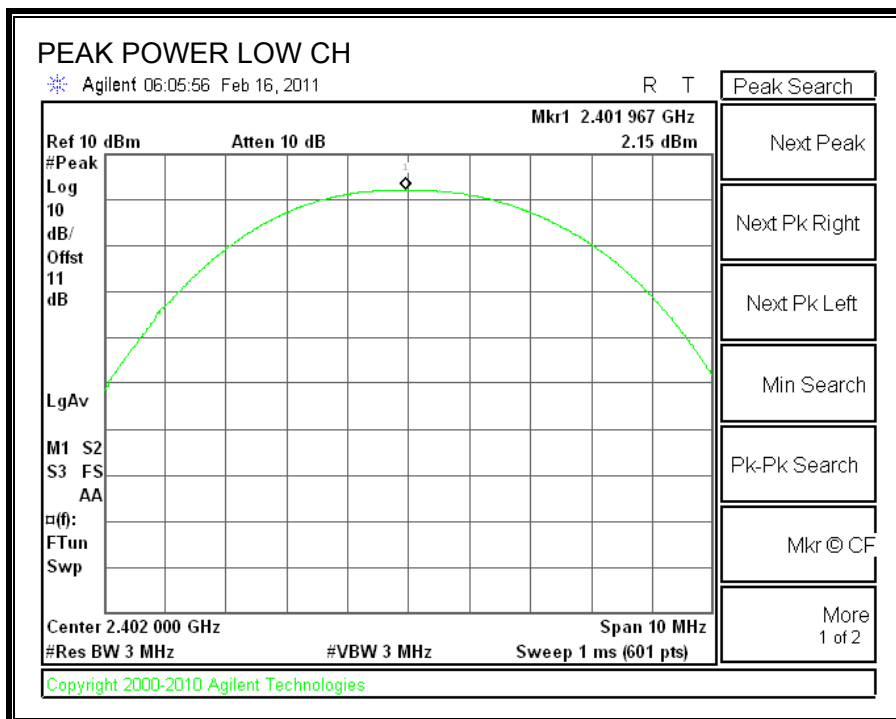

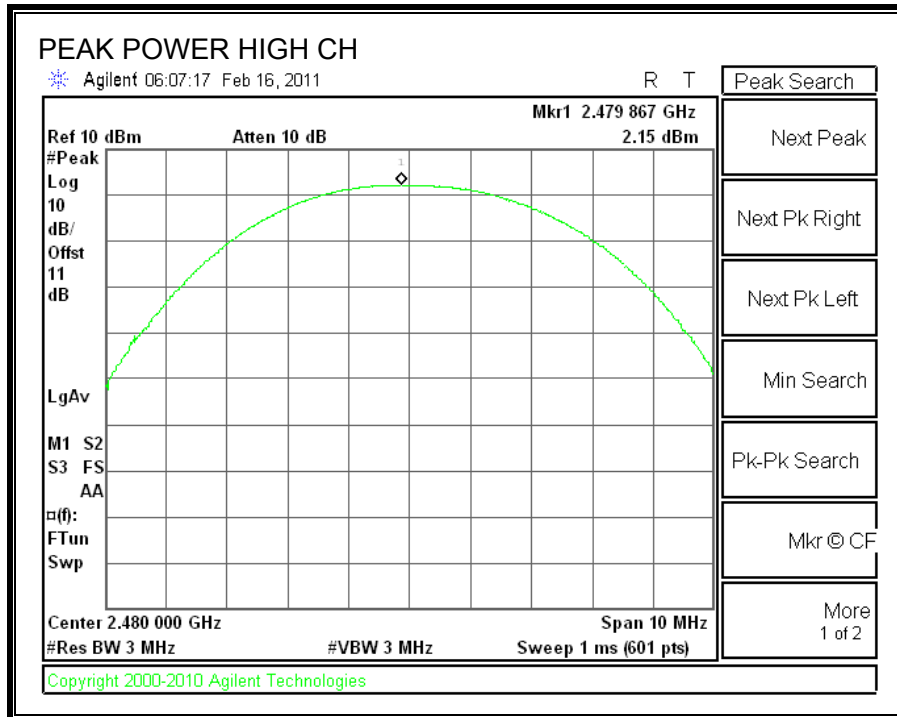

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1.0 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	0.33
Middle	2441	0.56
High	2480	0.42

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

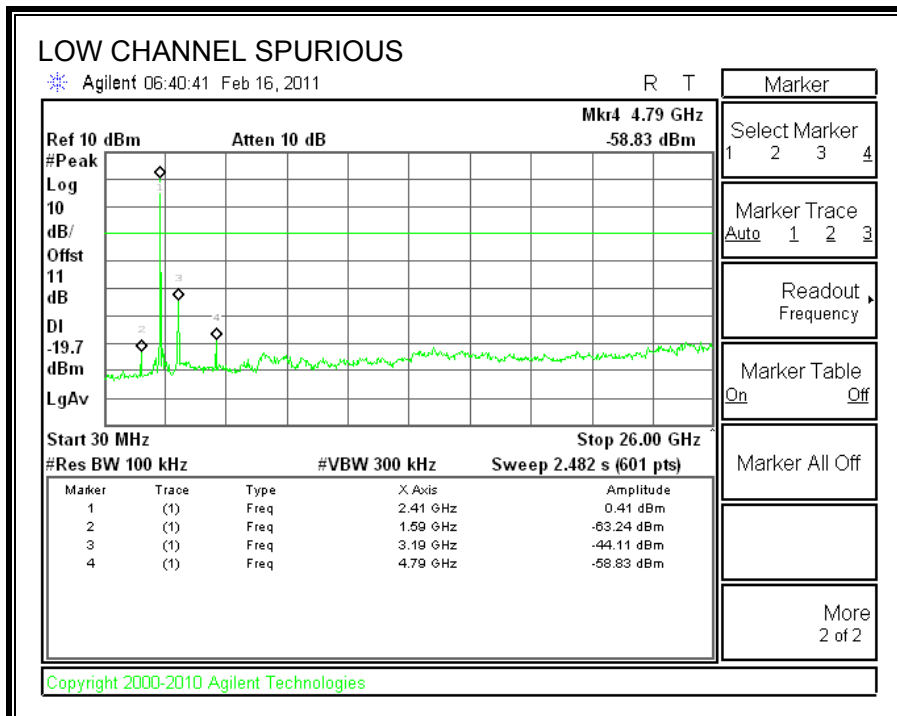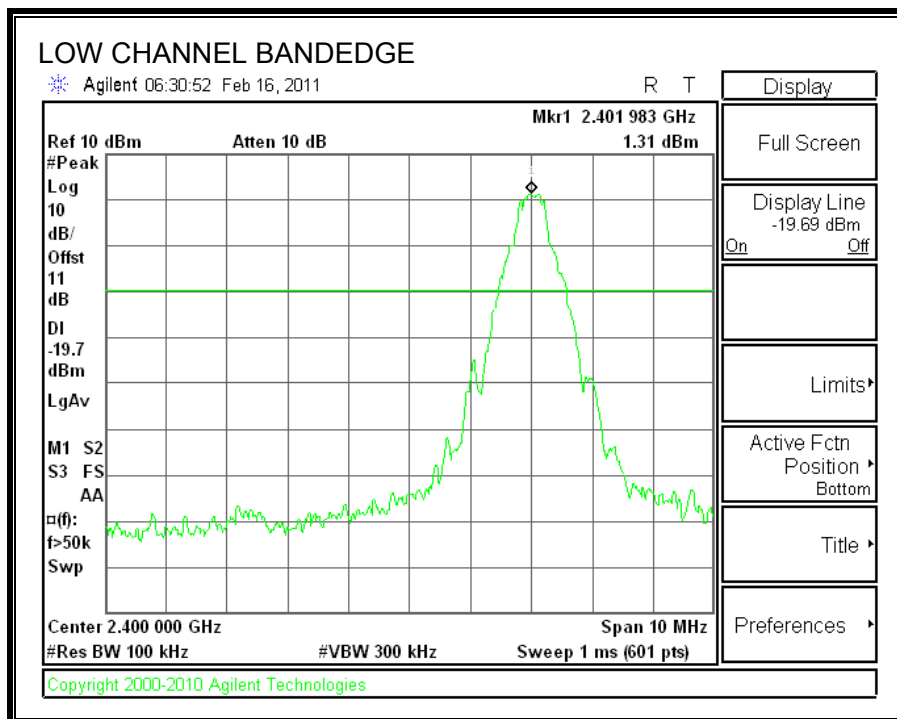



SPURIOUS EMISSIONS, MID CHANNEL

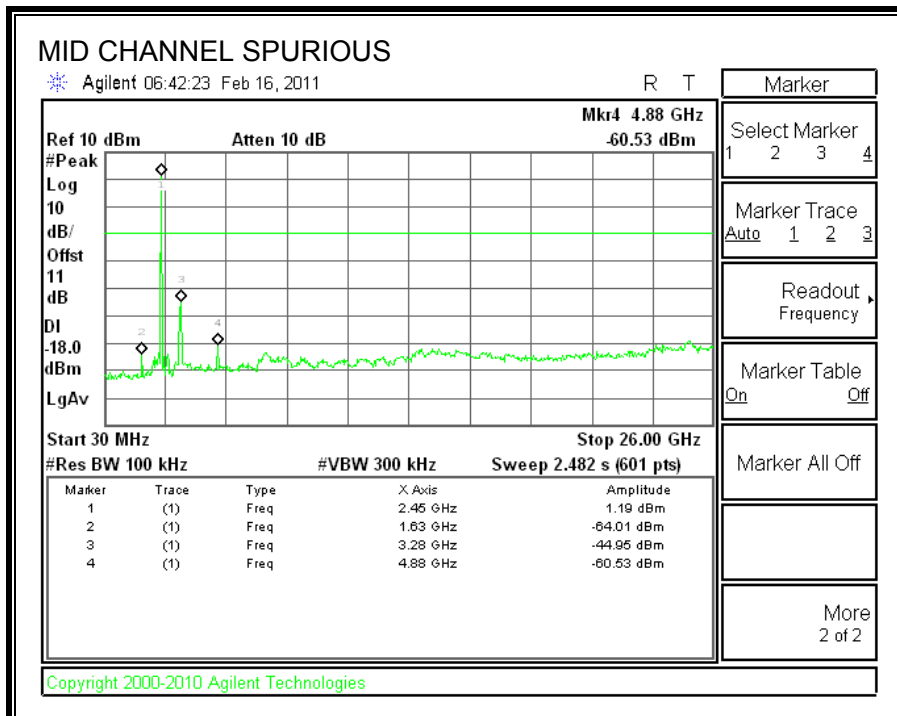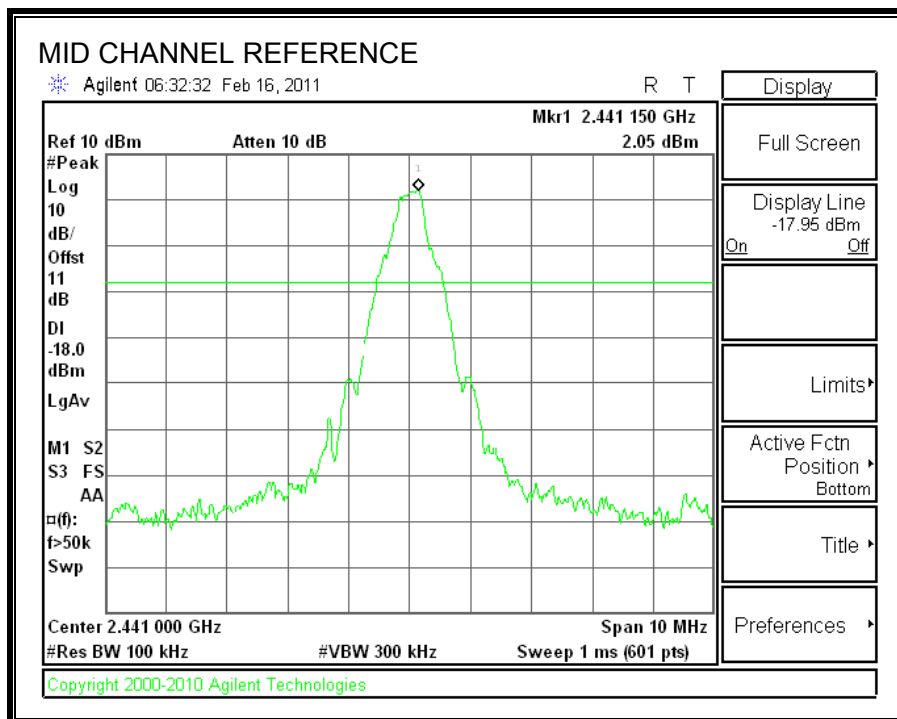

SPURIOUS EMISSIONS, HIGH CHANNEL

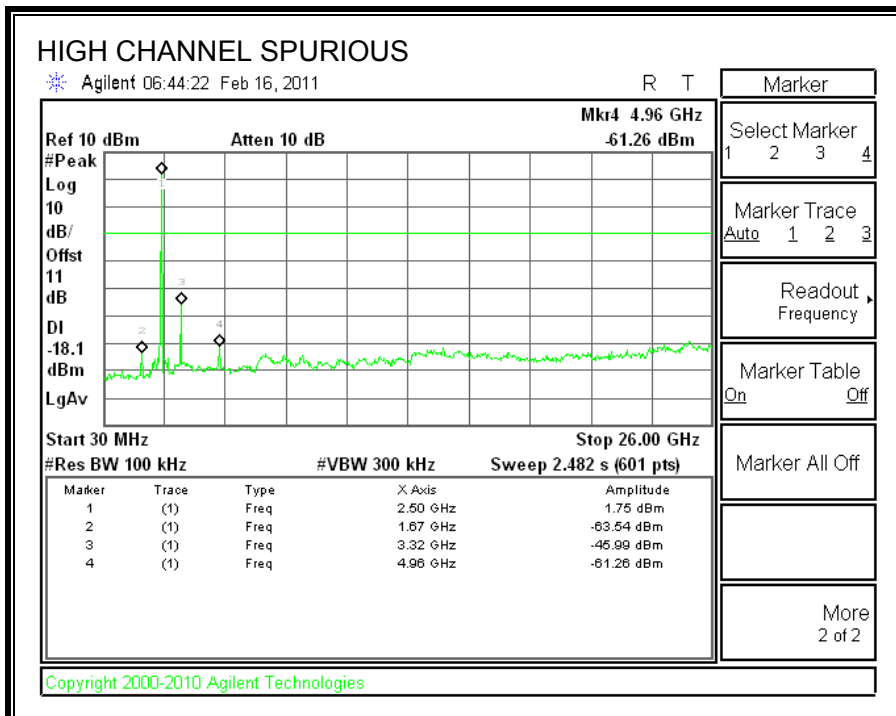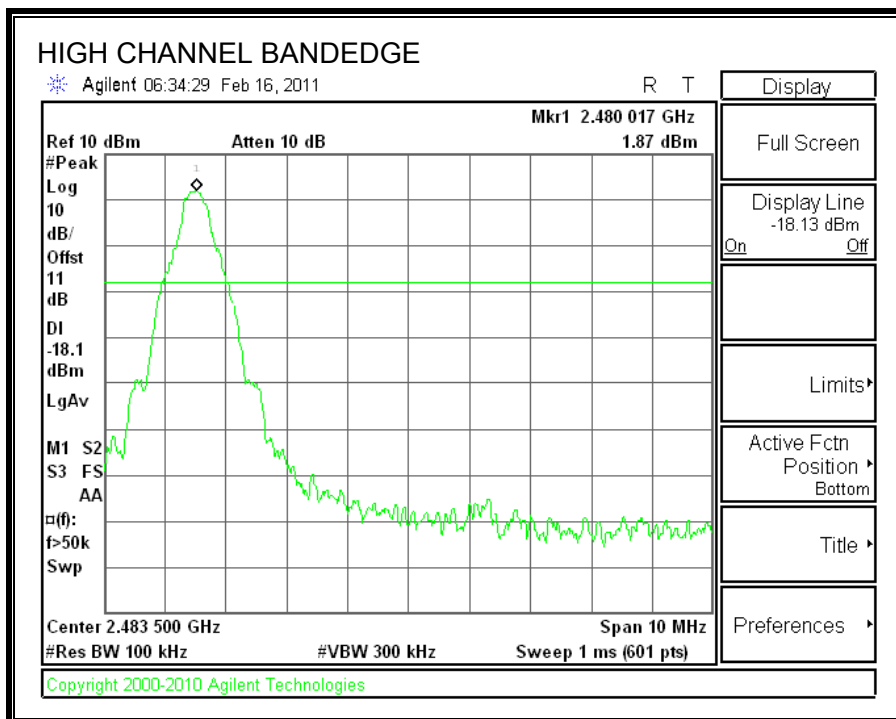

SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON

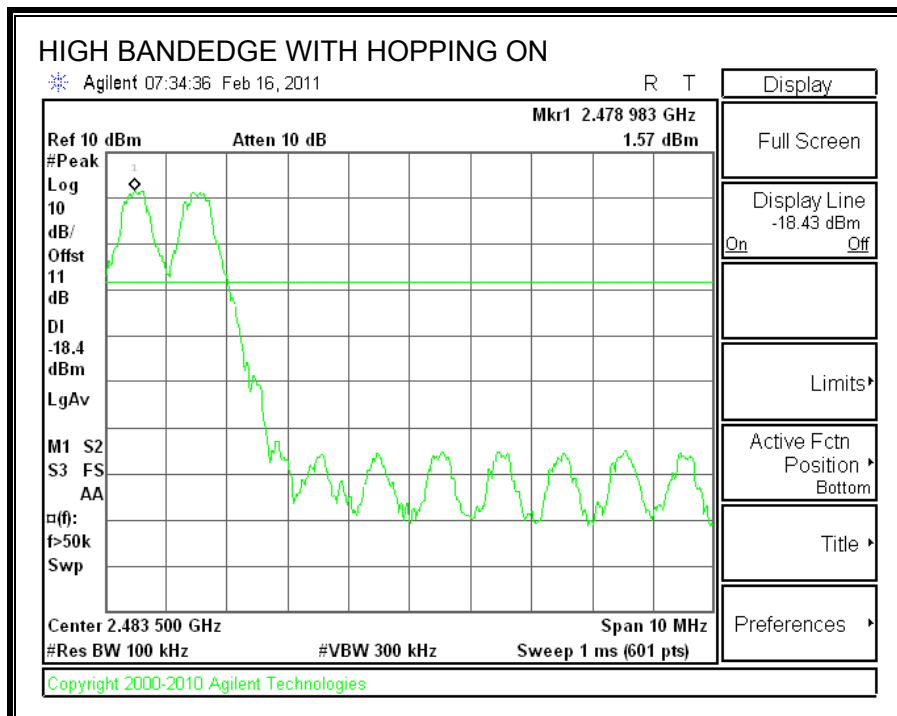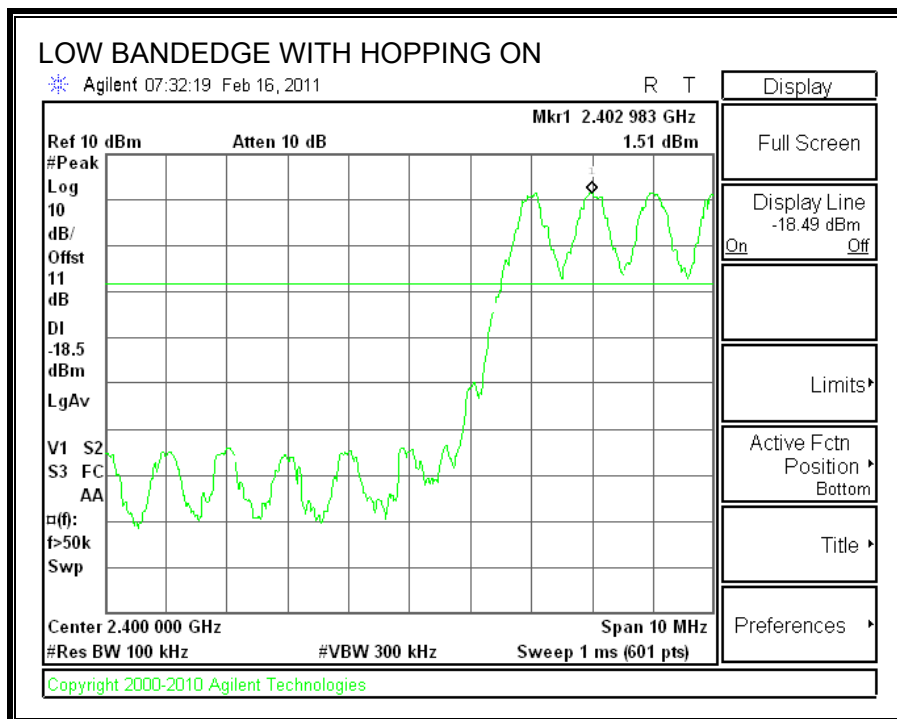

7.2. ENHANCED DATA RATE 8PSK MODULATION

7.2.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	1329	1195.6
Middle	2441	1285	1176.7
High	2480	1261	1206.8


20 dB BANDWIDTH

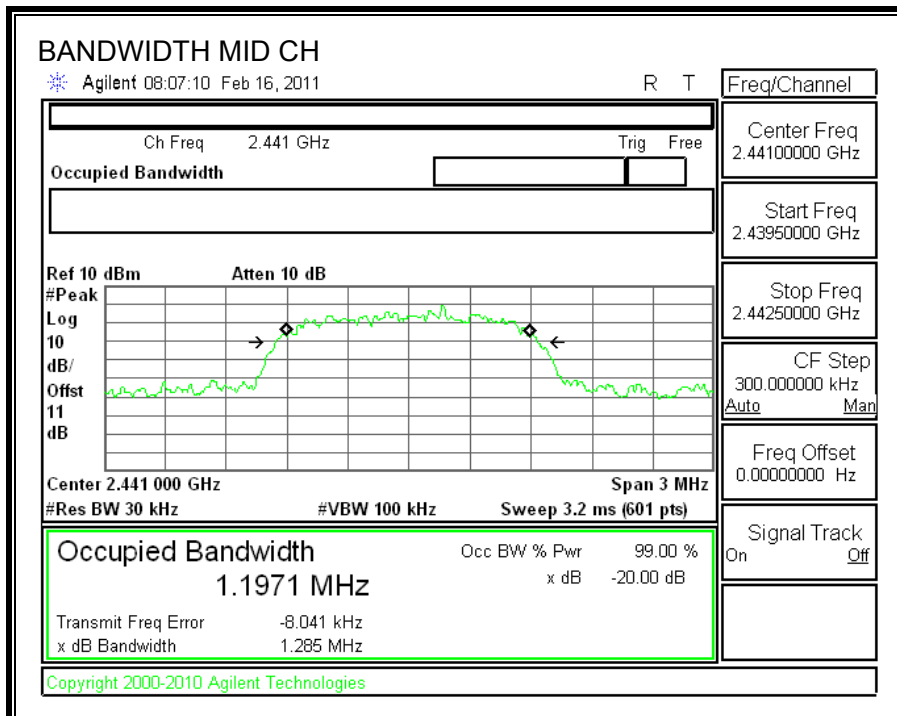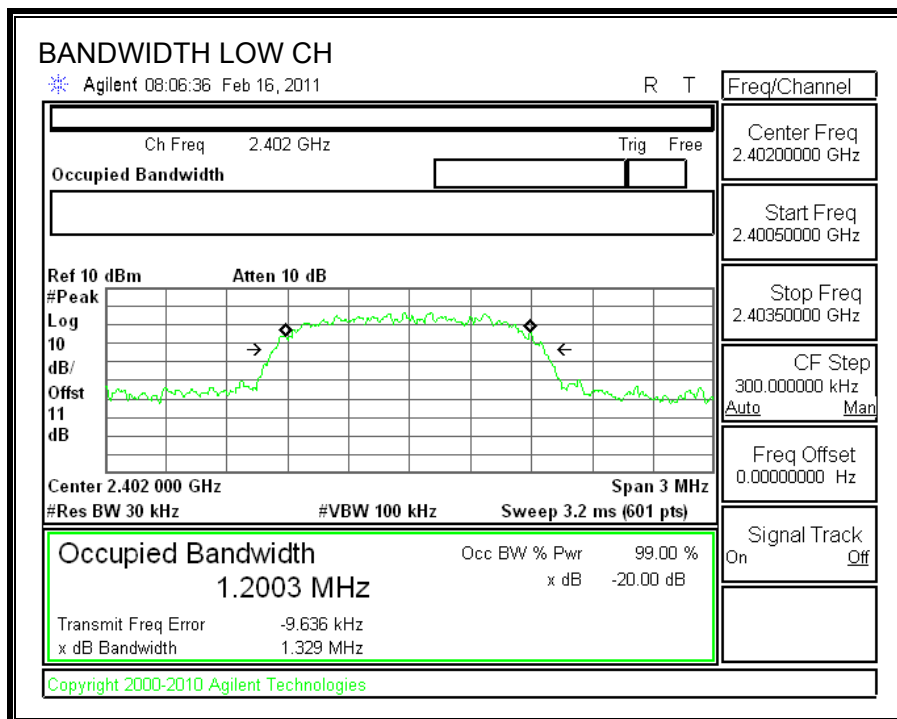

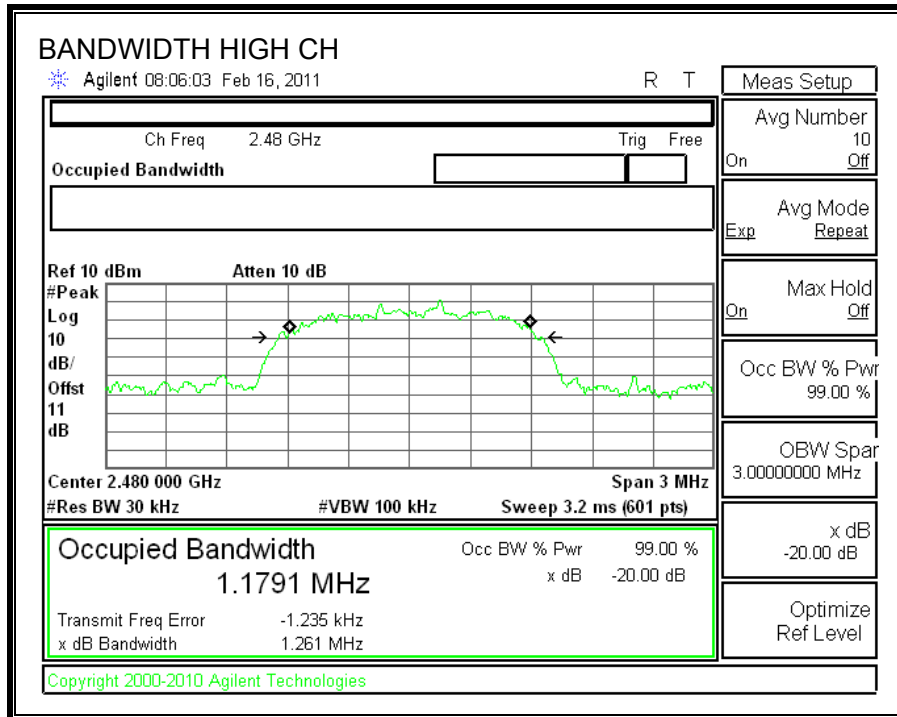

99% BANDWIDTH

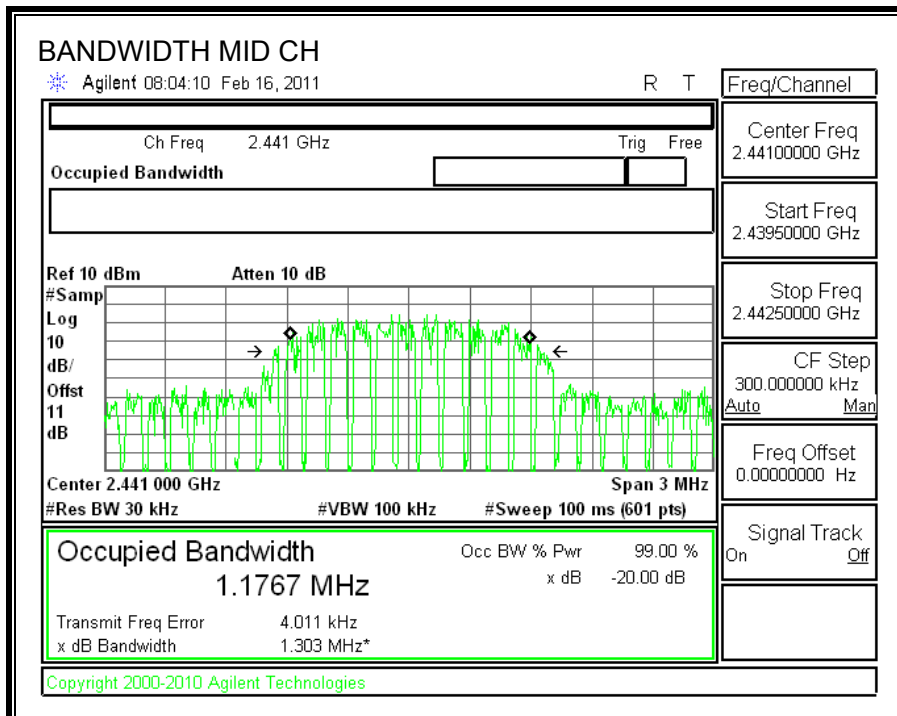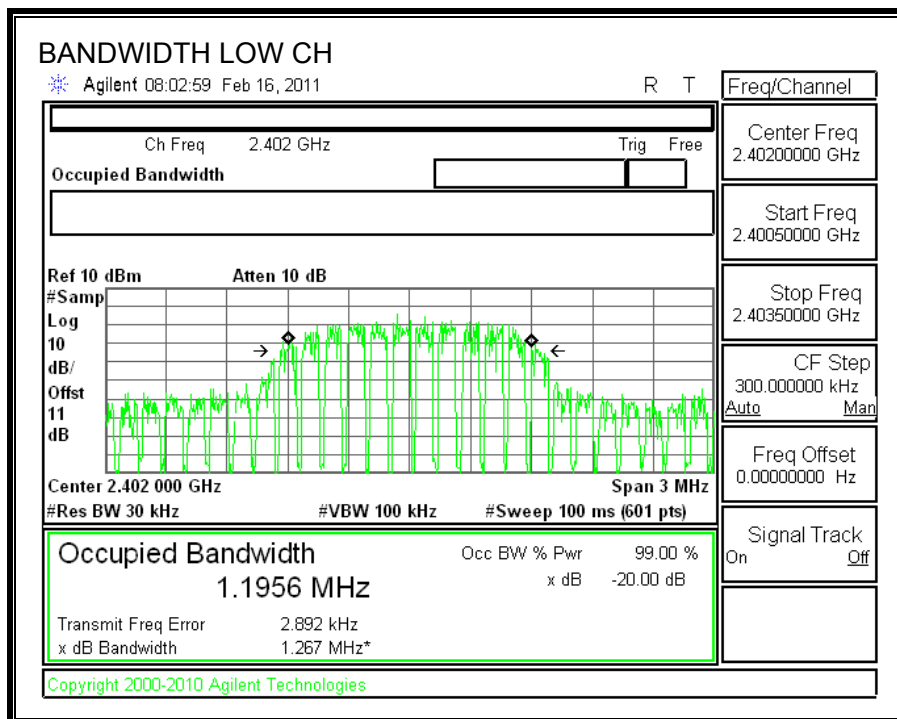

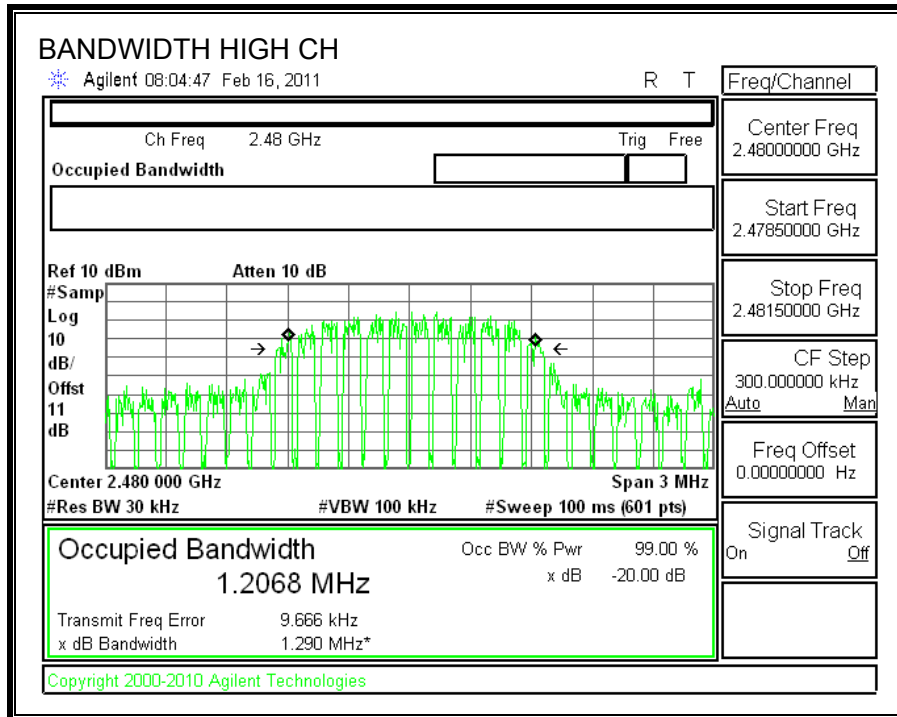

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

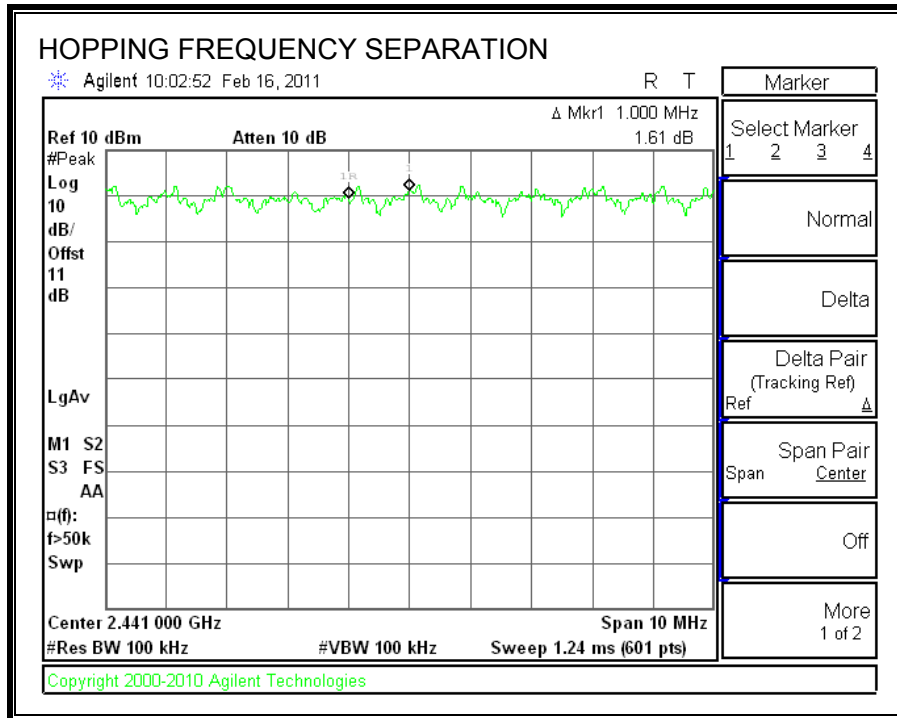

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

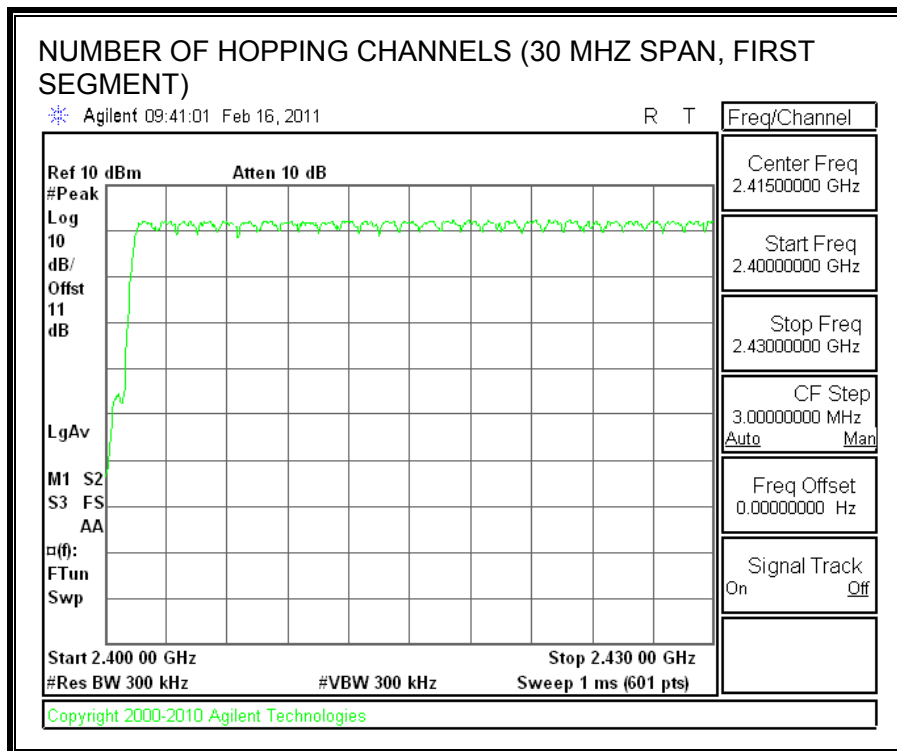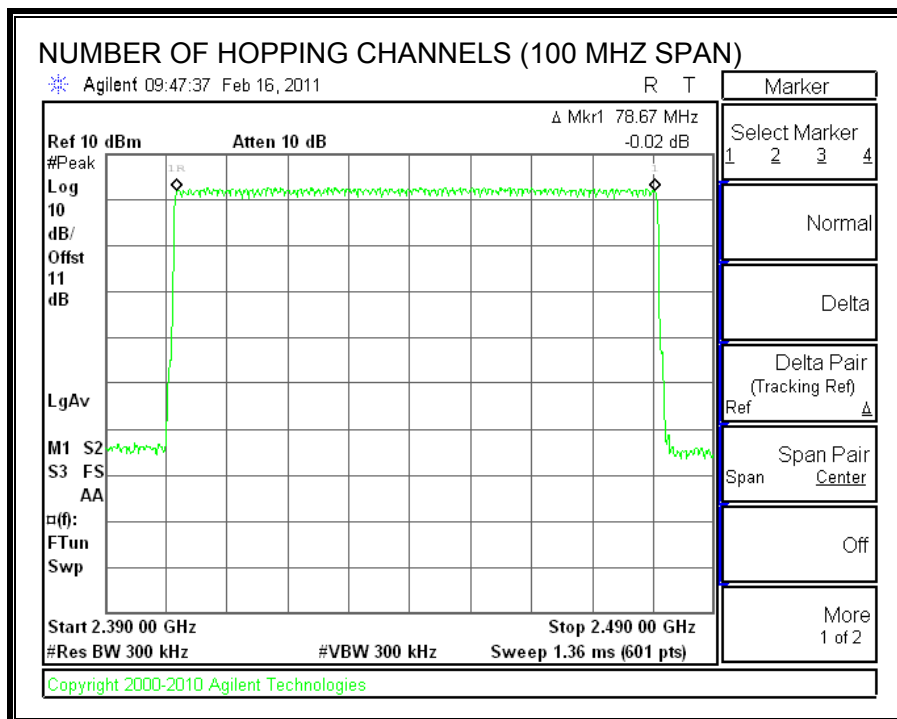

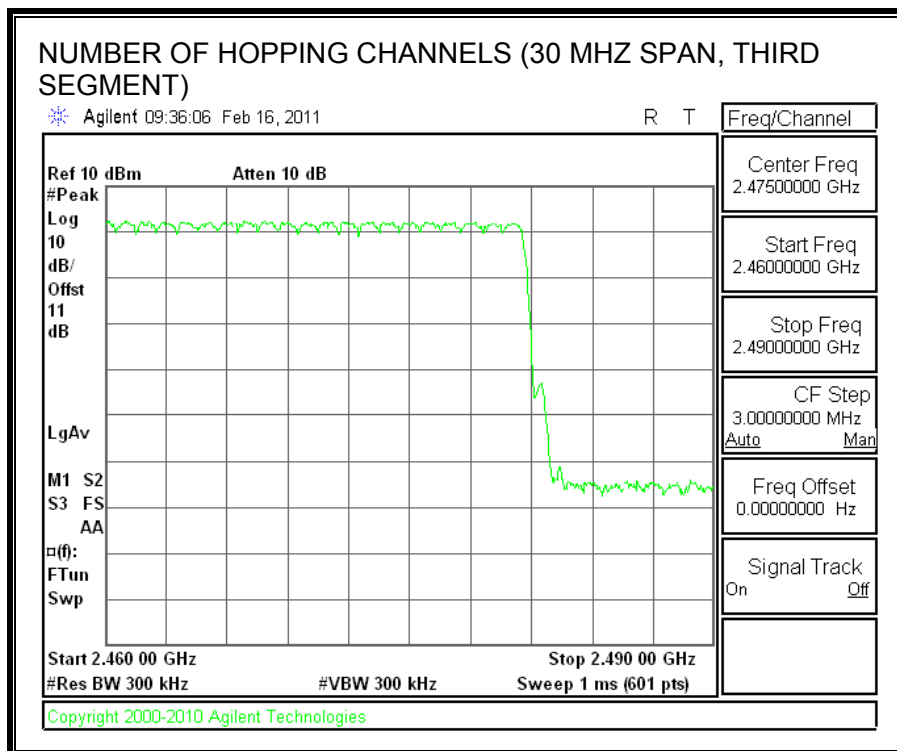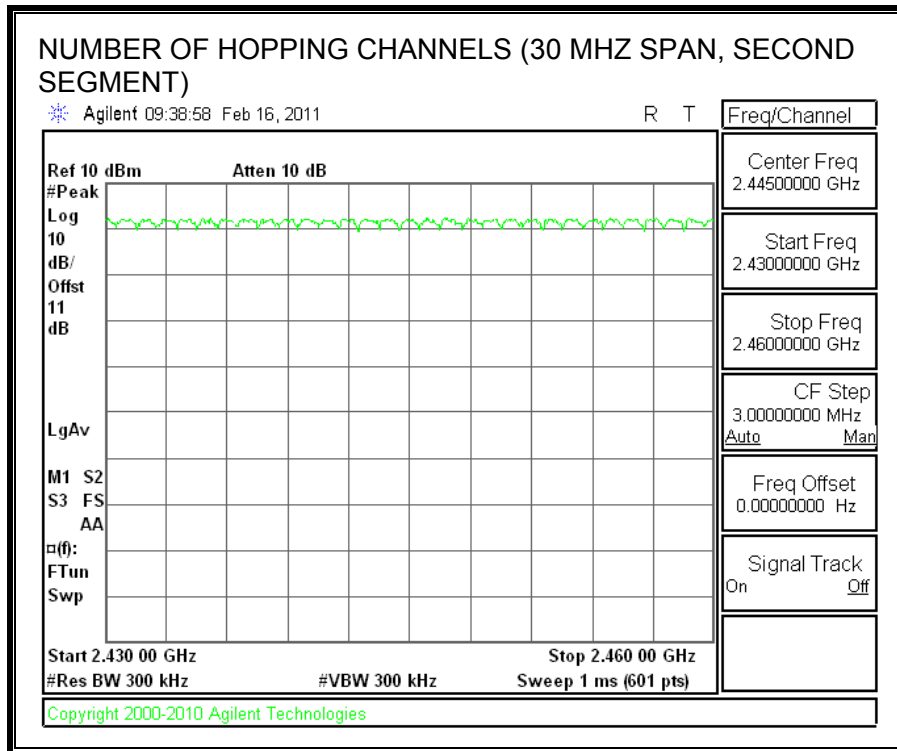

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


RESULTS

8PSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.4571	31	0.142	0.4	0.258
DH3	1.708	15	0.256	0.4	0.144
DH5	2.9	11	0.319	0.4	0.081

DH1

PULSE WIDTH

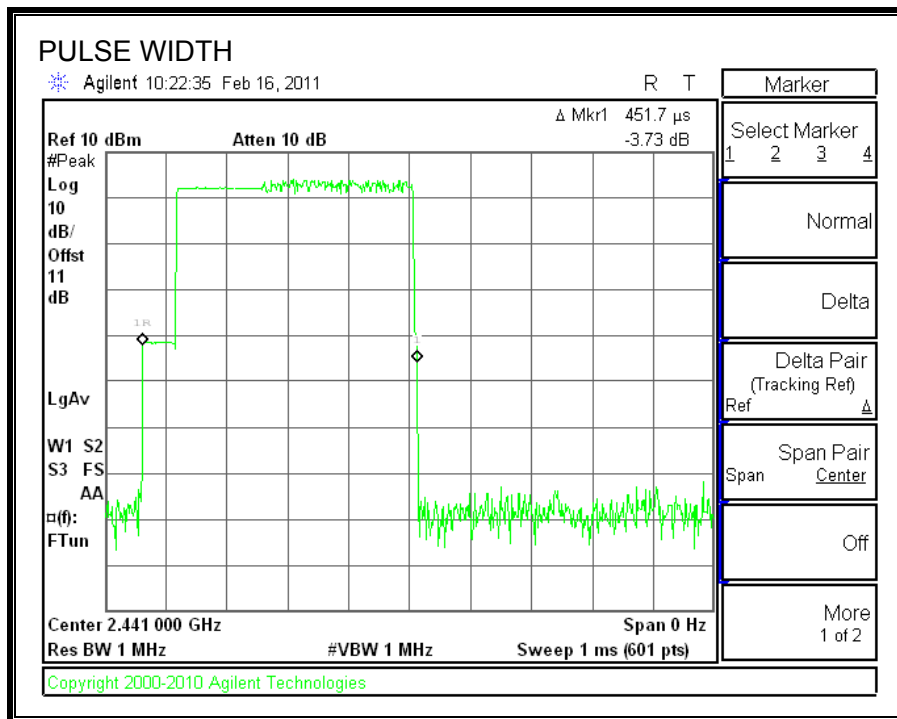


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

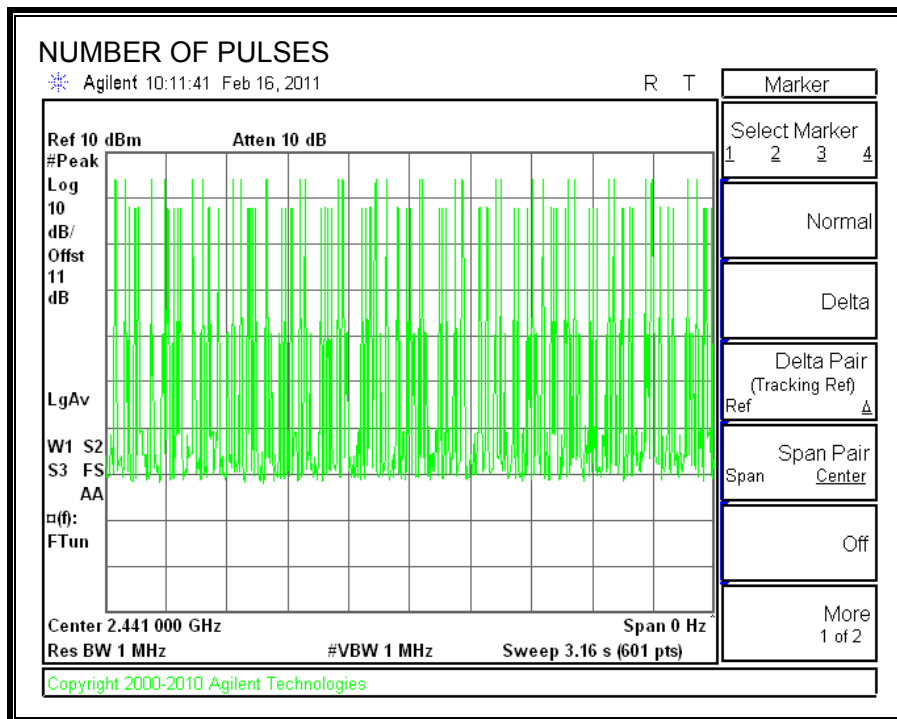


DH3

PULSE WIDTH

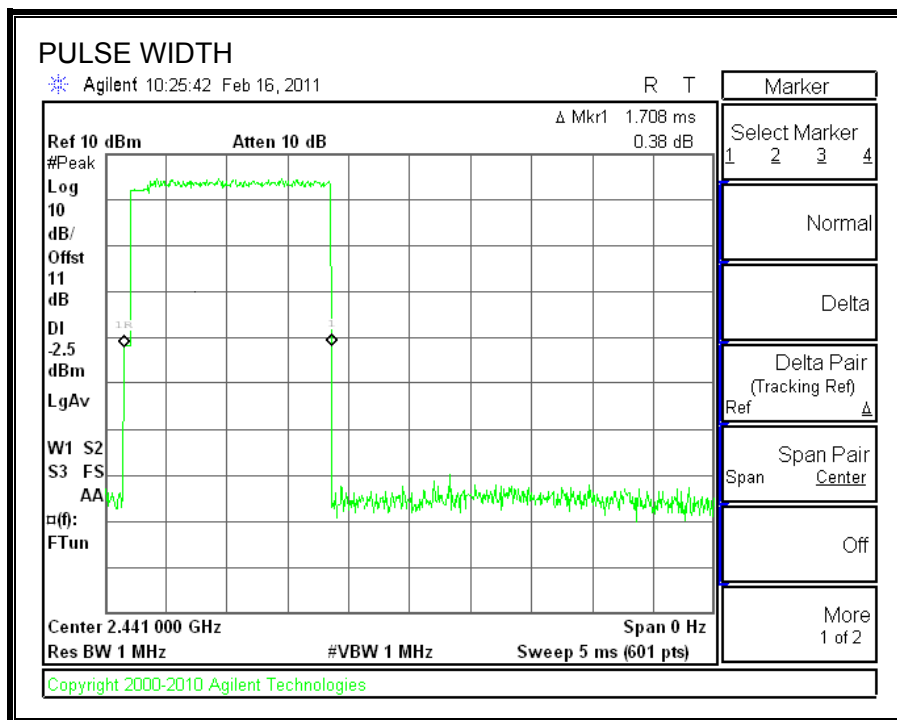


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

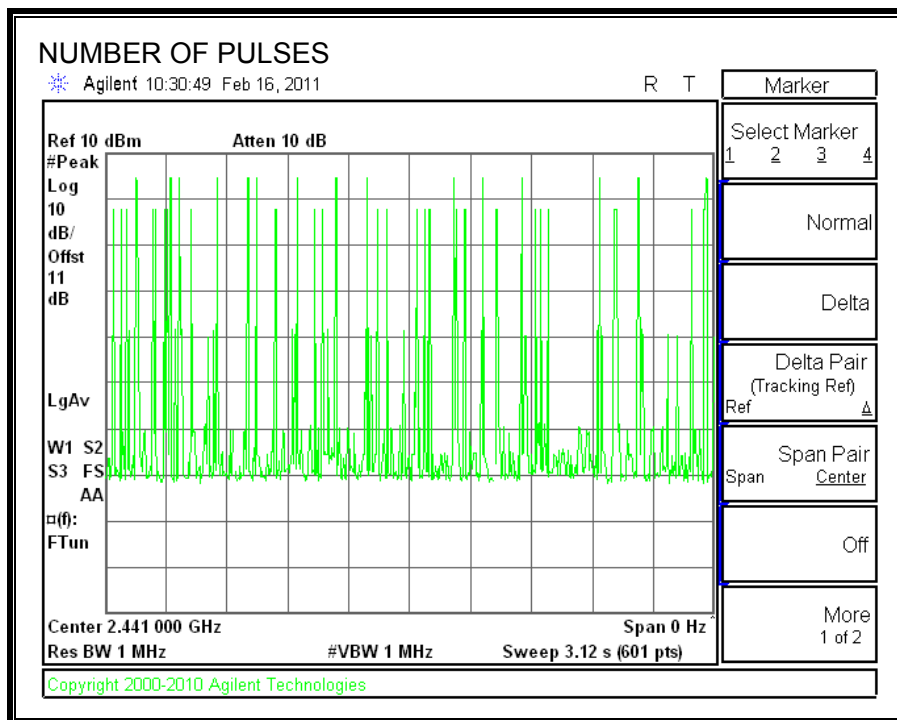


DH5

PULSE WIDTH

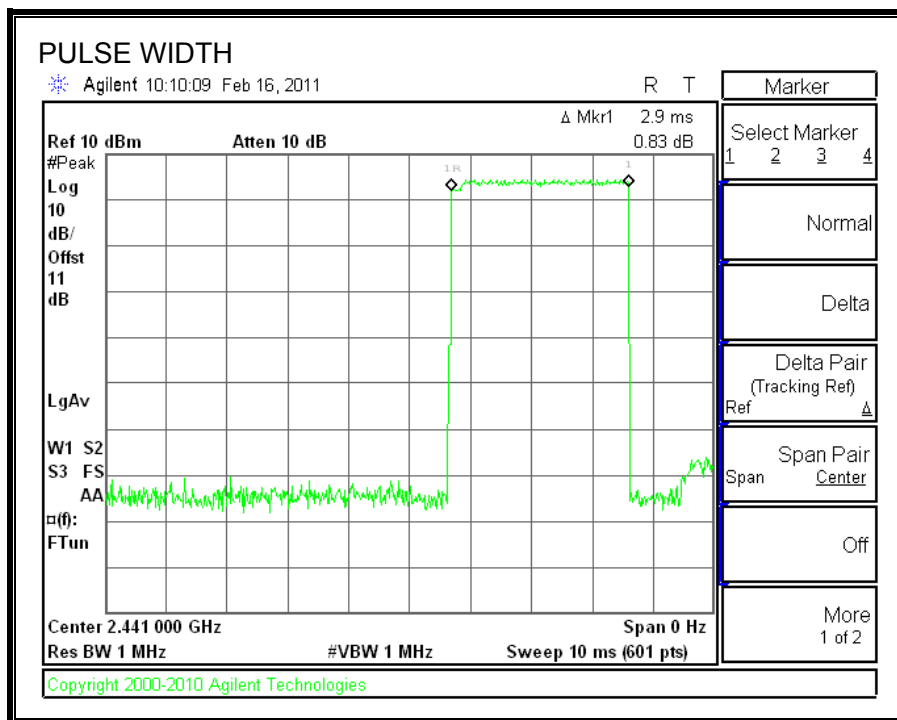

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

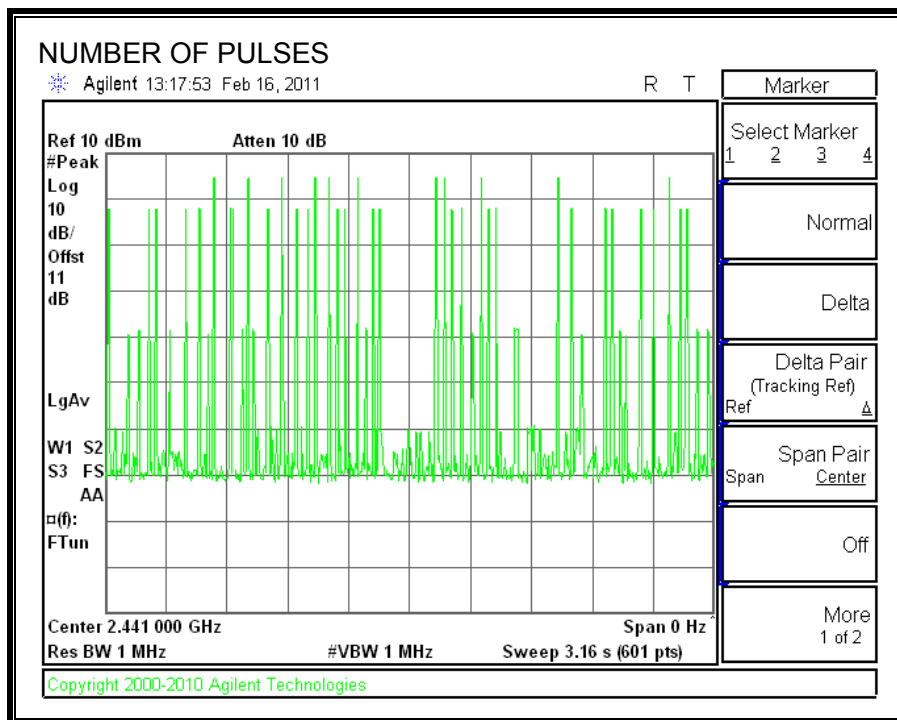

7.2.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	5.16	21	-15.81
Middle	2441	5.07	21	-15.90
High	2480	5.05	21	-15.92

OUTPUT POWER

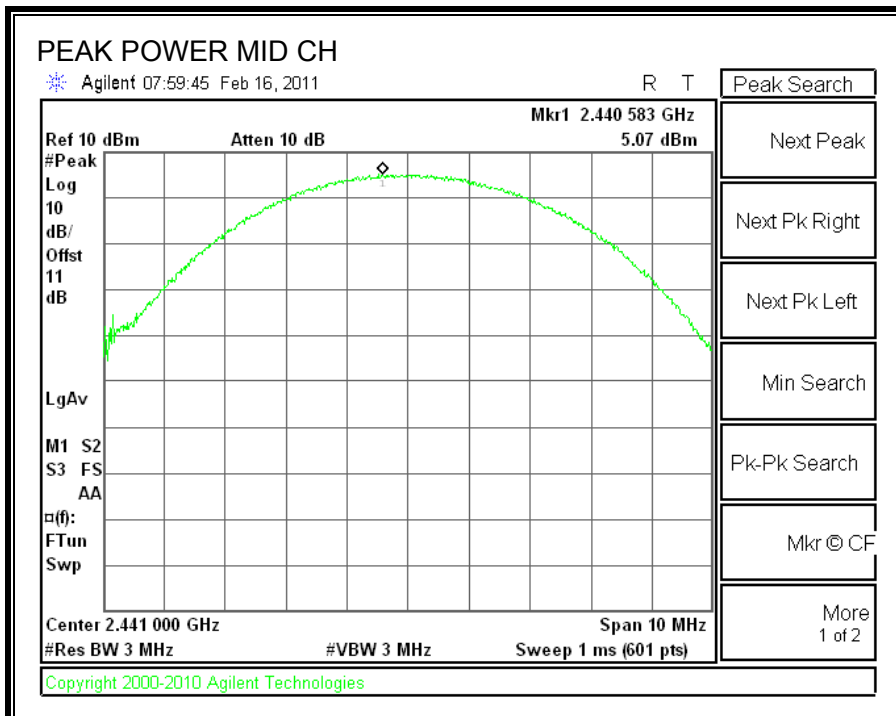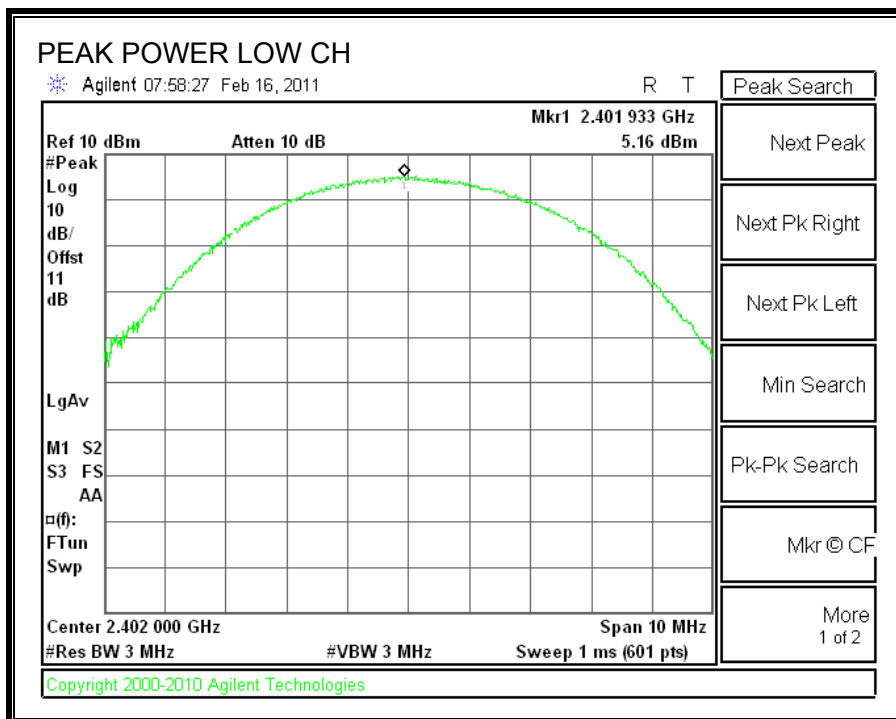

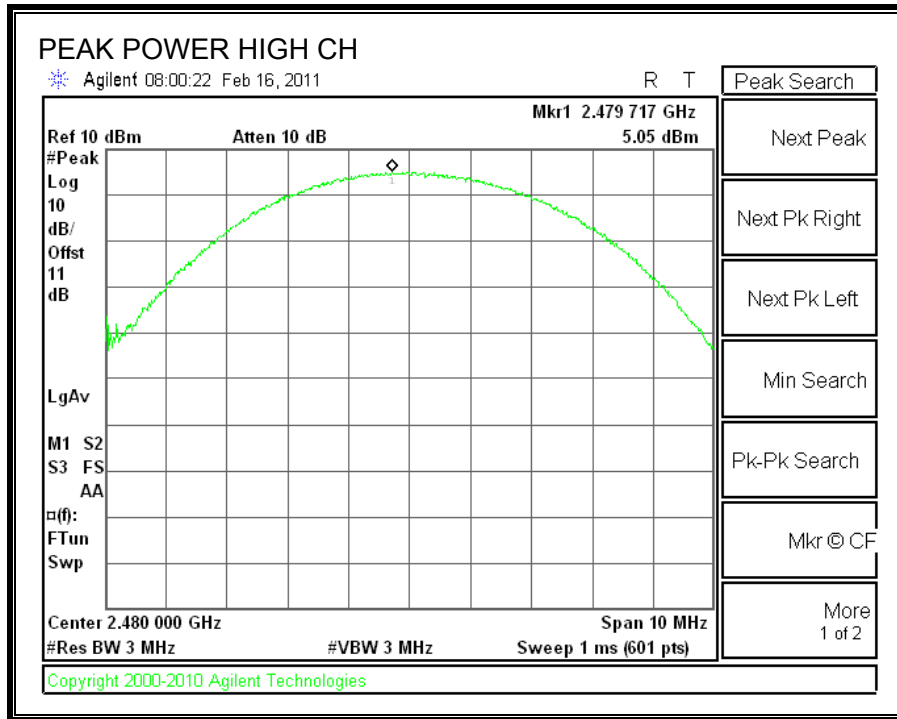

7.2.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1.0 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	0.61
Middle	2441	0.75
High	2480	0.63

7.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

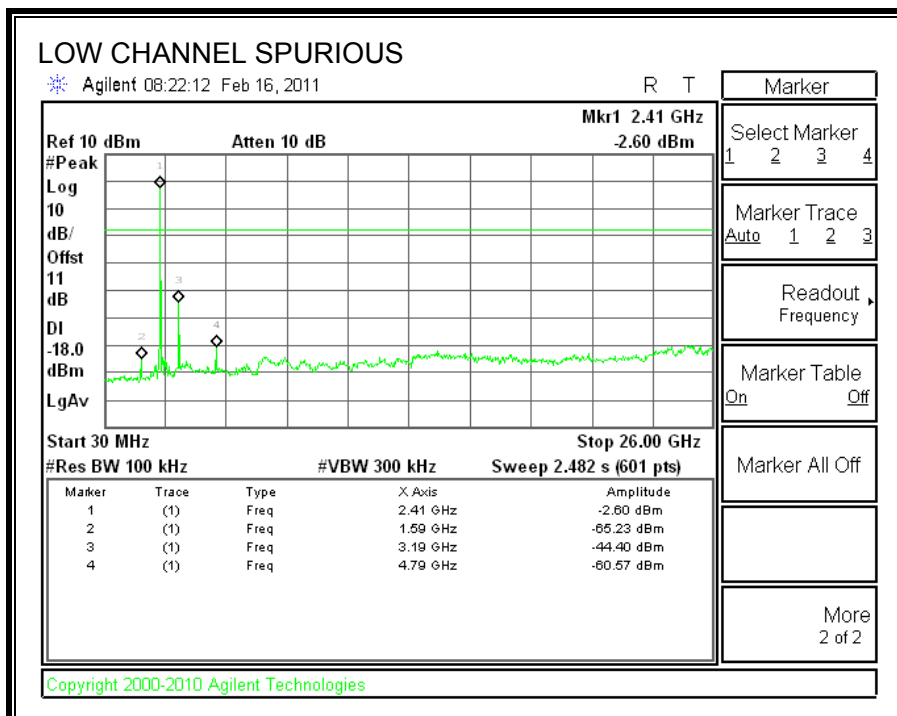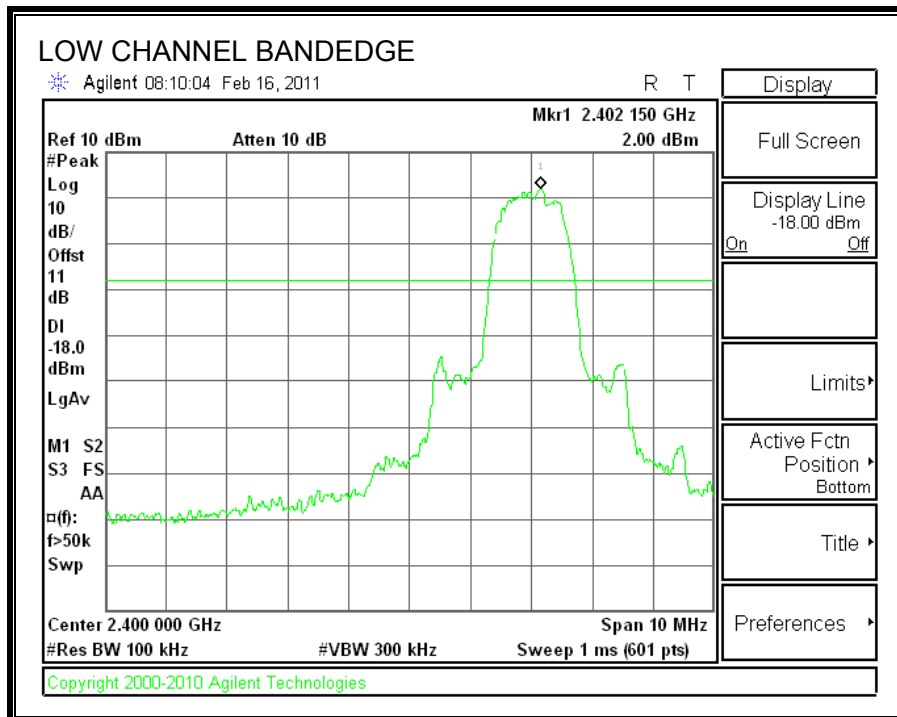



SPURIOUS EMISSIONS, MID CHANNEL

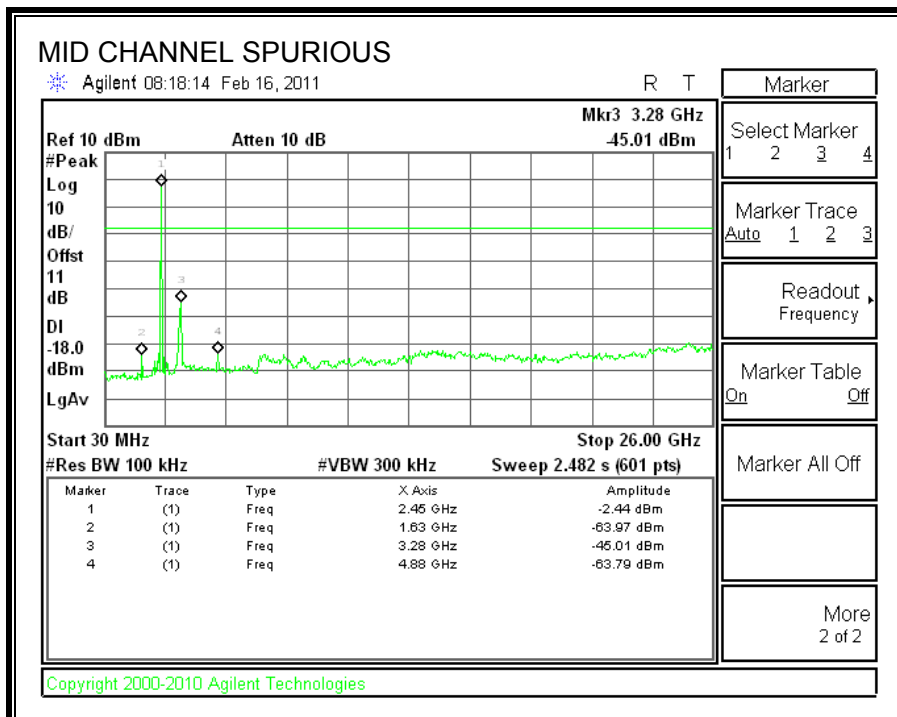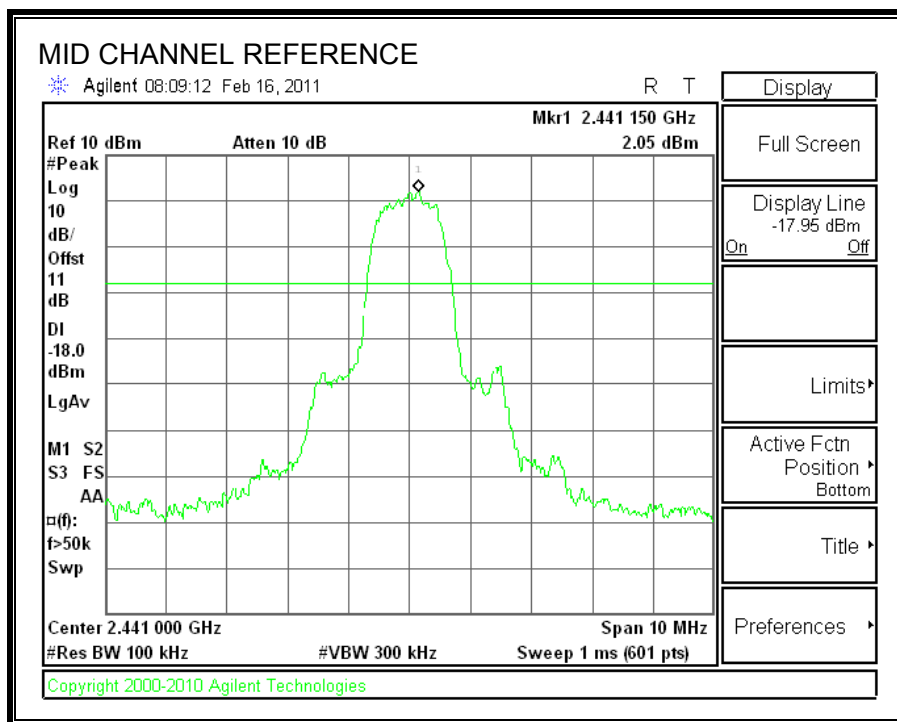

SPURIOUS EMISSIONS, HIGH CHANNEL

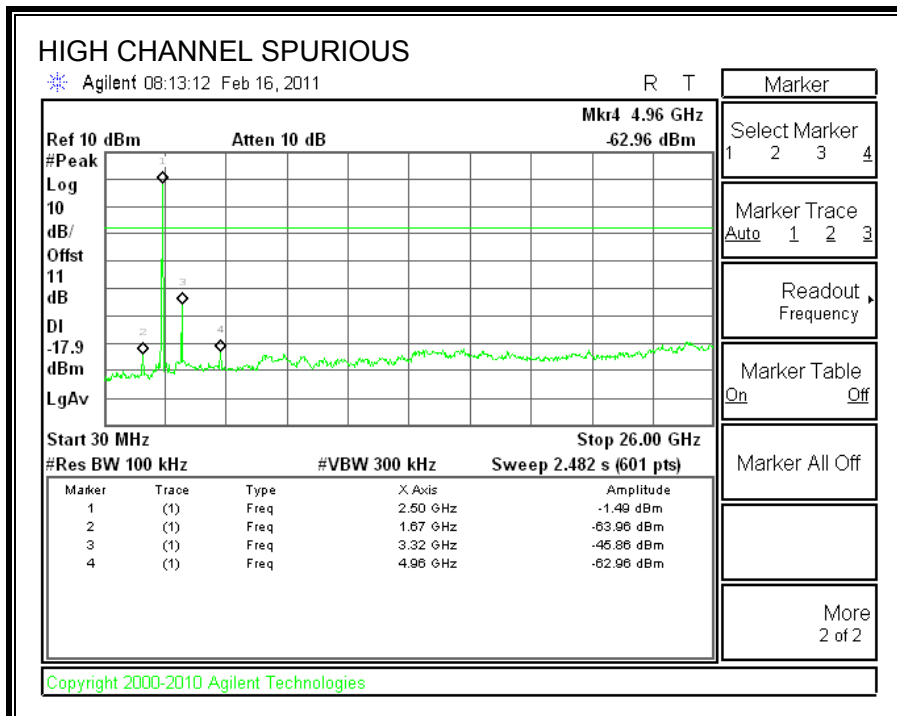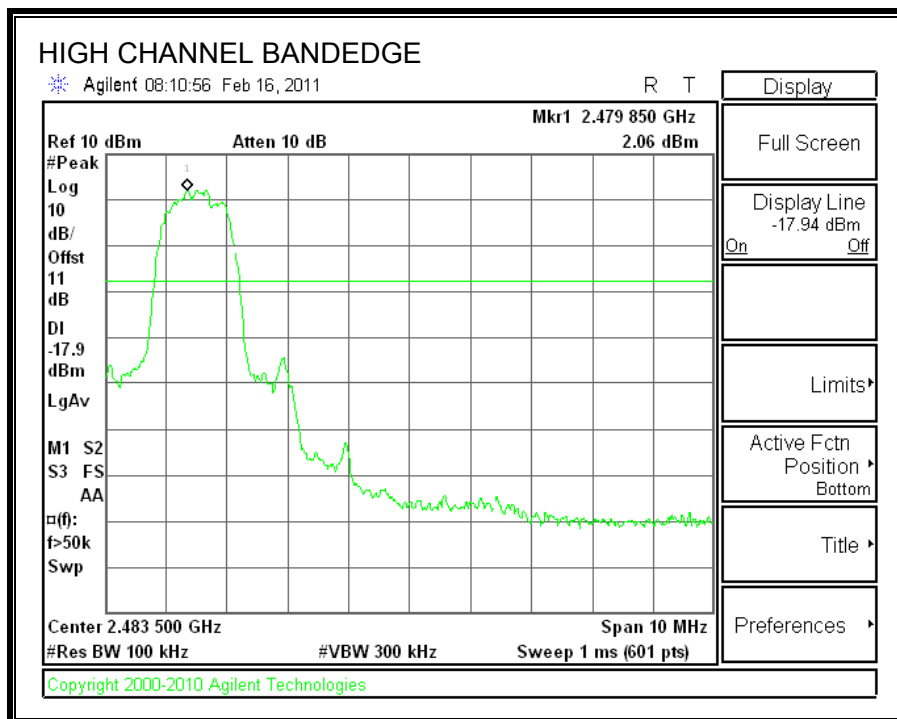

SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON

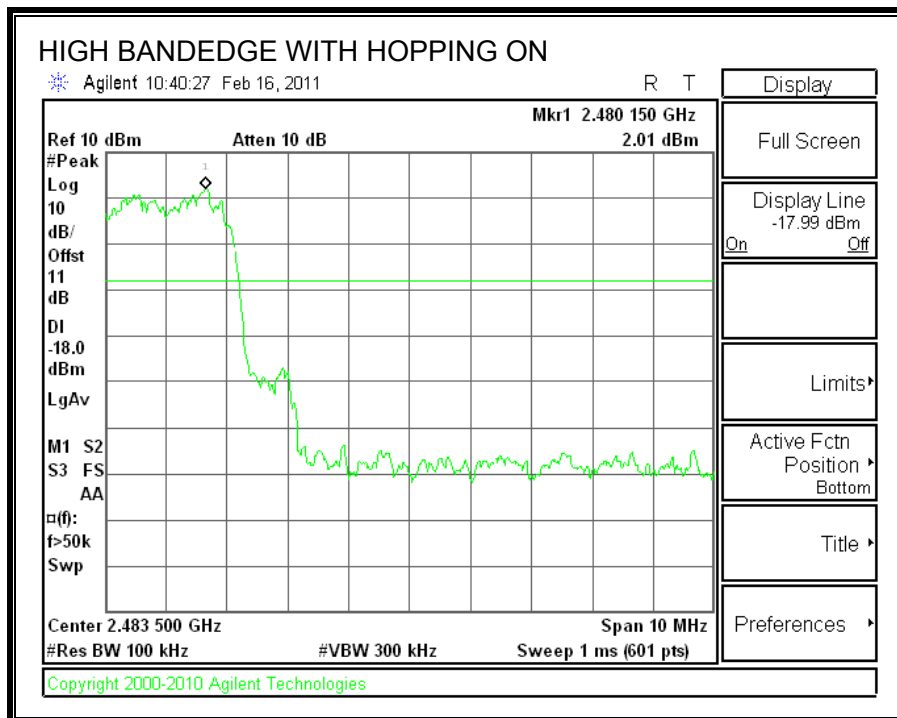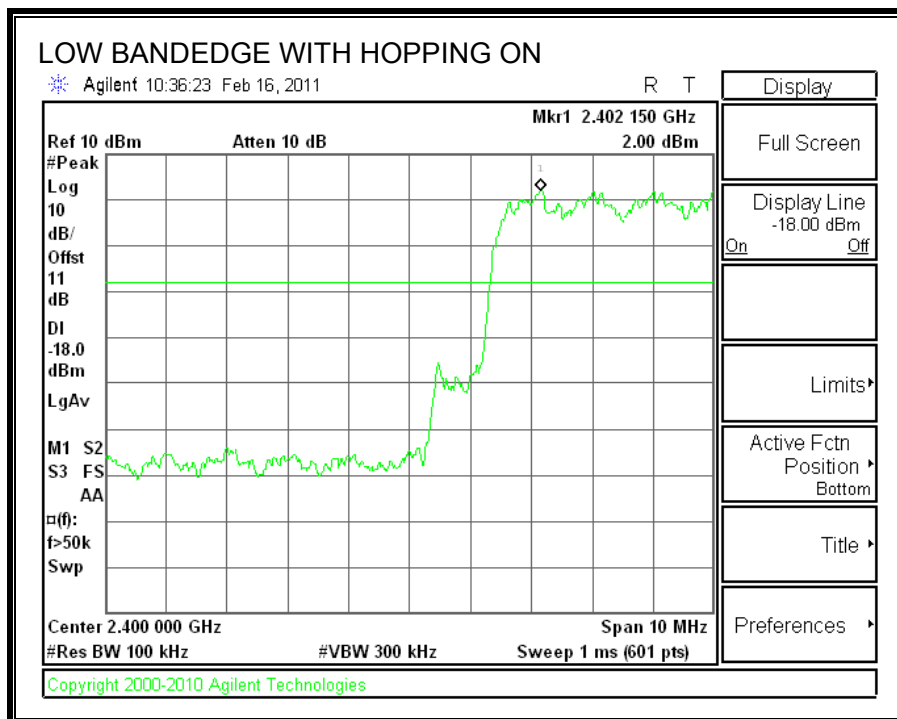

7.3. LE GFSK MODULATION

7.3.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.115	1.027
Middle	2440	1.115	1.038
High	2480	1.113	1.035


20 dB BANDWIDTH

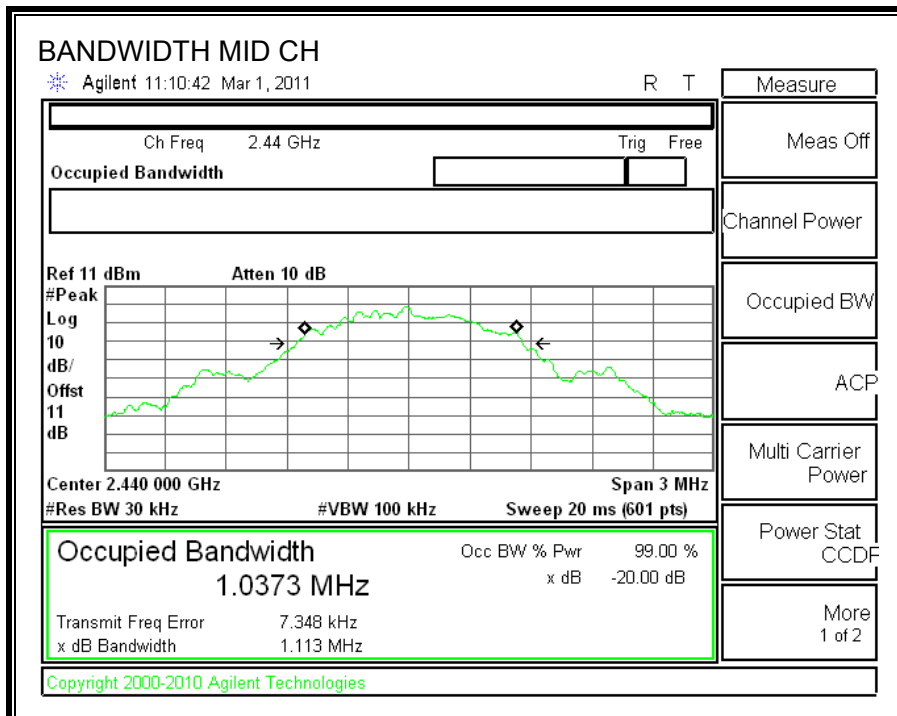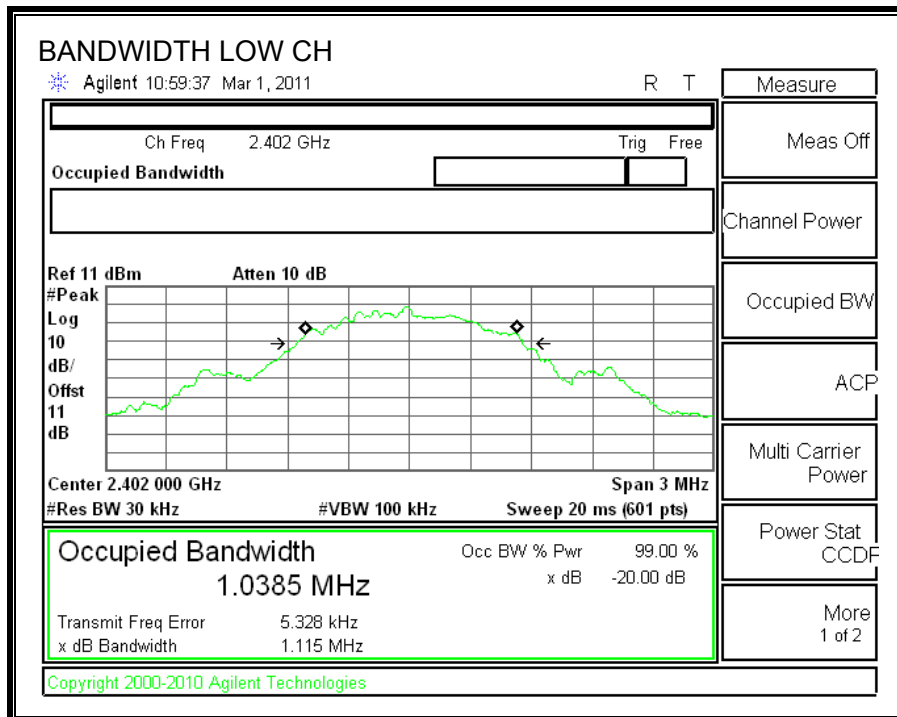

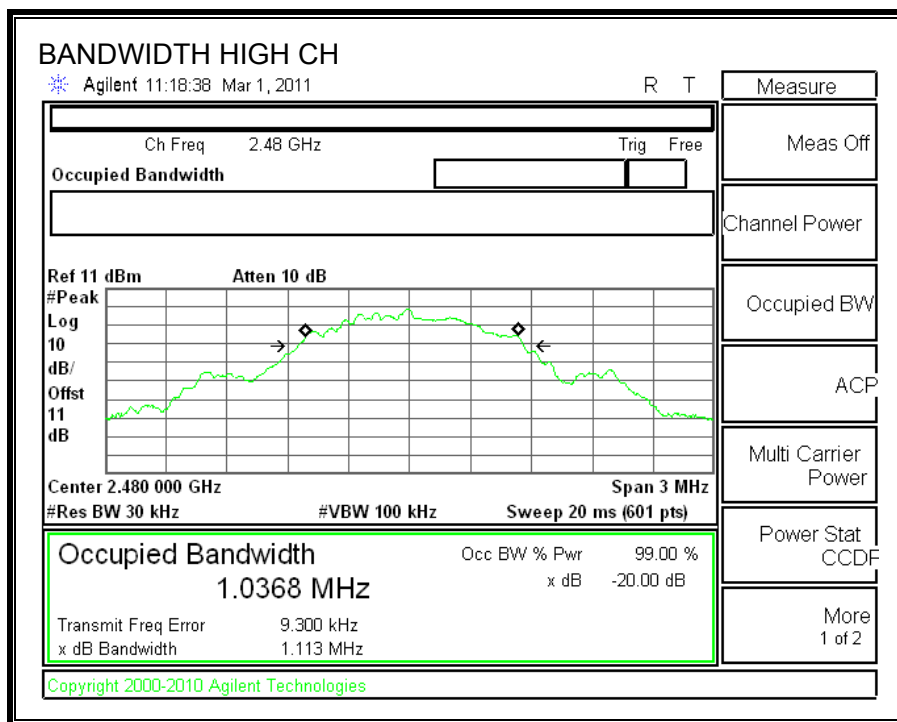

99% BANDWIDTH

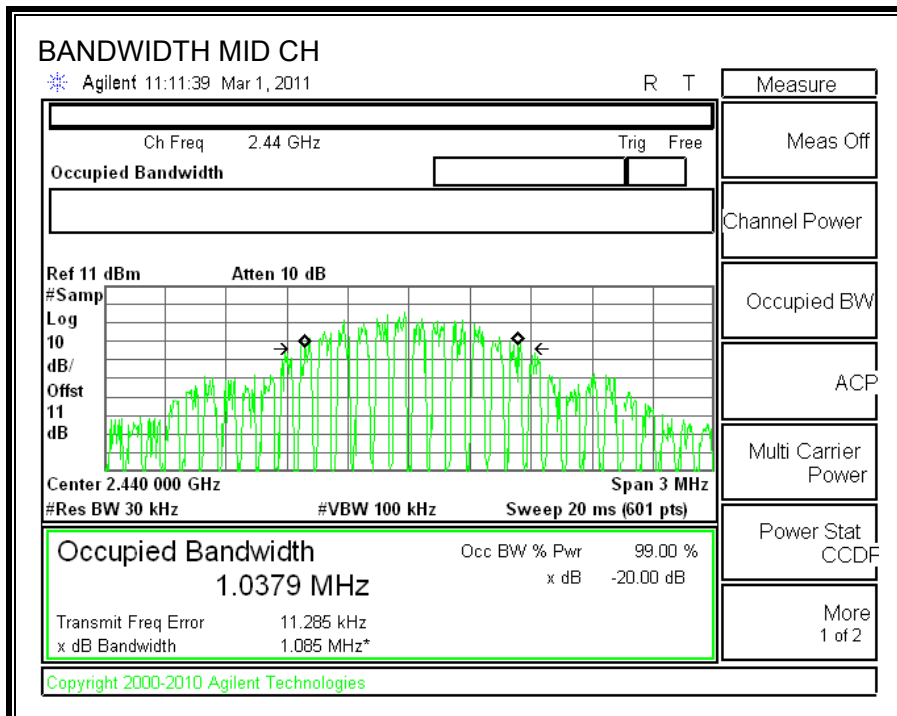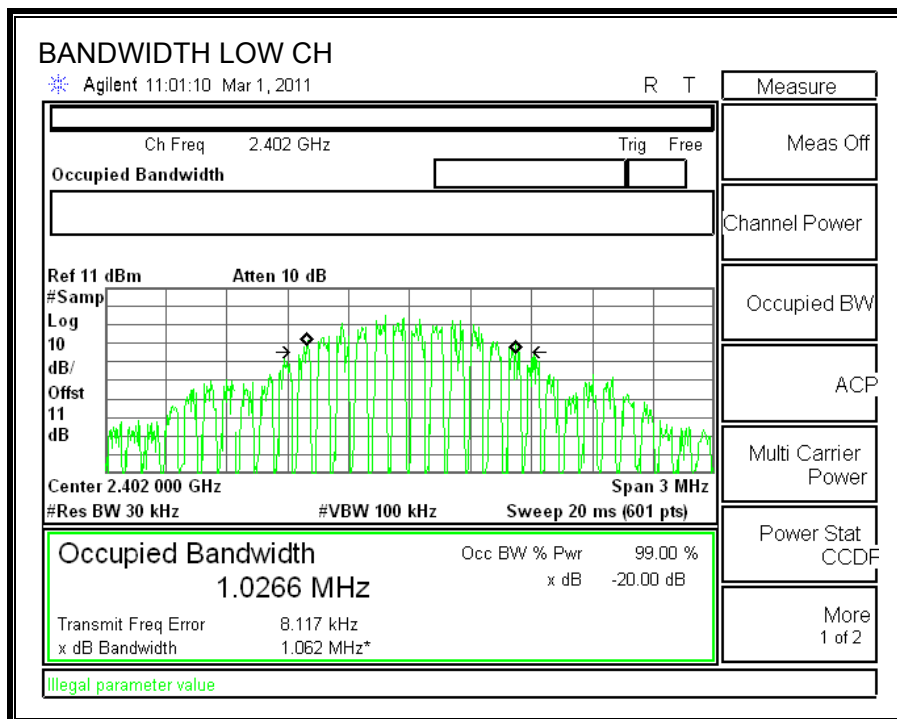

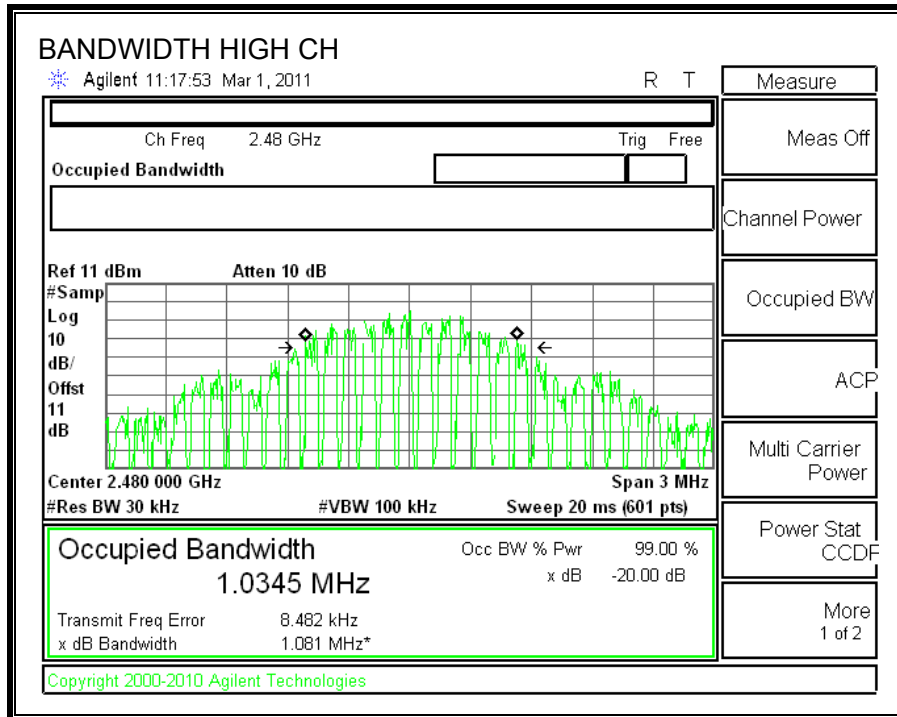

7.3.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

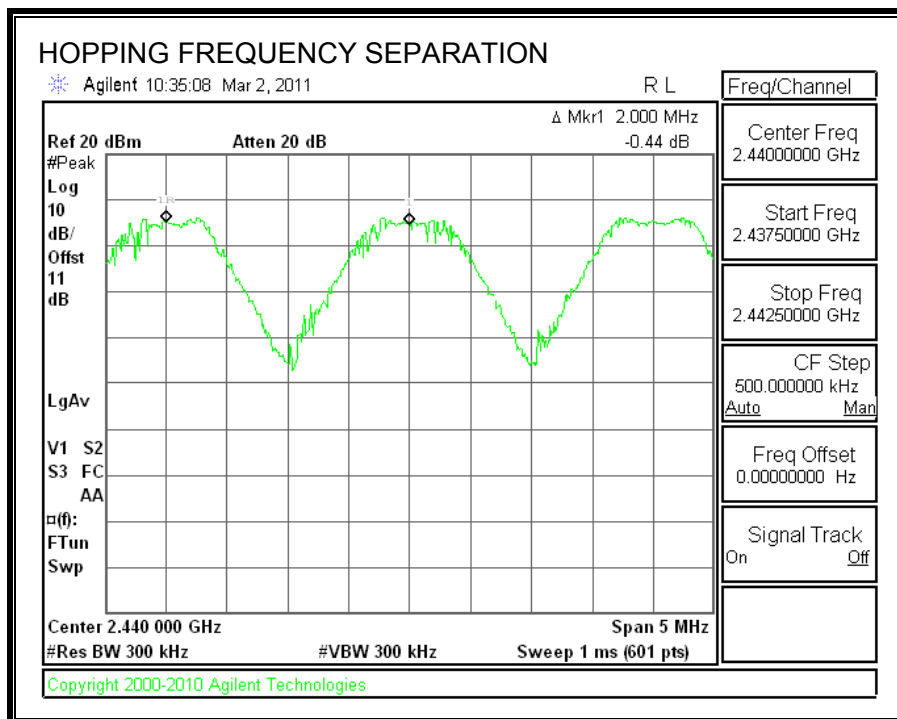

7.3.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

40 Channels observed, missing three channels at 2402, 2426 and 2480MHz for advertising.

NUMBER OF HOPPING CHANNELS

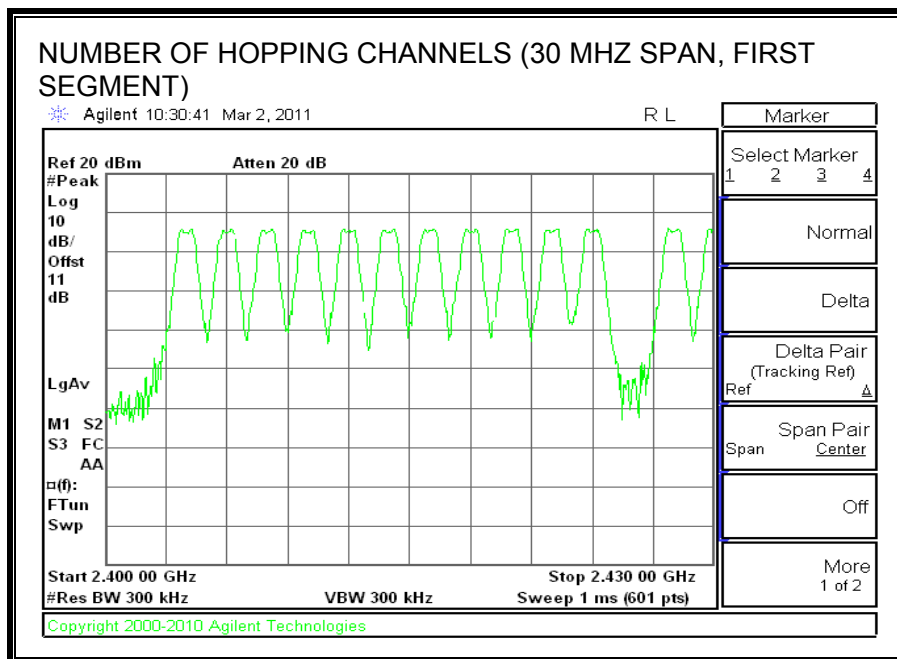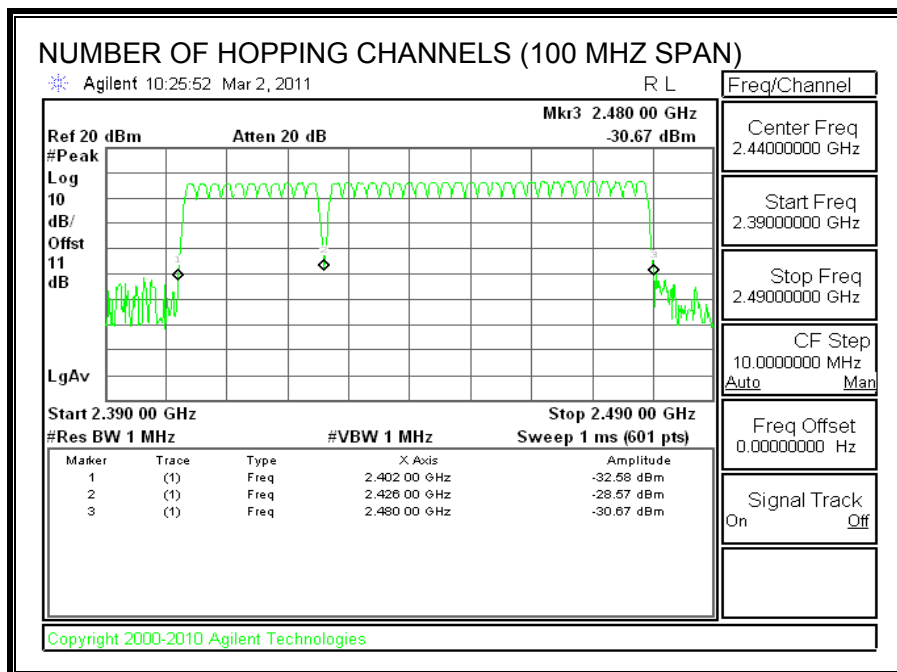

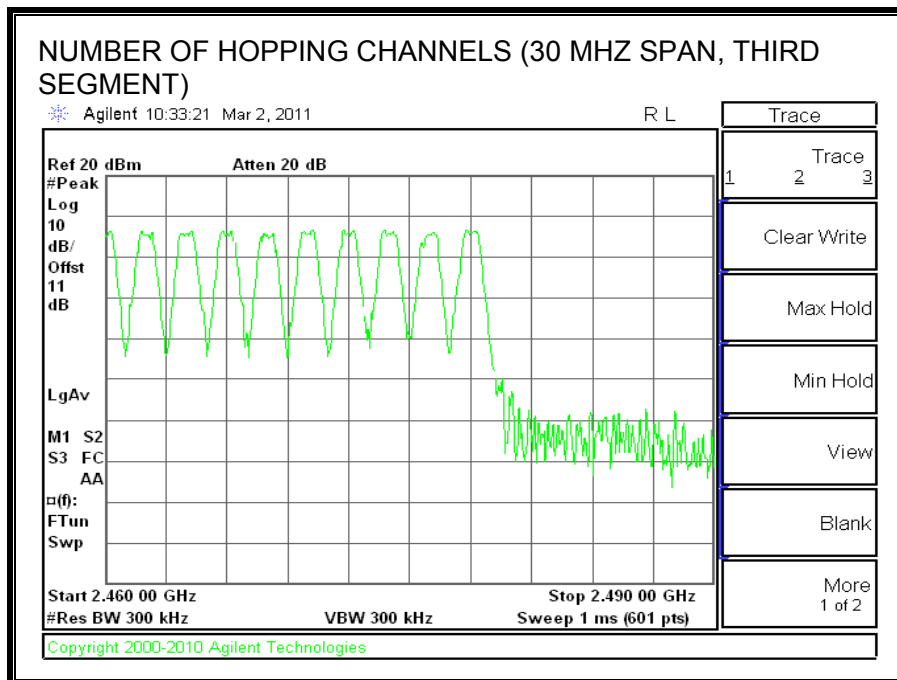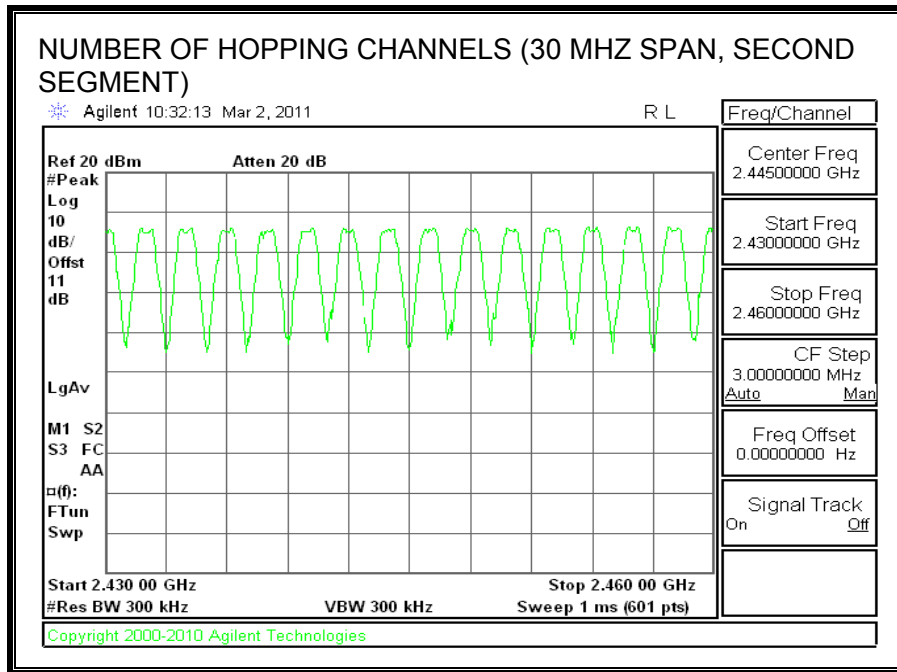

7.3.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 1.6 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 1.6 second period (39 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 1.6 \text{ s}) * \text{ pulse width}$.


RESULTS

Time Of Occupancy = 7 pulses * 2.642-(1.59 *4) msec = 2.0036 msec


LE Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 1.6 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
LE Mode	2.0036	7	0.140	0.4	0.260


PULSE WIDTH (On Time)

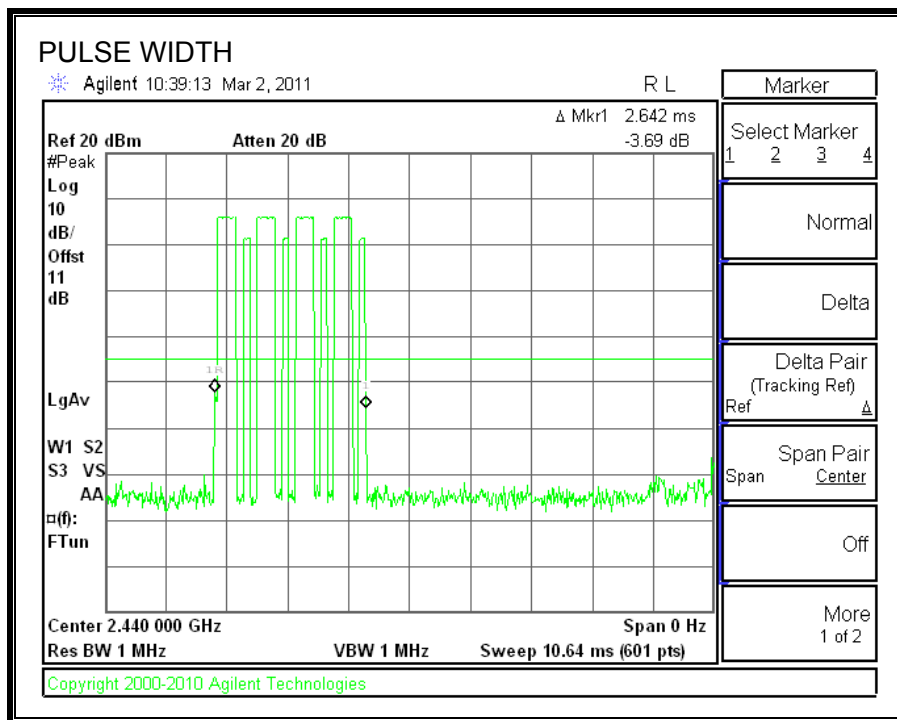

OFF TIME

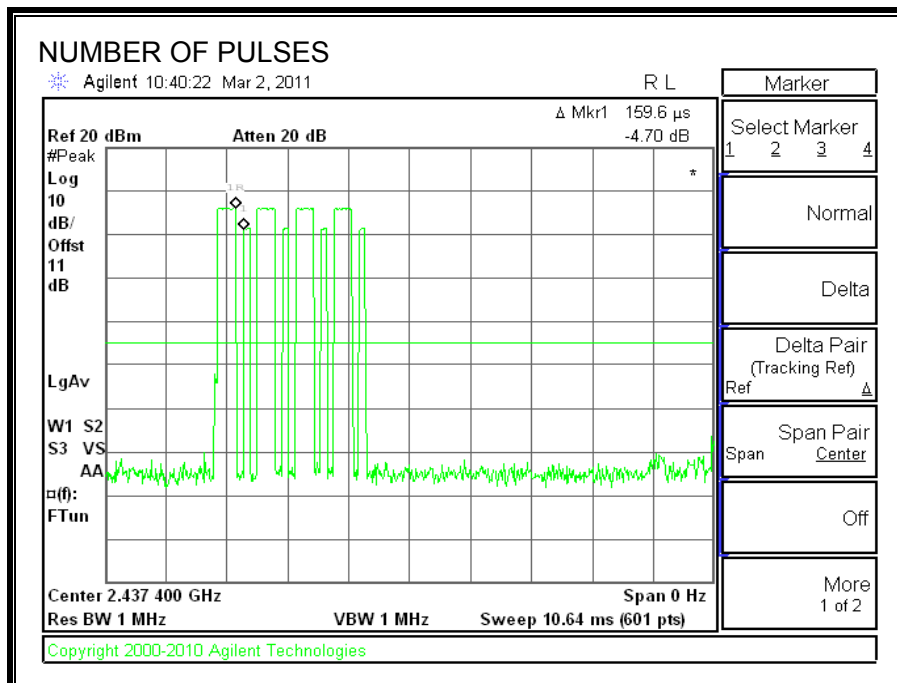

NUMBER OF PULSES IN 1.6 SECOND OBSERVATION PERIOD

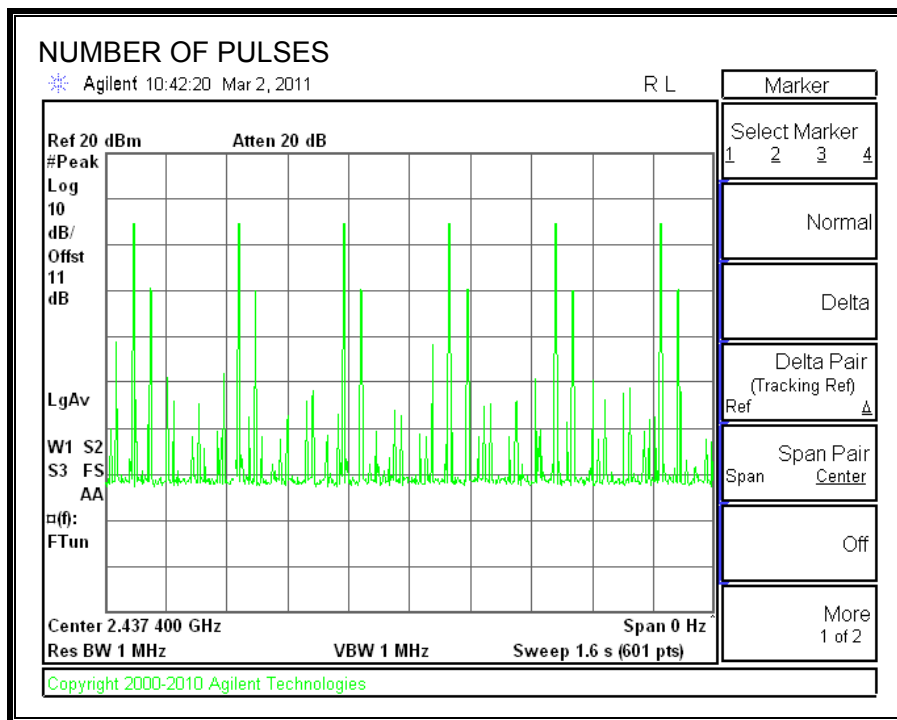

7.3.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	2.30	30	-27.70
Middle	2440	2.37	30	-27.63
High	2480	2.33	30	-27.67

OUTPUT POWER

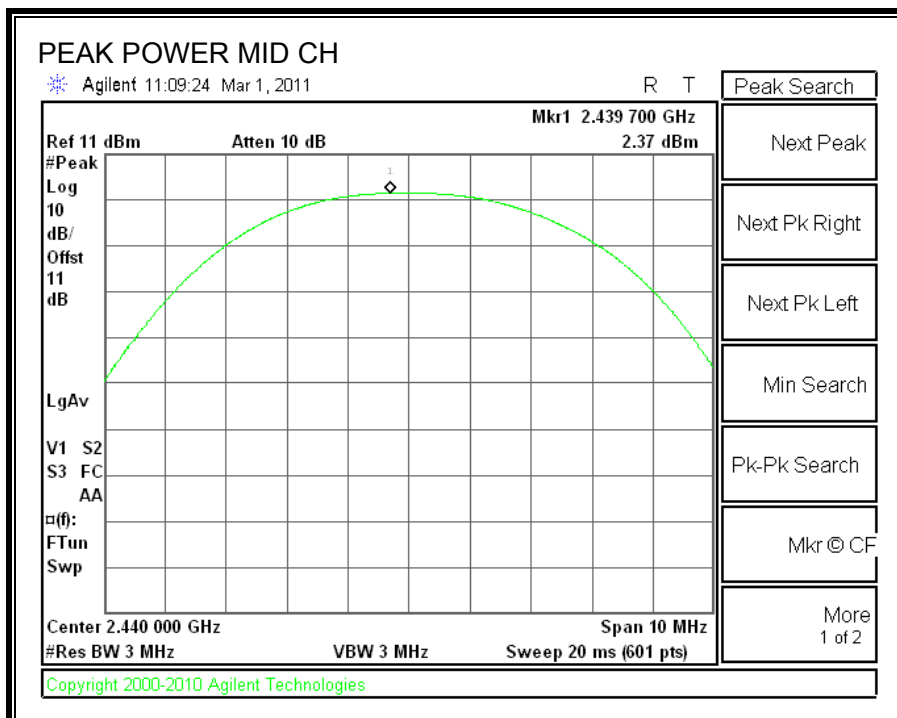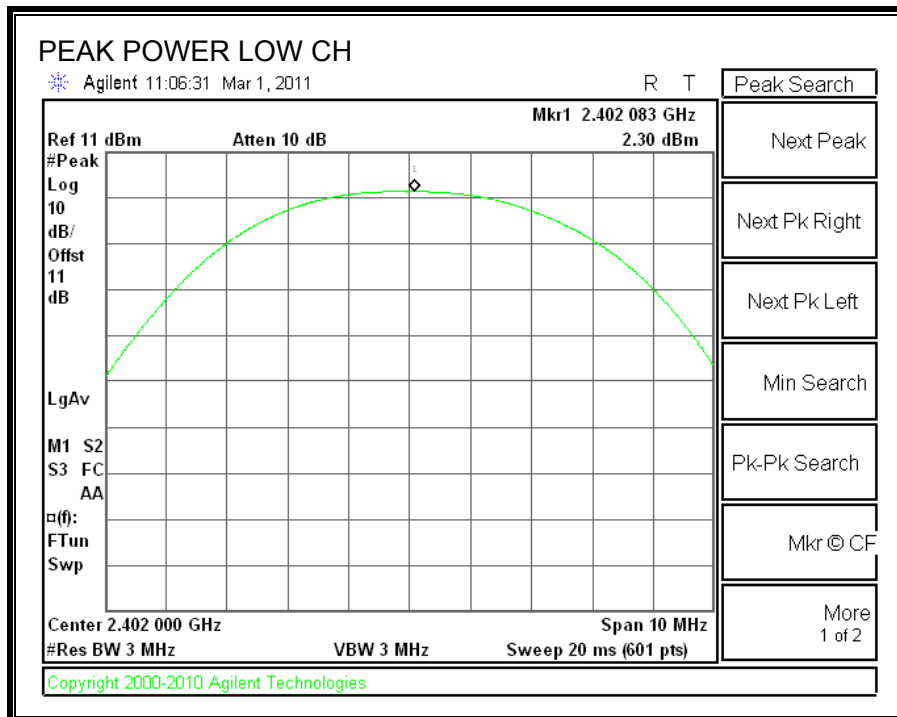

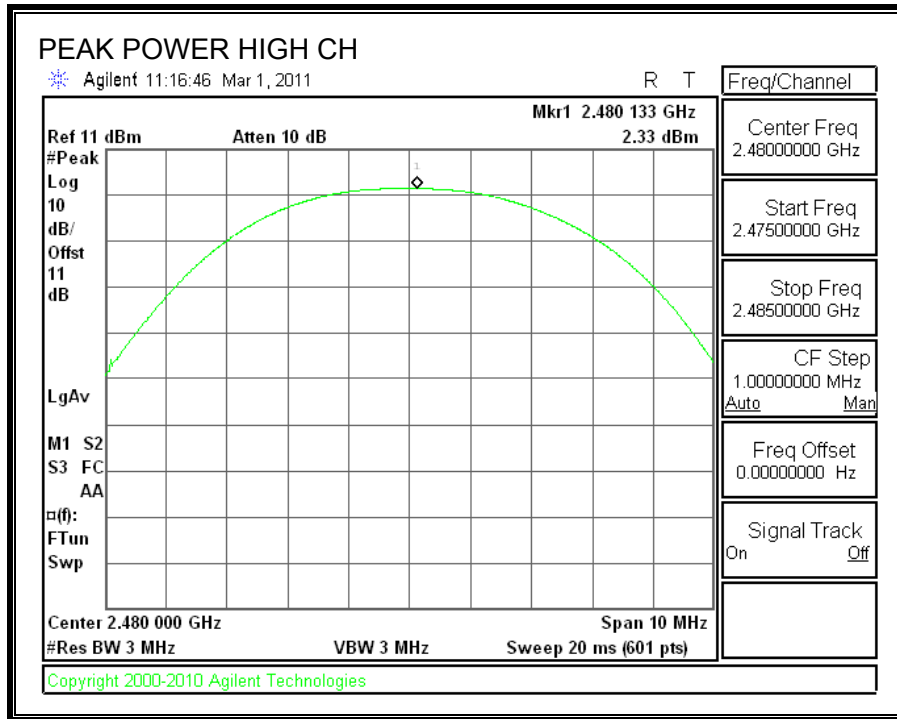

7.3.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	2.15
Middle	2440	2.25
High	2480	2.18

7.3.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

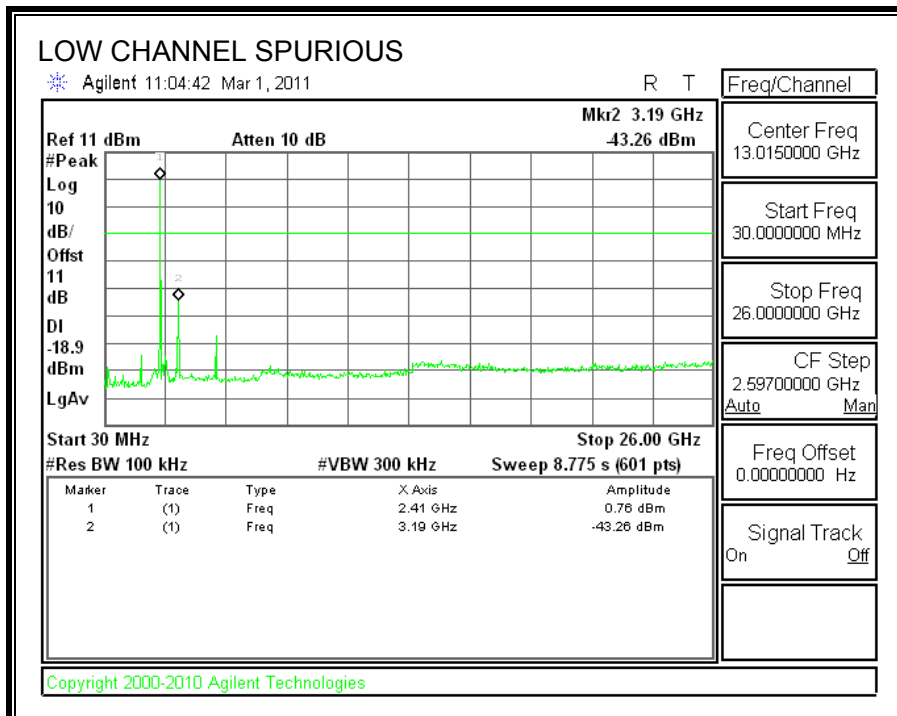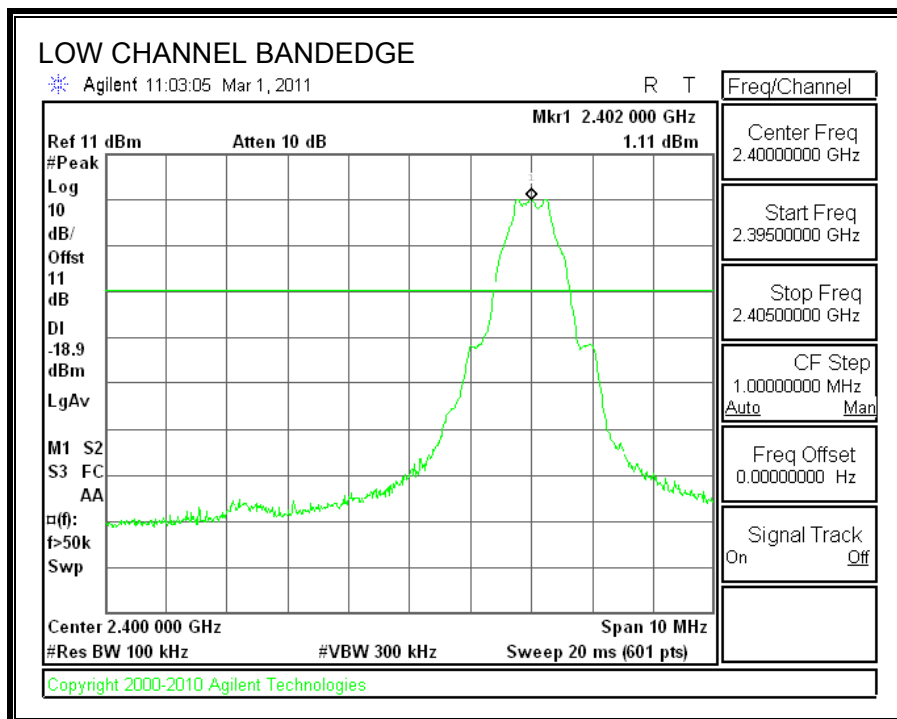



SPURIOUS EMISSIONS, MID CHANNEL

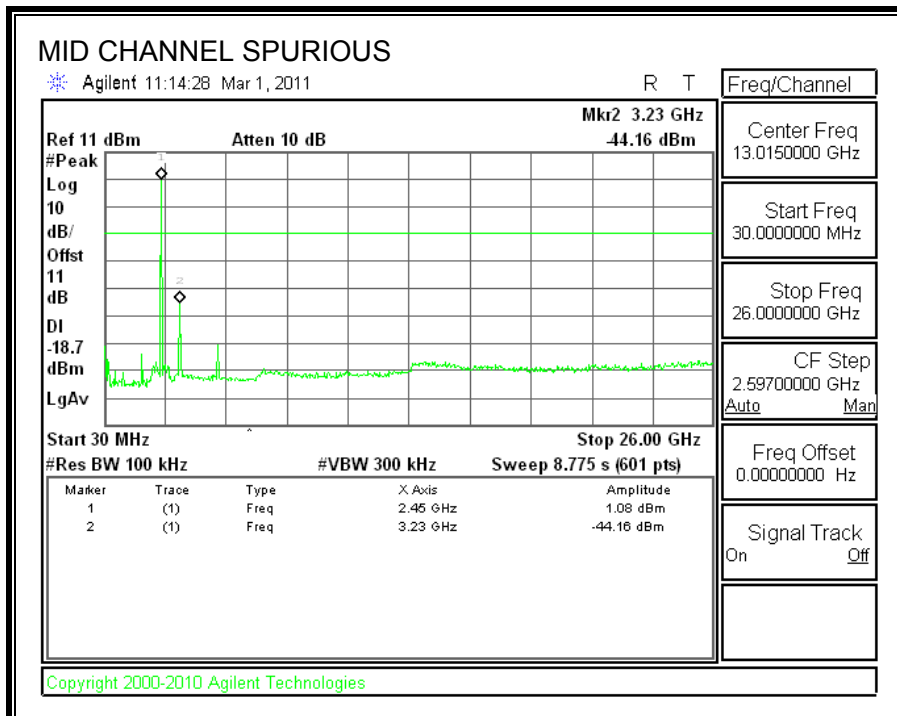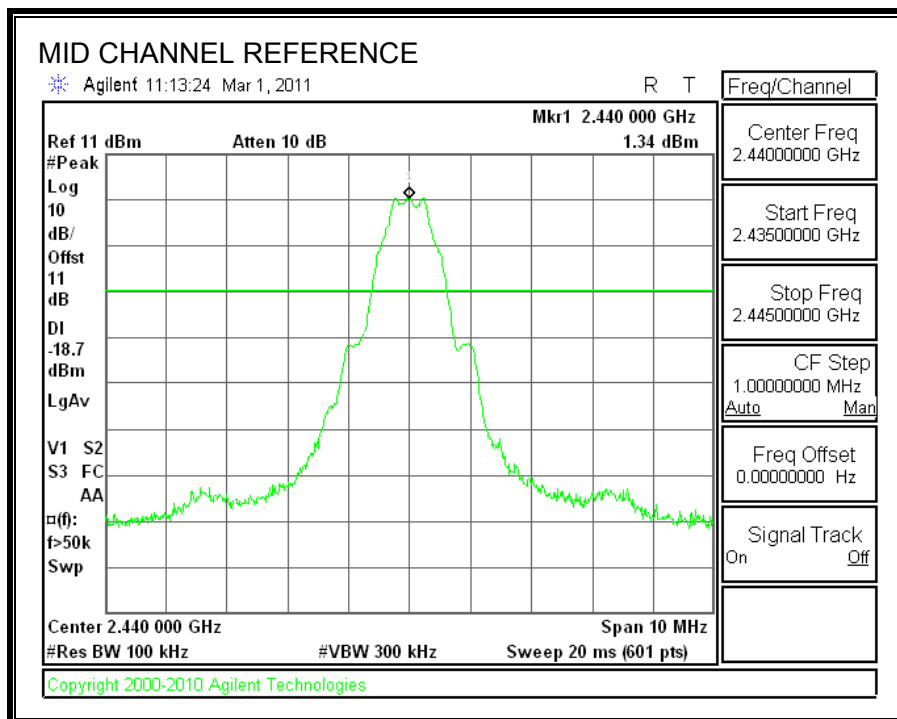

SPURIOUS EMISSIONS, HIGH CHANNEL

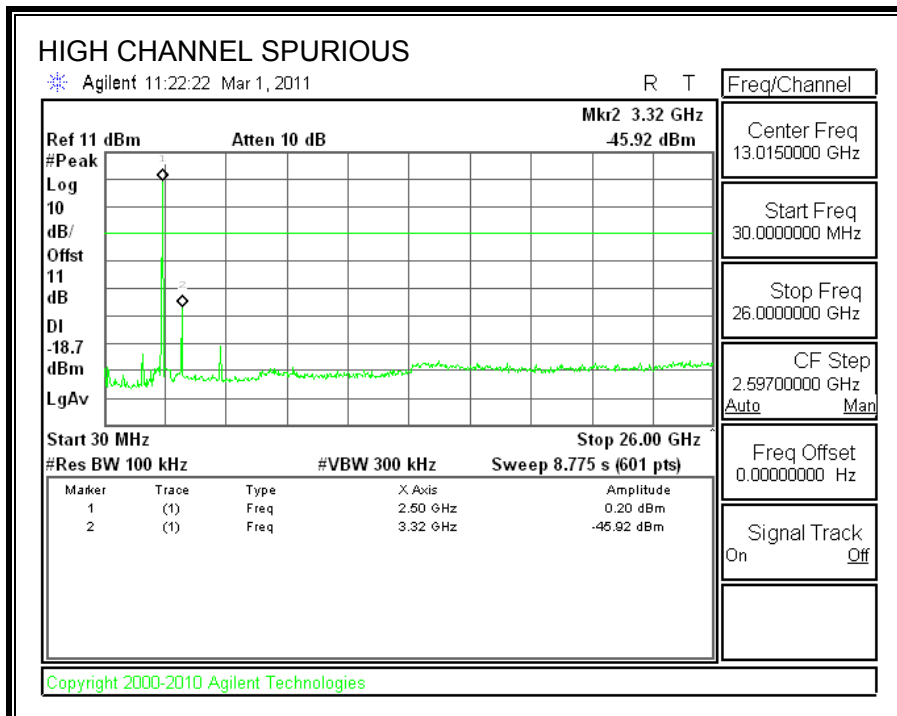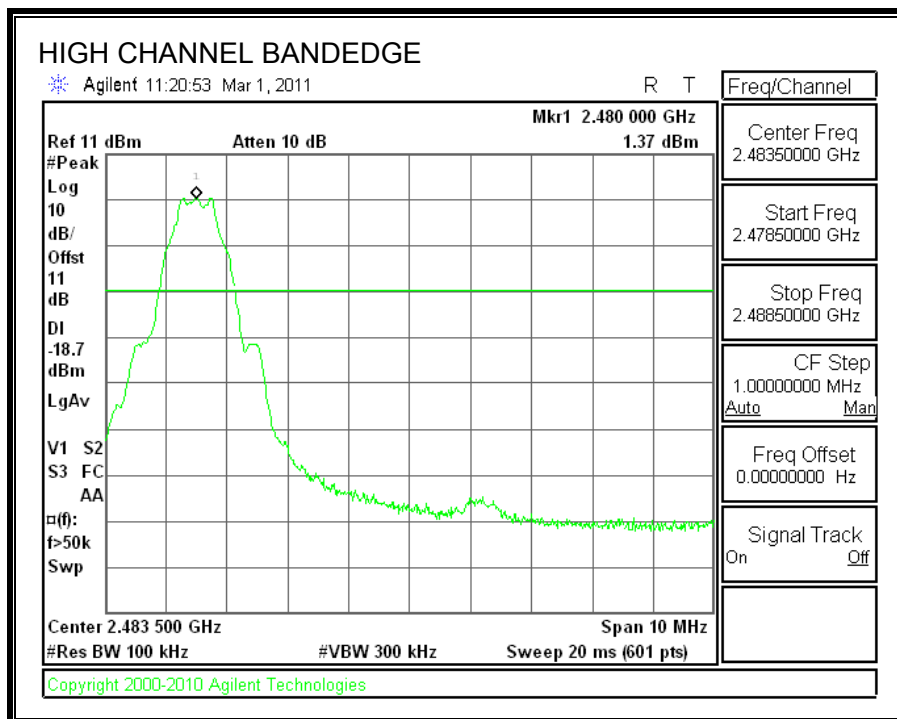

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

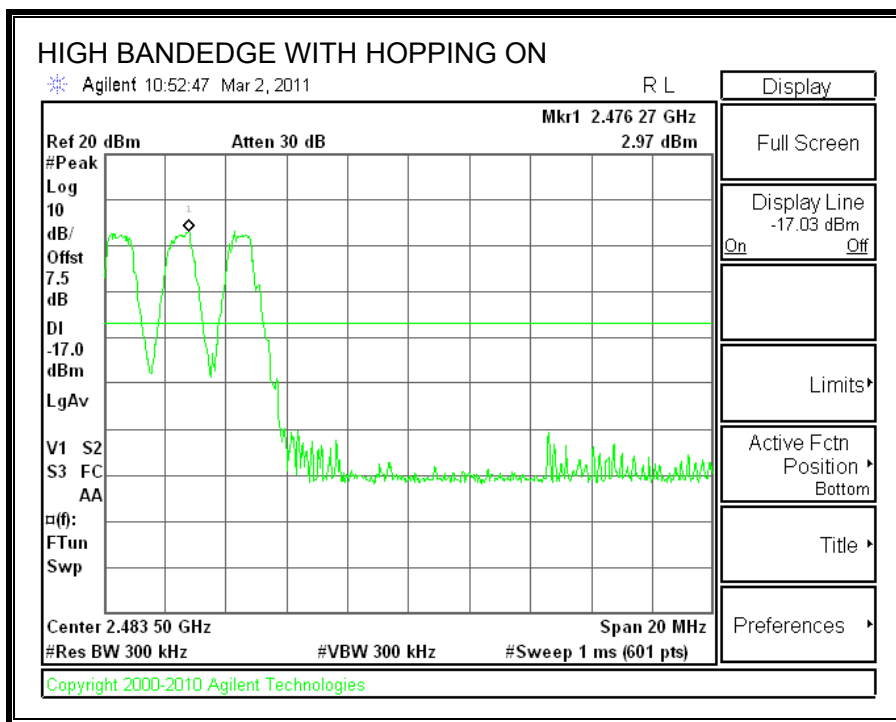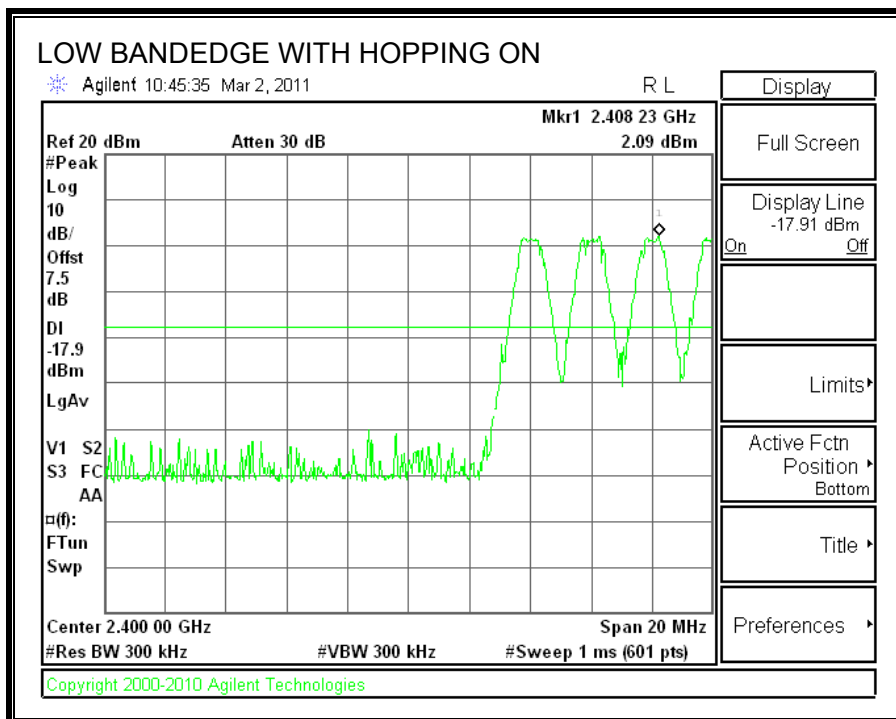

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



8.2. TRANSMITTER ABOVE 1 GHz

8.2.1. BASIC DATA RATE GFSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

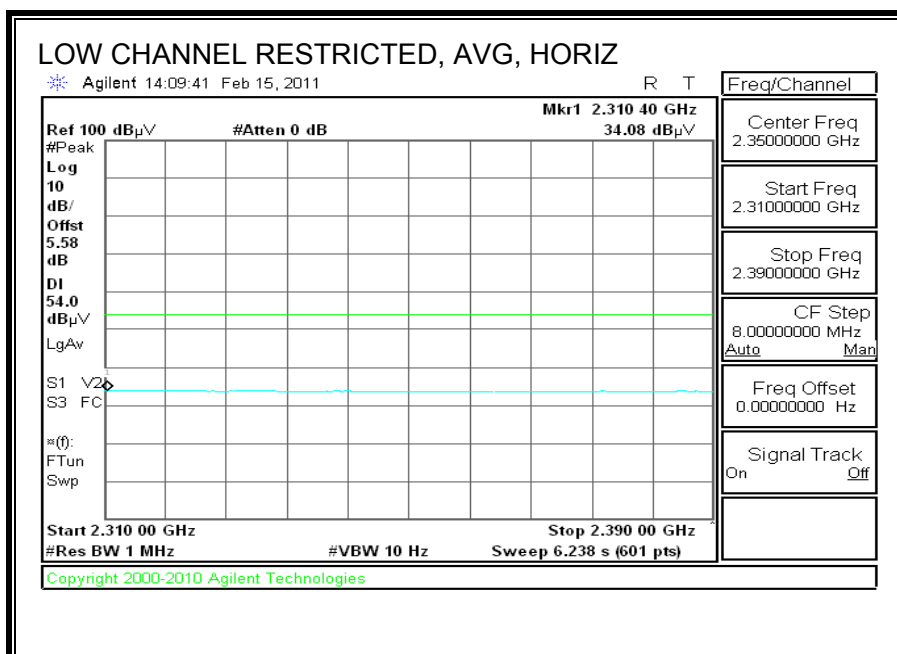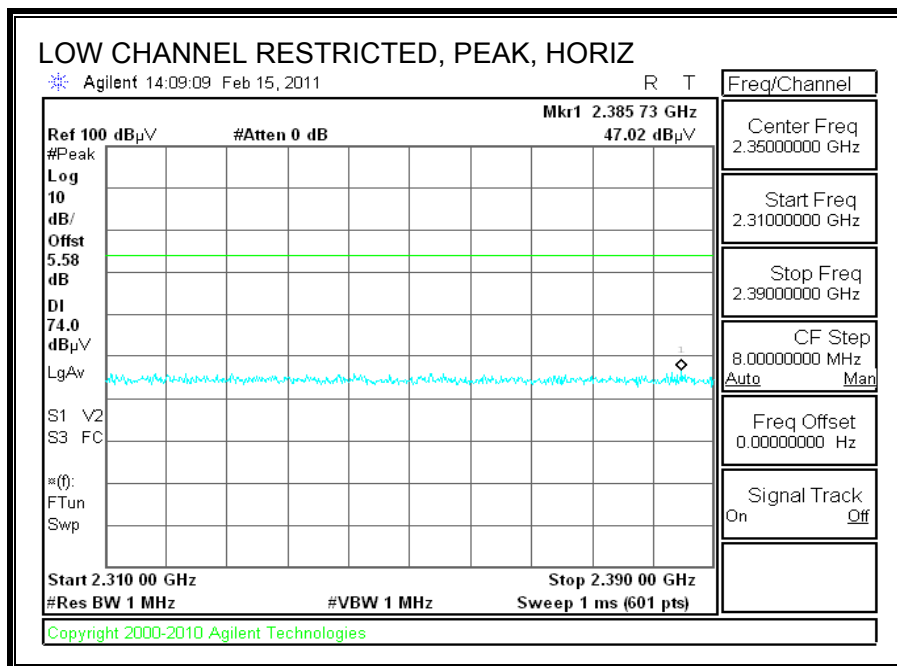



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

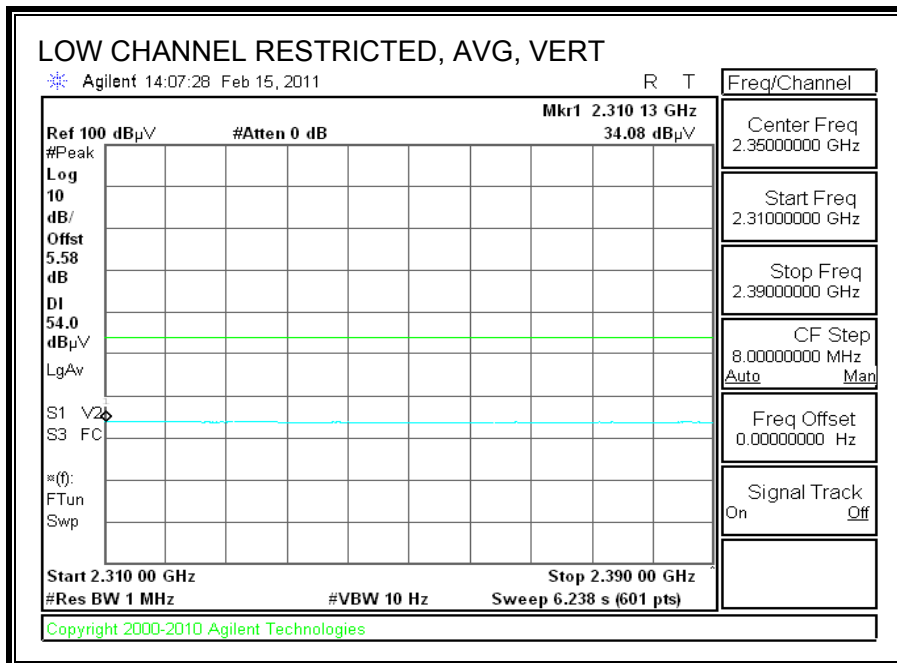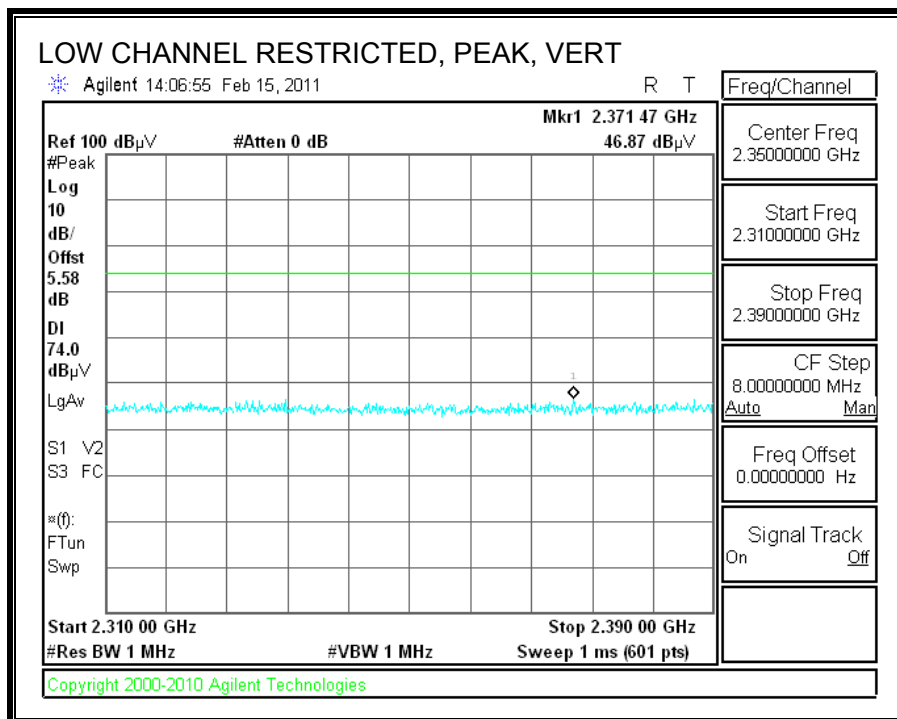

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

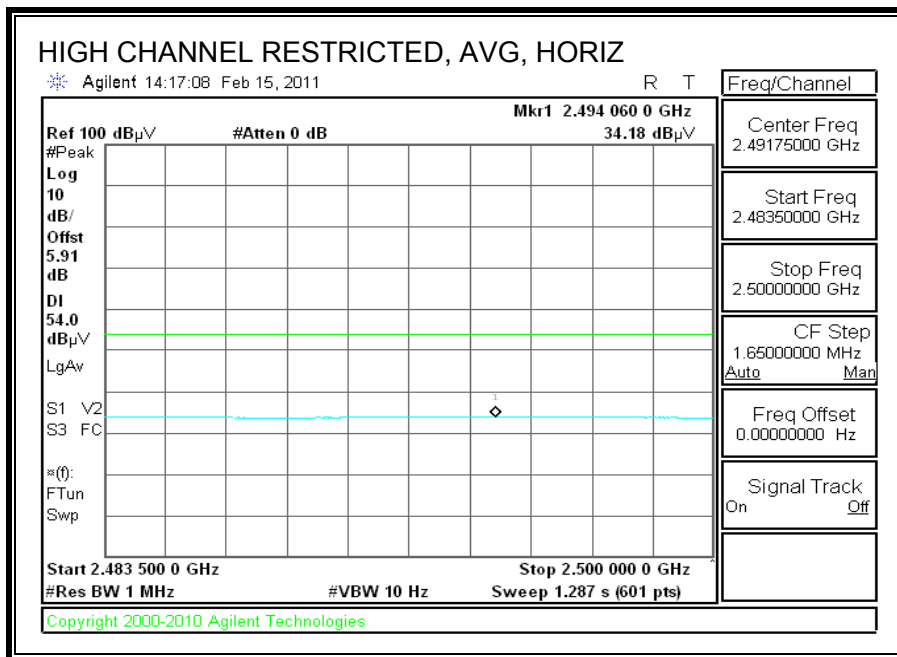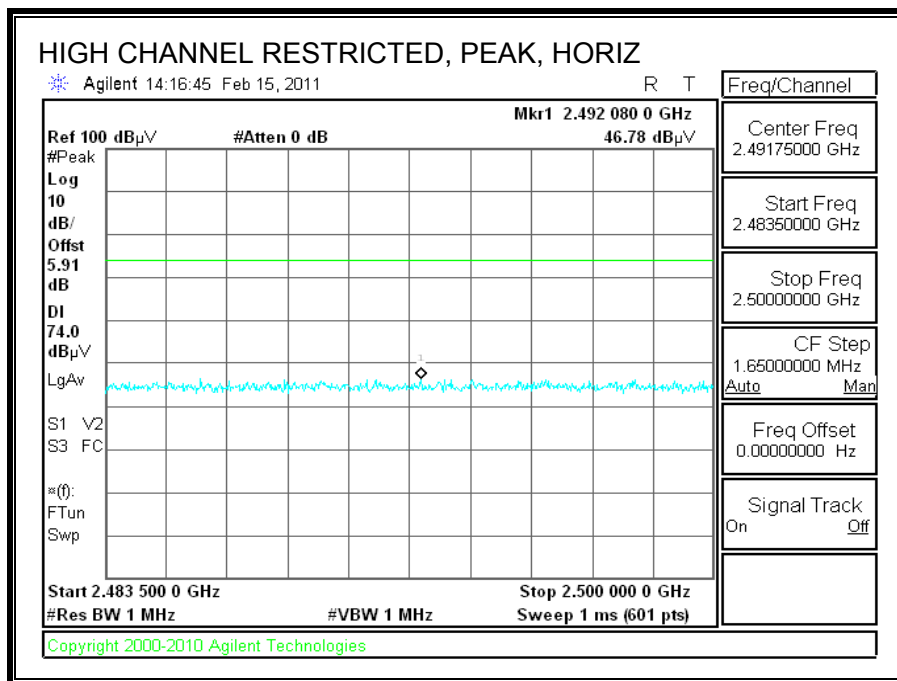

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

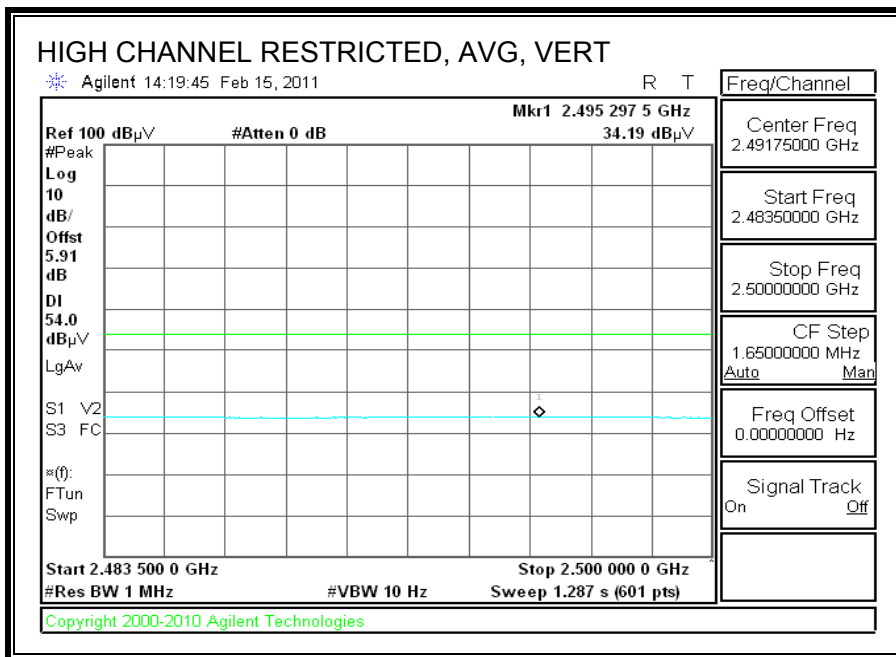
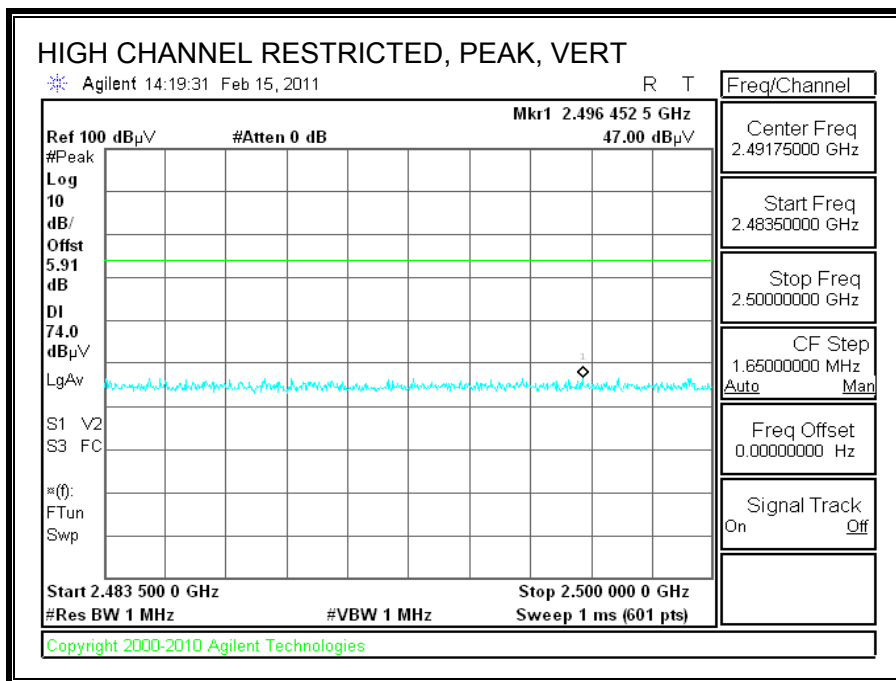


HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement													
Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		David Garcia											
Date:		02/15/11											
Project #:		11J13631											
Company:		Hon Hai											
Test Target:		FCC 15.205											
Mode Oper:		Tx, GFSK Mode											
f	Measurement Frequency		Amp	Preamp Gain		Average Field Strength Limit							
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Peak Field Strength Limit							
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Margin vs. Average Limit							
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Margin vs. Peak Limit							
CL	Cable Loss		HPF	High Pass Filter									
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
LOW CHANNEL, 2402 MHz													
4.804	3.0	36.3	32.7	5.8	-34.8	0.0	10.0	49.9	74.0	-24.1	H	P	
4.804	3.0	24.1	32.7	5.8	-34.8	0.0	10.0	37.7	54.0	-16.3	H	A	
4.804	3.0	37.8	32.7	5.8	-34.8	0.0	10.0	51.4	74.0	-22.6	V	P	
4.804	3.0	25.9	32.7	5.8	-34.8	0.0	10.0	39.5	54.0	-14.5	V	A	
MID CHANNEL, 2441 MHz													
4.882	3.0	36.5	32.7	5.8	-34.8	0.0	10.0	50.2	74.0	-23.8	H	P	
4.882	3.0	24.4	32.7	5.8	-34.8	0.0	10.0	38.1	54.0	-15.9	H	A	
7.323	3.0	35.5	35.5	7.3	-34.1	0.0	10.0	54.1	74.0	-19.9	H	P	
7.323	3.0	23.1	35.5	7.3	-34.1	0.0	10.0	41.8	54.0	-12.2	H	A	
4.882	3.0	35.9	32.7	5.8	-34.8	0.0	10.0	49.6	74.0	-24.4	V	P	
4.882	3.0	23.7	32.7	5.8	-34.8	0.0	10.0	37.5	54.0	-16.5	V	A	
7.323	3.0	35.5	35.5	7.3	-34.1	0.0	10.0	54.2	74.0	-19.8	V	P	
7.323	3.0	23.2	35.5	7.3	-34.1	0.0	10.0	41.8	54.0	-12.2	V	A	
HIGH CHANNEL, 2480 MHz													
4.960	3.0	36.5	32.8	5.9	-34.8	0.0	10.0	50.4	74.0	-23.6	H	P	
4.960	3.0	23.9	32.8	5.9	-34.8	0.0	10.0	37.8	54.0	-16.2	H	A	
7.440	3.0	35.1	35.6	7.3	-34.1	0.0	10.0	54.0	74.0	-20.0	H	P	
7.440	3.0	23.0	35.6	7.3	-34.1	0.0	10.0	41.8	54.0	-12.2	H	A	
4.960	3.0	36.5	32.8	5.9	-34.8	0.0	10.0	50.4	74.0	-23.6	V	P	
4.960	3.0	24.0	32.8	5.9	-34.8	0.0	10.0	37.8	54.0	-16.2	V	A	
7.440	3.0	36.7	35.6	7.3	-34.1	0.0	10.0	55.6	74.0	-18.4	V	P	
7.440	3.0	23.0	35.6	7.3	-34.1	0.0	10.0	41.9	54.0	-12.1	V	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													

8.2.2. ENHANCED DATA RATE 8PSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

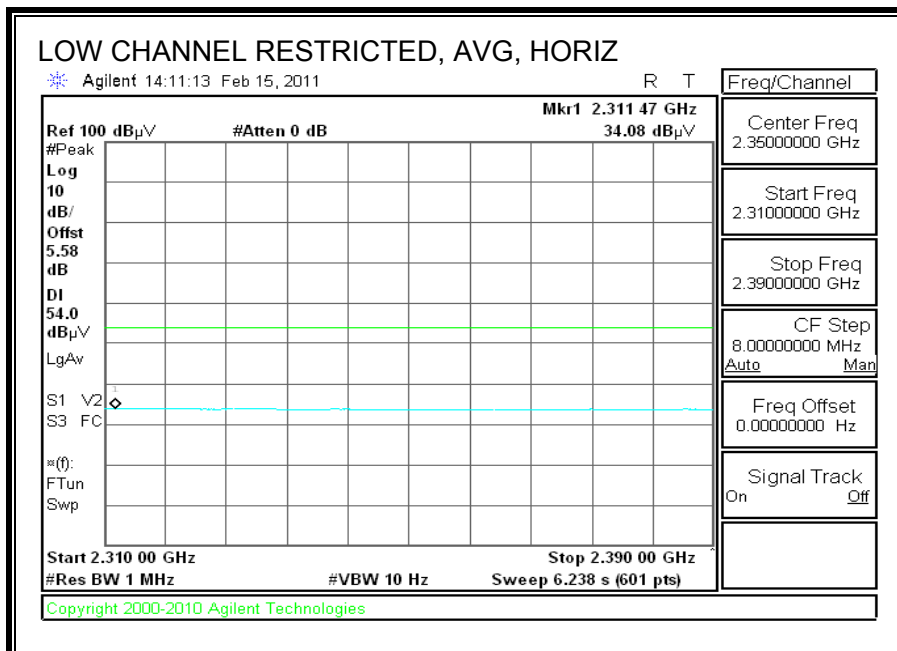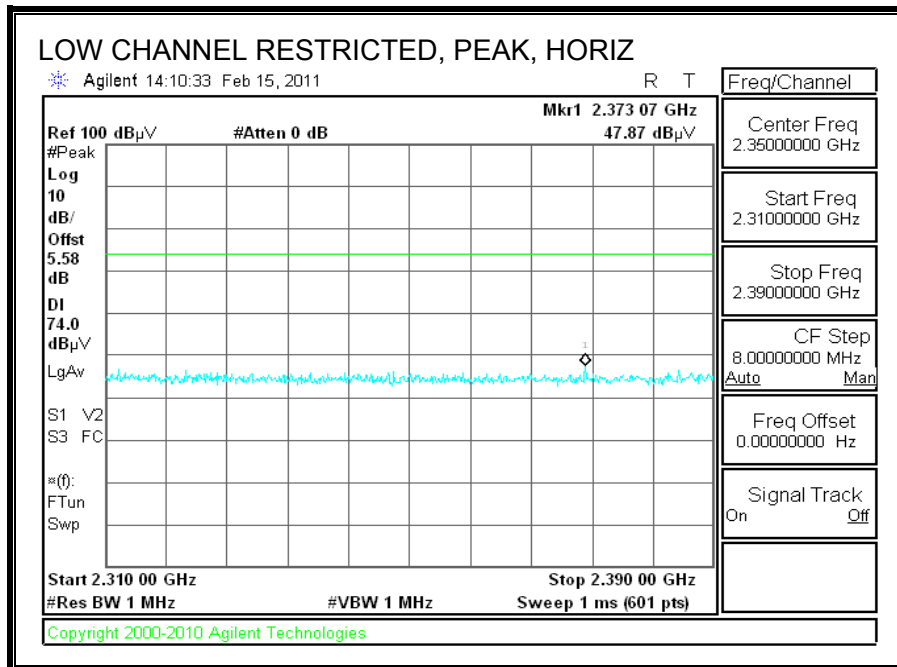



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

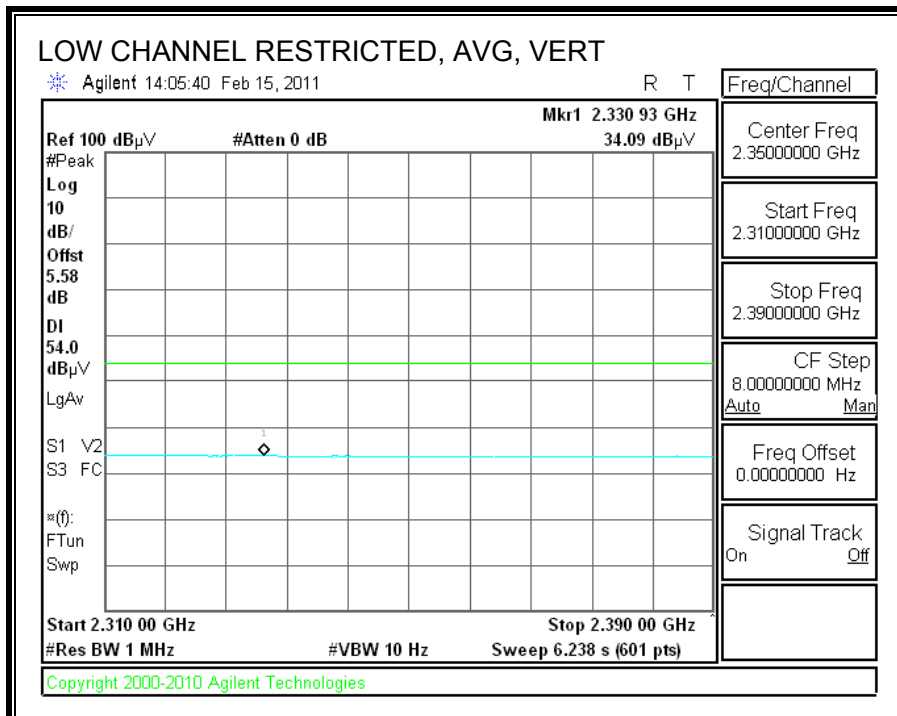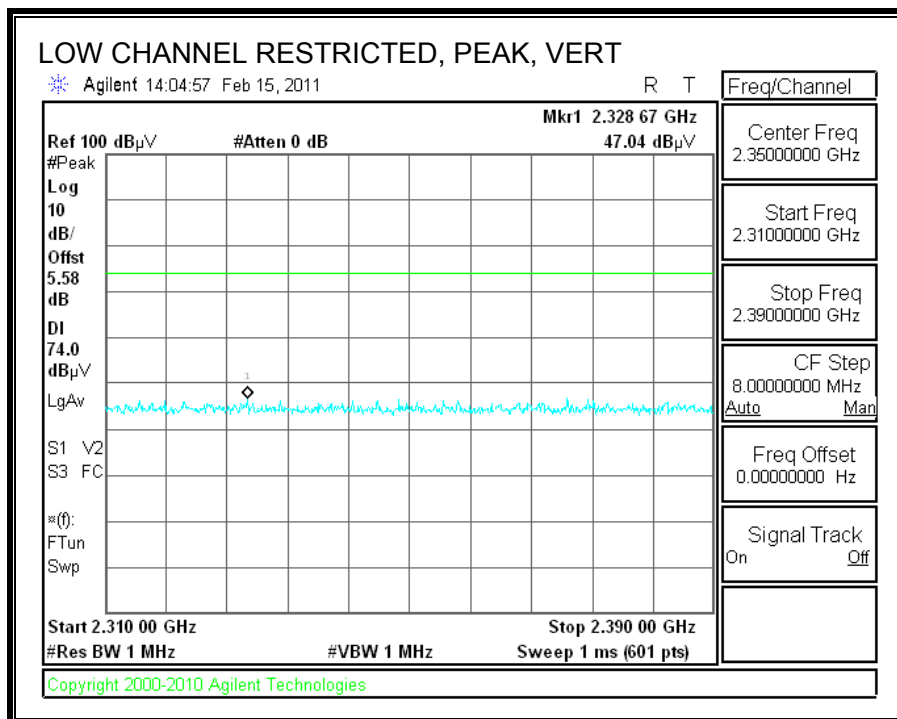

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

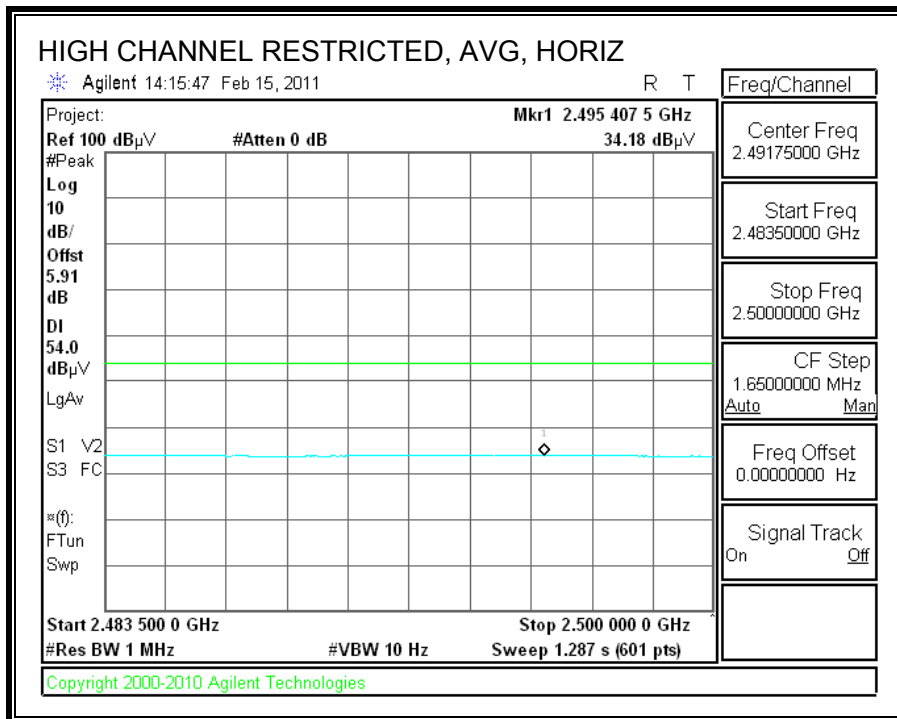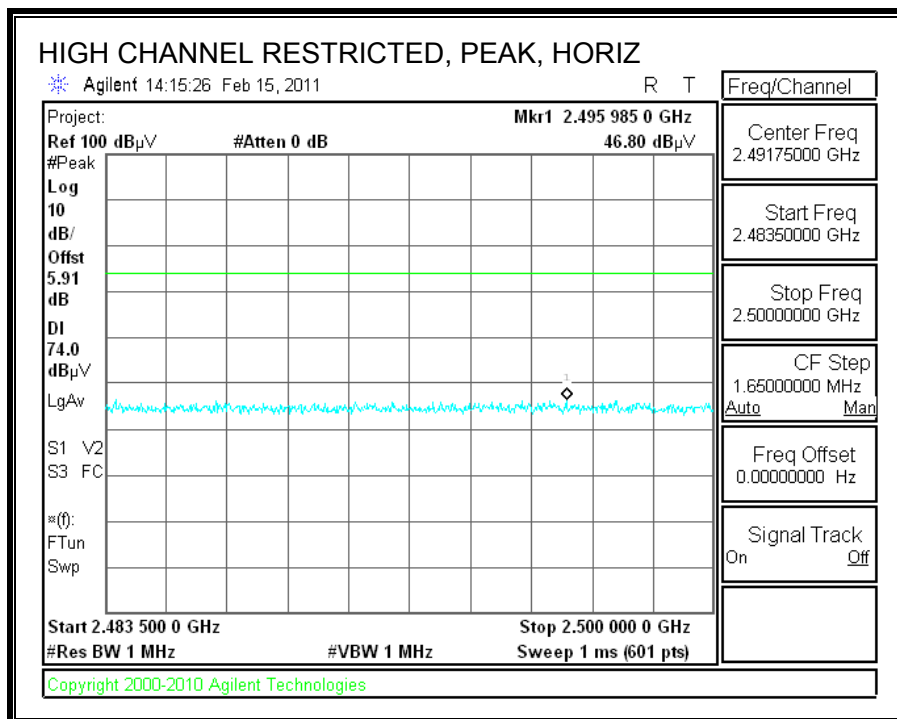

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

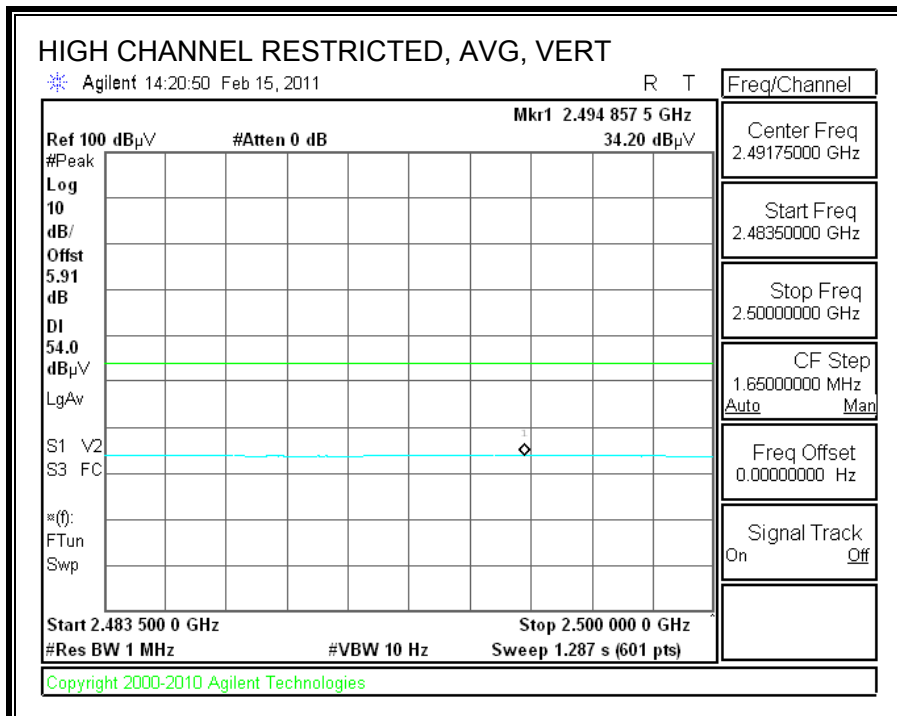
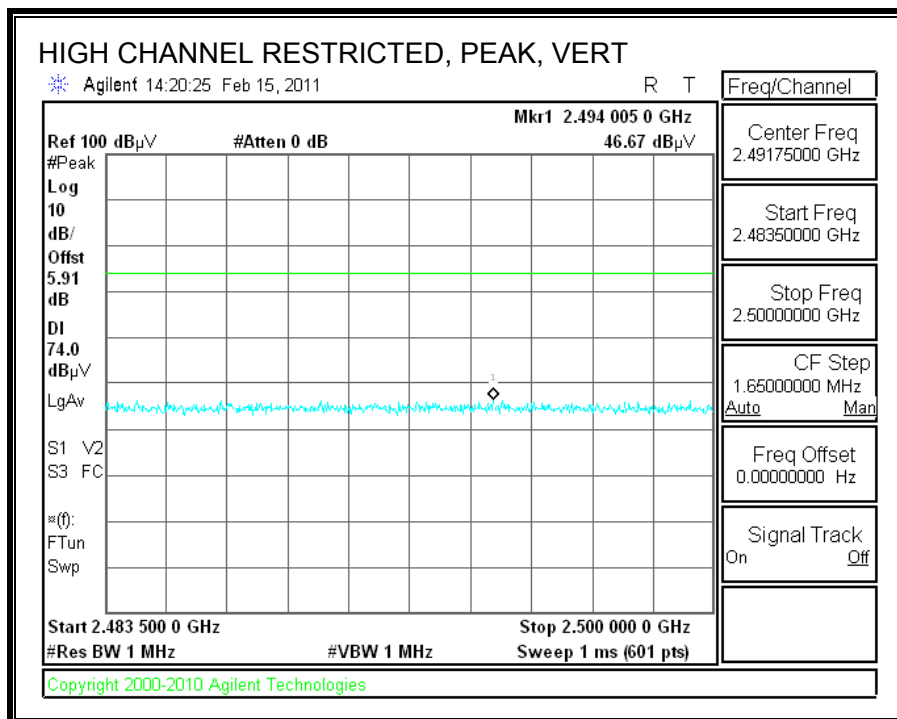


HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement													
Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		David Garcia											
Date:		02/15/11											
Project #:		11J13631											
Company:		Hon Hai											
Test Target:		FCC 15.205											
Mode Oper:		Tx, 8PSK Mode											
f	Measurement Frequency		Amp	Preamp Gain		Average Field Strength Limit							
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Peak Field Strength Limit							
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Margin vs. Average Limit							
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Margin vs. Peak Limit							
CL	Cable Loss		HPF	High Pass Filter									
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
LOW CHANNEL, 2402 MHz													
4.804	3.0	36.3	32.7	5.8	-34.8	0.0	10.0	50.4	74.0	-23.6	H	P	
4.804	3.0	28.9	32.7	5.8	-34.8	0.0	10.0	42.5	54.0	-11.5	H	A	
4.804	3.0	36.8	32.7	5.8	-34.8	0.0	10.0	50.4	74.0	-23.6	V	P	
4.804	3.0	26.3	32.7	5.8	-34.8	0.0	10.0	39.9	54.0	-14.1	V	A	
MID CHANNEL, 2441 MHz													
4.882	3.0	36.2	32.7	5.8	-34.8	0.0	10.0	49.9	74.0	-24.1	H	P	
4.882	3.0	23.9	32.7	5.8	-34.8	0.0	10.0	37.7	54.0	-16.3	H	A	
7.323	3.0	36.3	35.5	7.3	-34.1	0.0	10.0	54.9	74.0	-19.1	H	P	
7.323	3.0	23.0	35.5	7.3	-34.1	0.0	10.0	41.7	54.0	-12.3	H	A	
4.882	3.0	37.2	32.7	5.8	-34.8	0.0	10.0	51.0	74.0	-23.0	V	P	
4.882	3.0	24.3	32.7	5.8	-34.8	0.0	10.0	38.1	54.0	-15.9	V	A	
7.323	3.0	36.0	35.5	7.3	-34.1	0.0	10.0	54.7	74.0	-19.3	V	P	
7.323	3.0	23.1	35.5	7.3	-34.1	0.0	10.0	41.7	54.0	-12.3	V	A	
HIGH CHANNEL, 2480 MHz													
4.960	3.0	36.6	32.8	5.9	-34.8	0.0	10.0	50.5	74.0	-23.5	H	P	
4.960	3.0	23.7	32.8	5.9	-34.8	0.0	10.0	37.6	54.0	-16.4	H	A	
7.440	3.0	35.7	35.6	7.3	-34.1	0.0	10.0	54.5	74.0	-19.5	H	P	
7.440	3.0	22.9	35.6	7.3	-34.1	0.0	10.0	41.8	54.0	-12.2	H	A	
4.960	3.0	36.4	32.8	5.9	-34.8	0.0	10.0	50.2	74.0	-23.8	V	P	
4.960	3.0	23.8	32.8	5.9	-34.8	0.0	10.0	37.6	54.0	-16.4	V	A	
7.440	3.0	35.5	35.6	7.3	-34.1	0.0	10.0	54.4	74.0	-19.6	V	P	
7.440	3.0	22.9	35.6	7.3	-34.1	0.0	10.0	41.8	54.0	-12.2	V	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													

8.2.1. LOW ENERGY LE GFSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

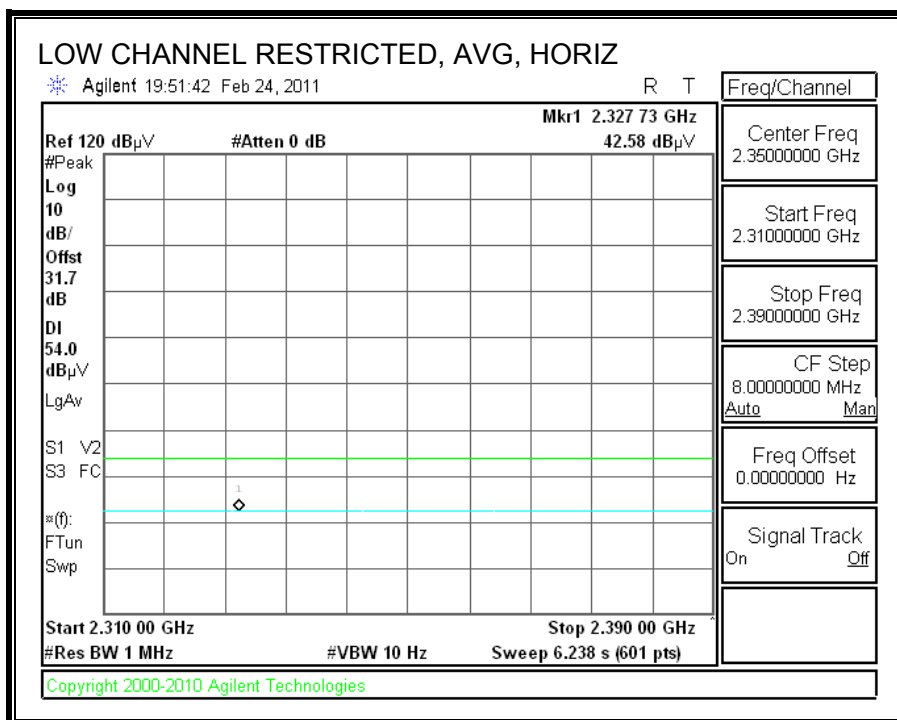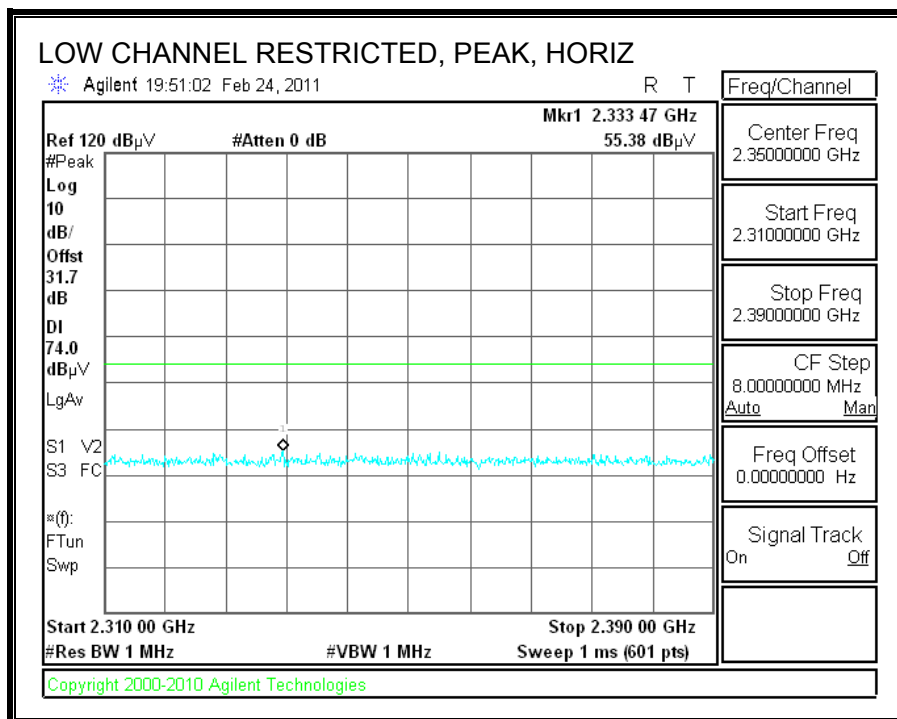



RESTRICTED BANDEGE (LOW CHANNEL, VERTICAL)

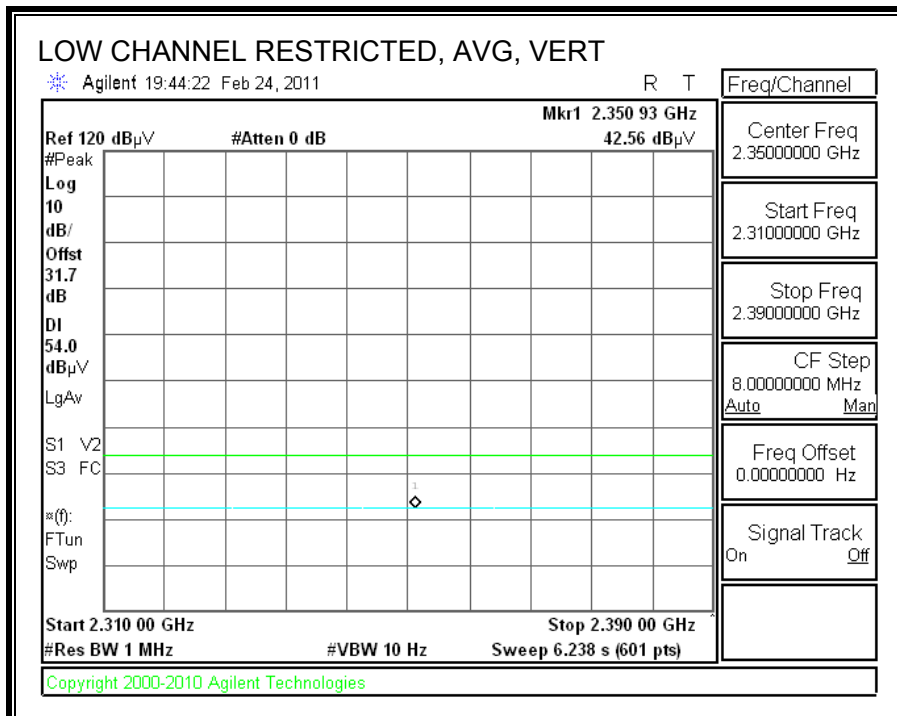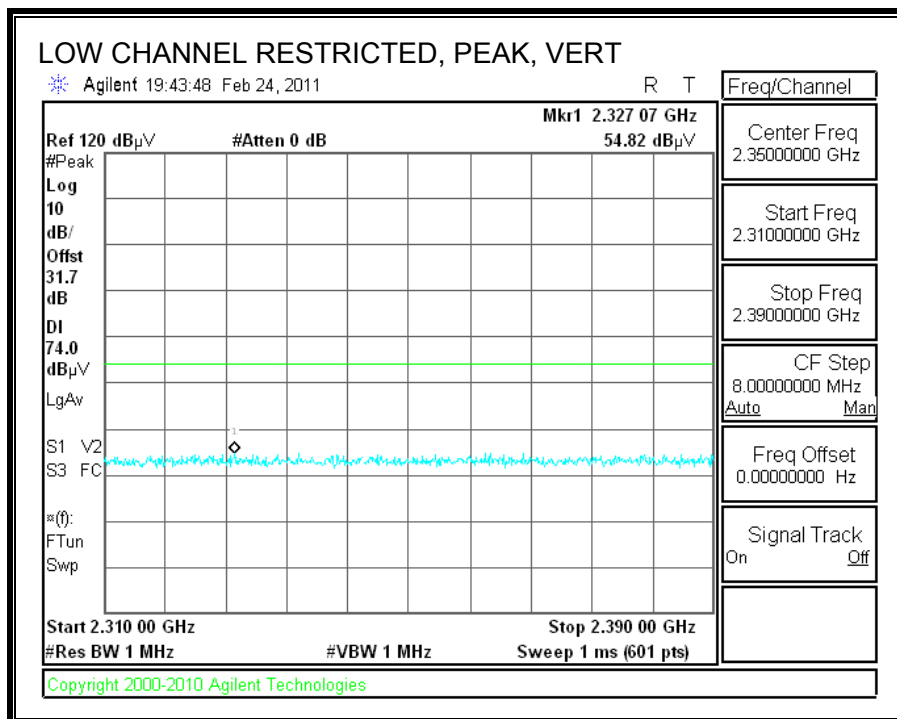

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

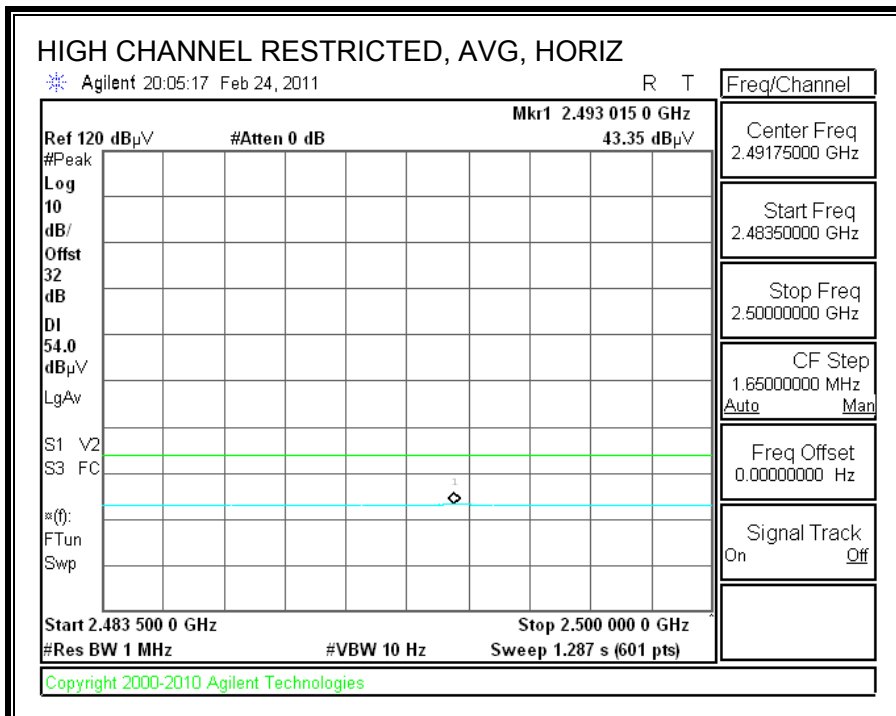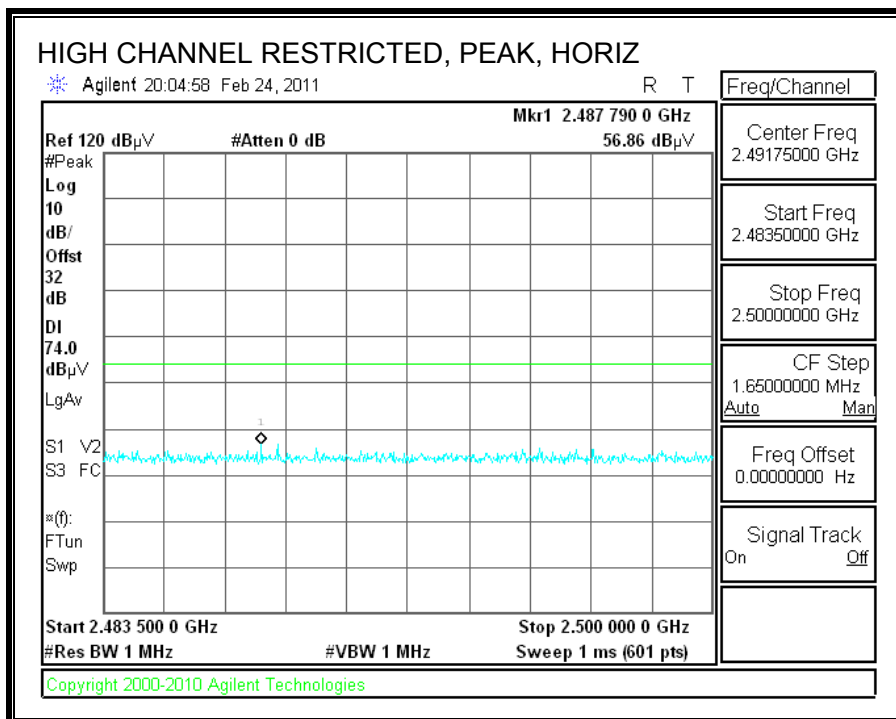

RESTRICTED BANDEGE (HIGH CHANNEL, VERTICAL)

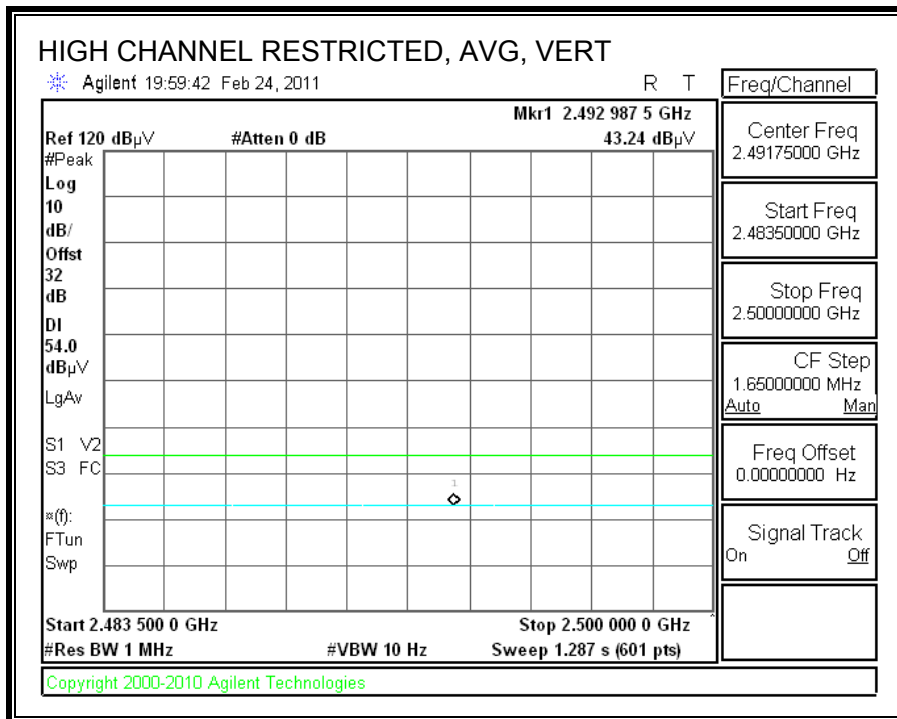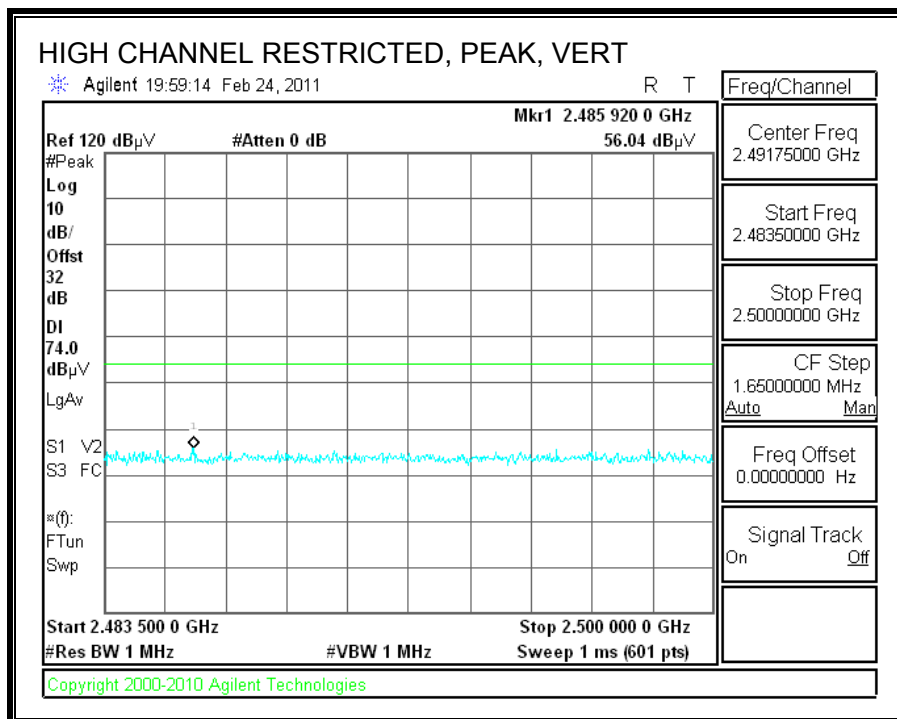

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Company: Hon Hai
 Project #: 11J13631
 Date: 2/25/2011
 Test Engineer: Thanh Nguyen
 Configuration: EUT and remote support Laptop
 Mode: Transmit LE mode

Test Equipment:

Horn 1-18GHz T73; S/N: 6717 @3m	Pre-amplifier 1-26GHz T144 Miteq 3008A00931	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit FCC 15.209
------------------------------------	--	------------------------	--------------	---------------------

Hi Frequency Cables

3' cable 22807700 3' cable 22807700	12' cable 22807600 12' cable 22807600	20' cable 22807500 20' cable 22807500	HPF	Reject Filter R_001	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
--	--	--	-----	------------------------	--

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch															
1.492	3.0	46.7	33.3	25.5	2.9	-38.8	0.0	0.0	36.4	22.9	74	54	-37.6	-31.1	V
3.200	3.0	43.7	34.2	30.5	4.5	-37.2	0.0	0.0	41.4	32.0	74	54	-32.6	-22.0	V
1.000	3.0	61.4	38.7	23.9	2.4	-39.5	0.0	0.0	48.1	25.4	74	54	-25.9	-28.6	H
3.200	3.0	43.1	34.1	30.5	4.5	-37.2	0.0	0.0	40.8	31.9	74	54	-33.2	-22.1	H
Mid ch															
1.000	3.0	62.7	40.4	23.9	2.4	-39.5	0.0	0.0	49.4	27.1	74	54	-24.6	-26.9	V
3.262	3.0	46.2	38.4	30.6	4.6	-37.2	0.0	0.0	44.2	36.4	74	54	-29.8	-17.6	V
2.725	3.0	43.4	34.7	29.2	4.1	-37.4	0.0	0.0	39.2	30.5	74	54	-34.8	-23.5	H
High Ch															
1.000	3.0	64.2	41.3	23.9	2.4	-39.5	0.0	0.0	50.9	28.1	74	54	-23.1	-25.9	V
3.308	3.0	44.9	37.6	30.7	4.6	-37.1	0.0	0.0	43.1	35.7	74	54	-30.9	-18.3	V
2.425	3.0	42.5	33.7	28.3	3.9	-37.5	0.0	0.0	37.2	28.3	74	54	-36.8	-25.7	H
No harmonics and other spurious emissions were found above noise floor.															
Rev. 07.22.09															

f Measurement Frequency	Amp Preamp Gain	Avg Lim Average Field Strength Limit
Dist Distance to Antenna	D Corr Distance Correct to 3 meters	Pk Lim Peak Field Strength Limit
Read Analyzer Reading	Avg Average Field Strength @ 3 m	Avg Mar Margin vs. Average Limit
AF Antenna Factor	Peak Calculated Peak Field Strength	Pk Mar Margin vs. Peak Limit
CL Cable Loss	HPF High Pass Filter	

8.3. RECEIVER ABOVE 1 GHz

8.3.1. RECEIVER ABOVE 1 GHz

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Company: Hon Hai
 Project #: 11J13631
 Date: 1/15/2011
 Test Engineer: David Garcia
 Configuration: Y position worst case
 Mode: Rx mode

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T60; S/N: 2238 @3m	T34 HP 8449B			FCC 15.209

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500			Average Measurements RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.000	3.0	51.1	34.1	24.5	2.4	-38.3	0.0	0.0	39.7	22.7	74	54	-34.3	-31.3	H
1.011	3.0	49.2	32.3	24.5	2.4	-38.2	0.0	0.0	37.8	20.9	74	54	-36.2	-33.1	H
1.421	3.0	45.8	32.4	25.9	2.9	-37.7	0.0	0.0	36.8	23.4	74	54	-37.2	-30.6	H
1.662	3.0	46.6	31.9	26.7	3.1	-37.3	0.0	0.0	39.0	24.3	74	54	-35.0	-29.7	H
2.337	3.0	42.0	32.5	28.0	3.8	-36.4	0.0	0.0	37.4	27.9	74	54	-36.6	-26.1	H
3.653	3.0	40.0	31.5	31.2	4.9	-35.3	0.0	0.0	40.8	32.3	74	54	-33.2	-21.7	H
1.000	3.0	57.0	34.5	24.5	2.4	-38.3	0.0	0.0	45.6	23.1	74	54	-28.4	-30.9	V
1.020	3.0	48.8	32.1	24.5	2.4	-38.2	0.0	0.0	37.5	20.8	74	54	-36.5	-33.2	V
1.141	3.0	47.1	31.8	24.9	2.5	-38.1	0.0	0.0	36.5	21.2	74	54	-37.5	-32.8	V
1.663	3.0	50.2	32.0	26.7	3.1	-37.3	0.0	0.0	42.7	24.5	74	54	-31.3	-29.5	V
2.339	3.0	39.0	31.7	28.0	3.8	-36.4	0.0	0.0	34.4	27.1	74	54	-39.6	-26.9	V
3.658	3.0	39.5	31.5	31.2	4.9	-35.3	0.0	0.0	40.3	32.3	74	54	-33.7	-21.7	V

Rev. 07.22.09


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

8.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

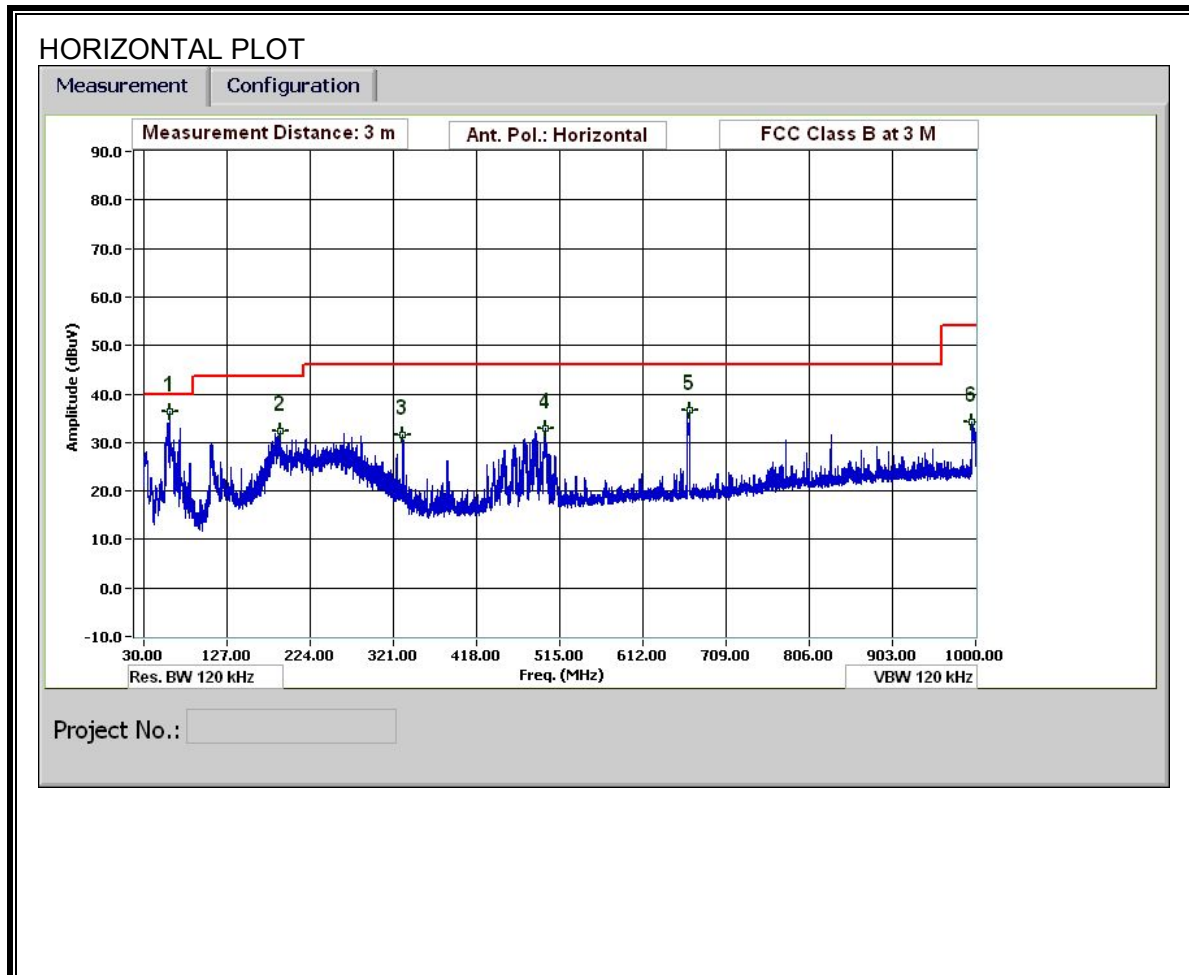

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

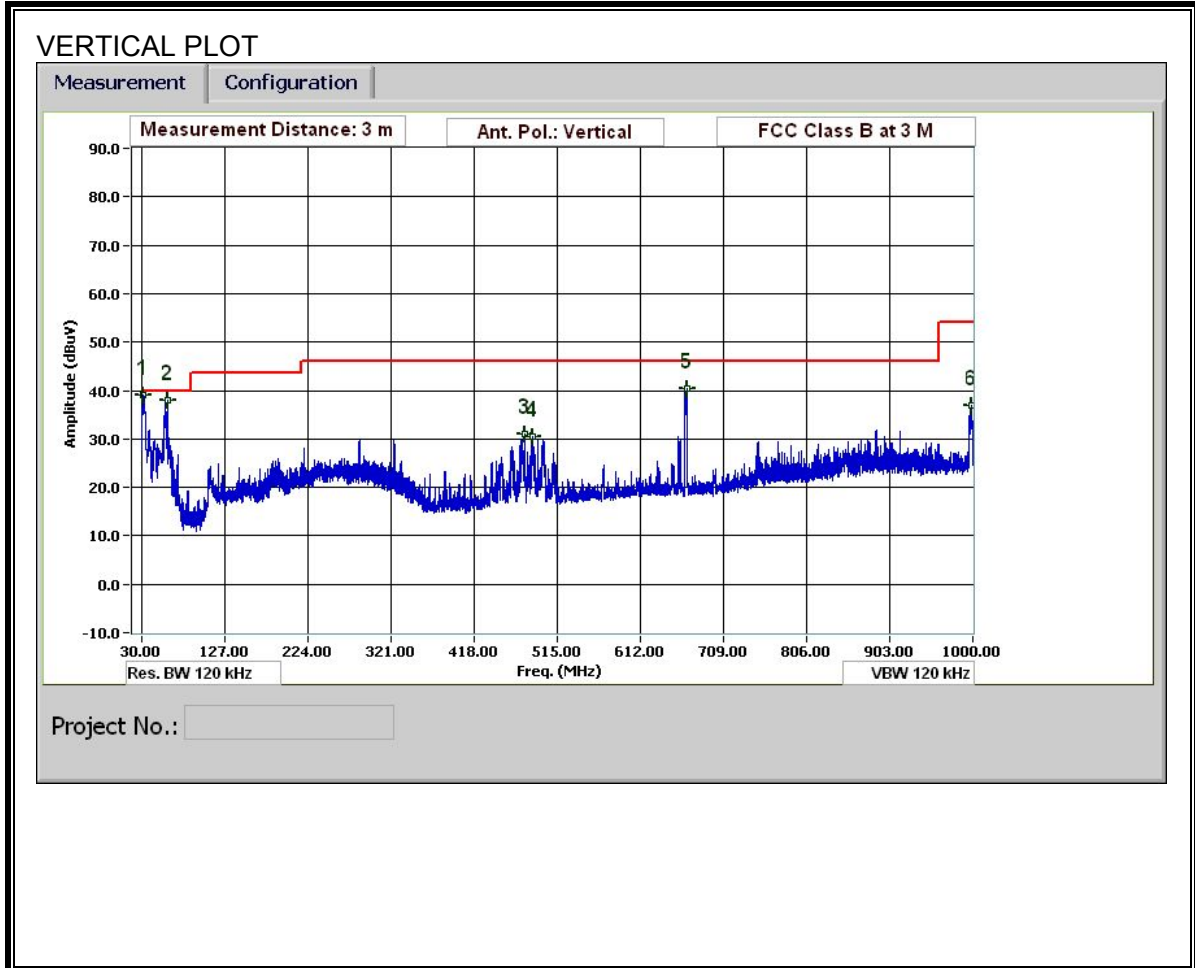

HORIZONTAL AND VERTICAL DATA

30-1000MHz Frequency Measurement													
Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		David Garcia											
Date:		02/15/11											
Project #:		11J13631											
Company:		Hon Hai											
Test Target:		FCC 15.205											
Mode Oper:		Tx, Worst case											
f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit								
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters										
Read	Analyzer Reading	Filter	Filter Insert Loss										
AF	Antenna Factor	Corr.	Calculated Field Strength										
CL	Cable Loss	Limit	Field Strength Limit										
f	Dist	Read	AF	CL	Amp	D Corr	Filter	Corr.	Limit	Margin	Ant. Pol.	Det.	Notes
MHz	(m)	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	V/H	P/A/QP	
60.001	3.0	56.1	7.9	0.7	28.3	0.0	0.0	36.3	40.0	-3.7	H	P	
188.527	3.0	47.4	11.2	1.1	27.4	0.0	0.0	32.3	43.5	-11.2	H	P	
331.932	3.0	43.5	14.0	1.6	27.6	0.0	0.0	31.5	46.0	-14.5	H	P	
498.019	3.0	42.7	16.8	2.0	28.6	0.0	0.0	32.9	46.0	-13.1	H	P	
666.146	3.0	44.0	18.8	2.3	28.5	0.0	0.0	36.5	46.0	-9.5	H	P	
995.800	3.0	36.2	22.7	2.9	27.6	0.0	0.0	34.2	54.0	-19.8	H	P	
32.040	3.0	48.0	19.0	0.5	28.4	0.0	0.0	39.1	40.0	-0.9	V	P	
32.040	3.0	43.6	19.0	0.5	28.4	0.0	0.0	34.7	40.0	-5.3	V	QP	
59.881	3.0	57.7	7.9	0.7	28.3	0.0	0.0	38.0	40.0	-2.0	V	P	
59.881	3.0	53.8	7.9	0.7	28.3	0.0	0.0	34.1	40.0	-5.9	V	QP	
476.778	3.0	41.1	16.4	1.9	28.5	0.0	0.0	31.0	46.0	-15.0	V	P	
486.739	3.0	40.4	16.6	1.9	28.6	0.0	0.0	30.4	46.0	-15.6	V	P	
666.146	3.0	47.7	18.8	2.3	28.5	0.0	0.0	40.3	46.0	-5.7	V	P	
999.160	3.0	38.8	22.7	2.9	27.6	0.0	0.0	36.8	54.0	-17.2	V	P	

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Clos	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.19	60.50	--	40.33	0.00	64.21	54.21	-3.71	-13.88	L1
0.28	51.90	--	33.37	0.00	60.85	50.85	-8.95	-17.48	L1
13.91	46.27	--	32.31	0.00	60.00	50.00	-13.73	-17.69	L1
0.19	54.63	--	37.20	0.00	64.12	54.12	-9.49	-16.92	L2
0.39	48.53	--	33.48	0.00	58.04	48.04	-9.51	-14.56	L2
14.44	47.36	--	34.23	0.00	60.00	50.00	-12.64	-15.77	L2
6 Worst Data									

LINE 1 RESULTS

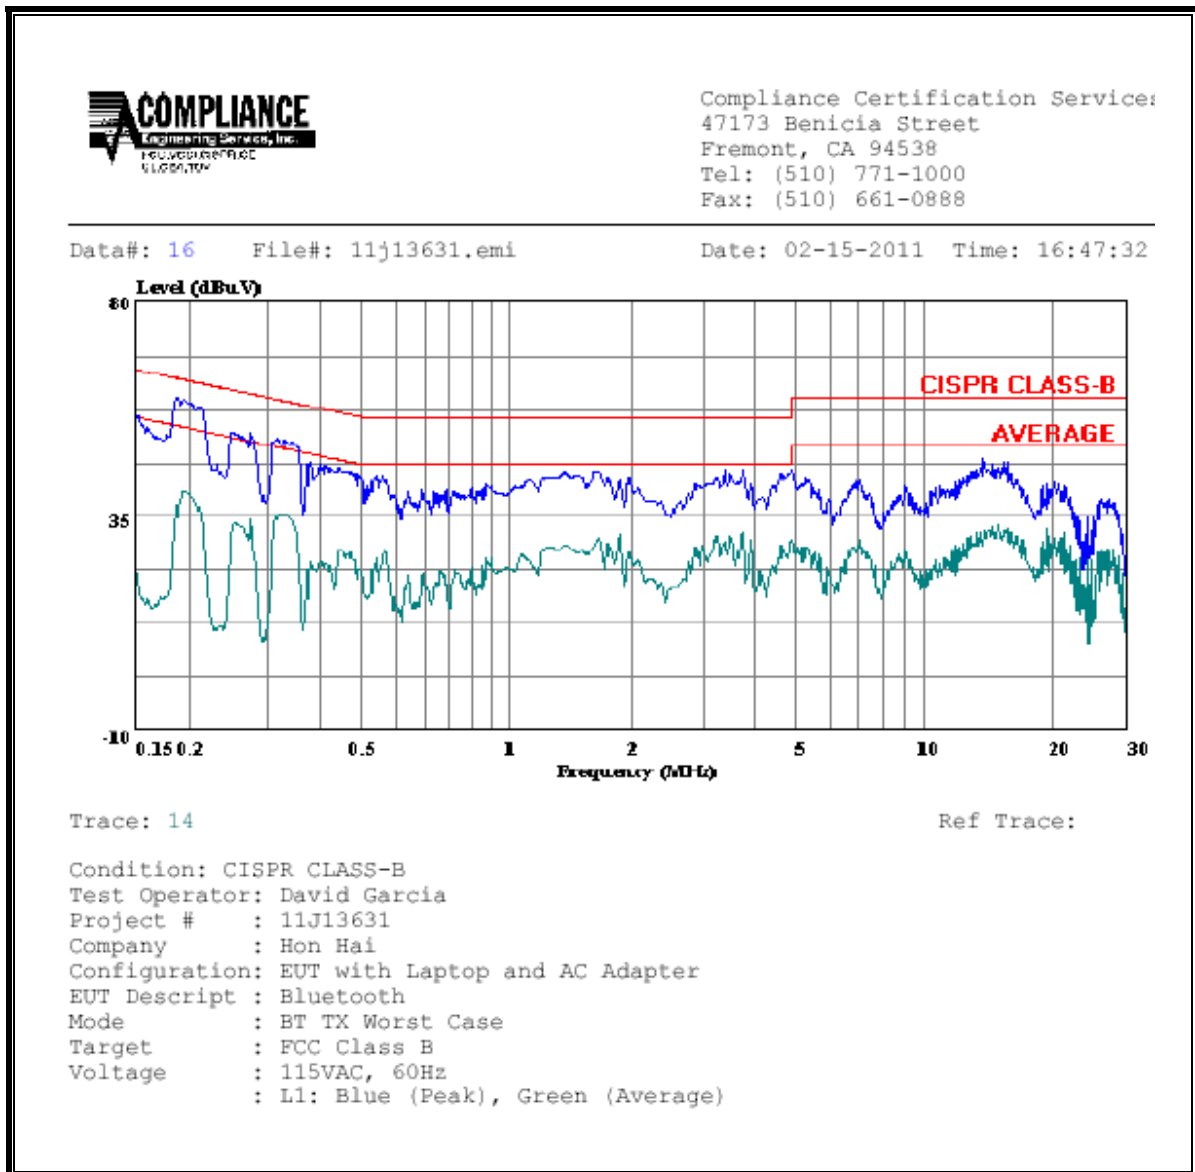

LINE 2 RESULTS

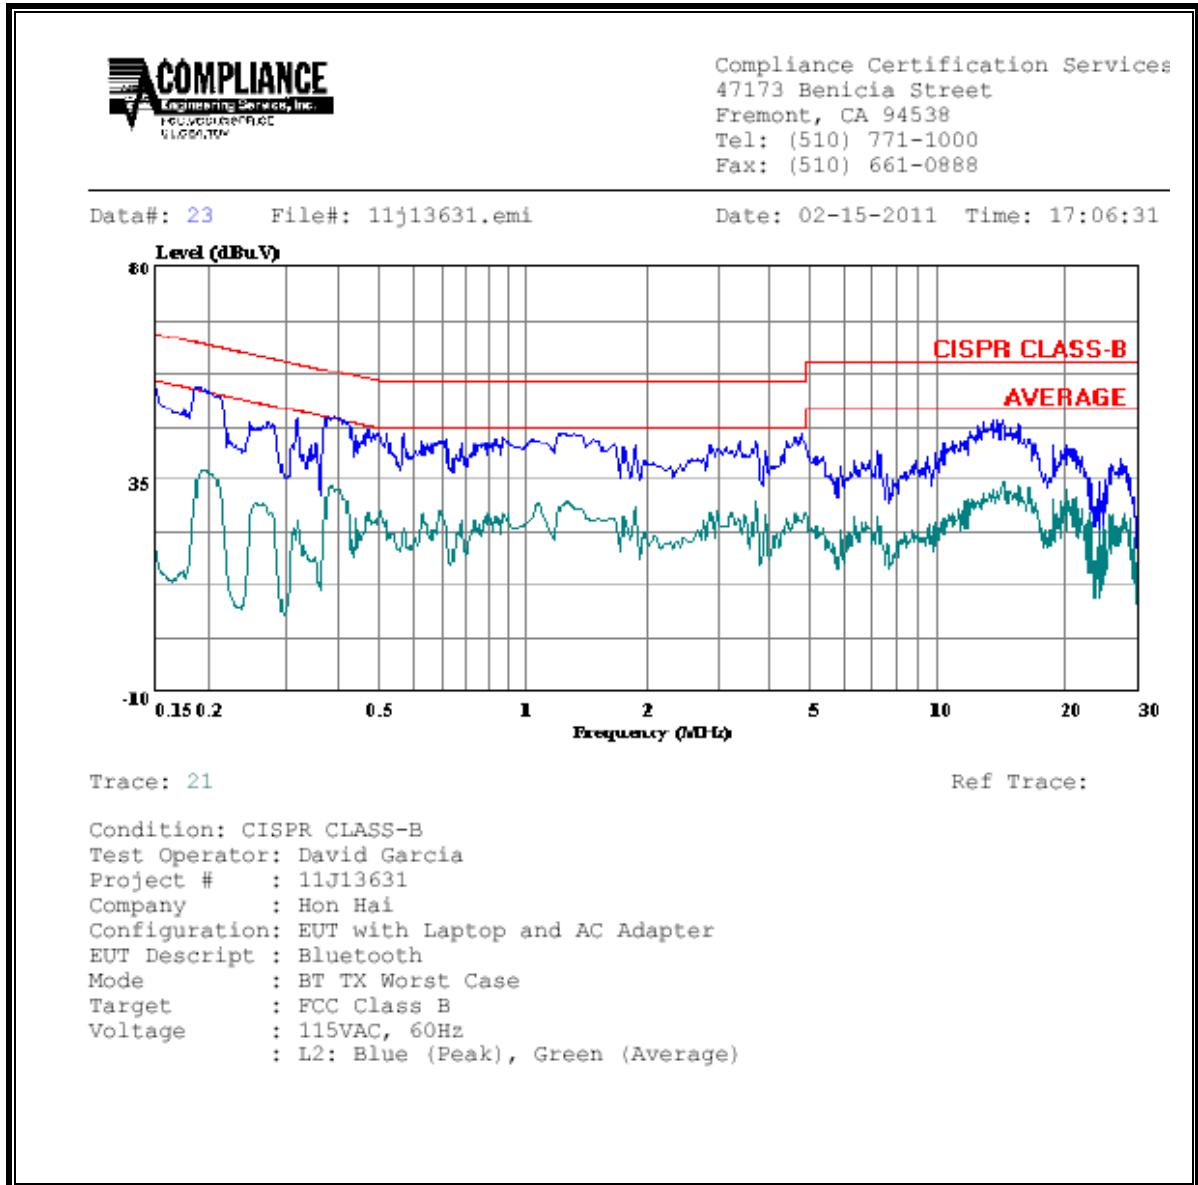

10. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5
 Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
 2. A power density of 10 W/m² is equivalent to 1 mW/cm².
 3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \text{Pi} * \text{D}^2)$$

where

- S = Power density in W/m²
- EIRP = Equivalent Isotropic Radiated Power in W
- D = Separation distance in m

Power density in units of W/m² is converted to units of mWc/m² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \text{Pi} * S))$$

where

- D = Separation distance in m
- EIRP = Equivalent Isotropic Radiated Power in W
- S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

- Px = Power of transmitter x
- Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m ²)	FCC Power Density (mW/cm ²)
2.4 GHz	Bluetooth	0.20	5.16	2.91	0.01	0.001