

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3

Test References	
TC Start	02.08.2022 15:47:54
Ambit Temp [°C]   Humidity [rel%]	29.3   35
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5745
Frequency mid to test	False   Freq [MHz] 5785
Frequency high to test	True   Freq [MHz] 5825
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5825 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.31	dBm	INFO
Ref. Frequency	---	---	5827.000	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.31   11.58   20
Start [MHz]   Stop [MHz]	5800.000   5850.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.433	MHz	INFO
T1 99%	5725.000000	---	5816.3586	MHz	PASS
T2 99%	---	5850.000000	5833.7912	MHz	PASS

### Plot: Bandwidth only

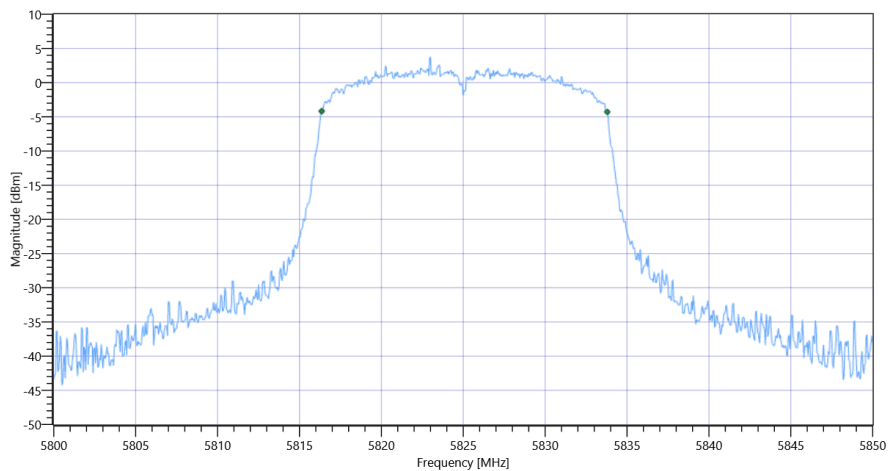

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3 99PCT


### Plot: Bandwidth within Band

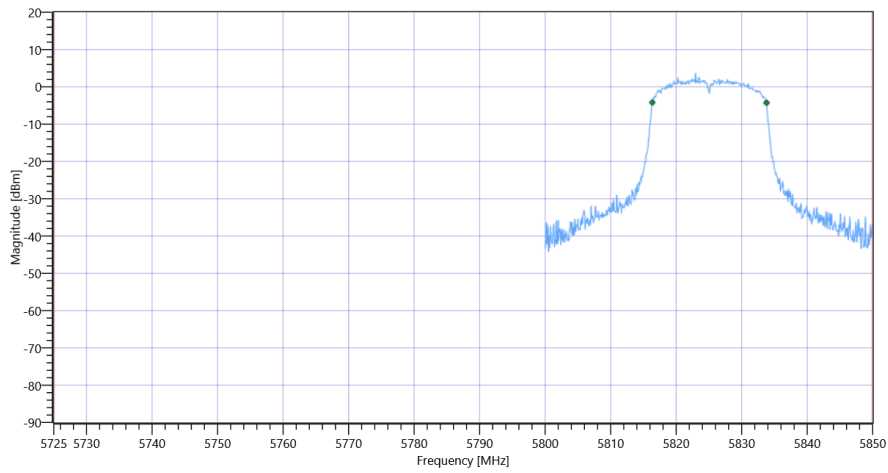

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	19.95	MHz	INFO
T1 26dB	5725.000000	---	5815.1000	MHz	PASS
T2 26dB	---	5850.000000	5835.0500	MHz	PASS

Plot: Bandwidth only

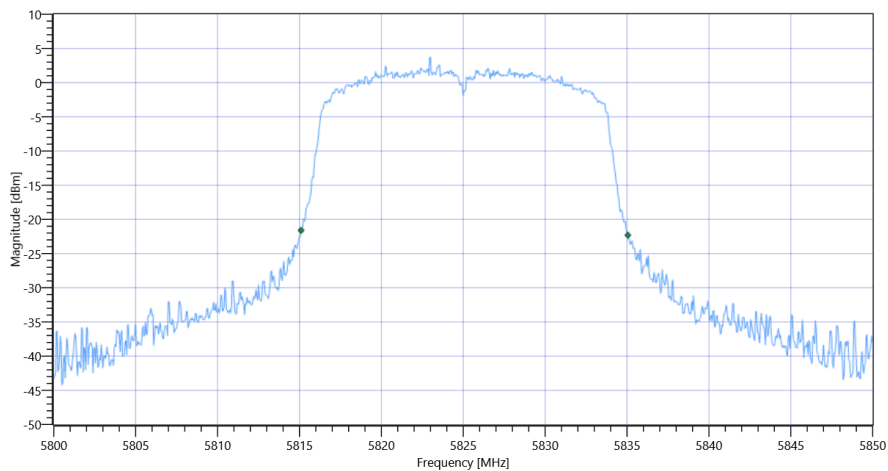

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3 26dB

Plot: Bandwidth within Band

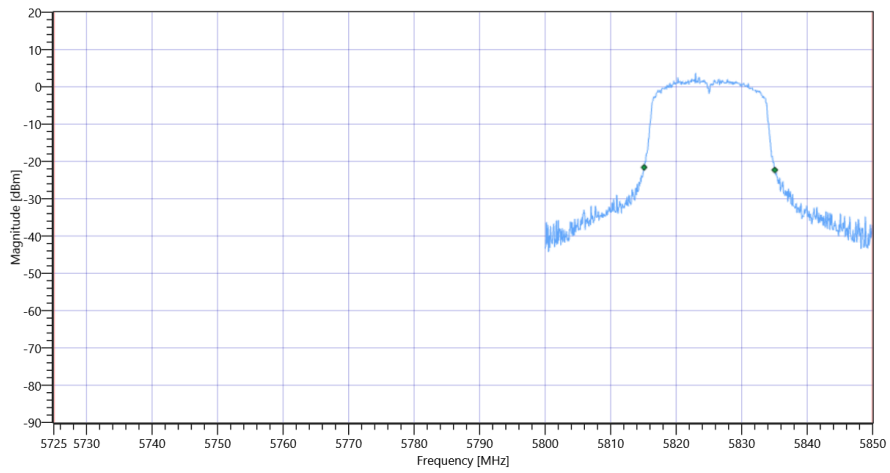

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3

Test References	
TC Start	02.08.2022 15:40:00
Ambit Temp [°C]   Humidity [rel%]	29.4   36
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5745
Frequency mid to test	True   Freq [MHz] 5785
Frequency high to test	False   Freq [MHz] 5825
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5785 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.62	dBm	INFO
Ref. Frequency	---	---	5781.600	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	14.62   11.48   20
Start [MHz]   Stop [MHz]	5760.000   5810.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.483	MHz	INFO
T1 99%	5725.000000	---	5776.3087	MHz	PASS
T2 99%	---	5850.000000	5793.7912	MHz	PASS

### Plot: Bandwidth only

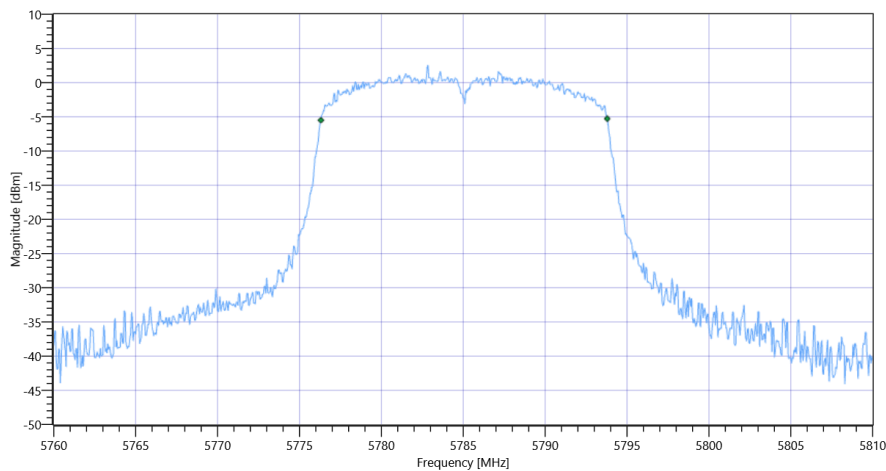

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3 99PCT


### Plot: Bandwidth within Band

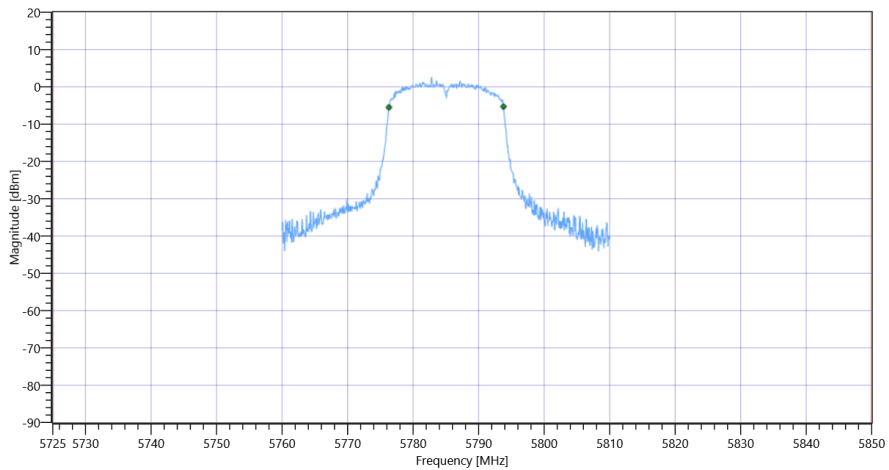

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.3	MHz	INFO
T1 26dB	5725.000000	---	5774.9500	MHz	PASS
T2 26dB	---	5850.000000	5795.2500	MHz	PASS

Plot: Bandwidth only

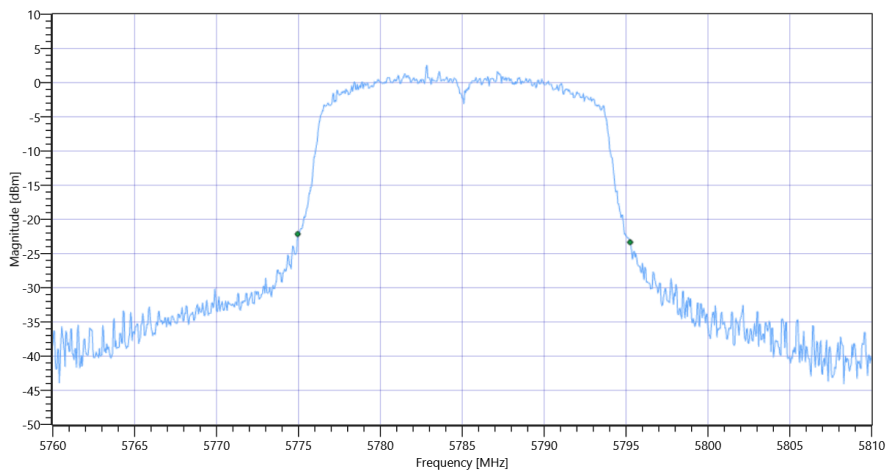

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3 26dB

Plot: Bandwidth within Band

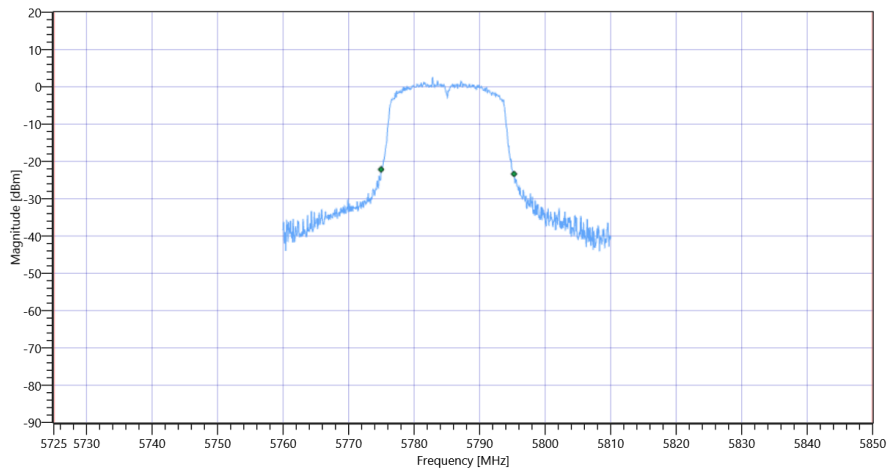

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3

General verdict

PASS



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3

Test References	
TC Start	02.08.2022 15:32:19
Ambit Temp [°C]   Humidity [rel%]	29.3   37
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5745
Frequency mid to test	False   Freq [MHz] 5785
Frequency high to test	False   Freq [MHz] 5825
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5745 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.41	dBm	INFO
Ref. Frequency	---	---	5746.800	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.41   11.46   20
Start [MHz]   Stop [MHz]	5720.000   5770.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.433	MHz	INFO
T1 99%	5725.000000	---	5736.3586	MHz	PASS
T2 99%	---	5850.000000	5753.7912	MHz	PASS

### Plot: Bandwidth only

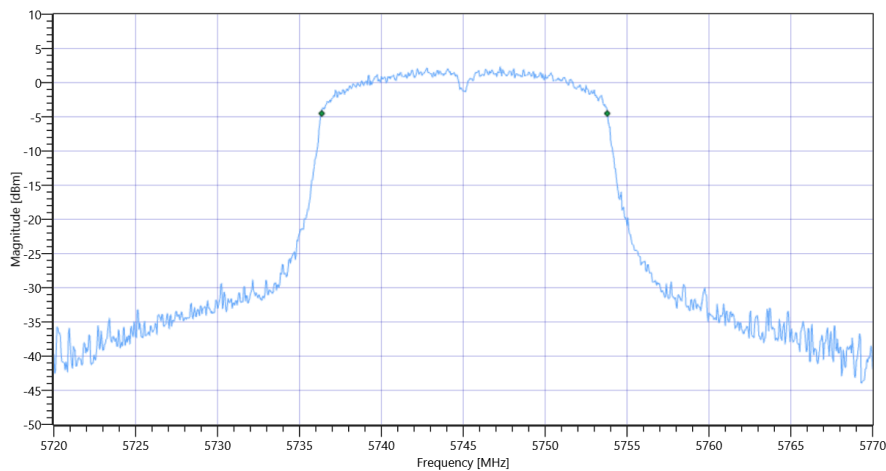

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3 99PCT


### Plot: Bandwidth within Band

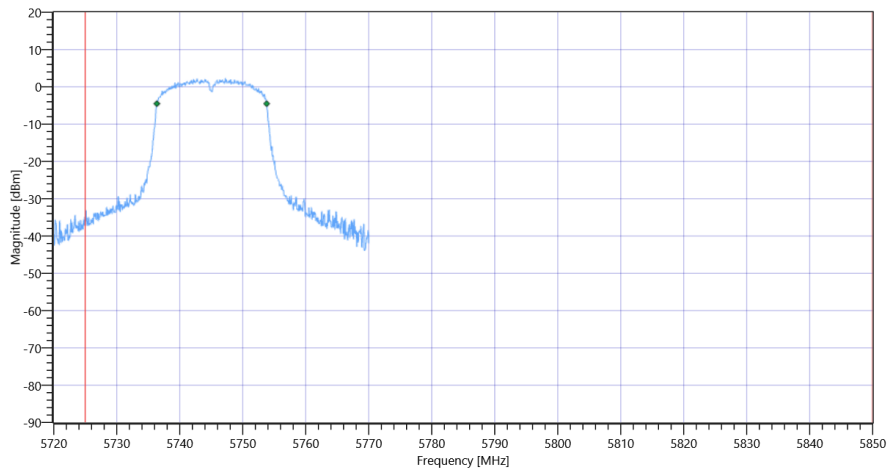

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.45	MHz	INFO
T1 26dB	5725.000000	---	5734.8500	MHz	PASS
T2 26dB	---	5850.000000	5755.3000	MHz	PASS

Plot: Bandwidth only

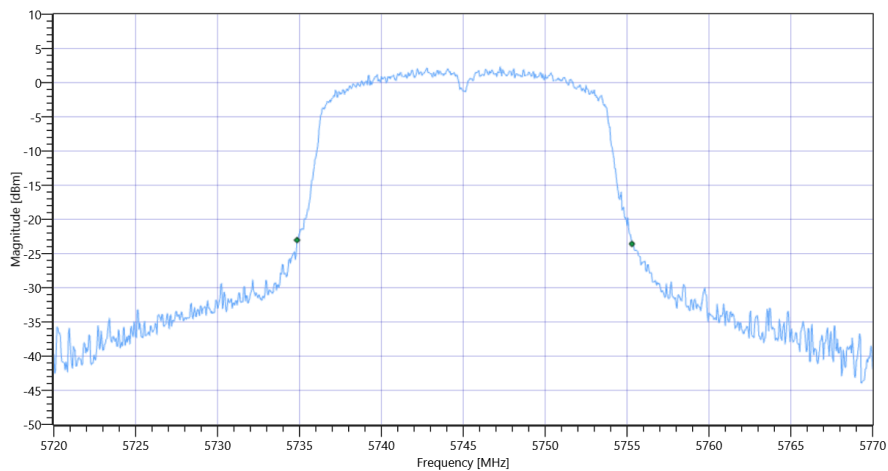

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3 26dB

Plot: Bandwidth within Band

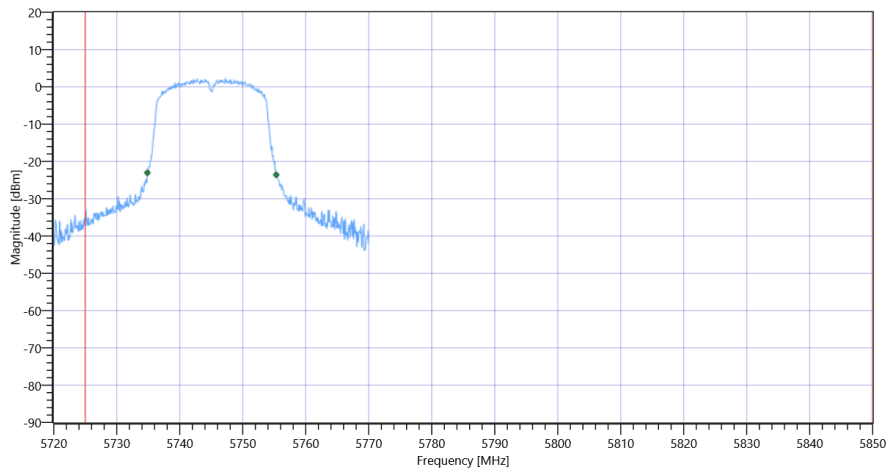

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-3

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C

Test References	
TC Start	02.08.2022 15:25:16
Ambit Temp [°C]   Humidity [rel%]	29.3   38
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5500
Frequency mid to test	False   Freq [MHz] 5600
Frequency high to test	True   Freq [MHz] 5700
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5700 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.87	dBm	INFO
Ref. Frequency	---	---	5698.400	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.87   11.34   20
Start [MHz]   Stop [MHz]	5675.000   5725.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.433	MHz	INFO
T1 99%	5470.000000	---	5691.3586	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5708.7912	MHz	

### Plot: Bandwidth only

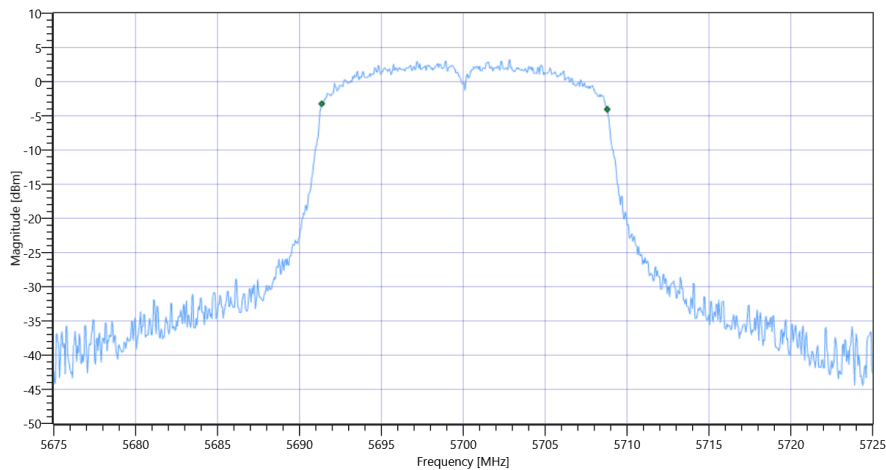

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C 99PCT


### Plot: Bandwidth within Band

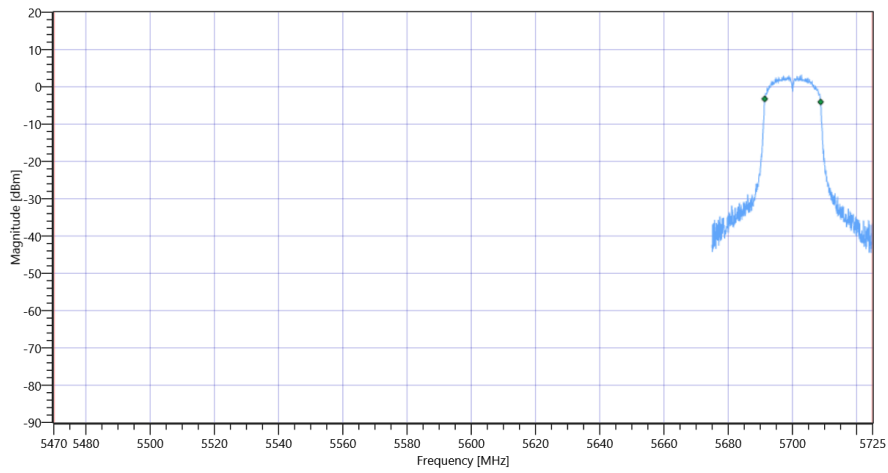

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.4	MHz	INFO
T1 26dB	5470.000000	---	5690.0500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5710.4500	MHz	

Plot: Bandwidth only

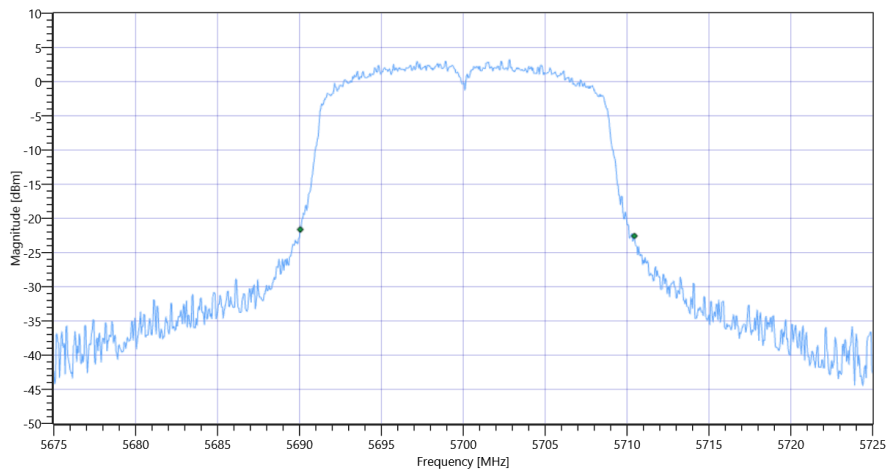

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C 26dB

Plot: Bandwidth within Band

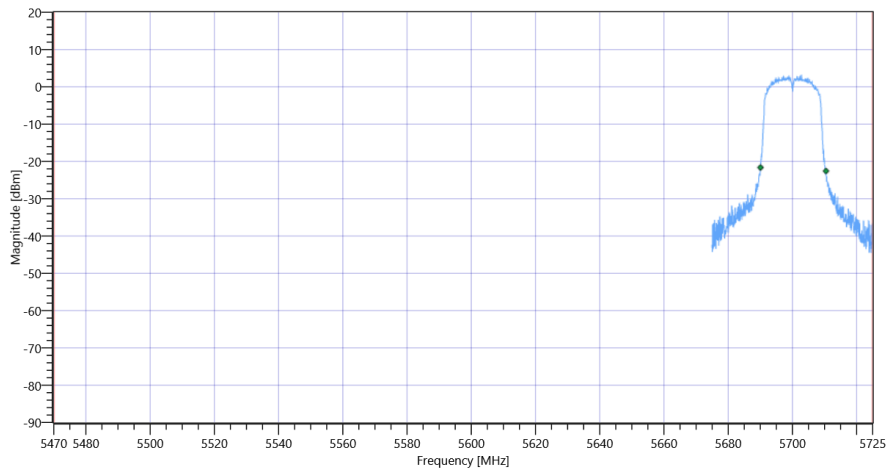

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C

General verdict

PASS



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C

Test References	
TC Start	02.08.2022 15:20:19
Ambit Temp [°C]   Humidity [rel%]	29.3   39
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5500
Frequency mid to test	True   Freq [MHz] 5600
Frequency high to test	False   Freq [MHz] 5700
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5600 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.71	dBm	INFO
Ref. Frequency	---	---	5602.400	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.71   11.36   20
Start [MHz]   Stop [MHz]	5575.000   5625.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.433	MHz	INFO
T1 99%	5470.000000	---	5591.2587	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5608.6913	MHz	

### Plot: Bandwidth only

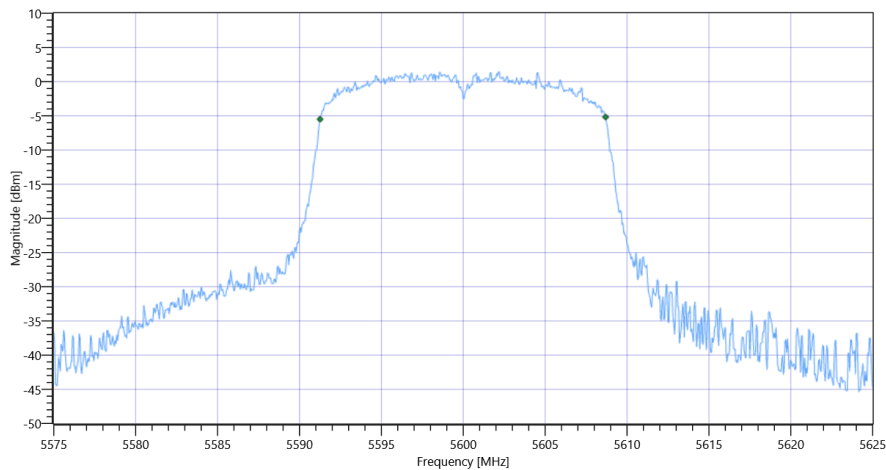

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C 99PCT


### Plot: Bandwidth within Band

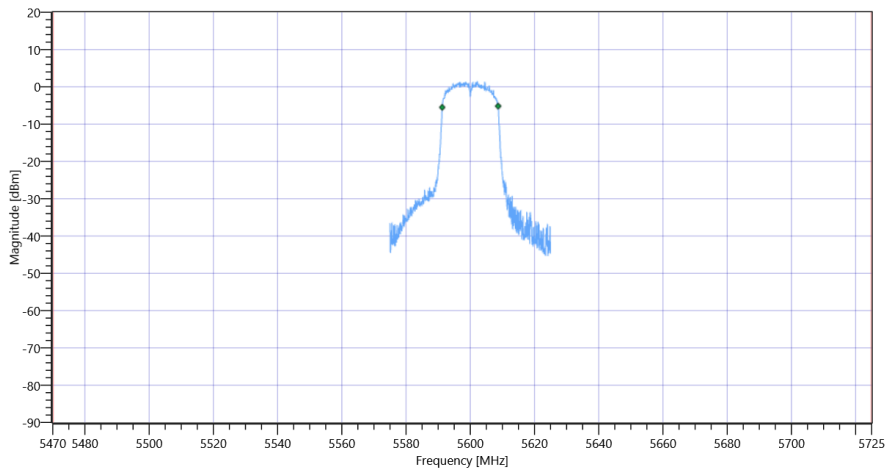

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.35	MHz	INFO
T1 26dB	5470.000000	---	5589.7000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5610.0500	MHz	

Plot: Bandwidth only

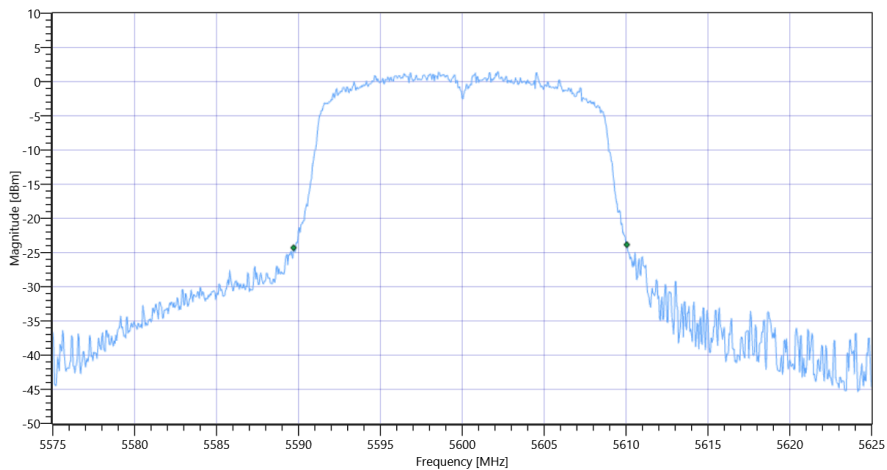

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C 26dB

Plot: Bandwidth within Band

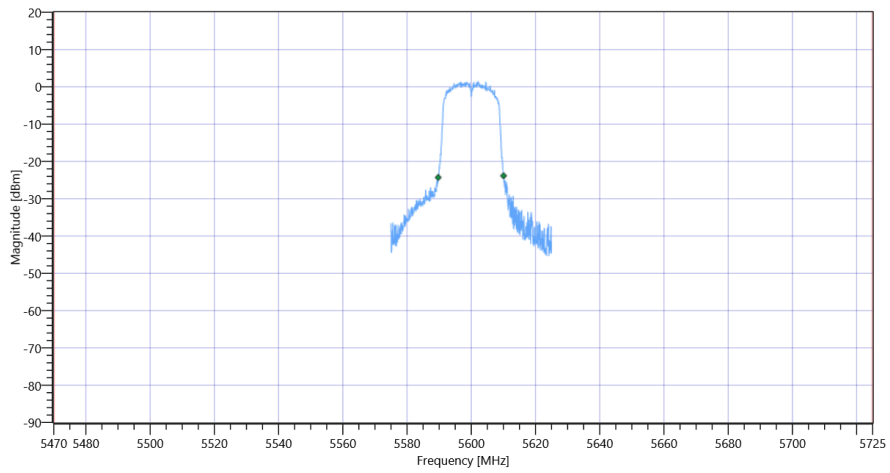

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C

Test References	
TC Start	02.08.2022 15:04:44
Ambit Temp [°C]   Humidity [rel%]	29.2   39
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5500
Frequency mid to test	False   Freq [MHz] 5600
Frequency high to test	False   Freq [MHz] 5700
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5500 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.88	dBm	INFO
Ref. Frequency	---	---	5496.800	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.88   11.34   20
Start [MHz]   Stop [MHz]	5475.000   5525.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.483	MHz	INFO
T1 99%	5470.000000	---	5491.3087	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5508.7912	MHz	

### Plot: Bandwidth only

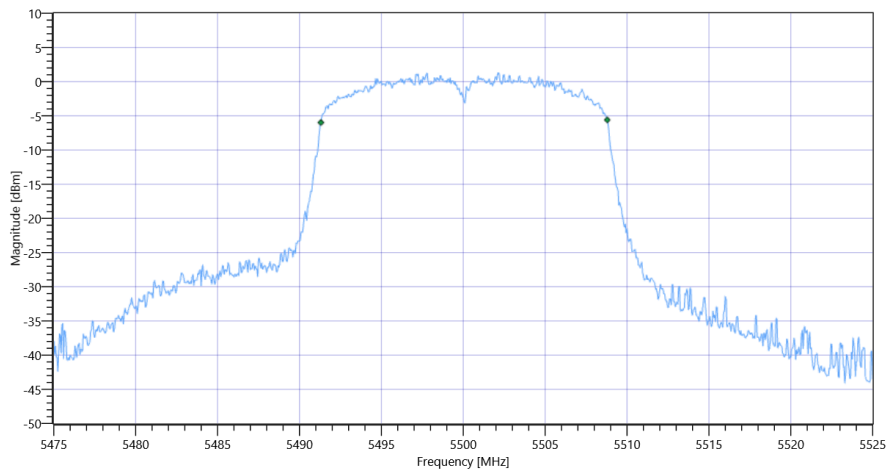

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C 99PCT


### Plot: Bandwidth within Band

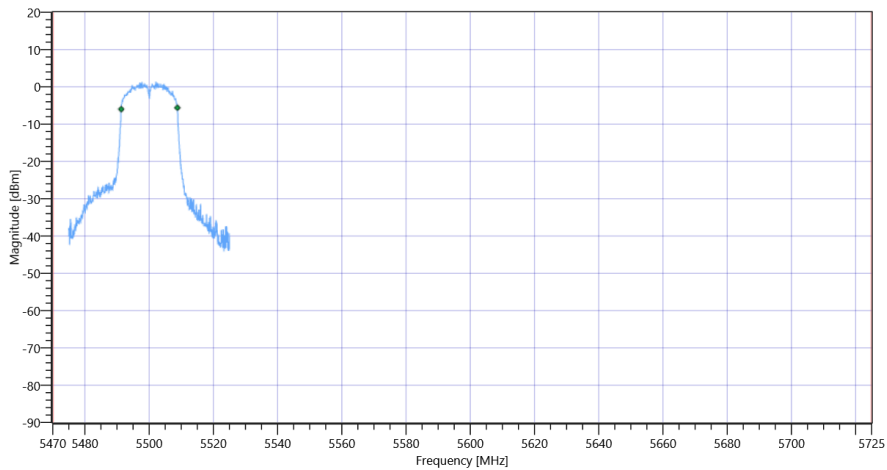

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	21.4	MHz	INFO
T1 26dB	5470.000000	---	5489.1000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5510.5000	MHz	

Plot: Bandwidth only

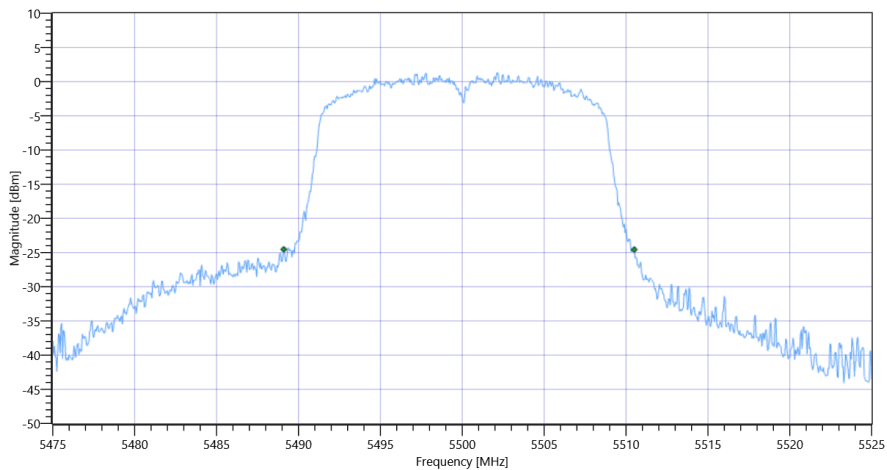

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C 26dB

Plot: Bandwidth within Band

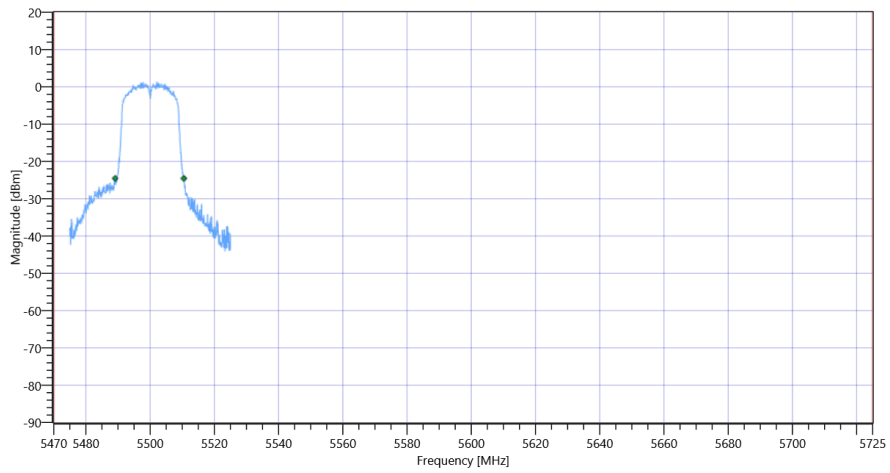

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2C

General verdict

PASS



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A

Test References	
TC Start	02.08.2022 14:58:59
Ambit Temp [°C]   Humidity [rel%]	29.0   39
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5260
Frequency mid to test	False   Freq [MHz] 5280
Frequency high to test	True   Freq [MHz] 5320
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5320 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.13	dBm	INFO
Ref. Frequency	---	---	5323.400	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	16.13   11.48   20
Start [MHz]   Stop [MHz]	5295.000   5345.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.433	MHz	INFO
T1 99%	5250.000000	---	5311.3586	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5328.7912	MHz	PASS

### Plot: Bandwidth only

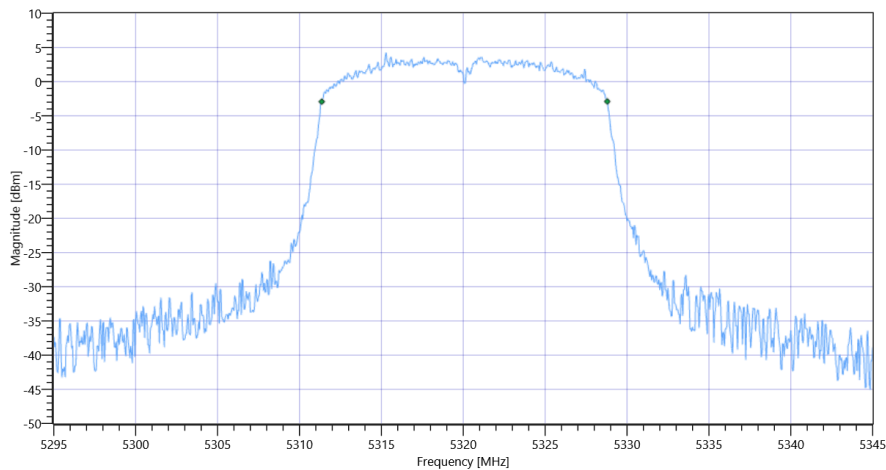

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A 99PCT


### Plot: Bandwidth within Band

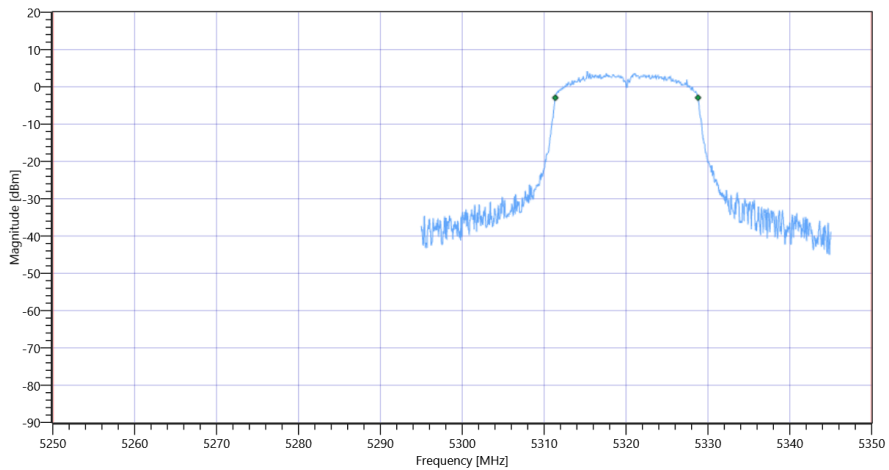

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.45	MHz	INFO
T1 26dB	5250.000000	---	5310.0500	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5335.000000	5330.5000	MHz	PASS

Plot: Bandwidth only

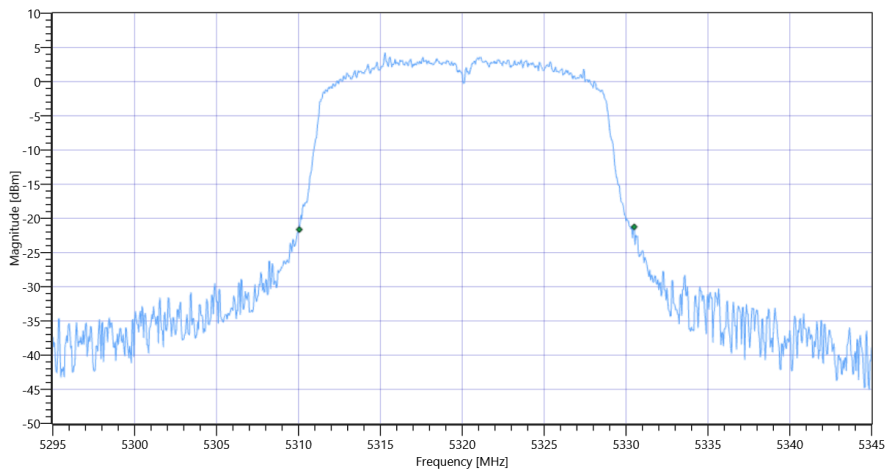

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A 26dB

Plot: Bandwidth within Band

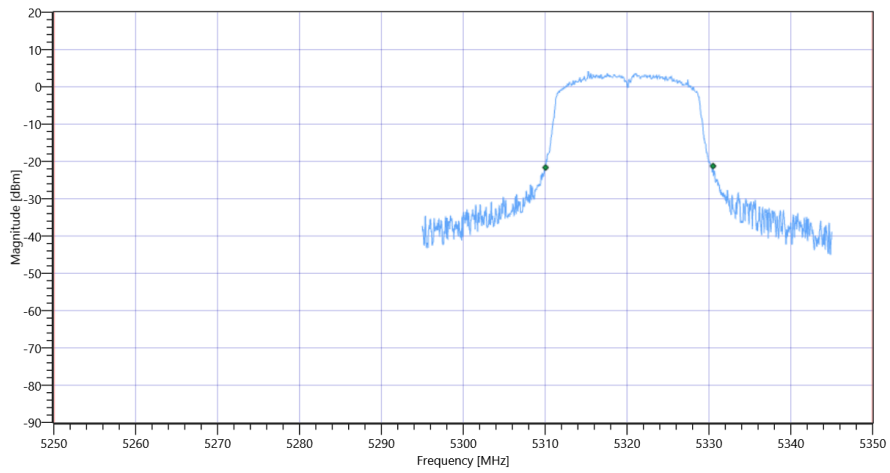

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A

Test References	
TC Start	02.08.2022 14:53:37
Ambit Temp [°C]   Humidity [rel%]	29.0   39
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5260
Frequency mid to test	True   Freq [MHz] 5280
Frequency high to test	False   Freq [MHz] 5320
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5280 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	9.15	dBm	INFO
Ref. Frequency	---	---	5277.200	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	17.15   11.53   25
Start [MHz]   Stop [MHz]	5255.000   5305.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.433	MHz	INFO
T1 99%	5250.000000	---	5271.3586	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5288.7912	MHz	PASS

### Plot: Bandwidth only

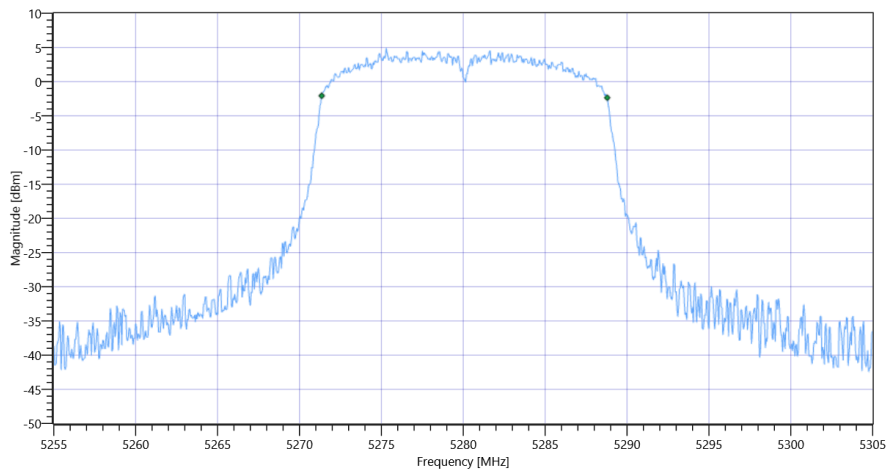

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A 99PCT


### Plot: Bandwidth within Band

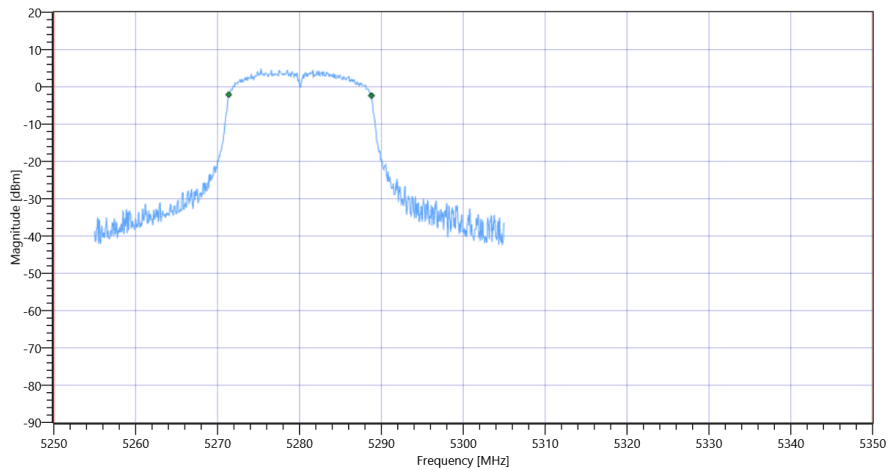

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.55	MHz	INFO
T1 26dB	5250.000000	---	5270.0000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5290.5500	MHz	PASS

Plot: Bandwidth only

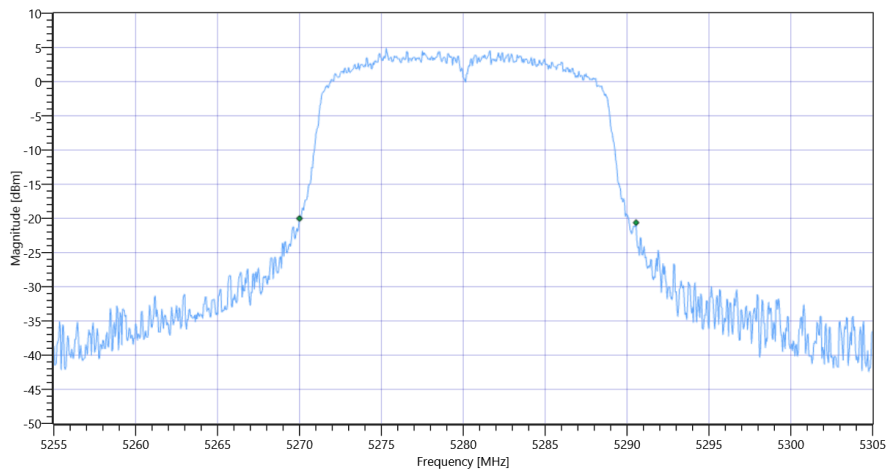

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A 26dB

Plot: Bandwidth within Band

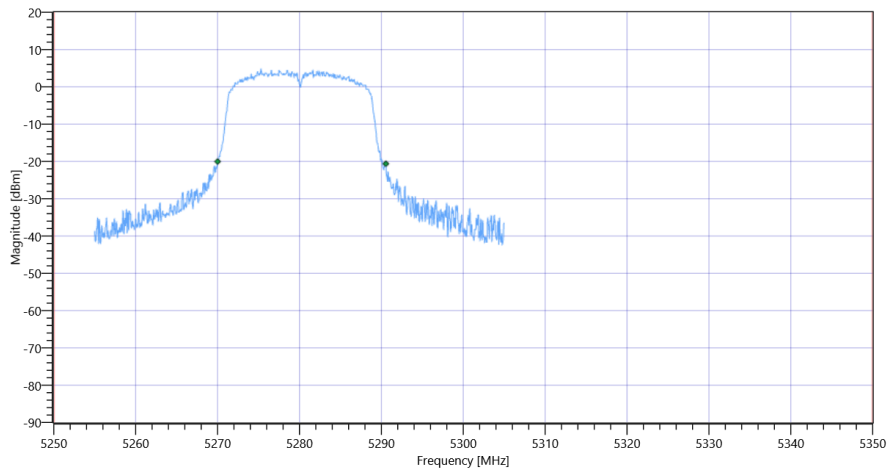

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A

General verdict

PASS



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A

Test References	
TC Start	02.08.2022 14:46:25
Ambit Temp [°C]   Humidity [rel%]	28.9   39
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5260
Frequency mid to test	False   Freq [MHz] 5280
Frequency high to test	False   Freq [MHz] 5320
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5260 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	9.08	dBm	INFO
Ref. Frequency	---	---	5262.600	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	17.08   11.53   25
Start [MHz]   Stop [MHz]	5235.000   5285.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.433	MHz	INFO
T1 99%	5250.000000	---	5251.4086	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5268.8412	MHz	PASS

### Plot: Bandwidth only

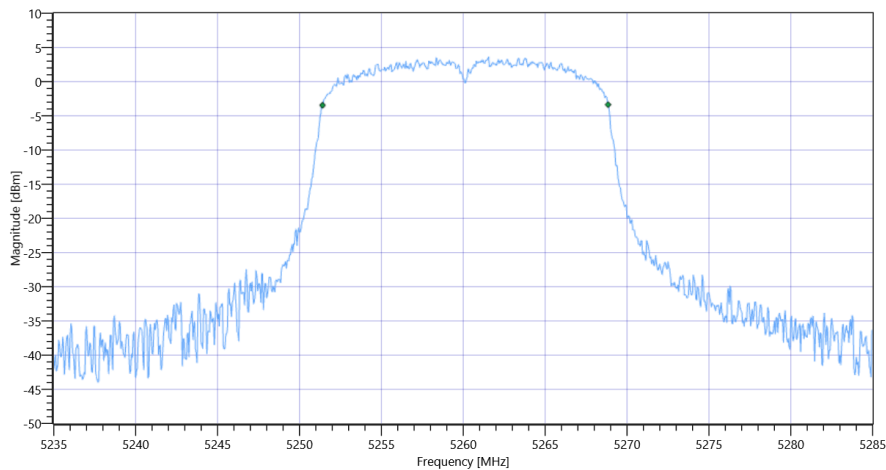

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A 99PCT


### Plot: Bandwidth within Band

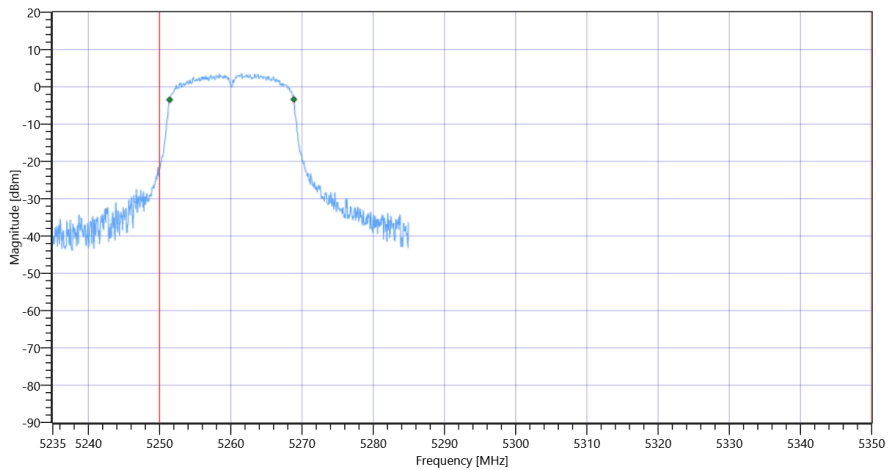

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.7	MHz	INFO
T1 26dB	5250.000000	---	5249.7500	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5270.4500	MHz	PASS

Plot: Bandwidth only

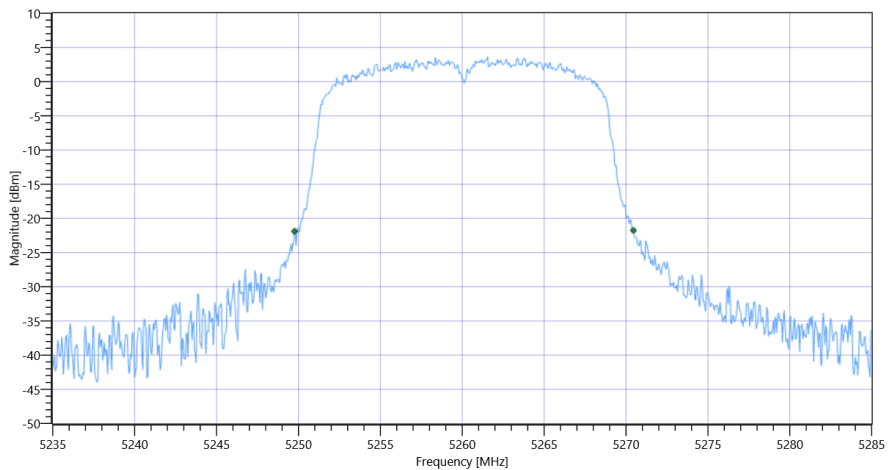

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A 26dB

Plot: Bandwidth within Band

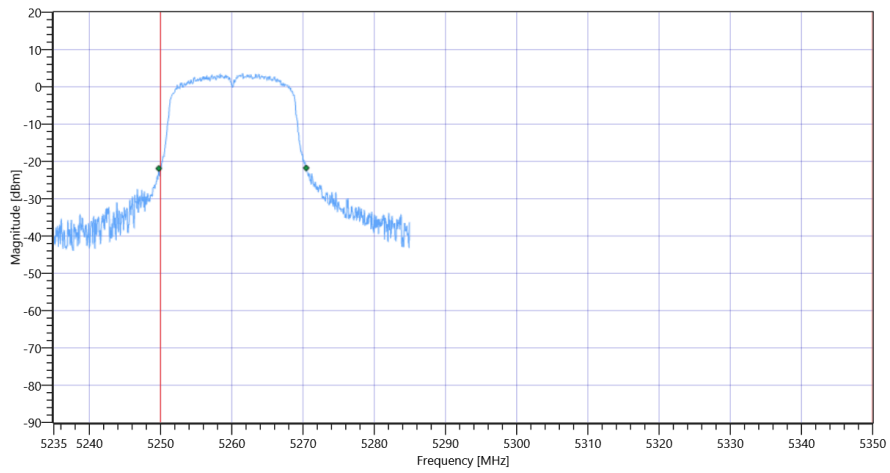

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-2A

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1

Test References	
TC Start	02.08.2022 14:41:16
Ambit Temp [°C]   Humidity [rel%]	28.9   40
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5180
Frequency mid to test	False   Freq [MHz] 5200
Frequency high to test	True   Freq [MHz] 5240
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5240 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.46	dBm	INFO
Ref. Frequency	---	---	5241.000	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.46   11.52   20
Start [MHz]   Stop [MHz]	5215.000   5265.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.483	MHz	INFO
T1 99%	5150.000000	---	5231.3586	MHz	PASS
T2 99%	---	5250.000000	5248.8412	MHz	PASS

### Plot: Bandwidth only

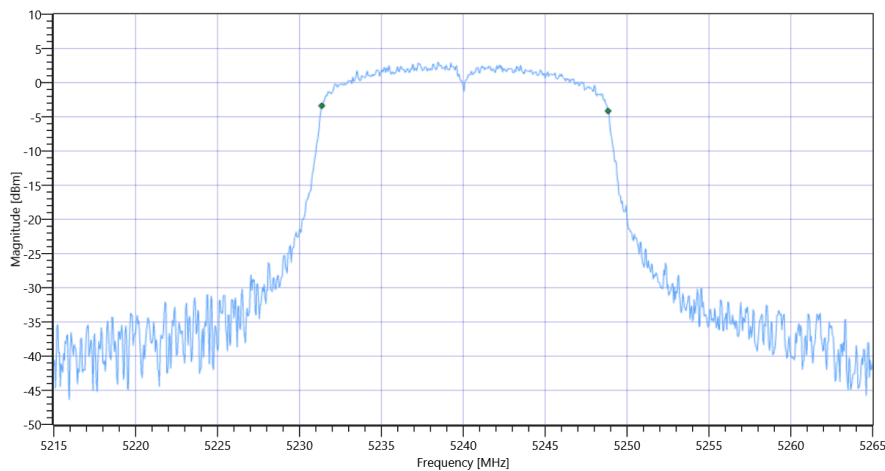

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1 99PCT


### Plot: Bandwidth within Band

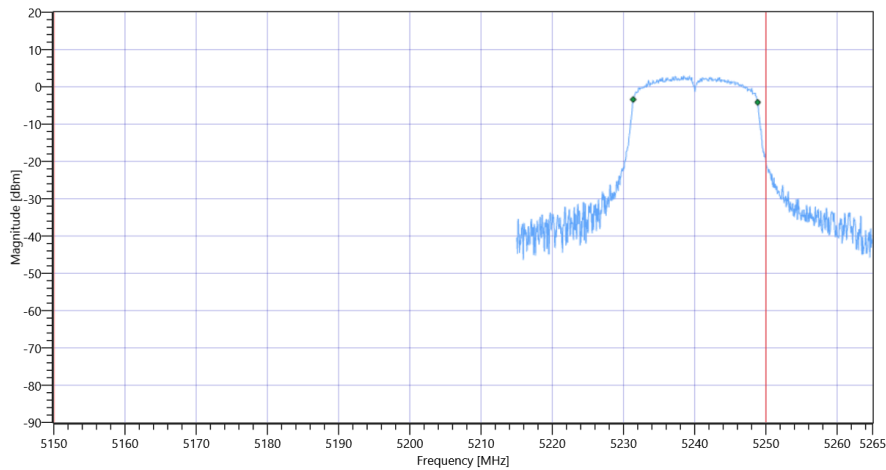

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.9	MHz	INFO
T1 26dB	5150.000000	---	5229.7000	MHz	PASS
T2 26dB	---	5250.000000	5250.6000	MHz	DFS required

Plot: Bandwidth only

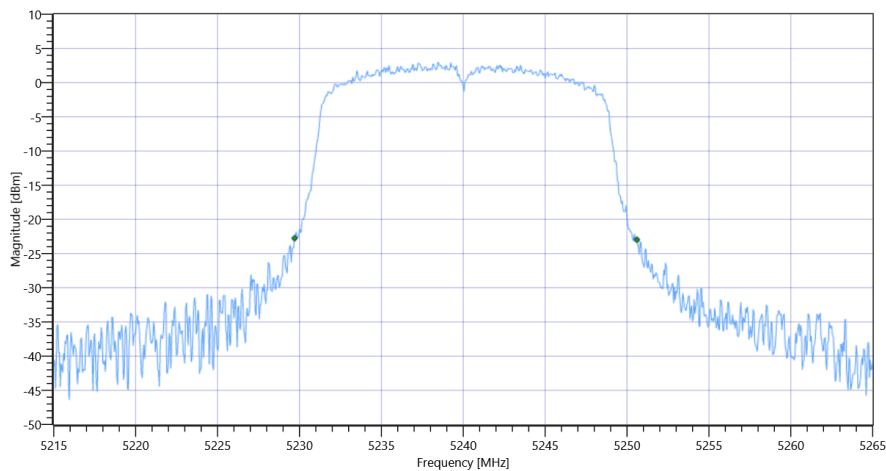

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1 26dB

Plot: Bandwidth within Band

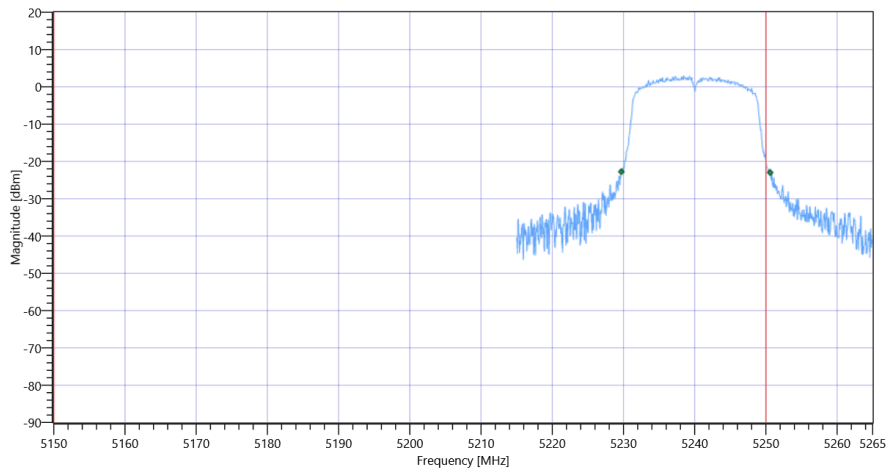

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1

General verdict

PASS



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1

Test References	
TC Start	02.08.2022 14:24:33
Ambit Temp [°C]   Humidity [rel%]	28.9   39
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5180
Frequency mid to test	True   Freq [MHz] 5200
Frequency high to test	False   Freq [MHz] 5240
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5200 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.74	dBm	INFO
Ref. Frequency	---	---	5198.800	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.74   11.47   20
Start [MHz]   Stop [MHz]	5175.000   5225.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.433	MHz	INFO
T1 99%	5150.000000	---	5191.4086	MHz	PASS
T2 99%	---	5250.000000	5208.8412	MHz	PASS

### Plot: Bandwidth only

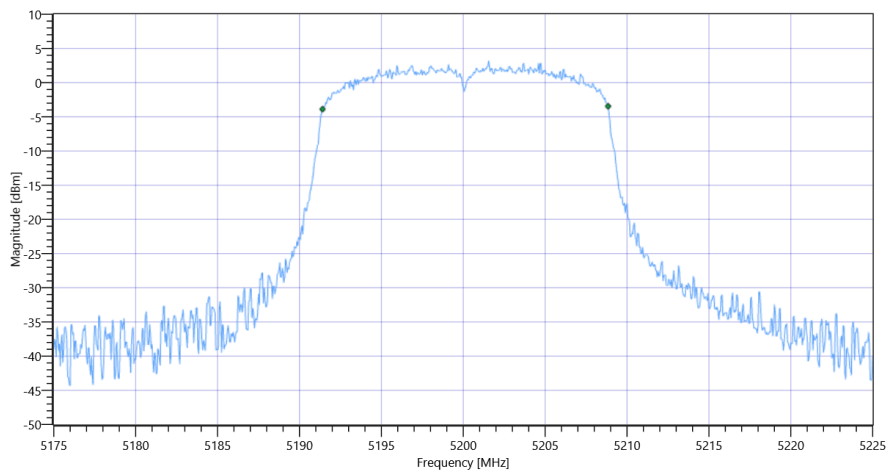

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1 99PCT


### Plot: Bandwidth within Band

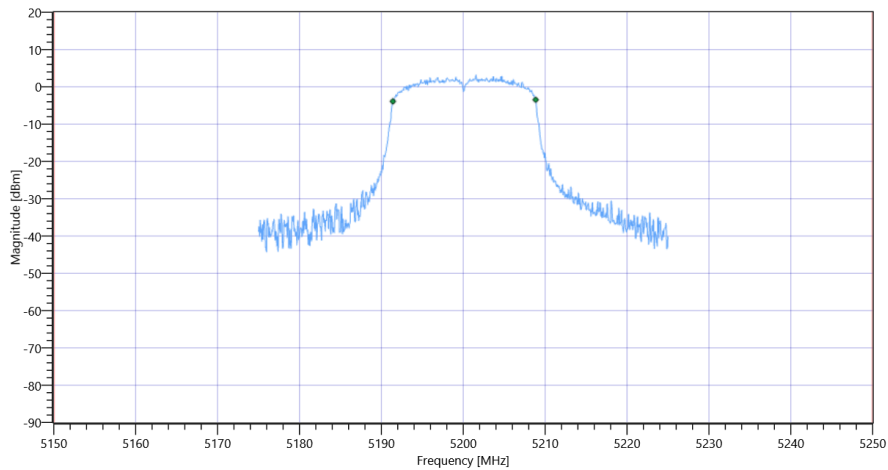

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1


RESULT						
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict	
Bandwidth 26dB	---	---	20.75	MHz	INFO	
T1 26dB	5150.000000	---	5189.9500	MHz	PASS	
T2 26dB	---	5250.000000	5210.7000	MHz	PASS	

Plot: Bandwidth only

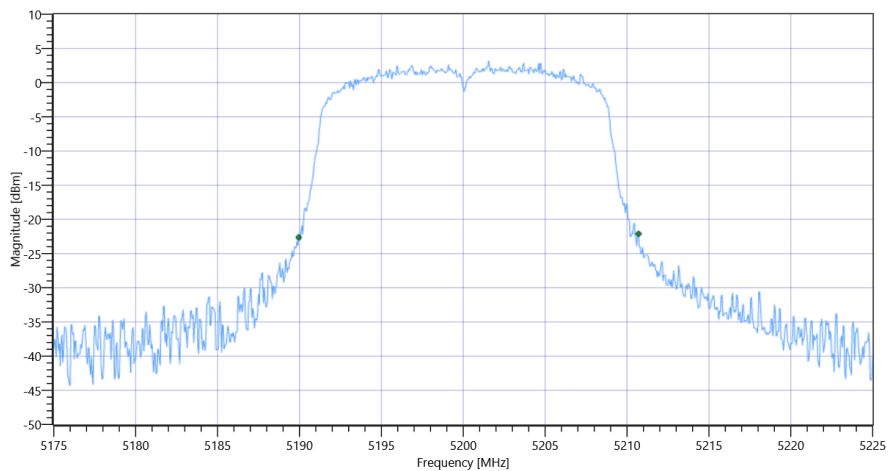

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1 26dB

Plot: Bandwidth within Band

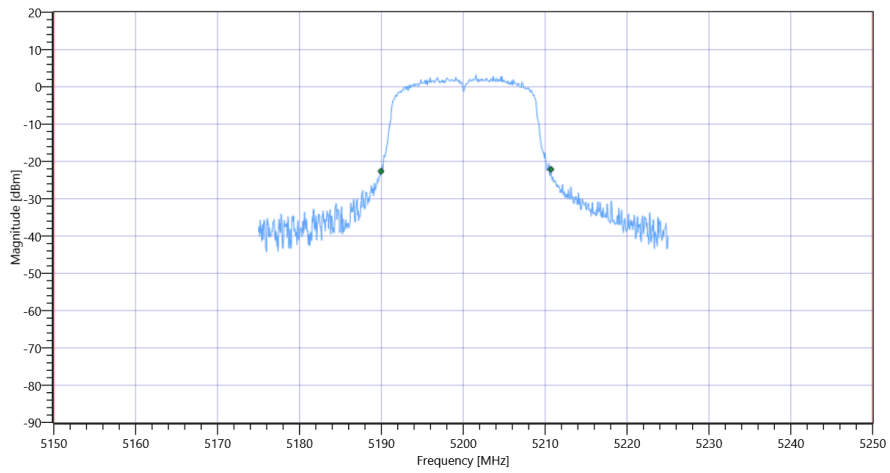

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1

Test References	
TC Start	02.08.2022 14:18:10
Ambit Temp [°C]   Humidity [rel%]	28.8   40
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5180
Frequency mid to test	False   Freq [MHz] 5200
Frequency high to test	False   Freq [MHz] 5240
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5180 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.76	dBm	INFO
Ref. Frequency	---	---	5181.200	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.76   11.43   20
Start [MHz]   Stop [MHz]	5155.000   5205.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.433	MHz	INFO
T1 99%	5150.000000	---	5171.3586	MHz	PASS
T2 99%	---	5250.000000	5188.7912	MHz	PASS

### Plot: Bandwidth only

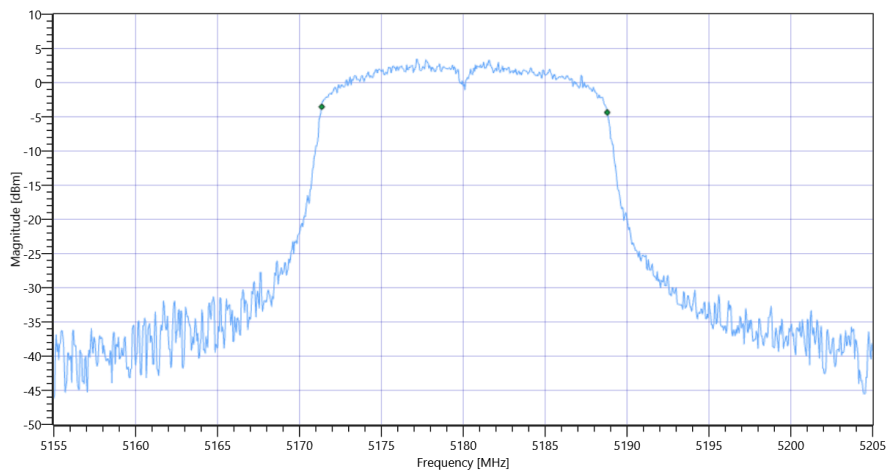

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1 99PCT


### Plot: Bandwidth within Band

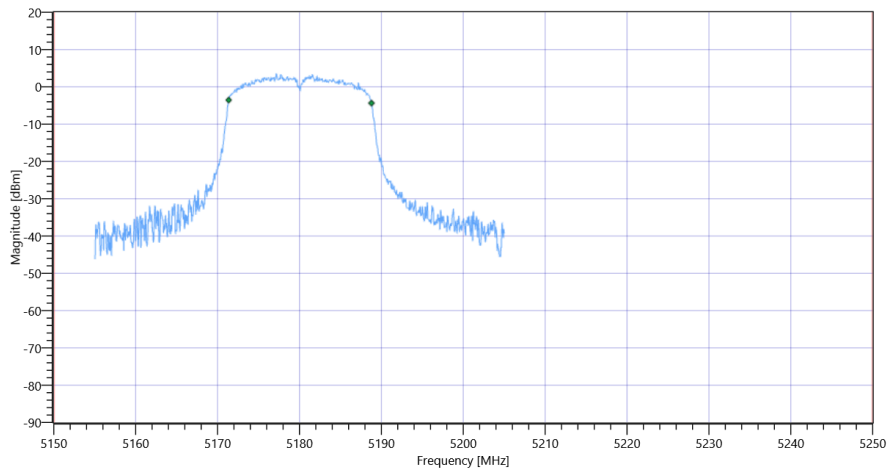

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.3	MHz	INFO
T1 26dB	5150.000000	---	5169.9000	MHz	PASS
T2 26dB	---	5250.000000	5190.2000	MHz	PASS

Plot: Bandwidth only

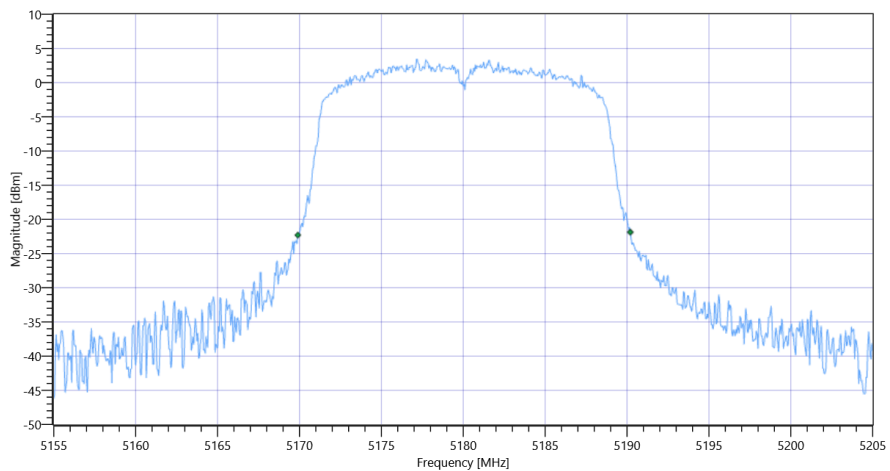

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1 26dB

Plot: Bandwidth within Band

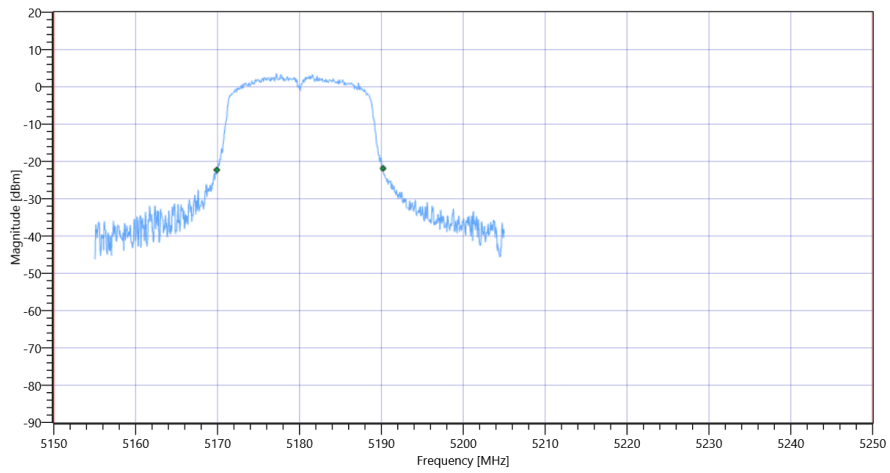

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1

General verdict

PASS



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3

Test References	
TC Start	02.08.2022 14:11:41
Ambit Temp [°C]   Humidity [rel%]	28.7   40
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5745
Frequency mid to test	False   Freq [MHz] 5785
Frequency high to test	True   Freq [MHz] 5825
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5825 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.30	dBm	INFO
Ref. Frequency	---	---	5829.000	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.30   11.58   20
Start [MHz]   Stop [MHz]	5800.000   5850.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.384	MHz	INFO
T1 99%	5725.000000	---	5816.8581	MHz	PASS
T2 99%	---	5850.000000	5833.2418	MHz	PASS

### Plot: Bandwidth only

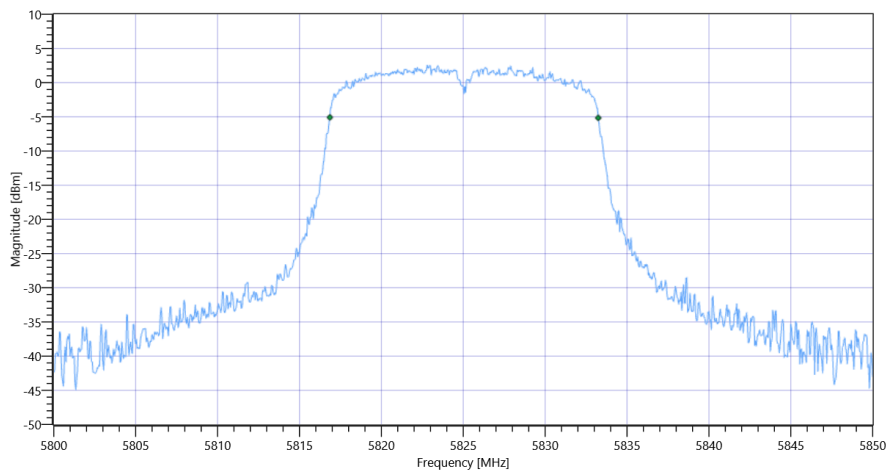

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3 99PCT


### Plot: Bandwidth within Band

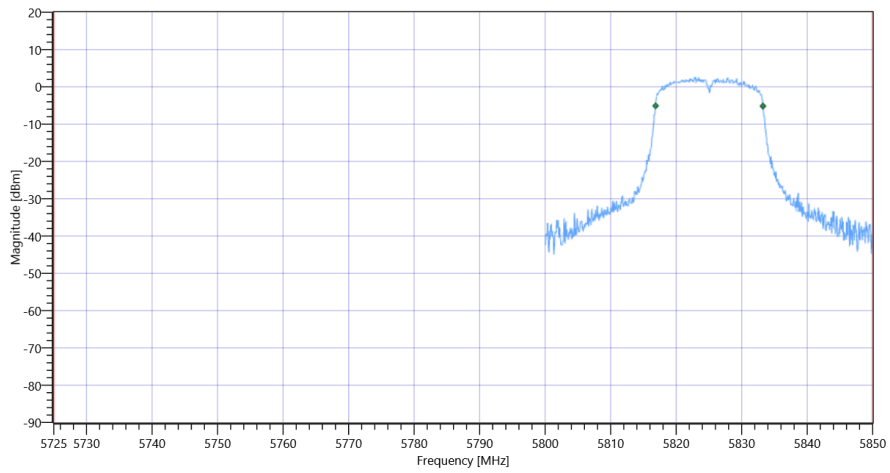

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.05	MHz	INFO
T1 26dB	5725.000000	---	5815.2000	MHz	PASS
T2 26dB	---	5850.000000	5835.2500	MHz	PASS

Plot: Bandwidth only

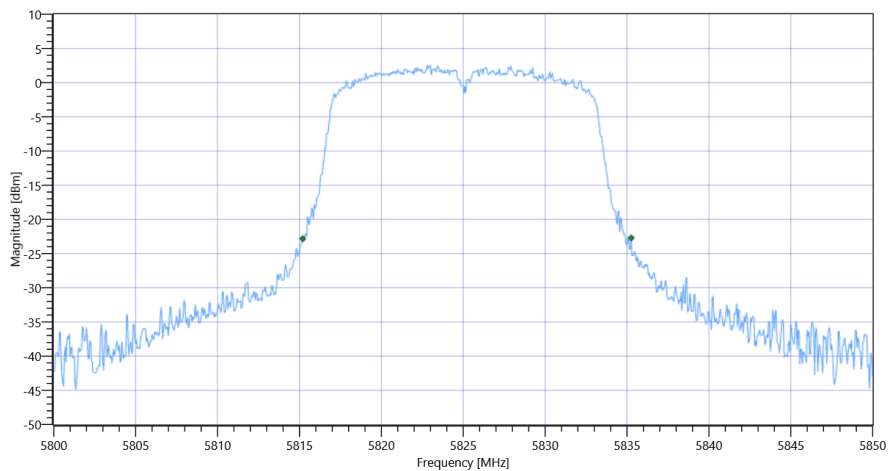

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3 26dB

Plot: Bandwidth within Band

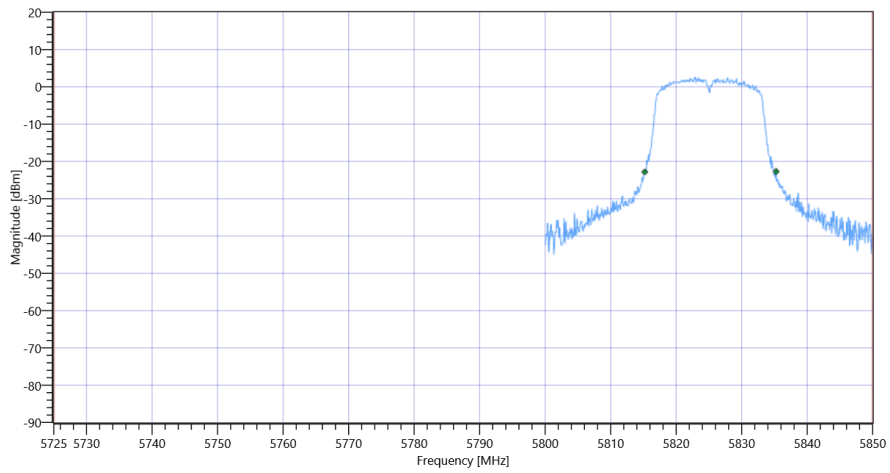

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3

Test References	
TC Start	02.08.2022 14:03:20
Ambit Temp [°C]   Humidity [rel%]	28.6   41
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5745
Frequency mid to test	True   Freq [MHz] 5785
Frequency high to test	False   Freq [MHz] 5825
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5785 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.89	dBm	INFO
Ref. Frequency	---	---	5786.800	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	14.89   11.48   20
Start [MHz]   Stop [MHz]	5760.000   5810.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.384	MHz	INFO
T1 99%	5725.000000	---	5776.8581	MHz	PASS
T2 99%	---	5850.000000	5793.2418	MHz	PASS

### Plot: Bandwidth only

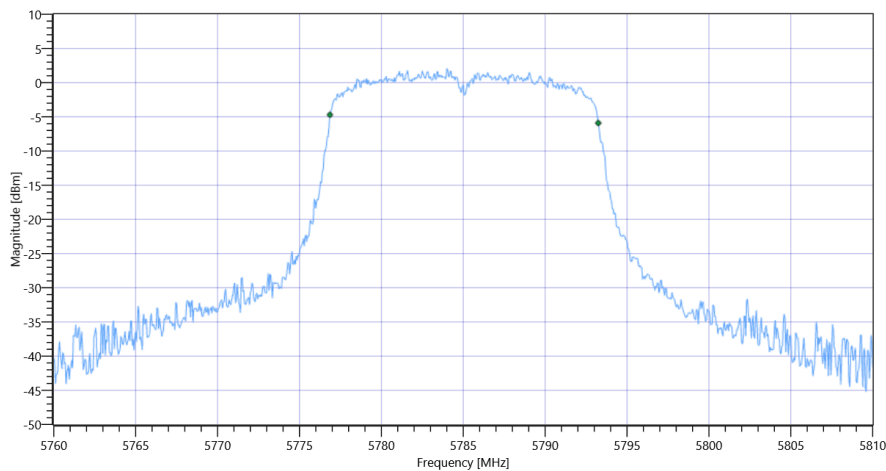

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3 99PCT


### Plot: Bandwidth within Band

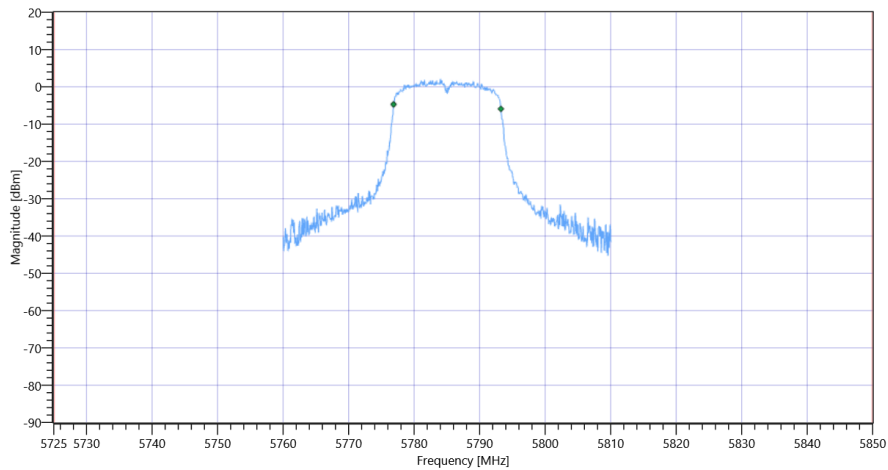

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	19.85	MHz	INFO
T1 26dB	5725.000000	---	5775.1500	MHz	PASS
T2 26dB	---	5850.000000	5795.0000	MHz	PASS

Plot: Bandwidth only

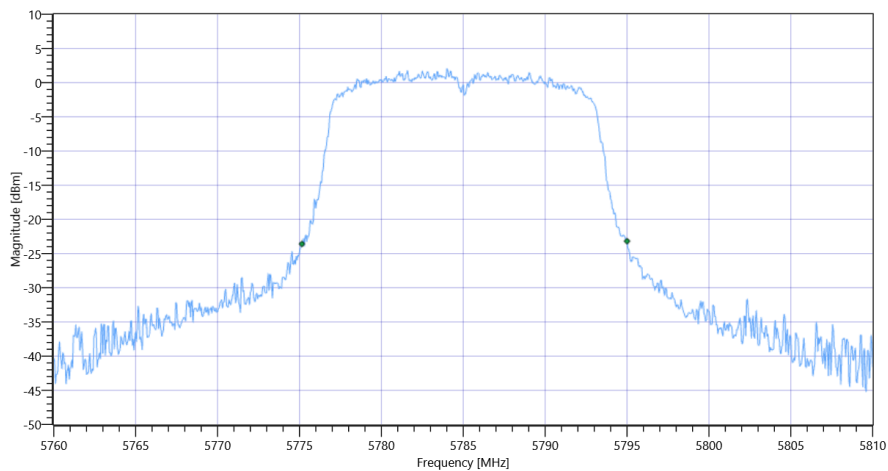

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3 26dB

Plot: Bandwidth within Band

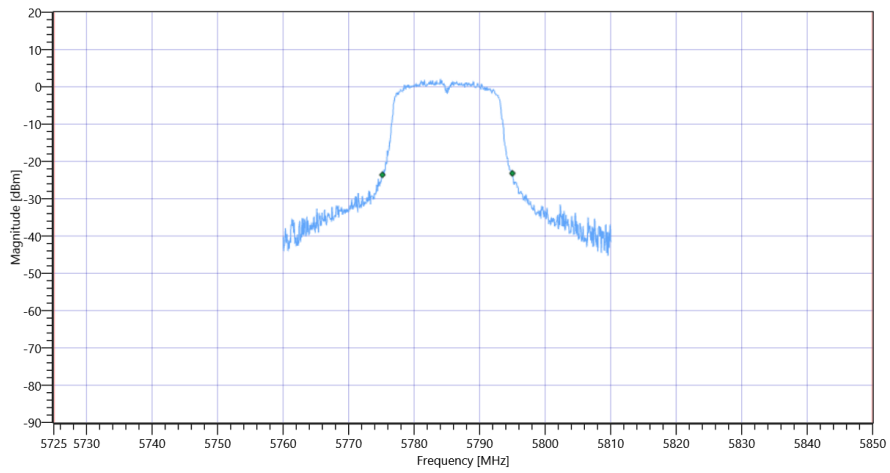

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3

General verdict

PASS



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3

Test References	
TC Start	02.08.2022 13:51:54
Ambit Temp [°C]   Humidity [rel%]	28.4   41
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5745
Frequency mid to test	False   Freq [MHz] 5785
Frequency high to test	False   Freq [MHz] 5825
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5745 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.39	dBm	INFO
Ref. Frequency	---	---	5747.400	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.39   11.46   20
Start [MHz]   Stop [MHz]	5720.000   5770.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.334	MHz	INFO
T1 99%	5725.000000	---	5736.9081	MHz	PASS
T2 99%	---	5850.000000	5753.2418	MHz	PASS

### Plot: Bandwidth only

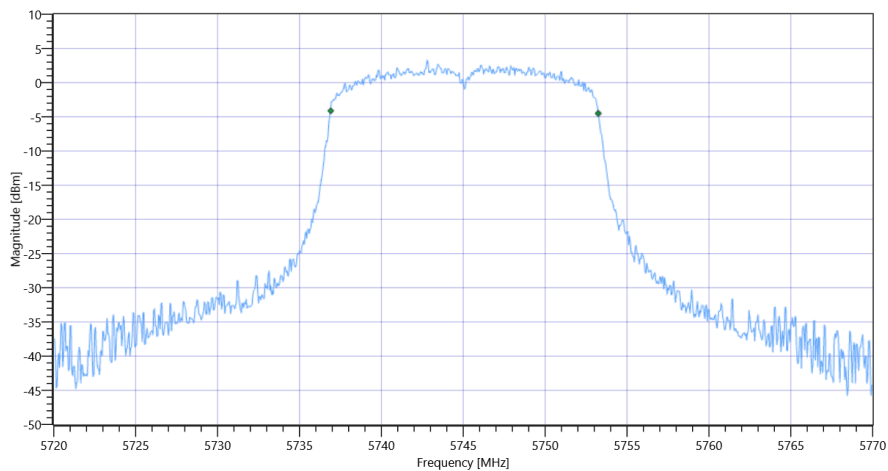

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3 99PCT


### Plot: Bandwidth within Band

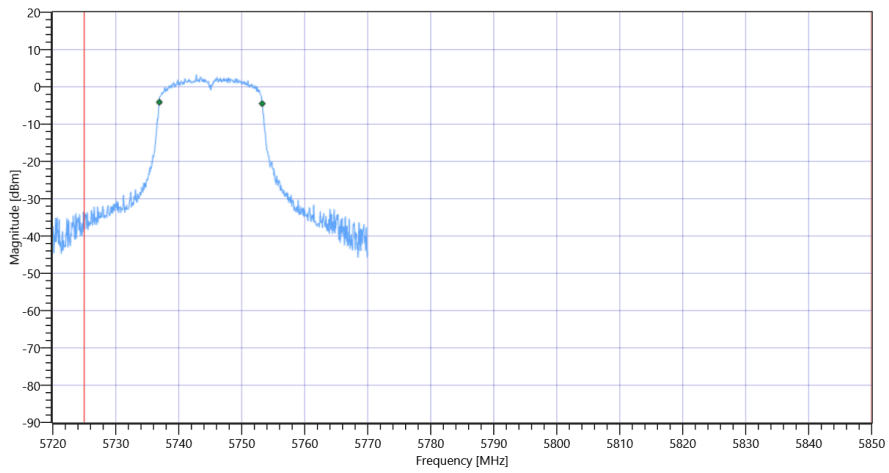

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	19.8	MHz	INFO
T1 26dB	5725.000000	---	5735.3500	MHz	PASS
T2 26dB	---	5850.000000	5755.1500	MHz	PASS

Plot: Bandwidth only

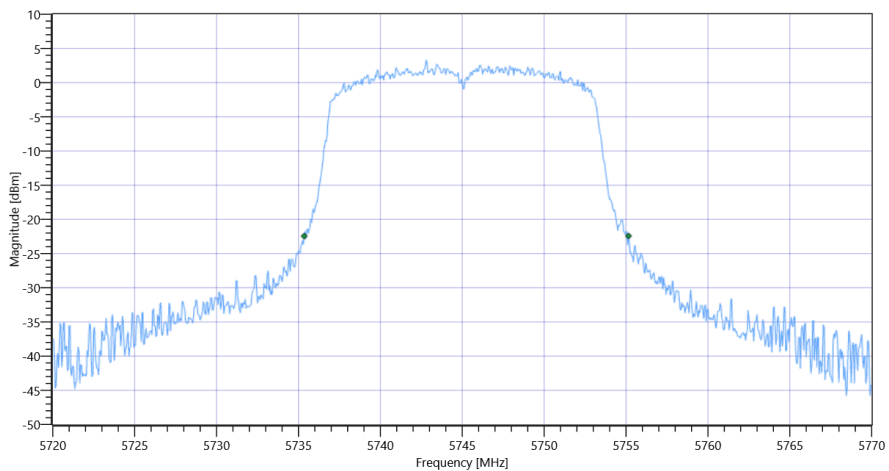

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3 26dB

Plot: Bandwidth within Band

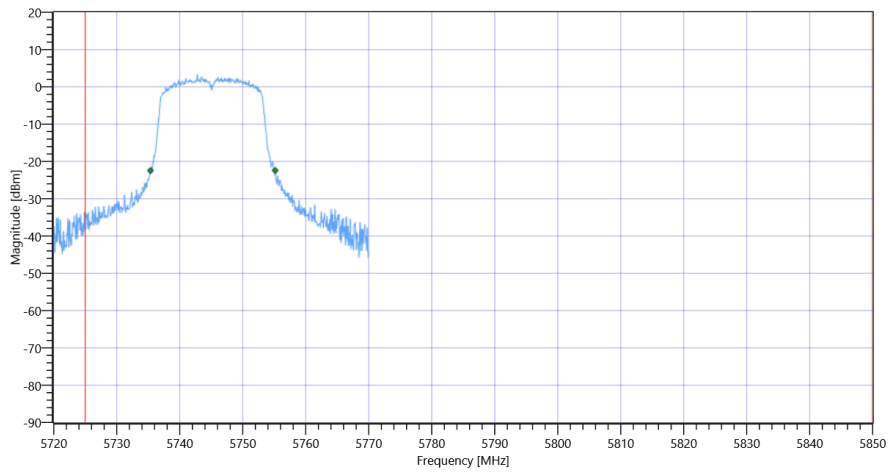

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-3

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C

Test References	
TC Start	02.08.2022 13:40:17
Ambit Temp [°C]   Humidity [rel%]	28.3   42
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5500
Frequency mid to test	False   Freq [MHz] 5600
Frequency high to test	True   Freq [MHz] 5700
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5700 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.70	dBm	INFO
Ref. Frequency	---	---	5701.000	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.70   11.34   20
Start [MHz]   Stop [MHz]	5675.000   5725.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.334	MHz	INFO
T1 99%	5470.000000	---	5691.9081	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5708.2418	MHz	

### Plot: Bandwidth only

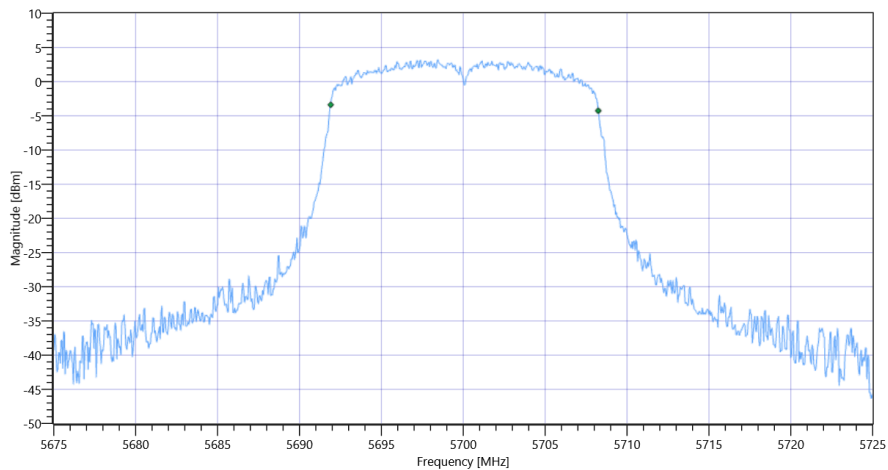

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C 99PCT


### Plot: Bandwidth within Band

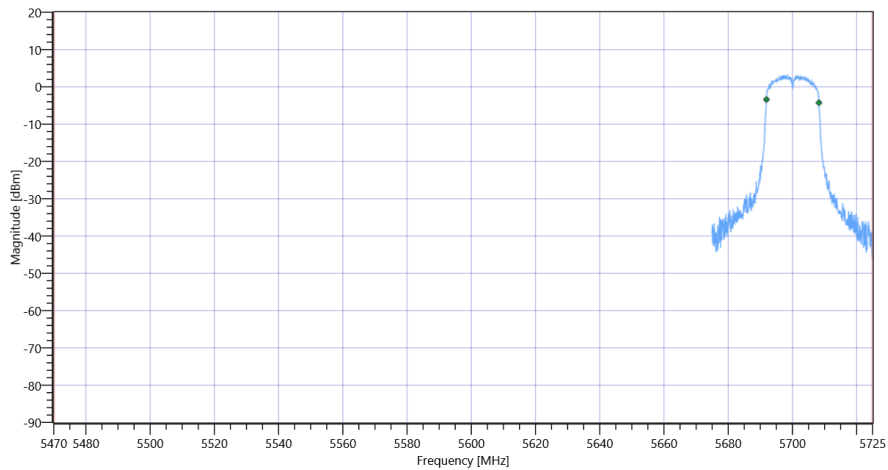

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	19.9	MHz	INFO
T1 26dB	5470.000000	---	5690.1000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5710.0000	MHz	

Plot: Bandwidth only

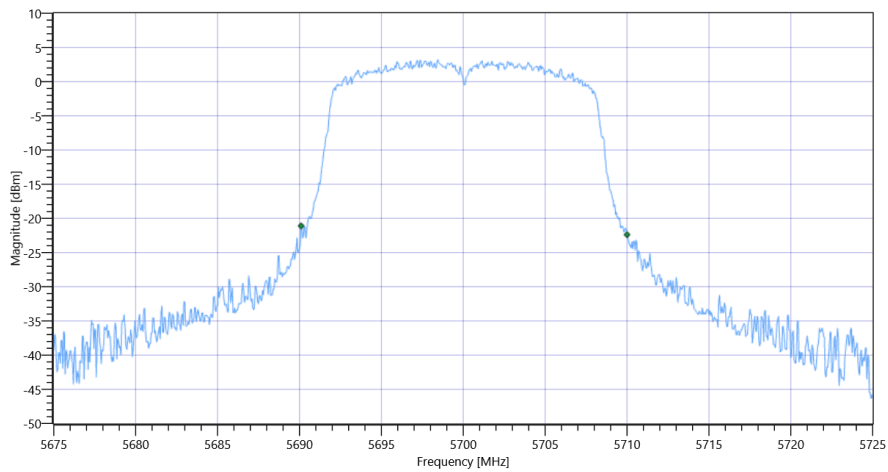

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C 26dB

Plot: Bandwidth within Band

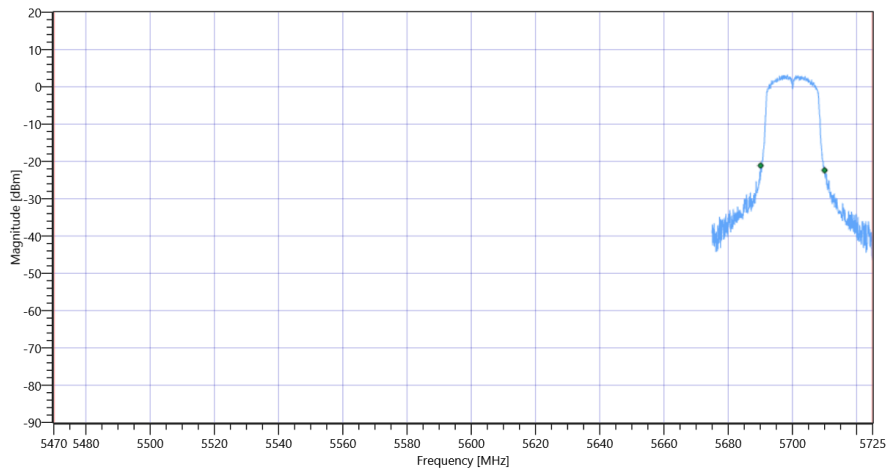

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C

General verdict

PASS



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C

Test References	
TC Start	02.08.2022 13:35:13
Ambit Temp [°C]   Humidity [rel%]	28.3   42
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5500
Frequency mid to test	True   Freq [MHz] 5600
Frequency high to test	False   Freq [MHz] 5700
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5600 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.70	dBm	INFO
Ref. Frequency	---	---	5595.600	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	14.70   11.36   20
Start [MHz]   Stop [MHz]	5575.000   5625.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.334	MHz	INFO
T1 99%	5470.000000	---	5591.8581	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5608.1918	MHz	

### Plot: Bandwidth only

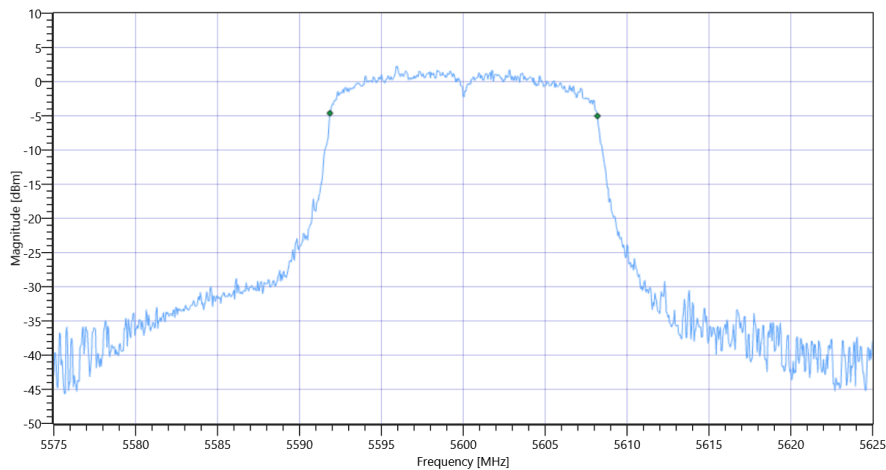

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C 99PCT


### Plot: Bandwidth within Band

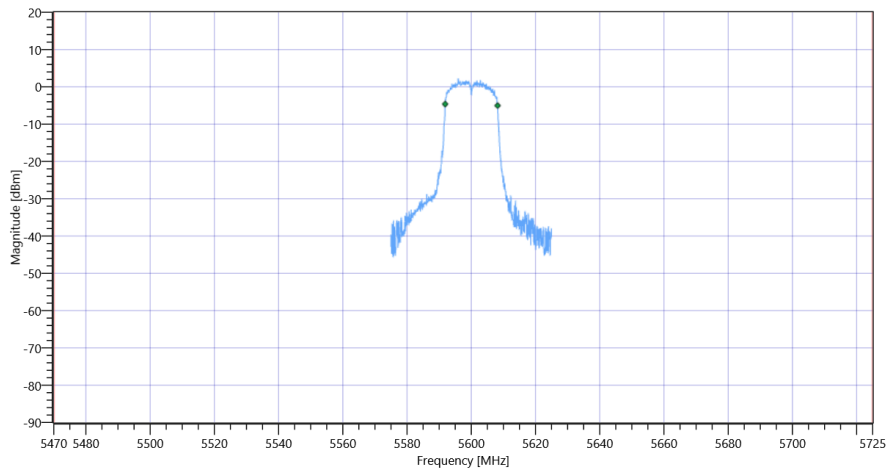

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	19.9	MHz	INFO
T1 26dB	5470.000000	---	5589.8000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5609.7000	MHz	

Plot: Bandwidth only

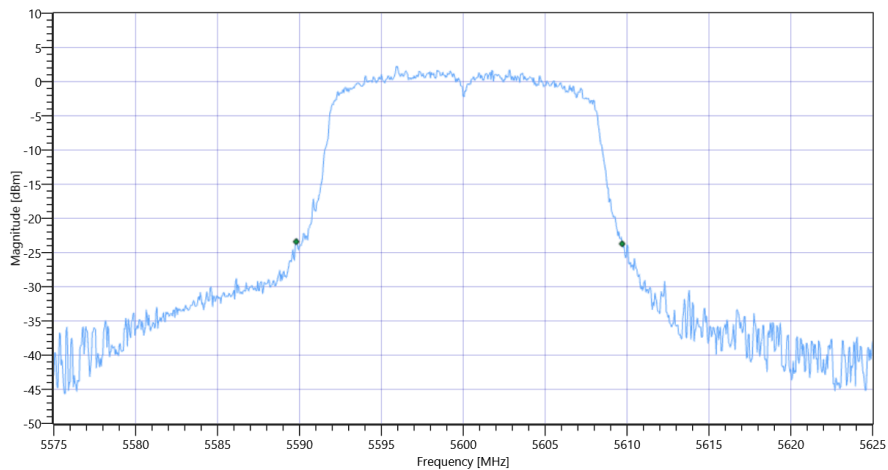

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C 26dB

Plot: Bandwidth within Band

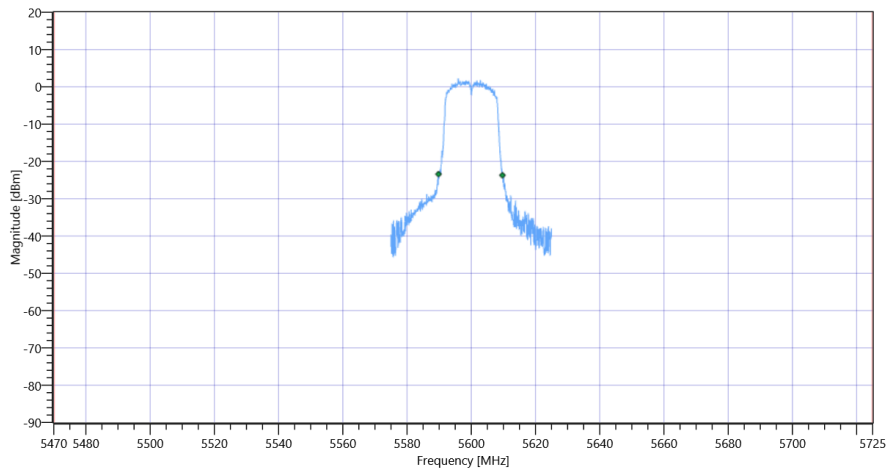

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C

Test References	
TC Start	02.08.2022 13:30:31
Ambit Temp [°C]   Humidity [rel%]	28.2   42
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5500
Frequency mid to test	False   Freq [MHz] 5600
Frequency high to test	False   Freq [MHz] 5700
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5500 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.46	dBm	INFO
Ref. Frequency	---	---	5503.400	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	14.46   11.34   20
Start [MHz]   Stop [MHz]	5475.000   5525.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.434	MHz	INFO
T1 99%	5470.000000	---	5491.8082	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5508.2418	MHz	

### Plot: Bandwidth only

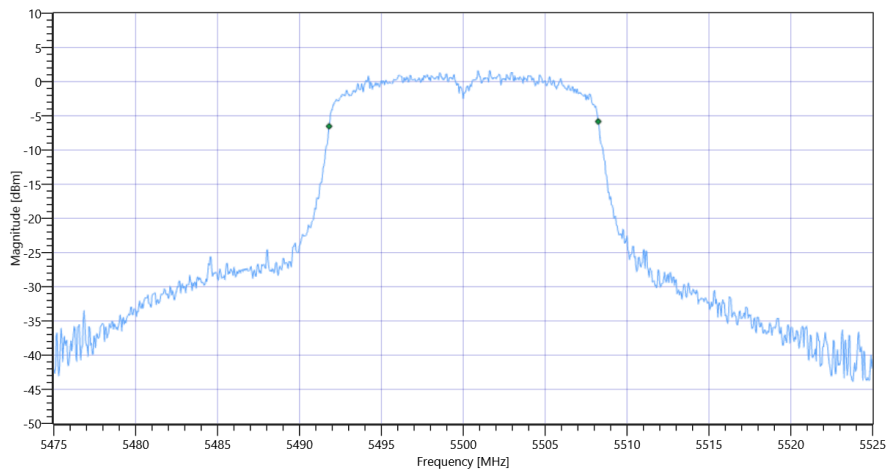

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C 99PCT


### Plot: Bandwidth within Band

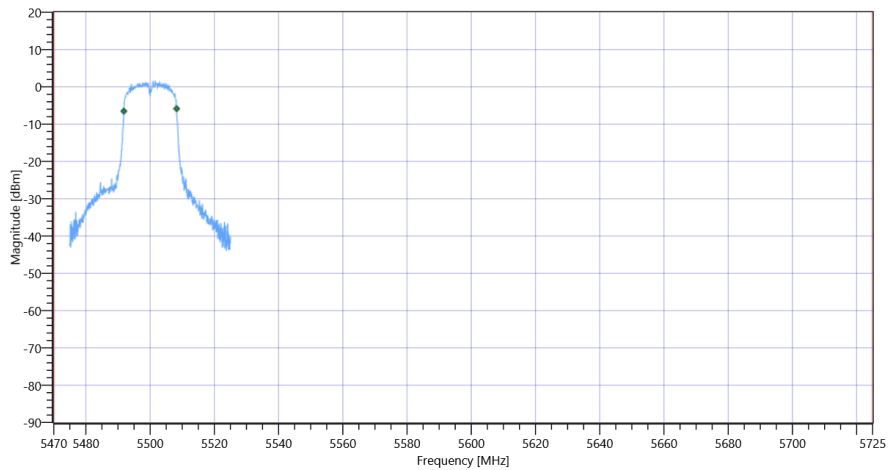

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.8	MHz	INFO
T1 26dB	5470.000000	---	5489.6000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5510.4000	MHz	

Plot: Bandwidth only

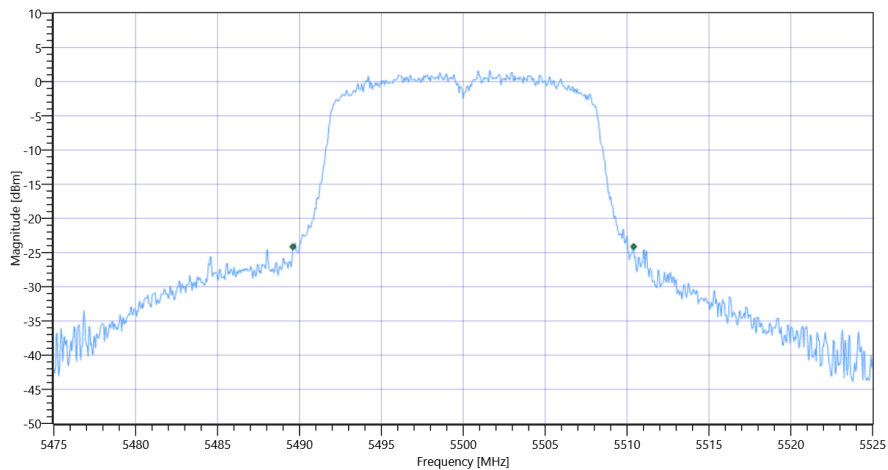

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C 26dB

Plot: Bandwidth within Band

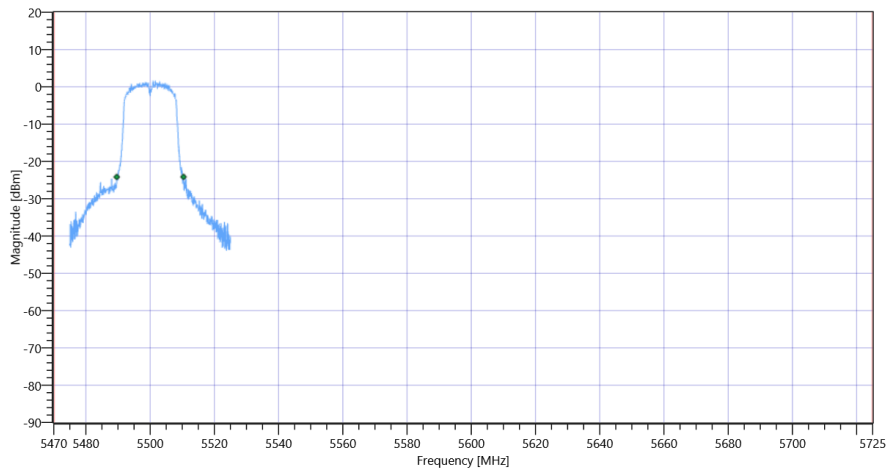

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2C

General verdict

PASS



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A

Test References	
TC Start	02.08.2022 13:25:42
Ambit Temp [°C]   Humidity [rel%]	28.1   42
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5260
Frequency mid to test	False   Freq [MHz] 5280
Frequency high to test	True   Freq [MHz] 5320
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5320 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	9.12	dBm	INFO
Ref. Frequency	---	---	5318.800	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	17.12   11.48   25
Start [MHz]   Stop [MHz]	5295.000   5345.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.334	MHz	INFO
T1 99%	5250.000000	---	5311.9081	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5328.2418	MHz	PASS

### Plot: Bandwidth only

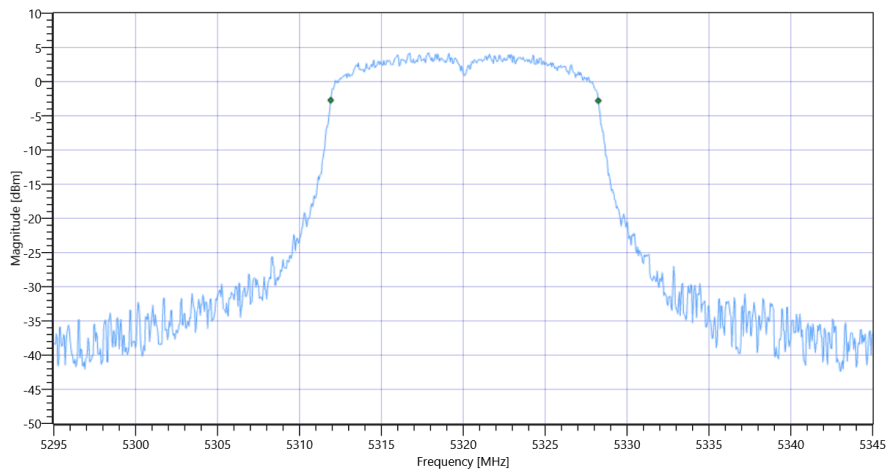

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A 99PCT


### Plot: Bandwidth within Band

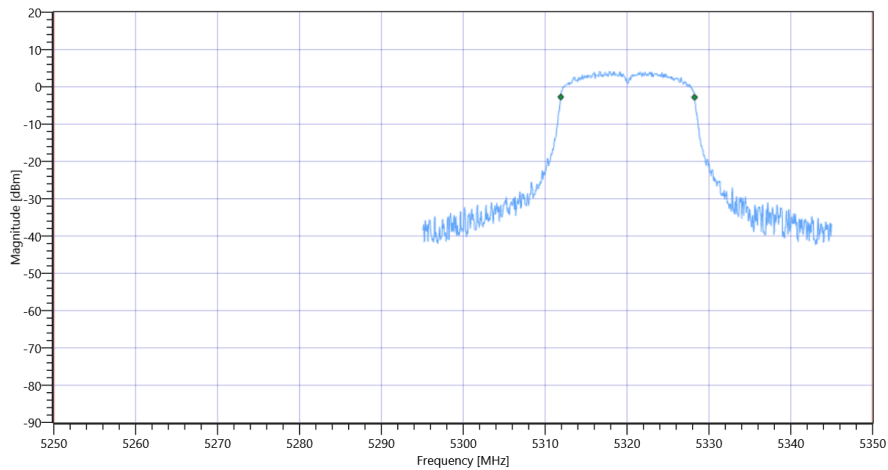

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	19.9	MHz	INFO
T1 26dB	5250.000000	---	5310.1500	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5330.0500	MHz	PASS

Plot: Bandwidth only

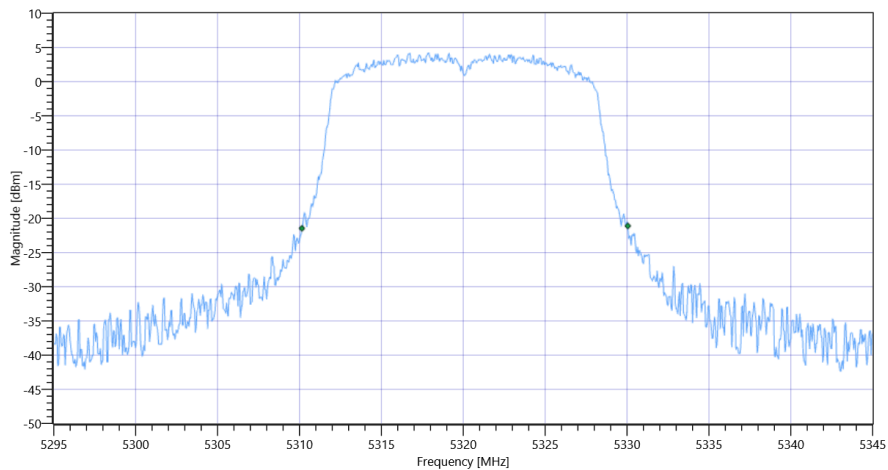

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A 26dB

Plot: Bandwidth within Band

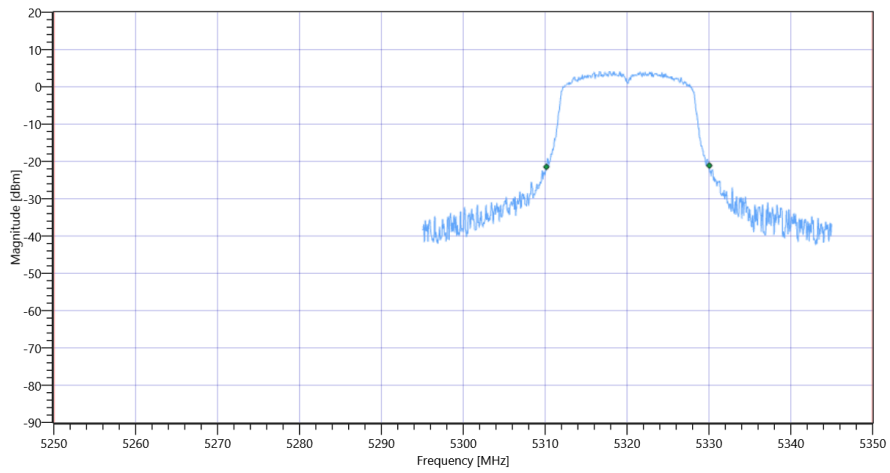

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A

Test References	
TC Start	02.08.2022 13:20:19
Ambit Temp [°C]   Humidity [rel%]	28.0   42
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5260
Frequency mid to test	True   Freq [MHz] 5280
Frequency high to test	False   Freq [MHz] 5320
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	

## Test at TX 5280 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	9.96	dBm	INFO
Ref. Frequency	---	---	5281.600	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	17.96   11.53   25
Start [MHz]   Stop [MHz]	5255.000   5305.000
RBW [MHz]   VBW [MHz]	0.300000   1.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.334	MHz	INFO
T1 99%	5250.000000	---	5271.9081	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5288.2418	MHz	PASS

### Plot: Bandwidth only

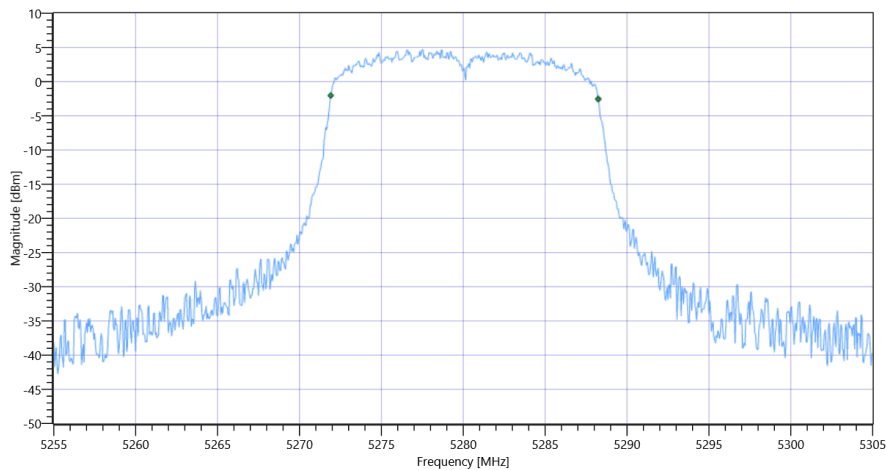

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A 99PCT


### Plot: Bandwidth within Band

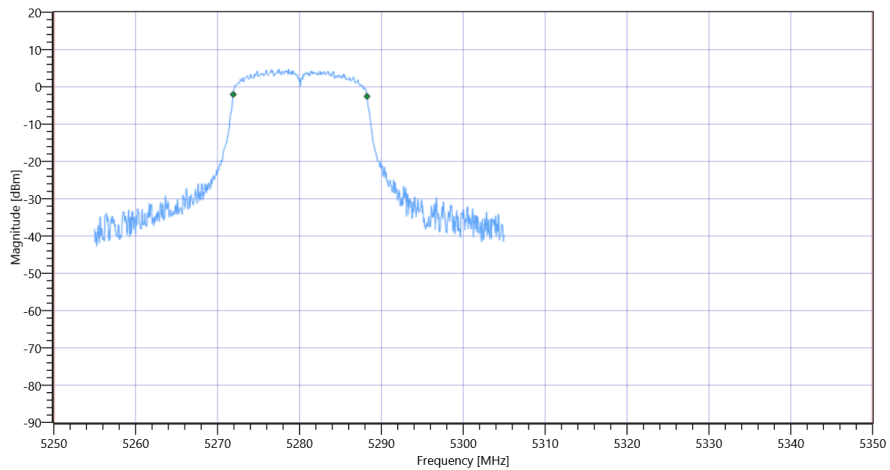

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	19.9	MHz	INFO
T1 26dB	5250.000000	---	5270.2000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5290.1000	MHz	PASS

Plot: Bandwidth only

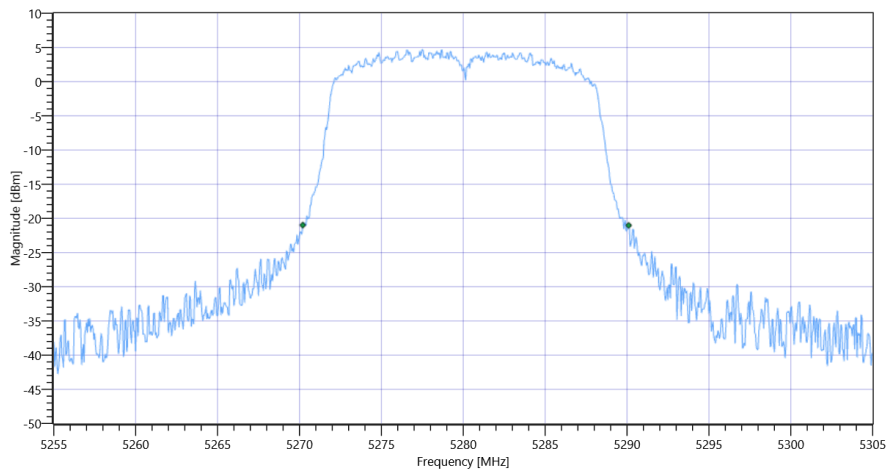

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A 26dB

Plot: Bandwidth within Band

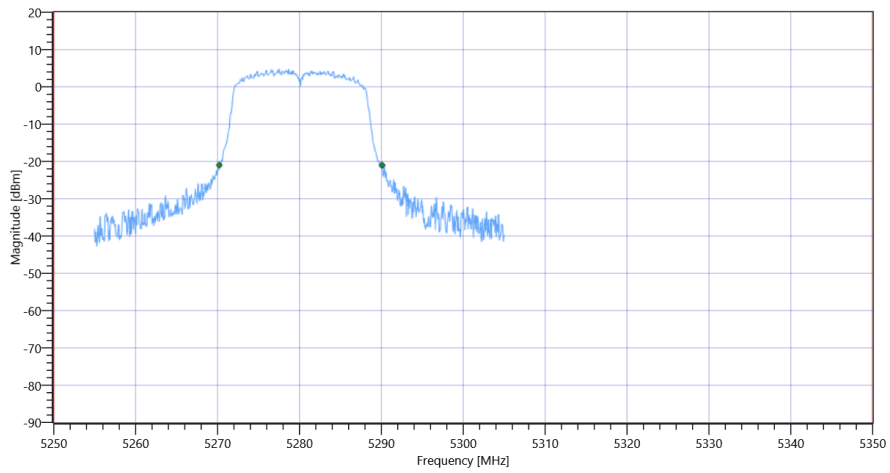

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A

General verdict

PASS



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx a mode U-NII-2A

Test References	
TC Start	02.08.2022 13:15:38
Ambit Temp [°C]   Humidity [rel%]	27.9   43
System Version	3.3.0.1
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5260
Frequency mid to test	False   Freq [MHz] 5280
Frequency high to test	False   Freq [MHz] 5320
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI	