



## REGULATORY COMPLIANCE TEST REPORT

FCC Part 15 Subpart E 15.407  
ISED RSS-247 Issue 2

Report No.: DIGI110-U5 Rev A

**Company:** Digi International

**Model Name:** ConnectCore MP15/ConnectCore MP13

## REGULATORY COMPLIANCE TEST REPORT

**Company Name:** Digi International

**Model Name:** ConnectCore MP15/ConnectCore MP13

**To:** FCC Part 15 Subpart E 15.407 & ISED RSS-247 Issue 2

**Test Report Serial No.:** DIGI110-U5 Rev A

This report supersedes: NONE

**Applicant:** Digi International  
9350 Excelsior Blvd, Suite 700  
Hopkins, MN 55343  
United States of America

**Issue Date:** 10th July 2023

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**

## Table of Contents

<b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>4</b>
1.1. TESTING ACCREDITATION .....	4
1.2. RECOGNITION .....	5
1.3. PRODUCT CERTIFICATION .....	6
<b>2. DOCUMENT HISTORY .....</b>	<b>7</b>
<b>3. TEST RESULT CERTIFICATE .....</b>	<b>8</b>
<b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
4.1. Normative References .....	9
4.2. Test and Uncertainty Procedure .....	10
<b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>11</b>
5.1. Technical Details .....	11
5.2. Scope Of Test Program .....	12
5.3. Equipment Model(s) and Serial Number(s).....	13
5.4. Antenna Details .....	13
<b>5.5. Cabling and I/O Ports</b> .....	<b>14</b>
5.6. Test Configurations .....	15
5.7. Equipment Modifications .....	15
5.8. Deviations from the Test Standard .....	15
<b>6. TEST SUMMARY .....</b>	<b>16</b>
<b>7. TEST EQUIPMENT CONFIGURATION(S).....</b>	<b>17</b>
7.1. Radiated Emissions .....	17
<b>8. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>19</b>
<b>9. TEST RESULTS .....</b>	<b>20</b>
9.1. Radiated Emissions .....	20
9.1.1. <i>TX Spurious &amp; Restricted Band Emissions</i> .....	22
9.1.1.1. FXP831.07.0100C .....	22
9.1.1.2. ANT-DB1-RAF-RPS PCB .....	34
9.1.2. <i>Restricted Edge &amp; Band-Edge Emissions</i> .....	46
9.1.2.3. FXP831.07.0100C .....	46
9.1.2.3.1. 5150 - 5250 MHz.....	46
9.1.2.3.2. 5250 - 5350 MHz.....	46
9.1.2.3.3. 5470 - 5725 MHz.....	55
9.1.2.3.4. 5725 - 5850 MHz.....	60
9.1.2.4. ANT-DB1-RAF-RPS PCB .....	75
9.1.2.4.1. 5150 - 5250 MHz.....	75
9.1.2.4.2. 5250 - 5350 MHz.....	75
9.1.2.4.3. 5470 - 5725 MHz.....	84
9.1.2.4.4. 5725 - 5850 MHz.....	89

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



## 1.2. RECOGNITION

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM Labs test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Firm Designation#: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 ISED#: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA 2	NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB – Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body

AB – Approved Body

MRA – Mutual Recognition Agreement

MRA Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

### 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
UK – Approved Body (AB), AB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

## 2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	23 <sup>rd</sup> May 2023	Initial Draft for Client Review
Rev A	10 <sup>th</sup> July 2023	Initial release.

In the above table the latest report revision will replace all earlier versions.



### 3. TEST RESULT CERTIFICATE

<b>Manufacturer:</b> Digi International 9350 Excelsior Blvd, Suite 700 Hopkins MN 55343 United States of America	<b>Tested By:</b> MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
<b>Model:</b> CCMP15/CCMP13	<b>Telephone:</b> +1 925 462 0304
<b>Type Of Equipment:</b> Wireless Module	<b>Fax:</b> +1 925 462 0306
<b>S/N's:</b> MP15: 038 MP13: 023	
<b>Test Date(s):</b> 3rd - 8th May 2023	<b>Website:</b> www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart E 15.407 ISED RSS-247 Issue 2	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


**Notes:**

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**



  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.



## 4. REFERENCES AND MEASUREMENT UNCERTAINTY

### 4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01, D02, D03	D01 Oct 2013, D02 Oct 2011, D03 Oct 2020	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band. 662911 D01 Multiple Transmitter Output v02r01, 662911 D02 MIMO with Cross Polarized Antenna v01, 662911 D03 MIMO Antenna Gain Measurement v01, OET 13TR1003 Directional Gain of 802 11 MIMO with CDD 04 05 2013
II	KDB 905462 D07 v02	Aug 2016	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
III	KDB 926956 D01 v02	Aug 2016	U-NII Device Transition Plan
IV	A2LA	22nd June 2022	R105 - Requirement's When Making Reference to A2LA Accreditation Status
V	ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices
VI	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VII	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VIII	FCC 06-96	Jun 2006	Memorandum Opinion and Order
IX	FCC 47 CFR Part 15.407	2021	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
X	ICES-003	Issue 7; Oct 2020	Information Technology Equipment (Including Digital Apparatus)
XI	M 3003	EDITION 4 Oct 2019	Expression of Uncertainty and Confidence in Measurements
XII	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XIII	RSS-Gen Issue 5	Amendment 1,2 (Feb 2021)	General Requirements for Compliance of Radio Apparatus. With Amendments 1: March 2019 and 2: Feb 2021.
XIV	FCC 47 CFR Part 2.1033	May 2021	FCC requirements and rules regarding photographs and test setup diagrams.
XV	KDB 905462 D02 v02	Apr 2016	Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5250 to 5350 MHz and 5470 to 5725 MHz bands incorporating Dynamic Frequency Selection.
XVI	KDB 789033 D02 V02r01	Dec 2017	Guidelines For Compliance Testing Of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

## **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

Details	Description
Purpose:	Test of the Digi International CCMP15/CCMP13 to FCC CFR 47 Part 15 Subpart E 15.407 and ISED RSS-247 Issue 2.
Applicant:	Digi International 9350 Excelsior Blvd, Suite 700 Hopkins MN 55343 United States of America
Manufacturer:	Digi International
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	DIGI110-U5
Date EUT received:	29 <sup>th</sup> March 2023
Standard(s) applied:	FCC CFR 47 Part 15 Subpart E 15.407 ISED RSS-247 Issue 2
Dates of test (from - to):	3rd - 8th May 2023
No of Units Tested:	1
Product Family Name:	ConnectCore MP15 & ConnectCore MP13
Model(s):	CCMP15/CCMP13
Location for use:	Indoor/Outdoor
Declared Frequency Range(s):	5150 - 5250; 5250 - 5350; 5470 - 5725; 5725 - 5850 MHz;
Type of Modulation:	OFDM
EUT Modes of Operation:	5150 - 5250 MHz: a; ac-80; HT-20; HT-40, ac-20, ac-40 5250 - 5350 MHz: a; ac-80; HT-20; HT-40, ac-20, ac-40 5470 - 5725 MHz: a; ac-80; HT-20; HT-40, ac-20, ac-40 5725 - 5850 MHz: a; ac-80; HT-20; HT-40, ac-20, ac-40
Declared Nominal Output Power:	+18.0 dBm
Transmit/Receive Operation:	Transceiver
Rated Input Voltage and Current:	5 VDC 3A
Operating Temperature Range:	-40 - +85
ITU Emission Designator:	802.11a 16M5D1D 802.11ac-20 17M7D1D 802.11ac-40 36M4D1D 802.11ac-80 76M0D1D 802.11n HT-20 17M8D1D 802.11n HT-40 36M4D1D
Equipment Dimensions:	1.14 / 0.19 / 1.14 in
Weight:	6.6 grams
Hardware Rev:	55002119-01
Software Rev:	82004595 / 82004689

## **5.2. Scope Of Test Program**

### **Digi International ConnectCore MP15/ConnectCore MP13**

The scope of the test program was to test the Digi International ConnectCore MP15 and ConnectCore MP13 for radiated emissions in its 802.11 configurations in the frequency ranges 5150 - 5250 MHz; 5250 - 5350 MHz; 5470 - 5725 MHz; 5725 - 5850 MHz; for compliance against the following specifications:

#### **FCC CFR 47 Part 15 Subpart E 15.407**

Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5150 to 5250 MHz, 5725 to 5850 MHz and band 5250 to 5350 MHz, 5470 to 5725 MHz bands incorporating Dynamic Frequency Selection.

#### **ISED RSS-247 Issue 2**

Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and License-Exempt Local Area Network (LE-LEN) Devices

Radio Module is pre-certified any additional tests needed may be found in the following reports:

UL-CCIC Test Report# 4790016144.1-AE-1 Rev. 0 Dated 6/27/2022

UL-CCIC Test Report#4790016144.1-AE-2 Rev. 0 Dated 6/27/2022

UL-CCIC Test Report#4790016144.1-AE-4 Rev. 0 Dated 6/27/2022

#### **Note:**

ConnectCore MP15 & ConnectCore MP13 have the same radio module with differences in digital circuitry. As such only the CCMP15 was tested for RF testing.

### 5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/ Support)	Equipment Description	Manufacturer	Model No.	Serial No.
EUT Conducted	Wireless Radio Module	Digi International	CCMP15	038
EUT Conducted	Wireless Radio Module	Digi International	CCMP13	023
Support	Power Supply (5V 3A)	MEAN WELL	GE24I05	--

### 5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
external	Ethertronics	1001932	PCB	4.4	-	360	-	4500 - 6000
external	KYOCERA	W3P35x8W04-U100D3B0A	PCB	5.0	-	360	-	4500 - 6000
external	KYOCERA	X9001091-W3DRMB	Dipole	4.0	-	360	-	4500 - 6000
external	Linx Technologies	ANT-DB1-RAF-RPS	Dipole	4.6	-	360	-	4500 - 6000
external	TAOGLAS	FXP830.07.0100C	PCB	4.7	-	360	-	4500 - 6000
external	TAOGLAS	FXP831.07.0100C	PCB	5.5	-	360	-	4500 - 6000
external	TAOGLAS	GW.48.A151	Dipole	4.56	-	360	-	4500 - 6000
external	Yageo	ANTX100P001B24553	PCB	5.1	-	360	-	4500 - 6000

BF Gain - Beamforming Gain  
 Dir BW - Directional BeamWidth  
 X-Pol - Cross Polarization

## 5.5. Cabling and I/O Ports

### CCMP15:

Port Type	Max Cable Length	# of Ports	Screened	Conn Type	Data Type	Bit Rate	Environment
dc Jack	<3m	1	No			N/A	Indoors
Ethernet	>30m	1	No	RJ45	Digital	10, 100, 1000 Mbits/s	Indoors
Micro USB	<3m	1	Yes	Data	Digital	--	--
USB A	<3m	2	Yes	Data	Digital	--	--
HDMI	<3m	1	Yes	Data	Digital	--	--
SD Slot	--	1	Yes	Data	Digital	--	--
Sim Slot	--	1	Yes	Data	Digital	--	--
Console port (UART)	--	1	Yes	Data	Digital	--	--
General Purpose I/Os	--	1	Yes	Data	Digital	--	--

### CCMP13:

Port Type	Max Cable Length	# of Ports	Screened	Conn Type	Data Type	Bit Rate	Environment
dc Jack	<3m	1	No			N/A	Indoors
Ethernet	>30m	2	No	RJ45	Digital	10, 100, 1000 Mbits/s	Indoors
Micro USB	<3m	1	Yes	Data	Digital	--	--
USB A	<3m	2	Yes	Data	Digital	--	--
SD Slot	--	1	Yes	Data	Digital	--	--
Sim Slot	--	1	Yes	Data	Digital	--	--
Console port (UART)	--	1	Yes	Data	Digital	--	--
General Purpose I/Os	--	1	Yes	Data	Digital	--	--

## 5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11a/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
<b>5150 - 5250 MHz</b>				
a	6	5,180.00	5,200.00	5,240.00
ac-80	29.3	5,210.00	--	--
ac-20 / HT-20	6.5	5,180.00	5,200.00	5,240.00
ac-40 / HT-40	13.5	5,190.00	--	5,230.00
<b>5250 - 5350 MHz</b>				
a	6	5,260.00	5,300.00	5,320.00
ac-80	29.3	--	--	5,290.00
ac-20 / HT-20	6.5	5,260.00	5,300.00	5,320.00
ac-40 / HT-40	13.5	5,270.00	--	5,310.00
<b>5470 - 5725 MHz</b>				
a	6	5,500.00	5,580.00	5,720.00
ac-80	29.3	5,530.00	5,610.00	5,690.00
ac-20 / HT-20	6.5	5,500.00	5,580.00	5,720.00
ac-40 / HT-40	13.5	5,510.00	5,550.00	5,710.00
<b>5725 - 5850 MHz</b>				
a	6	5,745.00	5,785.00	5,825.00
ac-80	29.3	5,775.00	--	5,775.00
ac-20 / HT-20	6.5	5,745.00	5,785.00	5,825.00
ac-40 / HT-40	13.5	5,755.00	--	5,795.00

## 5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

## 5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE



## 6. TEST SUMMARY


### List of Measurements

Test Header	Result	Data Link
Emissions	Complies	-
(1) Radiated Emissions	Complies	-
(i) TX Spurious & Restricted Band Emissions	Complies	<a href="#">View Data</a>
(ii) Restricted Edge & Band-Edge Emissions	Complies	<a href="#">View Data</a>

## 7. TEST EQUIPMENT CONFIGURATION(S)

### 7.1. Radiated Emissions

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions above and below 1GHz.

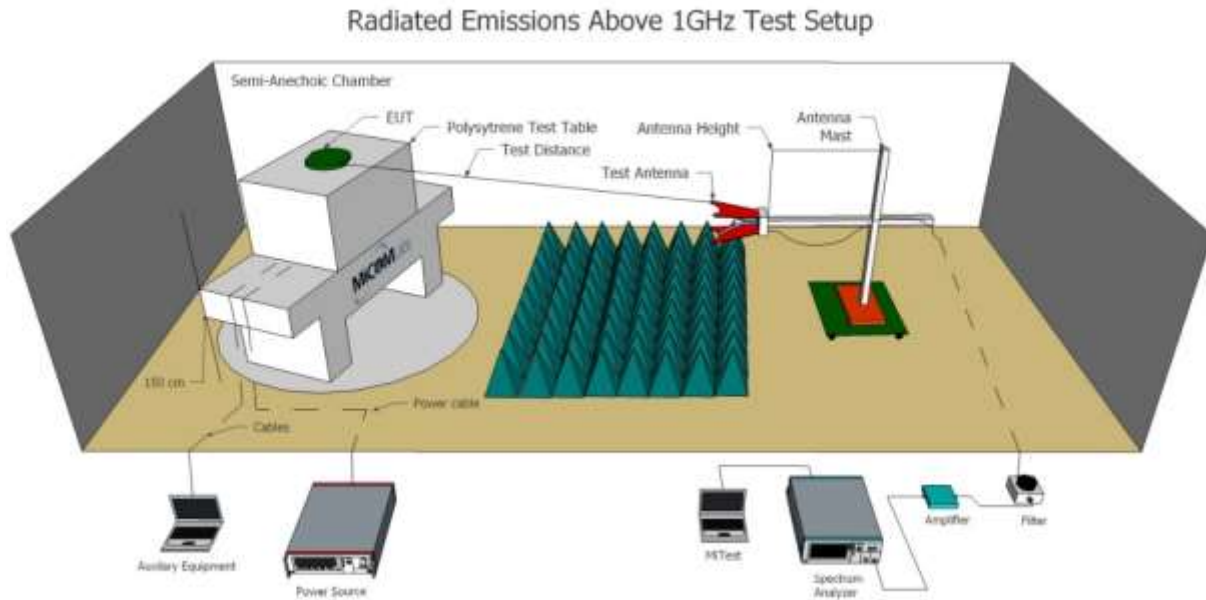

### Test Equipment Utilized

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2023
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	24 Aug 2023
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	29 Sep 2023
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	6 Oct 2023
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	29 Sep 2023
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	30 Sep 2023
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	2 Nov 2023
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	27 Oct 2023
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	27 Oct 2023
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	27 Oct 2023
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	6 Oct 2023
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	6 Oct 2023
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	6 Oct 2023
510	Barometer/Thermometer	Control Company	68000-49	170871375	20 Dec 2024
554	Precision SMA Cable	Fairview Microwave	SCE18060101-400CM	554	6 Oct 2023
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	24 Dec 2023



## 9. TEST RESULTS

### 9.1. Radiated Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
<b>Standard:</b>	FCC CFR 47:15.407 ISED RSS-247	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.205, 15.209 RSS-247:5.5	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Orientation testing of the EUT was performed and the EUT standing upright was determined to be the worst case for Spurious and Band Edge emissions with the integral antennas attached.

#### Limits for Restricted Bands

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Average Measurements were performed following ANSI C63.10 section 11.12.2.5.2 Trace averaging across on and off times of the EUT transmissions followed by a duty cycle correction.

RMS detector used, DCCF of  $10\log(1/D)$  where D is the Duty Cycle.

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

#### Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed

below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).



### 9.1.1. TX Spurious & Restricted Band Emissions

#### 9.1.1.1. FXP831.07.0100C

**NOTE: For Tx spurious & Restricted Band-Edge measurements power setting utilized were extracted from the original reports identified in Section 5.2 'Scope of the Test Program'**


#### Equipment Configuration for FCC Spurious 1 GHz -18 GHz

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5180	<b>Data Rate:</b>	6
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

#### Test Measurement Results



#### FCC Spurious 1 GHz -18 GHz

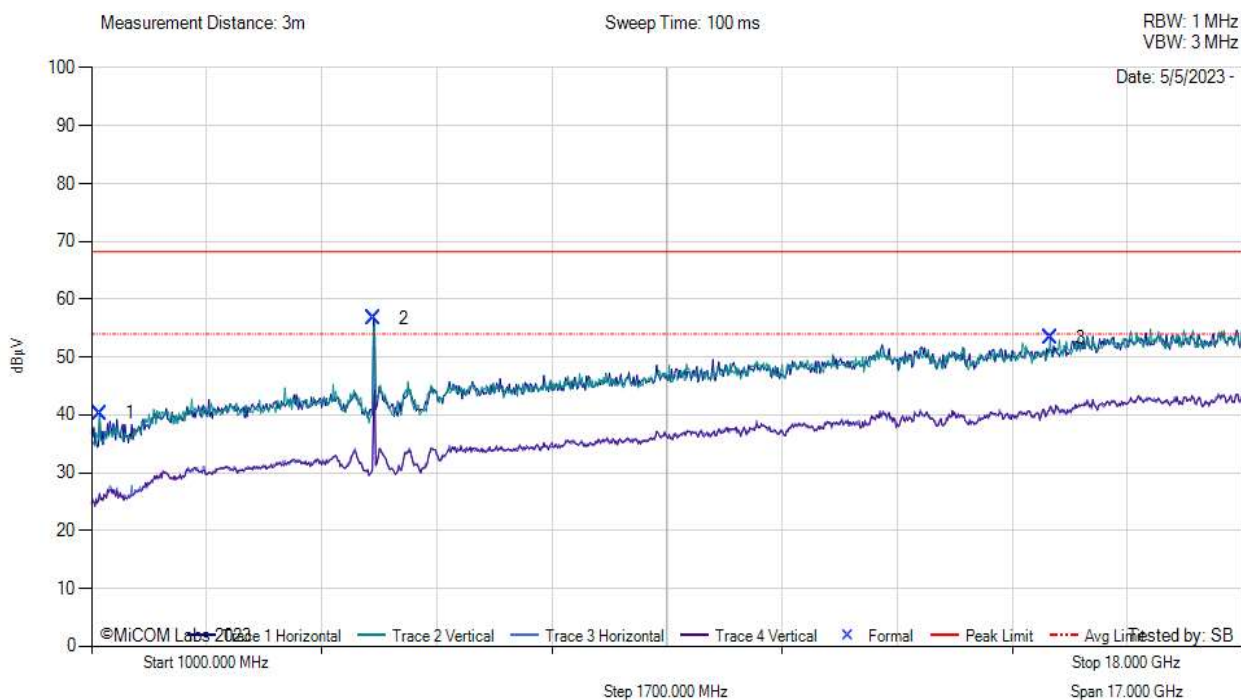

#### 1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1119.00	56.62	1.35	27.77	40.31	MaxP	Horizontal	149	330	68.2	-27.9	Pass
2	5165.00	65.29	3.02	34.13	56.64	Fundamental	--	--	--	--	--	Pass
3	15161.00	51.45	5.54	39.92	53.38	MaxP	Vertical	149	209	68.2	-14.8	Pass

**Test Notes:** Max power, 5VDC 3A




**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5200	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

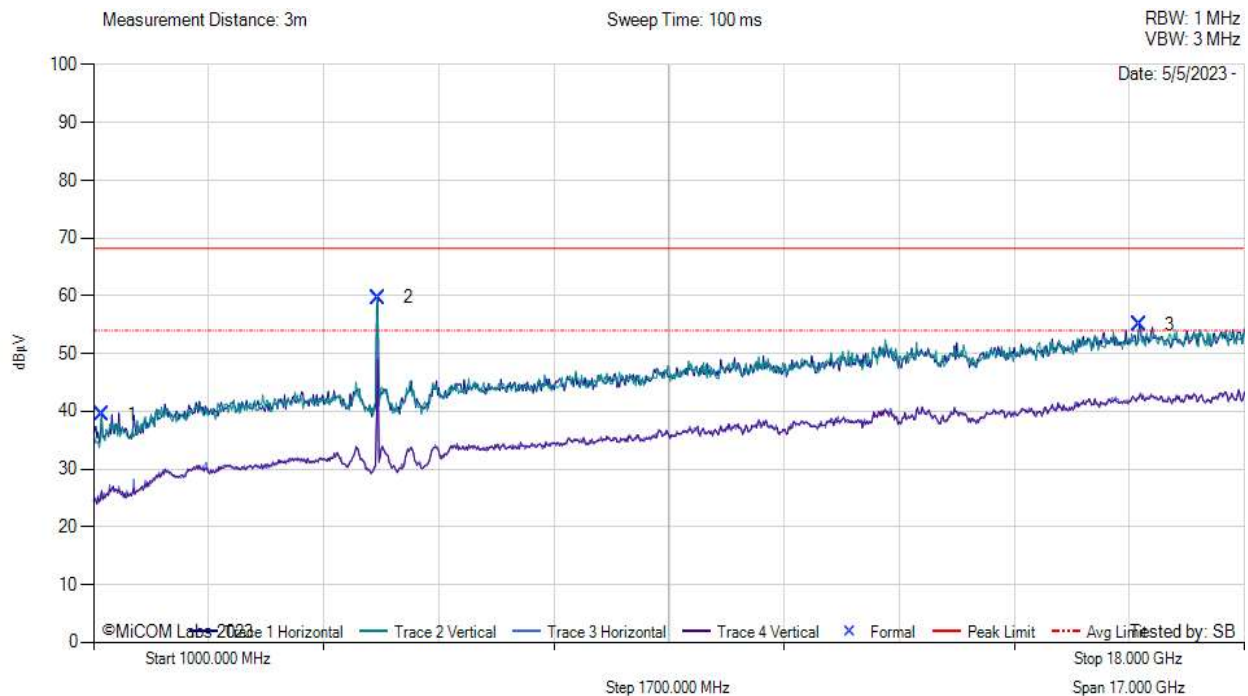

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1119.00	55.83	1.35	27.77	39.52	MaxP	Horizontal	99	330	68.2	-28.7	Pass
2	5199.00	68.89	2.98	34.17	59.64	Fundamental	--	--	--	--	--	Pass
3	16453.00	49.32	6.22	41.19	55.07	MaxP	Horizontal	99	60	68.2	-13.2	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5240	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

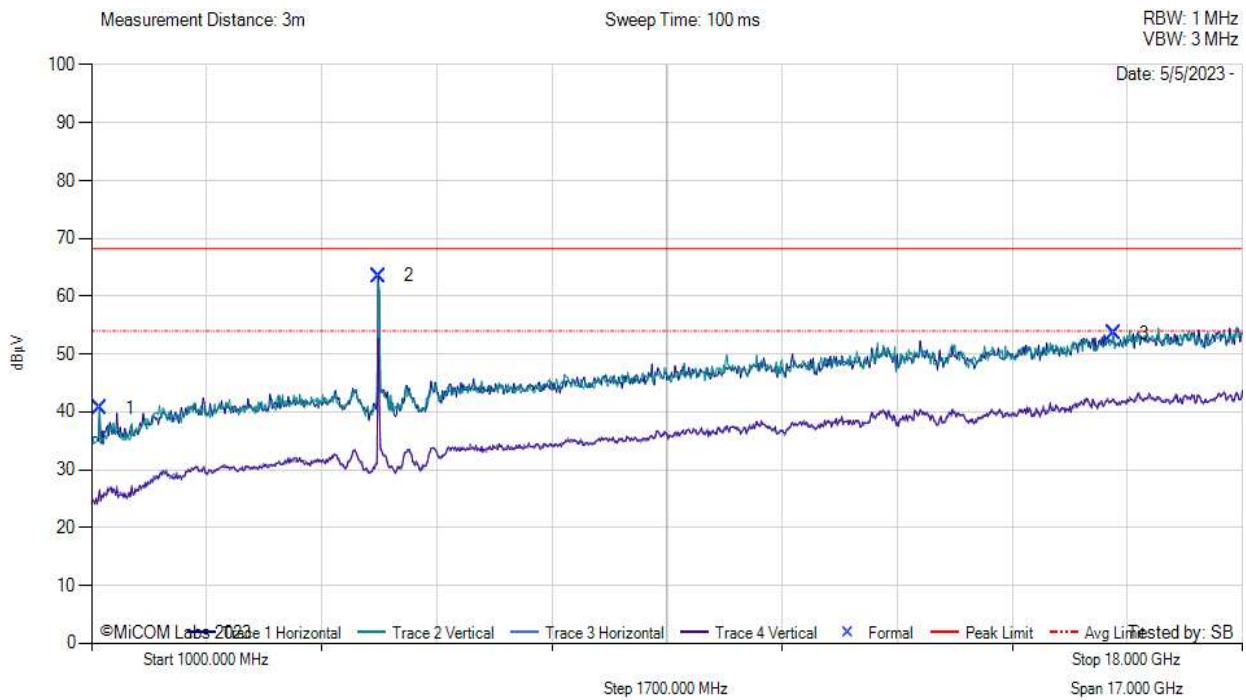

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1119.00	56.98	1.35	27.77	40.67	MaxP	Vertical	149	330	68.2	-27.6	Pass
2	5233.00	72.35	3.05	34.22	63.54	Fundamental	--	--	--	--	--	Pass
3	16096.00	48.92	6.10	40.91	53.62	MaxP	Vertical	149	269	68.2	-14.6	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5260	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

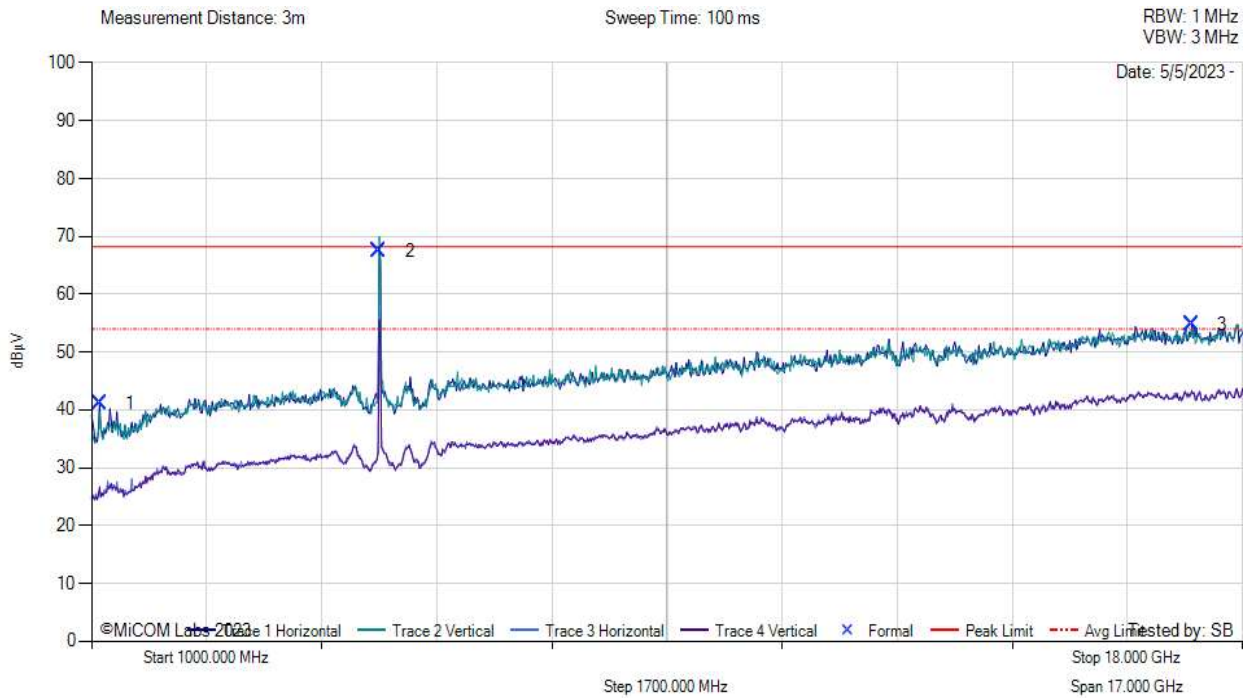

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1119.00	57.50	1.35	27.77	41.19	MaxP	Horizontal	149	330	68.2	-27.0	Pass
2	5250.00	75.97	3.04	34.25	67.51	Fundamental	--	--	--	--	--	Pass
3	17252.00	49.08	6.43	40.93	54.76	MaxP	Horizontal	99	240	68.2	-13.5	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5300	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

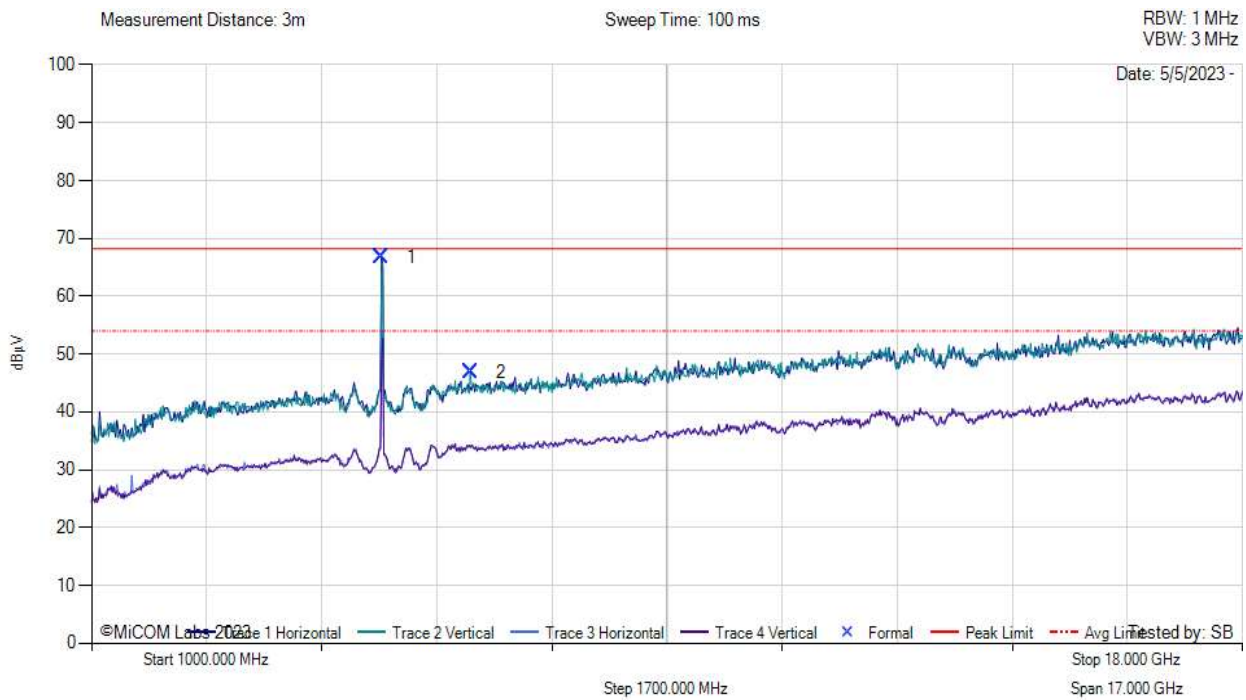

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5284.00	75.71	2.99	34.39	66.81	Fundamental	--	--	--	--	--	Pass
2	6593.00	52.14	3.44	35.73	46.82	MaxP	Vertical	149	149	68.2	-21.4	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5320	<b>Data Rate:</b>	6
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

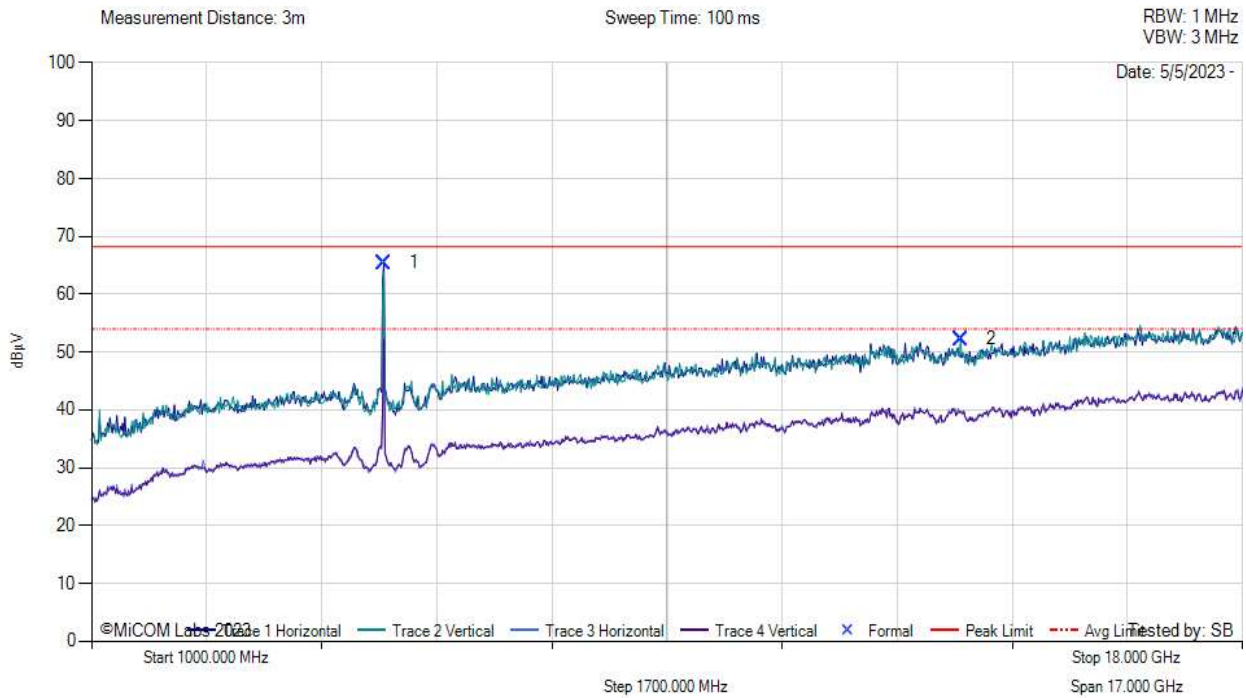

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5318.00	74.29	3.04	34.47	65.46	Fundamental	--	--	--	--	--	Pass
2	13835.00	54.52	5.14	38.64	52.23	MaxP	Vertical	149	149	68.2	-16.0	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5500	<b>Data Rate:</b>	6
<b>Power Setting:</b>	13	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

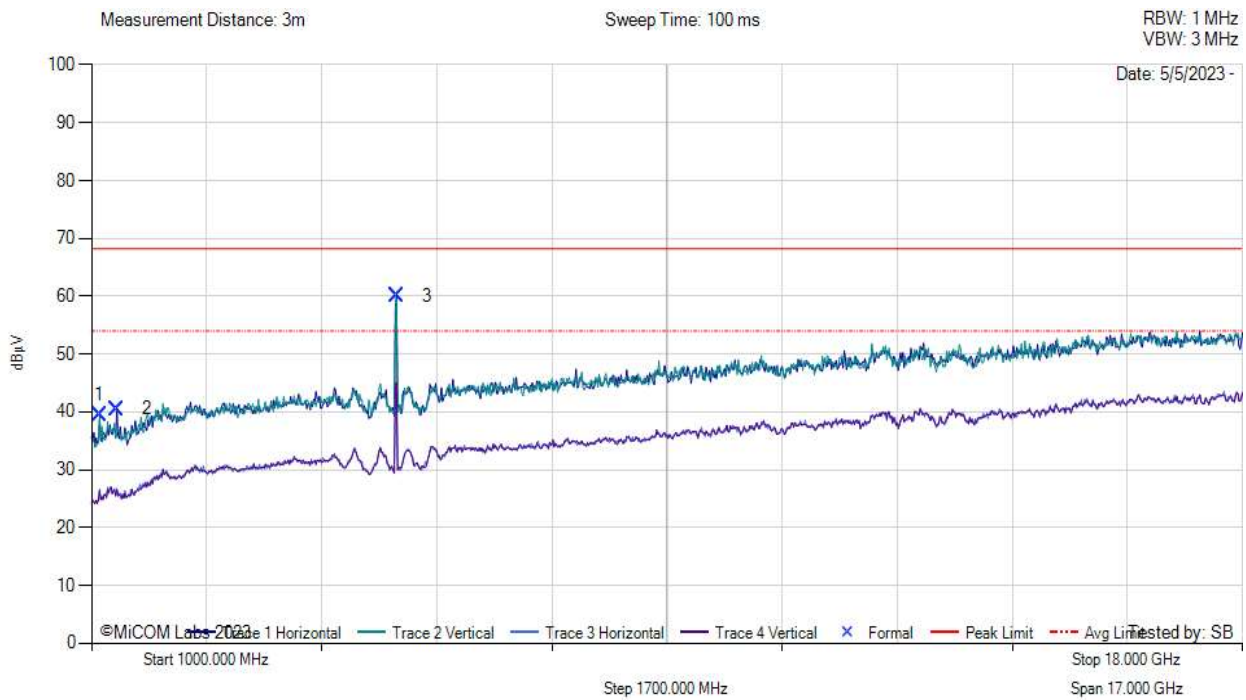

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1119.00	55.82	1.35	27.77	39.51	MaxP	Horizontal	149	355	68.2	-28.7	Pass
2	1374.00	54.89	1.51	29.23	40.51	MaxP	Horizontal	149	210	68.2	-27.7	Pass
3	5505.00	68.77	3.11	34.34	60.11	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A




**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5580	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

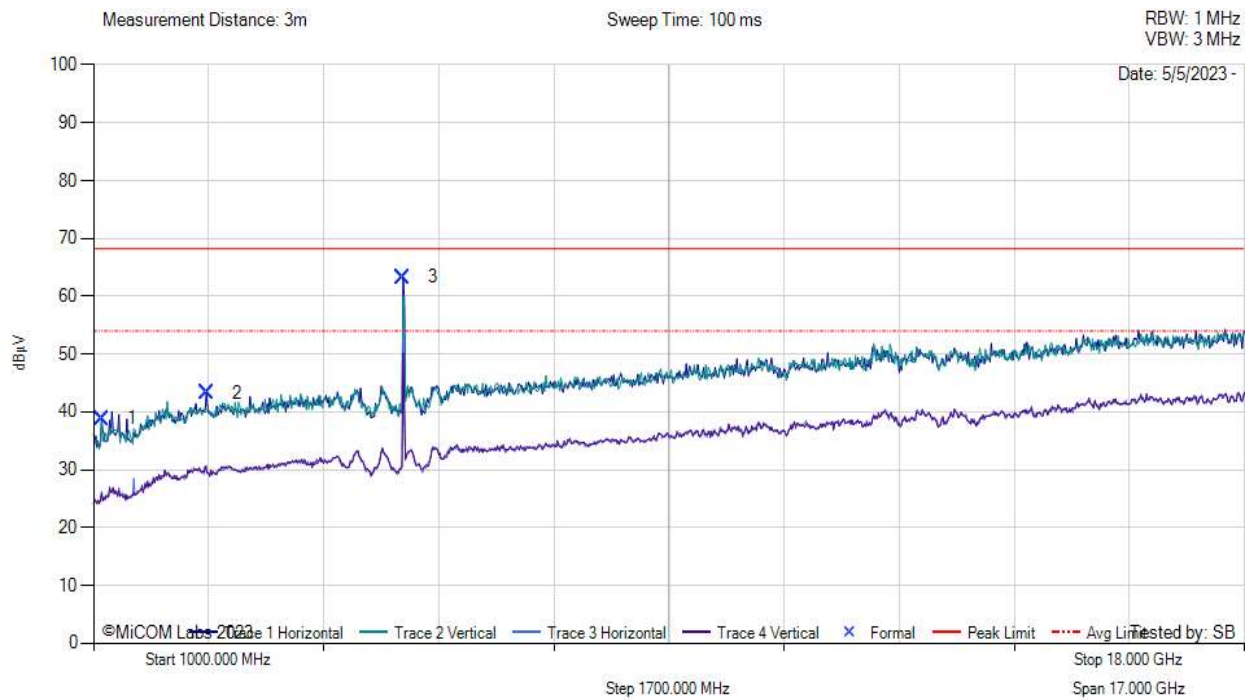

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1119.00	55.15	1.35	27.77	38.84	MaxP	Horizontal	149	330	68.2	-29.4	Pass
2	2666.00	52.75	2.06	32.54	43.25	MaxP	Horizontal	149	30	68.2	-25.0	Pass
3	5573.00	72.05	3.11	34.24	63.27	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A




**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5720	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

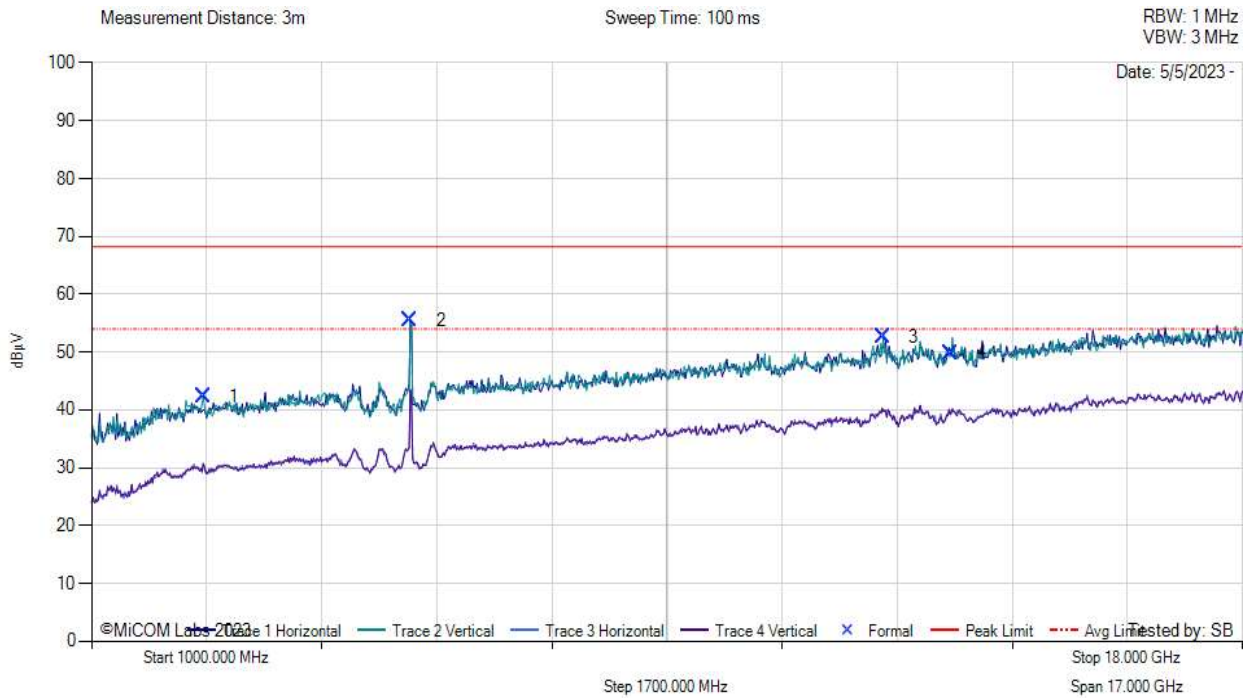

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2649.00	51.86	2.05	32.59	42.36	MaxP	Vertical	149	0	68.2	-25.9	Pass
2	5709.00	63.00	3.18	34.34	55.42	Fundamental	--	--	--	--	--	Pass
3	12696.00	54.11	5.26	39.33	52.67	MaxP	Vertical	149	119	68.2	-15.6	Pass
4	13699.00	51.70	5.37	38.64	49.88	MaxP	Vertical	99	119	68.2	-18.4	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5745	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

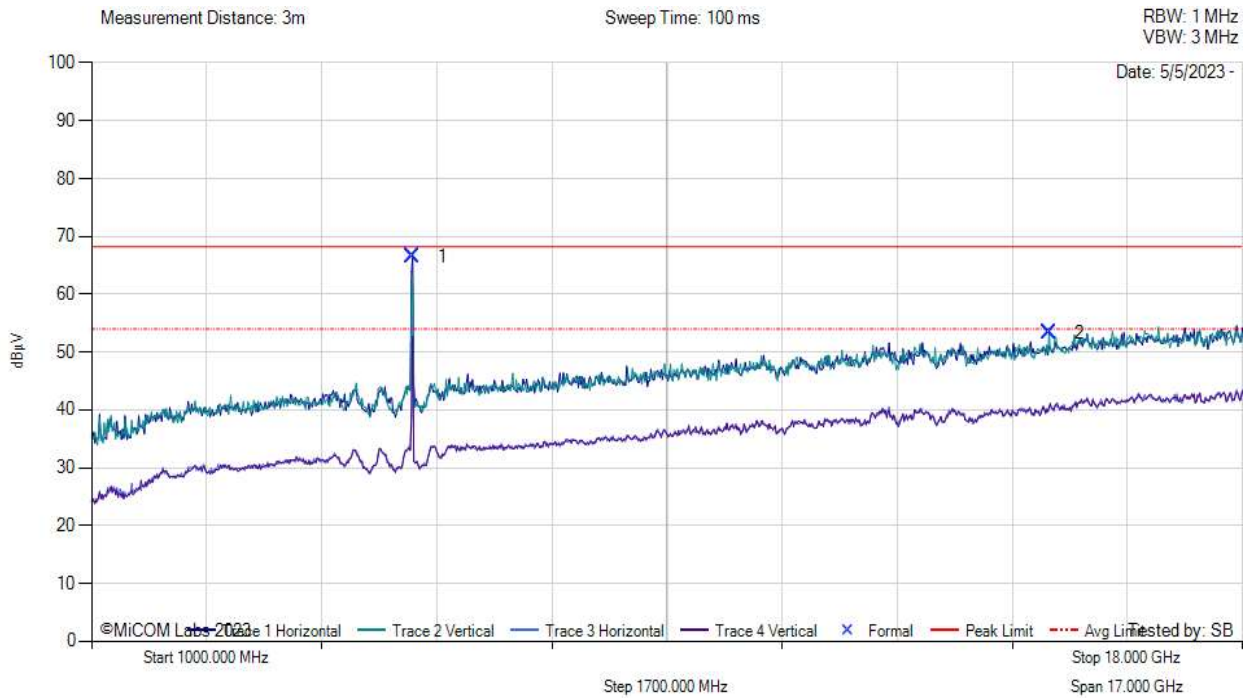

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5743.00	74.51	3.17	34.36	66.59	Fundamental	--	--	--	--	--	Pass
2	15144.00	51.65	5.44	39.90	53.30	MaxP	Vertical	99	179	68.2	-14.9	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5785	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

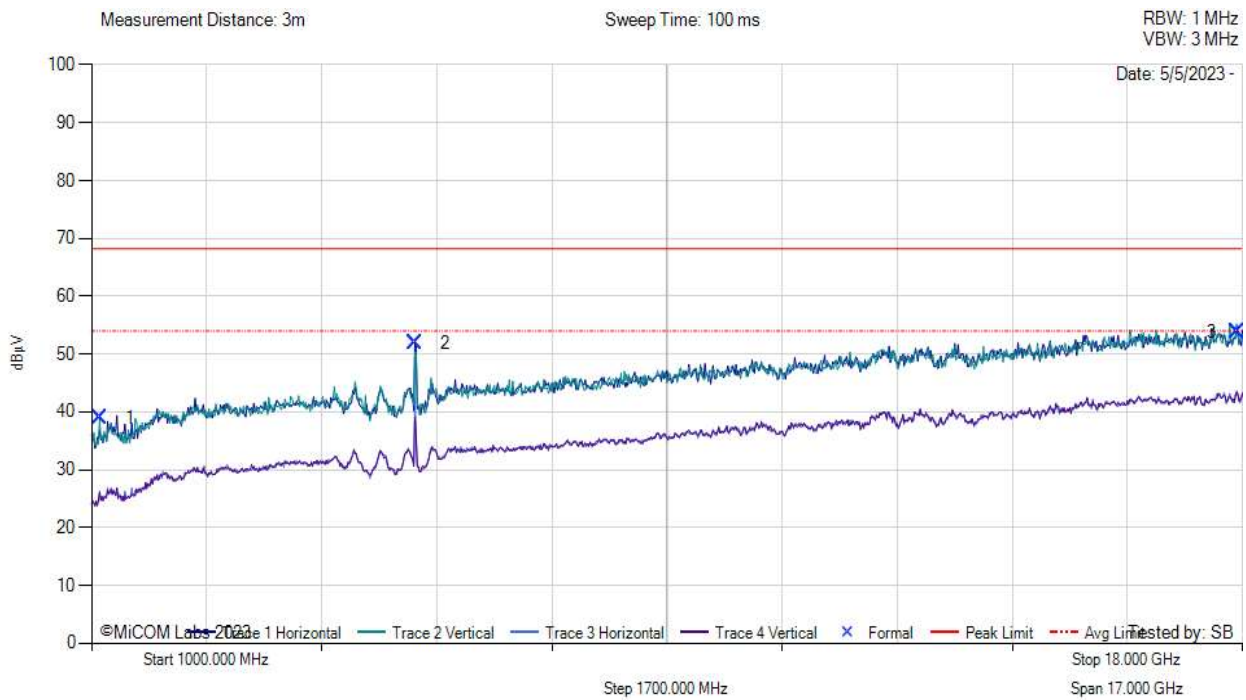

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1119.00	55.28	1.35	27.77	38.97	MaxP	Horizontal	149	330	68.2	-29.3	Pass
2	5777.00	59.91	3.19	34.44	51.95	Fundamental	--	--	--	--	--	Pass
3	17932.00	47.23	6.50	40.72	53.83	MaxP	Vertical	149	29	68.2	-14.4	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5825	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

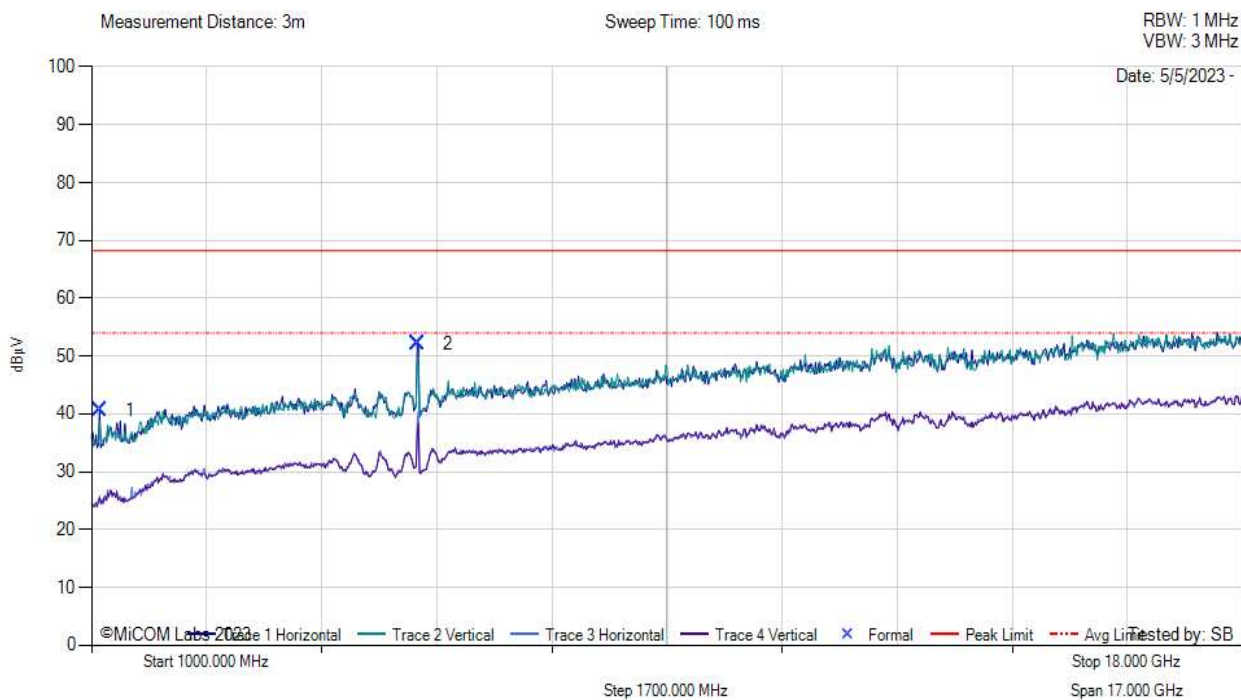

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1119.00	56.99	1.35	27.77	40.68	MaxP	Horizontal	149	330	68.2	-27.6	Pass
2	5811.00	59.35	3.20	34.53	52.12	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A

**9.1.1.2. ANT-DB1-RAF-RPS PCB**


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5180	<b>Data Rate:</b>	6
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

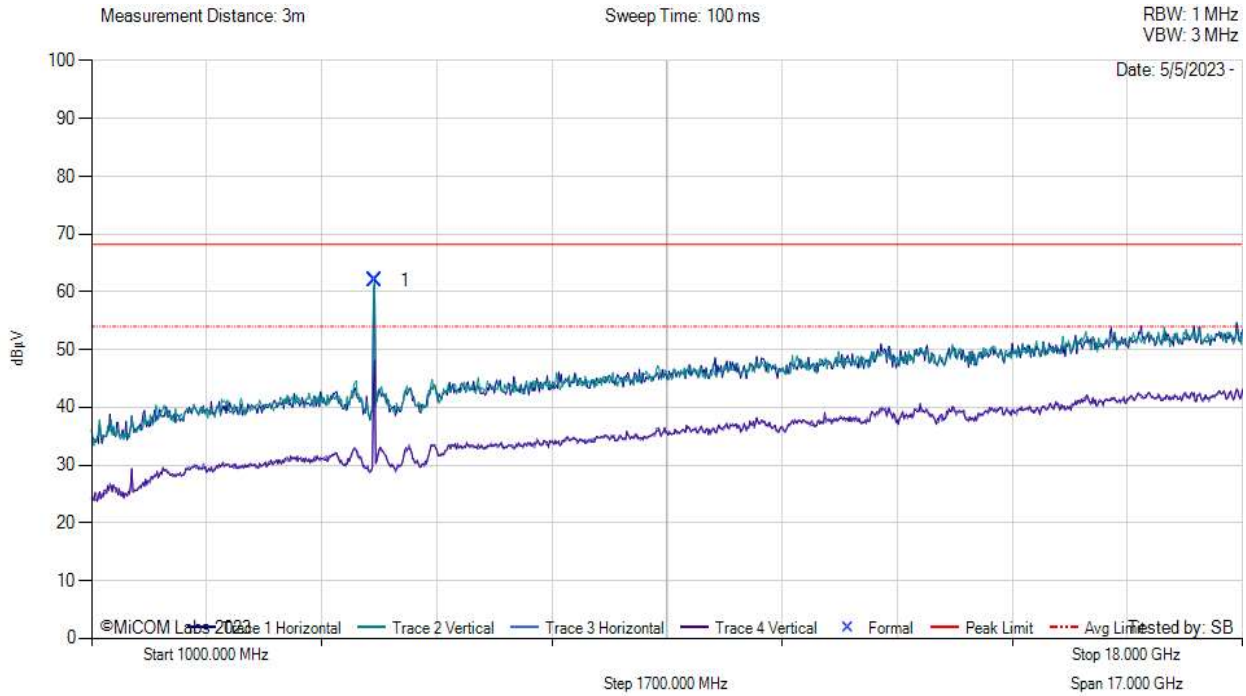

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5182.00	70.88	2.97	34.15	61.93	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5200	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

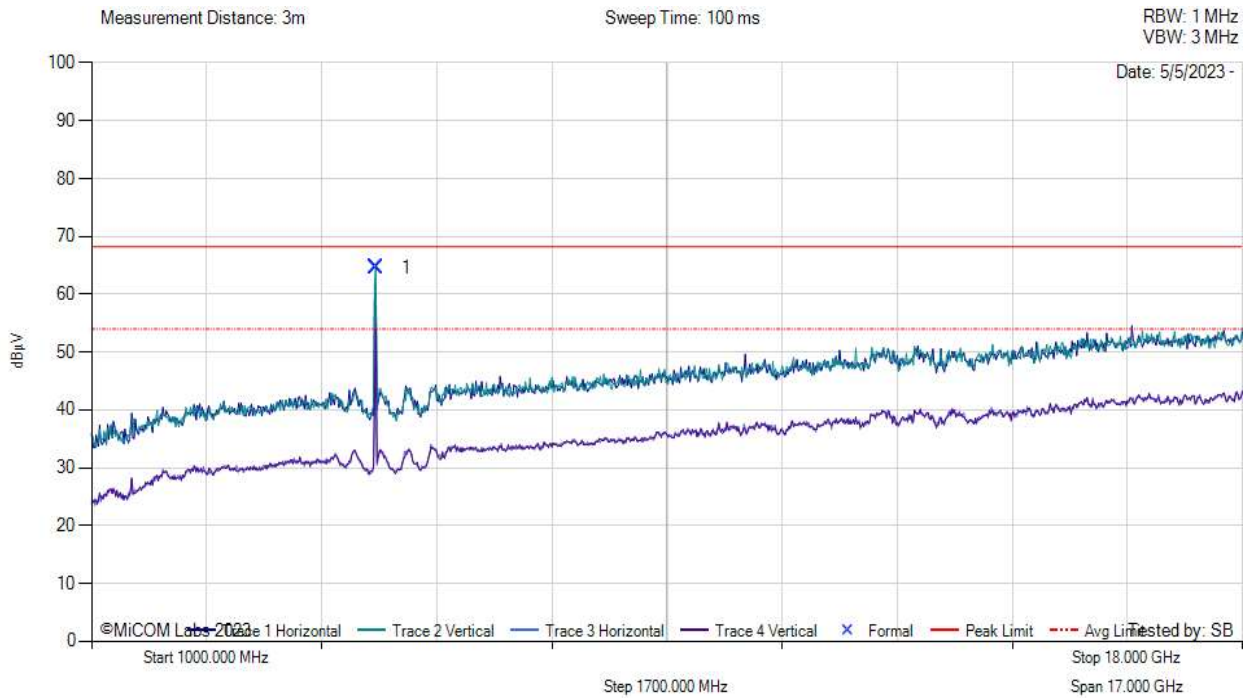

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5199.00	73.84	2.98	34.17	64.59	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A




**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5240	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

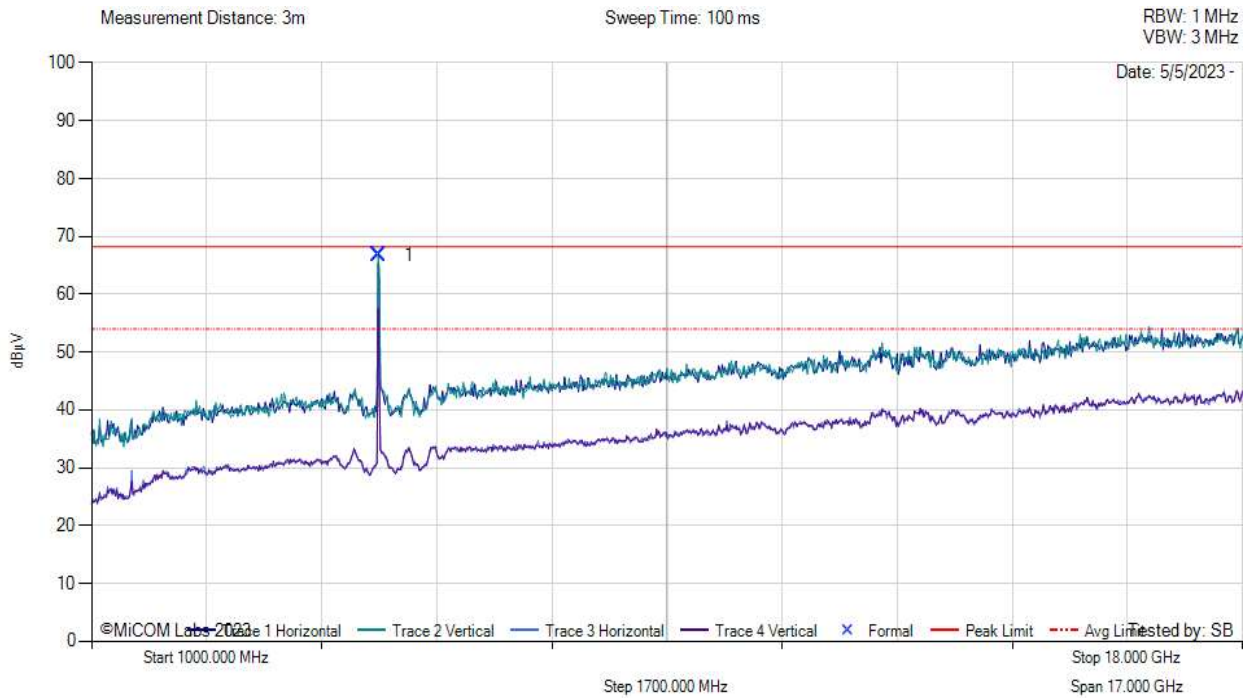

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5233.00	75.59	3.05	34.22	66.78	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A




**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5260	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

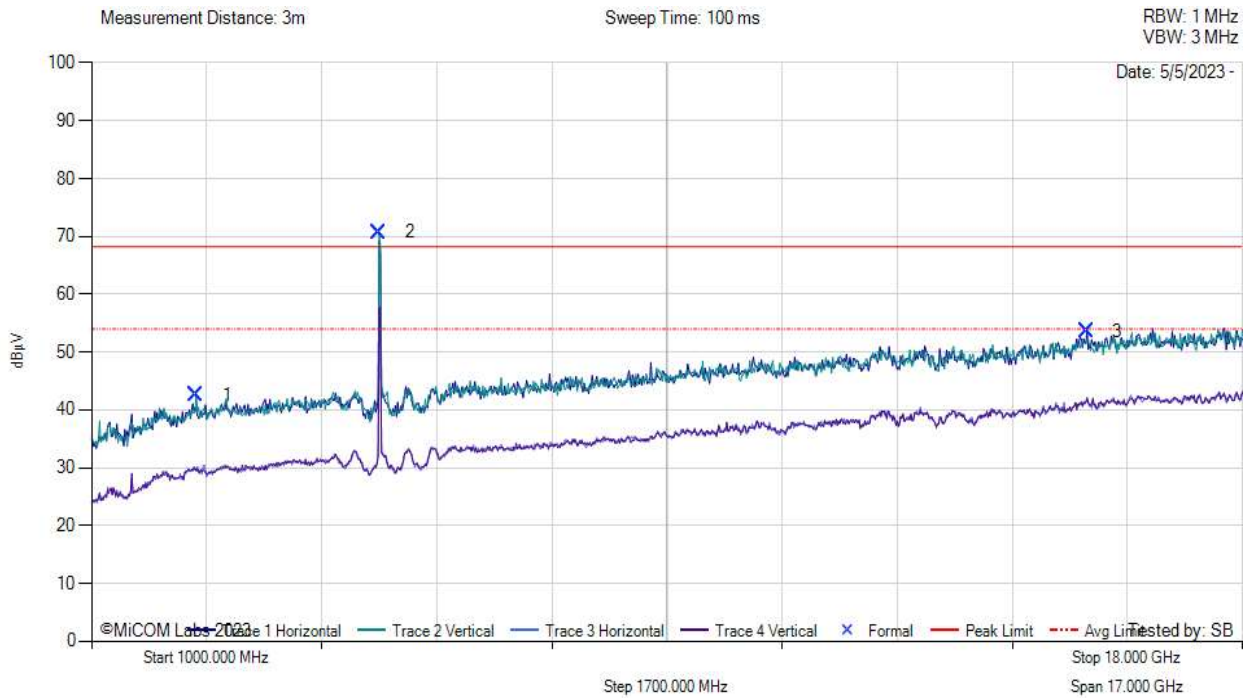

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2547.00	52.31	2.03	32.49	42.63	MaxP	Vertical	98	0	68.2	-25.6	Pass
2	5250.00	79.16	3.04	34.25	70.70	Fundamental	--	--	--	--	--	Pass
3	15705.00	49.11	5.61	40.86	53.58	MaxP	Horizontal	98	120	68.2	-14.6	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5300	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

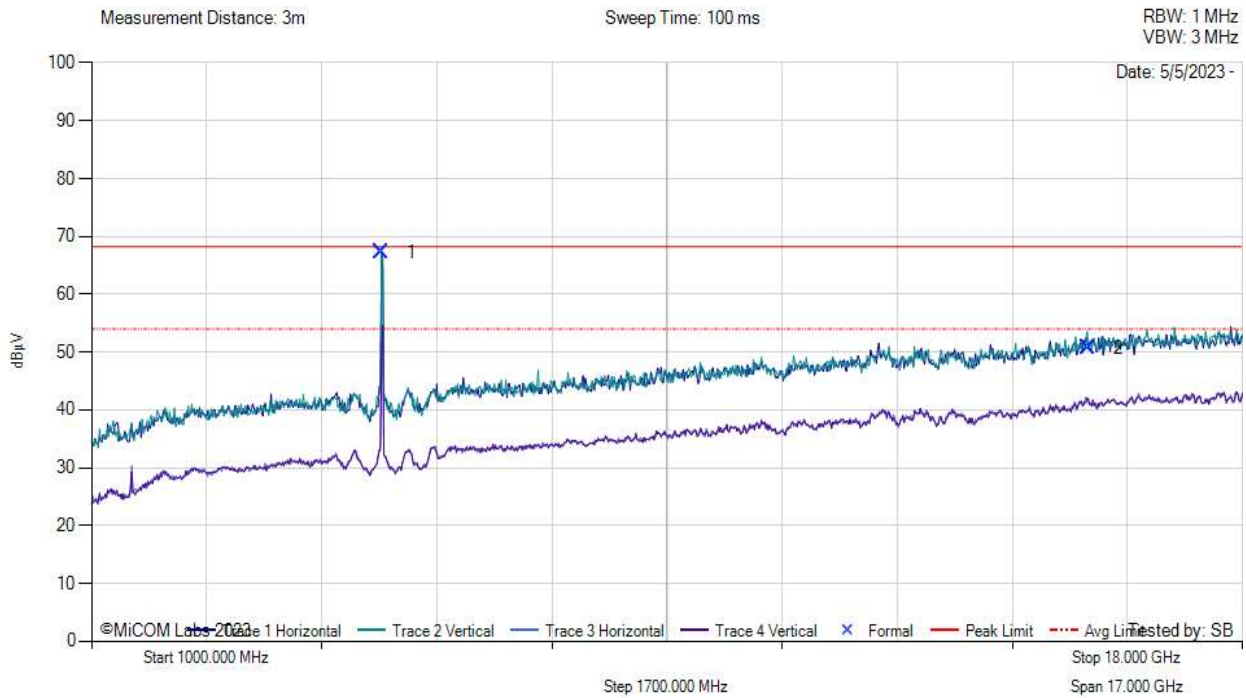

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5284.00	76.11	2.99	34.39	67.21	Fundamental	--	--	--	--	--	Pass
2	15722.00	46.25	5.83	40.87	50.66	MaxP	Vertical	149	179	68.2	-17.6	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5320	<b>Data Rate:</b>	6
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

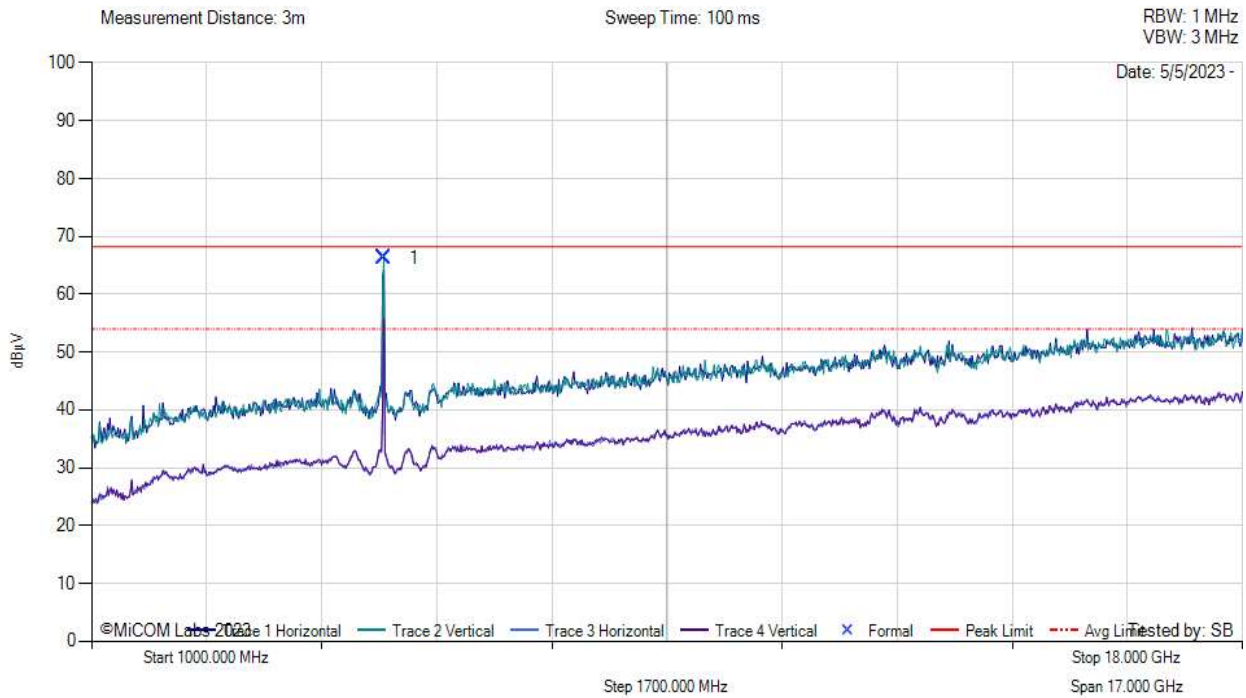

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5318.00	75.13	3.04	34.47	66.30	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5500	<b>Data Rate:</b>	6
<b>Power Setting:</b>	13	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

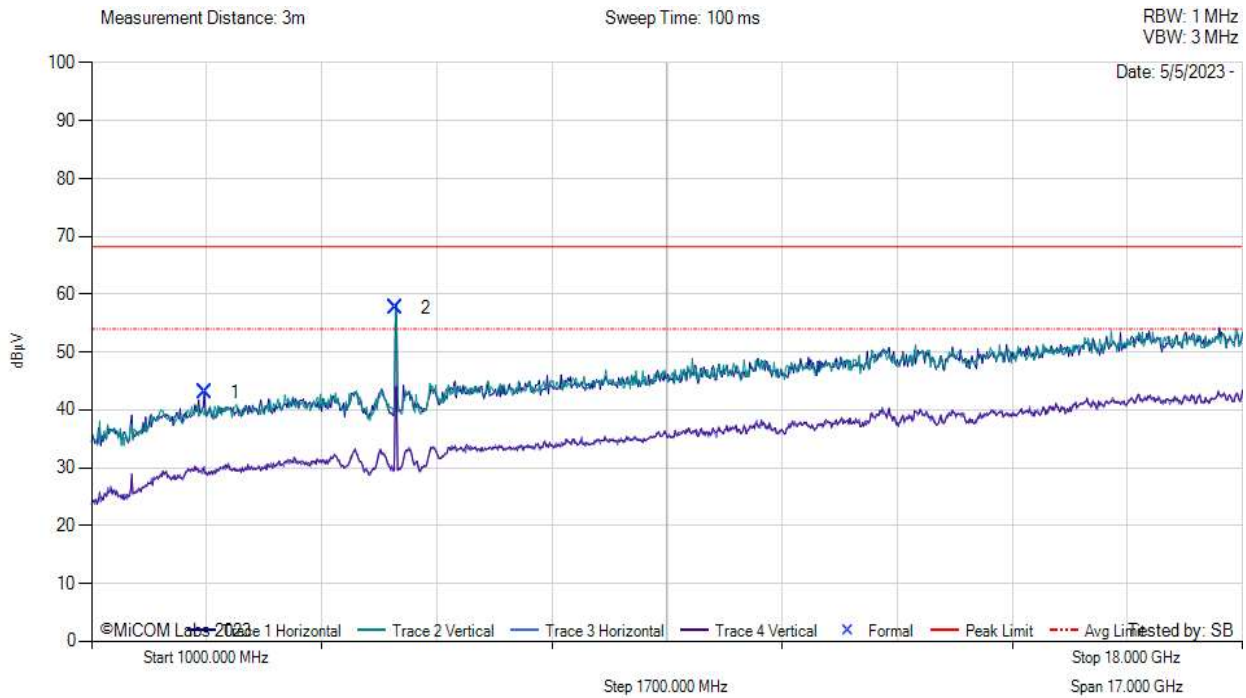

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2666.00	52.53	2.06	32.54	43.03	MaxP	Horizontal	99	120	68.2	-25.2	Pass
2	5488.00	66.59	3.10	34.34	57.66	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5580	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

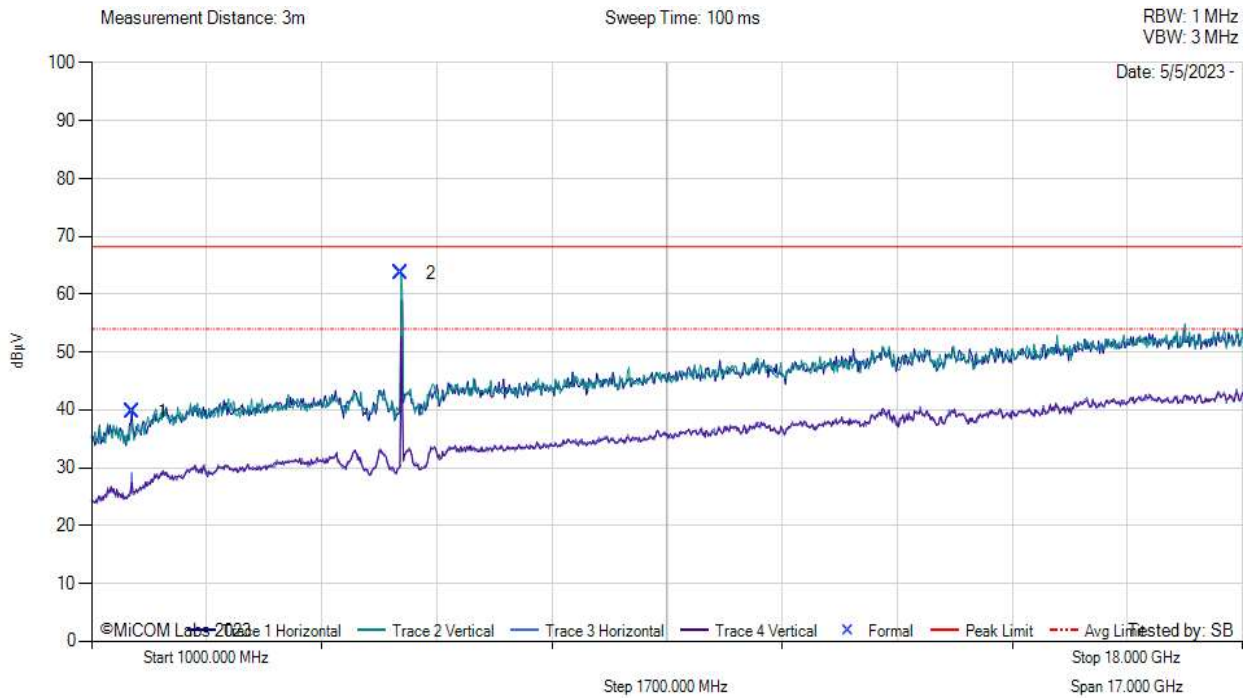

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1595.00	54.93	1.63	28.13	39.71	MaxP	Horizontal	149	0	68.2	-28.5	Pass
2	5573.00	72.38	3.11	34.24	63.61	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5720	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

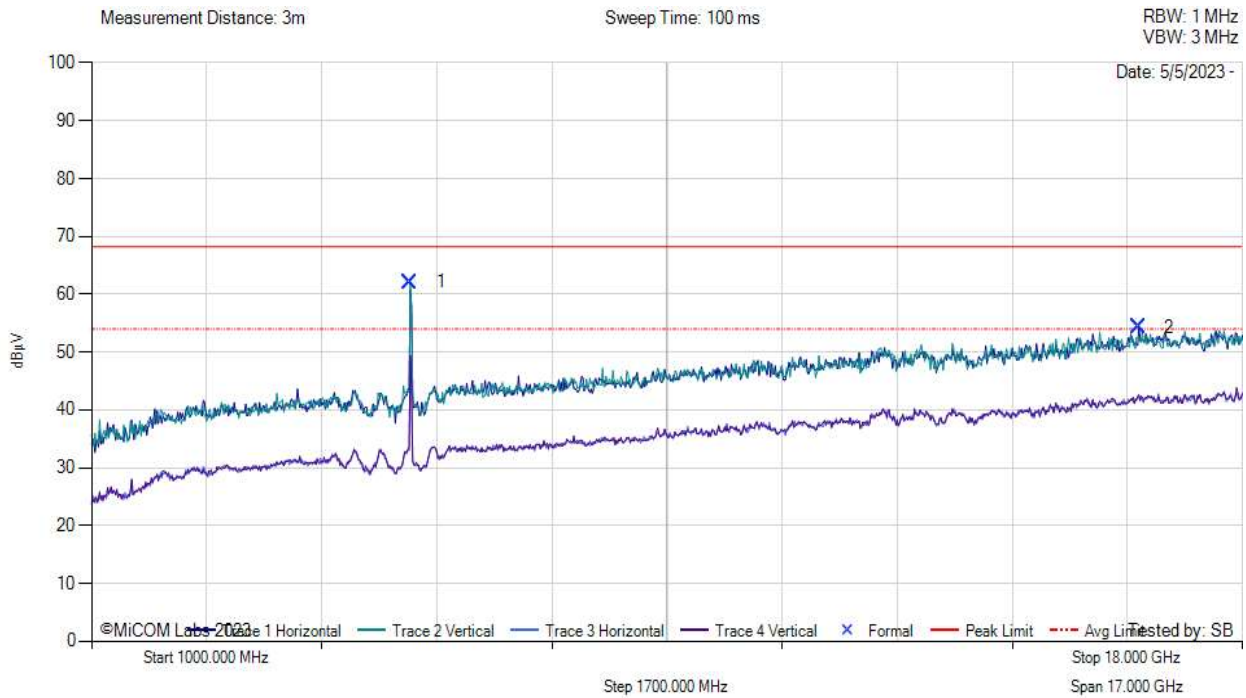

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5709.00	69.63	3.18	34.34	62.05	Fundamental	--	--	--	--	--	Pass
2	16470.00	48.34	6.35	41.19	54.23	MaxP	Horizontal	149	300	68.2	-14.0	Pass

**Test Notes:** Max power, 5VDC 3A




**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5745	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

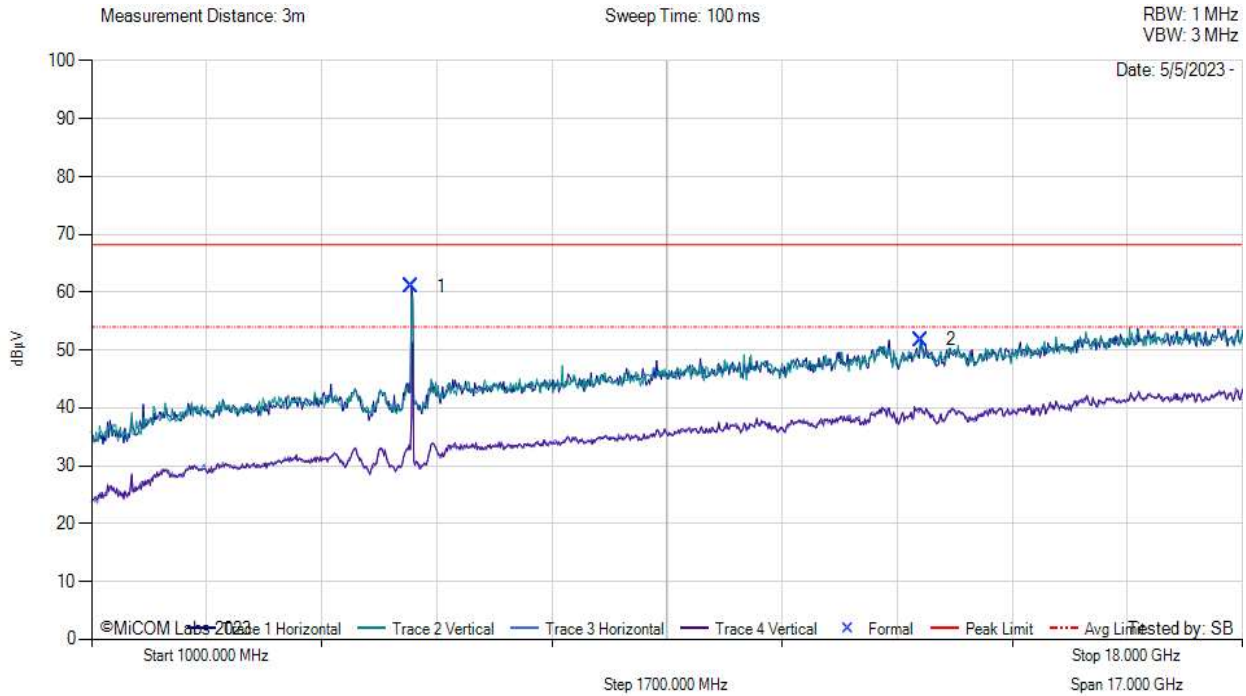

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5726.00	68.55	3.21	34.35	60.99	Fundamental	--	--	--	--	--	Pass
2	13240.00	61.26	5.37	38.64	51.80	MaxP	Horizontal	149	300	68.2	-16.4	Pass

**Test Notes:** Max power, 5VDC 3A


**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5785	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

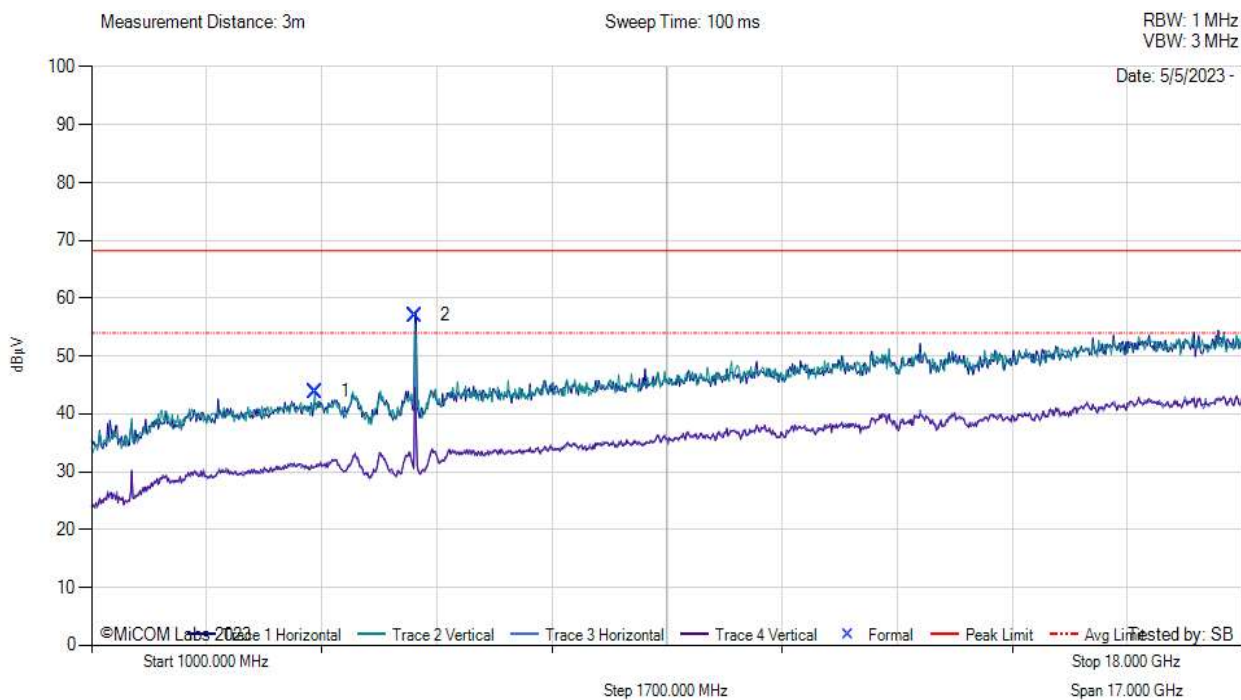

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4298.00	53.61	2.65	33.66	43.91	MaxP	Vertical	99	179	68.2	-24.3	Pass
2	5777.00	65.03	3.19	34.44	57.07	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A




**Equipment Configuration for FCC Spurious 1 GHz -18 GHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5825	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



FCC Spurious 1 GHz -18 GHz

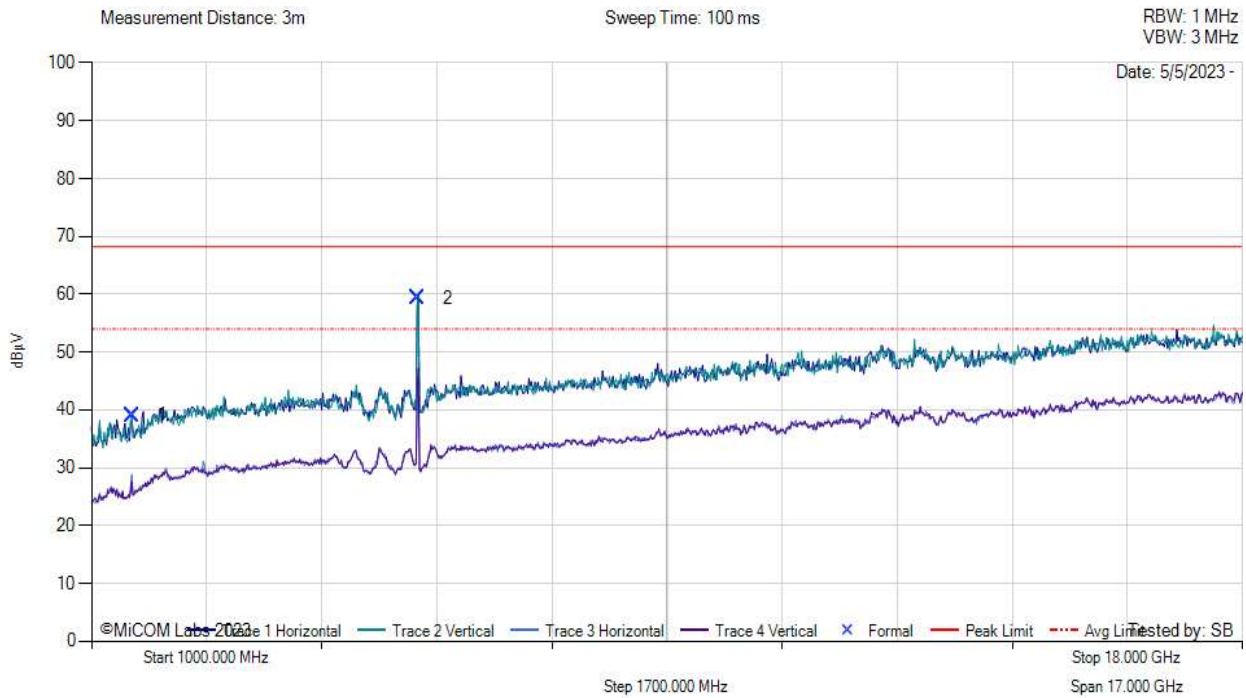

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1595.00	54.30	1.63	28.13	39.07	MaxP	Vertical	98	0	68.2	-29.2	Pass
2	5811.00	66.63	3.20	34.53	59.40	Fundamental	--	--	--	--	--	Pass

**Test Notes:** Max power, 5VDC 3A

**9.1.2. Restricted Edge & Band-Edge Emissions**

**9.1.2.3. FXP831.07.0100C**

**NOTE: For Tx spurious & Restricted Band-Edge measurements power setting utilized were extracted from the original reports identified in Section 5.2 ‘Scope of the Test Program’**

9.1.2.3.1. 5150 - 5250 MHz

CCMP15/CCMP13		Band-Edge Freq	Limit 74.0dBµV/m	Limit 54.0dBµV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBµV/m	dBµV/m	
802.11a	<a href="#">5180.00</a>	5150.00	65.87	53.13	14
802.11ac-20	<a href="#">5180.00</a>	5150.00	66.07	53.08	14
802.11ac-40	<a href="#">5190.00</a>	5150.00	65.52	52.98	10
802.11ac-80	<a href="#">5210.00</a>	5150.00	66.40	53.05	11

9.1.2.3.2. 5250 - 5350 MHz

CCMP15/CCMP13		Band-Edge Freq	Limit 74.0dBµV/m	Limit 54.0dBµV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBµV/m	dBµV/m	
802.11a	<a href="#">5320.00</a>	5350.00	62.55	49.37	14
802.11ac-20	<a href="#">5320.00</a>	5350.00	62.90	49.38	14
802.11ac-40	<a href="#">5310.00</a>	5350.00	69.84	50.92	10
802.11ac-80	<a href="#">5290.00</a>	5350.00	63.49	50.41	11


**Equipment Configuration for BE 5150 MHZ**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5180.0	<b>Data Rate:</b>	6
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5150 MHz

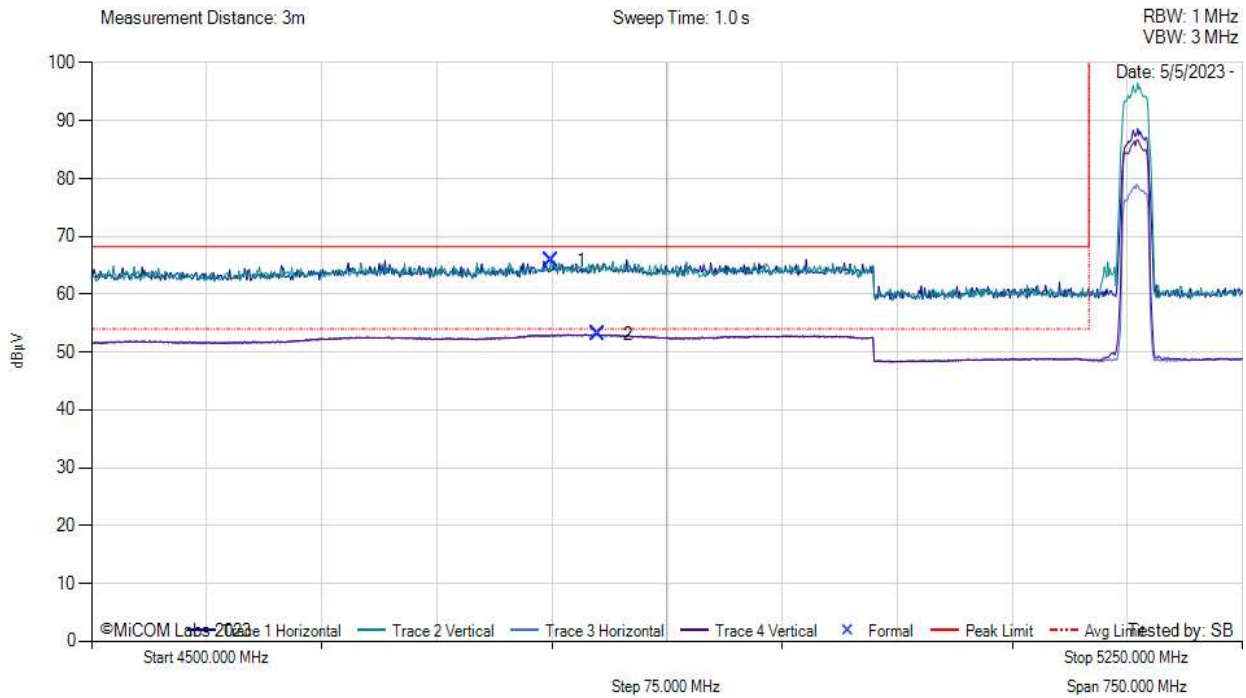

**4500.00 - 5250.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4799.25	38.53	2.84	34.50	65.87	MaxP	Vertical	199	179	68.2	-2.3	Pass
2	4830.00	25.73	2.92	34.49	53.14	AVG	Vertical	148	59	54.0	-0.9	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5150 MHZ**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac20
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5180.0	<b>Data Rate:</b>	6.5
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5150 MHz

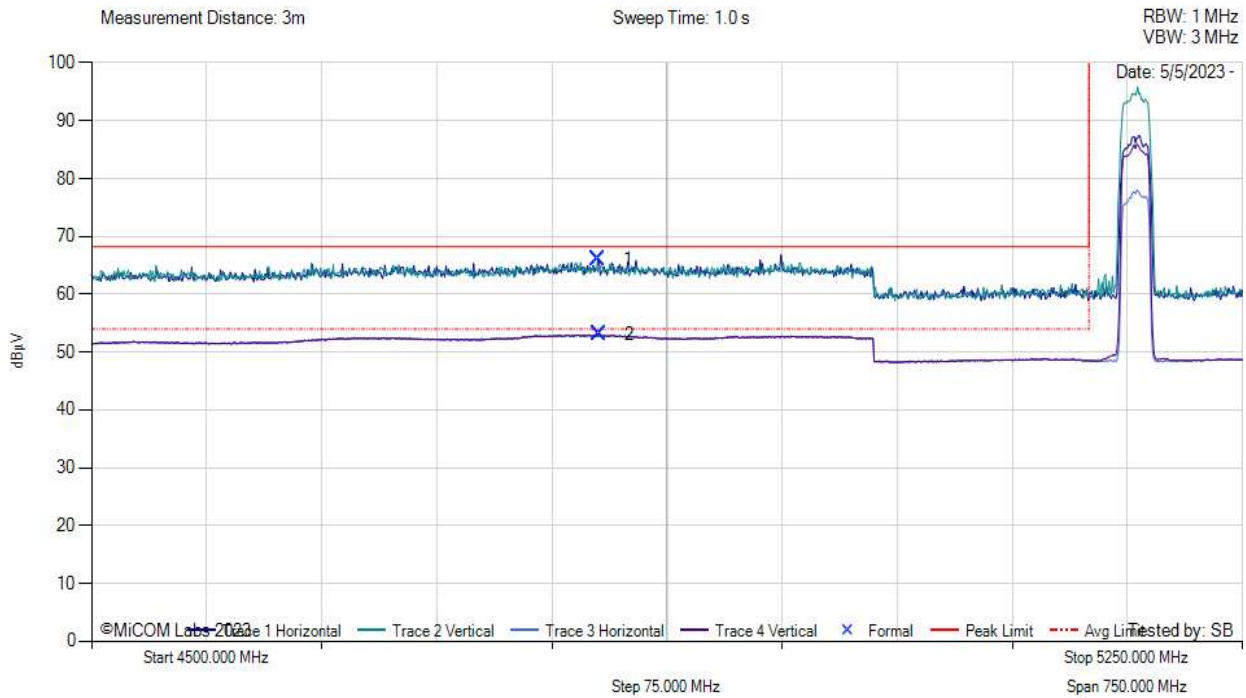

**4500.00 - 5250.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4830.00	38.82	2.96	34.37	66.07	MaxP	Vertical	149	0	68.2	-2.1	Pass
2	4830.75	25.67	2.92	34.49	53.08	AVG	Vertical	199	119	54.0	-0.9	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5150 MHZ**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac40
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5190.0	<b>Data Rate:</b>	13.5
<b>Power Setting:</b>	10	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5150 MHz

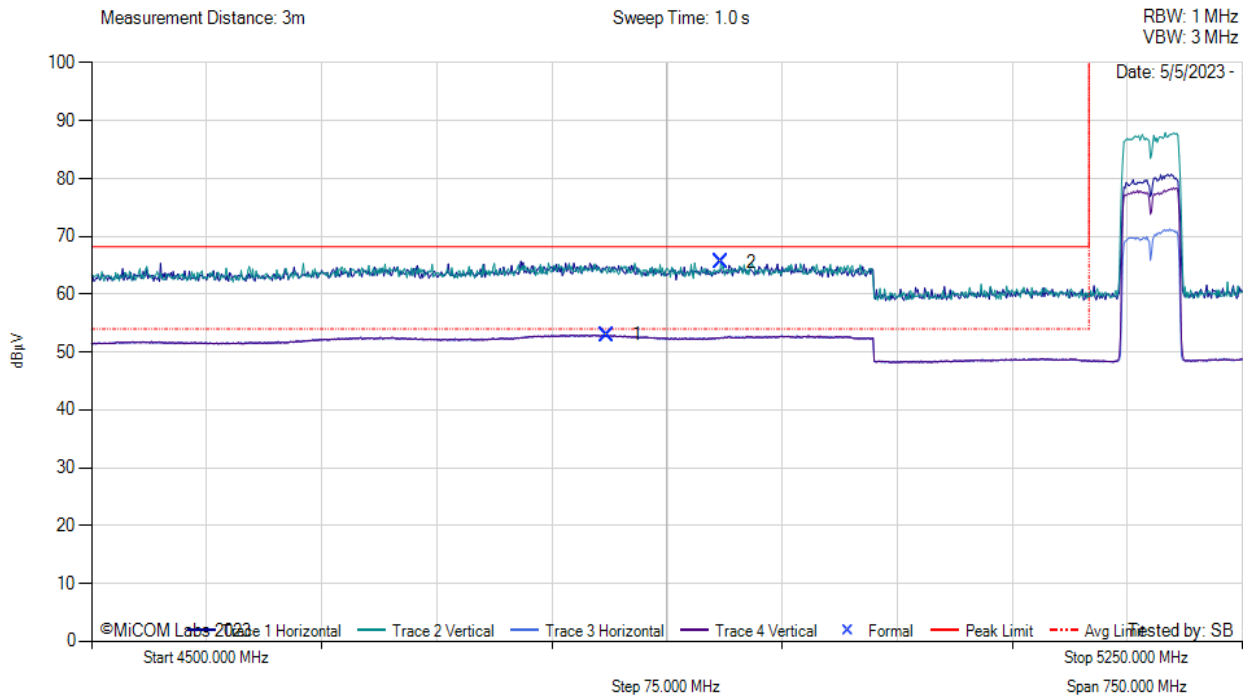

**4500.00 - 5250.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4836.00	25.57	2.93	34.48	52.98	AVG	Vertical	149	239	54.0	-1.0	Pass
2	4910.25	38.19	2.96	34.37	65.52	MaxP	Vertical	149	0	68.2	-2.7	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5150 MHZ**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac80
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5210.0	<b>Data Rate:</b>	29.5
<b>Power Setting:</b>	11	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5150 MHz

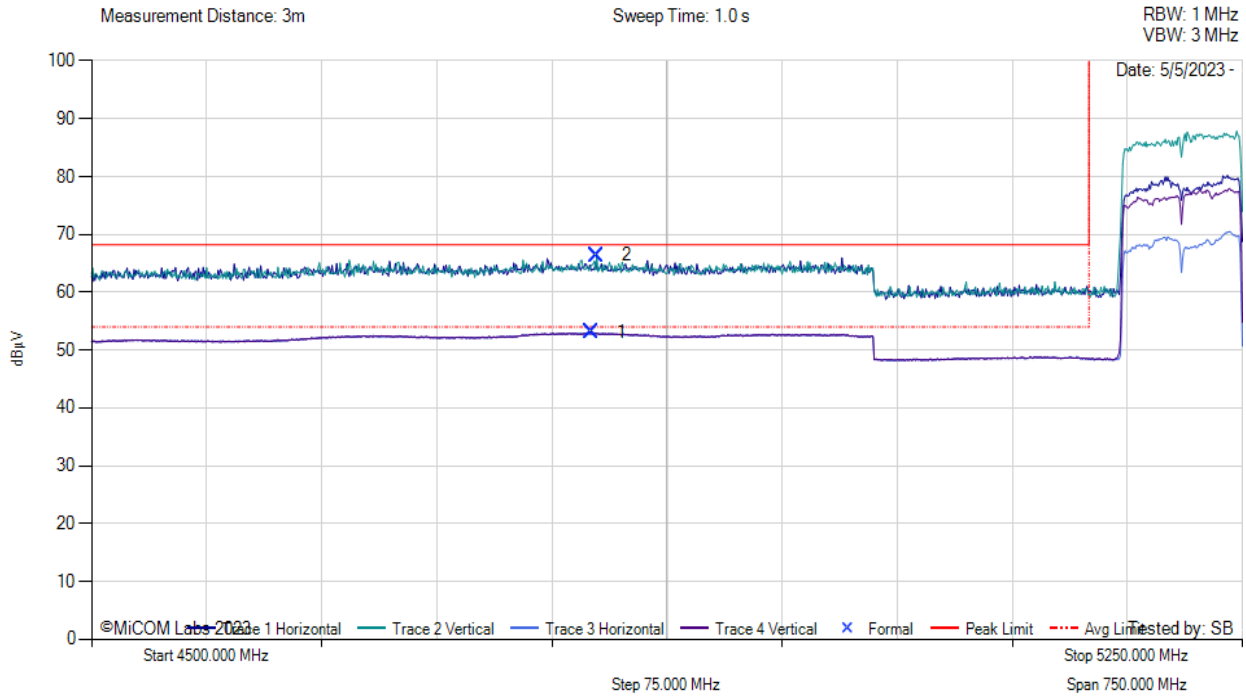

**4500.00 - 5250.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4825.50	25.66	2.90	34.49	53.05	AVG	Horizontal	199	180	54.0	-1.0	Pass
2	4829.25	38.99	2.92	34.49	66.40	MaxP	Vertical	149	179	68.2	-1.8	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5350 MHZ**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5320.0	<b>Data Rate:</b>	6
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5350 MHz

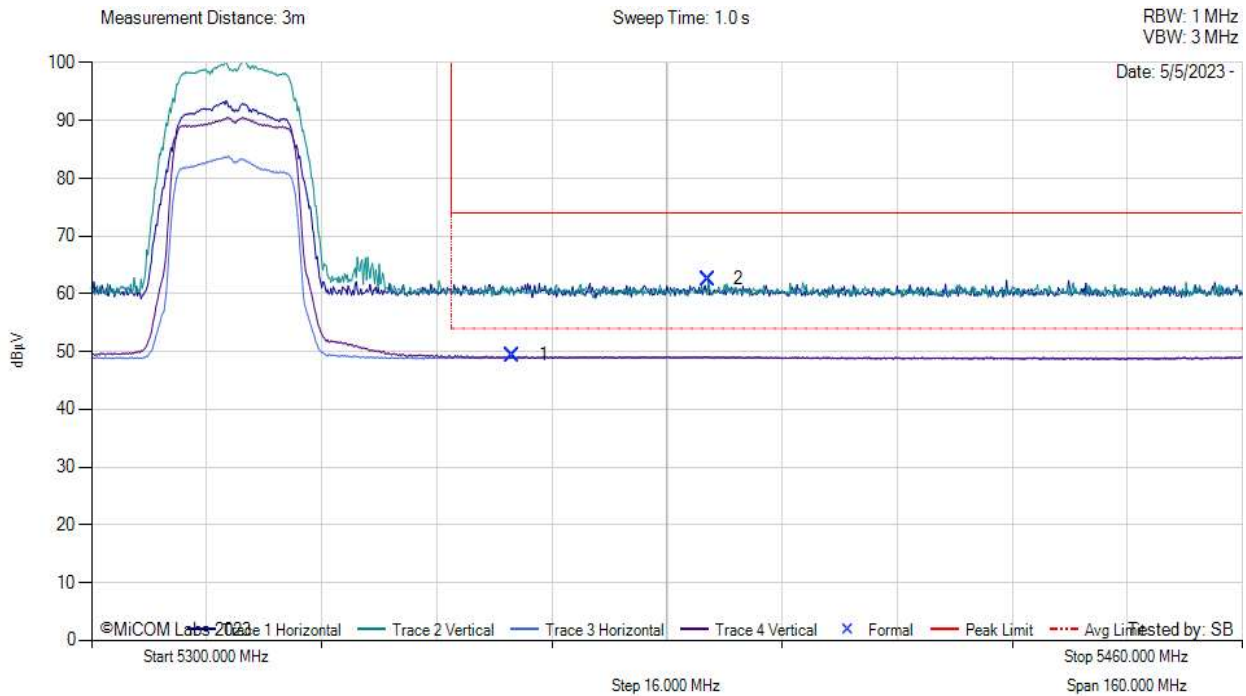

5300.00 - 5460.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5358.56	21.82	3.06	34.49	49.37	AVG	Vertical	199	239	54.0	-4.6	Pass
2	5385.76	34.97	3.16	34.42	62.55	MaxP	Vertical	149	0	74.0	-11.4	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)




**Equipment Configuration for BE 5350 MHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac20
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5320.0	<b>Data Rate:</b>	6.5
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5350 MHz

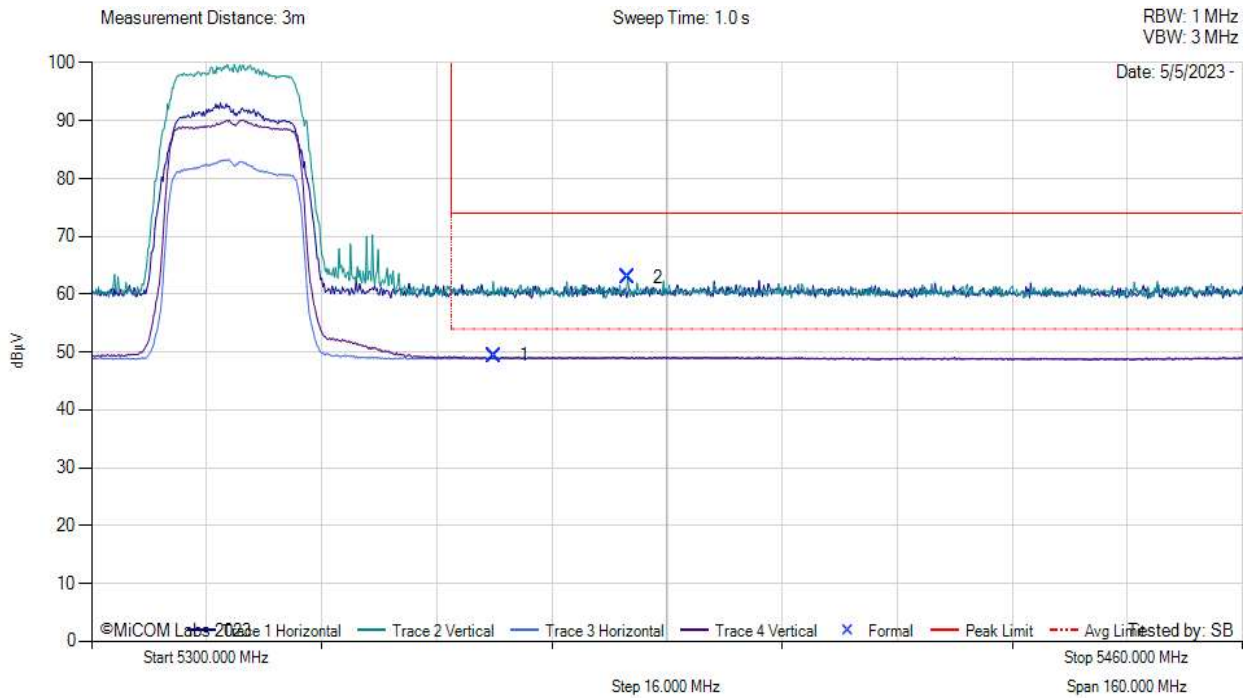

**5300.00 - 5460.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5356.00	21.84	3.04	34.50	49.38	AVG	Vertical	199	239	54.0	-4.6	Pass
2	5374.56	35.33	3.12	34.45	62.90	MaxP	Vertical	199	0	74.0	-11.1	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5350 MHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac40
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5310.0	<b>Data Rate:</b>	13.5
<b>Power Setting:</b>	10	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5350 MHz

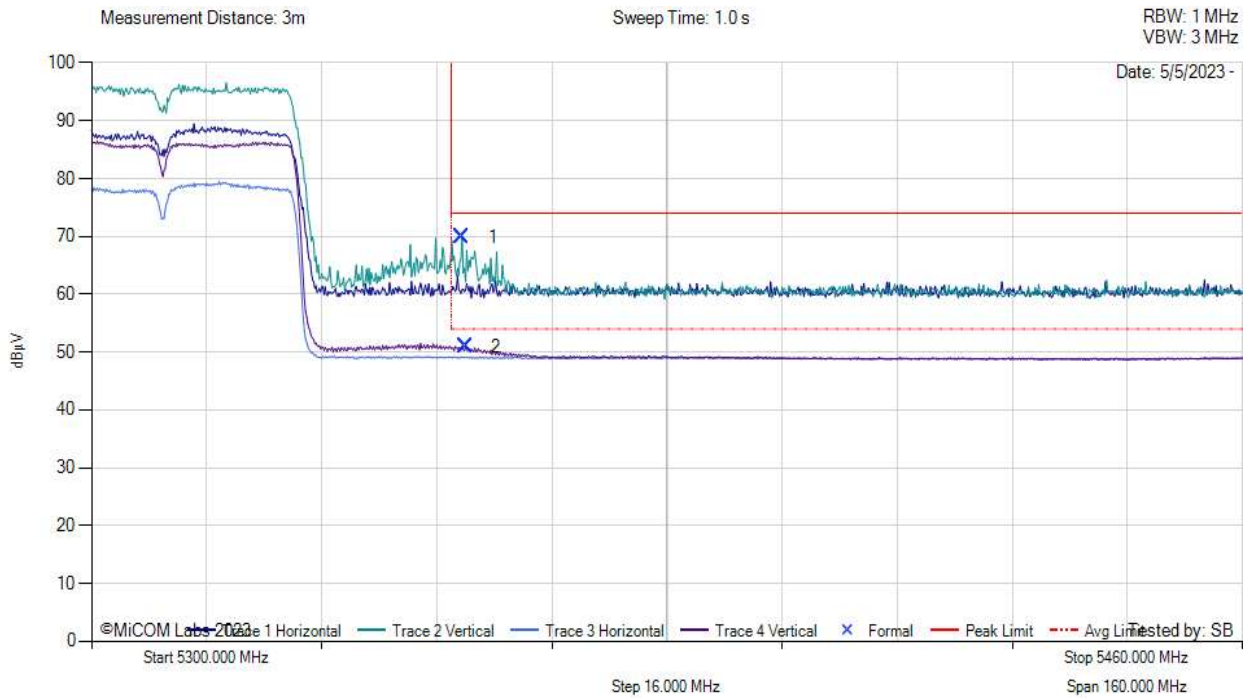

**5300.00 - 5460.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5351.52	42.30	3.03	34.51	69.84	MaxP	Vertical	199	239	74.0	-4.2	Pass
2	5352.00	23.38	3.03	34.51	50.92	AVG	Vertical	199	239	54.0	-3.1	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5350 MHZ**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac80
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5290.0	<b>Data Rate:</b>	29.5
<b>Power Setting:</b>	11	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5350 MHz

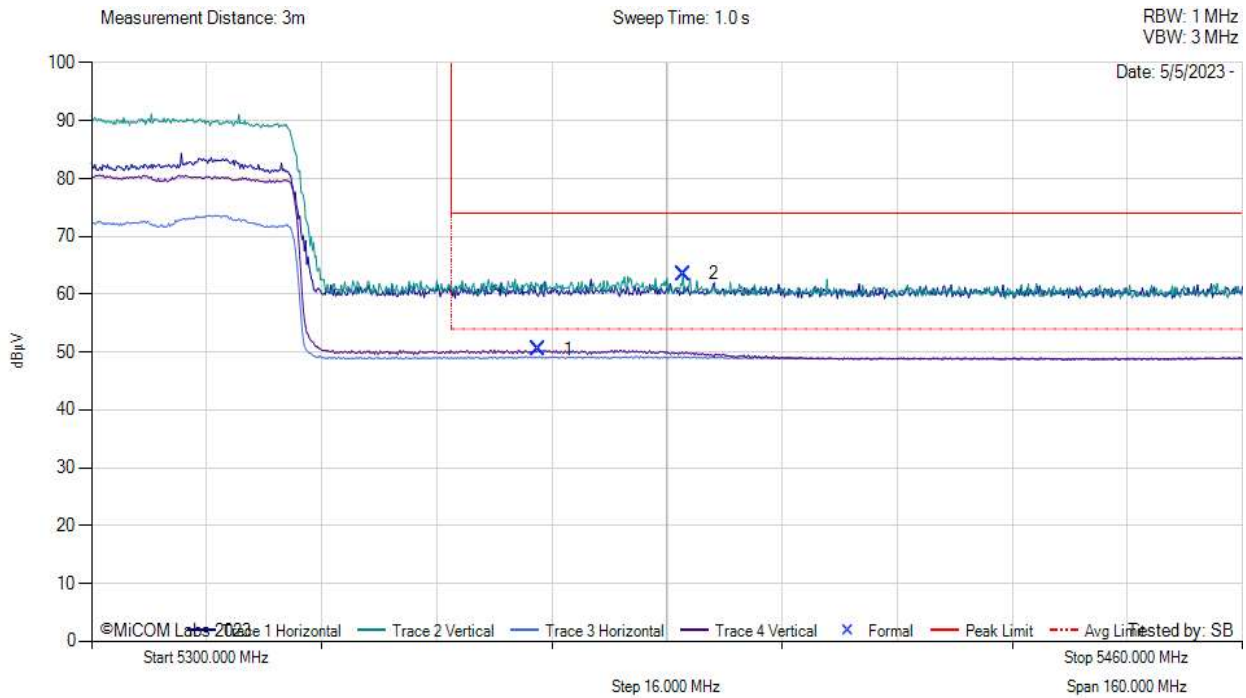

**5300.00 - 5460.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5362.08	22.86	3.07	34.48	50.41	AVG	Vertical	199	239	54.0	-3.6	Pass
2	5382.24	35.92	3.15	34.43	63.49	MaxP	Vertical	199	239	74.0	-10.5	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)

9.1.2.3.3. 5470 - 5725 MHz

CCMP15/CCMP13		Restricted-Edge Freq	Limit 68.2dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
802.11a	<a href="#">5500.00</a>	5460.00	61.73	49.34	13
802.11ac-20	<a href="#">5500.00</a>	5460.00	62.11	49.29	12
802.11ac-40	<a href="#">5510.00</a>	5460.00	68.11	52.46	10
802.11ac-80	<a href="#">5530.00</a>	5460.00	61.61	50.53	11


**Equipment Configuration for BE 5470 MHZ**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5500.0	<b>Data Rate:</b>	6
<b>Power Setting:</b>	13	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5470 MHz

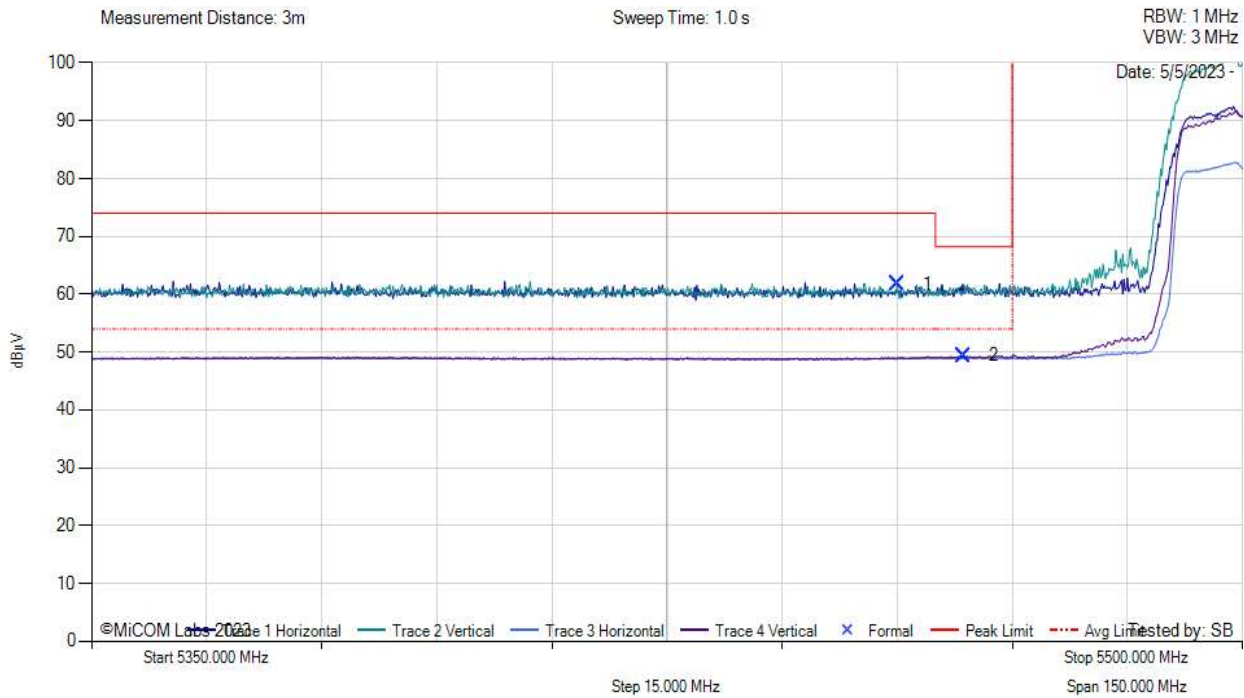

**5350.00 - 5500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5455.00	34.29	3.13	34.30	61.73	MaxP	Vertical	199	300	74.0	-12.3	Pass
2	5463.70	21.88	3.16	34.31	49.34	AVG	Vertical	199	239	54.0	-4.7	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5470 MHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac20
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5500.0	<b>Data Rate:</b>	6.5
<b>Power Setting:</b>	12	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5470 MHz

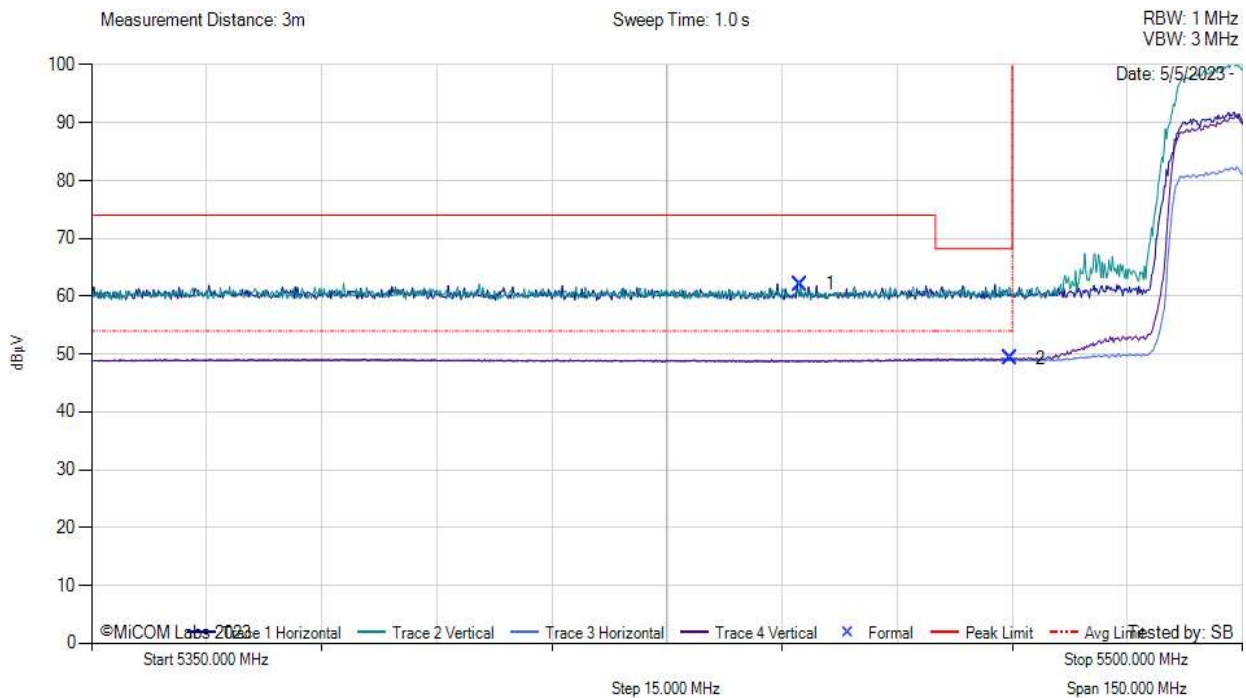

**5350.00 - 5500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5442.40	34.75	3.05	34.31	62.11	MaxP	Vertical	199	59	74.0	-11.9	Pass
2	5469.70	21.86	3.11	34.32	49.29	AVG	Vertical	199	239	54.0	-4.7	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5470 MHZ**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac40
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5510.0	<b>Data Rate:</b>	13.5
<b>Power Setting:</b>	10	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5470 MHz

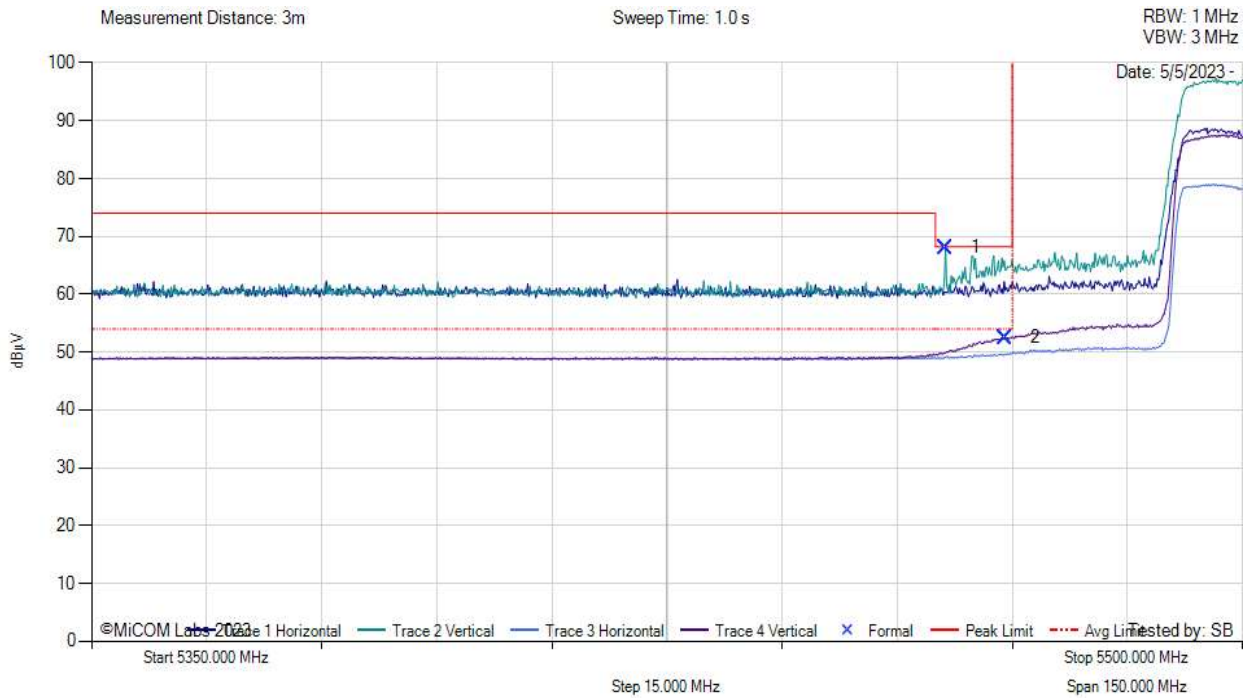

**5350.00 - 5500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5461.30	40.63	3.18	34.31	68.11	MaxP	Vertical	199	239	68.2	-0.1	Pass
2	5469.10	25.03	3.11	34.32	52.46	AVG	Vertical	199	239	54.0	-1.5	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)




**Equipment Configuration for BE 5470 MHZ**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac80
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5530.0	<b>Data Rate:</b>	29.5
<b>Power Setting:</b>	11	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5470 MHz

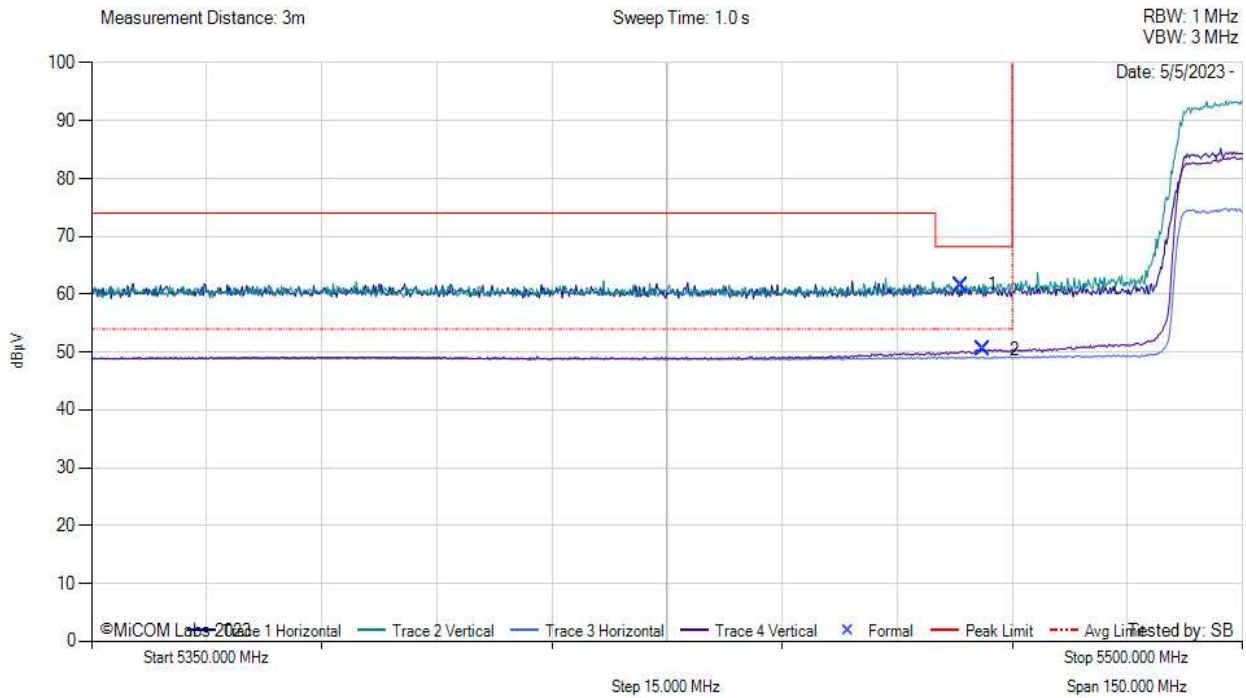

**5350.00 - 5500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5463.40	34.15	3.16	34.31	61.61	MaxP	Vertical	149	239	68.2	-6.6	Pass
2	5466.25	23.08	3.13	34.31	50.53	AVG	Vertical	199	239	54.0	-3.5	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)

9.1.2.3.4. 5725 – 5850 MHz

**Low Band-Edge**

CCMP15/CCMP13		Band-Edge Freq	Limit 68.2dB $\mu$ V/m	Limit 68.2dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
802.11a	<a href="#">5745.00</a>	5725.00	63.84	63.40	13
802.11ac-20	<a href="#">5745.00</a>	5725.00	64.79	65.03	12
802.11ac-40	<a href="#">5755.00</a>	5725.00	63.67	63.70	14
802.11ac-80	<a href="#">5775.00</a>	5725.00	63.69	63.87	11

**High Band-Edge**

CCMP15/CCMP13		Band-Edge Freq	Limit 68.2dB $\mu$ V/m	Limit 68.2dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
802.11a	<a href="#">5825.00</a>	5850.00	67.27	66.78	17
802.11ac-20	<a href="#">5825.00</a>	5850.00	67.56	66.69	16
802.11ac-40	<a href="#">5795.00</a>	5850.00	66.88	68.19	14
802.11ac-80	<a href="#">5775.00</a>	5850.00	67.14	67.09	11


**Equipment Configuration for BE 5725 MHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5745.0	<b>Data Rate:</b>	6
<b>Power Setting:</b>	13	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5725 MHz

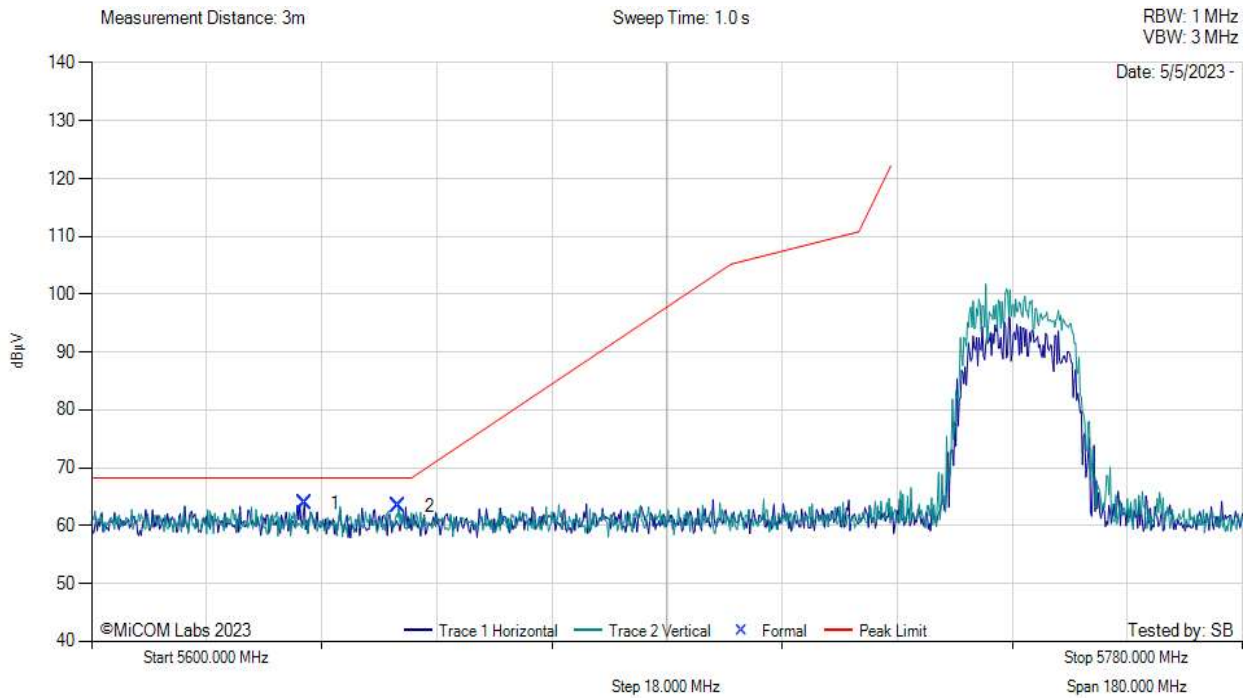

**5600.00 - 5780.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5633.30	36.50	3.14	34.20	63.84	MaxP	Horizontal	199	298	68.2	-4.4	Pass
2	5648.06	36.05	3.16	34.18	63.40	MaxP	Vertical	199	59	68.2	-4.8	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5725 MHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac20
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5745.0	<b>Data Rate:</b>	6.5
<b>Power Setting:</b>	12	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5725 MHz

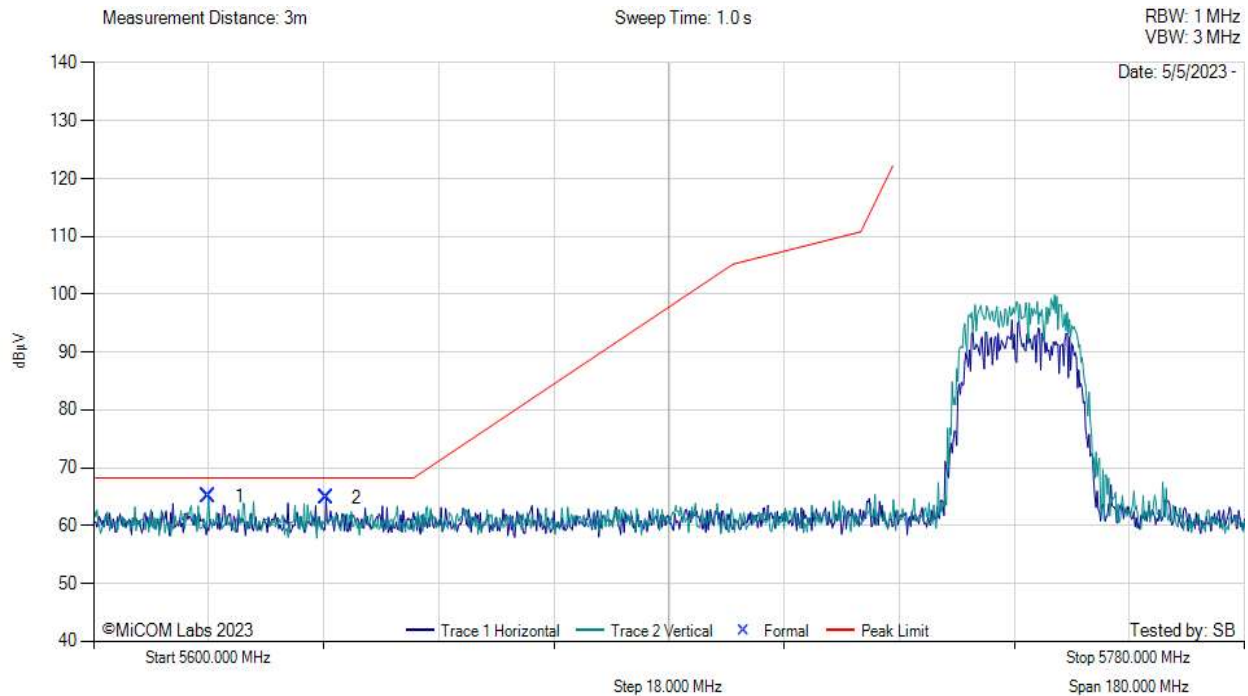

**5600.00 - 5780.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5618.00	37.64	3.18	34.21	65.03	MaxP	Vertical	199	179	68.2	-3.2	Pass
2	5636.36	37.43	3.17	34.19	64.79	MaxP	Horizontal	199	120	68.2	-3.4	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5725 MHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac40
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5755.0	<b>Data Rate:</b>	13.5
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5725 MHz

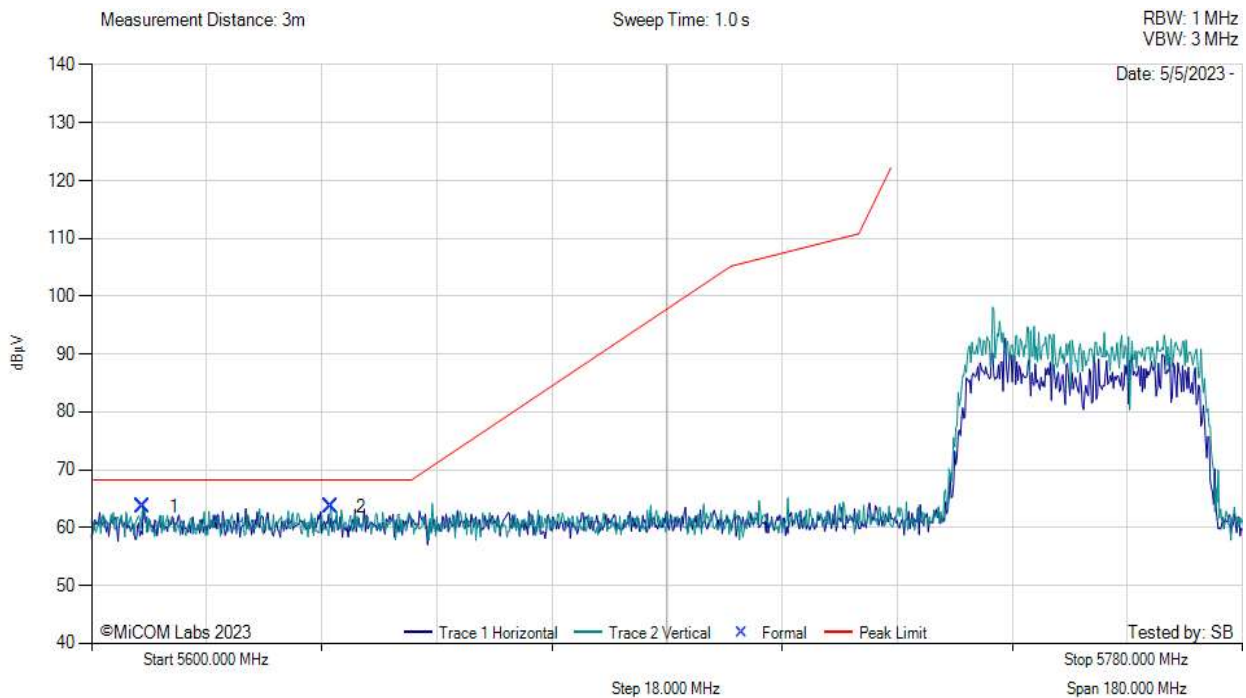

**5600.00 - 5780.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5608.10	36.28	3.16	34.23	63.67	MaxP	Horizontal	149	60	68.2	-4.6	Pass
2	5637.44	36.33	3.18	34.19	63.70	MaxP	Vertical	149	59	68.2	-4.5	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5725 MHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac80
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5775.0	<b>Data Rate:</b>	29.5
<b>Power Setting:</b>	11	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5725 MHz

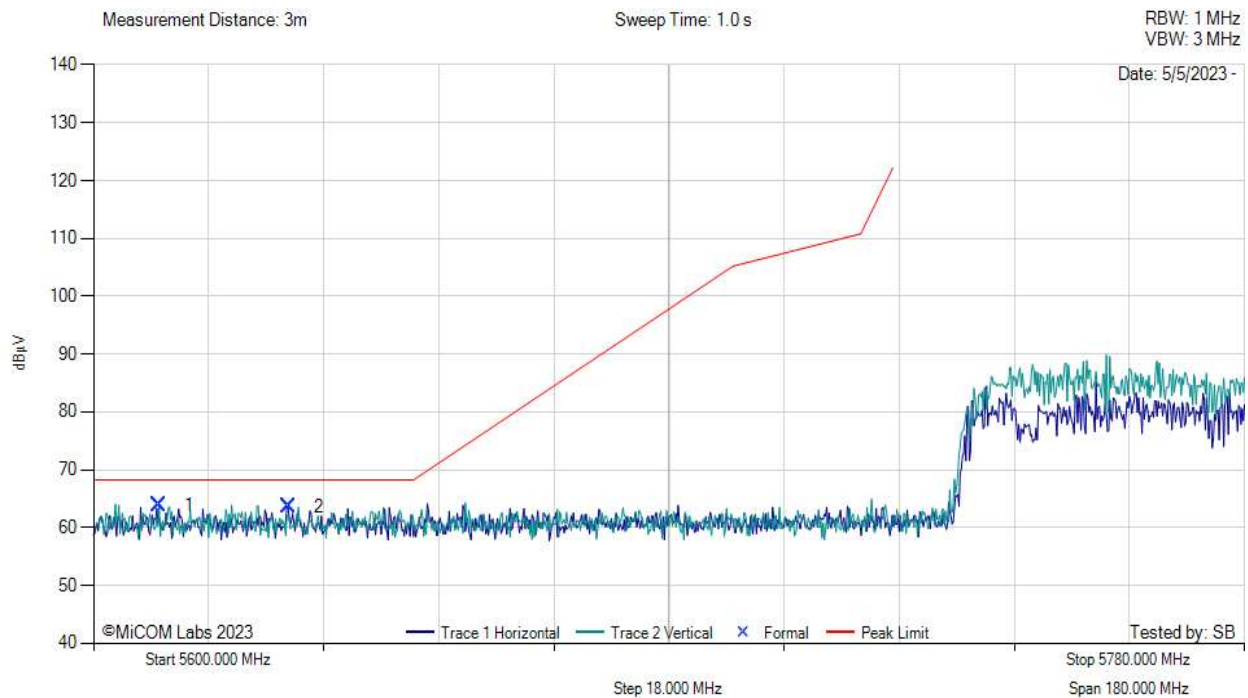

**5600.00 - 5780.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5610.26	36.33	3.18	34.19	63.87	MaxP	Vertical	149	59	68.2	-4.5	Pass
2	5630.42	36.09	3.13	34.20	63.69	MaxP	Horizontal	199	0	68.2	-4.5	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5850 MHZ**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5825.0	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5850 MHz

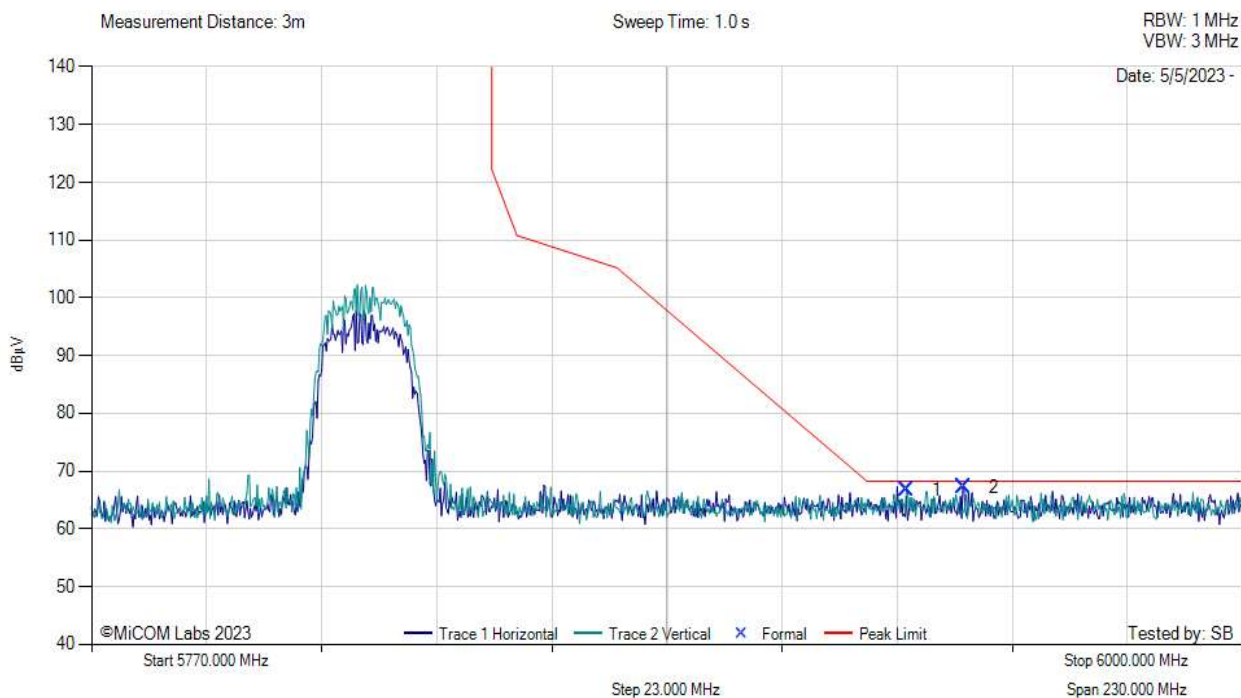

5770.00 - 6000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5932.84	38.63	3.31	34.84	66.78	MaxP	Vertical	199	179	68.2	-1.5	Pass
2	5944.34	39.18	3.23	34.87	67.27	MaxP	Horizontal	149	180	68.2	-1.0	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)




**Equipment Configuration for BE 5850 MHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac20
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5825.0	<b>Data Rate:</b>	6.5
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5850 MHz

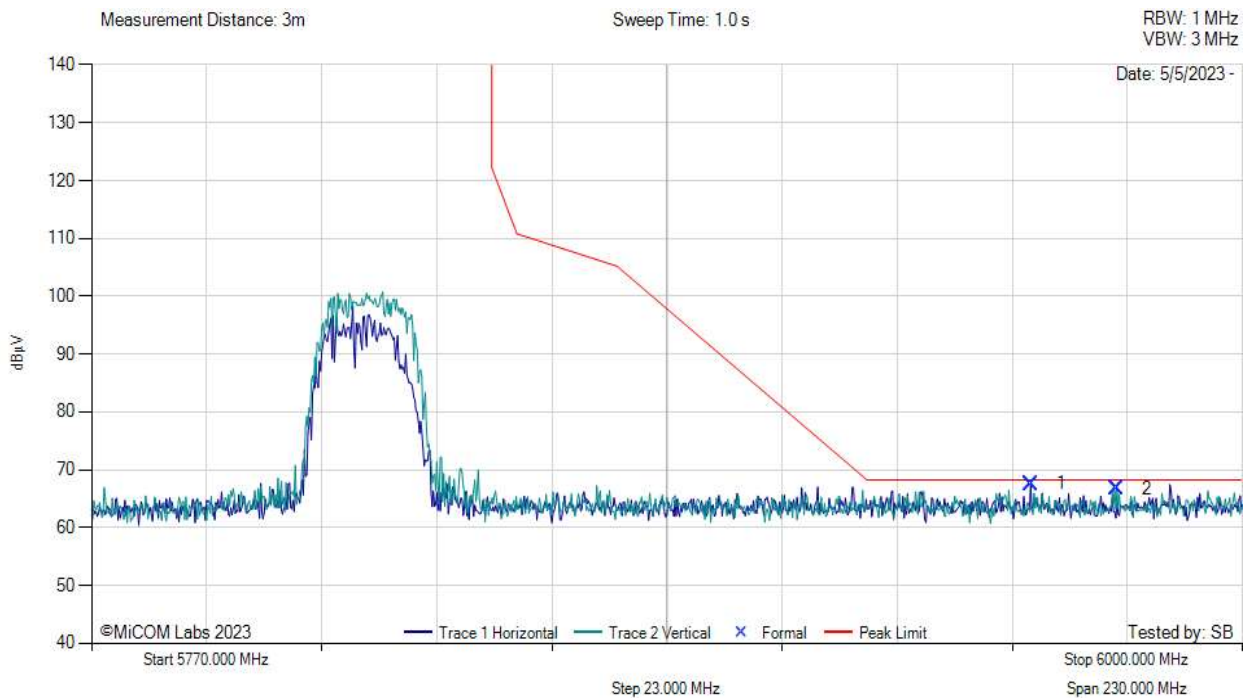

**5770.00 - 6000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5957.68	39.42	3.25	34.89	67.56	MaxP	Horizontal	199	120	68.2	-0.7	Pass
2	5974.93	38.55	3.23	34.91	66.69	MaxP	Vertical	199	119	68.2	-1.5	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5850 MHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac40
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5795.0	<b>Data Rate:</b>	13.5
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5850 MHz

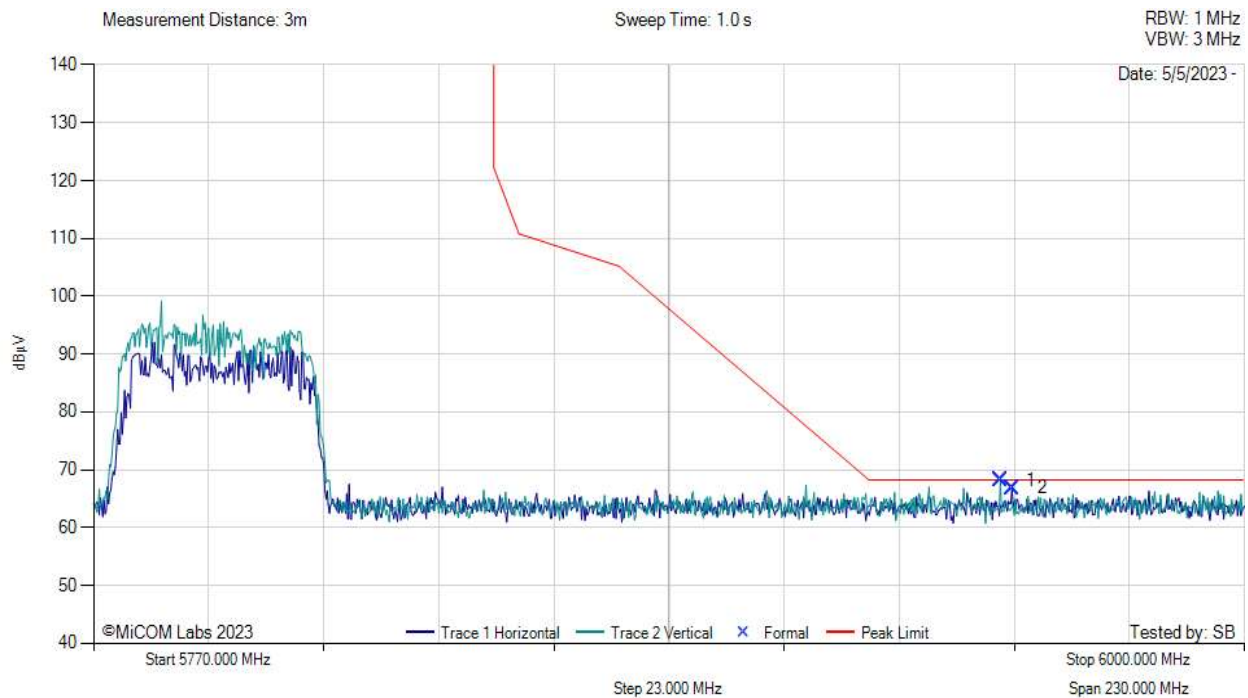

**5770.00 - 6000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5951.24	40.05	3.26	34.88	68.19	MaxP	Vertical	149	239	68.2	0.0	Pass
2	5953.54	38.74	3.27	34.88	66.88	MaxP	Horizontal	199	180	68.2	-1.3	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5850 MHz**

<b>Antenna:</b>	FXP831.07.0100C	<b>Variant:</b>	802.11ac80
<b>Antenna Gain (dBi):</b>	5.5	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5775.0	<b>Data Rate:</b>	29.5
<b>Power Setting:</b>	11	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5850 MHz

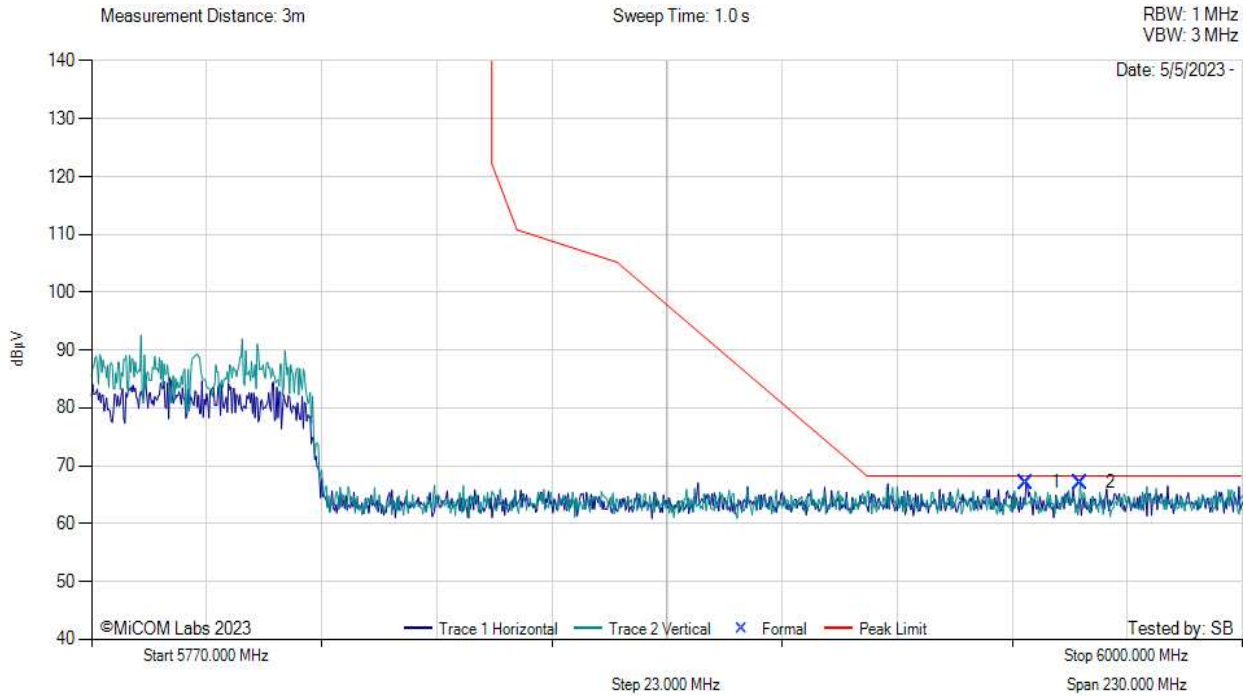

**5770.00 - 6000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5956.76	38.99	3.25	34.89	67.14	MaxP	Horizontal	199	180	68.2	-1.1	Pass
2	5967.57	38.96	3.23	34.90	67.09	MaxP	Vertical	199	300	68.2	-1.1	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 2400 MHz**

<b>Antenna:</b>	GW.48.A151	<b>Variant:</b>	802.11b
<b>Antenna Gain (dBi):</b>	3.42	<b>Modulation:</b>	CCK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2412.0	<b>Data Rate:</b>	1
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 2400 MHz

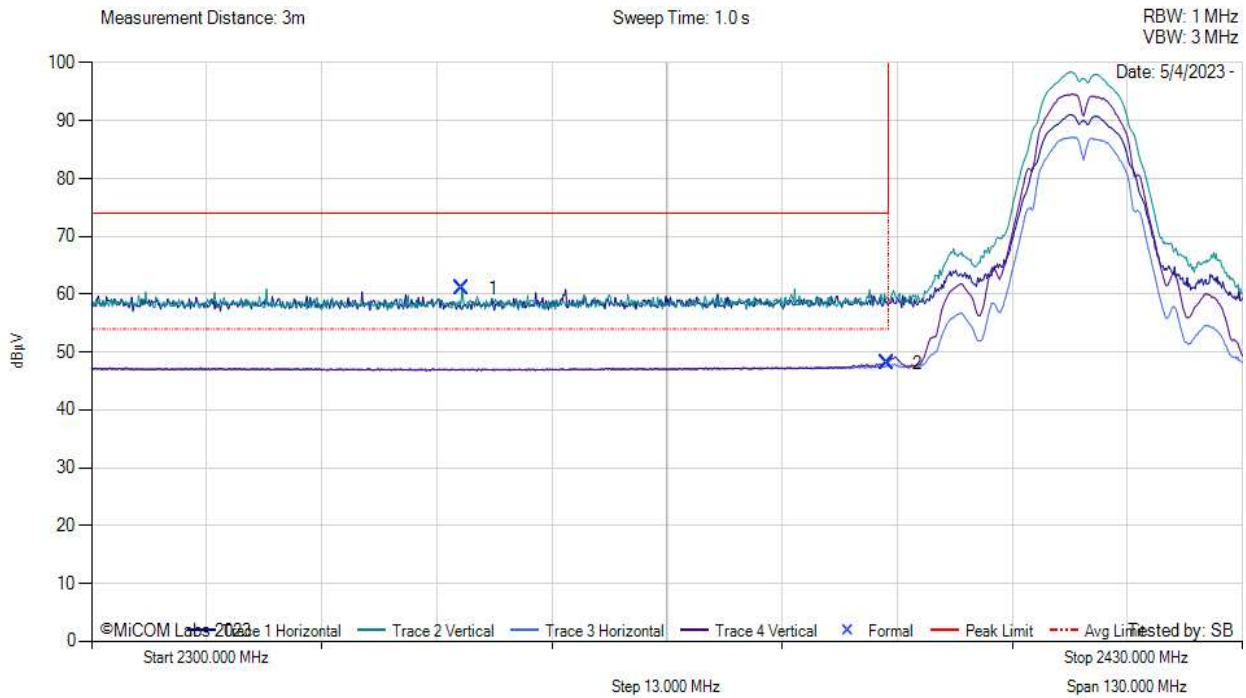

**2300.00 - 2430.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2341.86	37.37	1.94	31.70	61.01	MaxP	Vertical	149	89	74.0	-13.0	Pass
2	2389.83	24.11	1.96	32.04	48.11	AVG	Vertical	149	179	54.0	-5.9	Pass

**Test Notes:** Max power, 5VDC 3A

[back to matrix](#)


**Equipment Configuration for BE 2400 MHz**

<b>Antenna:</b>	GW.48.A151	<b>Variant:</b>	802.11g
<b>Antenna Gain (dBi):</b>	3.42	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2412.0	<b>Data Rate:</b>	1
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 2400 MHz

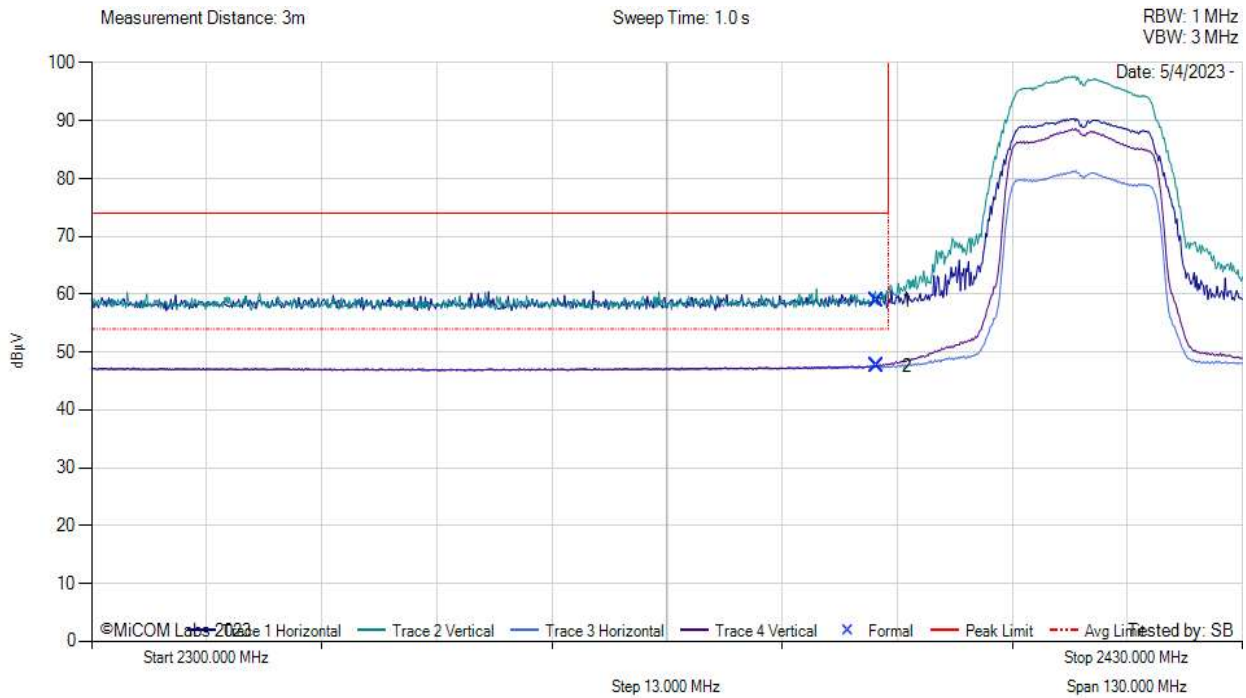

**2300.00 - 2430.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2388.66	34.79	1.96	32.04	58.79	MaxP	Vertical	100	0	74.0	-15.2	Pass
2	2388.66	23.55	1.96	32.04	47.55	AVG	Vertical	149	179	54.0	-6.5	Pass

**Test Notes:** Max power, 5VDC 3A,

[back to matrix](#)


**Equipment Configuration for BE 2400 MHz**

<b>Antenna:</b>	GW.48.A151	<b>Variant:</b>	802.11n HT20
<b>Antenna Gain (dBi):</b>	3.42	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2412.0	<b>Data Rate:</b>	1
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 2400 MHz

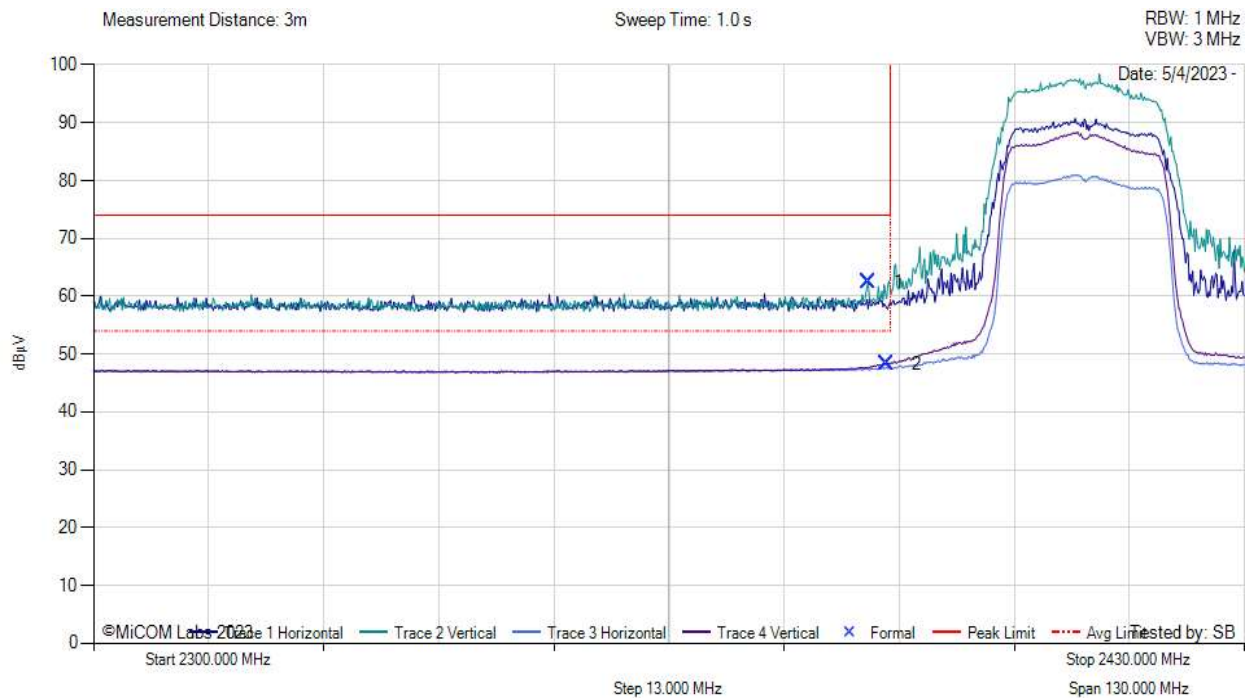

**2300.00 - 2430.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2387.49	38.49	1.97	32.02	62.48	MaxP	Vertical	149	90	74.0	-11.5	Pass
2	2389.57	24.23	1.96	32.04	48.24	AVG	Vertical	149	90	54.0	-5.8	Pass

**Test Notes:** Max power, 5VDC 3A,

[back to matrix](#)




**Equipment Configuration for BE 2483.5 MHz**

<b>Antenna:</b>	GW.48.A151	<b>Variant:</b>	802.11b
<b>Antenna Gain (dBi):</b>	3.42	<b>Modulation:</b>	CCK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2412.0	<b>Data Rate:</b>	1
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 2483.5 MHz

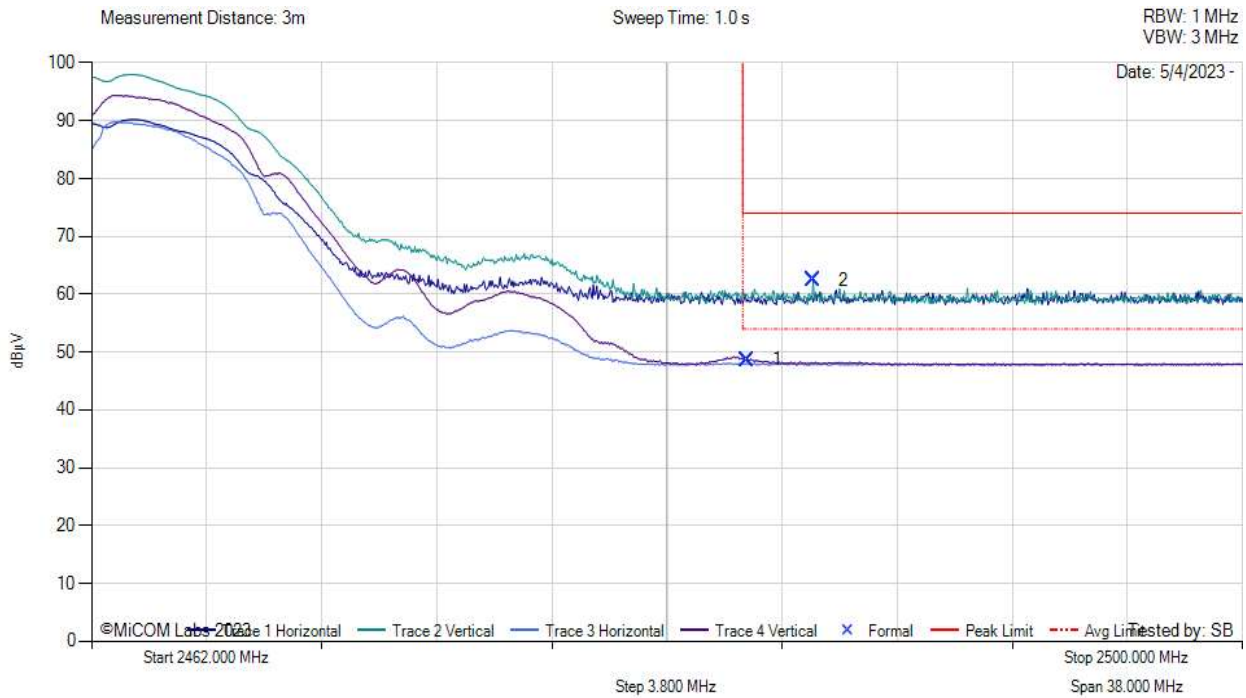

**2462.00 - 2500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2483.62	24.36	1.98	32.37	48.71	AVG	Vertical	149	90	54.0	-5.3	Pass
2	2485.83	38.02	1.98	32.37	62.37	MaxP	Vertical	149	90	74.0	-11.6	Pass

**Test Notes:** Max power, 5VDC 3A,

[back to matrix](#)




**Equipment Configuration for BE 2483.5 MHz**

<b>Antenna:</b>	GW.48.A151	<b>Variant:</b>	802.11g
<b>Antenna Gain (dBi):</b>	3.42	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2412.0	<b>Data Rate:</b>	1
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 2483.5 MHz

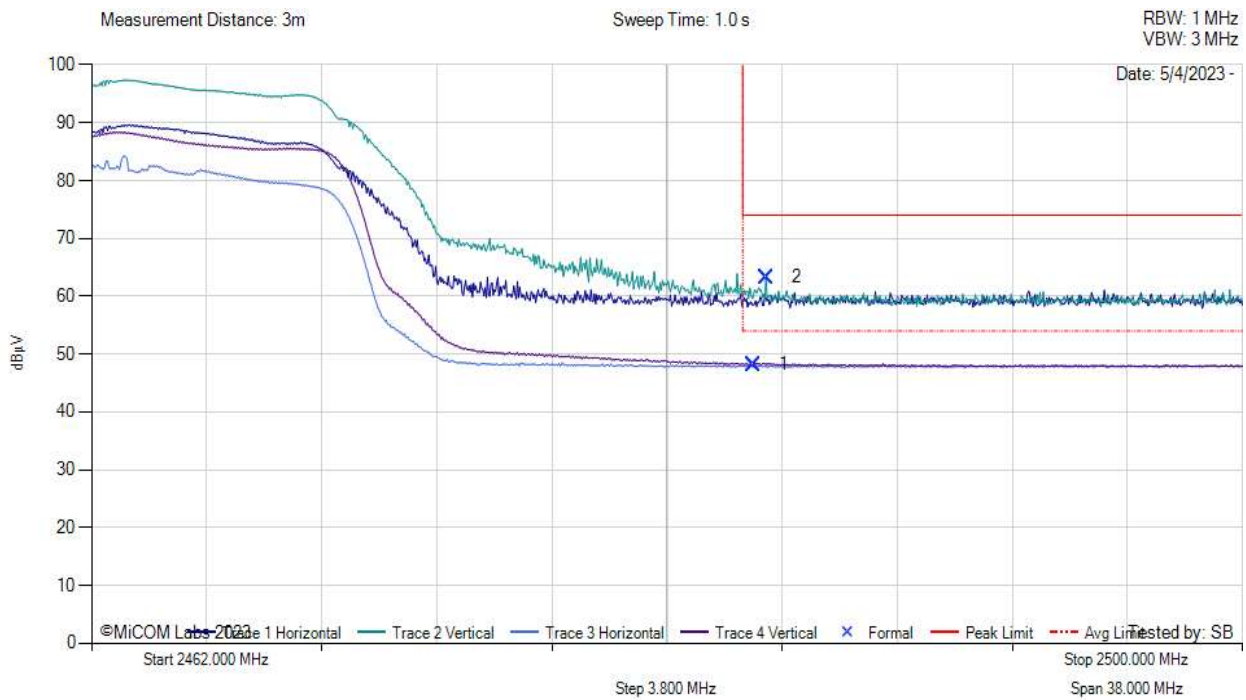

**2462.00 - 2500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2483.85	23.87	1.98	32.37	48.22	AVG	Vertical	99	89	54.0	-5.8	Pass
2	2484.27	38.91	1.98	32.37	63.26	MaxP	Vertical	149	179	74.0	-10.7	Pass

**Test Notes:** Max power, 5VDC 3A,

[back to matrix](#)


**Equipment Configuration for BE 2483.5 MHz**

<b>Antenna:</b>	GW.48.A151	<b>Variant:</b>	802.11n HT20
<b>Antenna Gain (dBi):</b>	3.42	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2412.0	<b>Data Rate:</b>	1
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 2483.5 MHz

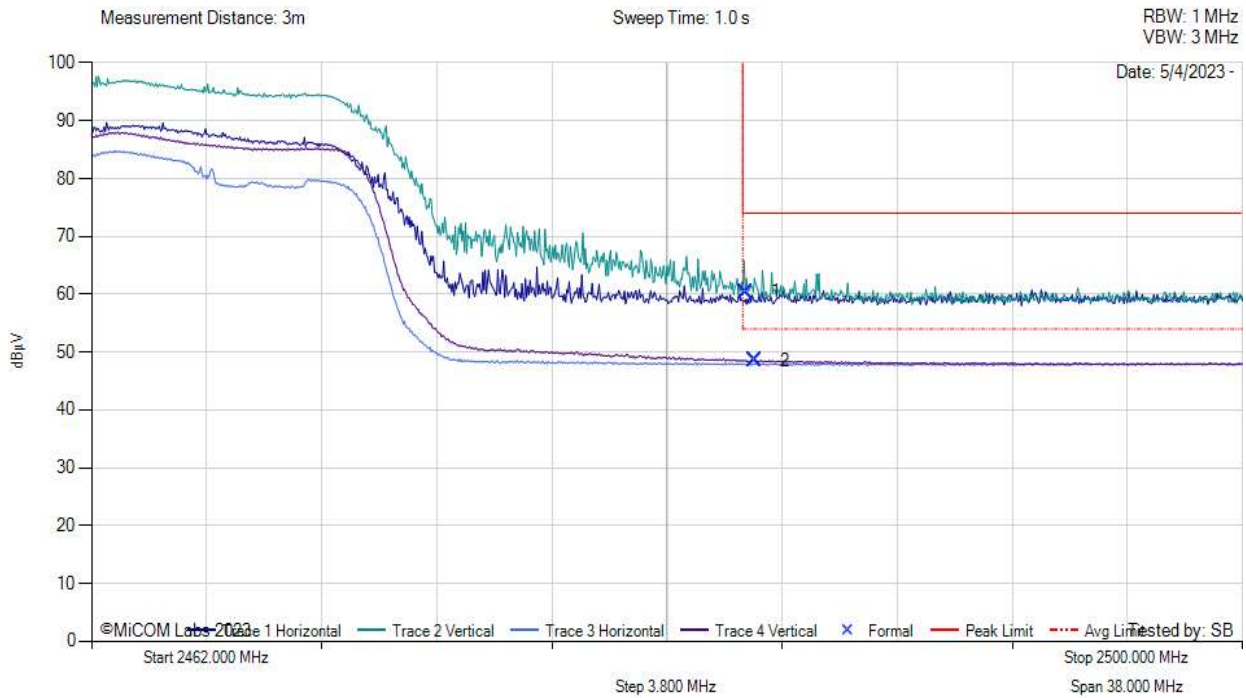

**2462.00 - 2500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2483.58	36.07	1.98	32.37	60.42	MaxP	Vertical	149	179	74.0	-13.6	Pass
2	2483.89	24.21	1.98	32.37	48.56	AVG	Vertical	149	0	54.0	-5.4	Pass

**Test Notes:** Max power, 5VDC 3A,

[back to matrix](#)

#### 9.1.2.4. ANT-DB1-RAF-RPS PCB

##### 9.1.2.4.1. 5150 - 5250 MHz

CCMP15/CCMP13		Band-Edge Freq	Limit 74.0dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
802.11a	<a href="#">5180.00</a>	5150.00	66.18	52.98	14
802.11ac-20	<a href="#">5180.00</a>	5150.00	66.05	52.98	14
802.11ac-40	<a href="#">5190.00</a>	5150.00	66.09	52.94	10
802.11ac-80	<a href="#">5210.00</a>	5150.00	66.07	52.90	11

##### 9.1.2.4.2. 5250 - 5350 MHz

CCMP15/CCMP13		Band-Edge Freq	Limit 74.0dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
802.11a	<a href="#">5320.00</a>	5350.00	62.32	50.25	14
802.11ac-20	<a href="#">5320.00</a>	5350.00	63.17	50.32	14
802.11ac-40	<a href="#">5310.00</a>	5350.00	62.67	49.16	10
802.11ac-80	<a href="#">5290.00</a>	5350.00	62.79	49.29	11


**Equipment Configuration for BE 5150 MHZ**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5180.0	<b>Data Rate:</b>	6
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5150 MHz

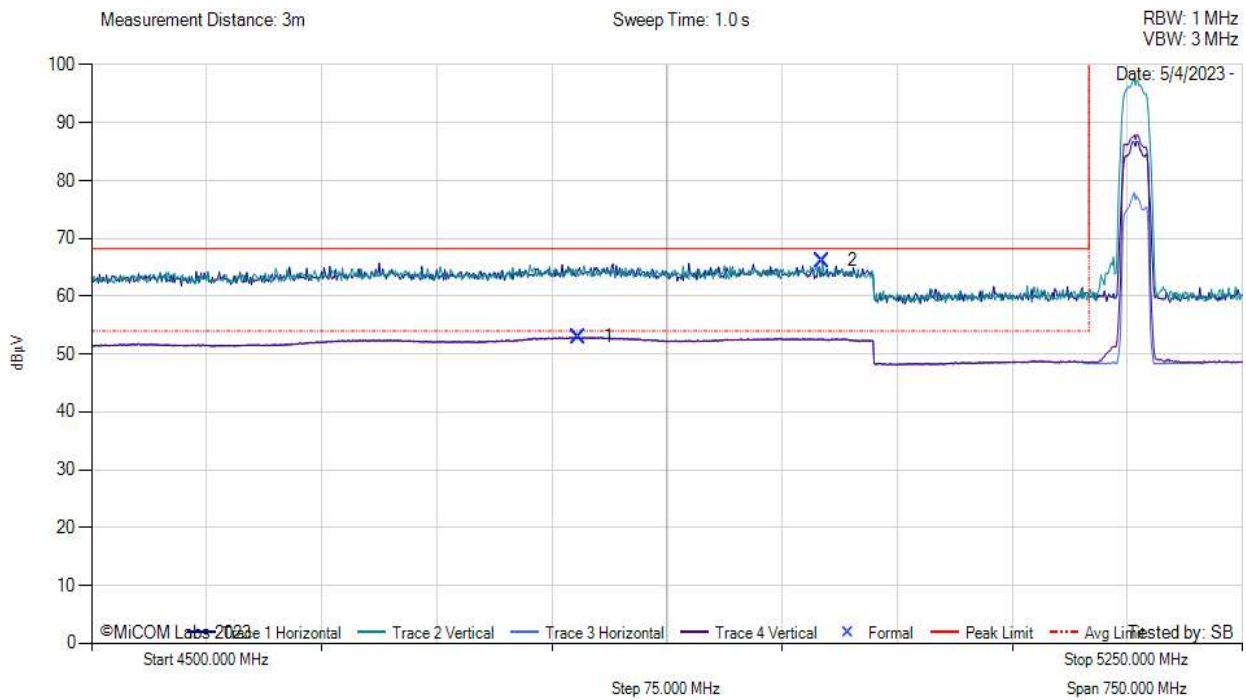

**4500.00 - 5250.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4817.25	25.61	2.88	34.49	52.98	AVG	Vertical	150	179	54.0	-1.0	Pass
2	4976.25	38.99	2.94	34.25	66.18	MaxP	Vertical	150	0	68.2	-2.0	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5150 MHZ**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac20
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5180.0	<b>Data Rate:</b>	6.5
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5150 MHz

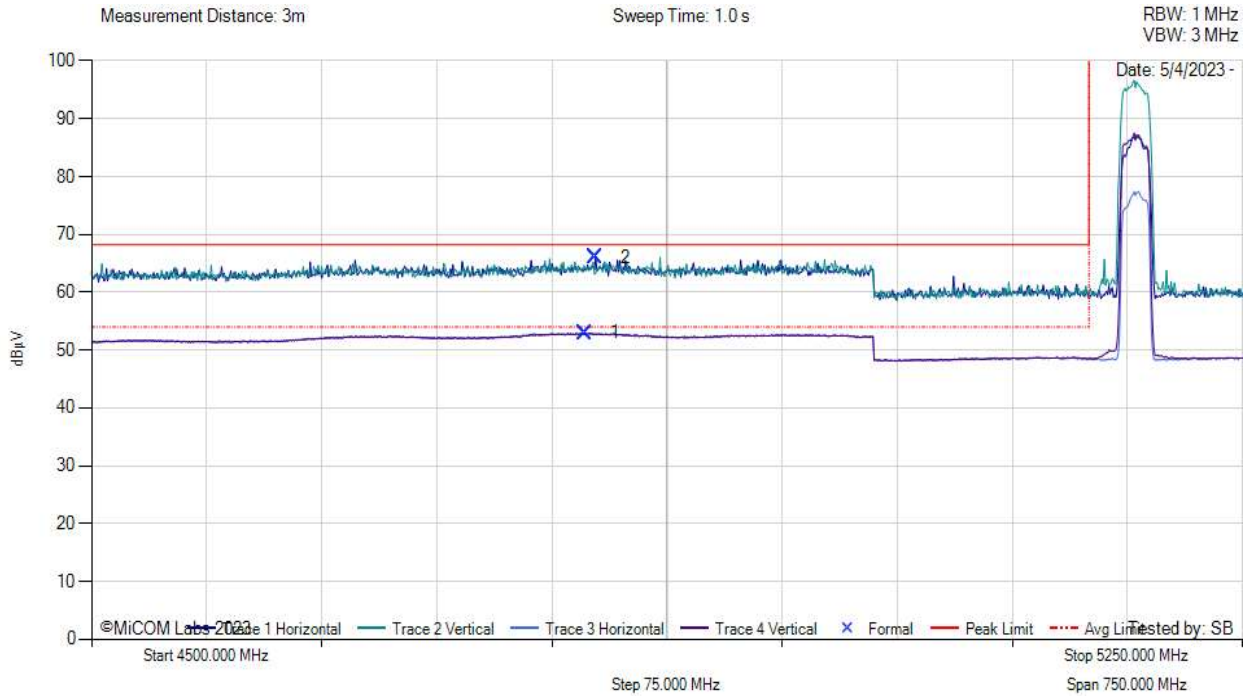

4500.00 - 5250.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4821.75	25.61	2.89	34.49	52.98	AVG	Horizontal	100	270	54.0	-1.0	Pass
2	4828.50	38.64	2.92	34.49	66.05	MaxP	Horizontal	100	180	68.2	-2.1	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5150 MHZ**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac40
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5150.0	<b>Data Rate:</b>	13.5
<b>Power Setting:</b>	10	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5150 MHz

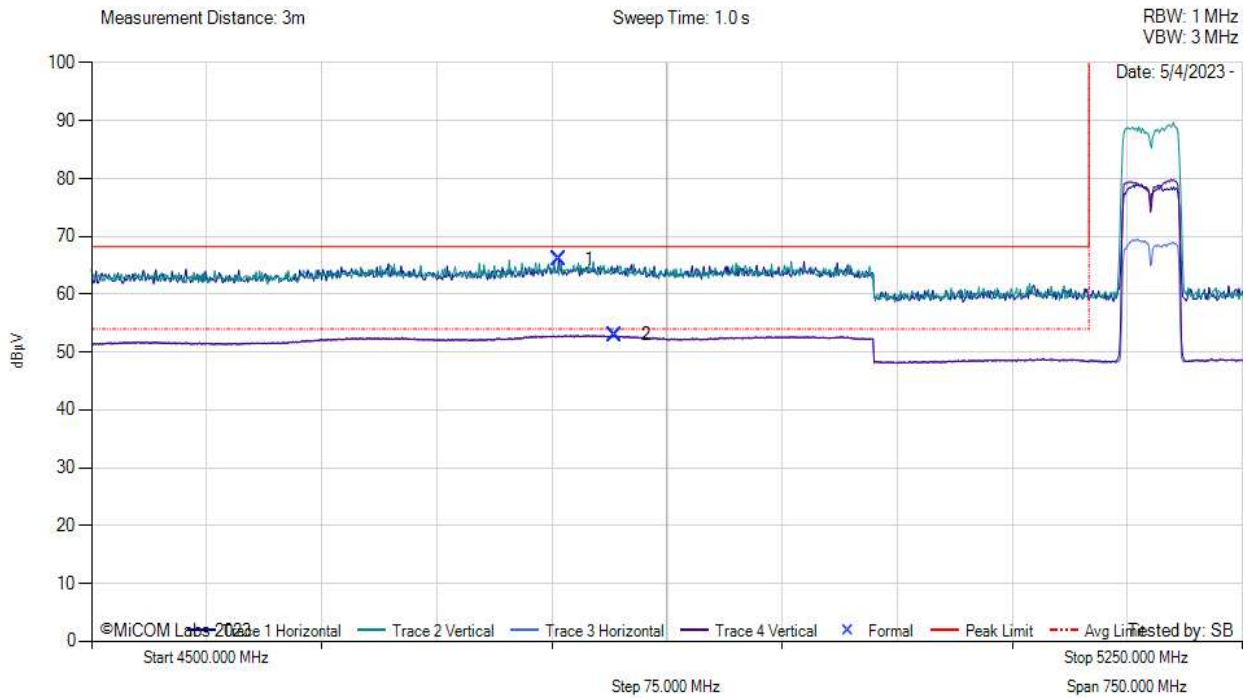

**4500.00 - 5250.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4804.50	38.74	2.85	34.50	66.09	MaxP	Horizontal	149	270	68.2	-2.1	Pass
2	4841.25	25.53	2.93	34.48	52.94	AVG	Vertical	149	270	54.0	-1.1	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5150 MHZ**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac80
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5210.0	<b>Data Rate:</b>	29.5
<b>Power Setting:</b>	11	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5150 MHz

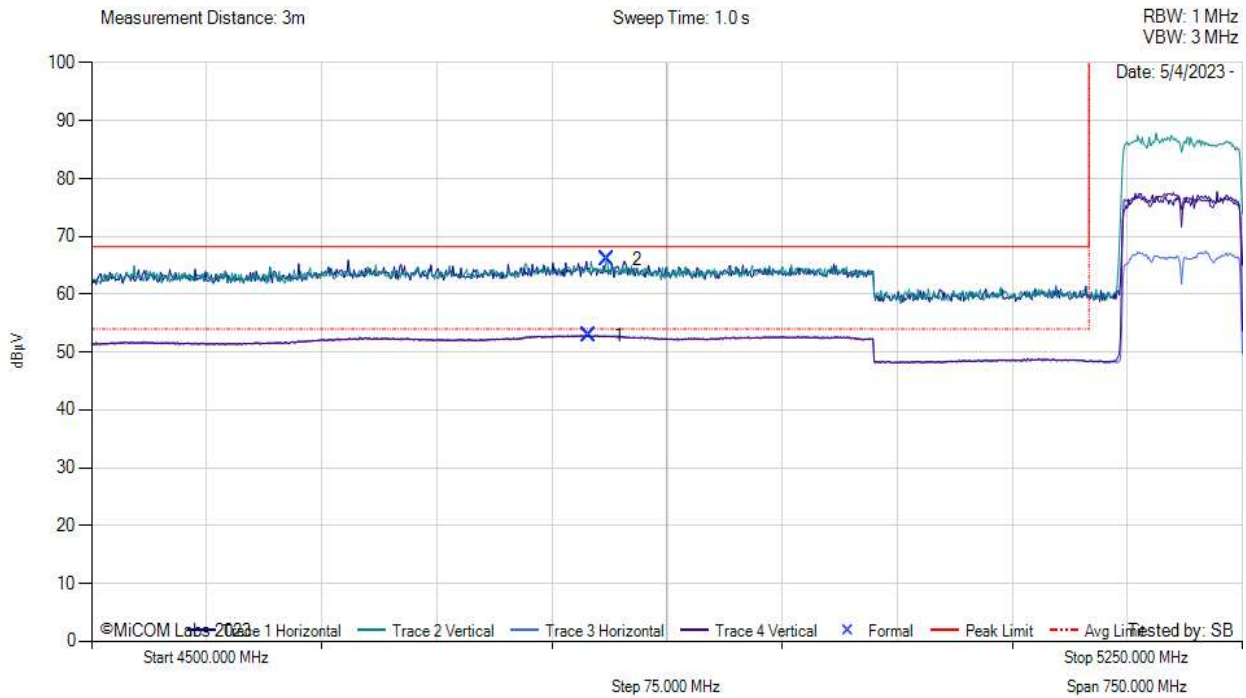

**4500.00 - 5250.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4824.00	25.51	2.90	34.49	52.90	AVG	Vertical	149	179	54.0	-1.1	Pass
2	4836.00	38.67	2.93	34.48	66.07	MaxP	Vertical	149	179	68.2	-2.1	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)




**Equipment Configuration for BE 5350 MHZ**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5320.0	<b>Data Rate:</b>	6
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5350 MHz

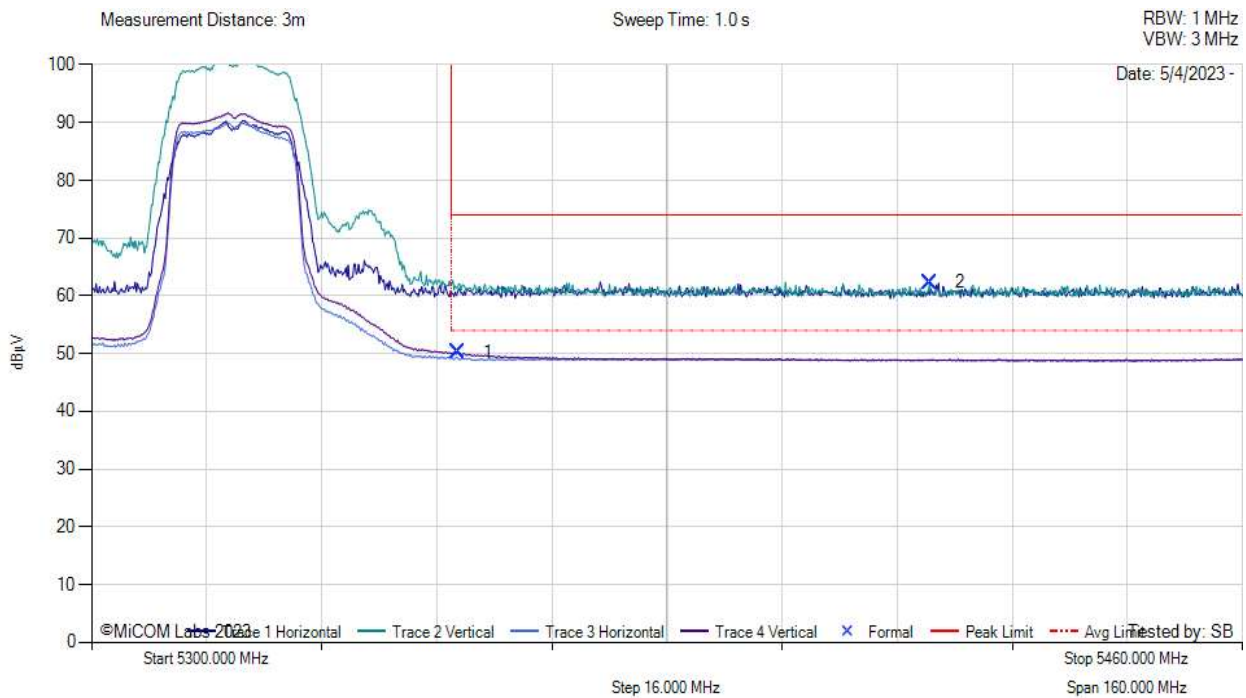

5300.00 - 5460.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5350.88	22.72	3.03	34.51	50.25	AVG	Vertical	100	0	54.0	-3.7	Pass
2	5416.48	34.88	3.08	34.36	62.32	MaxP	Vertical	99	0	74.0	-11.7	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5350 MHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac20
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5320.0	<b>Data Rate:</b>	6.5
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5350 MHz

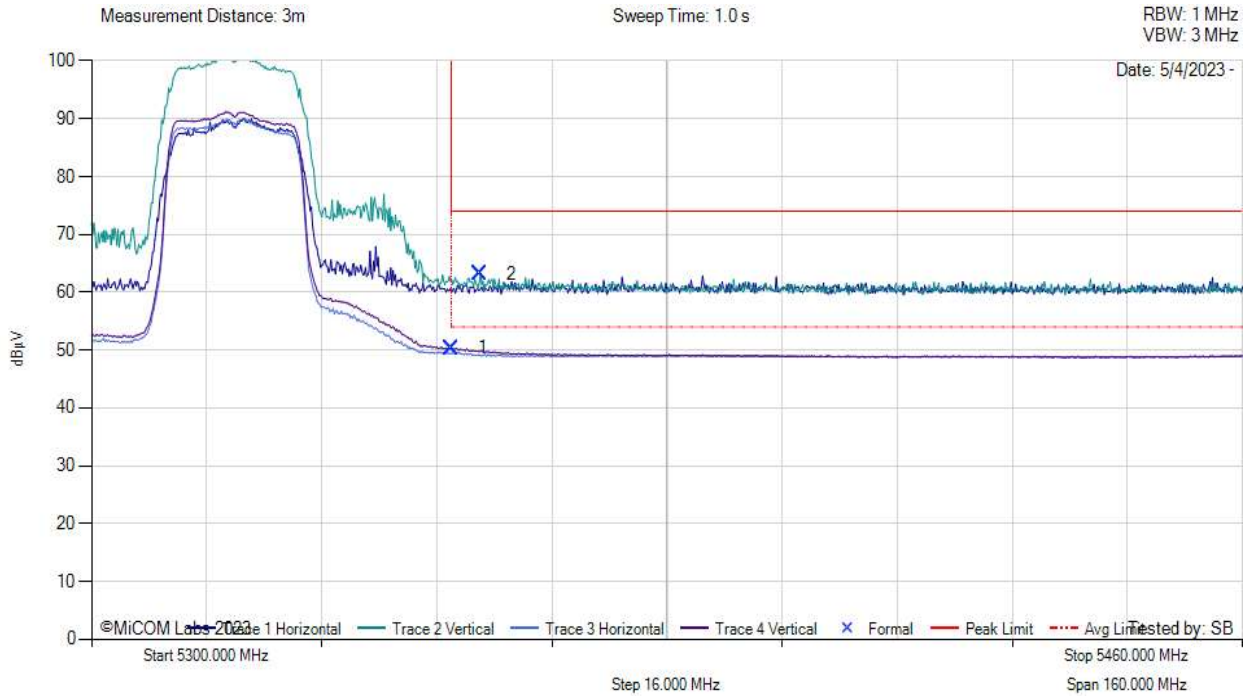

**5300.00 - 5460.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5350.08	22.78	3.03	34.51	50.32	AVG	Vertical	98	0	54.0	-3.7	Pass
2	5354.08	35.64	3.03	34.50	63.17	MaxP	Vertical	98	299	74.0	-10.8	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5350 MHZ**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac40
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5310.0	<b>Data Rate:</b>	13.5
<b>Power Setting:</b>	10	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5350 MHz

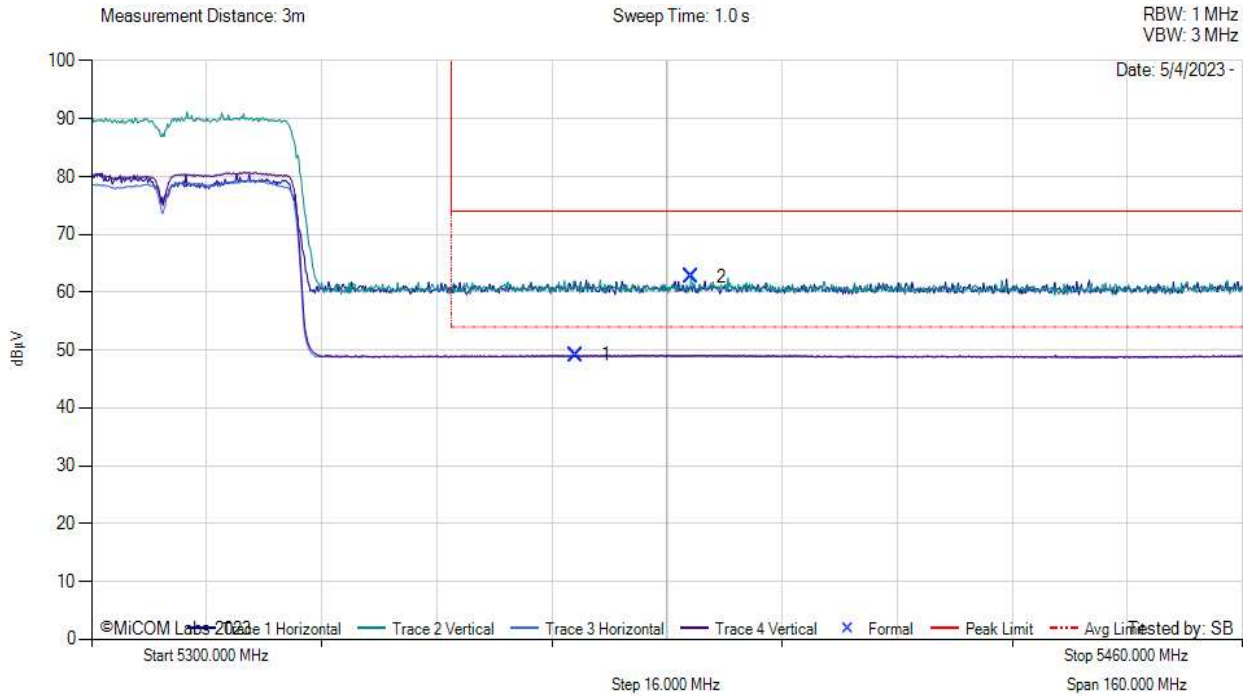

5300.00 - 5460.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5367.36	21.60	3.09	34.47	49.16	AVG	Vertical	99	179	54.0	-4.8	Pass
2	5383.36	35.09	3.15	34.43	62.67	MaxP	Vertical	149	59	74.0	-11.3	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5350 MHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac80
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5290.0	<b>Data Rate:</b>	29.5
<b>Power Setting:</b>	11	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5350 MHz

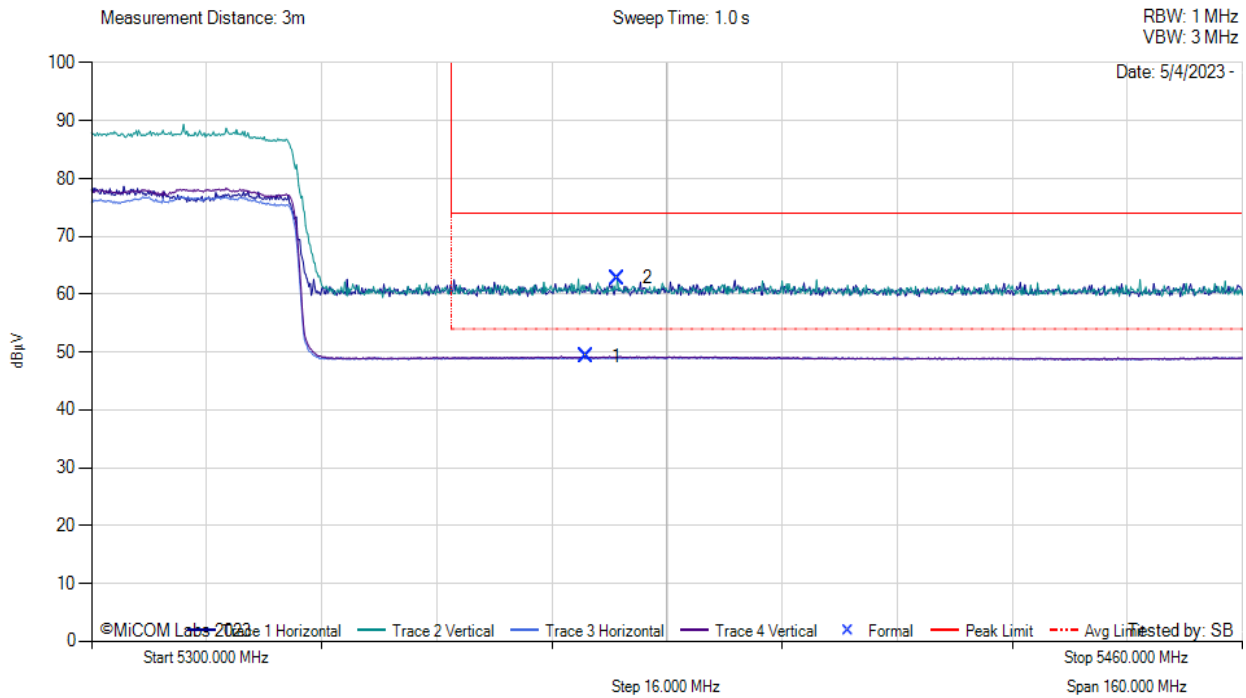

**5300.00 - 5460.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5368.80	21.73	3.10	34.46	49.29	AVG	Vertical	100	0	54.0	-4.7	Pass
2	5373.12	35.23	3.12	34.45	62.79	MaxP	Vertical	149	119	74.0	-11.2	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)

9.1.2.4.3. 5470 - 5725 MHz

CCMP15/CCMP13		Restricted-Edge Freq	Limit 68.2dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
802.11a	<a href="#">5500.00</a>	5460.00	63.46	49.26	13
802.11ac-20	<a href="#">5500.00</a>	5460.00	62.21	49.17	12
802.11ac-40	<a href="#">5510.00</a>	5460.00	63.95	50.65	10
802.11ac-80	<a href="#">5530.00</a>	5460.00	61.83	49.26	11


**Equipment Configuration for BE 5470 MHZ**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5500.0	<b>Data Rate:</b>	6
<b>Power Setting:</b>	13	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5470 MHz

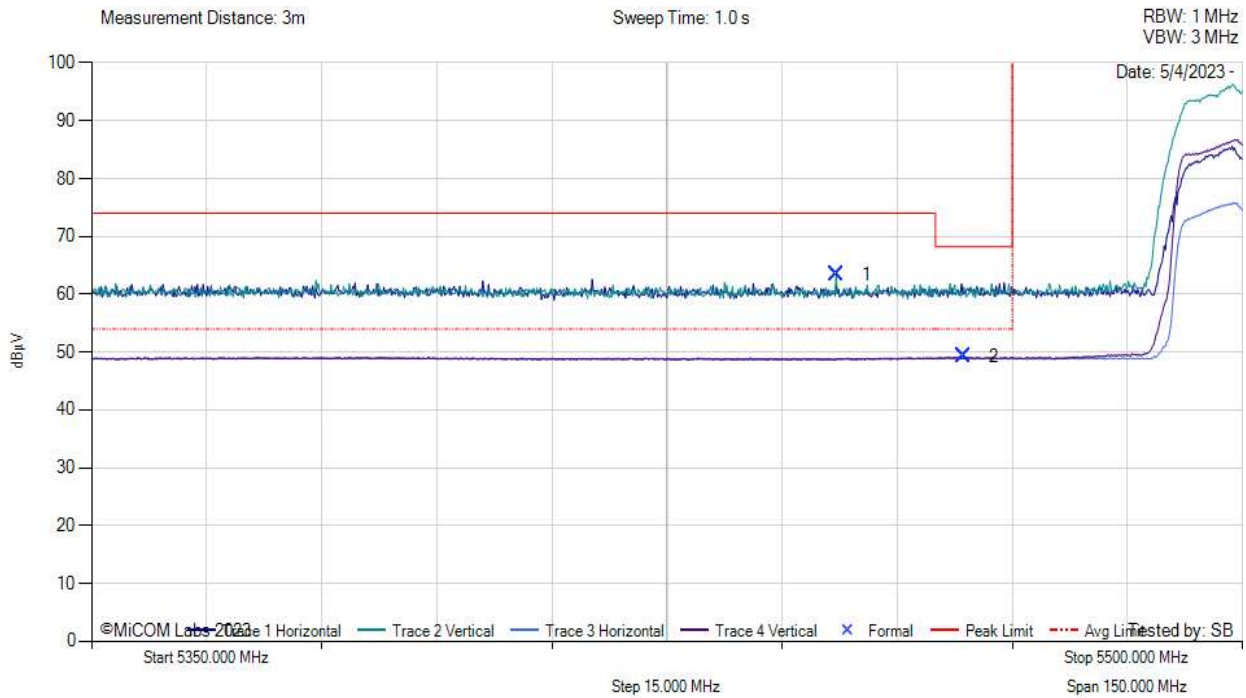

**5350.00 - 5500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5447.05	36.09	3.06	34.30	63.46	MaxP	Vertical	199	179	74.0	-10.5	Pass
2	5463.70	21.79	3.16	34.31	49.26	AVG	Vertical	199	0	54.0	-4.7	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5470 MHZ**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac20
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5500.0	<b>Data Rate:</b>	6.5
<b>Power Setting:</b>	12	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5470 MHz

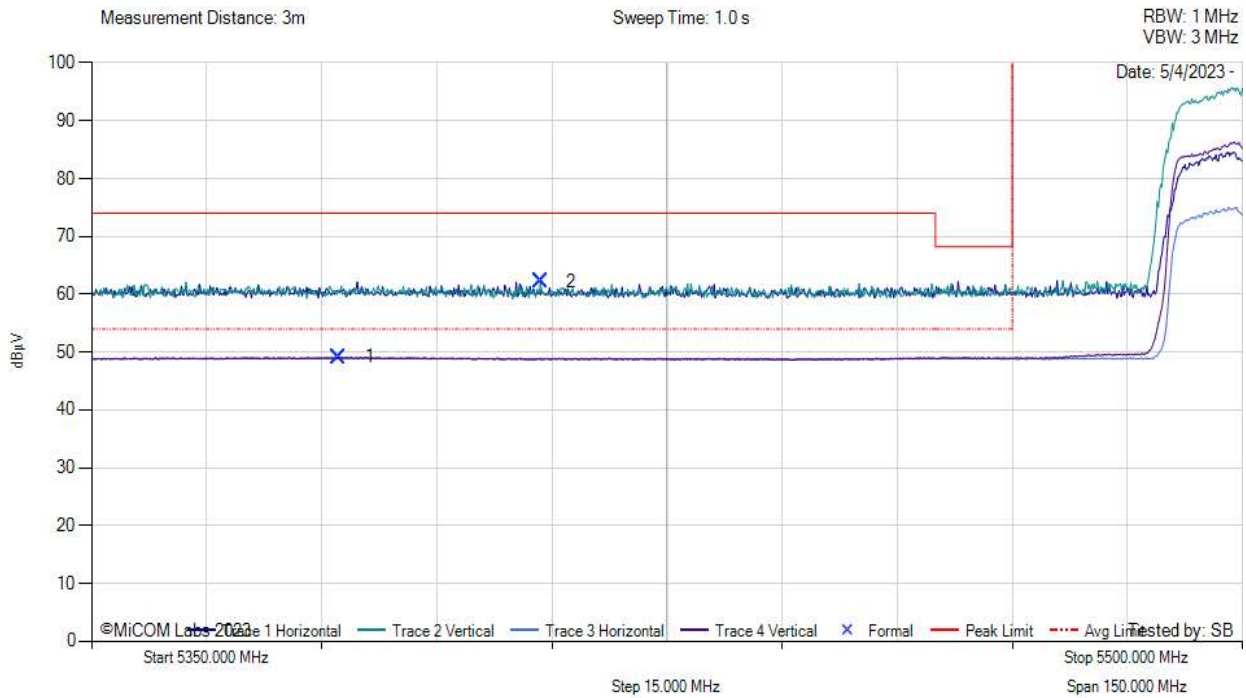

**5350.00 - 5500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5382.25	21.60	3.15	34.43	49.17	AVG	Horizontal	199	120	54.0	-4.8	Pass
2	5408.50	34.79	3.05	34.37	62.21	MaxP	Vertical	150	0	74.0	-11.8	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)




**Equipment Configuration for BE 5470 MHZ**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac40
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5510.0	<b>Data Rate:</b>	13.5
<b>Power Setting:</b>	10	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5470 MHz

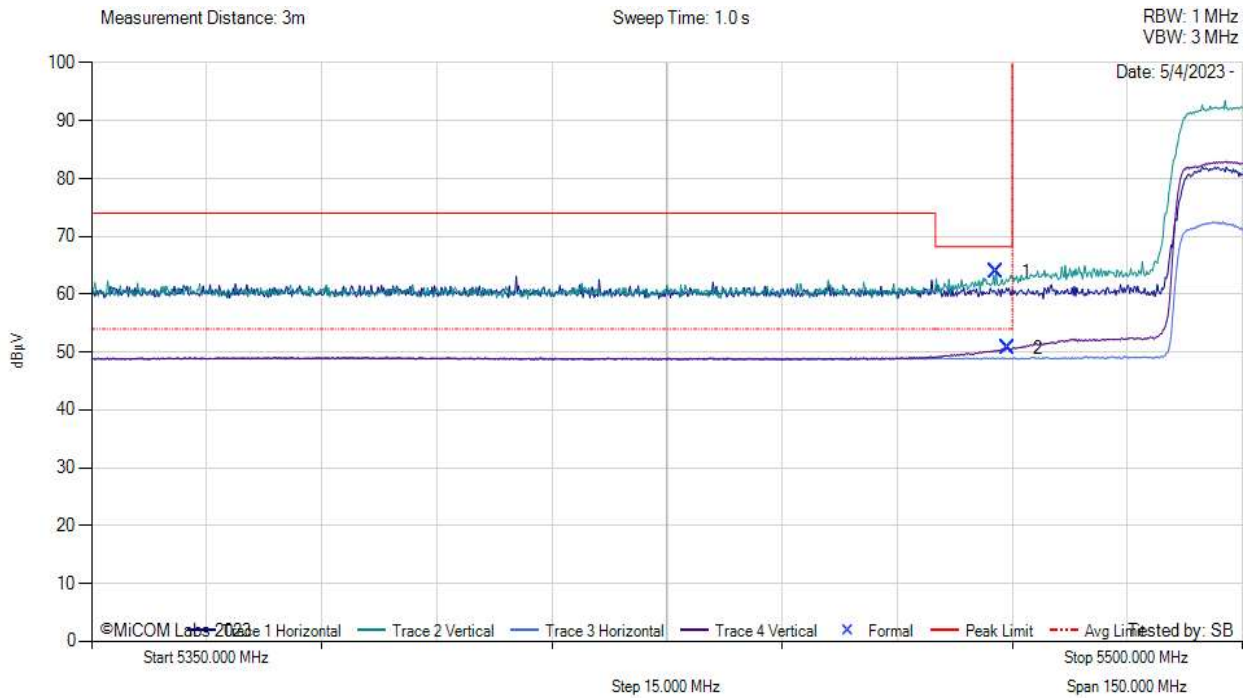

**5350.00 - 5500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5467.90	36.51	3.12	34.32	63.95	MaxP	Vertical	150	0	68.2	-4.3	Pass
2	5469.40	23.22	3.11	34.32	50.65	AVG	Vertical	199	0	54.0	-3.4	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5470 MHZ**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac80
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5530.0	<b>Data Rate:</b>	29.5
<b>Power Setting:</b>	11	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5470 MHz

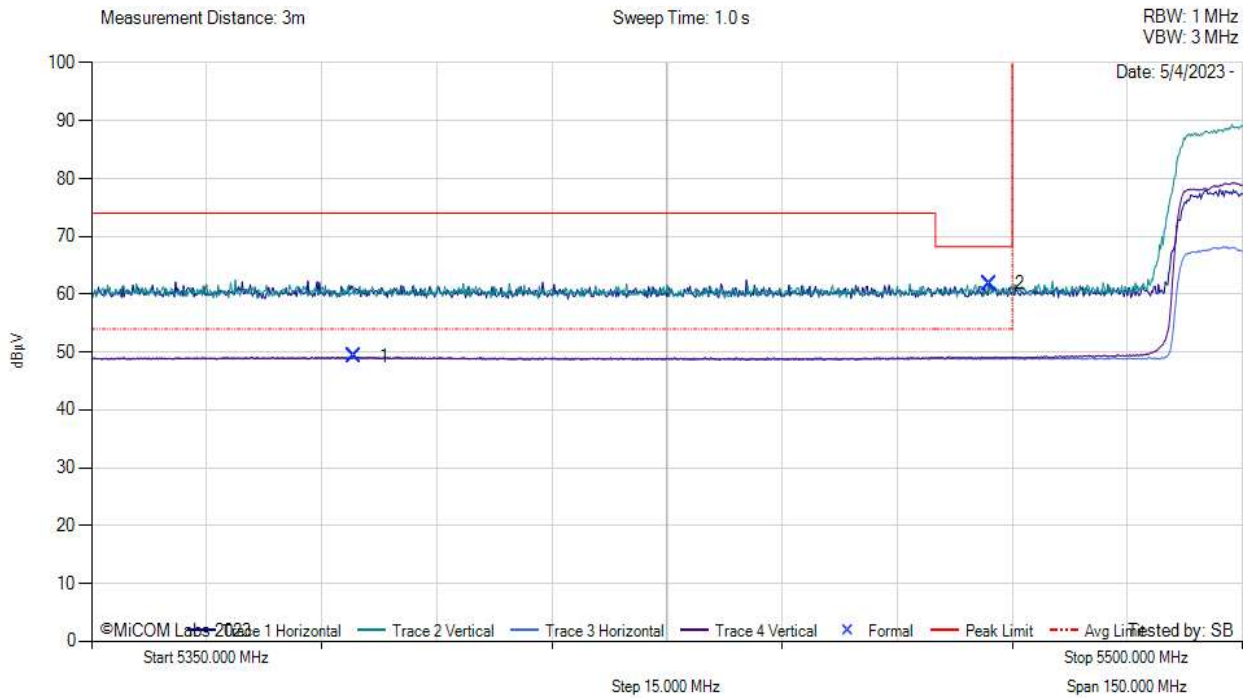

**5350.00 - 5500.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5384.20	21.67	3.16	34.43	49.26	AVG	Vertical	199	59	54.0	-4.7	Pass
2	5467.00	34.39	3.13	34.31	61.83	MaxP	Horizontal	199	240	68.2	-6.4	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)

9.1.2.4.4. 5725 – 5850 MHz

**Low Band-Edge**

CCMP15/CCMP13		Band-Edge Freq	Limit 68.2dBµV/m	Limit 122.2dBµV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBµV/m	dBµV/m	
802.11a	<a href="#">5745.00</a>	5725.00	64.42	64.09	13
802.11ac-20	<a href="#">5745.00</a>	5725.00	64.83	64.64	12
802.11ac-40	<a href="#">5755.00</a>	5725.00	63.59	64.21	14
802.11ac-80	<a href="#">5775.00</a>	5725.00	64.91	63.56	11

**High Band-Edge**

CCMP15/CCMP13		Band-Edge Freq	Limit 68.2dBµV/m	Limit 68.2dBµV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBµV/m	dBµV/m	
802.11a	<a href="#">5825.00</a>	5850.00	67.38	67.72	17
802.11ac-20	<a href="#">5825.00</a>	5850.00	67.07	66.85	16
802.11ac-40	<a href="#">5795.00</a>	5850.00	67.05	66.50	14
802.11ac-80	<a href="#">5775.00</a>	5850.00	67.42	66.50	11

Click on the links to view the data.


**Equipment Configuration for BE 5725 MHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5745.0	<b>Data Rate:</b>	6
<b>Power Setting:</b>	13	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5725 MHz

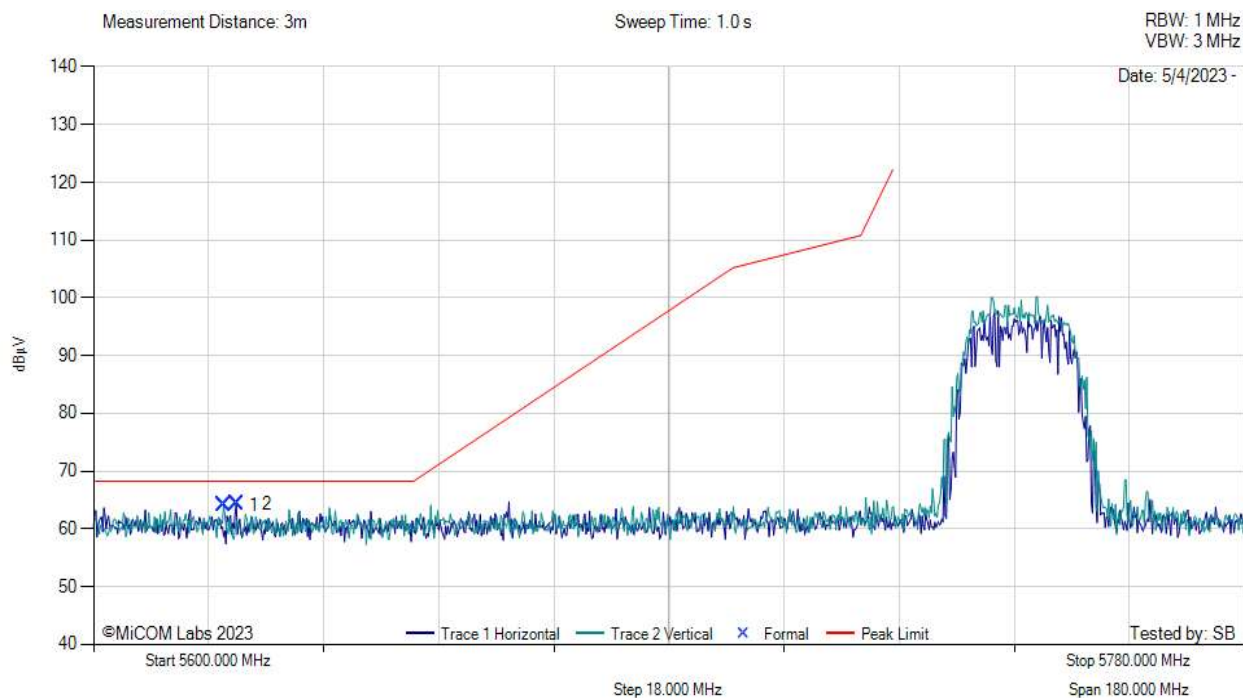

5600.00 - 5780.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5620.34	36.70	3.18	34.21	64.09	MaxP	Vertical	149	119	68.2	-4.1	Pass
2	5622.32	37.03	3.17	34.21	64.42	MaxP	Horizontal	199	60	68.2	-3.8	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5725 MHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac20
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5745.0	<b>Data Rate:</b>	6.5
<b>Power Setting:</b>	12	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5725 MHz

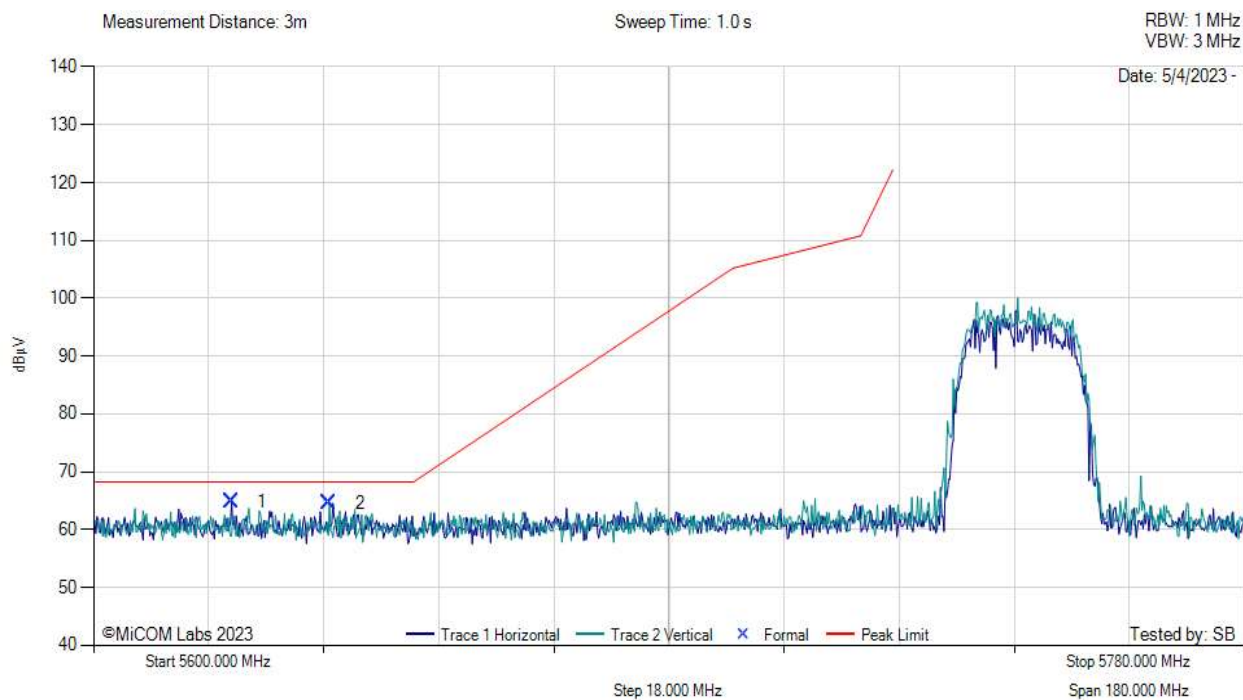

**5600.00 - 5780.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5621.60	37.29	3.18	34.19	64.83	MaxP	Horizontal	199	25	68.2	-3.4	--
2	5636.90	37.27	3.18	34.19	64.64	MaxP	Vertical	199	179	68.2	-3.6	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5725 MHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac40
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5755.0	<b>Data Rate:</b>	13.5
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5725 MHz

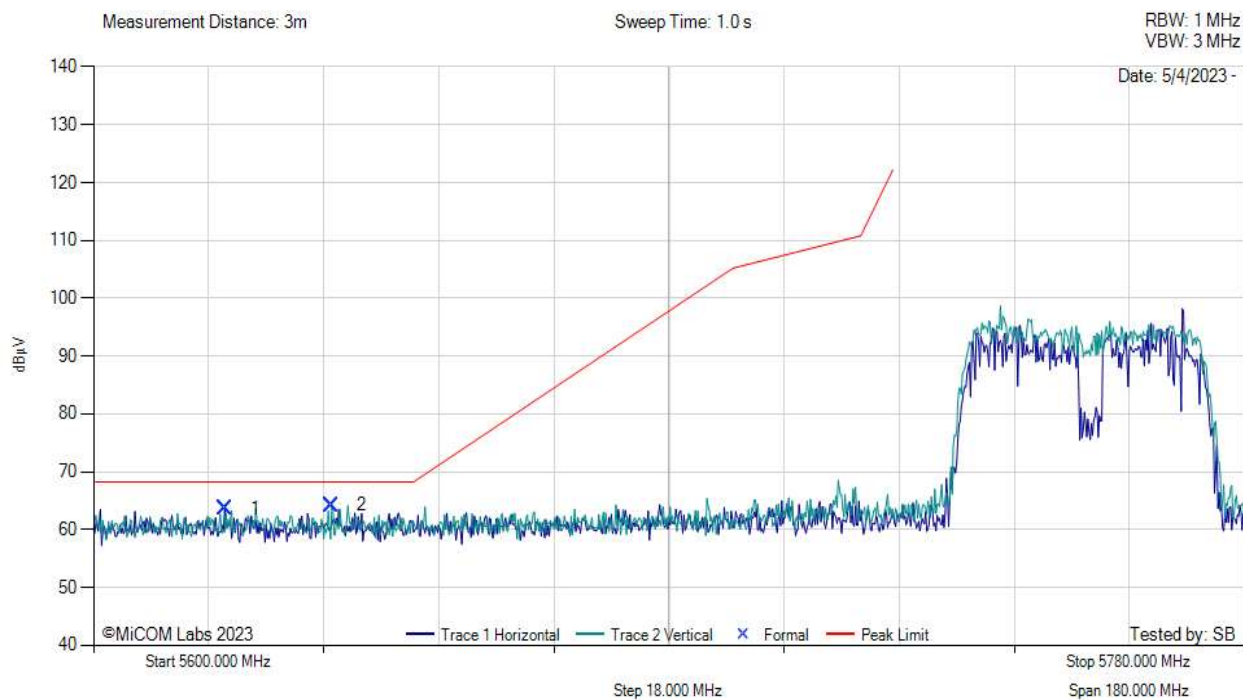

**5600.00 - 5780.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5620.52	36.05	3.18	34.19	63.59	MaxP	Horizontal	199	0	68.2	-4.6	--
2	5637.26	36.83	3.18	34.19	64.21	MaxP	Vertical	199	179	68.2	-4.0	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5725 MHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac80
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5775.0	<b>Data Rate:</b>	29.5
<b>Power Setting:</b>	11	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5725 MHz

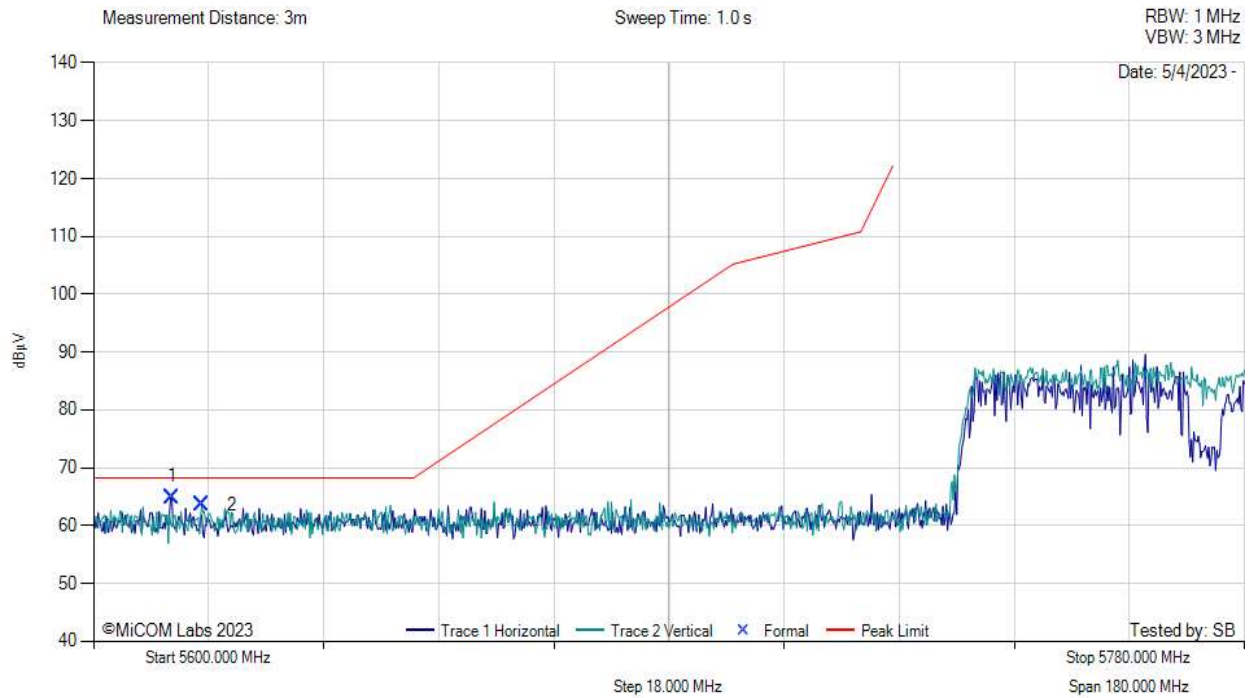

**5600.00 - 5780.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5612.24	37.34	3.18	34.22	64.91	MaxP	Horizontal	199	19	68.2	-3.3	--
2	5616.92	36.16	3.18	34.22	63.56	MaxP	Vertical	199	0	68.2	-4.7	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)




**Equipment Configuration for BE 5850 MHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5825.0	<b>Data Rate:</b>	6
<b>Power Setting:</b>	17	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5850 MHz

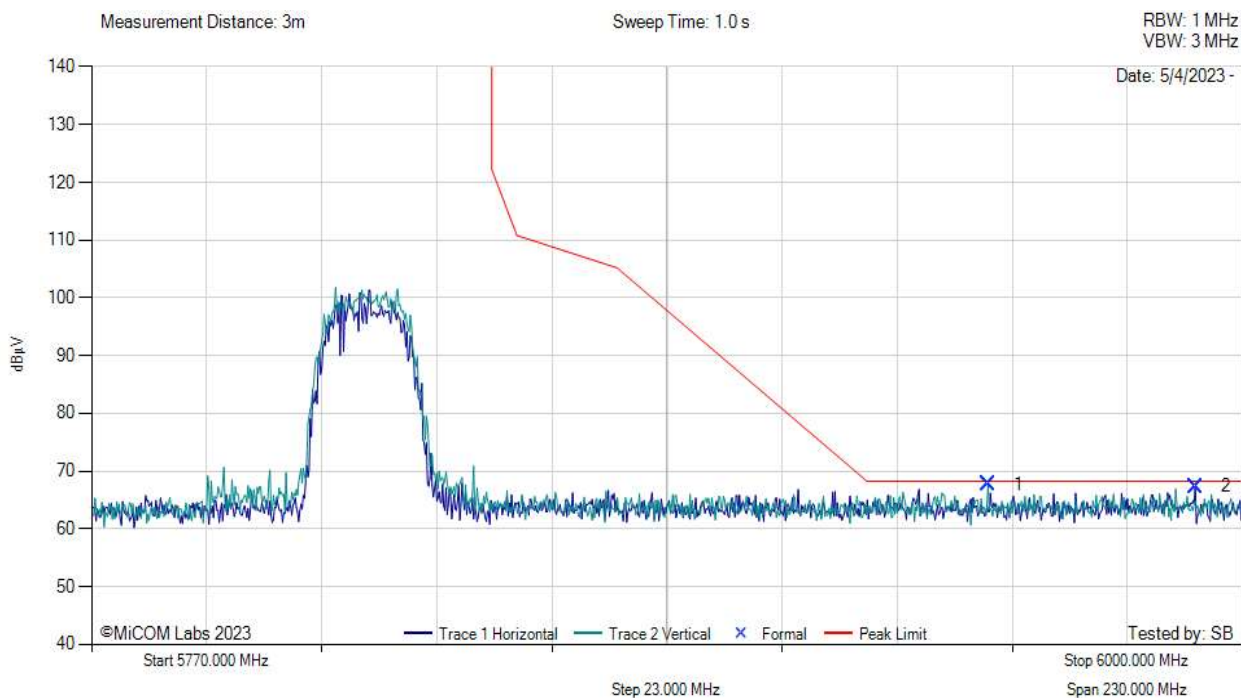

5770.00 - 6000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5949.17	39.58	3.26	34.88	67.72	MaxP	Vertical	148	119	68.2	-0.5	Pass
2	5990.57	39.23	3.22	34.93	67.38	MaxP	Horizontal	199	300	68.2	-0.8	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5850 MHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac20
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5825.0	<b>Data Rate:</b>	6.5
<b>Power Setting:</b>	16	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5850 MHz

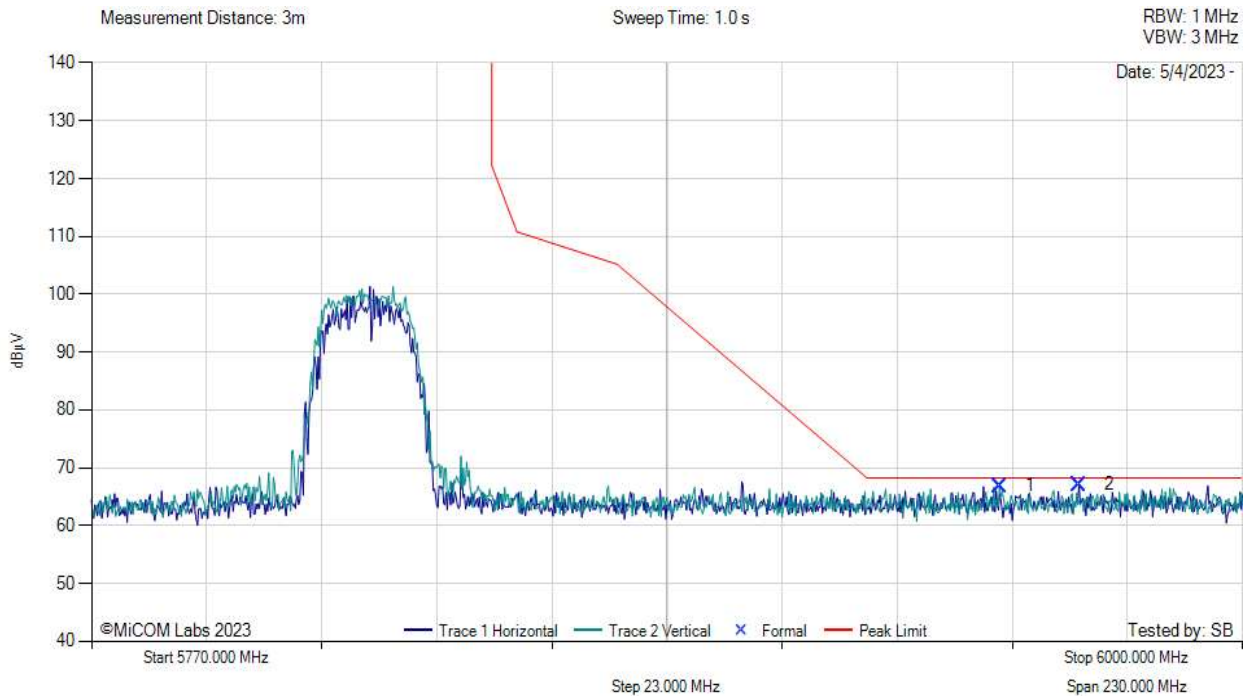

**5770.00 - 6000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5951.47	38.70	3.27	34.88	66.85	MaxP	Vertical	199	119	68.2	-1.4	Pass
2	5967.34	38.94	3.23	34.90	67.07	MaxP	Horizontal	199	0	68.2	-1.2	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5850 MHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac40
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5795.0	<b>Data Rate:</b>	13.5
<b>Power Setting:</b>	14	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5850 MHz

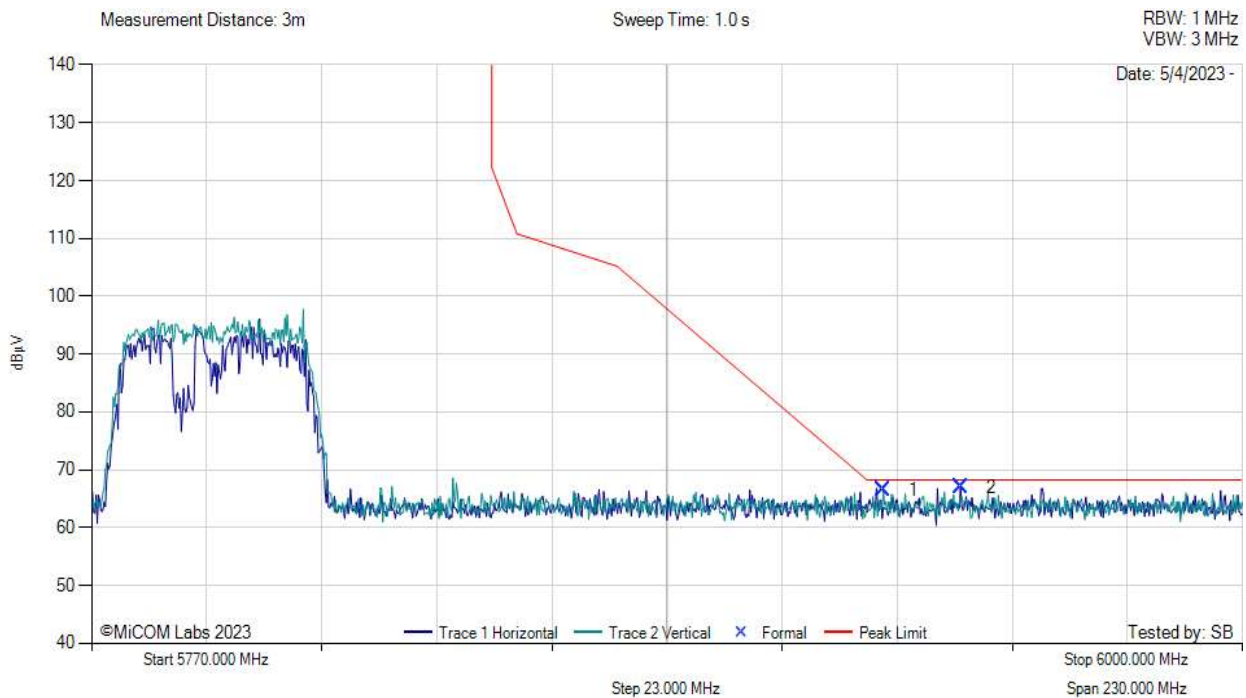

**5770.00 - 6000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5928.24	38.35	3.31	34.83	66.50	MaxP	Vertical	149	59	68.2	-1.7	Pass
2	5943.65	38.96	3.22	34.87	67.05	MaxP	Horizontal	149	240	68.2	-1.2	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)


**Equipment Configuration for BE 5850 MHz**

<b>Antenna:</b>	ANT-DB1-RAF-RPS	<b>Variant:</b>	802.11ac80
<b>Antenna Gain (dBi):</b>	4.6	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	5775.0	<b>Data Rate:</b>	29.5
<b>Power Setting:</b>	11	<b>Tested By:</b>	SB

**Test Measurement Results**



BE 5850 MHz

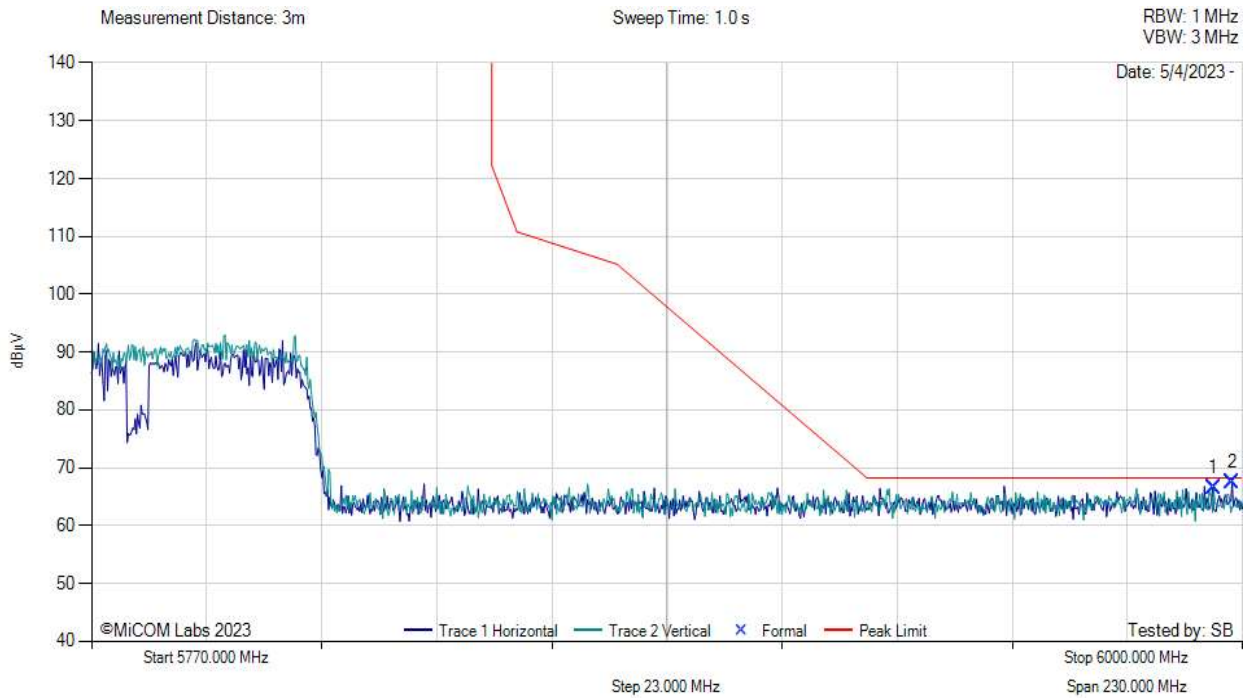

**5770.00 - 6000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5994.25	38.37	3.21	34.93	66.50	MaxP	Vertical	149	119	68.2	-1.7	Pass
2	5997.93	39.28	3.21	34.94	67.42	MaxP	Horizontal	149	240	68.2	-0.8	Pass

**Test Notes:** Max power, 5VDC 3A, WiFi

[back to matrix](#)



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)