


# ENGINEERING TEST REPORT



**XBee S6B SMT  
Model: S6BSM  
FCC ID: MCQ-S6BSM**

*Applicant:*

**Digi International Inc.**  
11001 Bren Road East  
Minnetonka, MN 55343

*In Accordance With*

**Federal Communications Commission (FCC)  
Part 15, Subpart C, Section 15.247  
Digital Modulation Systems (DTS) Operating in 2400 – 2483.5 MHz Band**

**UltraTech's File No.: DIGI-070F15C247**

This Test report is Issued under the Authority of  
Tri M. Luu  
Vice President of Engineering  
UltraTech Group of Labs

Date: December 17, 2012

Report Prepared by: Dan Huynh

Tested by: Mr. Hung Trinh

Issued Date: December 17, 2012

Test Dates: November 21 - 27, 2012

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com), Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)

FCC

91038



1309



46390-2049



NVLap Lab Code 200093-0



SL2-IN-E-1119R



Korea KCC-RRL  
CA2049

**TABLE OF CONTENTS**

**EXHIBIT 1. INTRODUCTION..... 1**

1.1. SCOPE ..... 1

1.2. RELATED SUBMITTAL(S)/GRANT(S) ..... 1

1.3. NORMATIVE REFERENCES ..... 1

**EXHIBIT 2. PERFORMANCE ASSESSMENT..... 2**

2.1. CLIENT INFORMATION ..... 2

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION ..... 2

2.3. EUT’S TECHNICAL SPECIFICATIONS..... 3

2.4. ASSOCIATED ANTENNA DESCRIPTIONS ..... 3

2.5. LIST OF EUT’S PORTS..... 3

2.6. ANCILLARY EQUIPMENT ..... 4

**EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS..... 5**

3.1. CLIMATE TEST CONDITIONS ..... 5

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS..... 5

**EXHIBIT 4. SUMMARY OF TEST RESULTS ..... 6**

4.1. LOCATION OF TESTS ..... 6

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS ..... 6

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES ..... 6

**EXHIBIT 5. TEST DATA ..... 7**

5.1. POWER LINE CONDUCTED EMISSIONS [§15.207(a)]..... 7

5.2. OCCUPIED BANDWIDTH [§ 15.247(a)(2)]..... 10

5.3. PEAK CONDUCTED OUTPUT POWER - DTS [§ 15.247(b)(3)] ..... 58

5.4. TRANSMITTER BAND-EDGE & SPURIOUS CONDUCTED EMISSIONS [§ 15.247(d)] ..... 61

5.5. TRANSMITTER SPURIOUS RADIATED EMISSIONS AT 3 METERS [§§ 15.247(d), 15.209 & 15.205] ..... 114

5.6. POWER SPECTRAL DENSITY [§ 15.247(e)]..... 120

5.7. RF EXPOSURE REQUIRMENTS [§§ 15.247(e)(i), 1.1310 & 2.1091] ..... 145

**EXHIBIT 6. TEST EQUIPMENT LIST ..... 147**

**EXHIBIT 7. MEASUREMENT UNCERTAINTY ..... 148**

7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY ..... 148

7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY ..... 148

**EXHIBIT 1. INTRODUCTION**

**1.1. SCOPE**

<b>Reference:</b>	FCC Part 15, Subpart C, Section 15.247
<b>Title:</b>	Code of Federal Regulations (CFR), Title 47 – Telecommunication, Part 15 – Radio Frequency Devices
<b>Purpose of Test:</b>	Equipment Certification for Digital Modulation Systems (DTS) Transmitter Operating in the Frequency Band 2400-2483.5 MHz.
<b>Test Procedures:</b>	<ul style="list-style-type: none"> <li>▪ ANSI C63.4</li> <li>▪ ANSI C63.10</li> <li>▪ FCC, KDB Publication No. 558074 D01</li> </ul>
<b>Environmental Classification:</b>	<input checked="" type="checkbox"/> Commercial, industrial or business environment <input checked="" type="checkbox"/> Residential environment

**1.2. RELATED SUBMITTAL(S)/GRANT(S)**

None.

**1.3. NORMATIVE REFERENCES**

Publication	Year	Title
47 CFR Parts 0-19	2011	Code of Federal Regulations (CFR), Title 47 – Telecommunication
ANSI C63.4	2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices
CISPR 22 & EN 55022	2008-09, Edition 6.0 2006	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances
FCC, KDB Publication No. 558074 D01 DTS Meas Guidance v02	2012	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

APPLICANT	
<b>Name:</b>	Digi International Inc.
<b>Address:</b>	11001 Bren Road East Minnetonka, MN 55343 USA
<b>Contact Person:</b>	Mr. Paul Dahl Phone #: 801-765-9885 Fax #: 801-765-9895 Email Address: <a href="mailto:paul.dahl@digi.com">paul.dahl@digi.com</a>

MANUFACTURER	
<b>Name:</b>	Digi International Inc.
<b>Address:</b>	11001 Bren Road East Minnetonka, MN 55343 USA
<b>Contact Person:</b>	Mr. Paul Dahl Phone #: 801-765-9885 Fax #: 801-765-9895 Email Address: <a href="mailto:paul.dahl@digi.com">paul.dahl@digi.com</a>

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

<b>Brand Name:</b>	Digi International Inc.
<b>Product Name:</b>	XBee S6B SMT
<b>Model Name or Number:</b>	S6BSM
<b>Serial Number:</b>	Test Sample
<b>Type of Equipment:</b>	Digital Transmission System (DTS)
<b>Input Power Supply Type:</b>	External DC Power Supply
<b>Primary User Functions of EUT:</b>	802.11bgn wireless connectivity of embedded devices.

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: DIGI-070F15C247  
December 17, 2012

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

**2.3. EUT’S TECHNICAL SPECIFICATIONS**

<b>Transmitter</b>	
<b>Equipment Type:</b>	<ul style="list-style-type: none"> <li>• Mobile</li> <li>• Base Station (fixed use)</li> </ul>
<b>Intended Operating Environment:</b>	<ul style="list-style-type: none"> <li>▪ Commercial, industrial or business environment</li> <li>▪ Residential environment</li> </ul>
<b>Power Supply Requirement:</b>	3.1 - 3.6 VDC
<b>RF Output Power Rating:</b>	802.11b: 2.08 - 26.13 dBm (1.61 - 410.20 mW) Peak 802.11g: 7.15 - 27.72 dBm (5.19 - 591.56 mW) Peak 802.11n 800ns: 7.02 - 27.89 dBm (5.04 - 615.18 mW) Peak 802.11n 400ns: 7.33 - 28.20 dBm (5.41 - 660.69 mW) Peak
<b>Operating Frequency Range:</b>	2412 – 2462 MHz
<b>RF Output Impedance:</b>	50 Ω
<b>Channel Spacing:</b>	5 MHz
<b>Duty Cycle:</b>	100%
<b>Modulation Type:</b>	OFDM, DSSS
<b>Oscillator Frequency(ies):</b>	26 MHz and 48 MHz
<b>Antenna Connector Types:</b>	Integral, RF Pad or U.FL

**2.4. ASSOCIATED ANTENNA DESCRIPTIONS**

<b>Antenna Type</b>	<b>Maximum Gain (dBi)</b>
Omni-directional antenna	15
Yagi antenna	15.0
Panel antenna	19.0
Dipole antenna	2.1
Integral antenna	1.5

The highest gain antenna from each of the above antenna types were selected for testing to represents the worst-case. Refer to user manual for antennas list information.

**2.5. LIST OF EUT’S PORTS**

<b>Port Number</b>	<b>EUT’s Port Description</b>	<b>Number of Identical Ports</b>	<b>Connector Type</b>	<b>Cable Type (Shielded/Non-shielded)</b>
1	RF port	1	Integral antenna, U.FL, or RF Pad	U.FL: shielded cable RF pad: RF trace to connector; shielded cable to antenna Integral Antenna: N/A
2	DC supply and I/O port	1	Pin header	Direct connection (no cable)

## 2.6. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Test Jig
Brand name:	Digi International
Model Name or Number:	N/A
Serial Number:	N/A
Connected to EUT's Port:	Module pin signals

**EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS**

**3.1. CLIMATE TEST CONDITIONS**

The climate conditions of the test environment are as follows:

Temperature:	21 to 23 °C
Humidity:	45 to 58%
Pressure:	102 kPa
Power Input Source:	3.6 VDC

**3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS**

<b>Operating Modes:</b>	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
<b>Special Test Software:</b>	Special software provided by the Applicant to operate the EUT at each channel frequency continuously and in the range of typical modes of operation.
<b>Special Hardware Used:</b>	Test Jig
<b>Transmitter Test Antenna:</b>	The EUT is tested with the antenna fitted in a manner typical of normal intended use as integral / non-integral antenna equipment as described with the test results.

<b>Transmitter Test Signals</b>	
<b>Frequency Band(s):</b>	2412 - 2462 MHz
<b>Frequency(ies) Tested:</b> (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	2412, 2442 and 2462 MHz
<b>RF Power Output:</b> (measured maximum output power at antenna terminals)	28.20 dBm (660.69 mW) Peak
<b>Normal Test Modulation:</b>	OFDM, DSSS
<b>Modulating Signal Source:</b>	Internal

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Power Line Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2014-04-04.

### 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15.203	Antenna requirements	Yes*
15.207(a)	AC Power Line Conducted Emissions	Yes
15.247(a)(2)	6 dB Bandwidth	Yes
15.247(b)(3)	Peak Conducted Output Power - DTS	Yes
15.247(d)	Band-Edge and RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
15.247(d), 15.209 & 15.205	Transmitter Spurious Radiated Emissions	Yes
15.247(e)	Power Spectral Density	Yes
15.247(i), 1.1307, 1.1310, 2.1091	RF Exposure	Yes

\* The EUT complies with the requirement; it employs a unique (non-standard) antenna connector or integral antenna (PCB Antenna, U.FL Connector, RF Pad, or Integrated Wire).

### 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.



**EXHIBIT 5. TEST DATA**

**5.1. POWER LINE CONDUCTED EMISSIONS [§15.207(a)]**

**5.1.1. Limit(s)**

The equipment shall meet the limits of the following table:


Frequency of emission (MHz)	Conducted Limits (dBµV)	
	Quasi-peak	Average
0.15–0.5 .....	66 to 56* .....	56 to 46*
0.5–5 .....	56 .....	46
5–30 .....	60 .....	50

\*Decreases linearly with the logarithm of the frequency

**5.1.2. Method of Measurements**

ANSI C63.4-2009

**5.1.3. Test Arrangement**

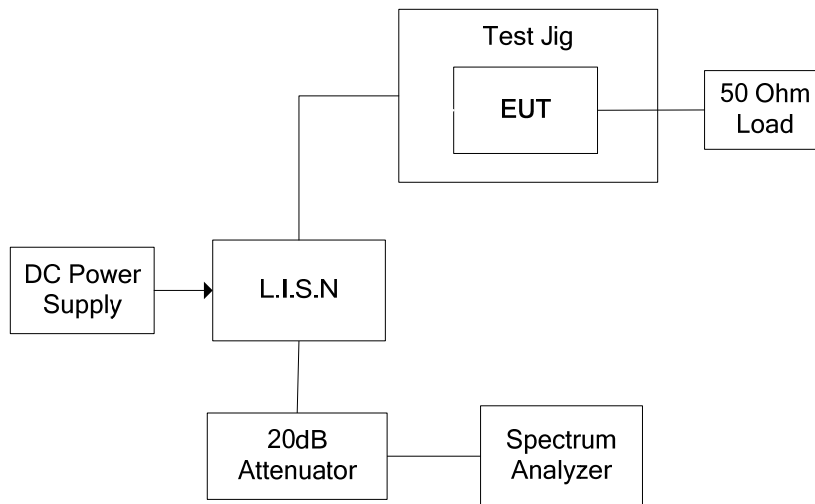

5.1.4. Test Data

Plot 5.1.4.1. Power Line Conducted Emissions; Line Voltage: 3.6 V DC; Line Tested: Positive



Plot 5.1.4.2. Power Line Conducted Emissions; Line Voltage: 3.6 V DC; Line Tested: Negative



**5.2. OCCUPIED BANDWIDTH [§ 15.247(a)(2)]**


**5.2.1. Limit(s)**

The minimum 6 dB bandwidth shall be at least 500 kHz.

**5.2.2. Method of Measurements**

KDB Publication No. 558074 D01 DTS Meas Guidance v02, Section 7.1 Option 1 DTS (6dB) Channel Bandwidth.

**5.2.3. Test Arrangement**

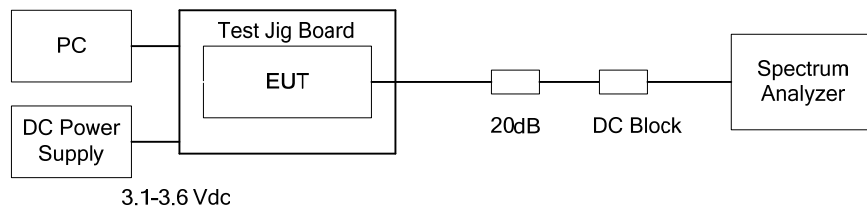

**5.2.4. Test Data**

802.11b Mode			
Operating Mode	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
1 Mbps DBPSK	2412	10.17	15.29
	2442	10.17	15.01
	2462	10.17	14.87
2 Mbps DQPSK	2412	10.17	15.29
	2442	10.17	15.01
	2462	10.17	14.80
11 Mbps CCK	2412	10.97	14.45
	2442	11.17	14.31
	2462	11.17	14.24

802.11g Mode			
Operating Mode	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
9 Mbps BPSK	2412	16.34	22.44
	2442	16.34	22.04
	2462	16.20	21.94
18 Mbps QPSK	2412	16.41	20.04
	2442	16.41	19.54
	2462	16.34	19.74
36 Mbps 16-QAM	2412	16.48	18.44
	2442	16.48	17.94
	2462	16.48	18.44
54 Mbps 64-QAM	2412	16.48	18.24
	2442	16.55	18.04
	2462	16.48	18.34

802.11n 800ns Mode			
Operating Mode	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
6.5 Mbps BPSK1/2	2412	17.25	23.59
	2442	17.39	23.04
	2462	17.39	21.82
19.5 Mbps QPSK 3/4	2412	17.46	22.15
	2442	16.76	20.28
	2462	17.32	20.39
39 Mbps 16-QAM 3/4	2412	17.75	18.85
	2442	17.75	19.18
	2462	17.75	19.07
65 Mbps 64-QAM 5/6	2412	17.75	19.18
	2442	17.68	18.96
	2462	17.68	19.07

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: DIGI-070F15C247  
 December 17, 2012

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*


802.11n 400ns Mode			
Operating Mode	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
7.2 Mbps BPSK1/2	2412	17.32	23.70
	2442	17.32	22.60
	2462	17.46	22.37
21.7 Mbps QPSK 3/4	2412	17.54	22.04
	2442	17.32	21.38
	2462	17.39	21.60
43.3 Mbps 16-QAM 3/4	2412	17.75	20.06
	2442	17.68	19.95
	2462	17.68	19.84
72.2 Mbps 64-QAM 5/6	2412	17.61	20.39
	2442	17.68	19.95
	2462	17.75	19.84

See the following plots for detailed measurements.


Plot 5.2.4.1. 6 dB Bandwidth, 802.11b, 1 Mbps DBPSK, 2412 MHz, Setting 23

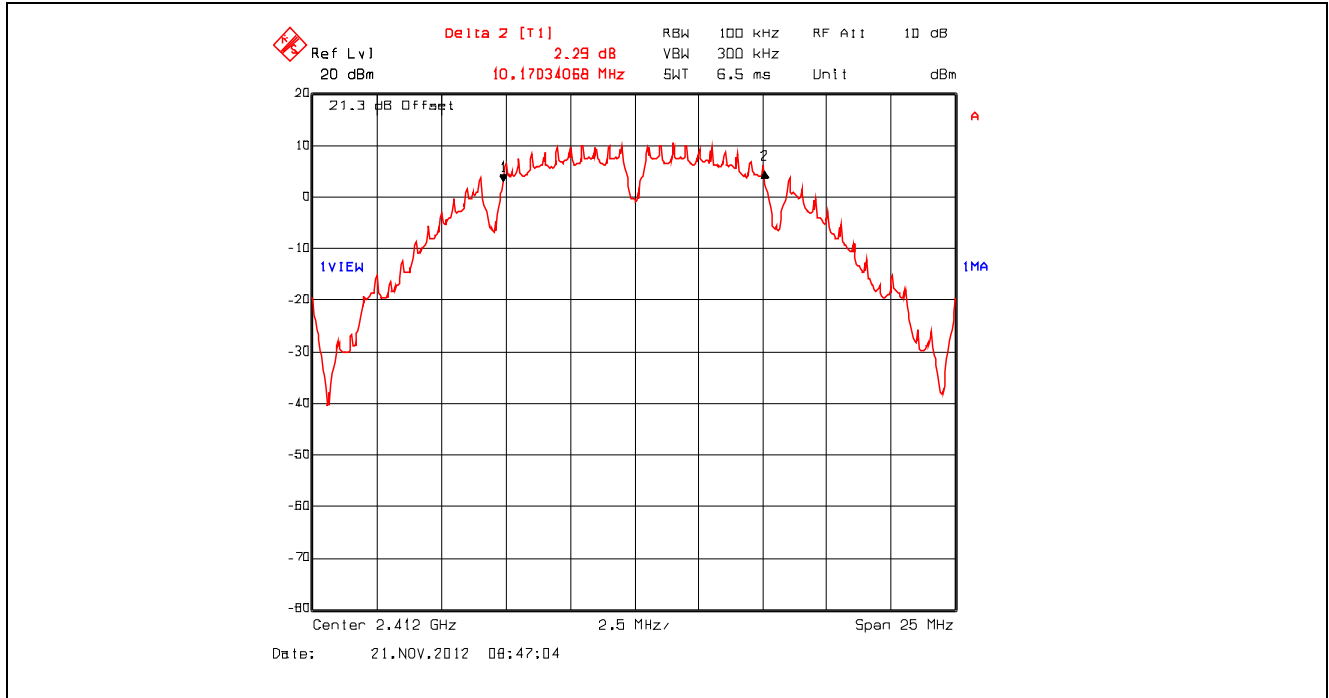


Plot 5.2.4.2. 6 dB Bandwidth, 802.11b, 1 Mbps DBPSK, 2442 MHz, Setting 23

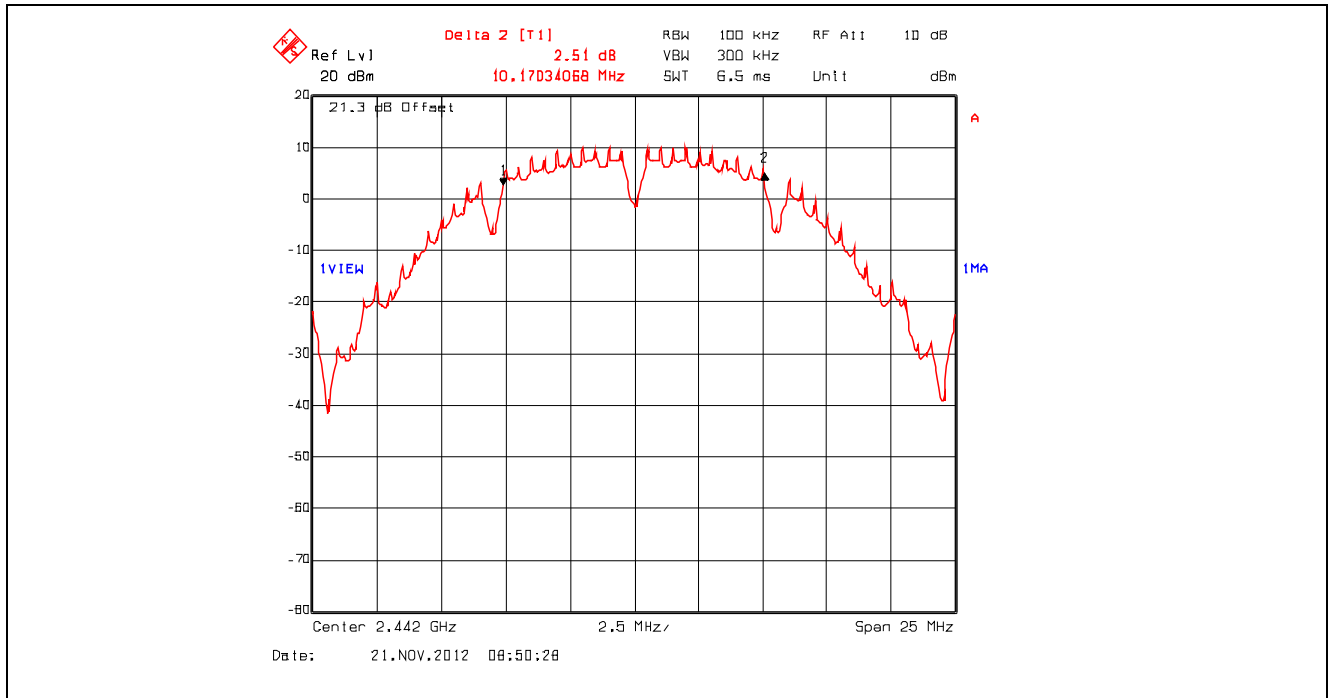

Plot 5.2.4.3. 6 dB Bandwidth, 802.11b, 1 Mbps DBPSK, 2462 MHz, Setting 23

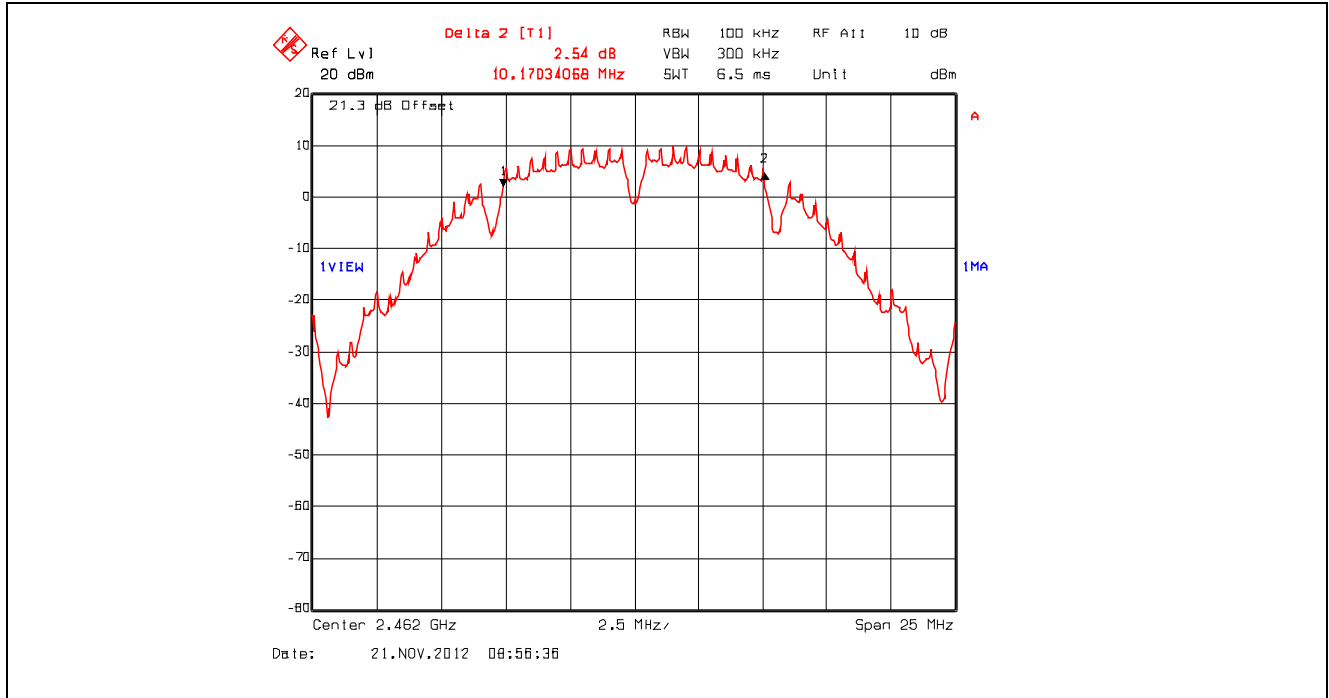


Plot 5.2.4.4. 6 dB Bandwidth, 802.11b, 2 Mbps DQPSK, 2412 MHz, Setting 23

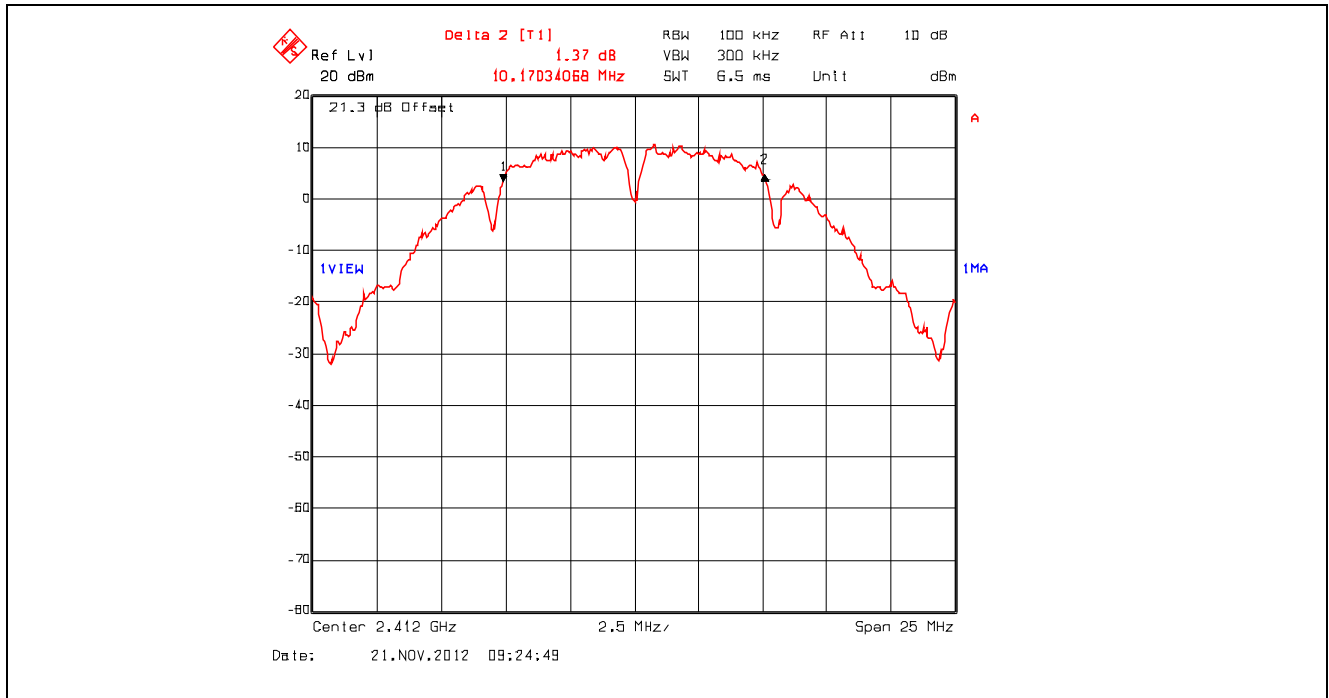





Plot 5.2.4.5. 6 dB Bandwidth, 802.11b, 2 Mbps DQPSK, 2442 MHz, Setting 23

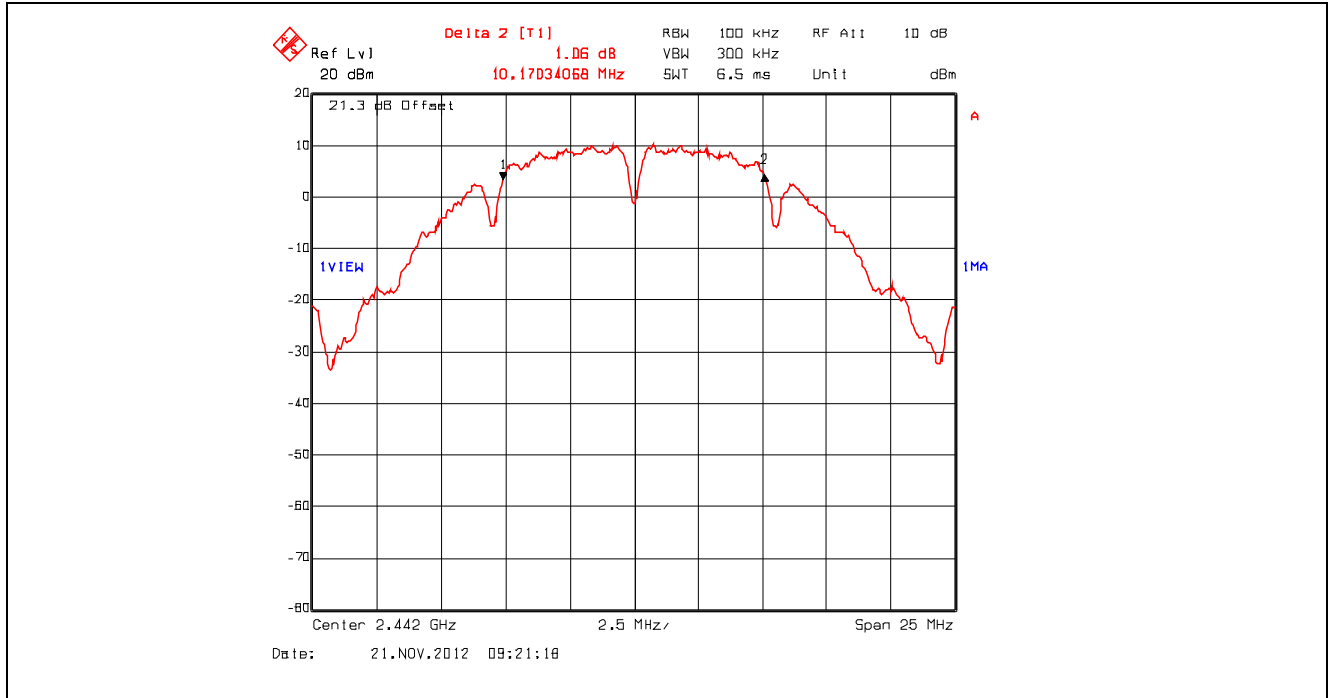


Plot 5.2.4.6. 6 dB Bandwidth, 802.11b, 2 Mbps DQPSK, 2462 MHz, Setting 23

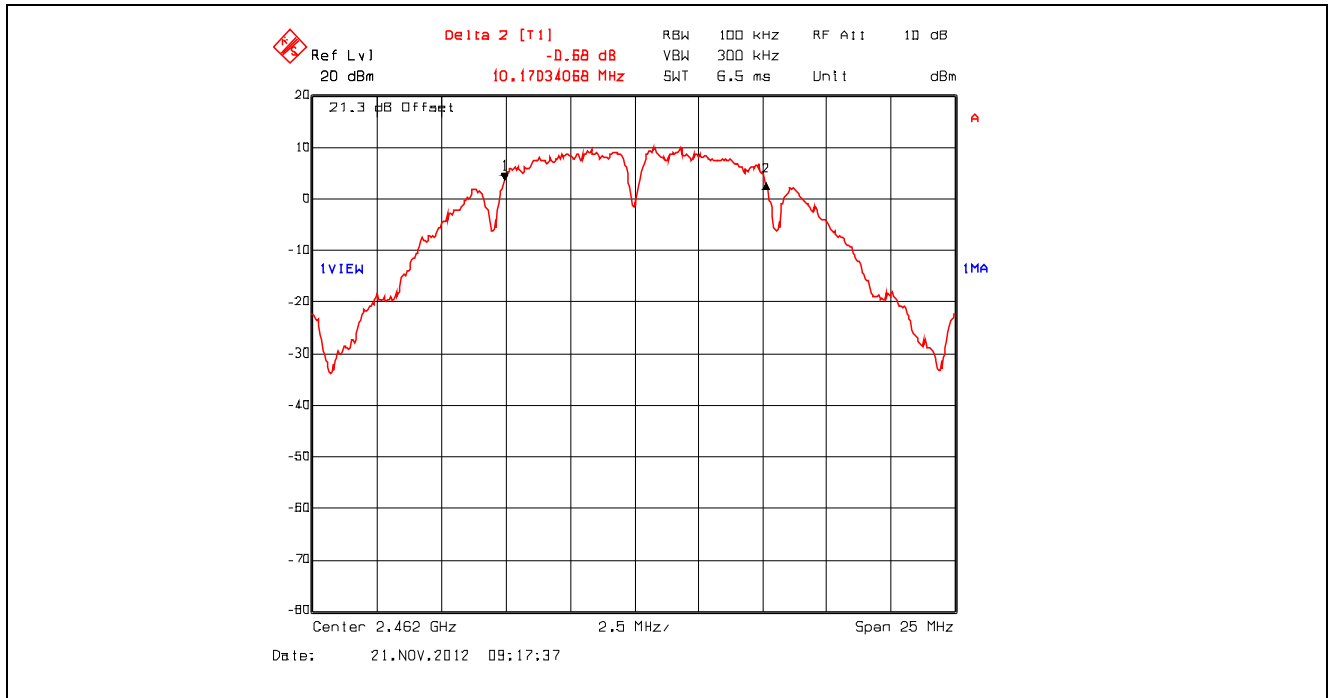


Plot 5.2.4.7. 6 dB Bandwidth, 802.11b, 11 Mbps CCK, 2412 MHz, Setting 23

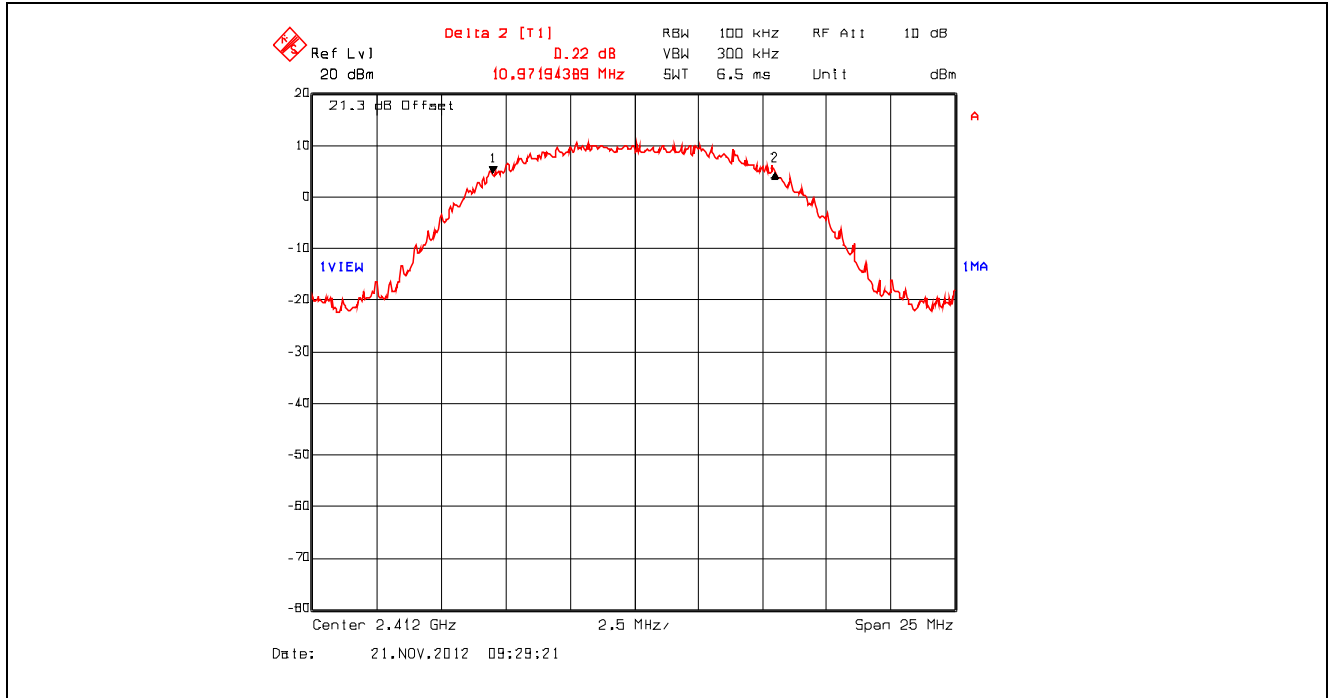


Plot 5.2.4.8. 6 dB Bandwidth, 802.11b, 11 Mbps CCK, 2442 MHz, Setting 23

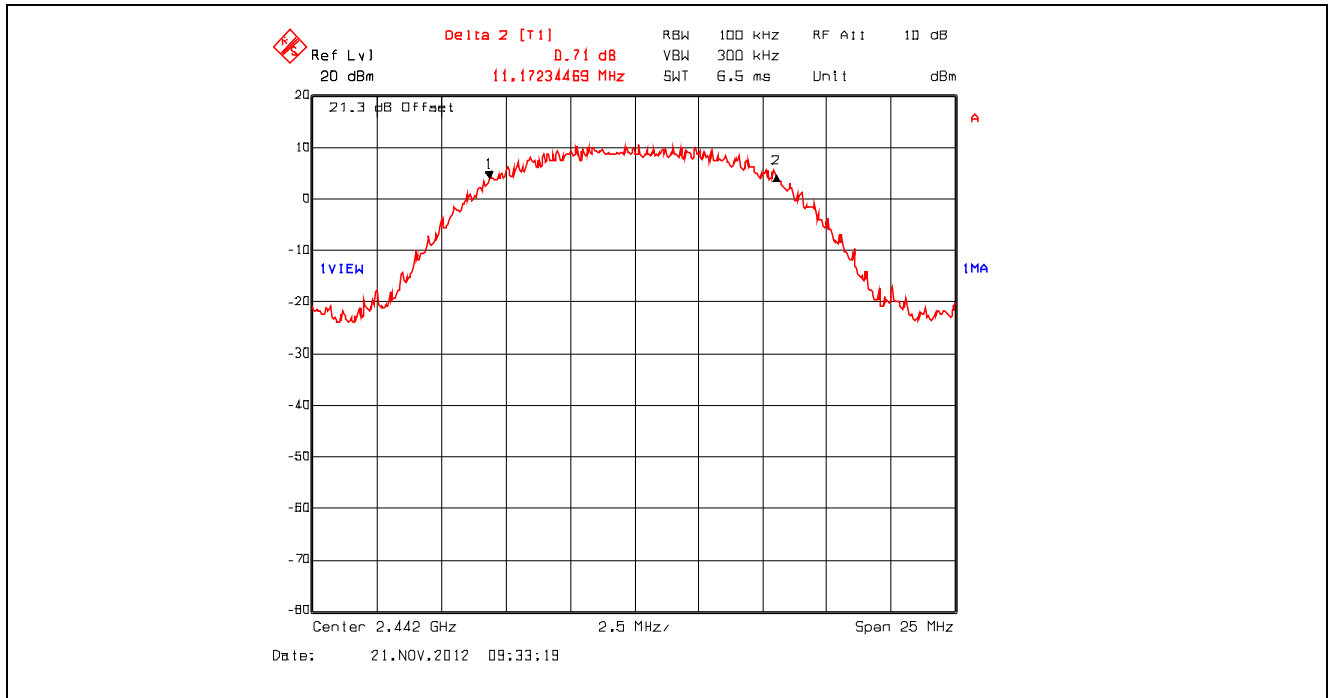


Plot 5.2.4.9. 6 dB Bandwidth, 802.11b, 11 Mbps CCK, 2462 MHz, Setting 23

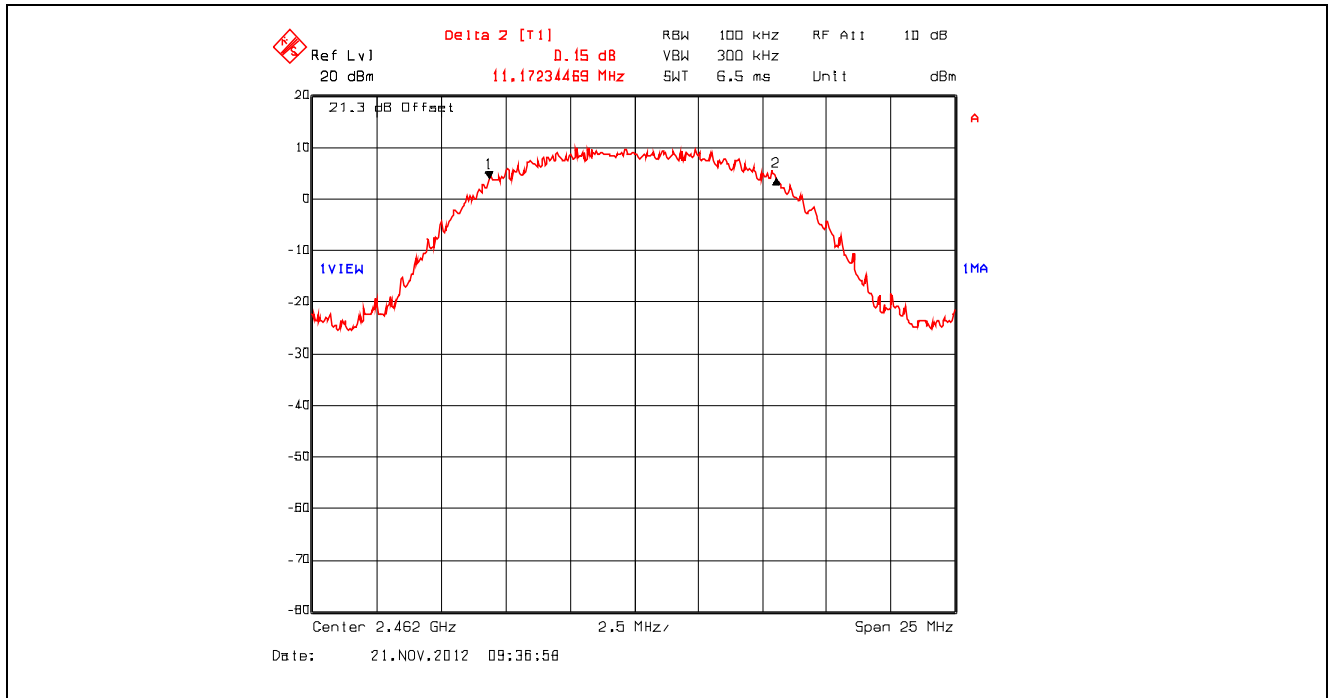


Plot 5.2.4.10. 6 dB Bandwidth, 802.11g, 9 Mbps BPSK, 2412 MHz, Setting 23

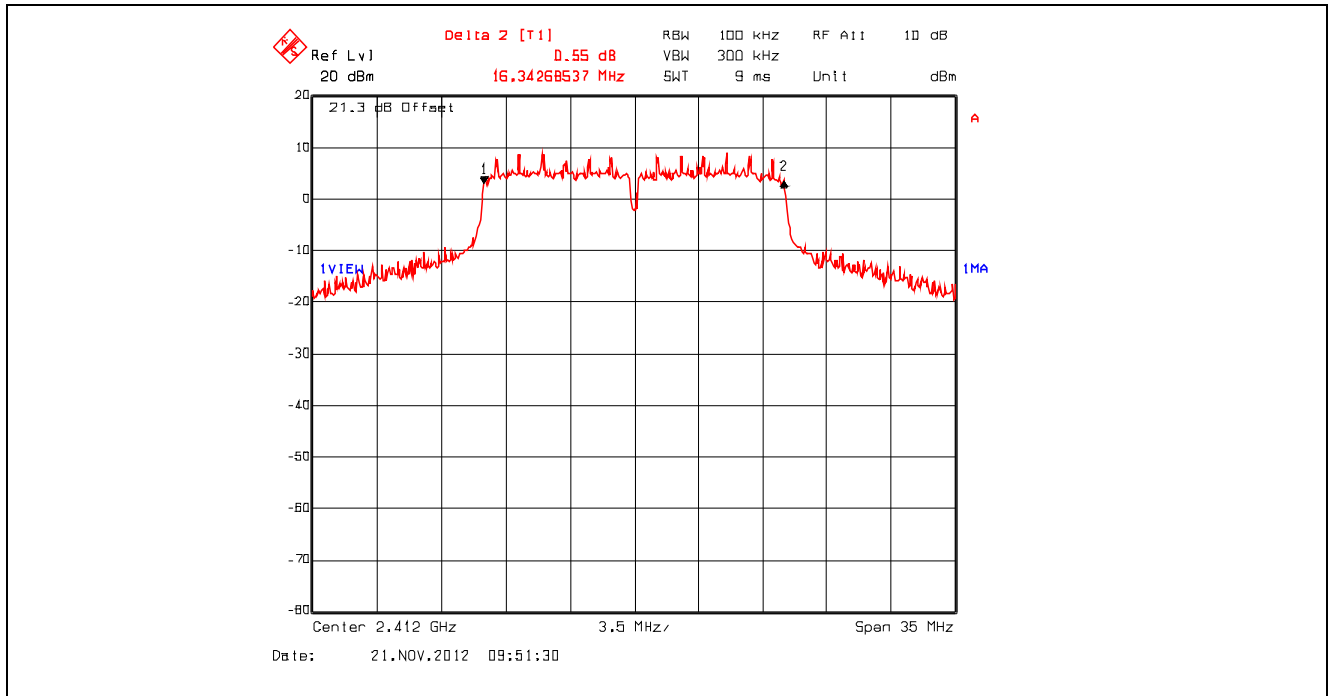


Plot 5.2.4.11. 6 dB Bandwidth, 802.11g, 9 Mbps BPSK, 2442 MHz, Setting 23

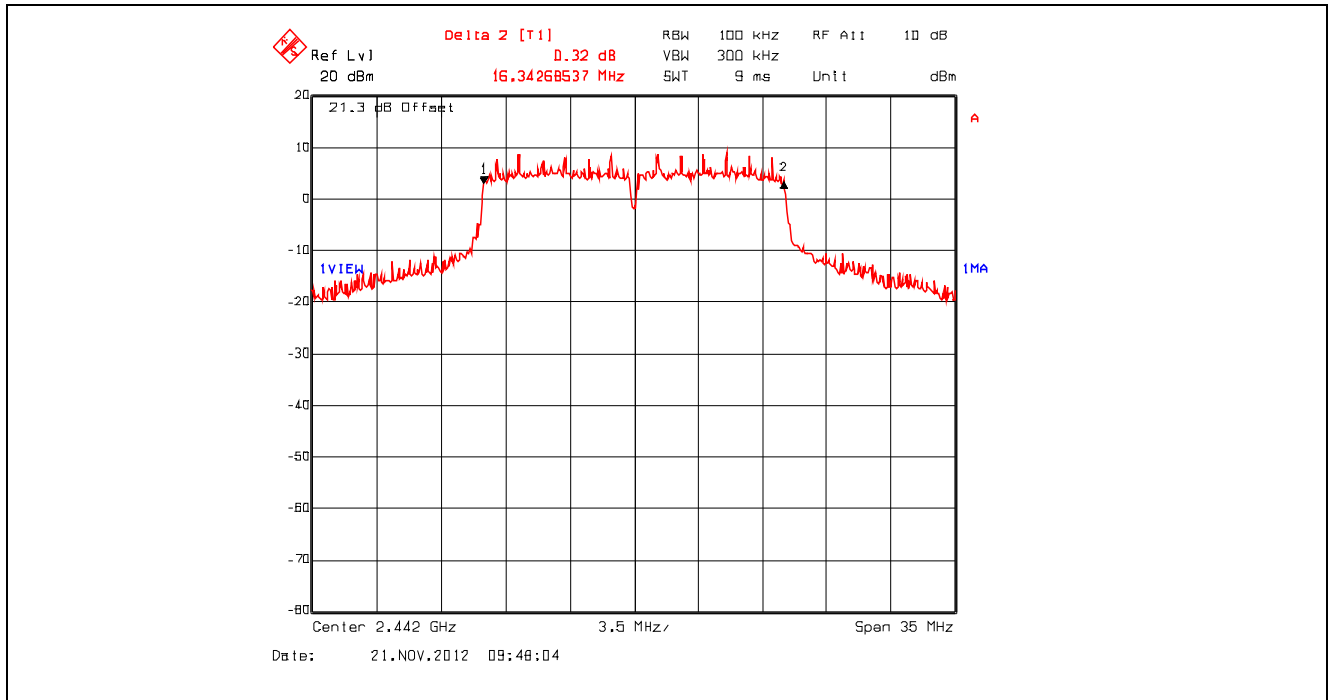


Plot 5.2.4.12. 6 dB Bandwidth, 802.11g, 9 Mbps BPSK, 2462 MHz, Setting 23

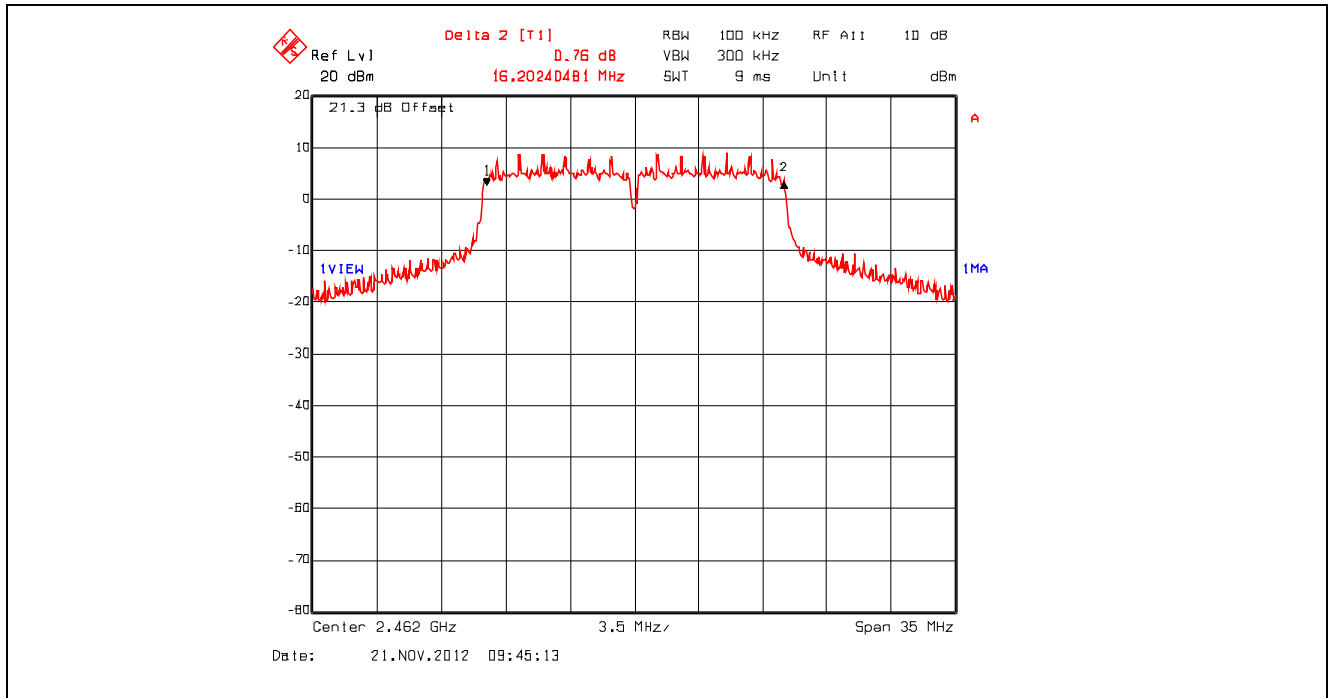


Plot 5.2.4.13. 6 dB Bandwidth, 802.11g, 18 Mbps QPSK, 2412 MHz, Setting 23

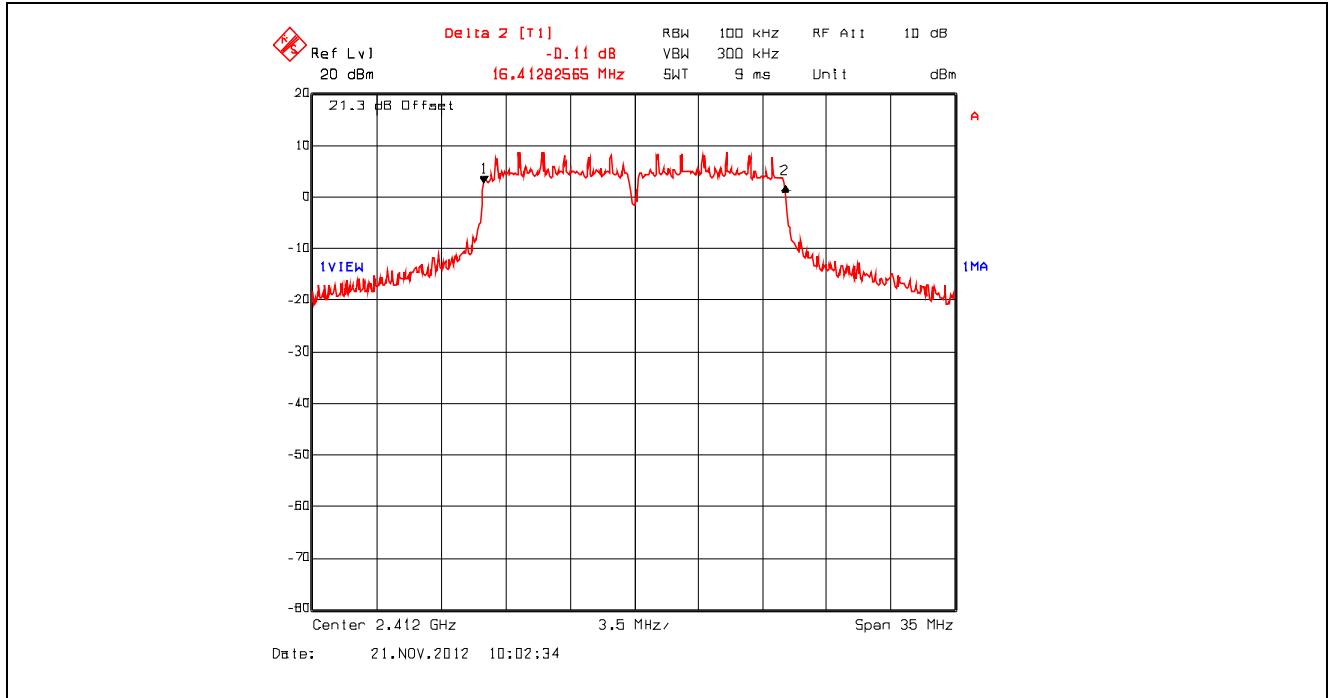


Plot 5.2.4.14. 6 dB Bandwidth, 802.11g, 18 Mbps QPSK, 2442 MHz, Setting 23

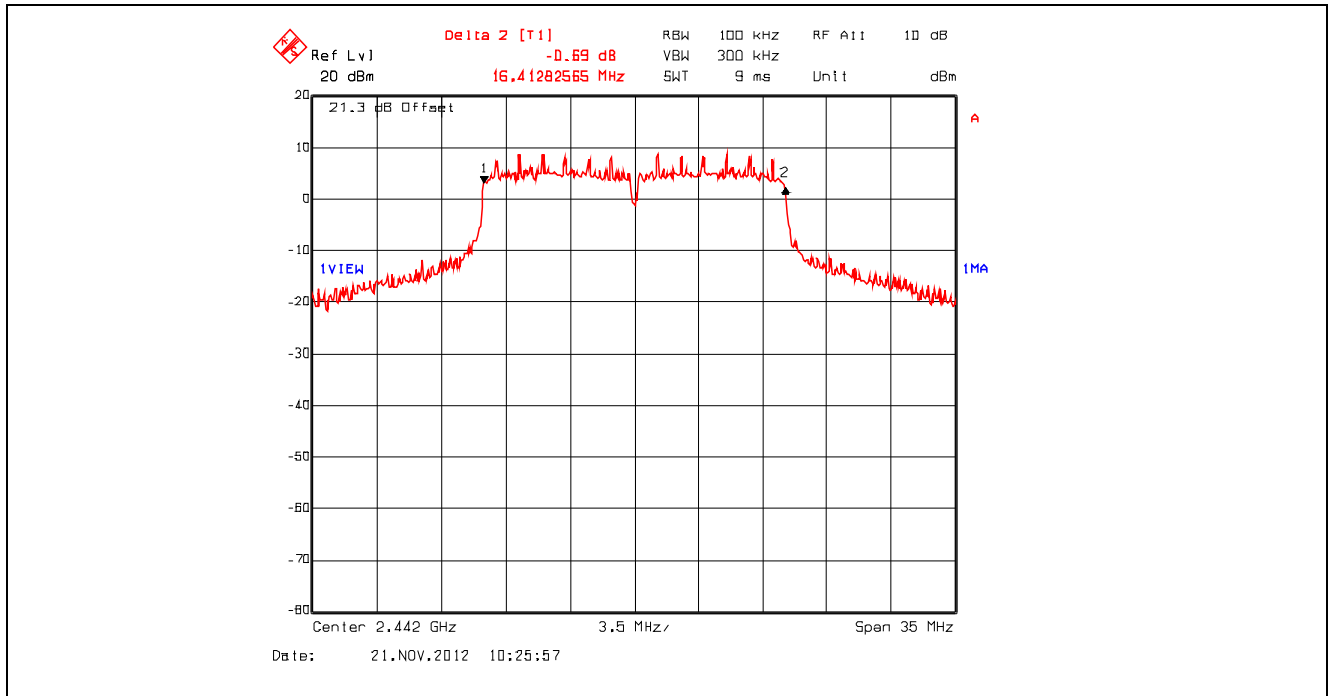


Plot 5.2.4.15. 6 dB Bandwidth, 802.11g, 18 Mbps QPSK, 2462 MHz, Setting 23

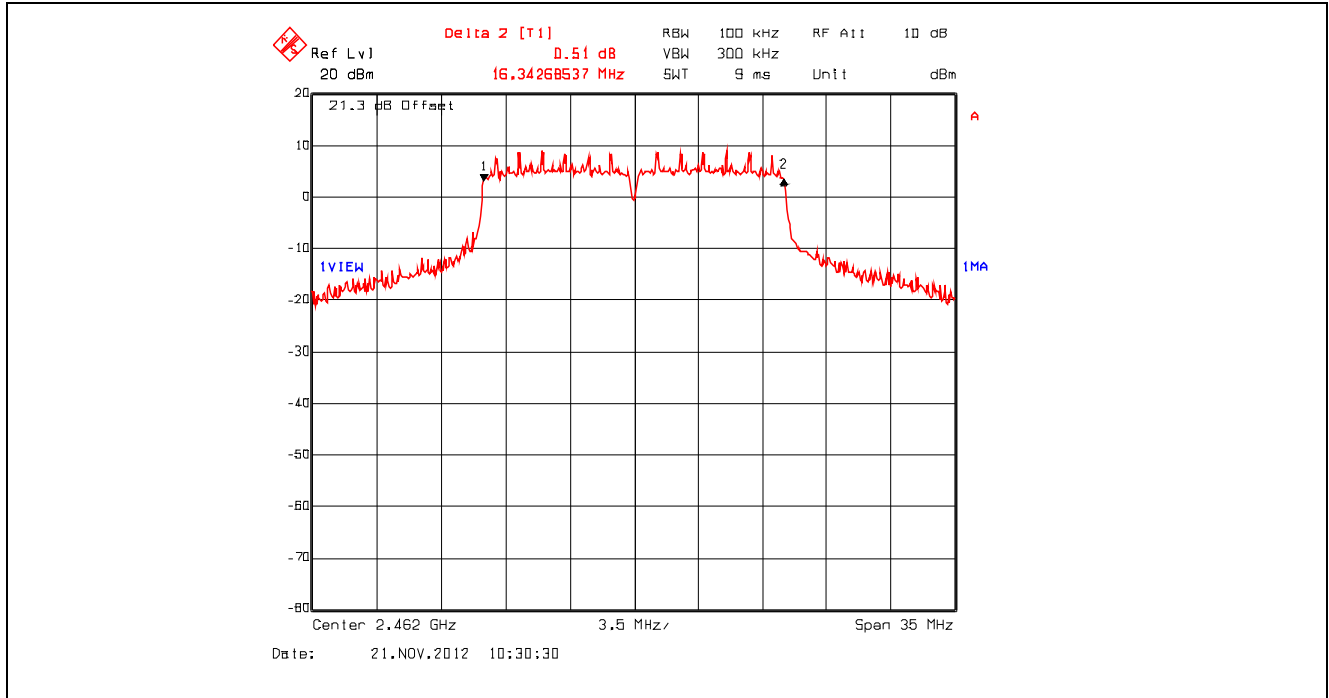


Plot 5.2.4.16. 6 dB Bandwidth, 802.11g, 36 Mbps 16-QAM, 2412 MHz, Setting 23

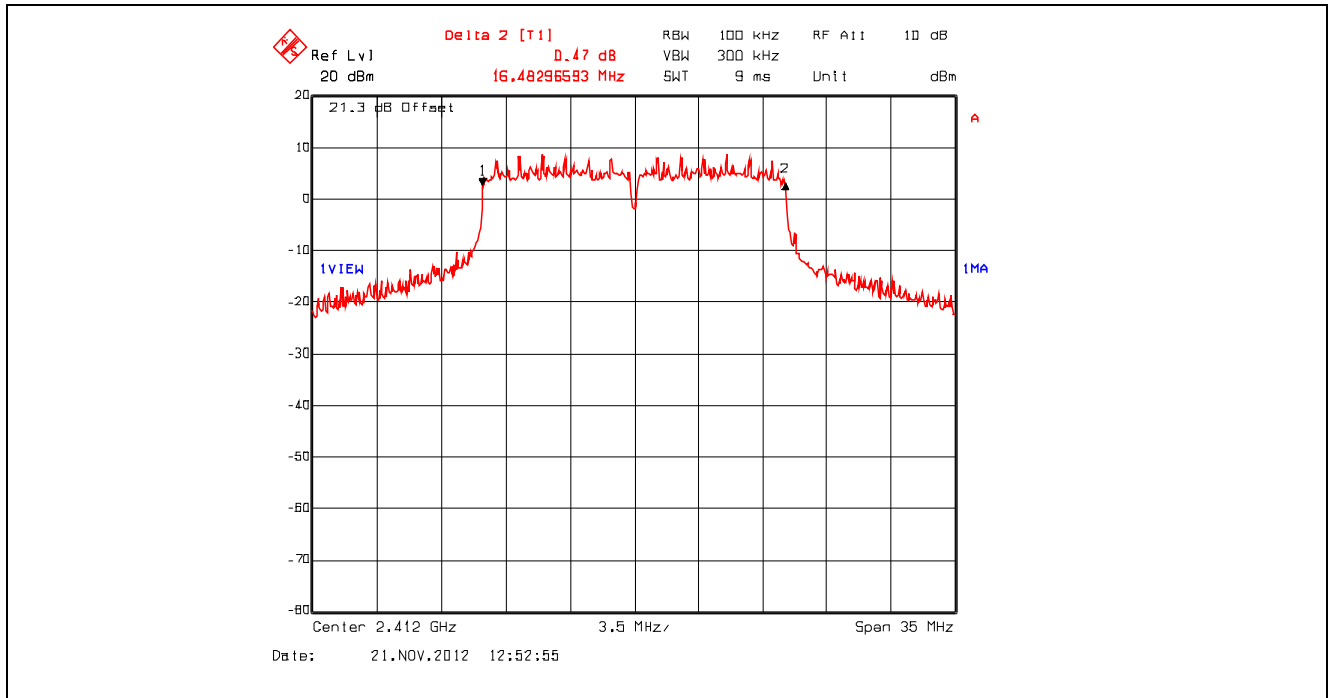


Plot 5.2.4.17. 6 dB Bandwidth, 802.11g, 36 Mbps 16-QAM, 2442 MHz, Setting 23

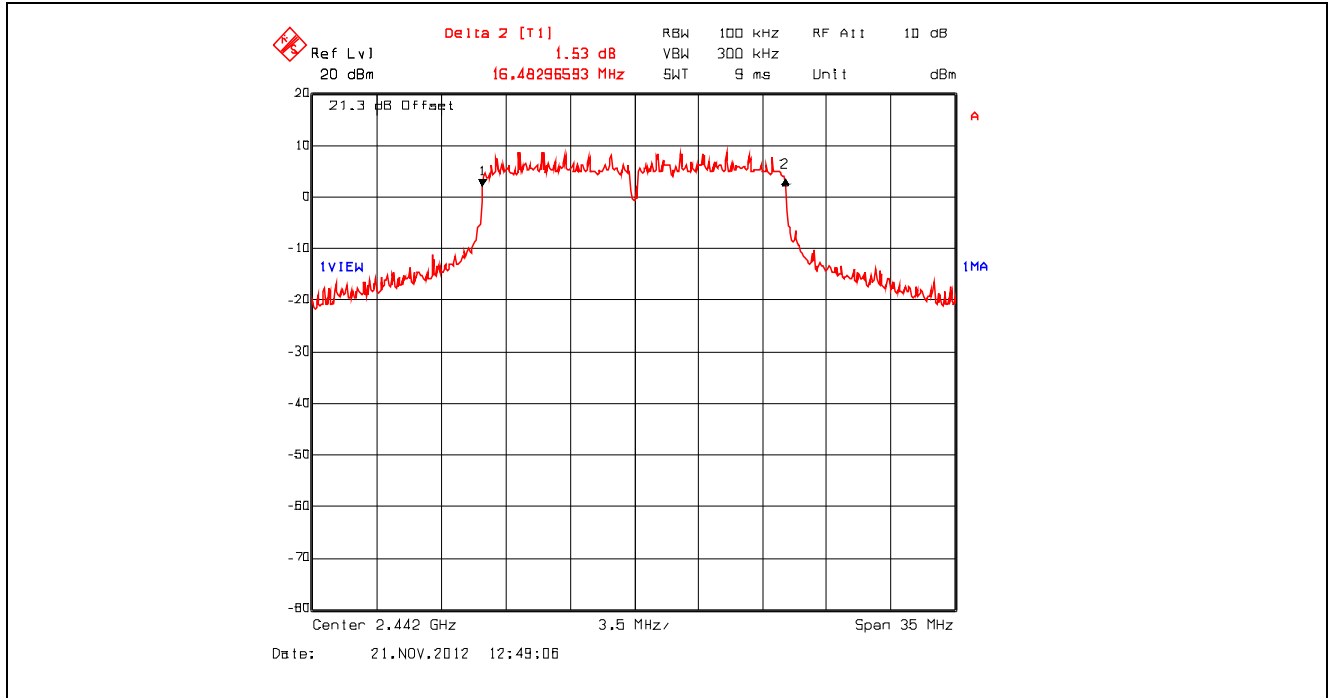


Plot 5.2.4.18. 6 dB Bandwidth, 802.11g, 36 Mbps 16-QAM, 2462 MHz, Setting 23

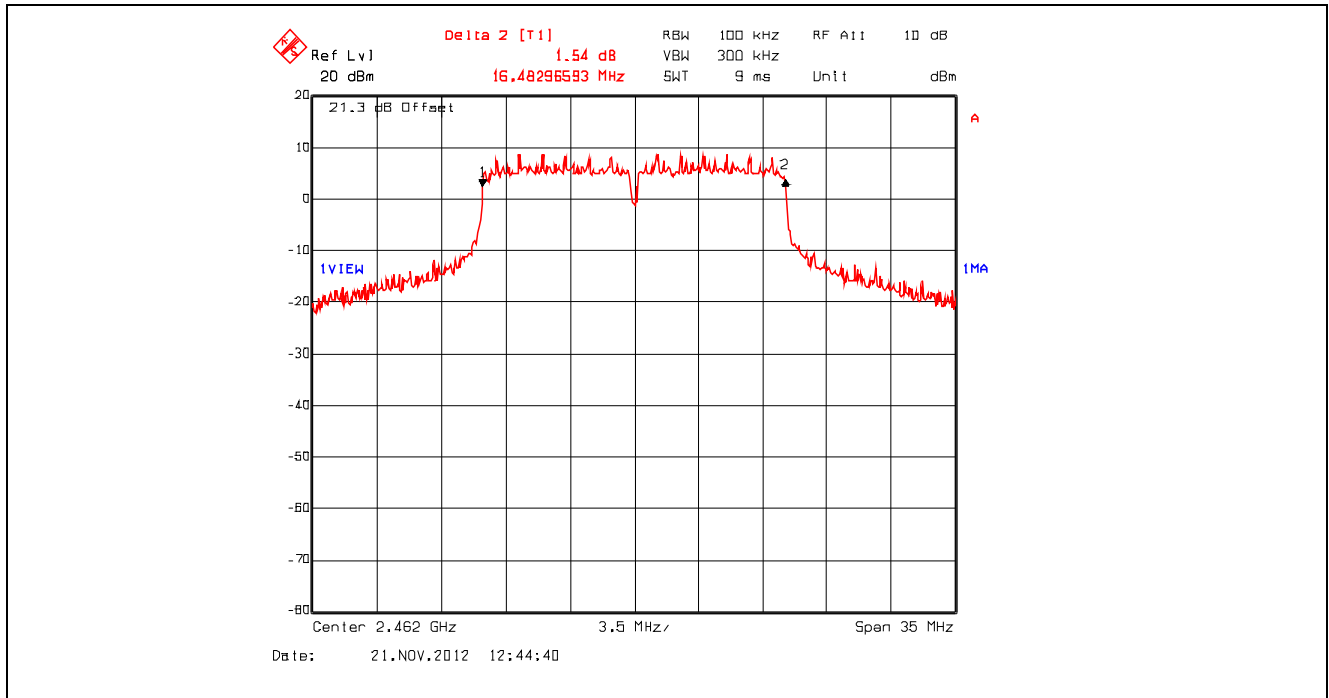

Plot 5.2.4.19. 6 dB Bandwidth, 802.11g, 54 Mbps 64-QAM, 2412 MHz, Setting 23

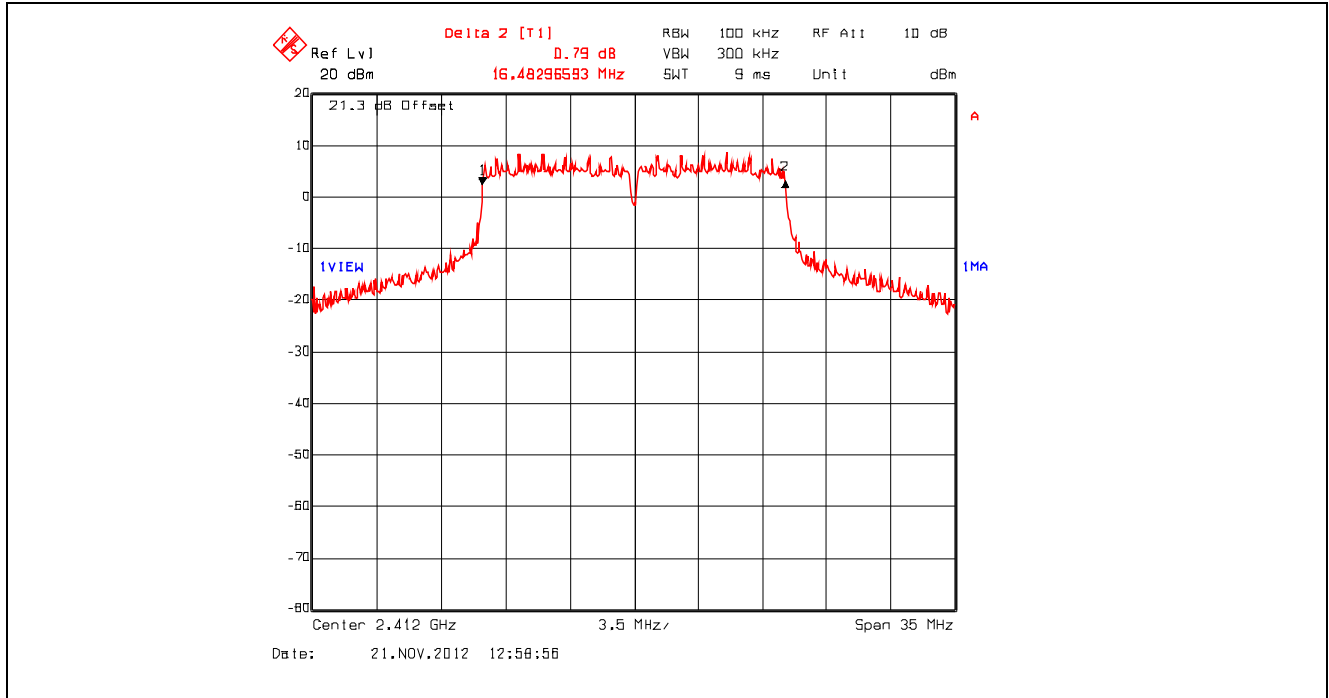


Plot 5.2.4.20. 6 dB Bandwidth, 802.11g, 54 Mbps 64-QAM, 2442 MHz, Setting 23

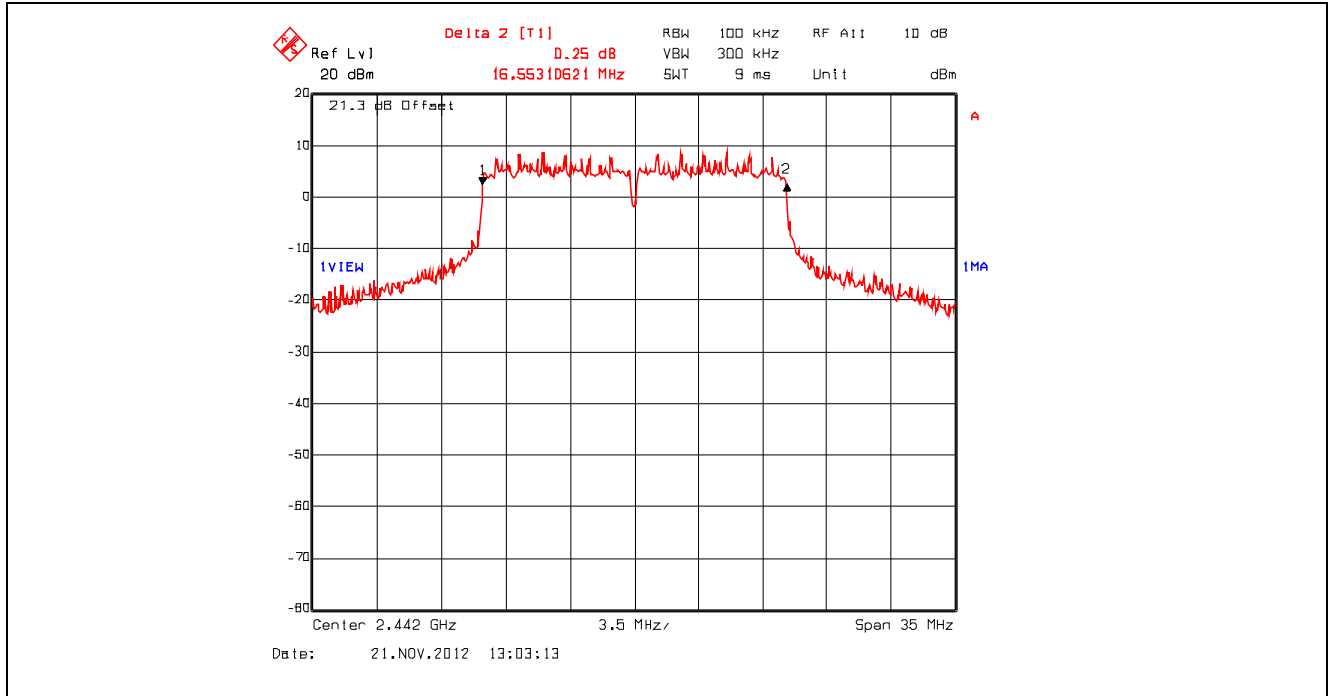





Plot 5.2.4.21. 6 dB Bandwidth, 802.11g, 54 Mbps 64-QAM, 2462 MHz, Setting 23

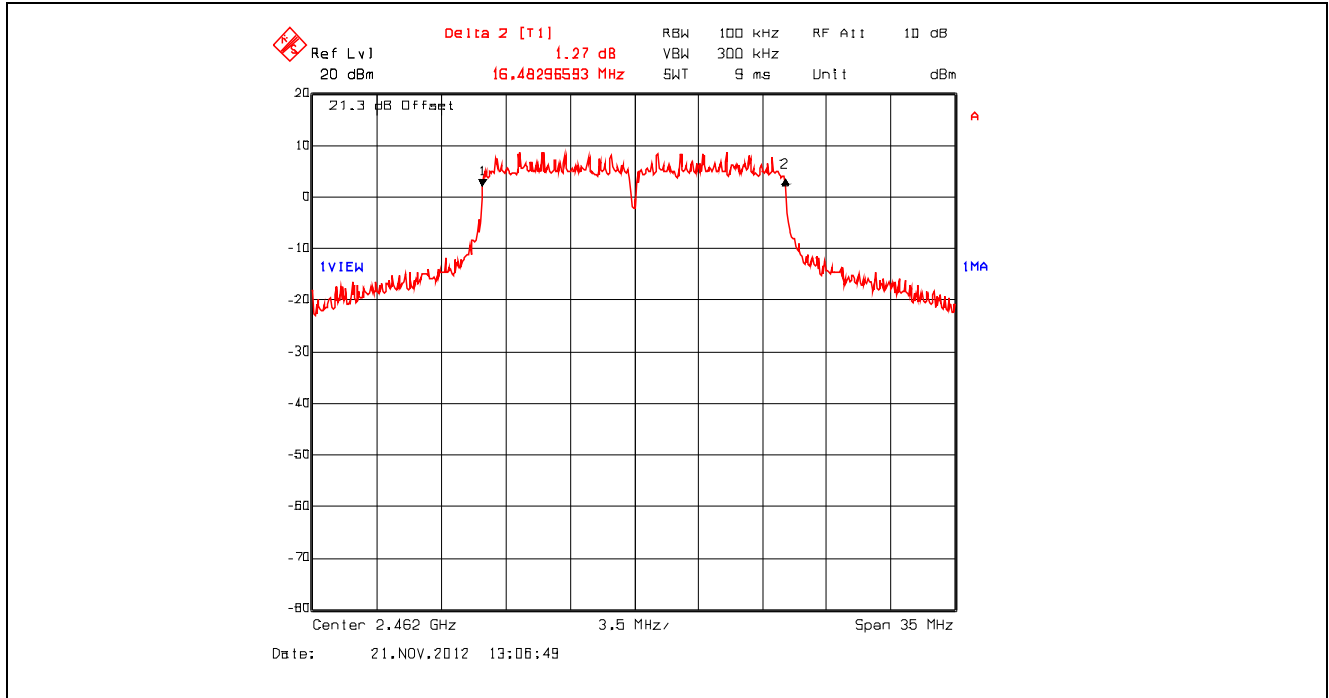


Plot 5.2.4.22. 6 dB Bandwidth, 802.11n 800ns, 6.5 Mbps BPSK1/2, 2412 MHz, Setting 23

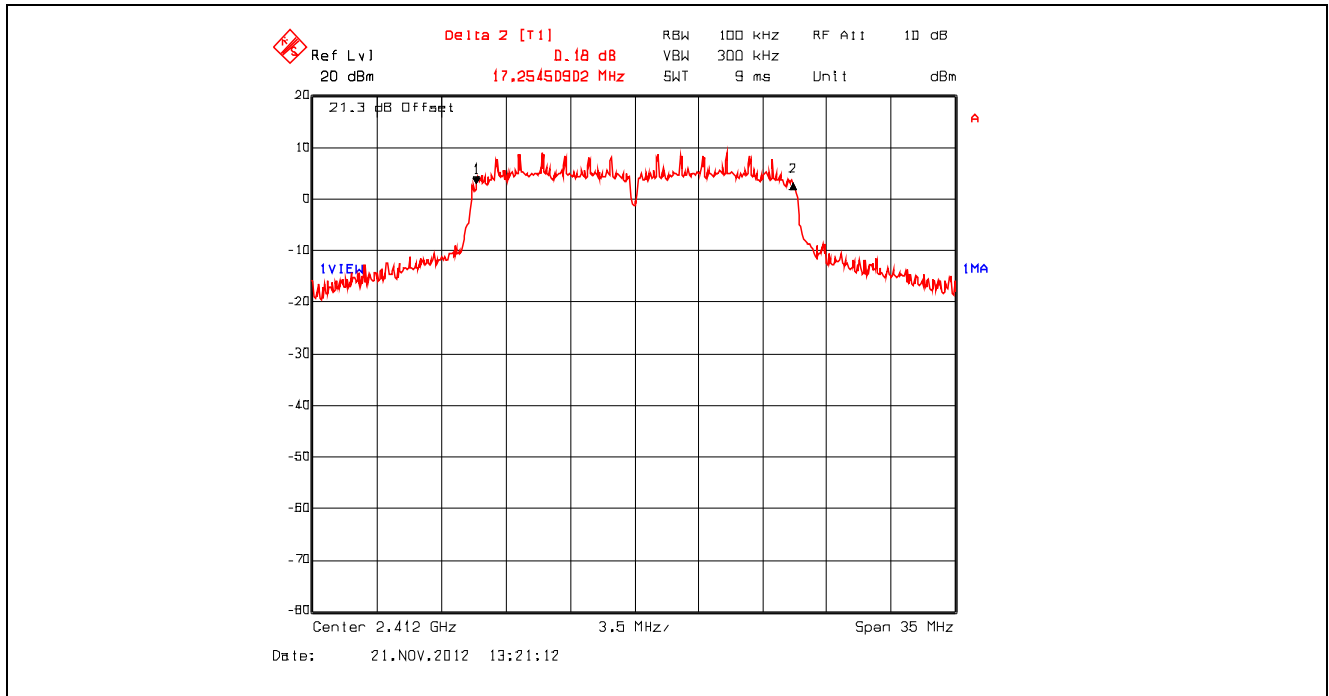


Plot 5.2.4.23. 6 dB Bandwidth, 802.11n 800ns, 6.5 Mbps BPSK1/2, 2442 MHz, Setting 23

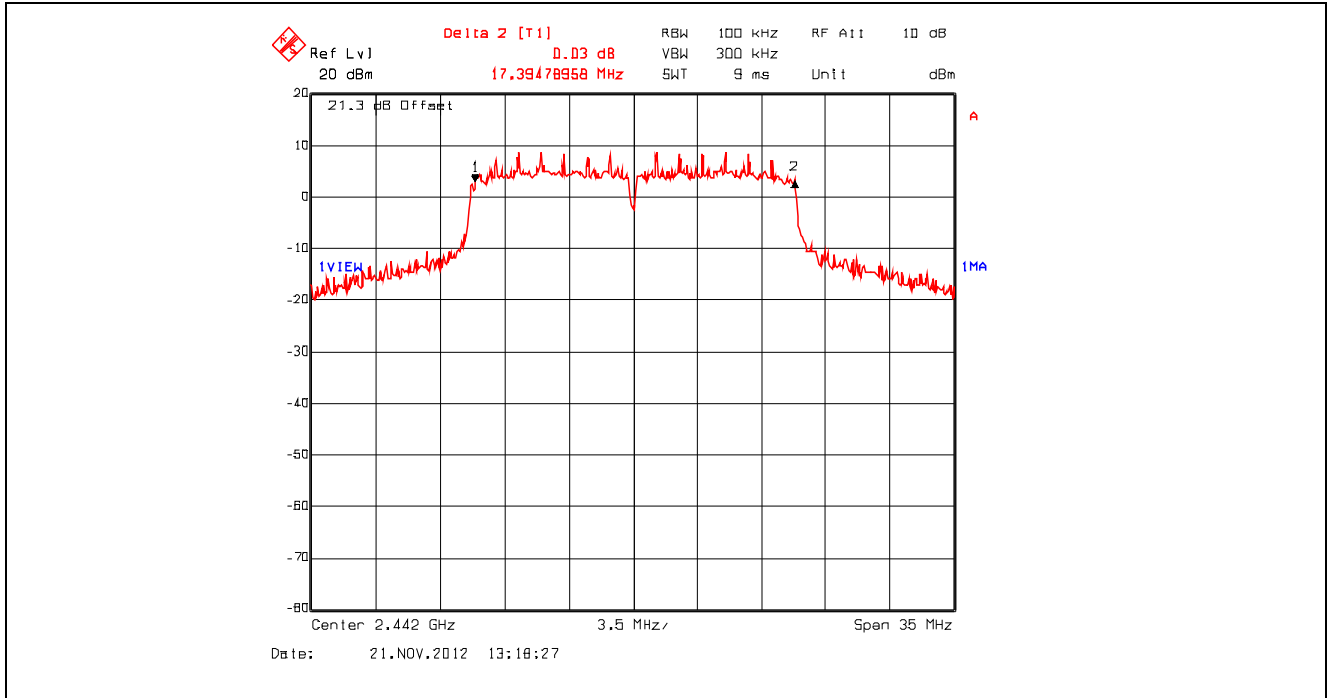


Plot 5.2.4.24. 6 dB Bandwidth, 802.11n 800ns, 6.5 Mbps BPSK1/2, 2462 MHz, Setting 23

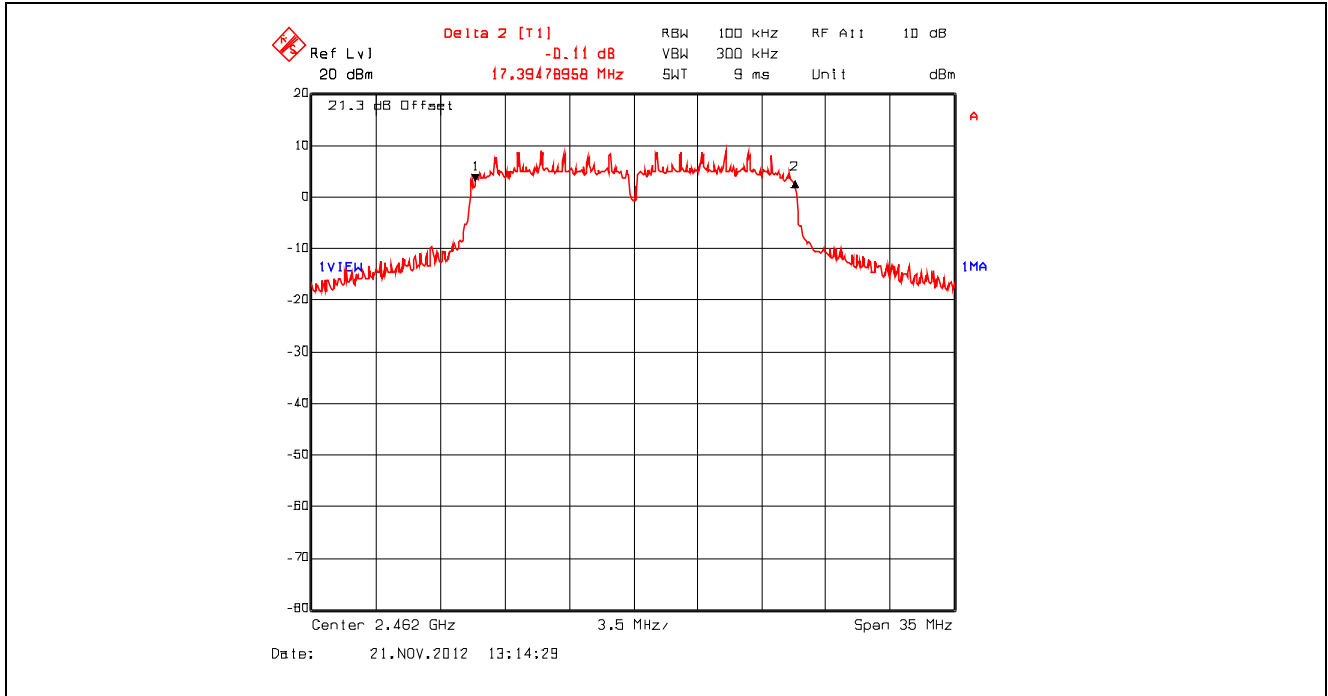


Plot 5.2.4.25. 6 dB Bandwidth, 802.11n 800ns, 19.5 Mbps QPSK 3/4, 2412 MHz, Setting 23

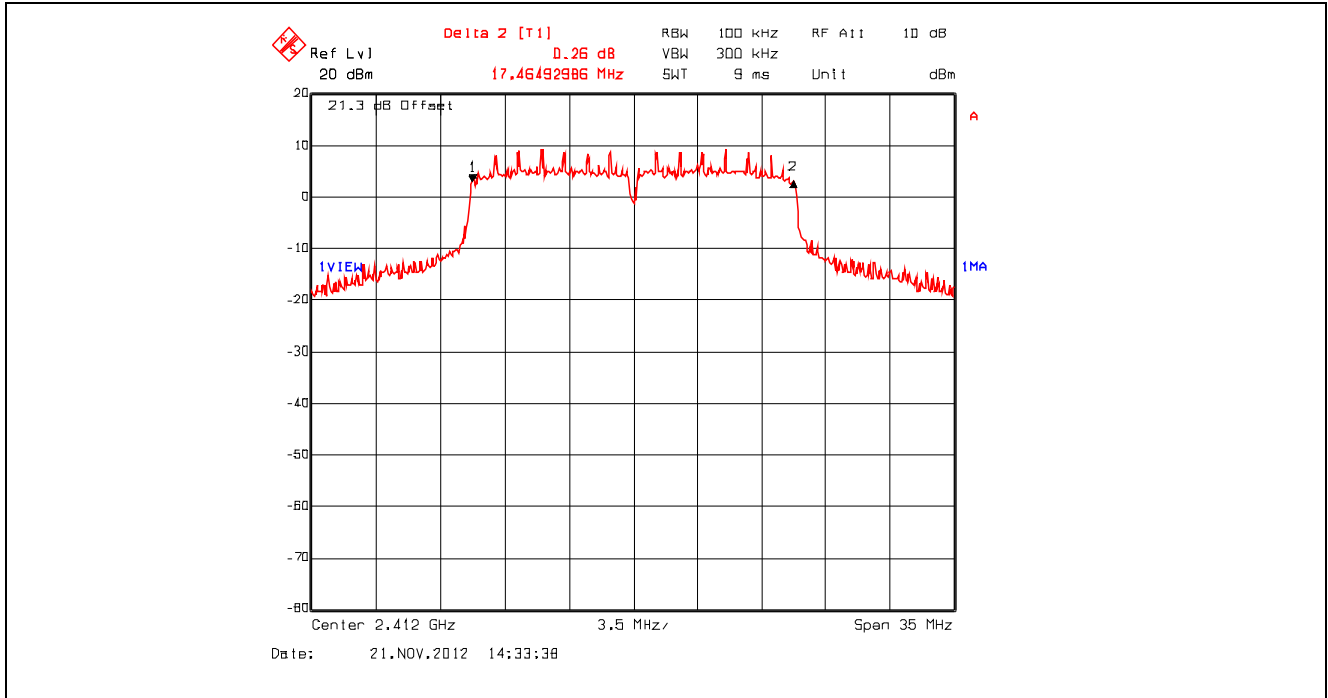


Plot 5.2.4.26. 6 dB Bandwidth, 802.11n 800ns, 19.5 Mbps QPSK 3/4, 2442 MHz, Setting 23

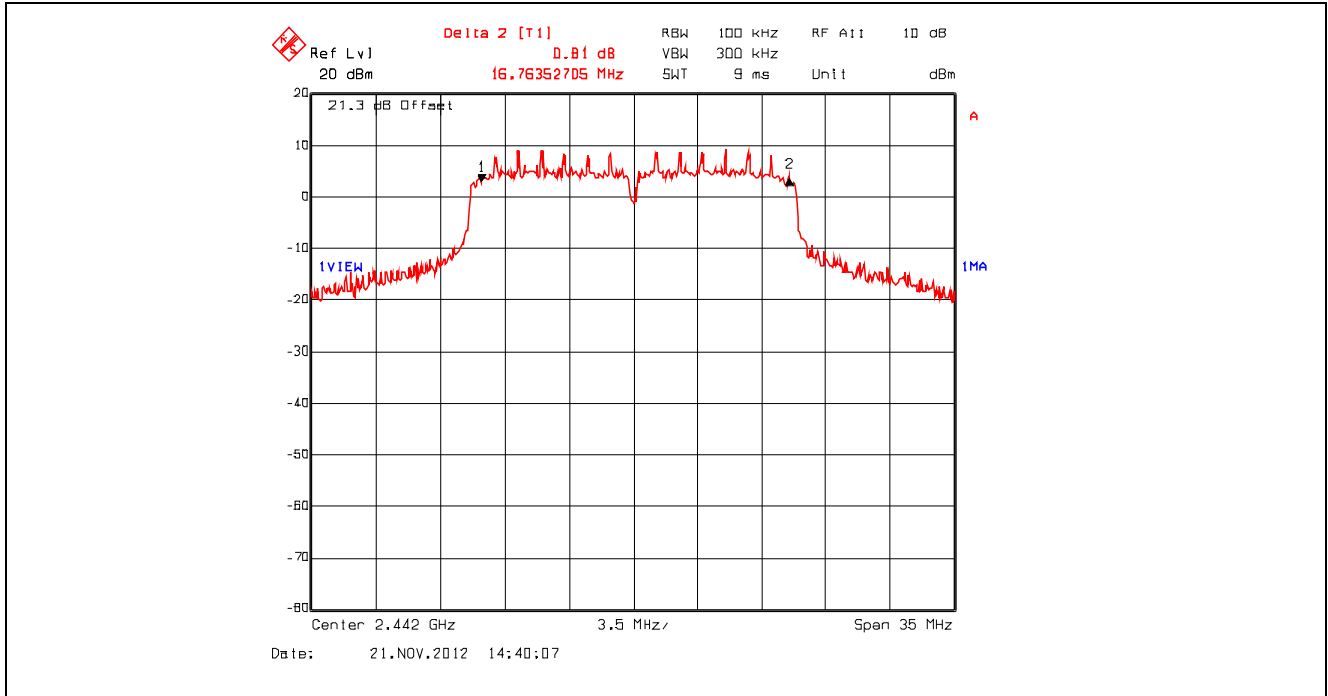


Plot 5.2.4.27. 6 dB Bandwidth, 802.11n 800ns, 19.5 Mbps QPSK 3/4, 2462 MHz, Setting 23

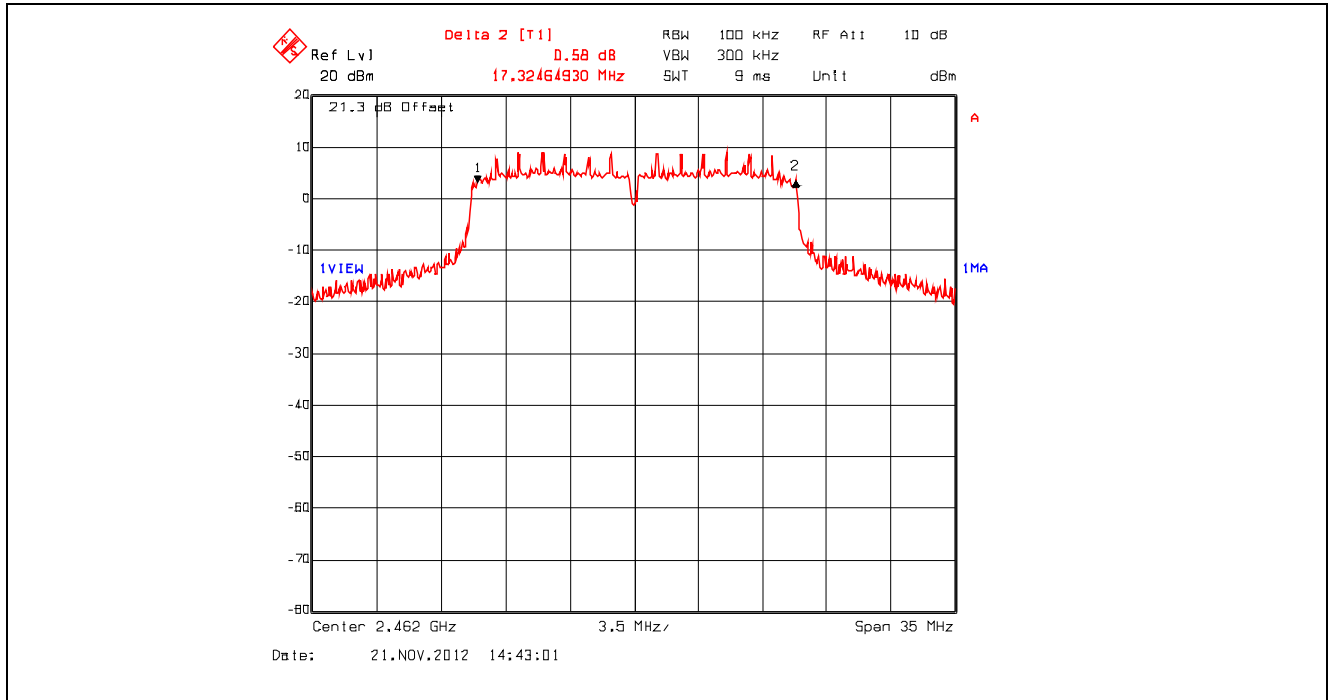


Plot 5.2.4.28. 6 dB Bandwidth, 802.11n 800ns, 39 Mbps 16-QAM 3/4, 2412 MHz, Setting 23

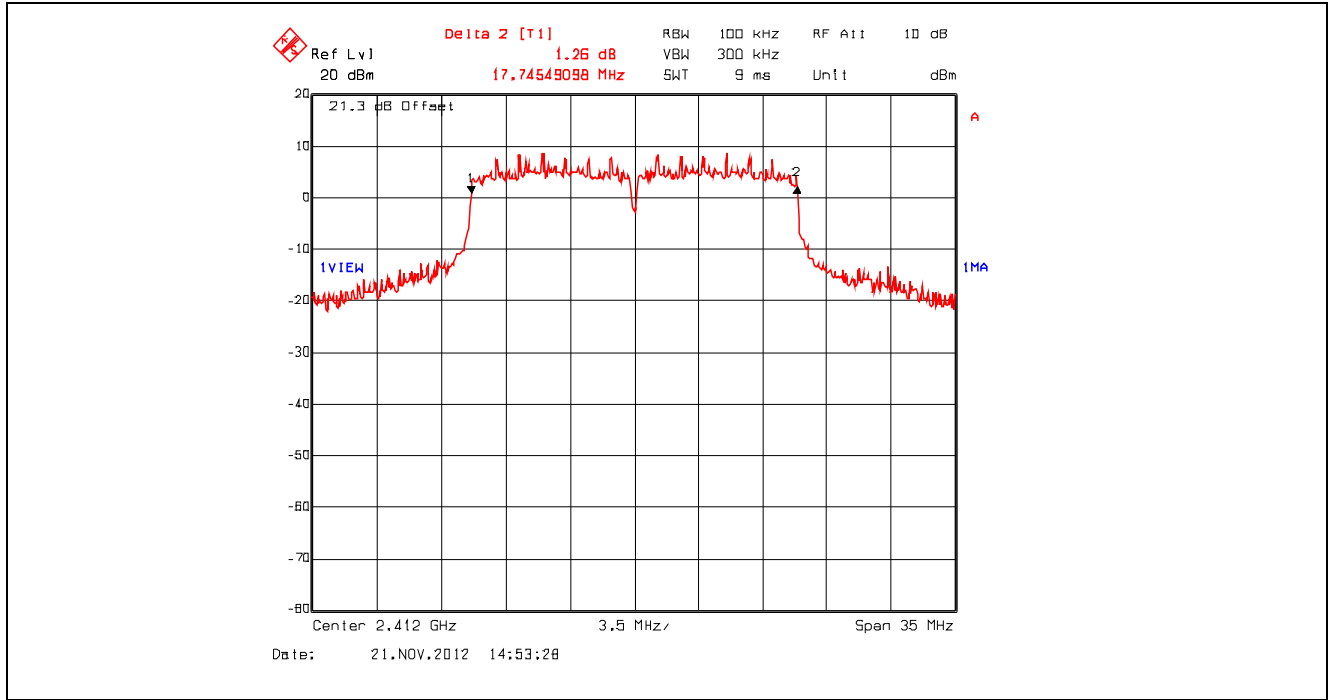


Plot 5.2.4.29. 6 dB Bandwidth, 802.11n 800ns, 39 Mbps 16-QAM 3/4, 2442 MHz, Setting 23

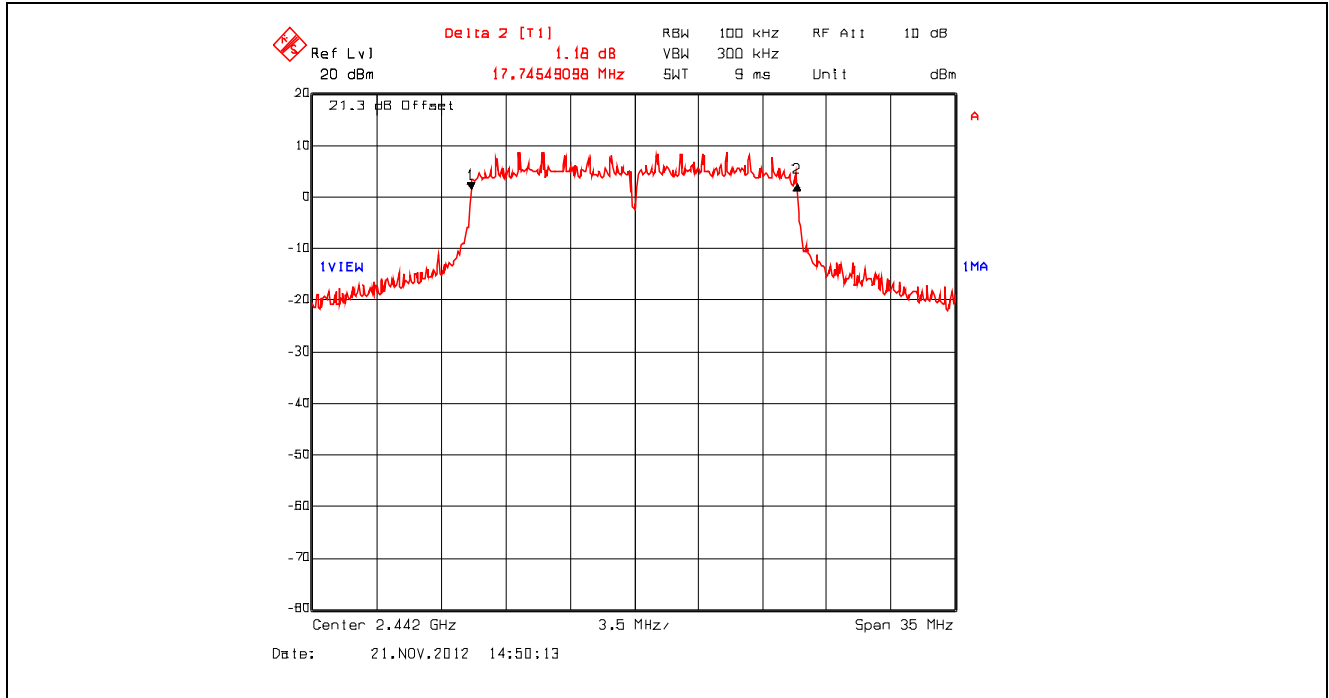


Plot 5.2.4.30. 6 dB Bandwidth, 802.11n 800ns, 39 Mbps 16-QAM 3/4, 2462 MHz, Setting 23

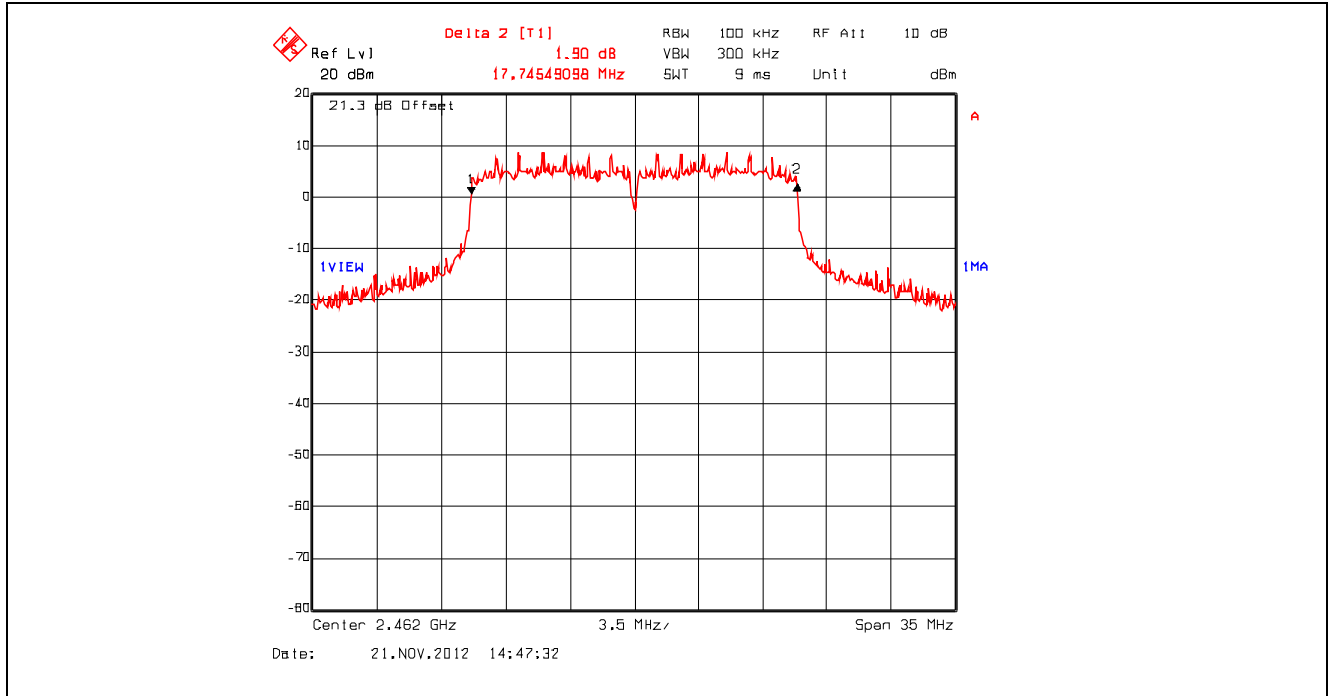


Plot 5.2.4.31. 6 dB Bandwidth, 802.11n 800ns, 65 Mbps 64-QAM 5/6, 2412 MHz, Setting 23

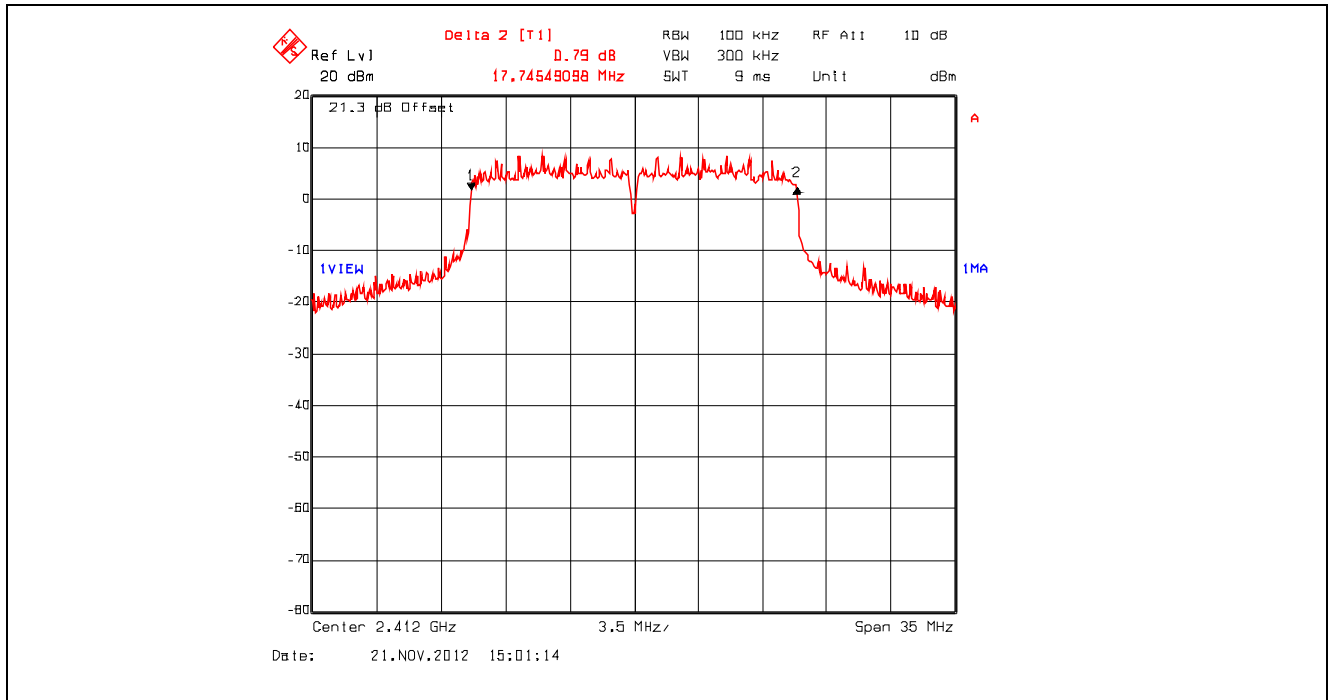


Plot 5.2.4.32. 6 dB Bandwidth, 802.11n 800ns, 65 Mbps 64-QAM 5/6, 2442 MHz, Setting 23

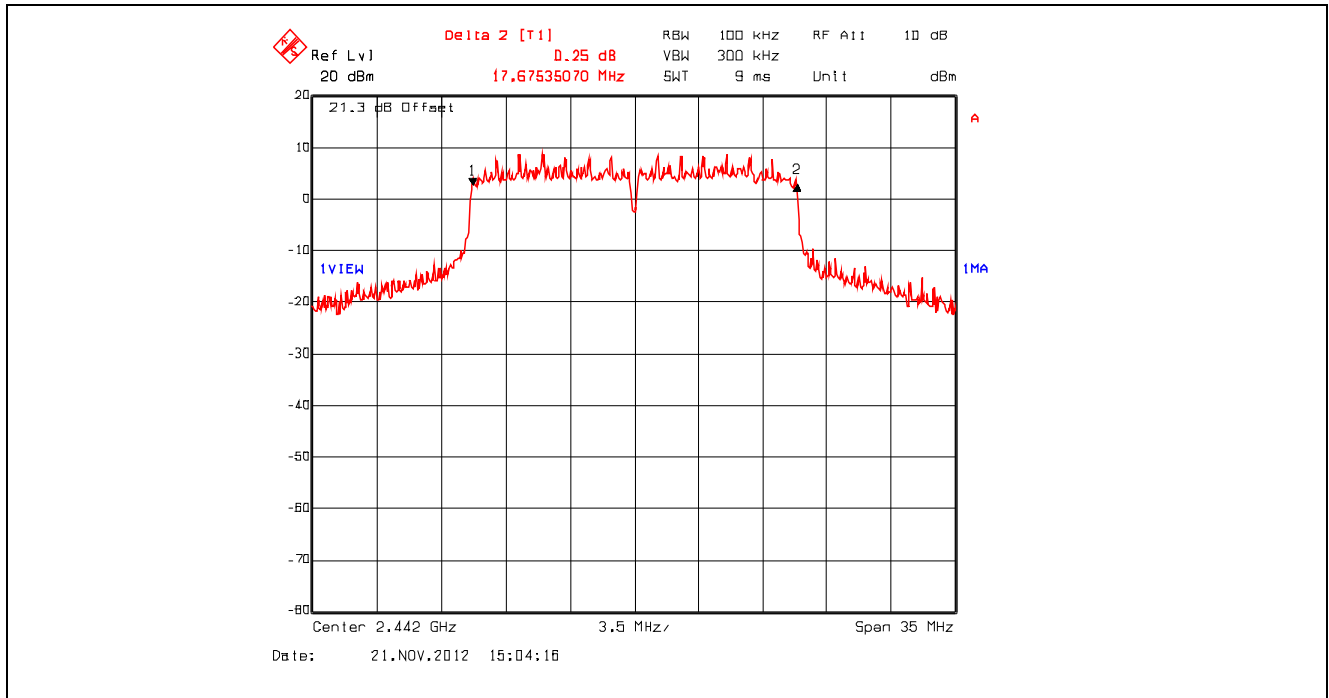


Plot 5.2.4.33. 6 dB Bandwidth, 802.11n 800ns, 65 Mbps 64-QAM 5/6, 2462 MHz, Setting 23

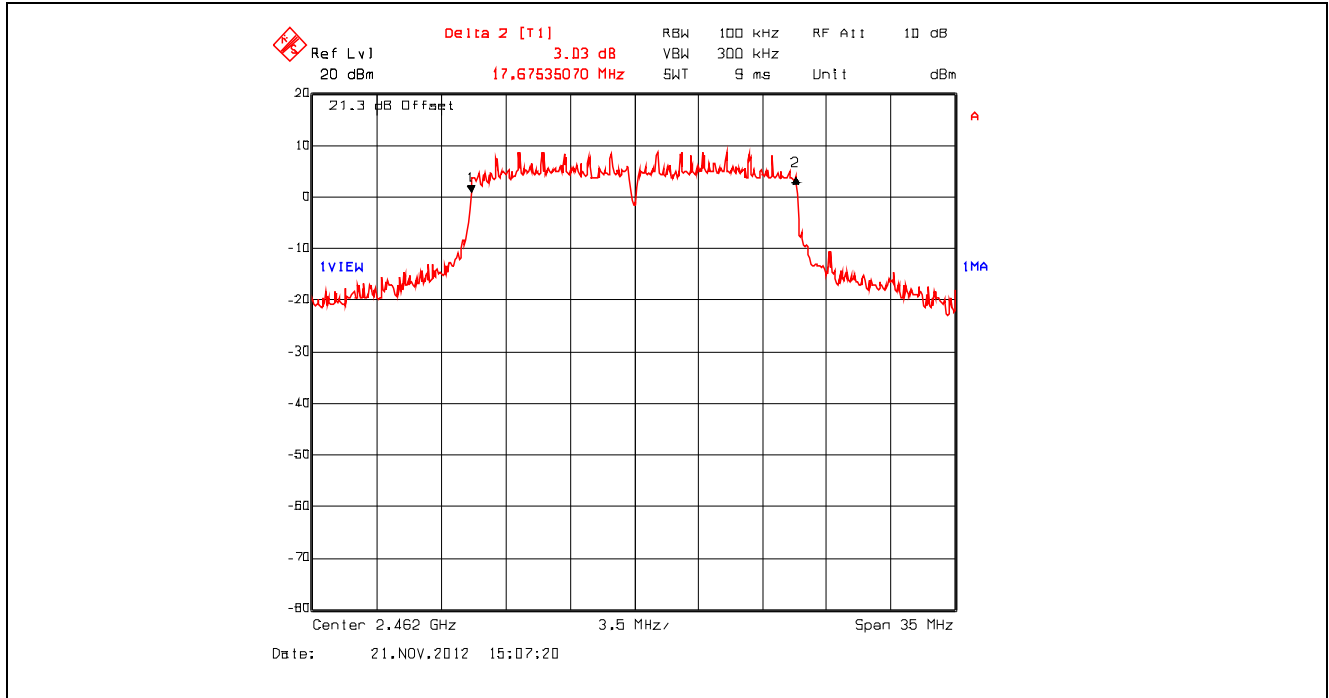


Plot 5.2.4.34. 6 dB Bandwidth, 802.11n 400ns, 7.2 Mbps BPSK1/2, 2412 MHz, Setting 23

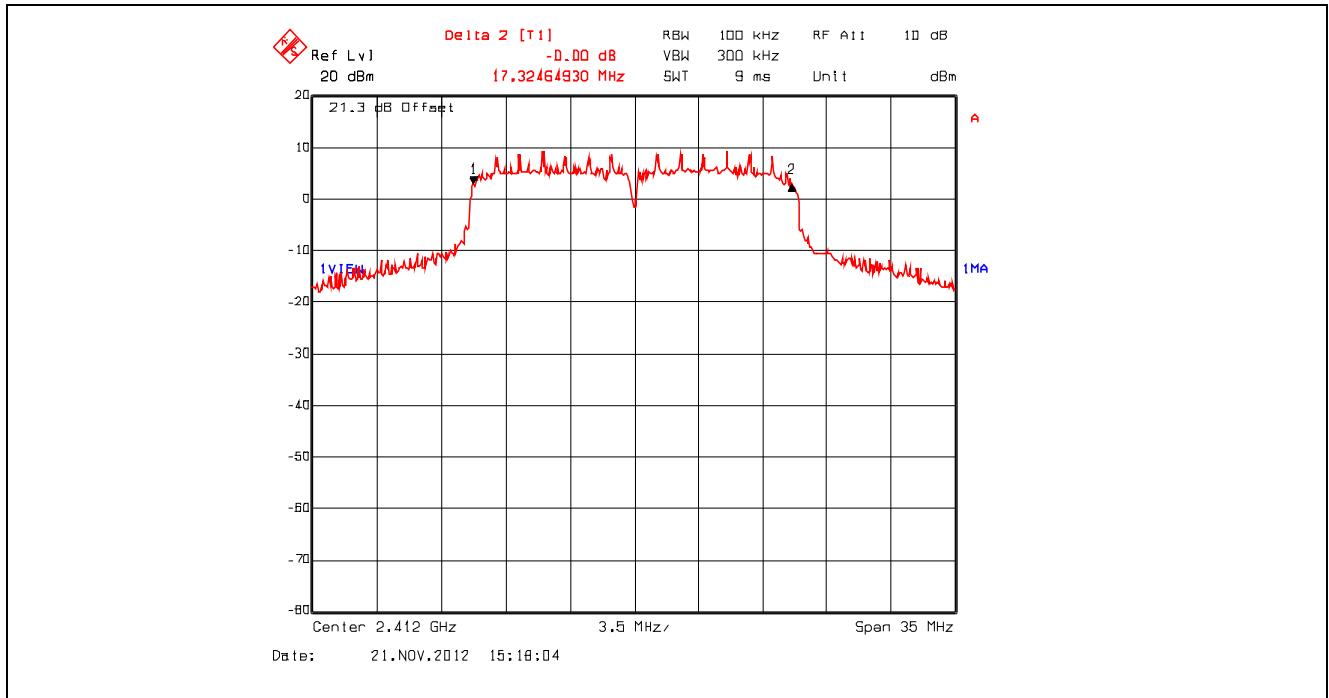

Plot 5.2.4.35. 6 dB Bandwidth, 802.11n 400ns, 7.2 Mbps BPSK1/2, 2442 MHz, Setting 23

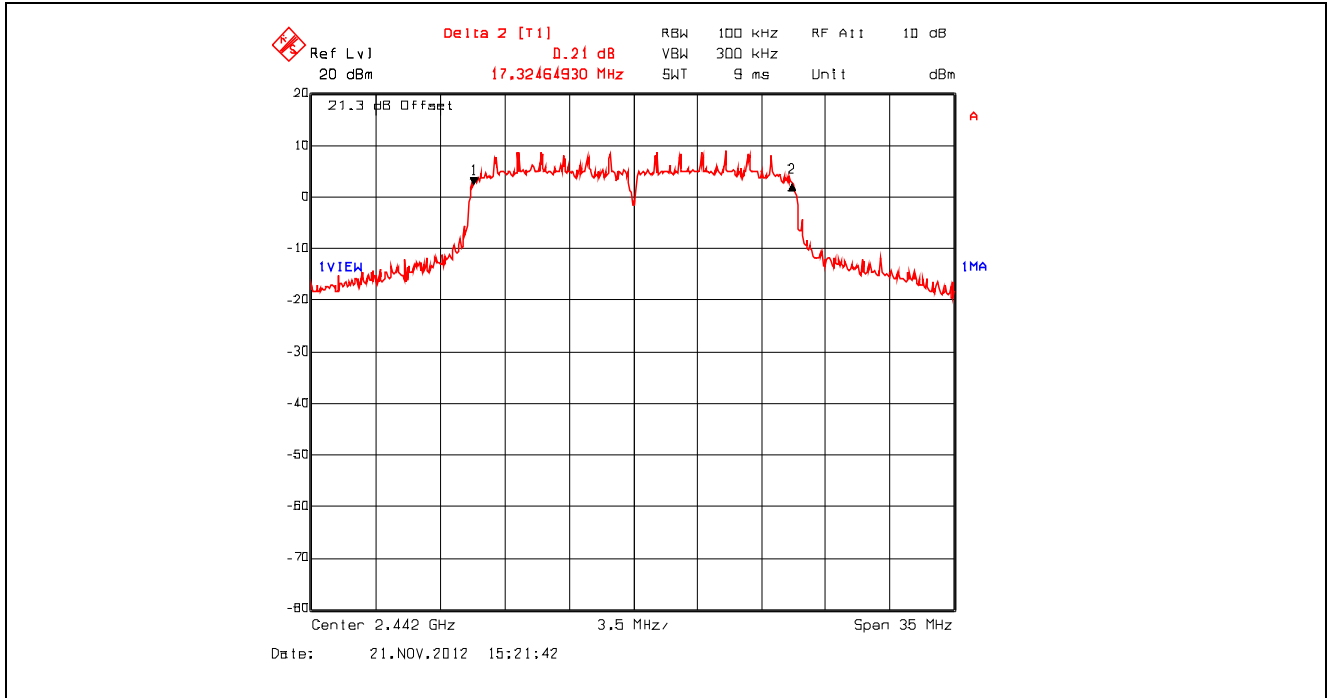


Plot 5.2.4.36. 6 dB Bandwidth, 802.11n 400ns, 7.2 Mbps BPSK1/2, 2462 MHz, Setting 23

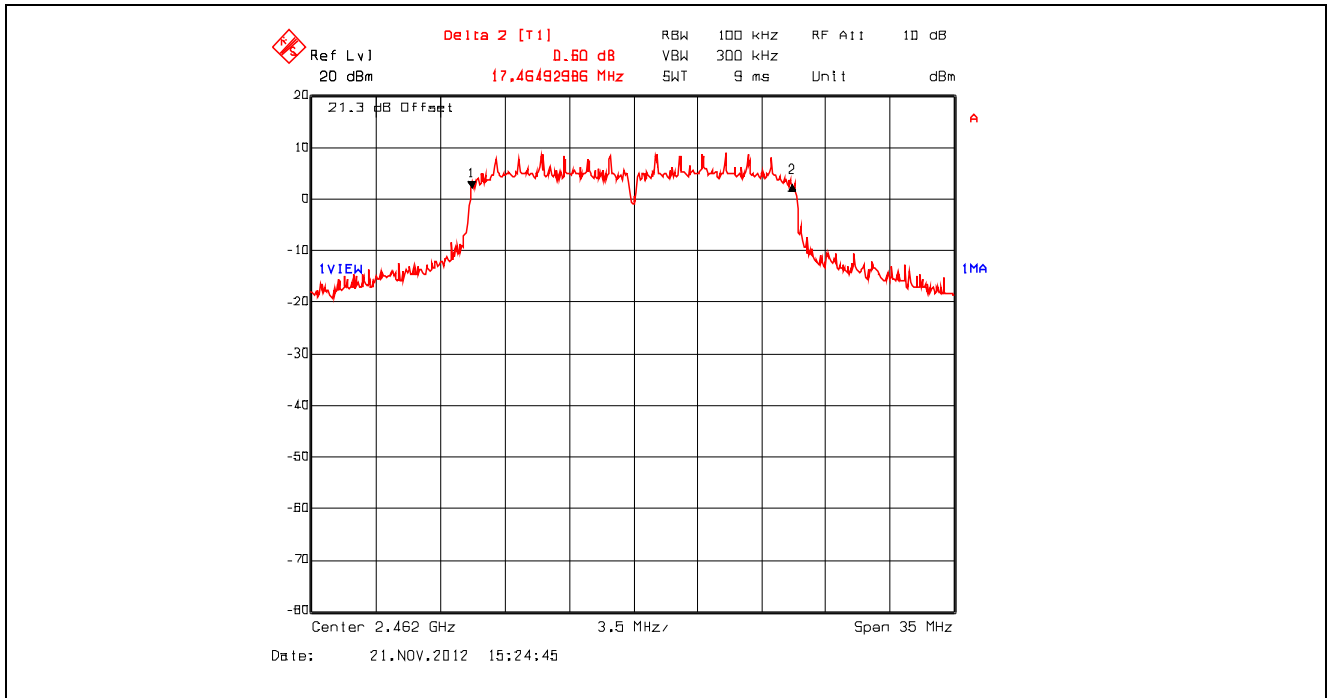





Plot 5.2.4.37. 6 dB Bandwidth, 802.11n 400ns, 21.7 Mbps QPSK 3/4, 2412 MHz, Setting 23

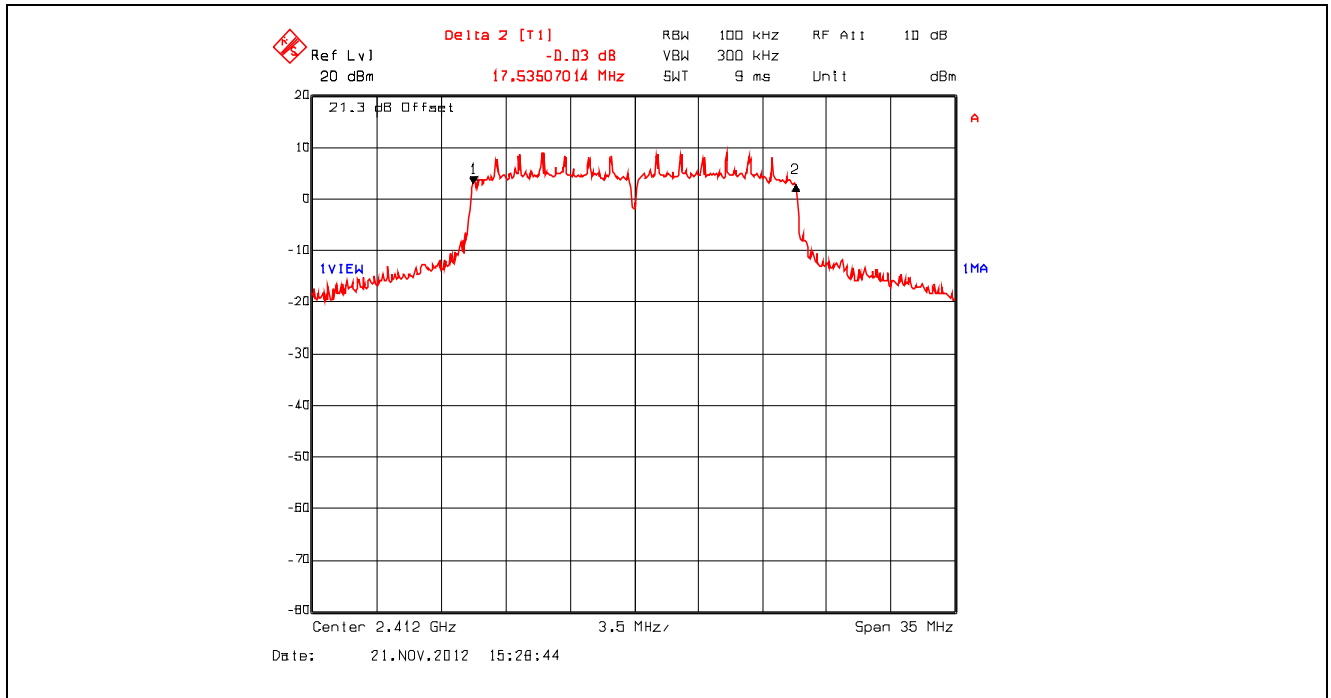


Plot 5.2.4.38. 6 dB Bandwidth, 802.11n 400ns, 21.7 Mbps QPSK 3/4, 2442 MHz, Setting 23

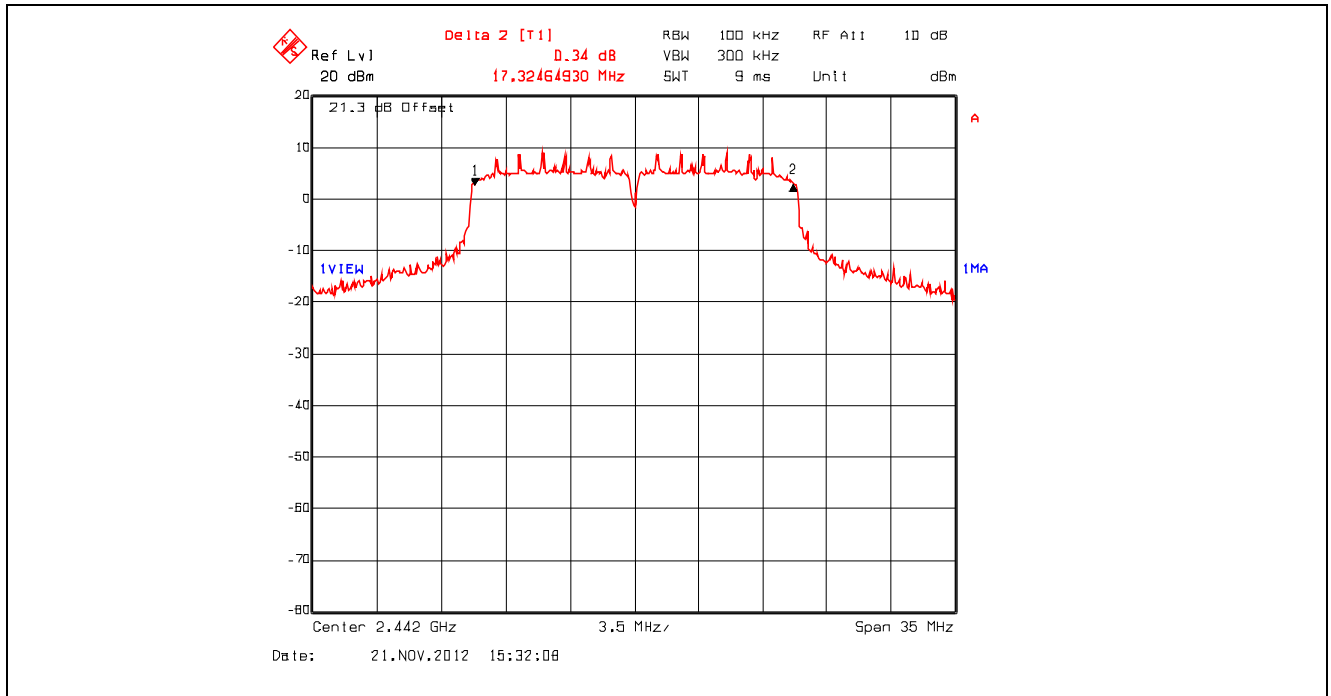


Plot 5.2.4.39. 6 dB Bandwidth, 802.11n 400ns, 21.7 Mbps QPSK 3/4, 2462 MHz, Setting 23

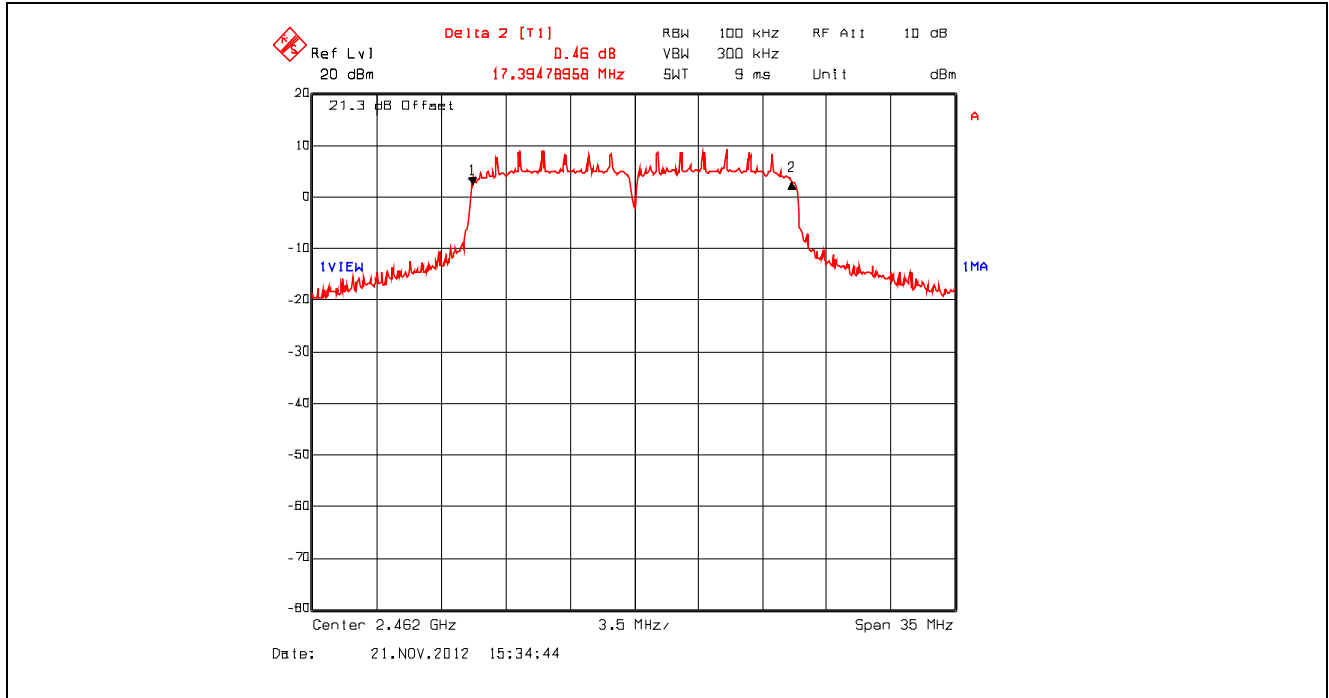


Plot 5.2.4.40. 6 dB Bandwidth, 802.11n 400ns, 43.3 Mbps 16-QAM 3/4, 2412 MHz, Setting 23

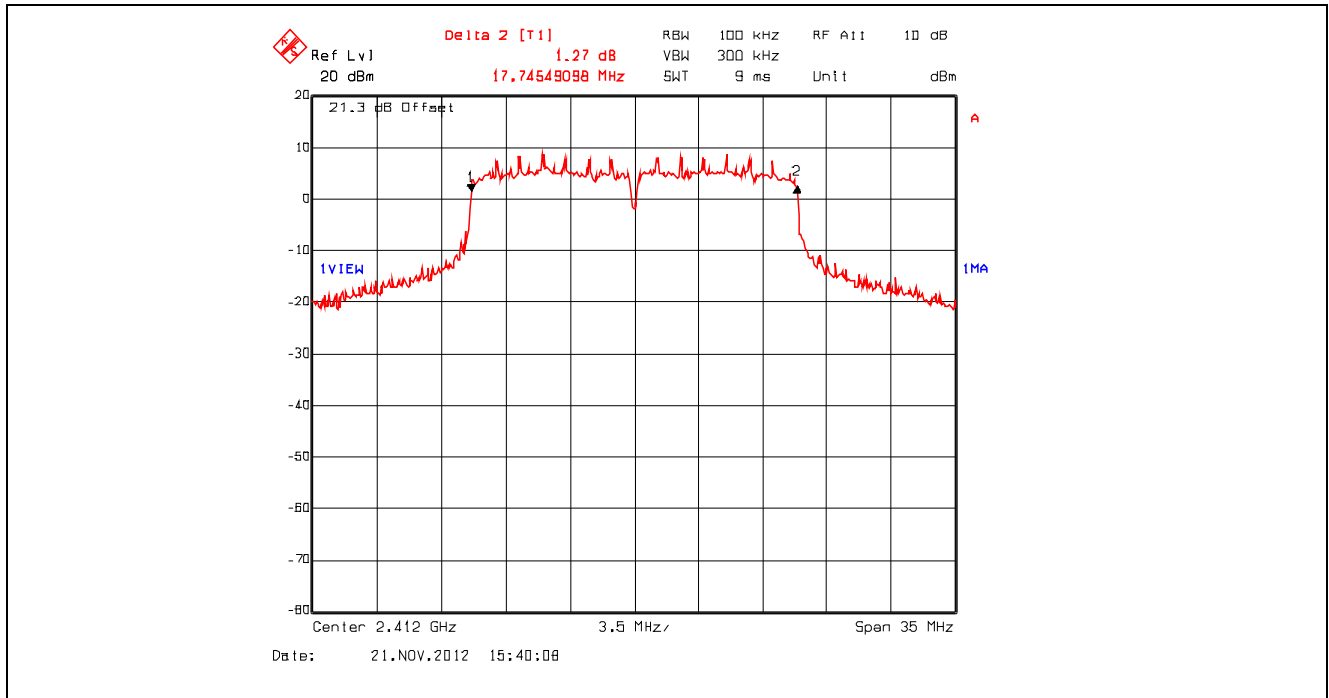


Plot 5.2.4.41. 6 dB Bandwidth, 802.11n 400ns, 43.3 Mbps 16-QAM 3/4, 2442 MHz, Setting 23

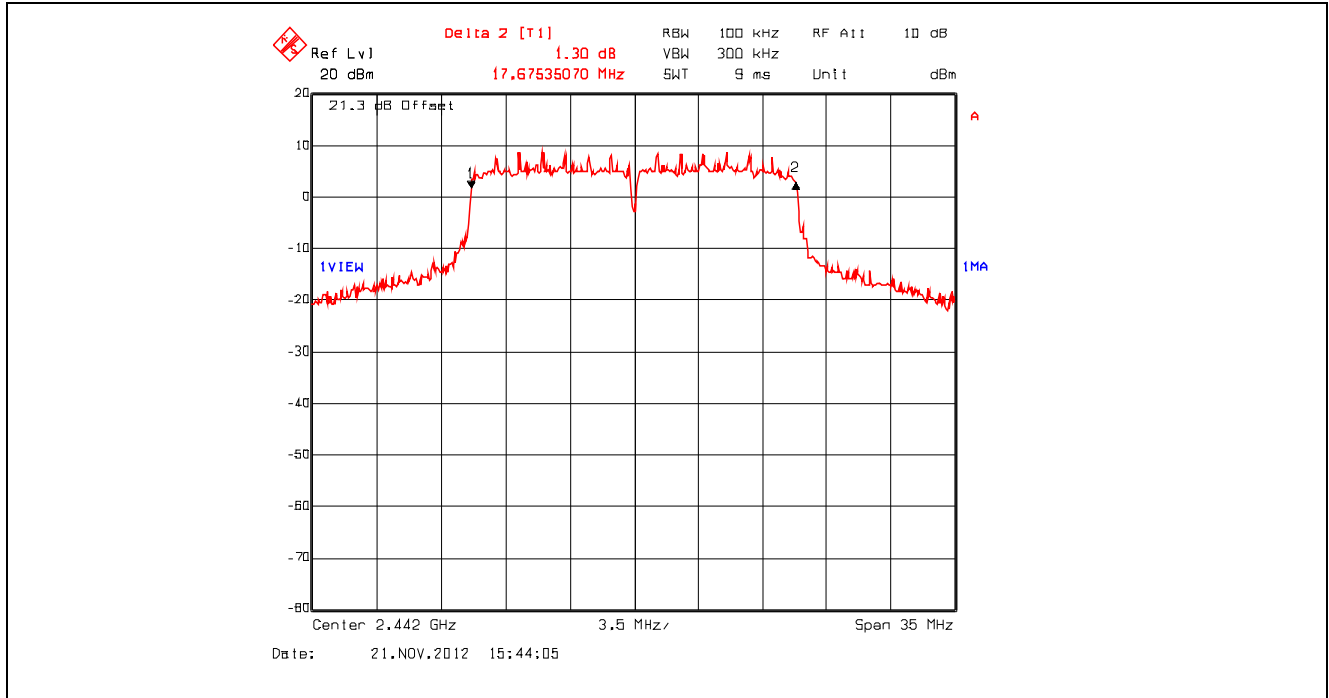


Plot 5.2.4.42. 6 dB Bandwidth, 802.11n 400ns, 43.3 Mbps 16-QAM 3/4, 2462 MHz, Setting 23

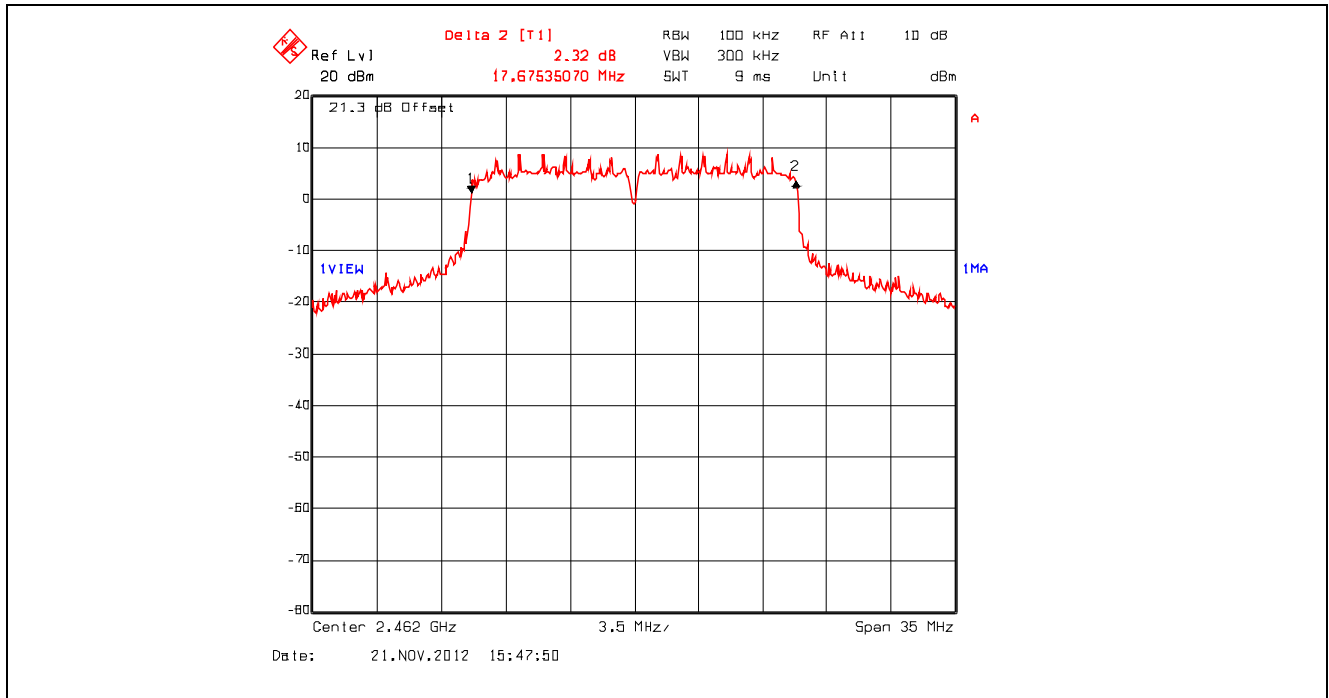


Plot 5.2.4.43. 6 dB Bandwidth, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6, 2412 MHz, Setting 23

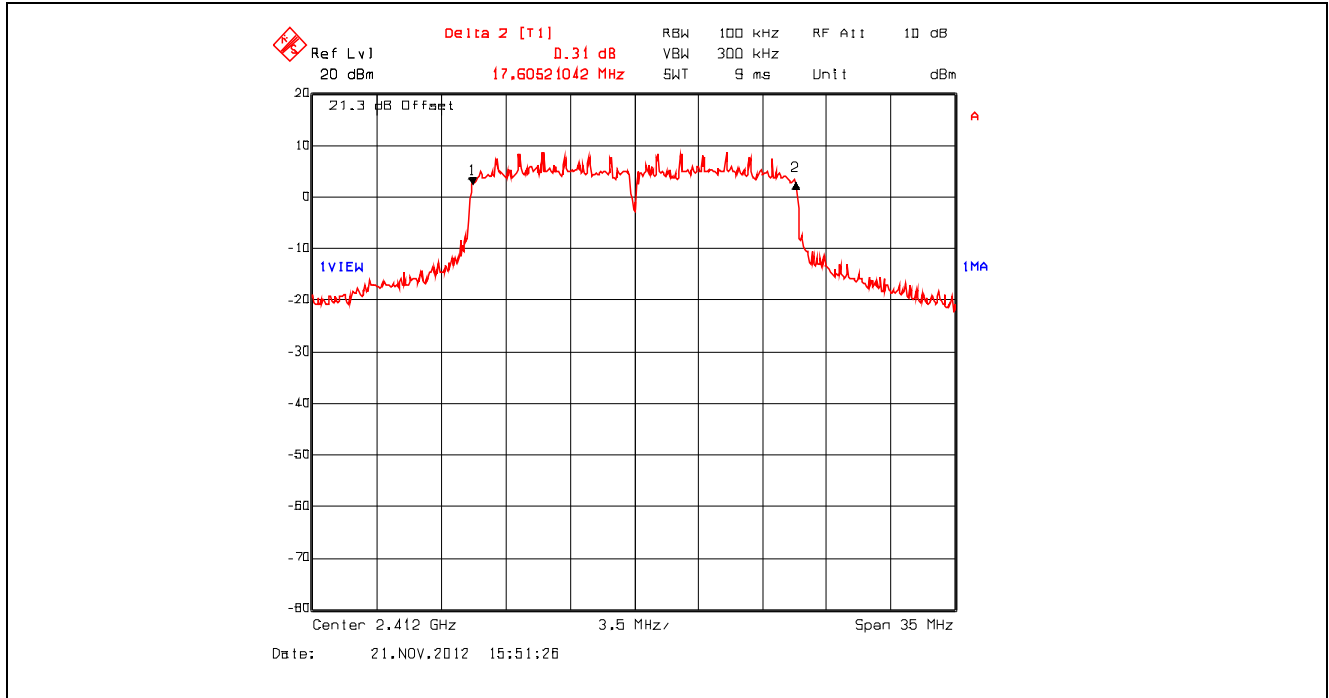


Plot 5.2.4.44. 6 dB Bandwidth, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6, 2442 MHz, Setting 23

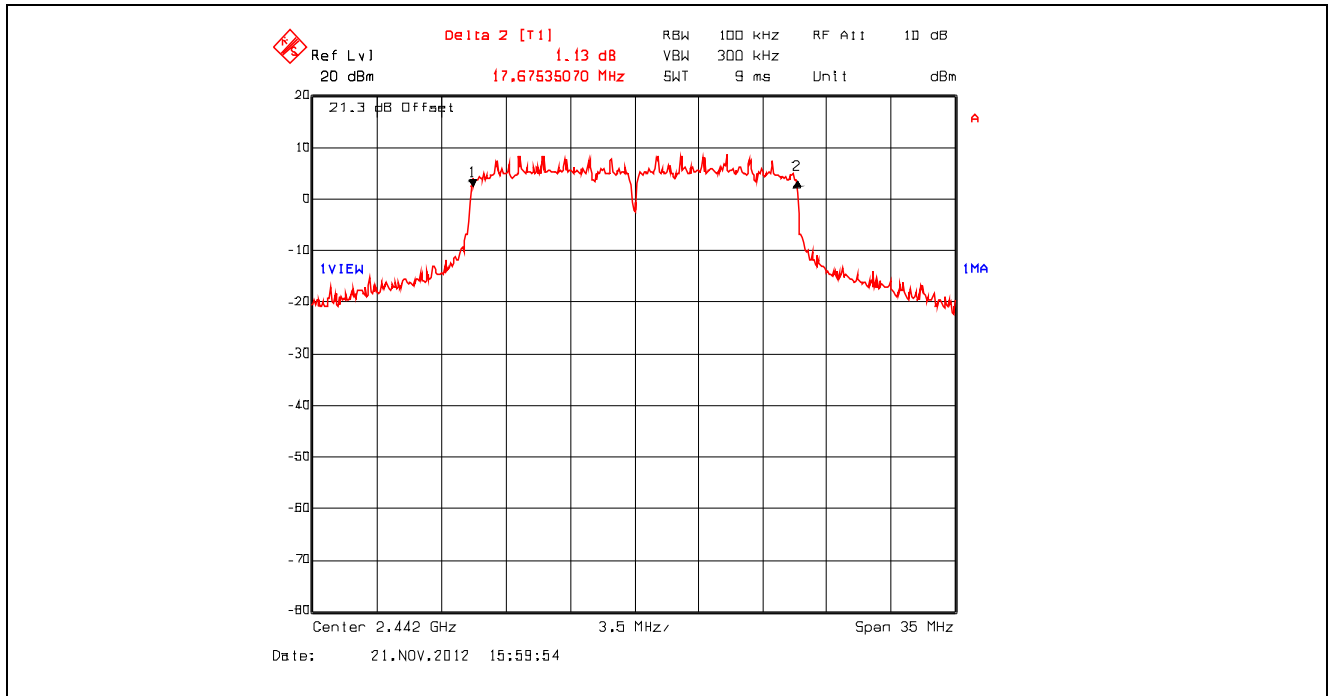


Plot 5.2.4.45. 6 dB Bandwidth, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6, 2462 MHz, Setting 23

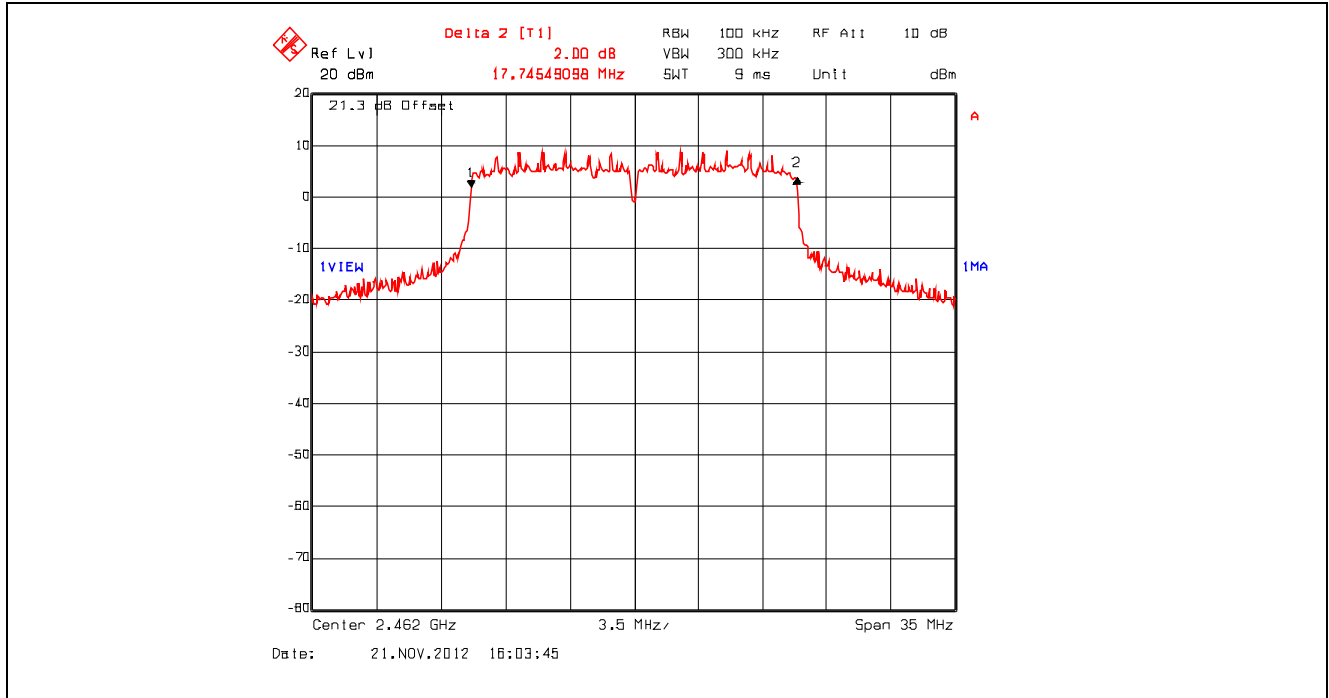


Plot 5.2.4.46. 99% Occupied Bandwidth, 802.11b, 1 Mbps DBPSK, 2412 MHz, Setting 23

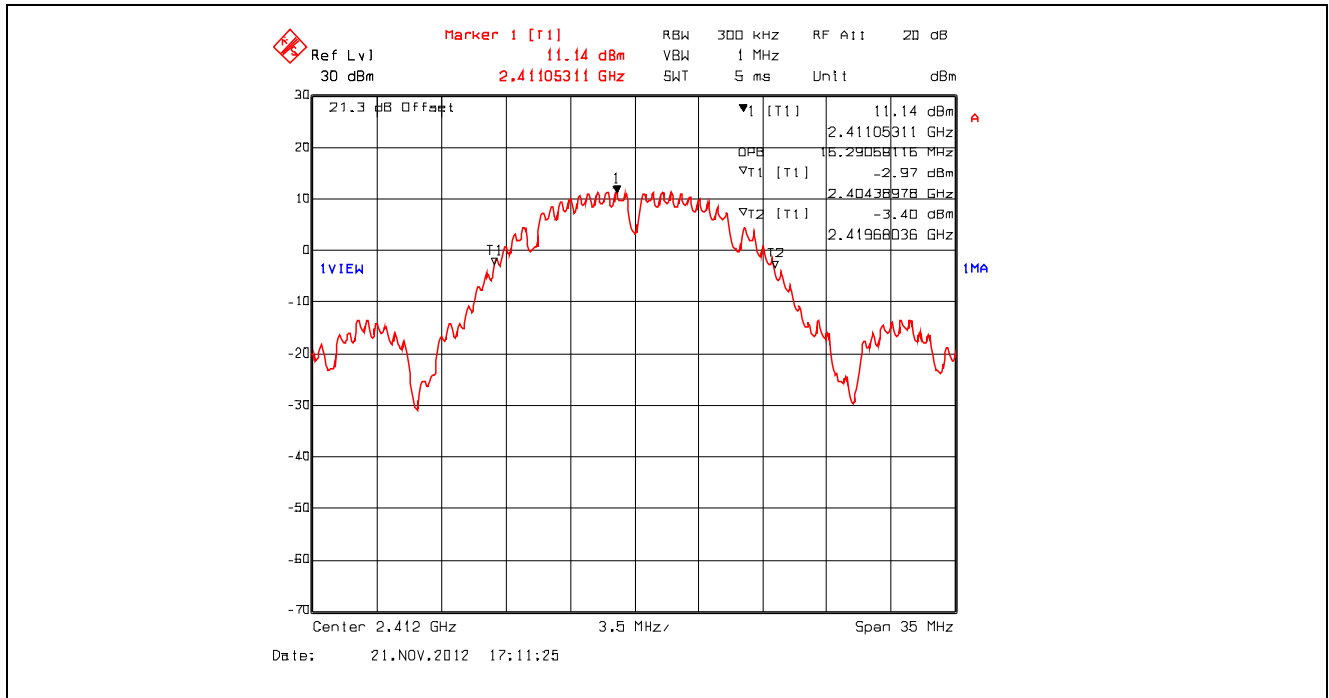


Plot 5.2.4.47. 99% Occupied Bandwidth, 802.11b, 1 Mbps DBPSK, 2442 MHz, Setting 23

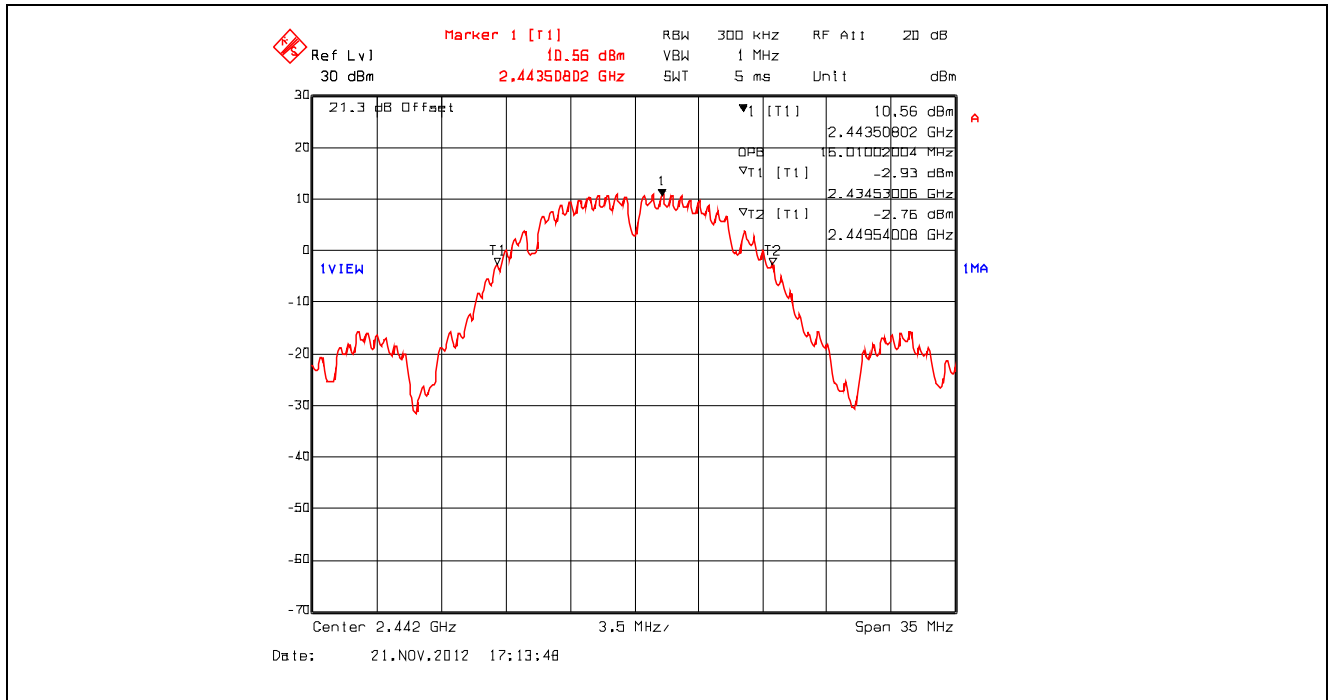


Plot 5.2.4.48. 99% Occupied Bandwidth, 802.11b, 1 Mbps DBPSK, 2462 MHz, Setting 23

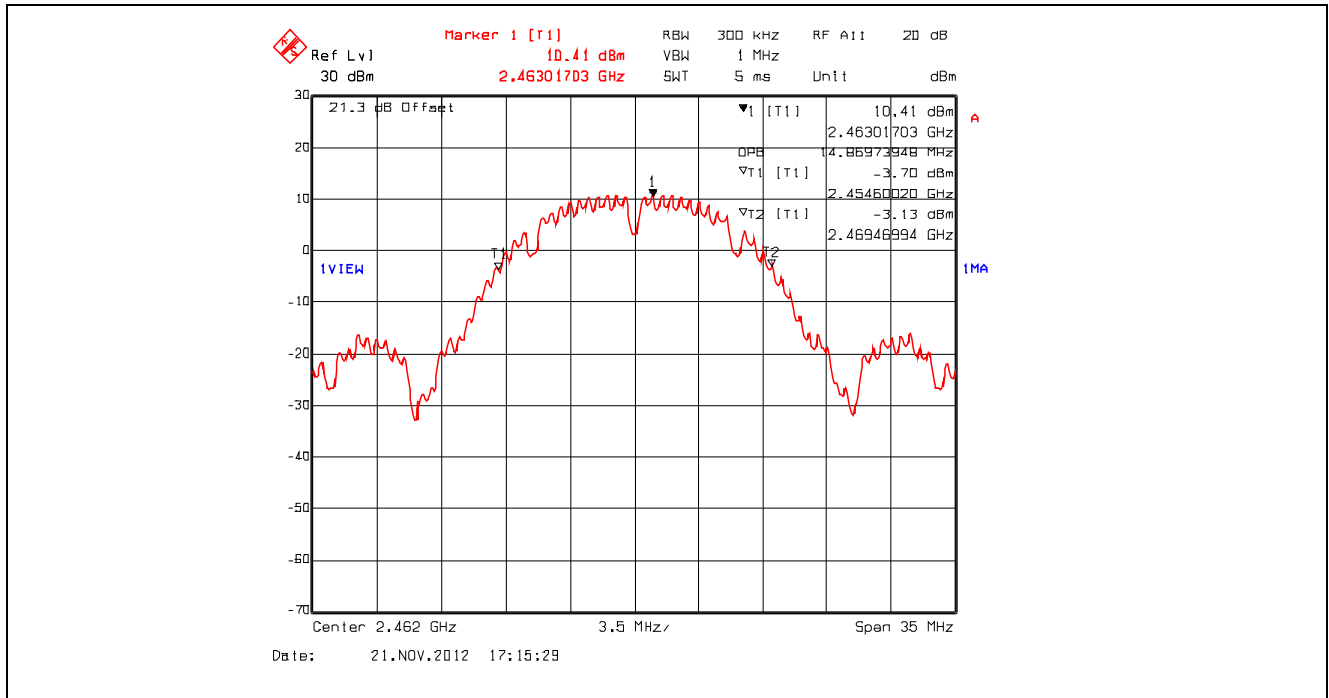


Plot 5.2.4.49. 99% Occupied Bandwidth, 802.11b, 2 Mbps DQPSK, 2412 MHz, Setting 23

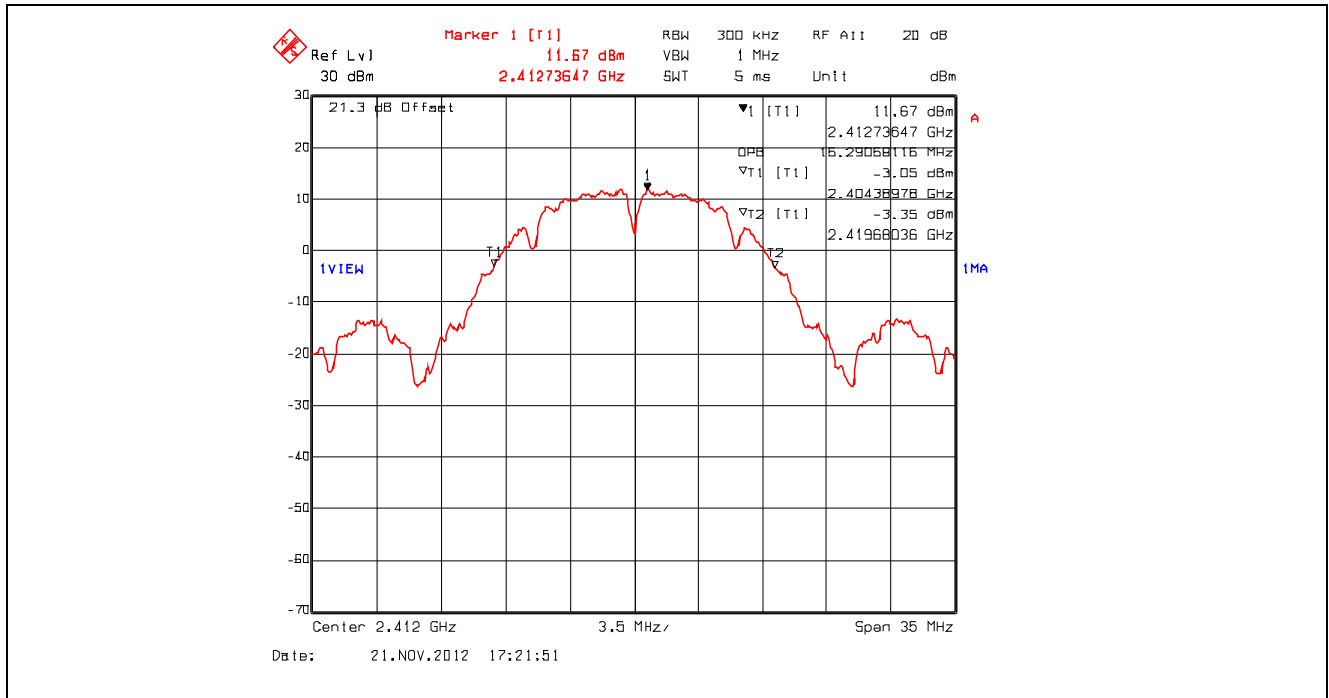


Plot 5.2.4.50. 99% Occupied Bandwidth, 802.11b, 2 Mbps DQPSK, 2442 MHz, Setting 23

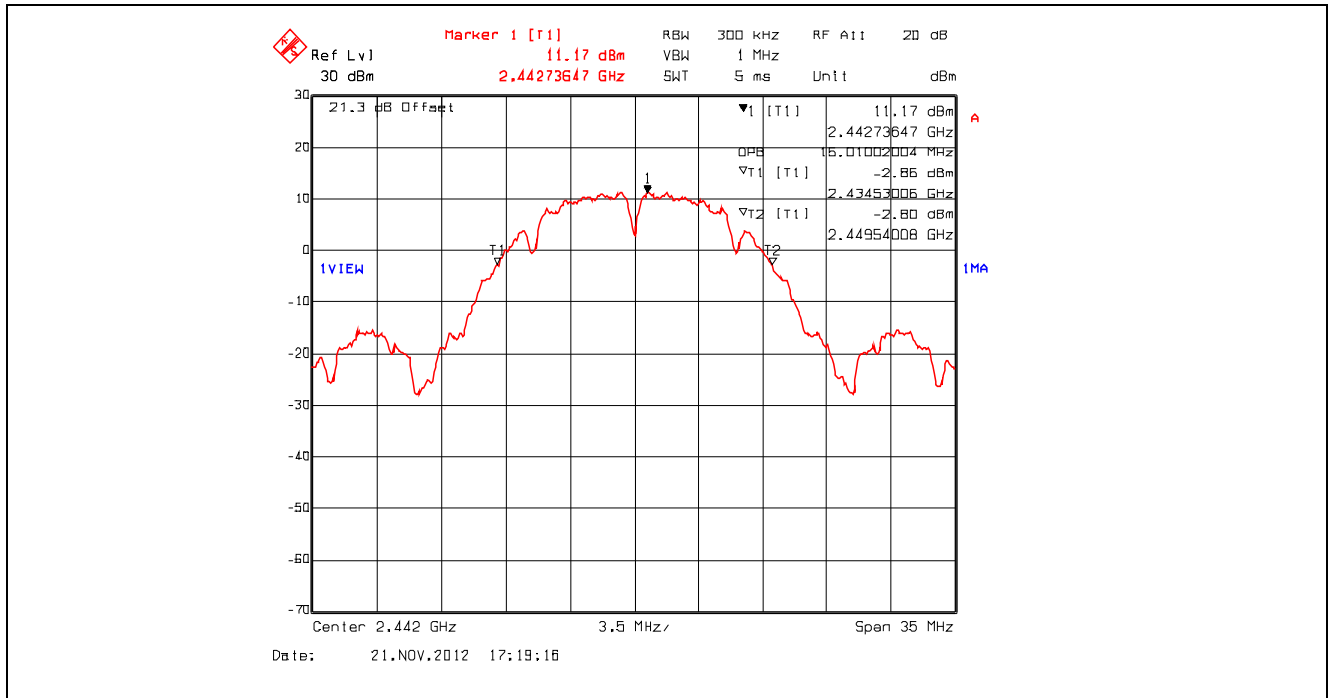

Plot 5.2.4.51. 99% Occupied Bandwidth, 802.11b, 2 Mbps DQPSK, 2462 MHz, Setting 23

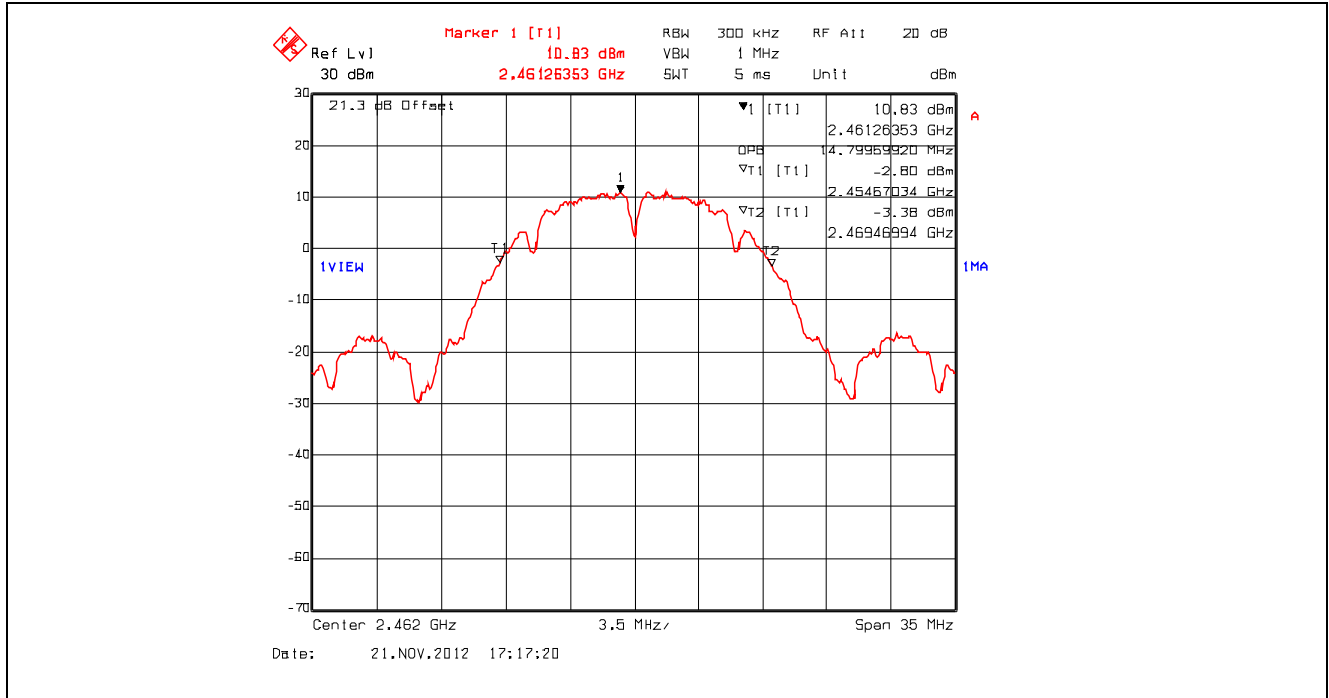


Plot 5.2.4.52. 99% Occupied Bandwidth, 802.11b, 11 Mbps CCK, 2412 MHz, Setting 23

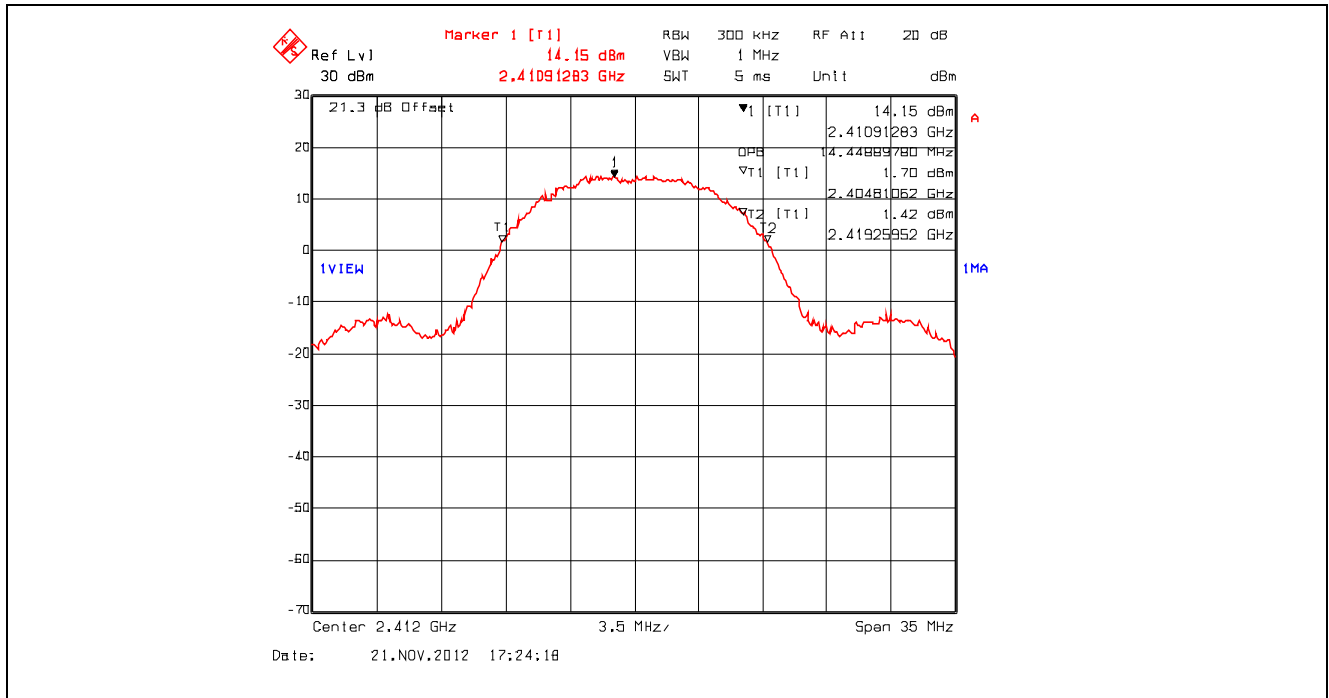





Plot 5.2.4.53. 99% Occupied Bandwidth, 802.11b, 11 Mbps CCK, 2442 MHz, Setting 23

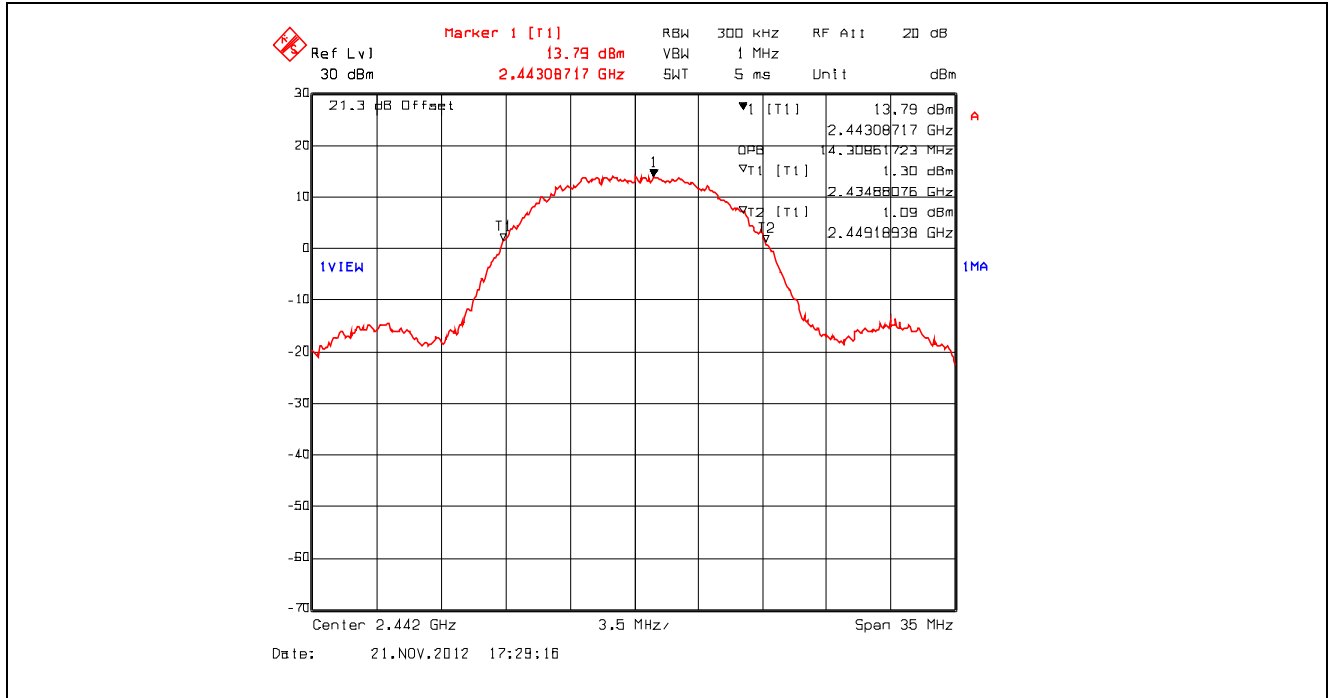


Plot 5.2.4.54. 99% Occupied Bandwidth, 802.11b, 11 Mbps CCK, 2462 MHz, Setting 23

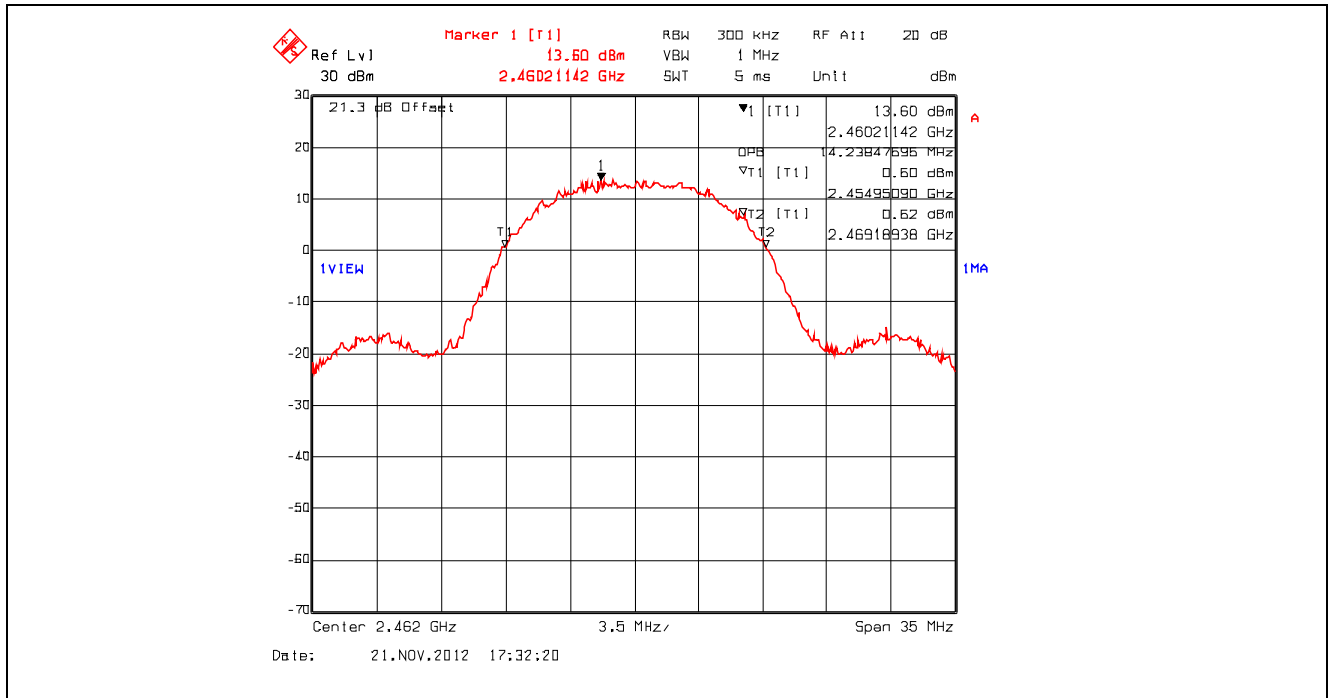


Plot 5.2.4.55. 99% Occupied Bandwidth, 802.11g, 9 Mbps BPSK, 2412 MHz, Setting 23

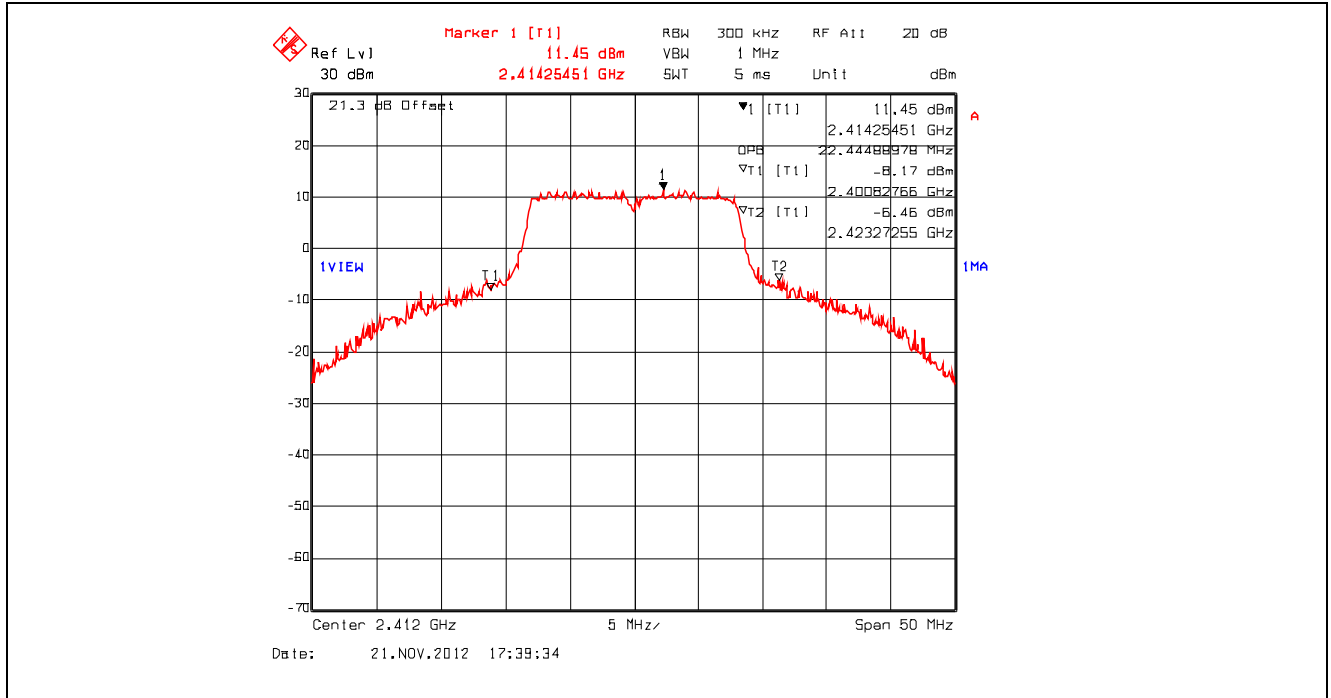


Plot 5.2.4.56. 99% Occupied Bandwidth, 802.11g, 9 Mbps BPSK, 2442 MHz, Setting 23

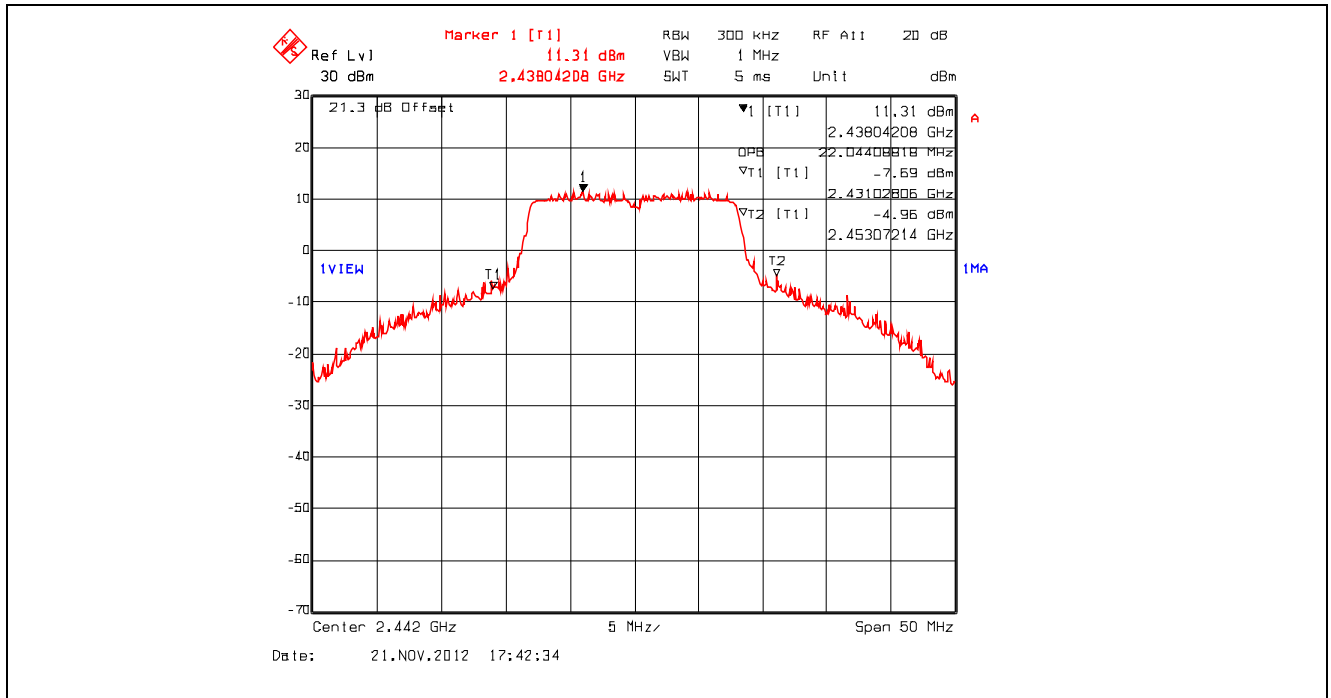


Plot 5.2.4.57. 99% Occupied Bandwidth, 802.11g, 9 Mbps BPSK, 2462 MHz, Setting 23

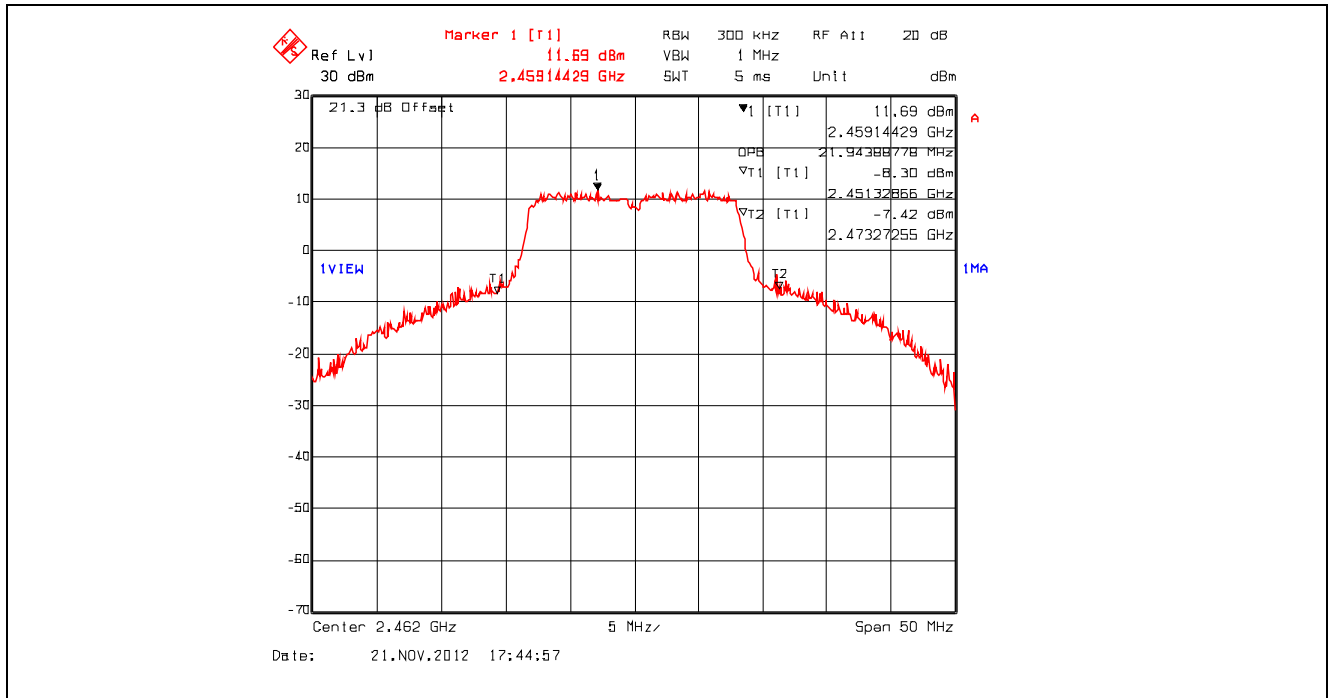


Plot 5.2.4.58. 99% Occupied Bandwidth, 802.11g, 18 Mbps QPSK, 2412 MHz, Setting 23

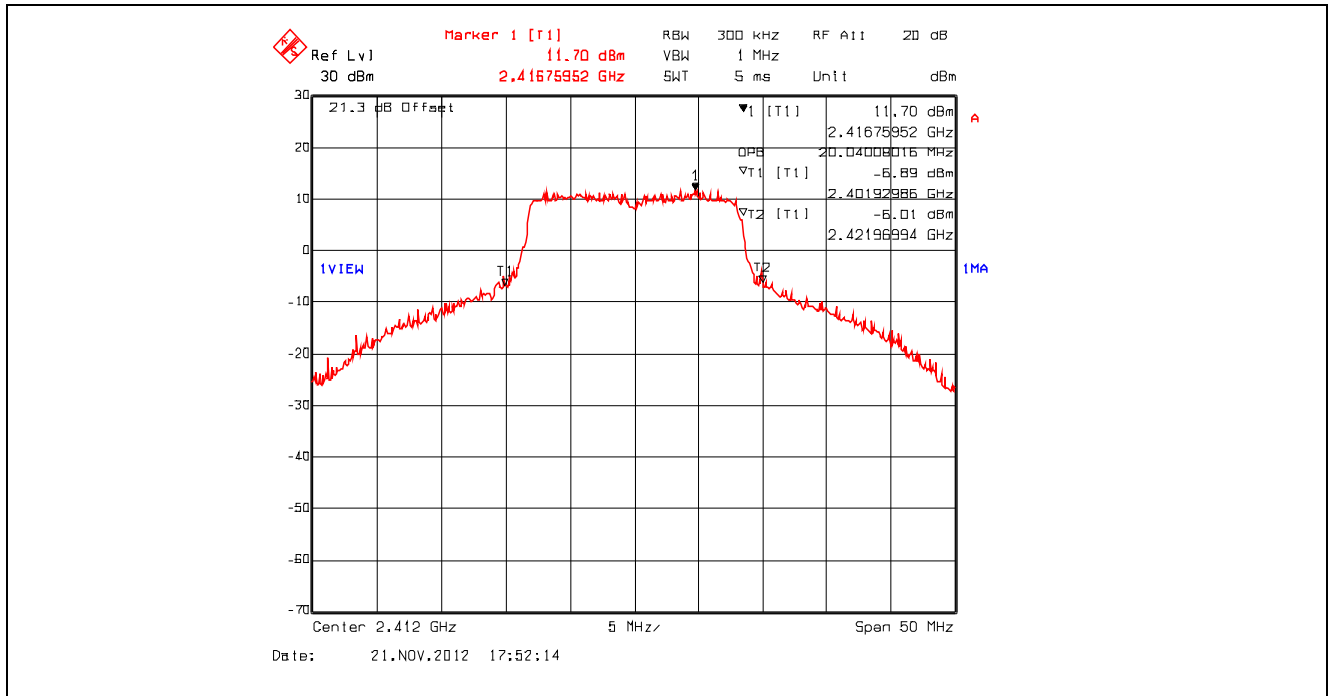


Plot 5.2.4.59. 99% Occupied Bandwidth, 802.11g, 18 Mbps QPSK, 2442 MHz, Setting 23

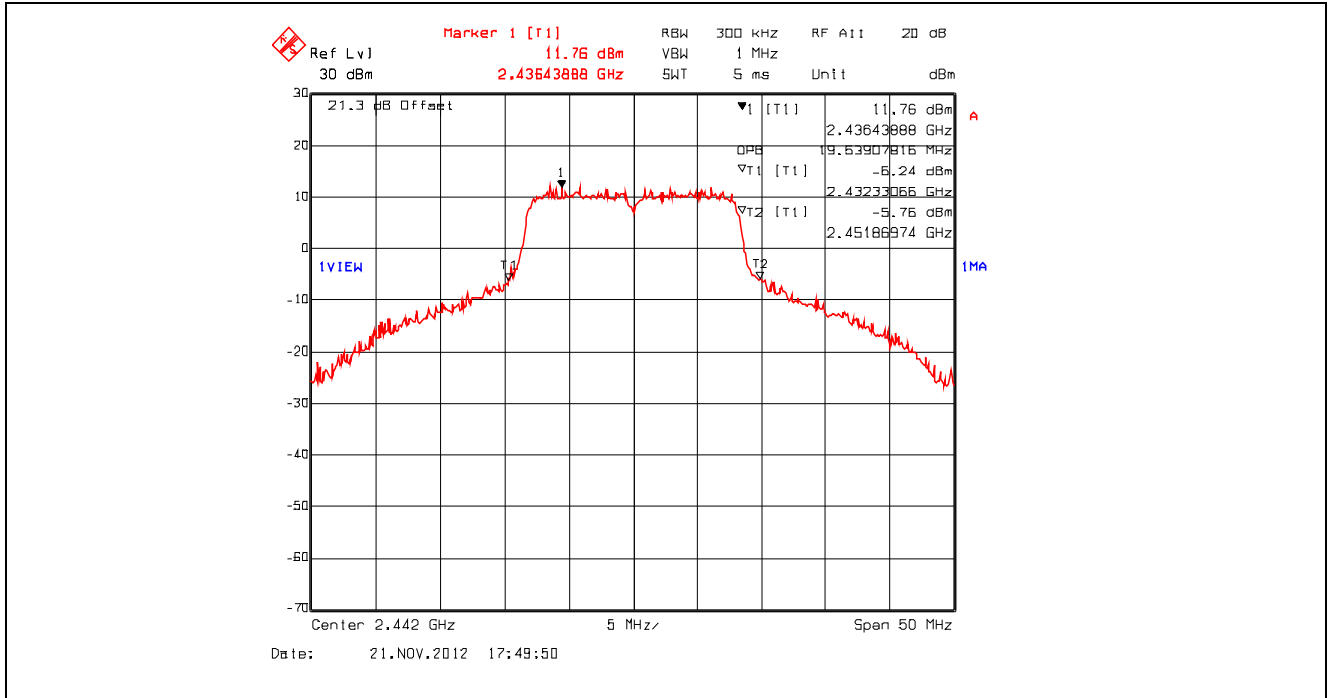


Plot 5.2.4.60. 99% Occupied Bandwidth, 802.11g, 18 Mbps QPSK, 2462 MHz, Setting 23

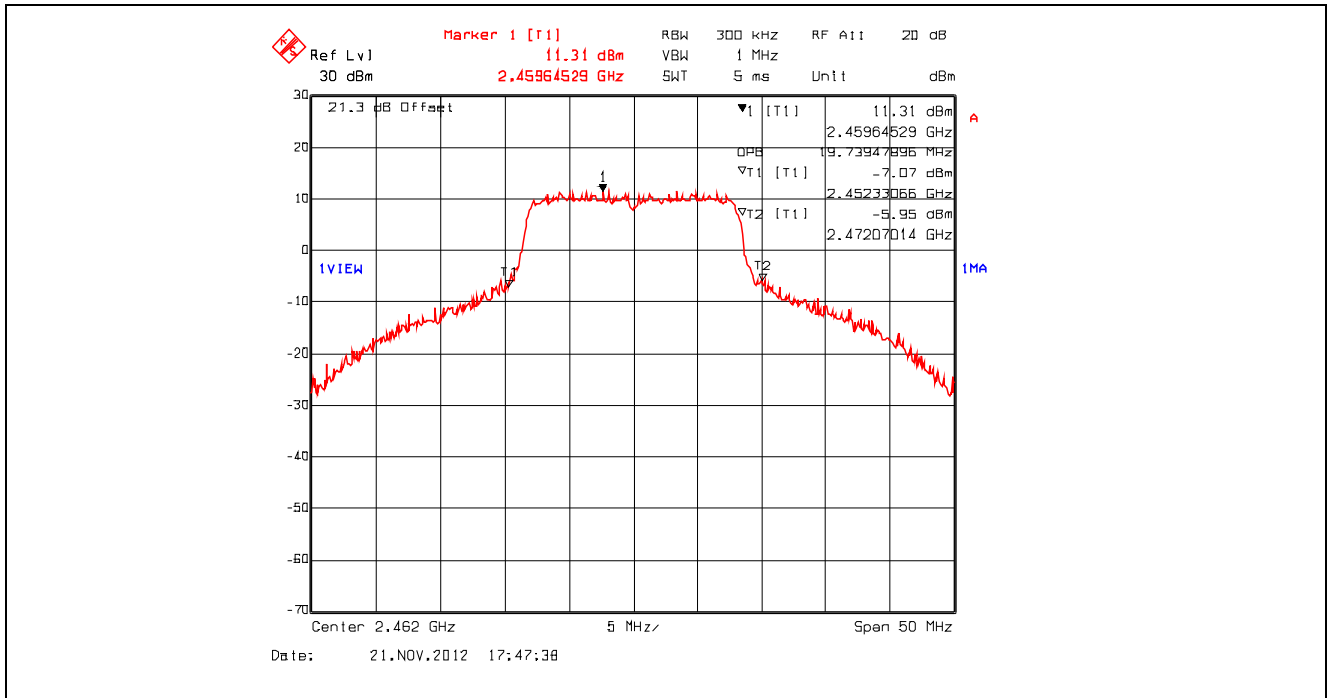


Plot 5.2.4.61. 99% Occupied Bandwidth, 802.11g, 36 Mbps 16-QAM, 2412 MHz, Setting 23

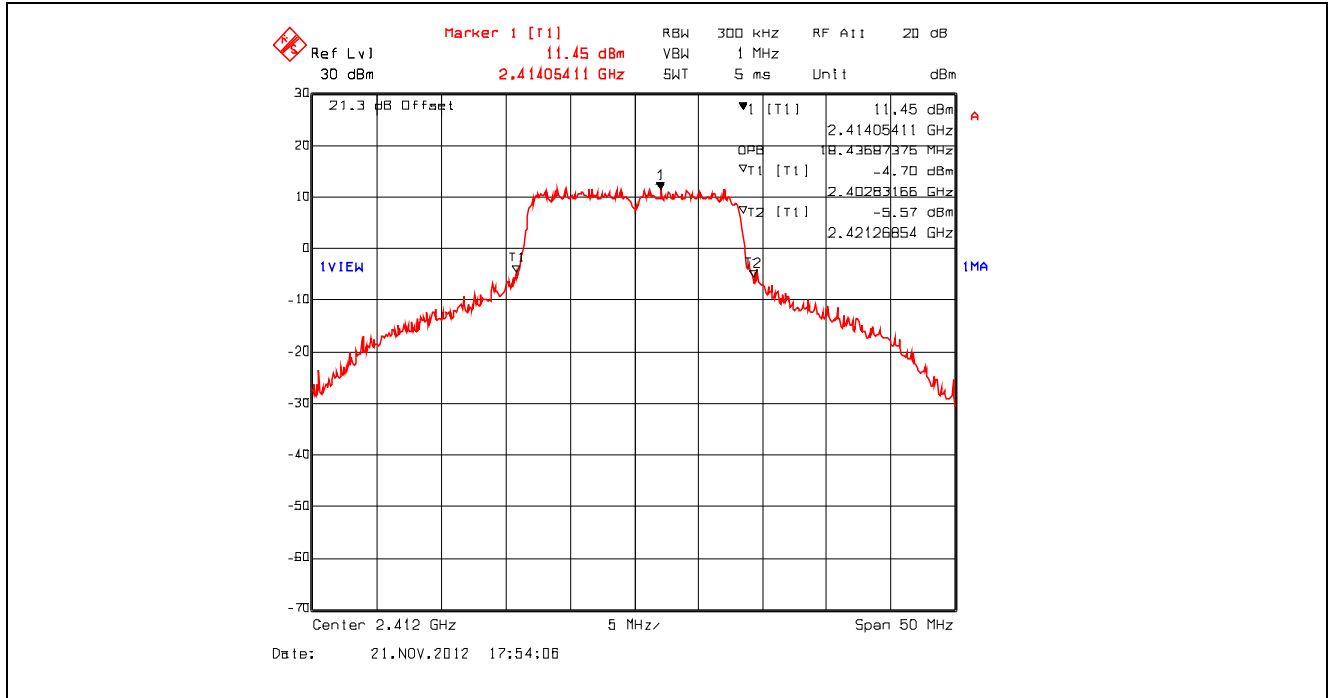


Plot 5.2.4.62. 99% Occupied Bandwidth, 802.11g, 36 Mbps 16-QAM, 2442 MHz, Setting 23

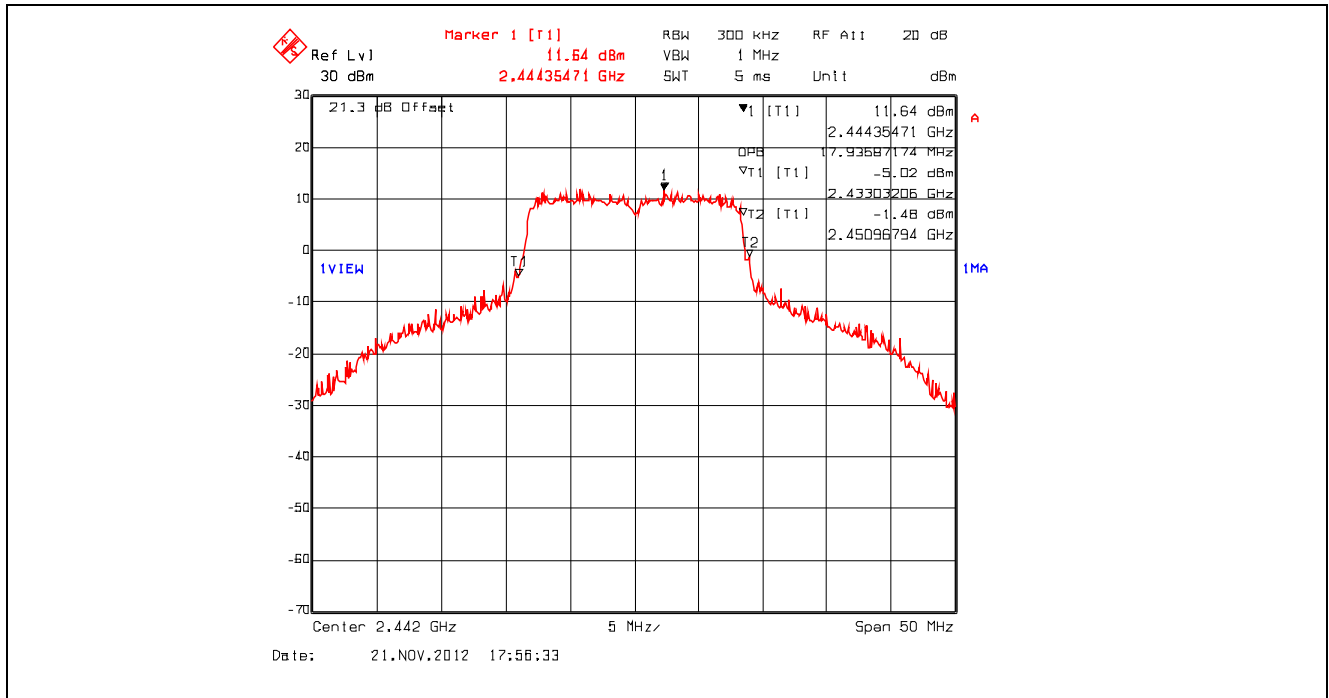


Plot 5.2.4.63. 99% Occupied Bandwidth, 802.11g, 36 Mbps 16-QAM, 2462 MHz, Setting 23

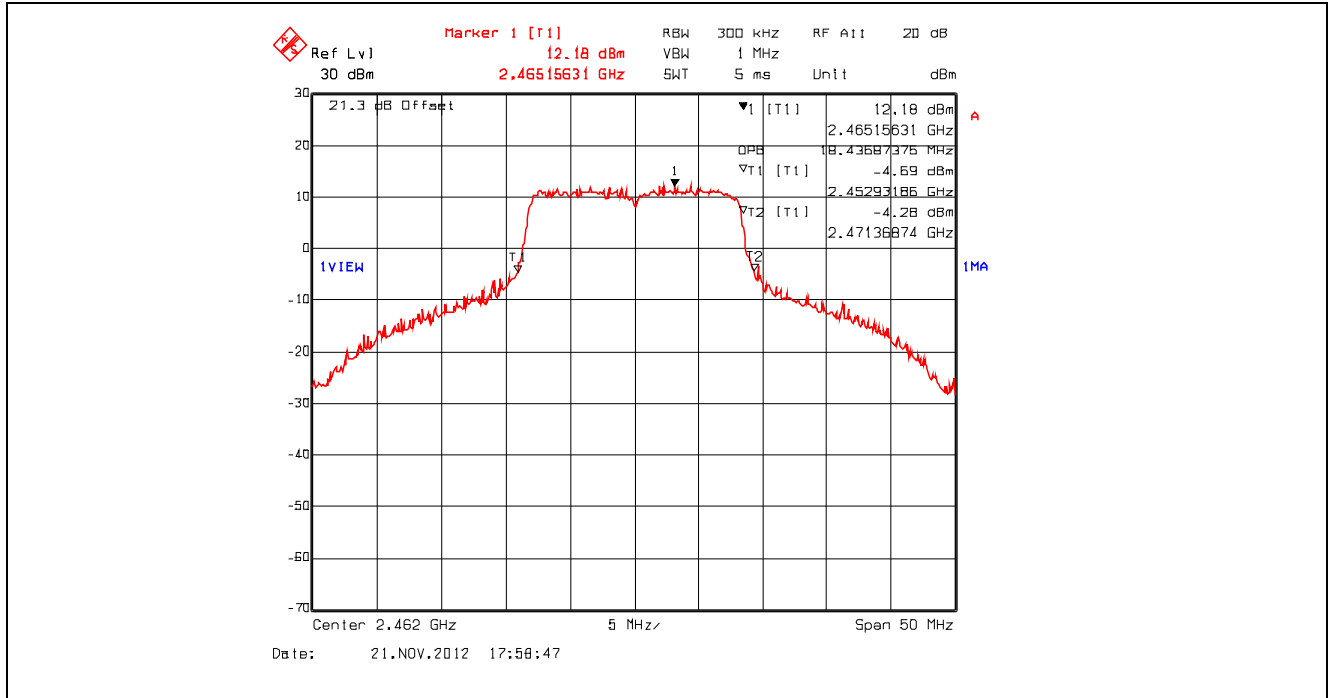


Plot 5.2.4.64. 99% Occupied Bandwidth, 802.11g, 54 Mbps 64-QAM, 2412 MHz, Setting 23

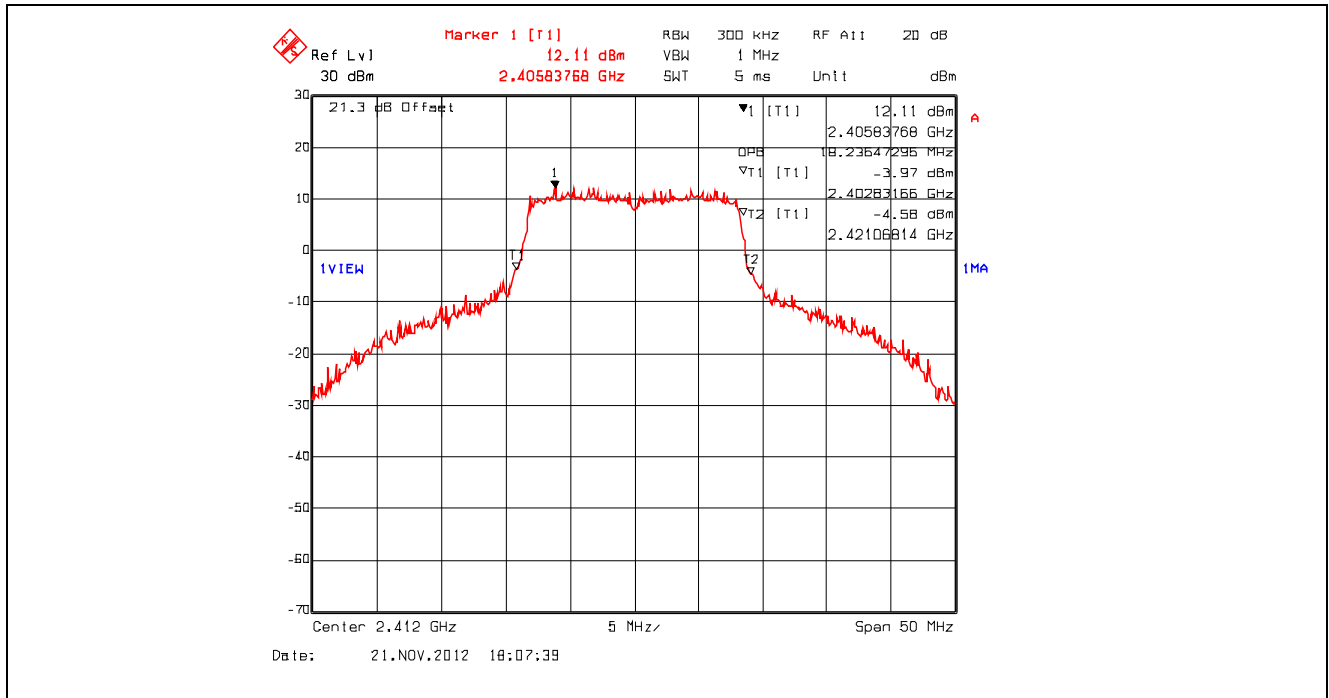


Plot 5.2.4.65. 99% Occupied Bandwidth, 802.11g, 54 Mbps 64-QAM, 2442 MHz, Setting 23

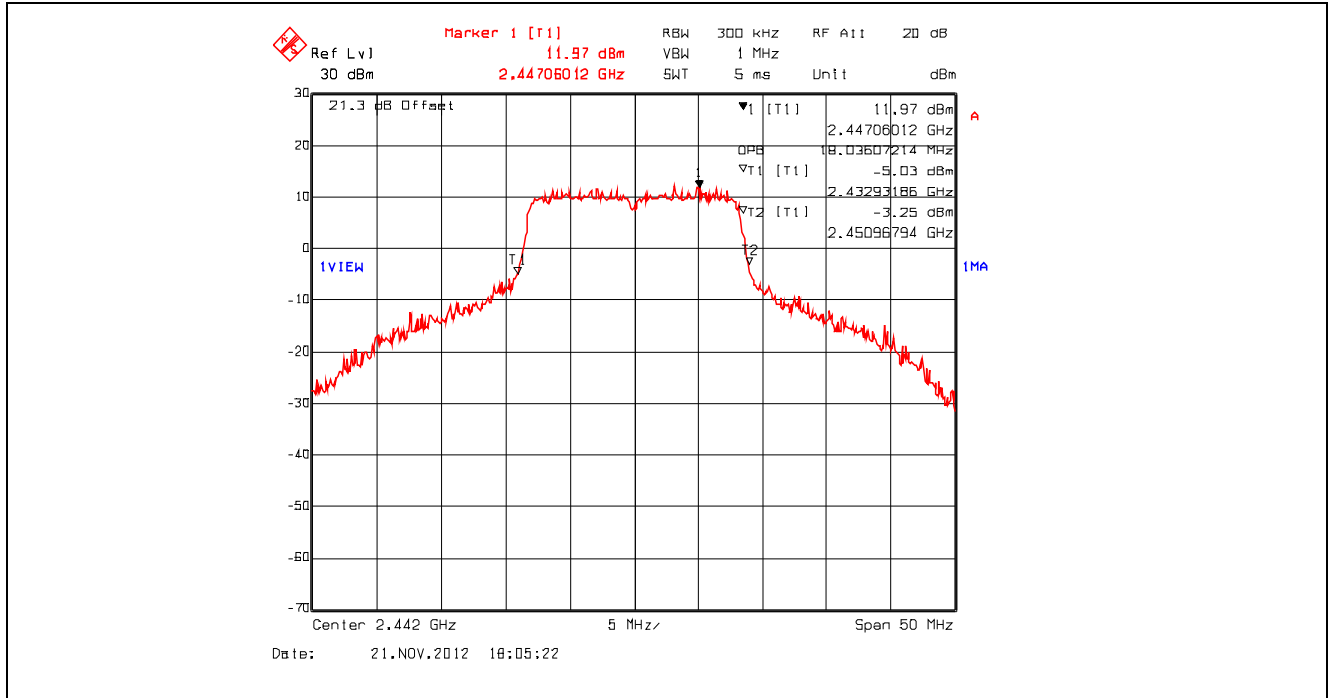


Plot 5.2.4.66. 99% Occupied Bandwidth, 802.11g, 54 Mbps 64-QAM, 2462 MHz, Setting 23

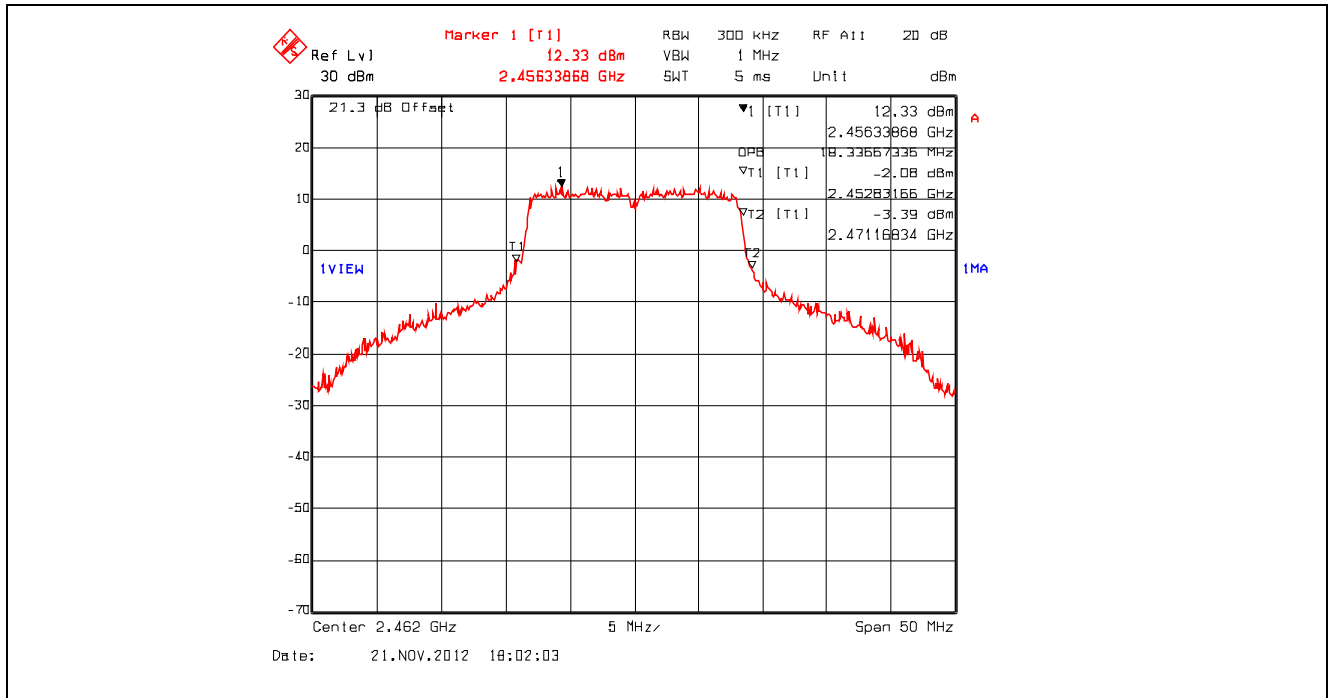

Plot 5.2.4.67. 99% Occupied Bandwidth, 802.11n 800ns, 6.5 Mbps BPSK1/2, 2412 MHz, Setting 23

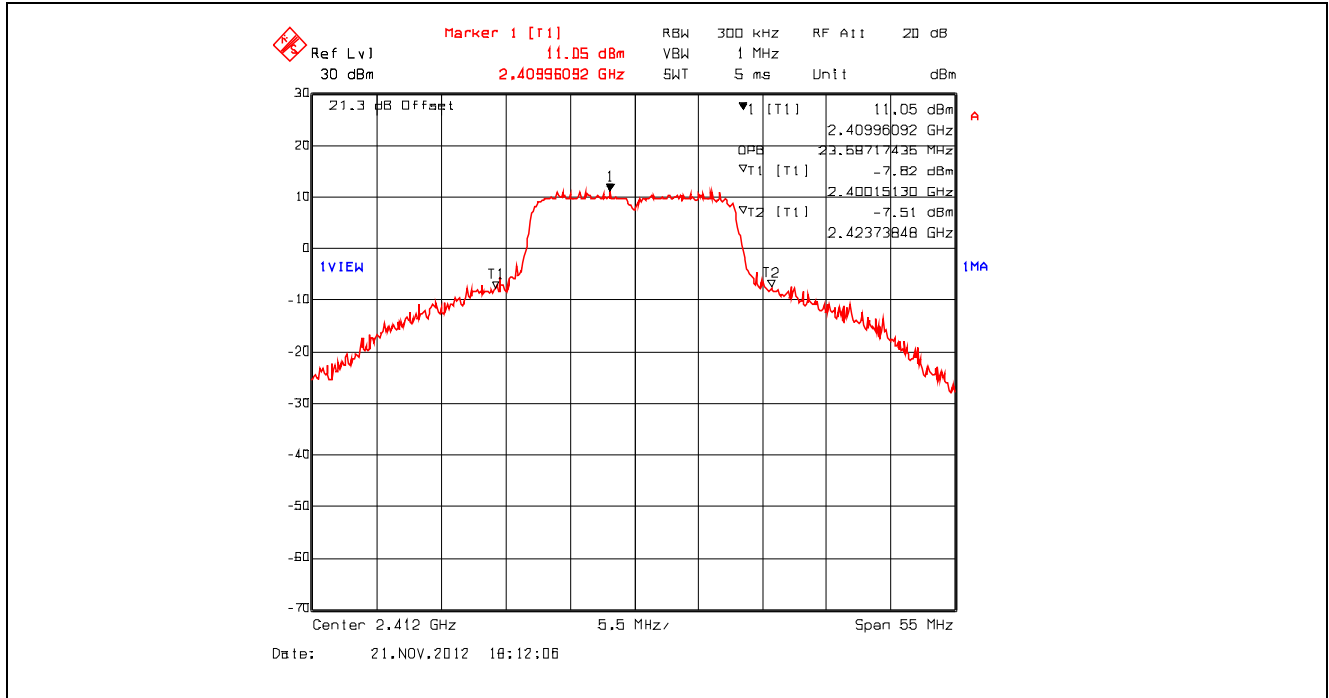


Plot 5.2.4.68. 99% Occupied Bandwidth, 802.11n 800ns, 6.5 Mbps BPSK1/2, 2442 MHz, Setting 23

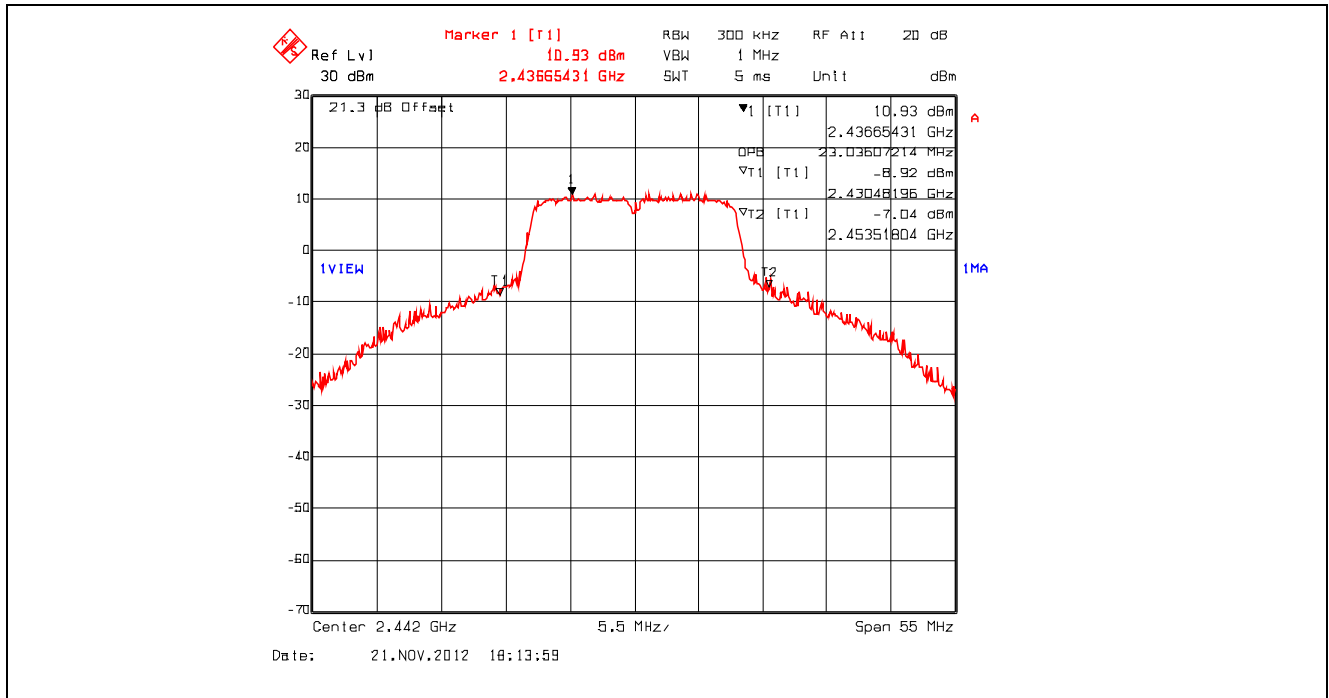





Plot 5.2.4.69. 99% Occupied Bandwidth, 802.11n 800ns, 6.5 Mbps BPSK1/2, 2462 MHz, Setting 23

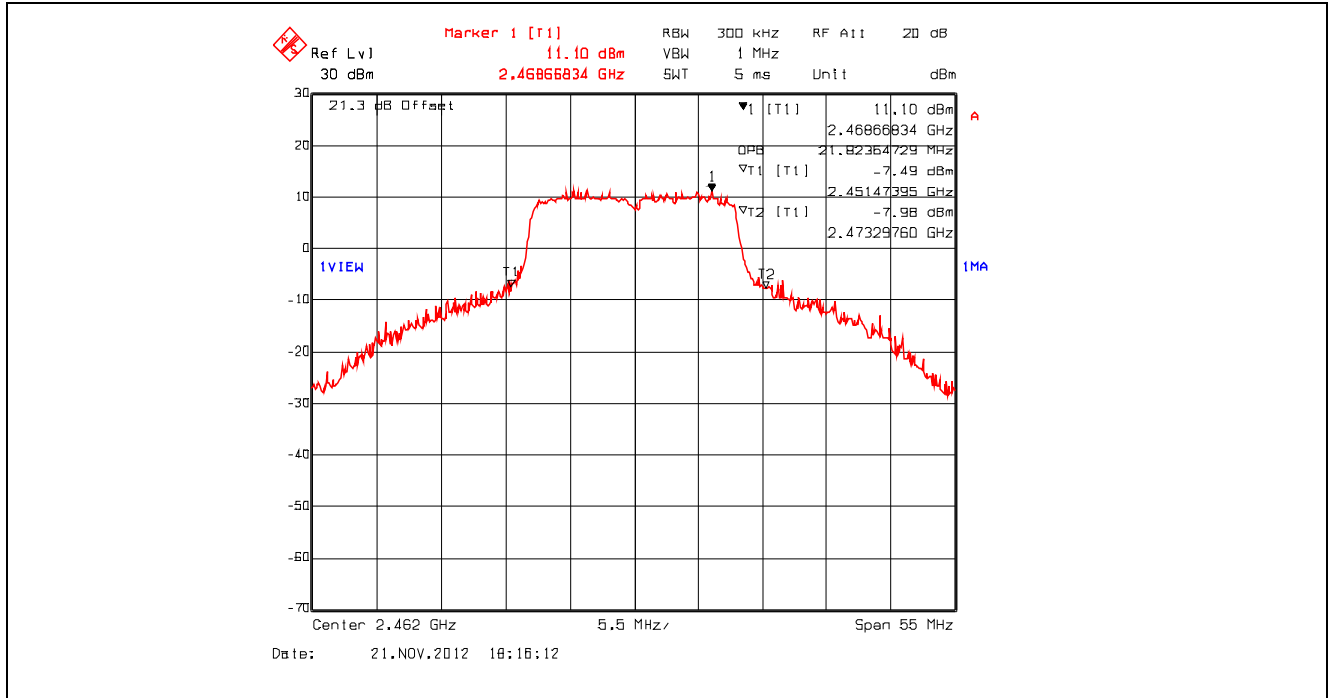


Plot 5.2.4.70. 99% Occupied Bandwidth, 802.11n 800ns, 19.5 Mbps QPSK 3/4, 2412 MHz, Setting 23

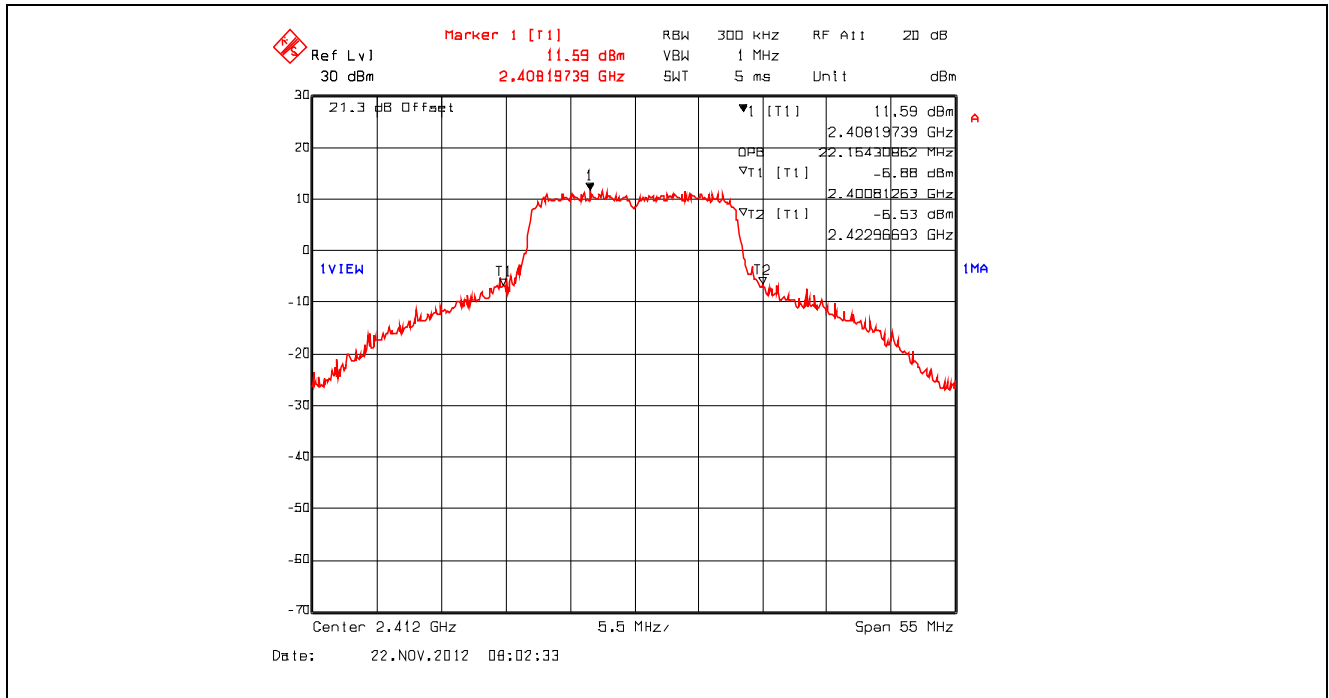


Plot 5.2.4.71. 99% Occupied Bandwidth, 802.11n 800ns, 19.5 Mbps QPSK 3/4, 2442 MHz, Setting 23

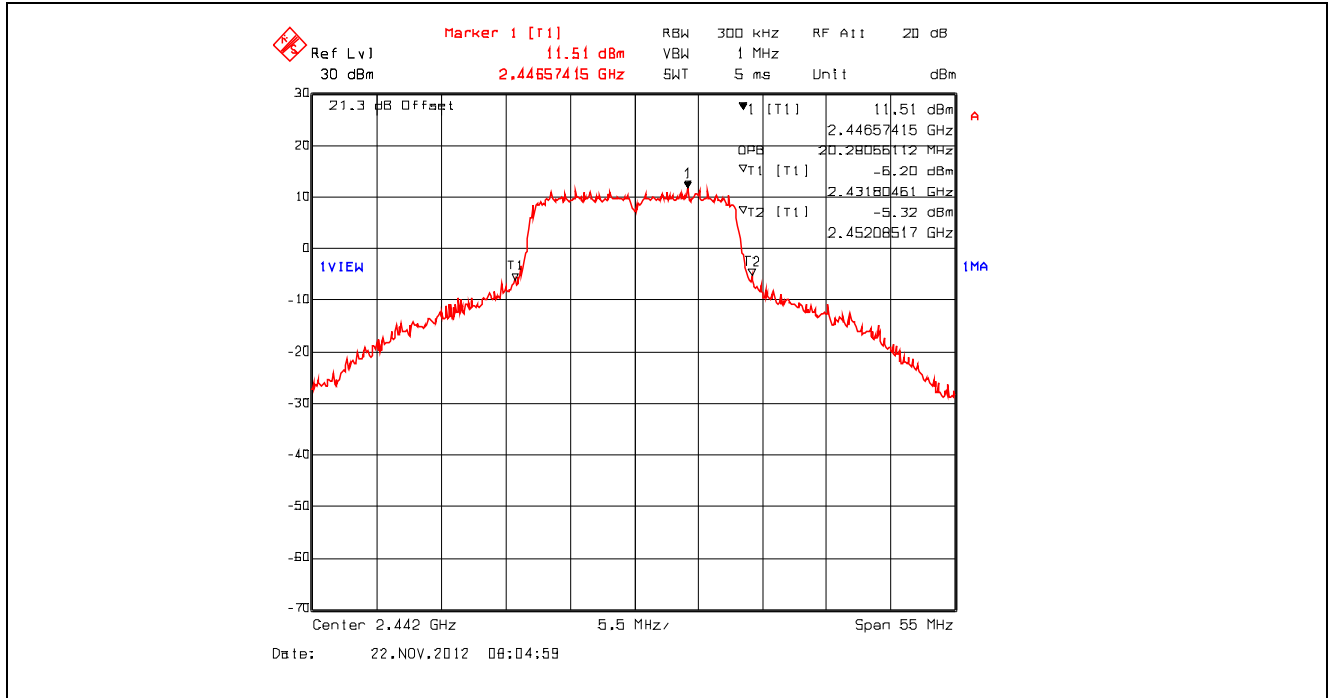


Plot 5.2.4.72. 99% Occupied Bandwidth, 802.11n 800ns, 19.5 Mbps QPSK 3/4, 2462 MHz, Setting 23

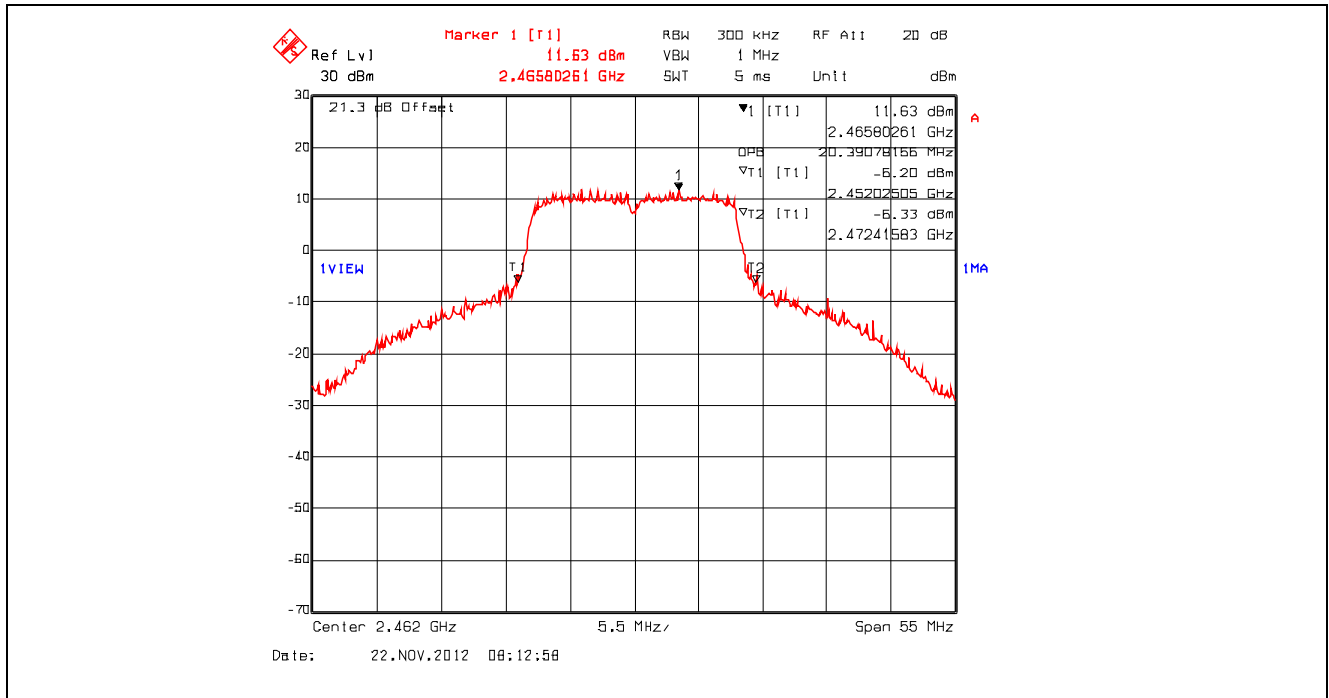


Plot 5.2.4.73. 99% Occupied Bandwidth, 802.11n 800ns, 39 Mbps 16-QAM 3/4, 2412 MHz, Setting 23

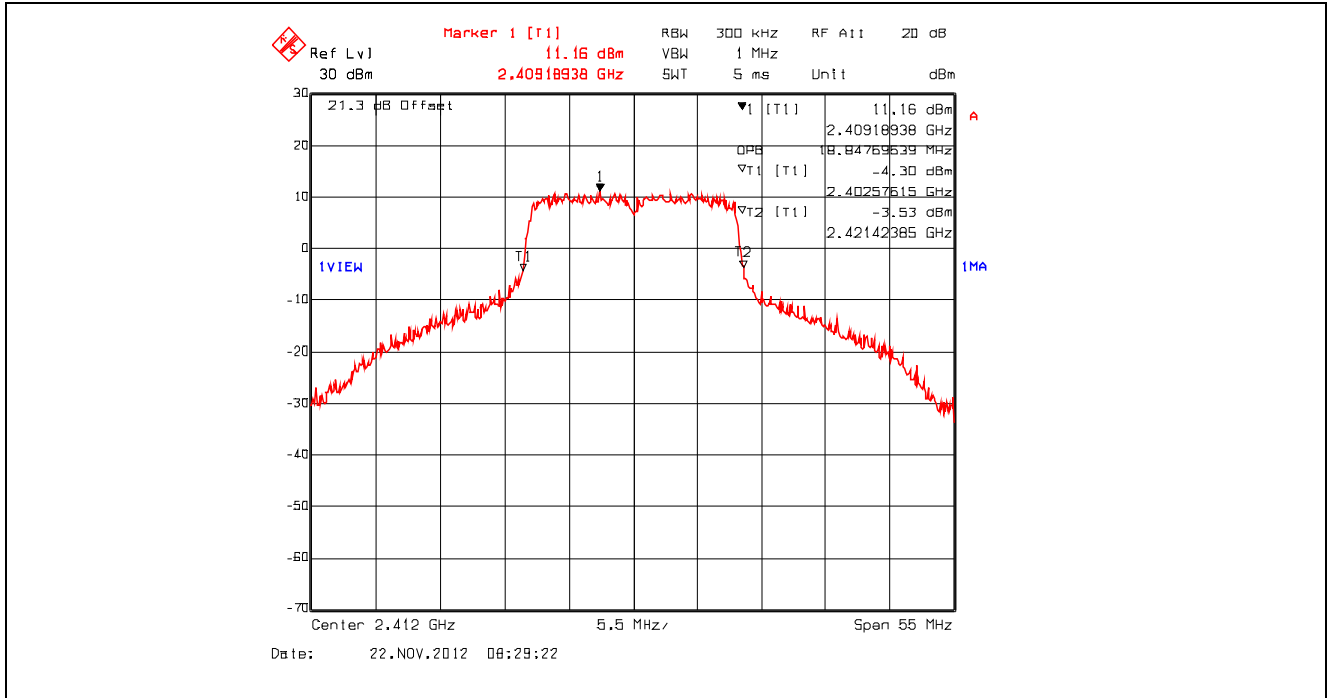


Plot 5.2.4.74. 99% Occupied Bandwidth, 802.11n 800ns, 39 Mbps 16-QAM 3/4, 2442 MHz, Setting 23

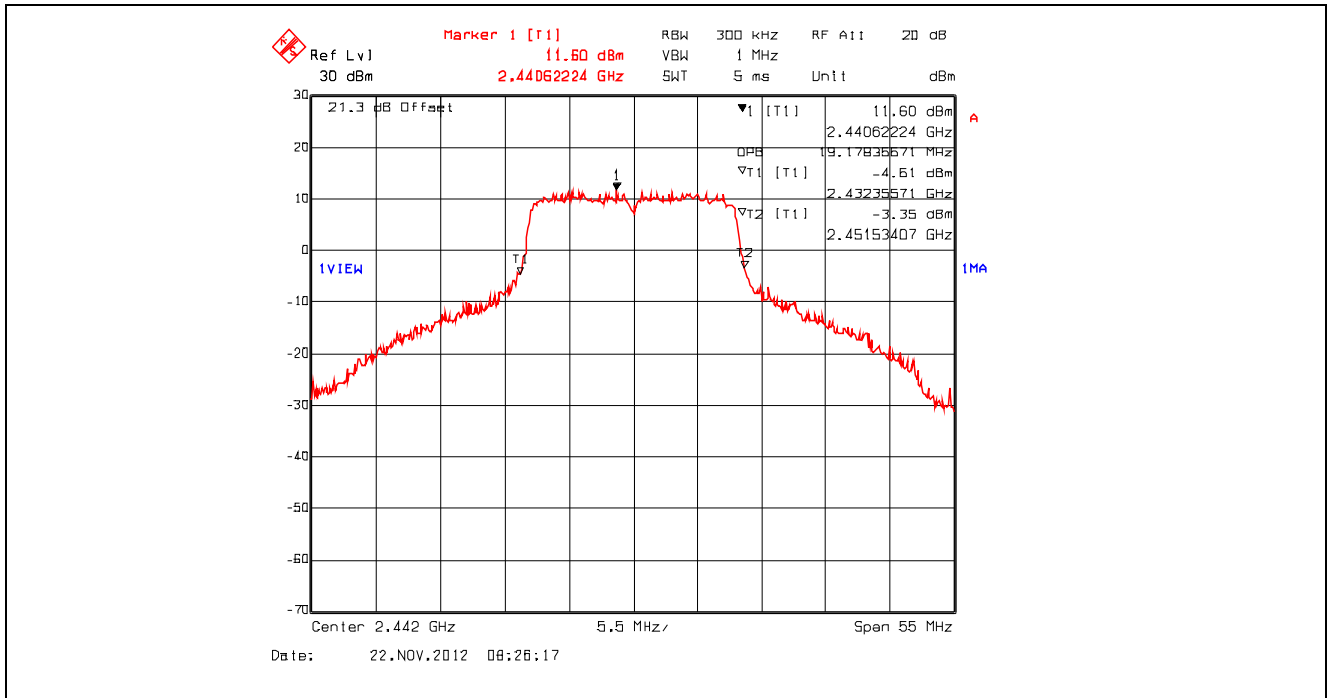


Plot 5.2.4.75. 99% Occupied Bandwidth, 802.11n 800ns, 39 Mbps 16-QAM 3/4, 2462 MHz, Setting 23

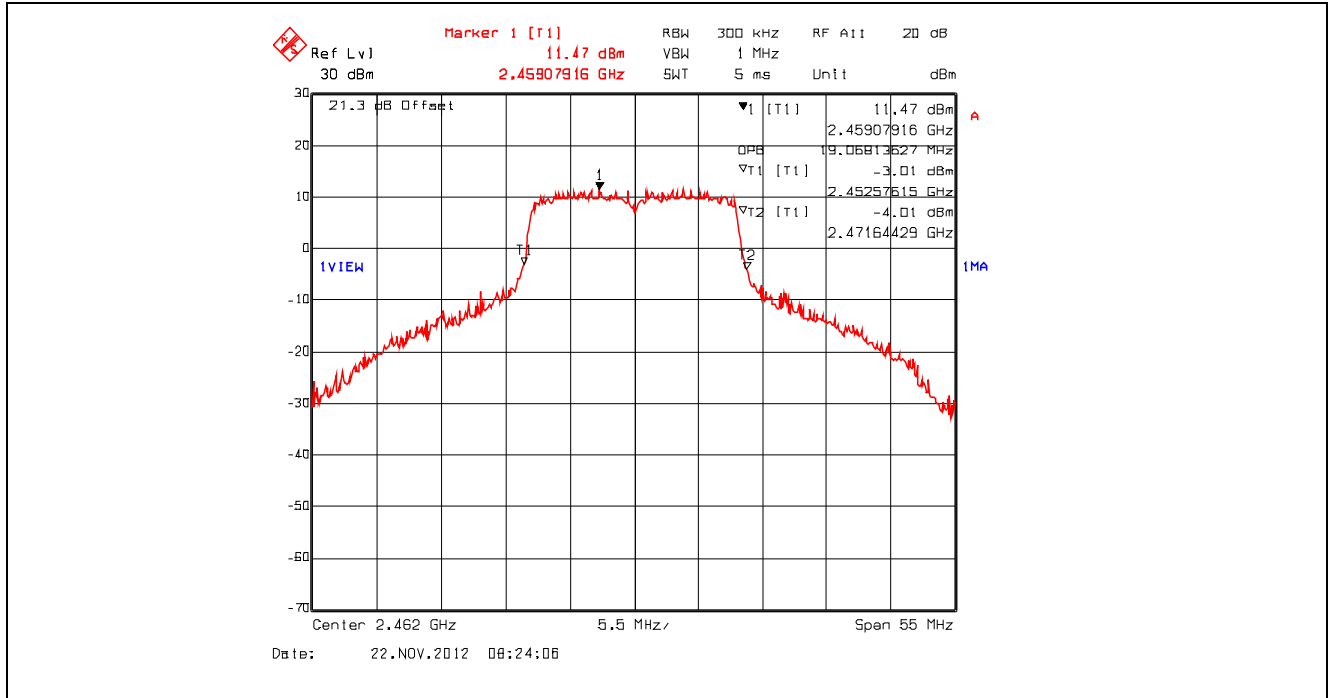


Plot 5.2.4.76. 99% Occupied Bandwidth, 802.11n 800ns, 65 Mbps 64-QAM 5/6, 2412 MHz, Setting 23

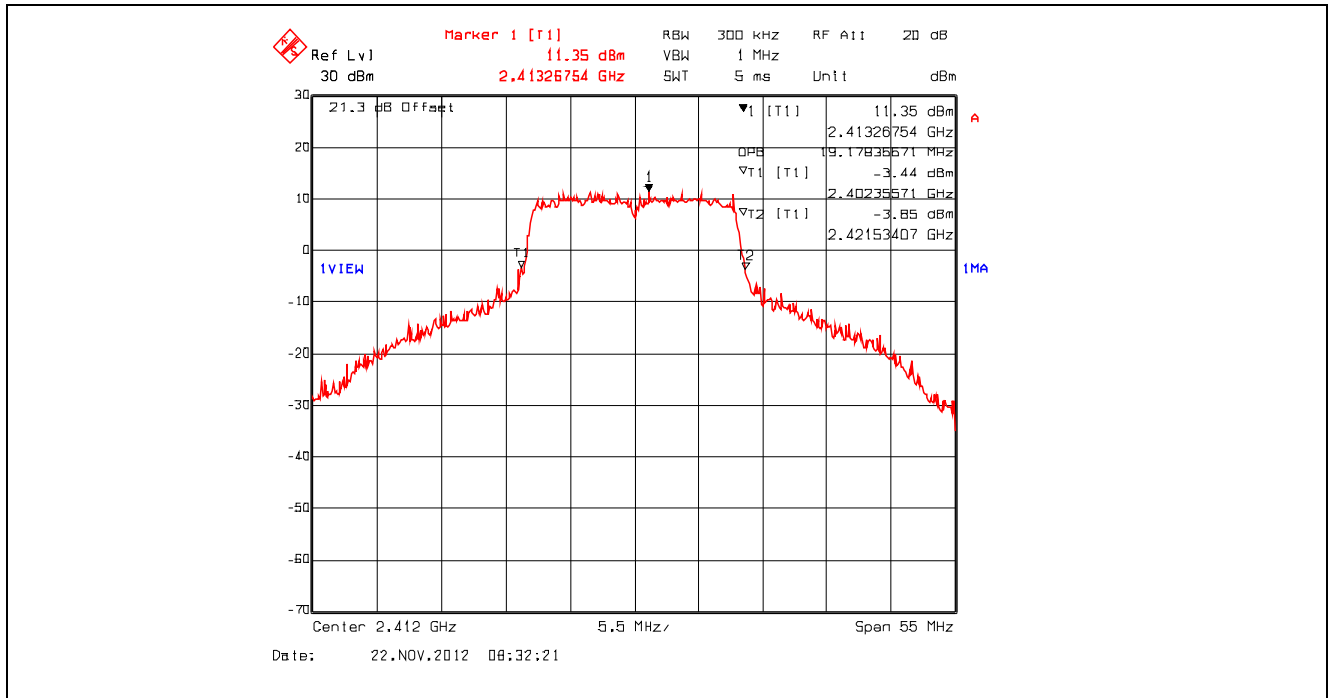


Plot 5.2.4.77. 99% Occupied Bandwidth, 802.11n 800ns, 65 Mbps 64-QAM 5/6, 2442 MHz, Setting 23

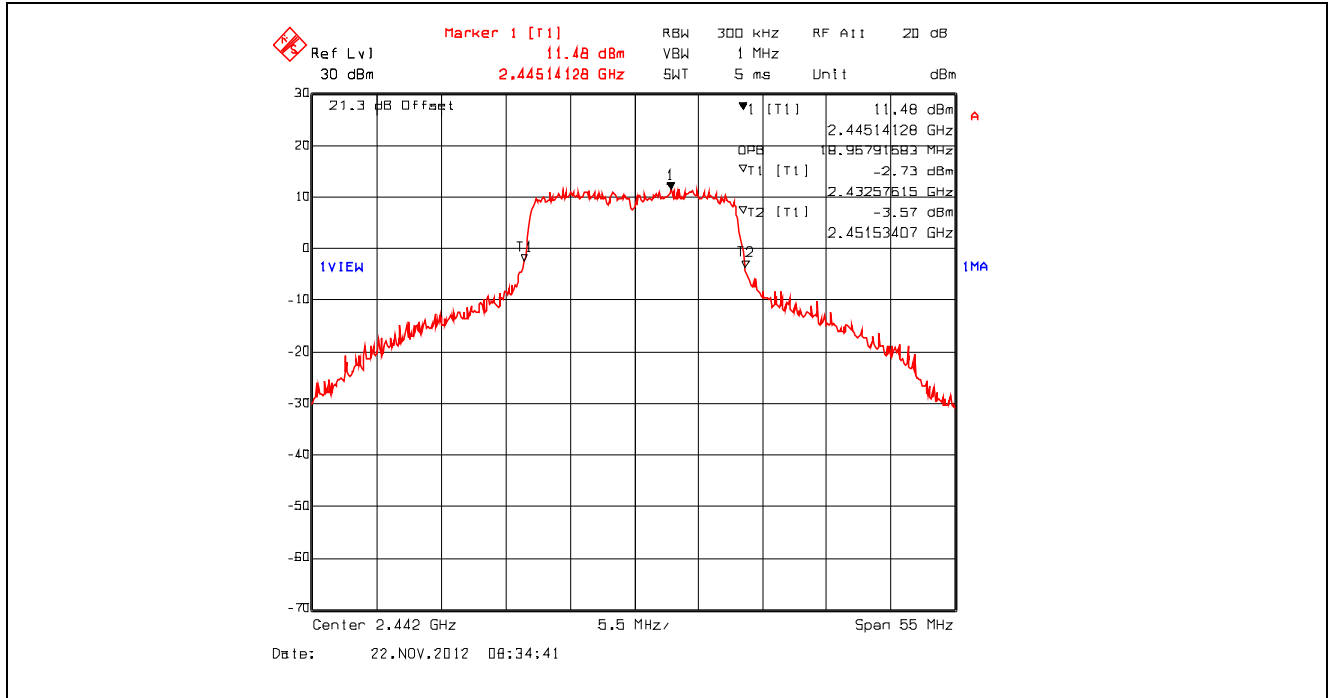


Plot 5.2.4.78. 99% Occupied Bandwidth, 802.11n 800ns, 65 Mbps 64-QAM 5/6, 2462 MHz, Setting 23

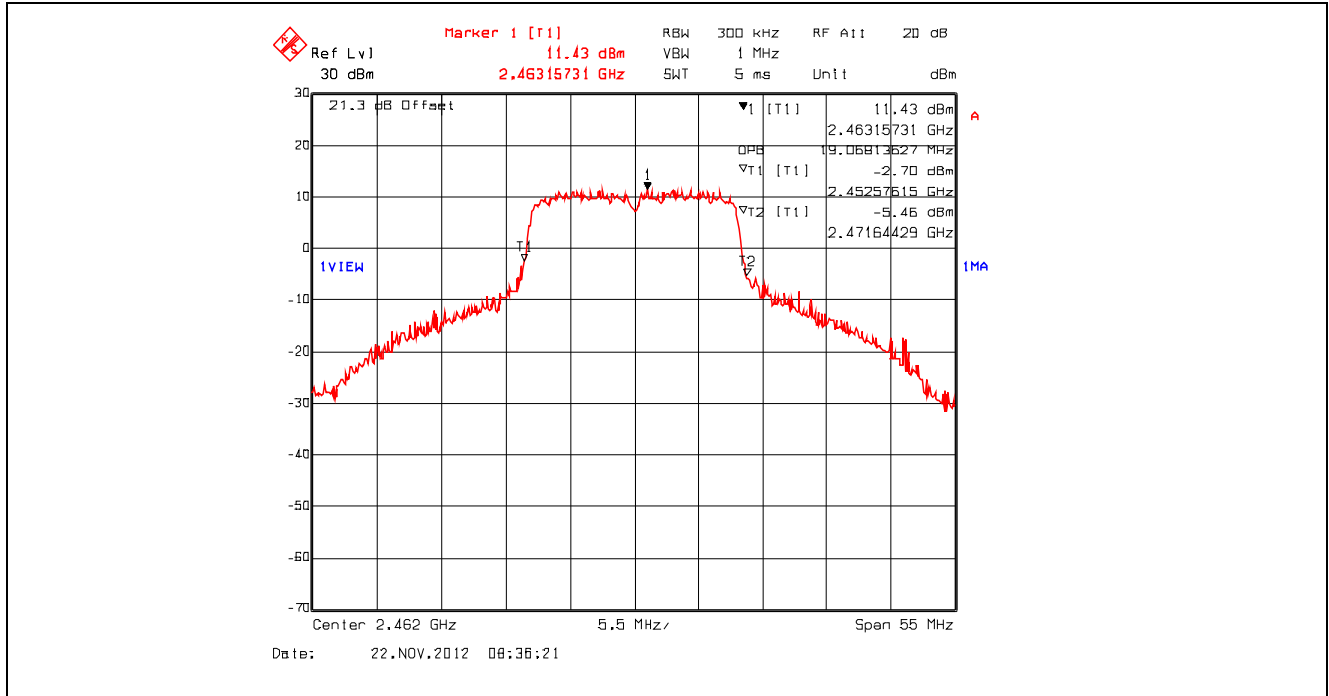


Plot 5.2.4.79. 99% Occupied Bandwidth, 802.11n 400ns, 7.2 Mbps BPSK1/2, 2412 MHz, Setting 23

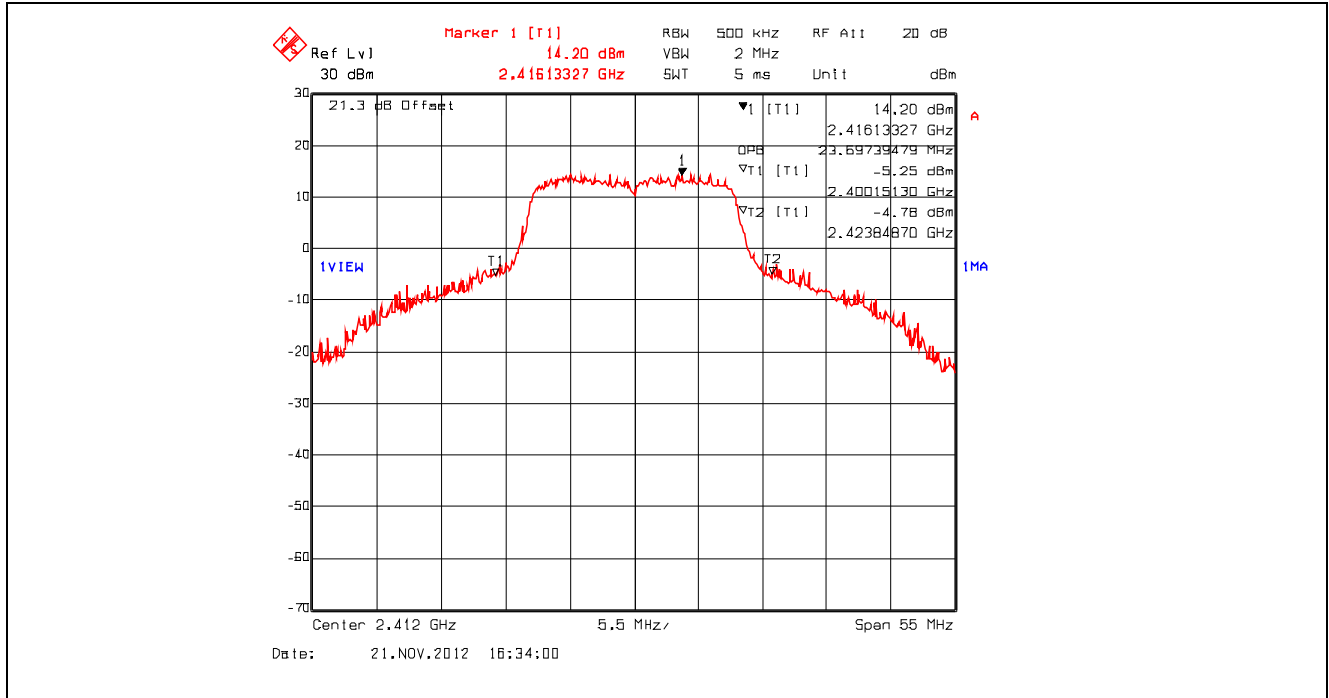


Plot 5.2.4.80. 99% Occupied Bandwidth, 802.11n 400ns, 7.2 Mbps BPSK1/2, 2442 MHz, Setting 23

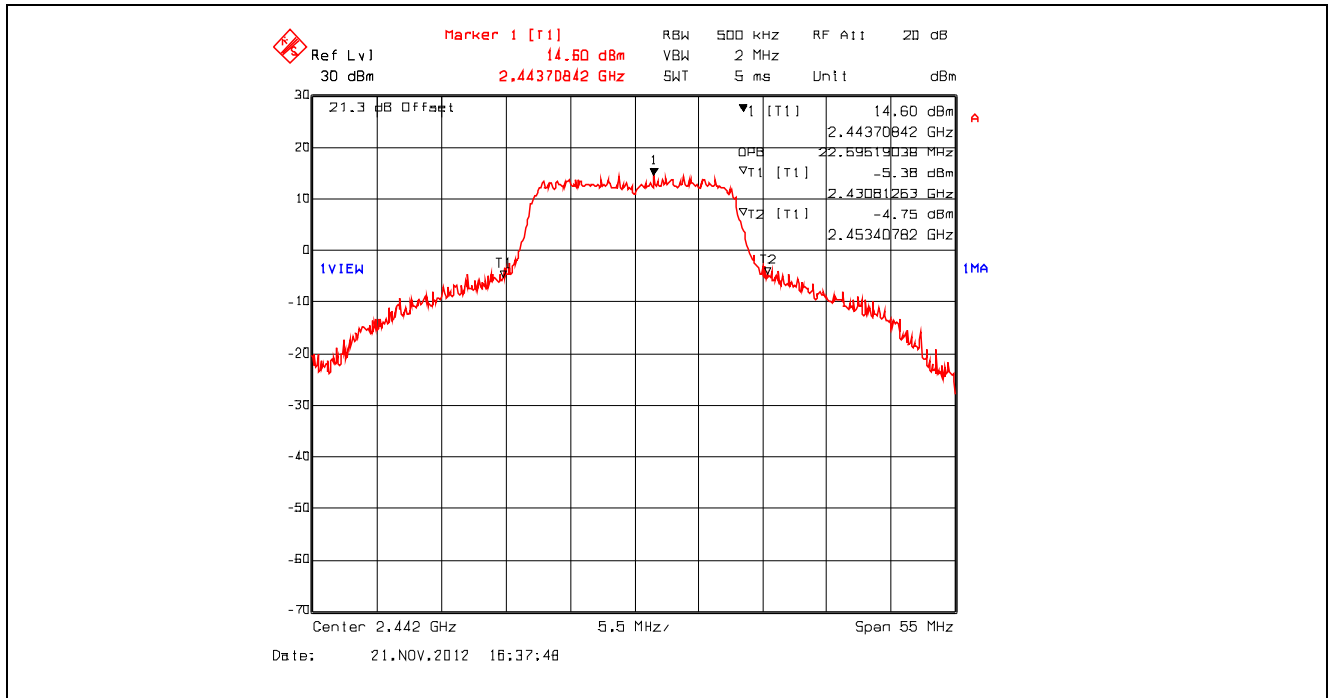


Plot 5.2.4.81. 99% Occupied Bandwidth, 802.11n 400ns, 7.2 Mbps BPSK1/2, 2462 MHz, Setting 23

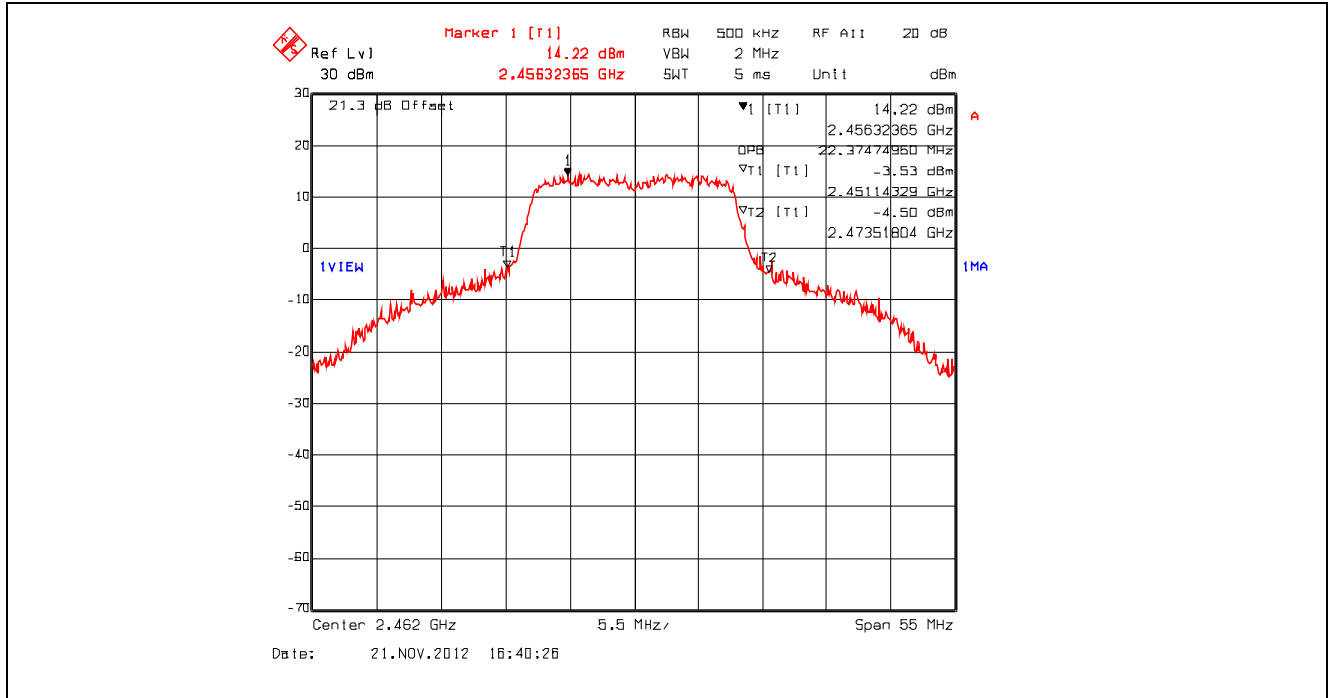


Plot 5.2.4.82. 99% Occupied Bandwidth, 802.11n 400ns, 21.7 Mbps QPSK 3/4, 2412 MHz, Setting 23

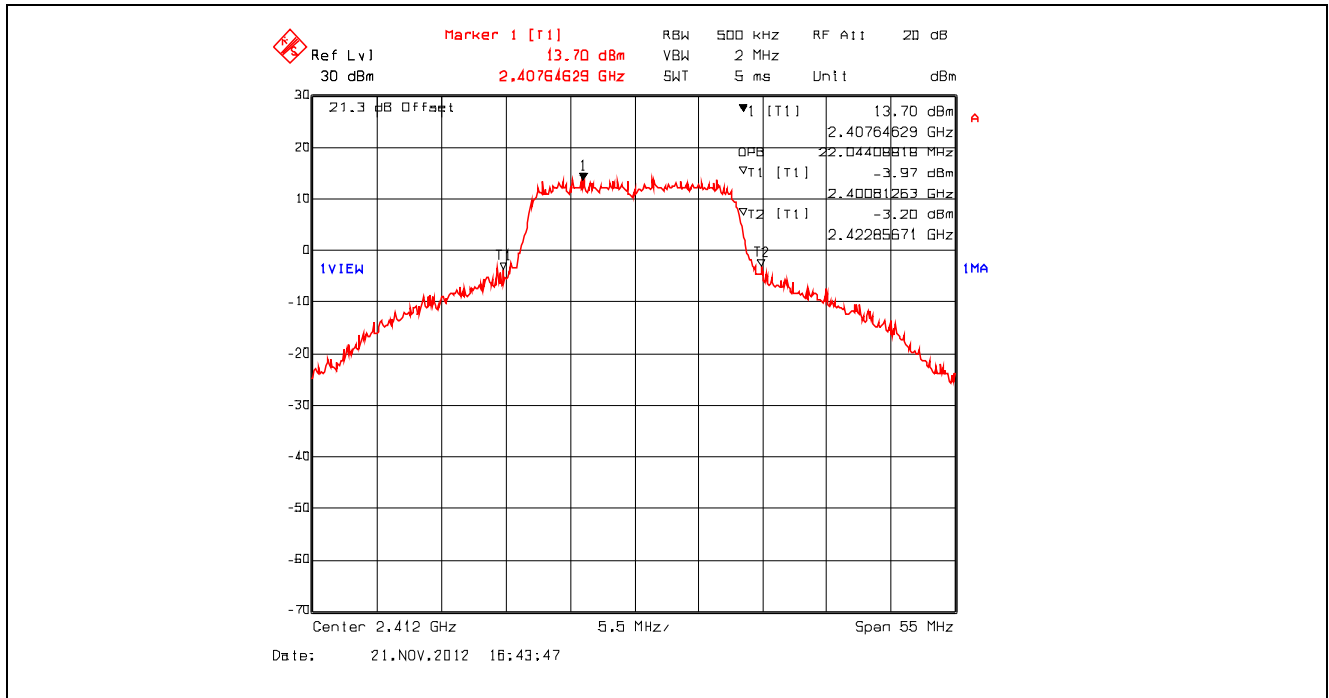

Plot 5.2.4.83. 99% Occupied Bandwidth, 802.11n 400ns, 21.7 Mbps QPSK 3/4, 2442 MHz, Setting 23

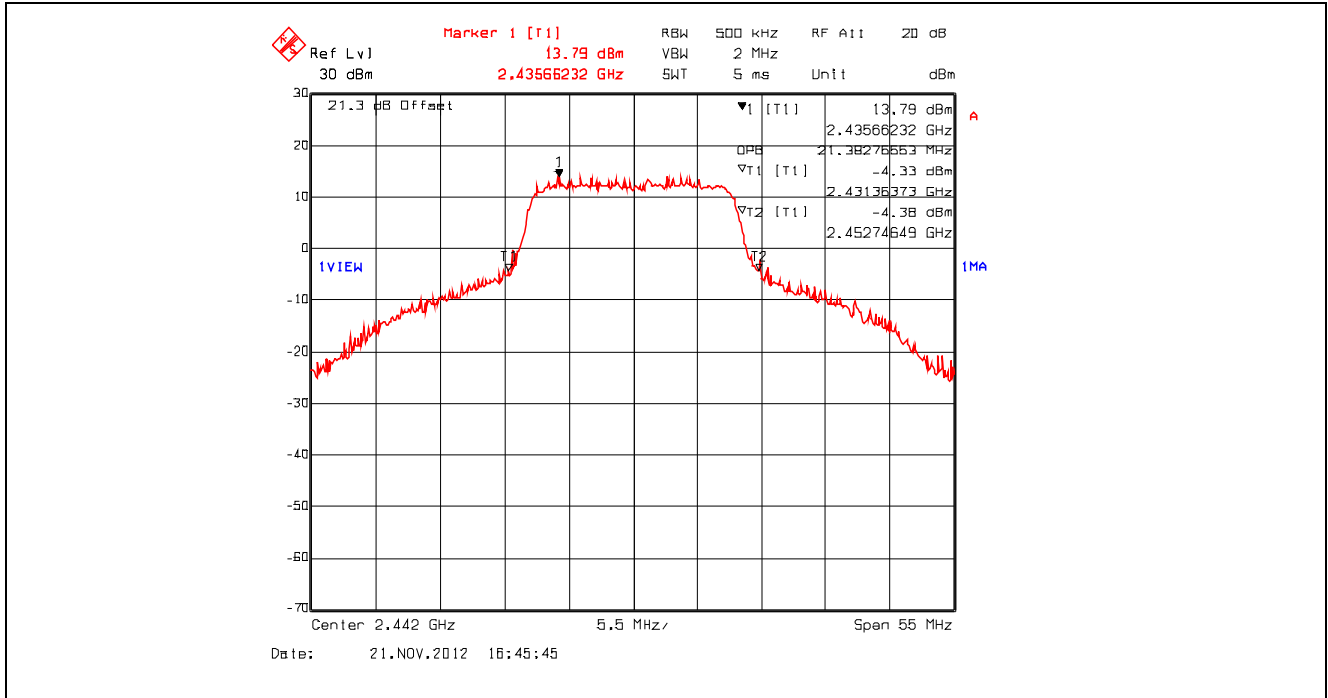


Plot 5.2.4.84. 99% Occupied Bandwidth, 802.11n 400ns, 21.7 Mbps QPSK 3/4, 2462 MHz, Setting 23

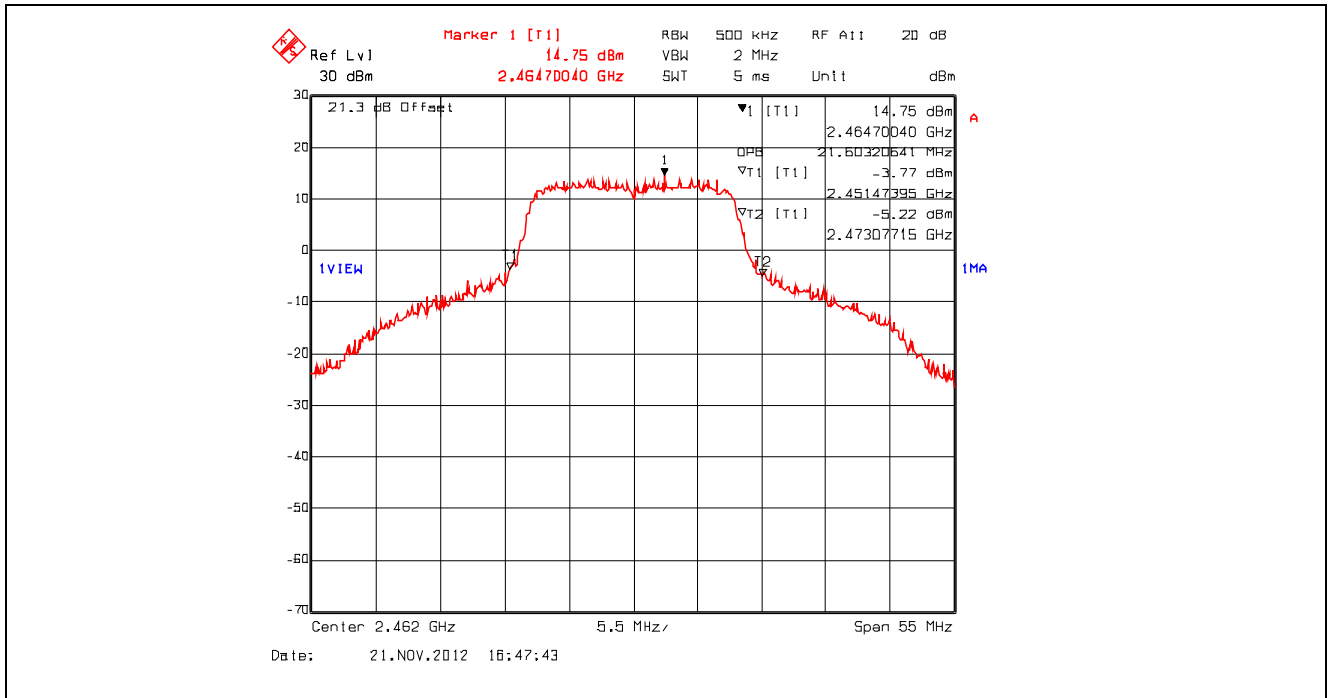





Plot 5.2.4.85. 99% Occupied Bandwidth, 802.11n 400ns, 43.3 Mbps 16-QAM 3/4, 2412 MHz, Setting 23

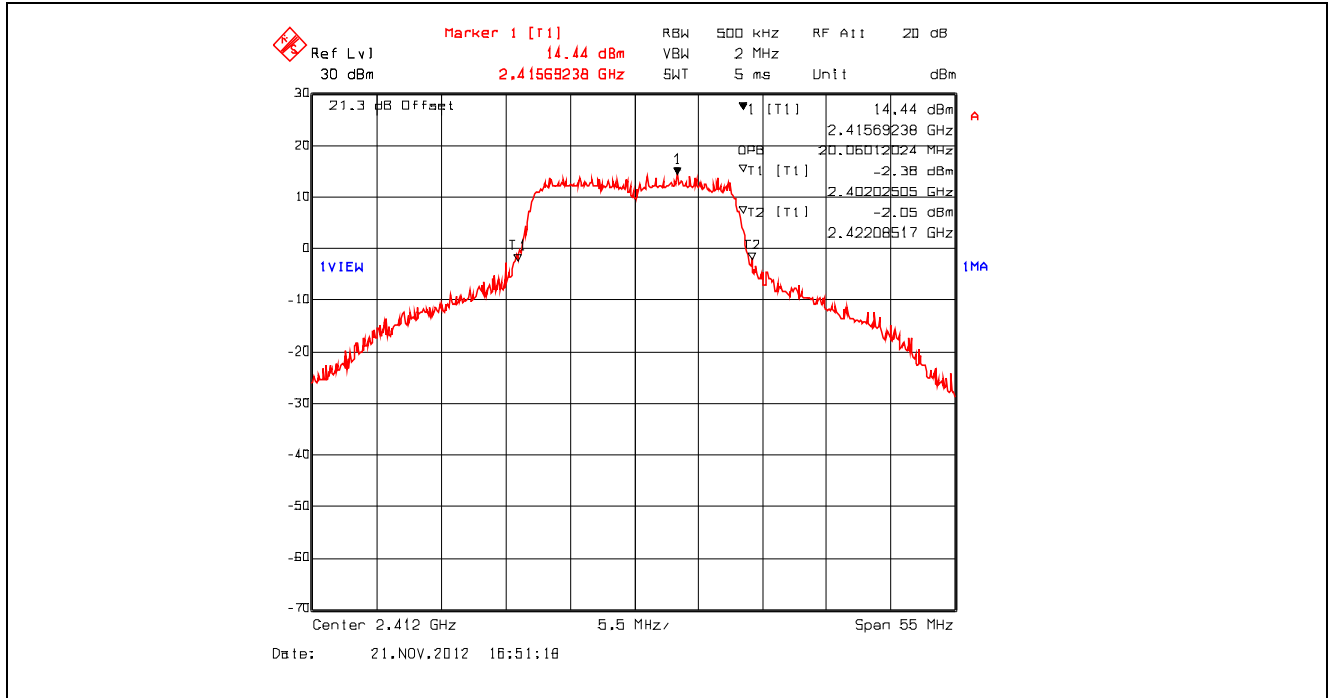


Plot 5.2.4.86. 99% Occupied Bandwidth, 802.11n 400ns, 43.3 Mbps 16-QAM 3/4, 2442 MHz, Setting 23

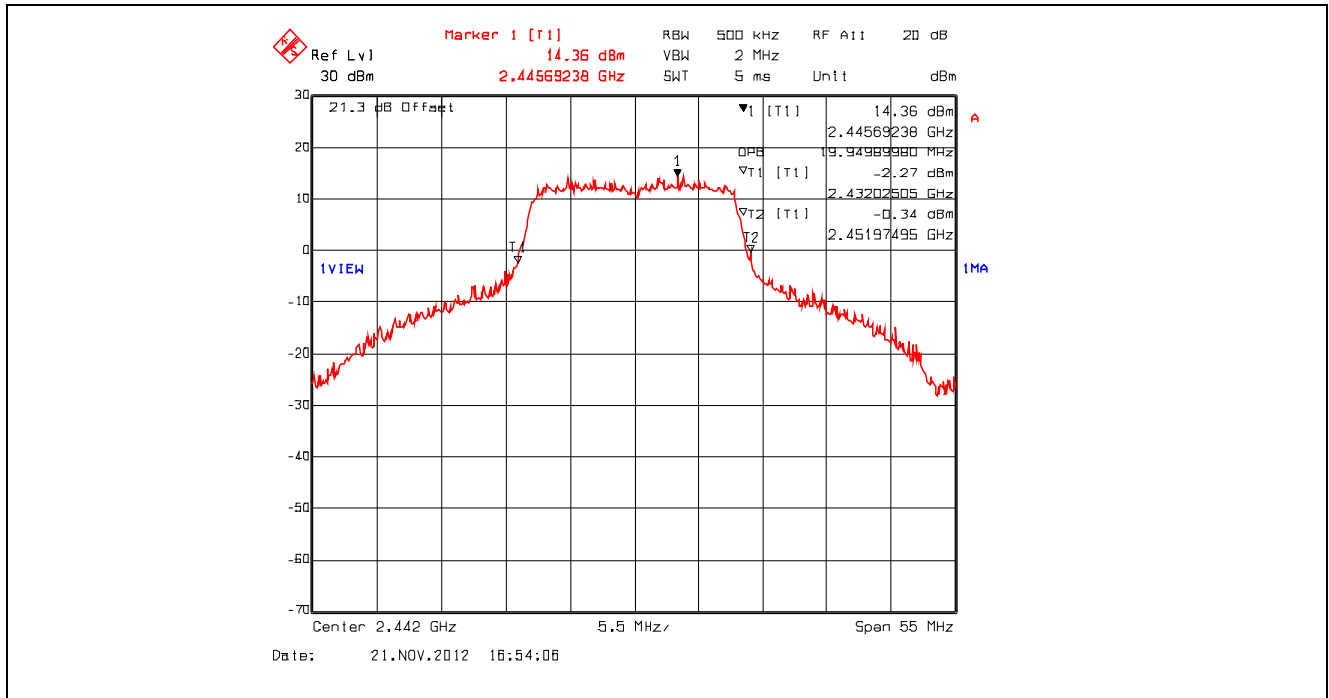


Plot 5.2.4.87. 99% Occupied Bandwidth, 802.11n 400ns, 43.3 Mbps 16-QAM 3/4, 2462 MHz, Setting 23

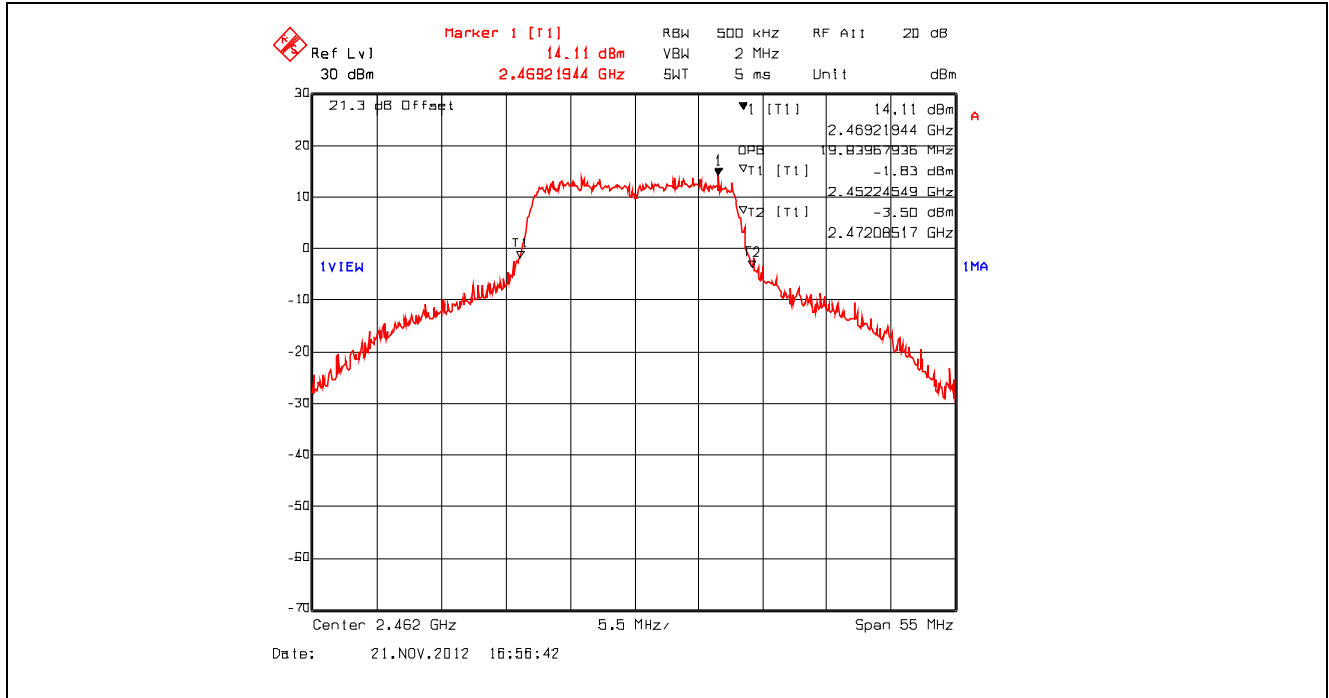


Plot 5.2.4.88. 99% Occupied Bandwidth, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6, 2412 MHz, Setting 23

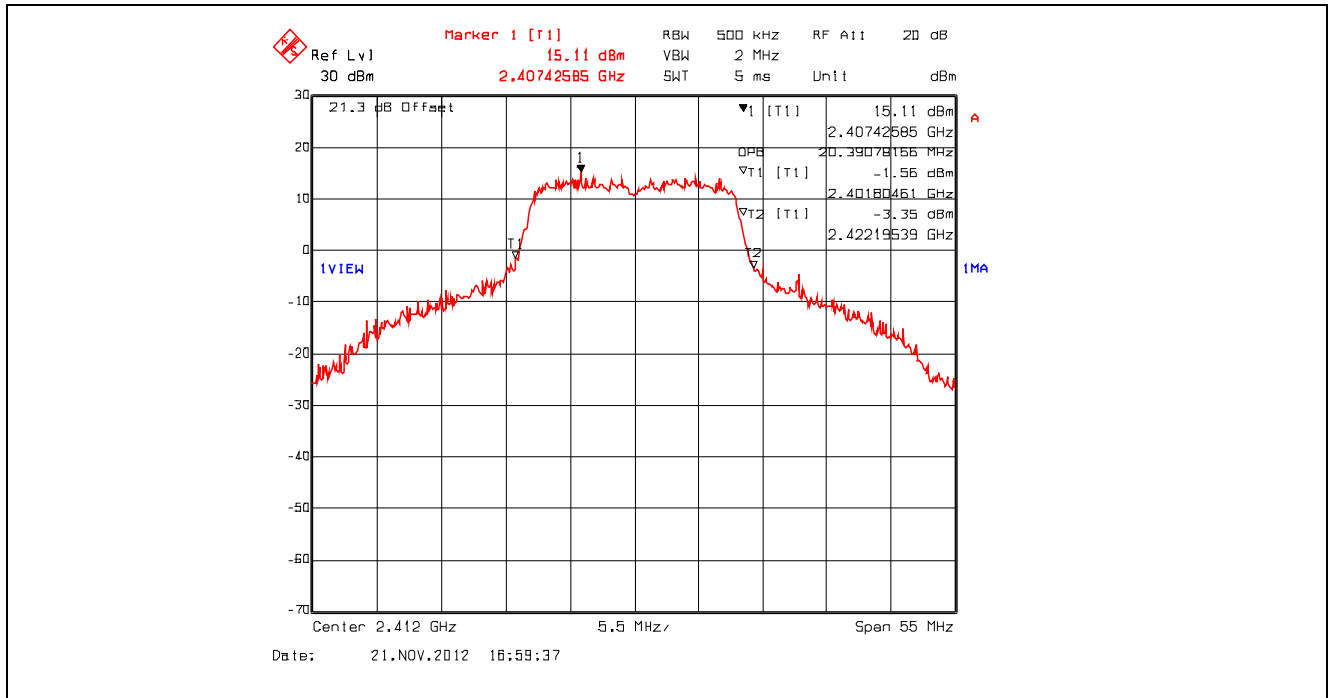

Plot 5.2.4.89. 99% Occupied Bandwidth, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6, 2442 MHz, Setting 23

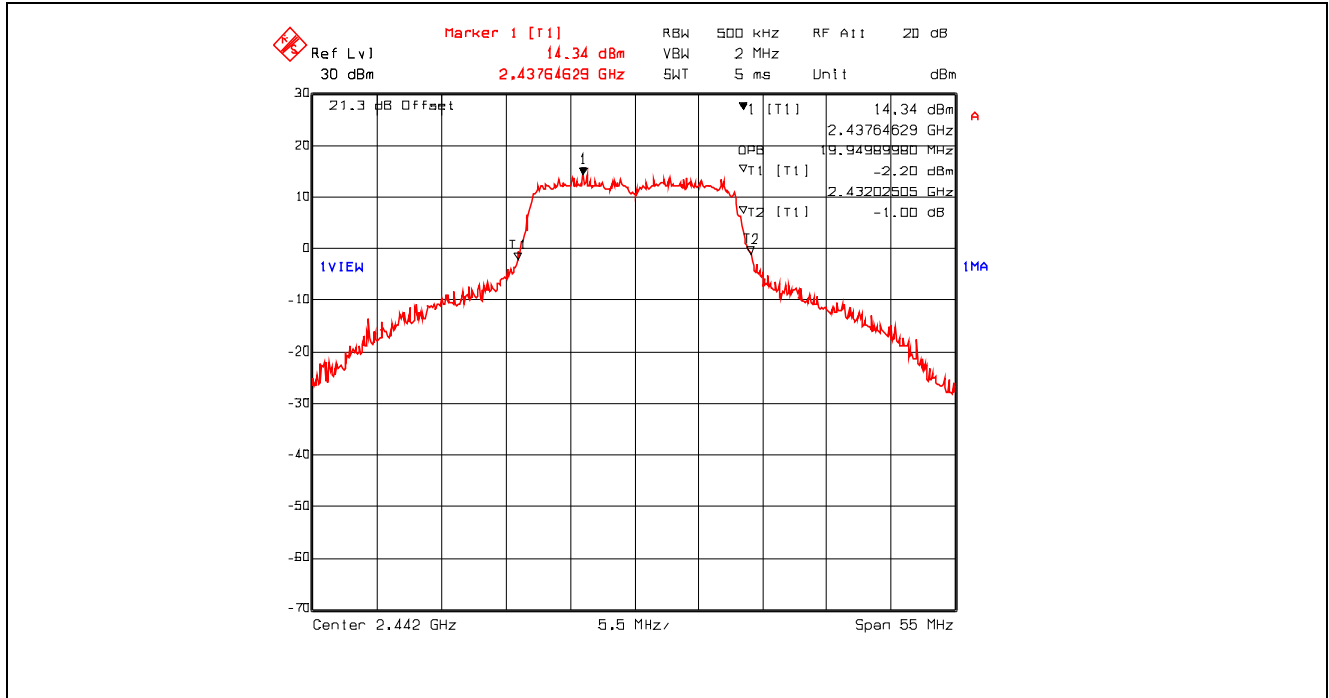

Plot 5.2.4.90. 99% Occupied Bandwidth, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6, 2462 MHz, Setting 23

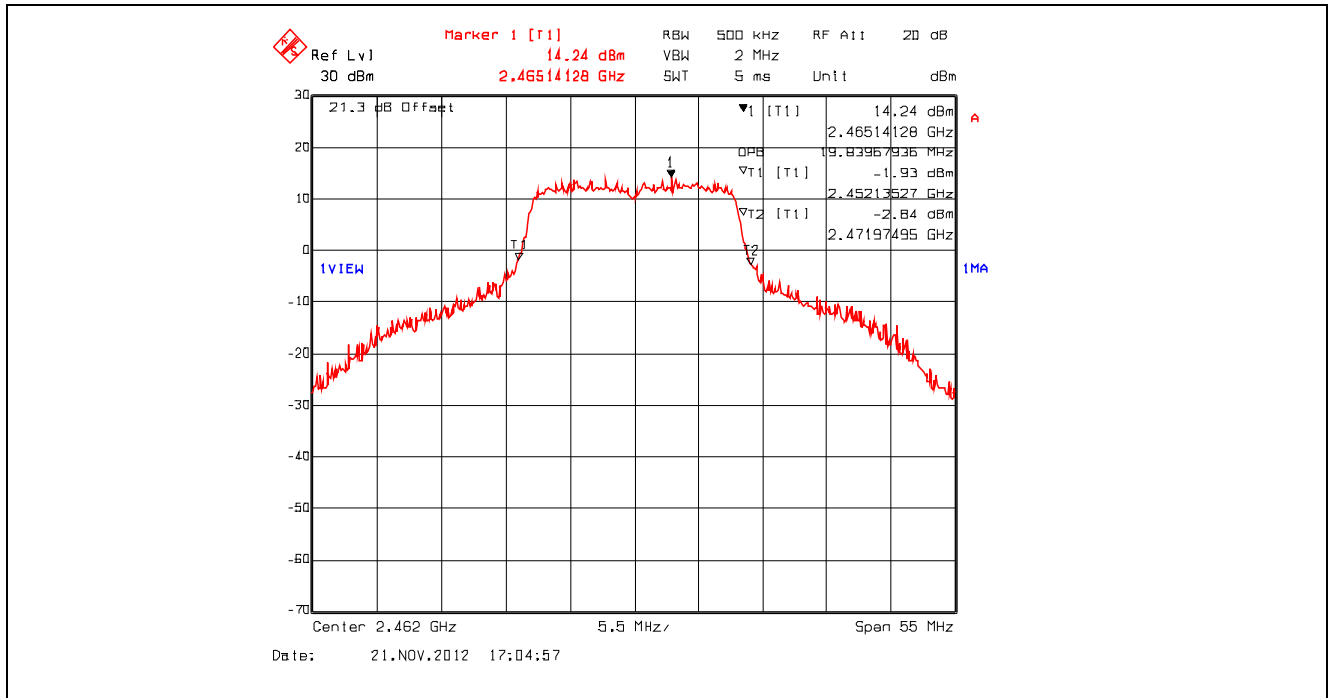

### 5.3. PEAK CONDUCTED OUTPUT POWER - DTS [§ 15.247(b)(3)]

#### 5.3.1. Limit(s)


**§ 15.247(b)(3):** For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

**§15.247(b)(4):** The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 5.3.2. Method of Measurements & Test Arrangement

KDB Publication No. 558074 D01 DTS Meas Guidance v02, Section 8.1.2 Option 2 (channel integration method).

#### 5.3.3. Test Arrangement

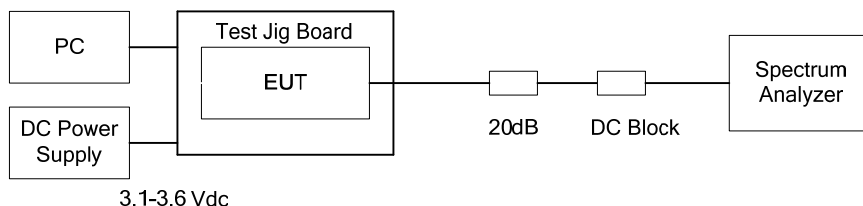

5.3.4. Test Data

Operating Mode	Modulation	Frequency (MHz)	Peak Conducted Power (dBm)	Peak Conducted Power Limit (dBm)	Margin (dBm)
<b>High Power Setting 23</b>					
802.11b High Power Setting 23	1 Mbps DBPSK	2412	22.74	30	-7.26
		2442	22.53	30	-7.47
		2462	22.08	30	-7.92
	2 Mbps DQPSK	2412	23.21	30	-6.79
		2442	22.57	30	-7.43
		2462	22.63	30	-7.37
	11 Mbps CCK	2412	26.13	30	-3.87
		2442	25.95	30	-4.05
		2462	25.42	30	-4.58
802.11g High Power Setting 23	9 Mbps BPSK	2412	27.43	30	-2.57
		2442	27.71	30	-2.29
		2462	27.60	30	-2.40
	18 Mbps QPSK	2412	27.30	30	-2.70
		2442	27.54	30	-2.46
		2462	27.52	30	-2.48
	36 Mbps 16-QAM	2412	27.38	30	-2.62
		2442	27.37	30	-2.63
		2462	27.28	30	-2.72
	54 Mbps 64-QAM	2412	27.42	30	-2.58
		2442	27.55	30	-2.45
		2462	27.72	30	-2.28
802.11n 800ns High Power Setting 23	6.5 Mbps BPSK 1/2	2412	27.32	30	-2.68
		2442	27.48	30	-2.52
		2462	27.64	30	-2.36
	19.5 Mbps QPSK 3/4	2412	27.44	30	-2.56
		2442	27.22	30	-2.78
		2462	27.41	30	-2.59
	39 Mbps 16-QAM 3/4	2412	27.36	30	-2.64
		2442	27.38	30	-2.62
		2462	27.37	30	-2.63
	65 Mbps 64-QAM 5/6	2412	27.89	30	-2.11
		2442	27.87	30	-2.13
		2462	27.84	30	-2.16

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: DIGI-070F15C247  
 December 17, 2012

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

Operating Mode	Modulation	Frequency (MHz)	Peak Conducted Power (dBm)	Peak Conducted Power Limit (dBm)	Margin (dBm)
<b>High Power Setting 23</b>					
802.11n 400ns High Power Setting 23	7.2 Mbps BPSK1/2	2412	28.07	30	-1.93
		2442	27.90	30	-2.10
		2462	28.20	30	-1.80
	21.7 Mbps QPSK 3/4	2412	27.40	30	-2.60
		2442	27.43	30	-2.57
		2462	27.49	30	-2.51
	43.3 Mbps 16-QAM 3/4	2412	27.46	30	-2.54
		2442	27.48	30	-2.52
		2462	27.54	30	-2.46
	72.2 Mbps 64-QAM 5/6	2412	27.61	30	-2.39
		2442	27.63	30	-2.37
		2462	27.64	30	-2.36
<b>The following is the lowest power range at Low Power Setting 0</b>					
802.11b	1 Mbps DBPSK	2412	3.05	30	-26.95
		2442	2.28	30	-27.72
		2462	2.08	30	-27.92
802.11g	36 Mbps 16-QAM	2412	8.15	30	-21.85
		2442	7.15	30	-22.85
		2462	7.73	30	-22.27
802.11n 800ns	39 Mbps 16-QAM 3/4	2412	8.06	30	-21.94
		2442	7.72	30	-22.28
		2462	7.02	30	-22.98
802.11n 400ns	21.7 Mbps QPSK 3/4	2412	8.13	30	-21.87
		2442	7.68	30	-22.32
		2462	7.33	30	-22.67
Note: The EIRP shall not exceed 36 dBm for all proposed antennas.					

## 5.4. TRANSMITTER BAND-EDGE & SPURIOUS CONDUCTED EMISSIONS [§ 15.247(d)]


### 5.4.1. Limit(s)

**§ 15.247 (d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 5.4.2. Method of Measurements

KDB Publication No. 558074 D01 DTS Meas Guidance v02, Sections 10.1 Unwanted Emissions into Non-Restricted Bands and 10.2 Unwanted Emissions into Restricted Frequency Bands.

### 5.4.3. Test Arrangement

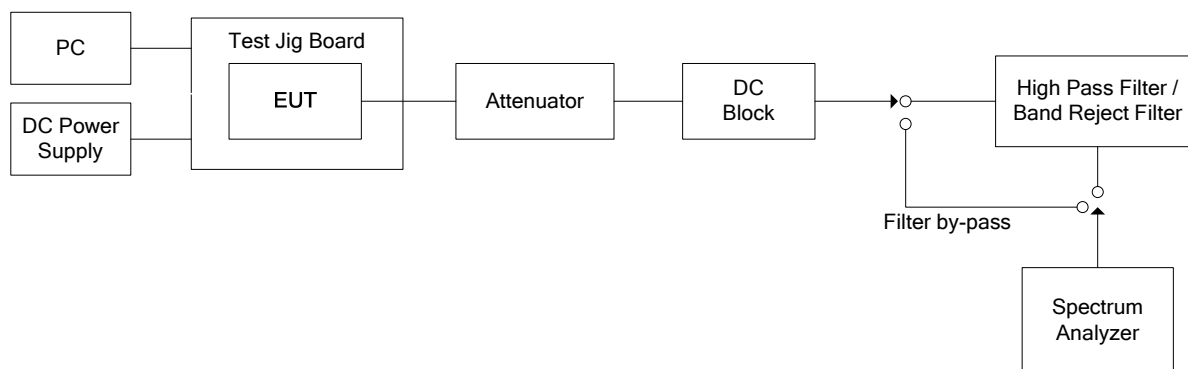


### 5.4.4. Test Data


#### 5.4.4.1. Band-Edge RF Conducted Emissions

Remark: The following test results at high power setting represent the worst case, derived from exploratory tests.

Plot 5.4.4.1.1. Band-Edge RF Conducted Emissions, Lower Band-edge, 2412 MHz, 802.11b, 11 Mbps CCK

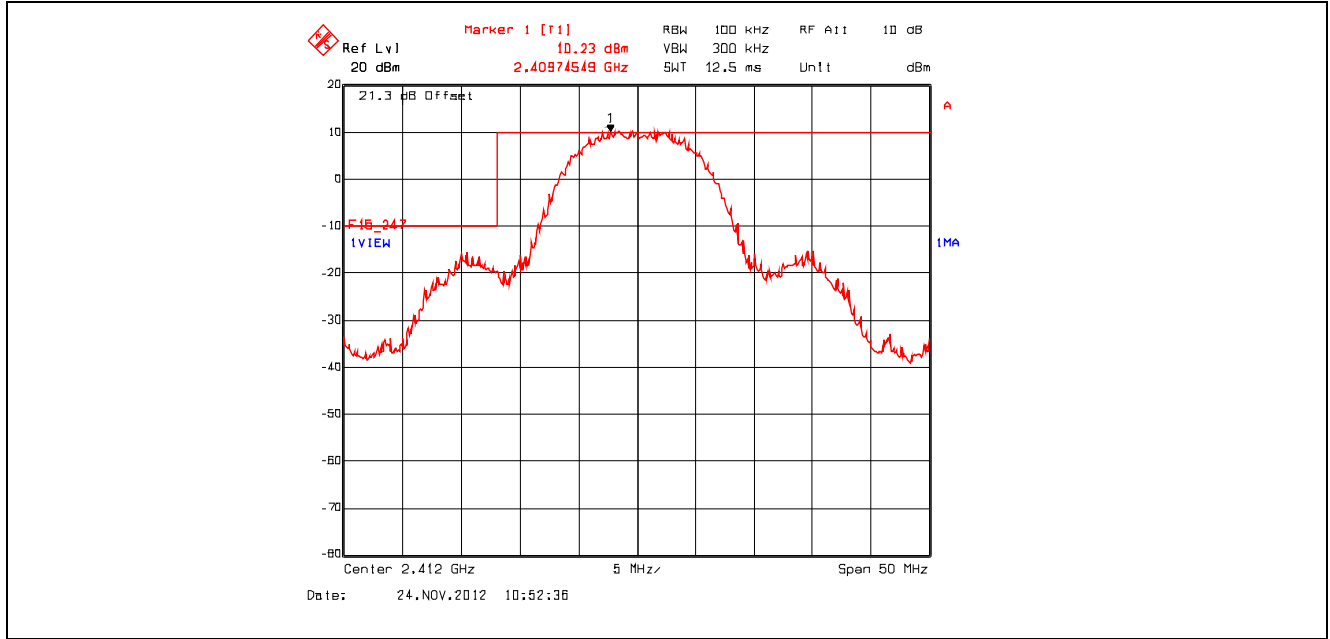


Plot 5.4.4.1.2. Band-Edge RF Conducted Emissions, Upper Band-edge, 2462 MHz, 802.11b, 11 Mbps CCK

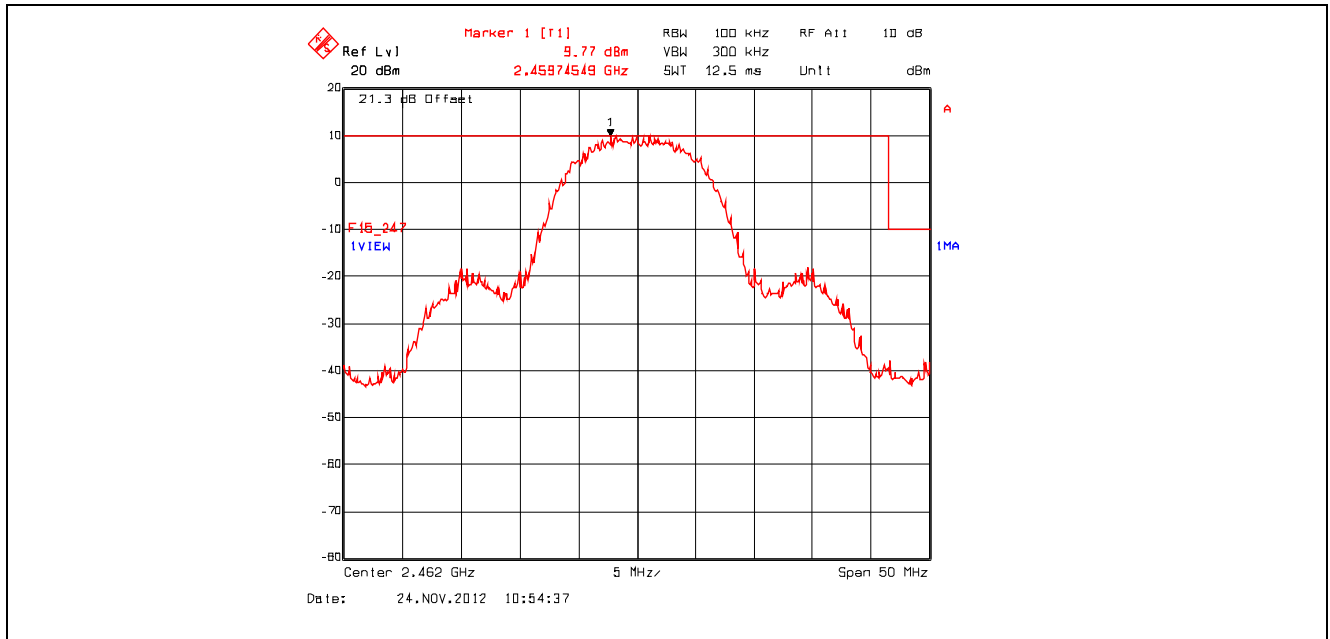





Plot 5.4.4.1.3. Band-Edge RF Conducted Emissions, Lower Band-edge, 2412 MHz, 802.11g, 54 Mbps 64-QAM

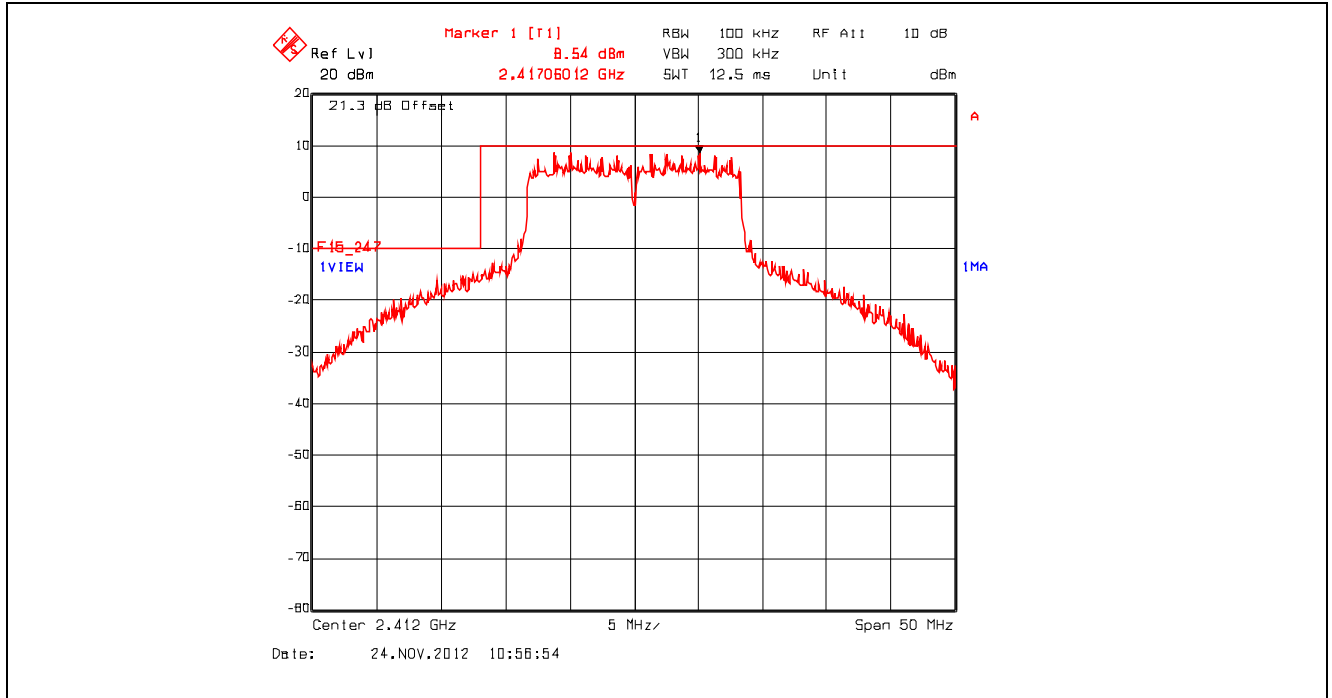


Plot 5.4.4.1.4. Band-Edge RF Conducted Emissions, Upper Band-edge, 2462 MHz, 802.11g, 54 Mbps 64-QAM

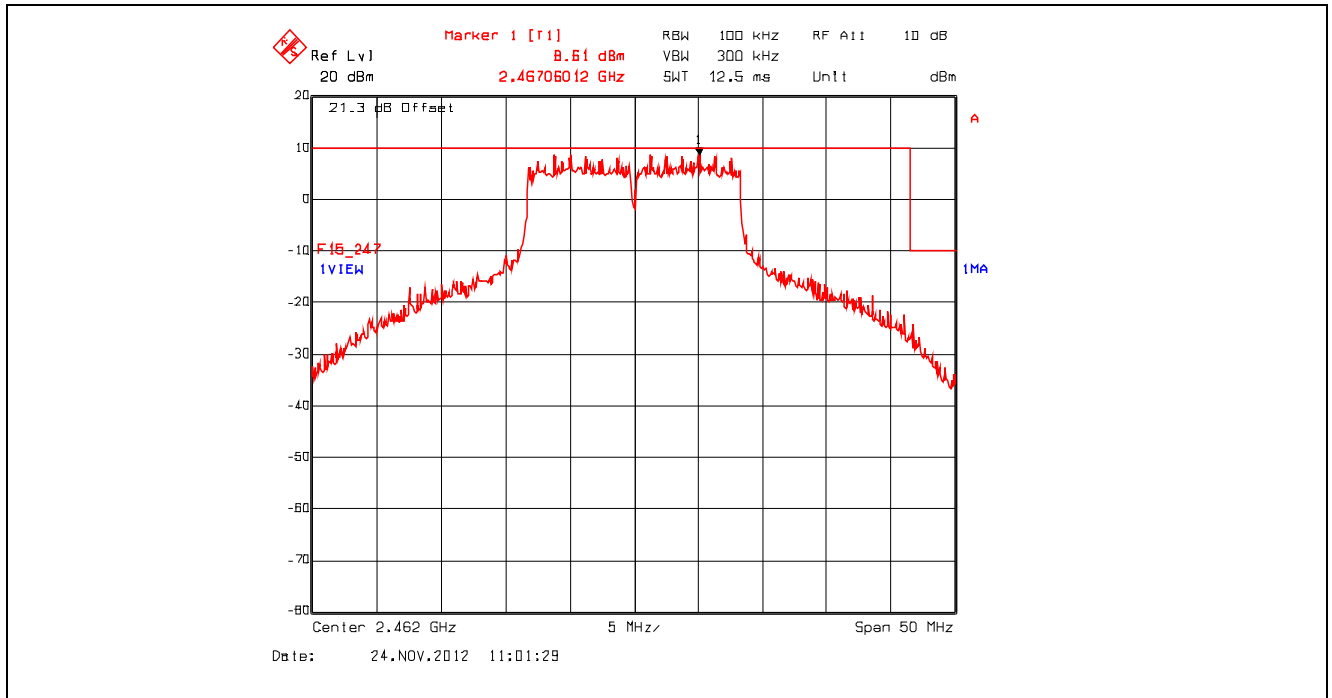


Plot 5.4.4.1.5. Band-Edge RF Conducted Emissions, Lower Band-edge, 2412 MHz, 802.11n 800ns, 65 Mbps 64-QAM 5/6

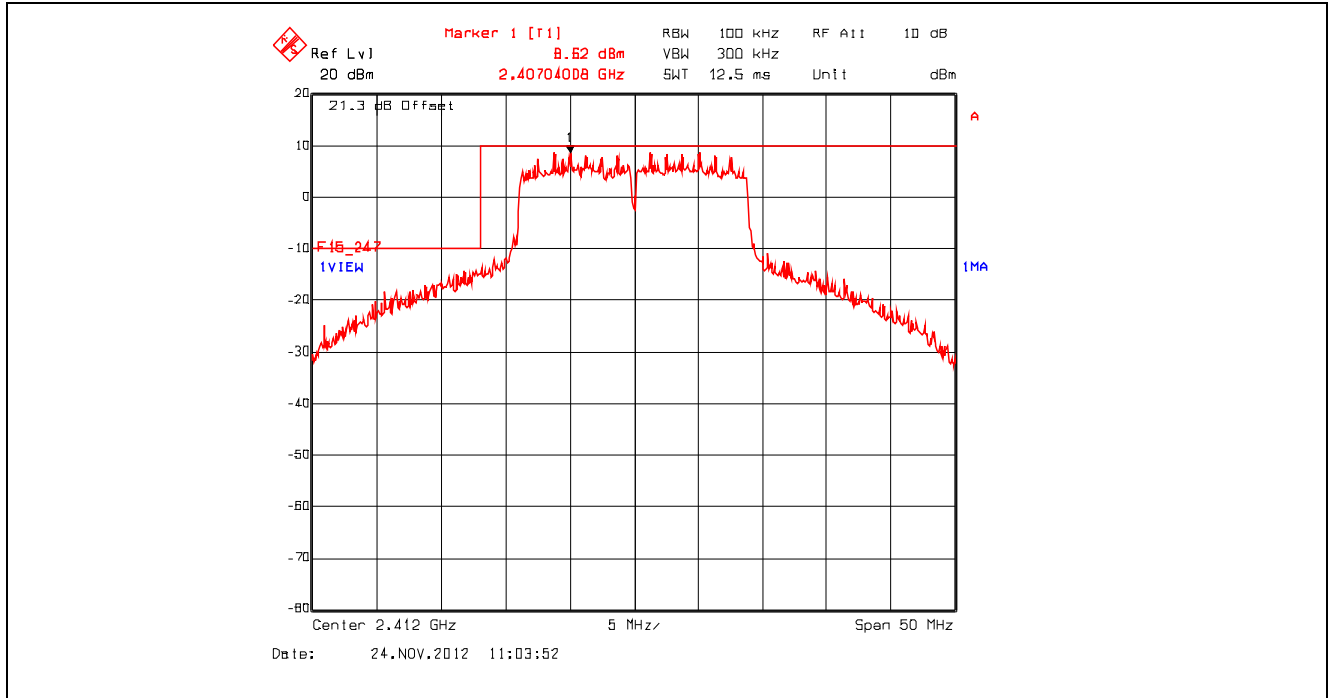


Plot 5.4.4.1.6. Band-Edge RF Conducted Emissions, Upper Band-edge, 2462 MHz, 802.11n 800ns, 65 Mbps 64-QAM 5/6

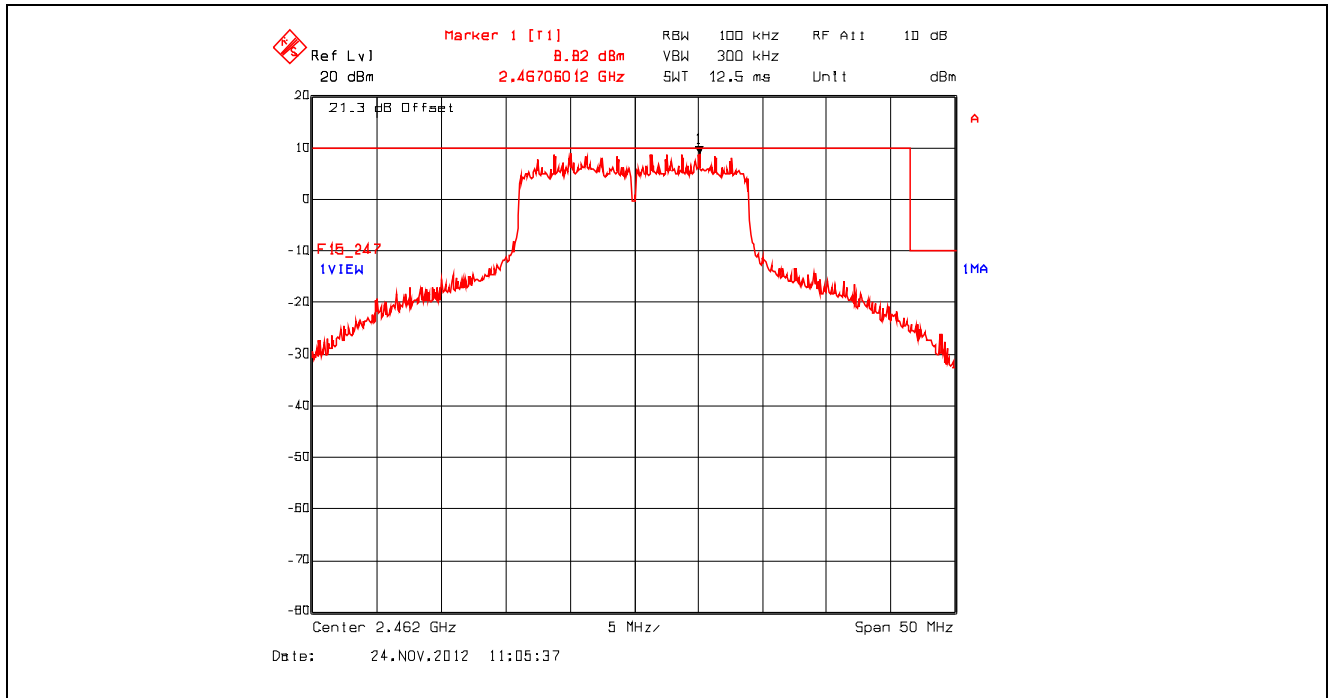

Plot 5.4.4.1.7. Band-Edge RF Conducted Emissions, Lower Band-edge, 2412 MHz, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6

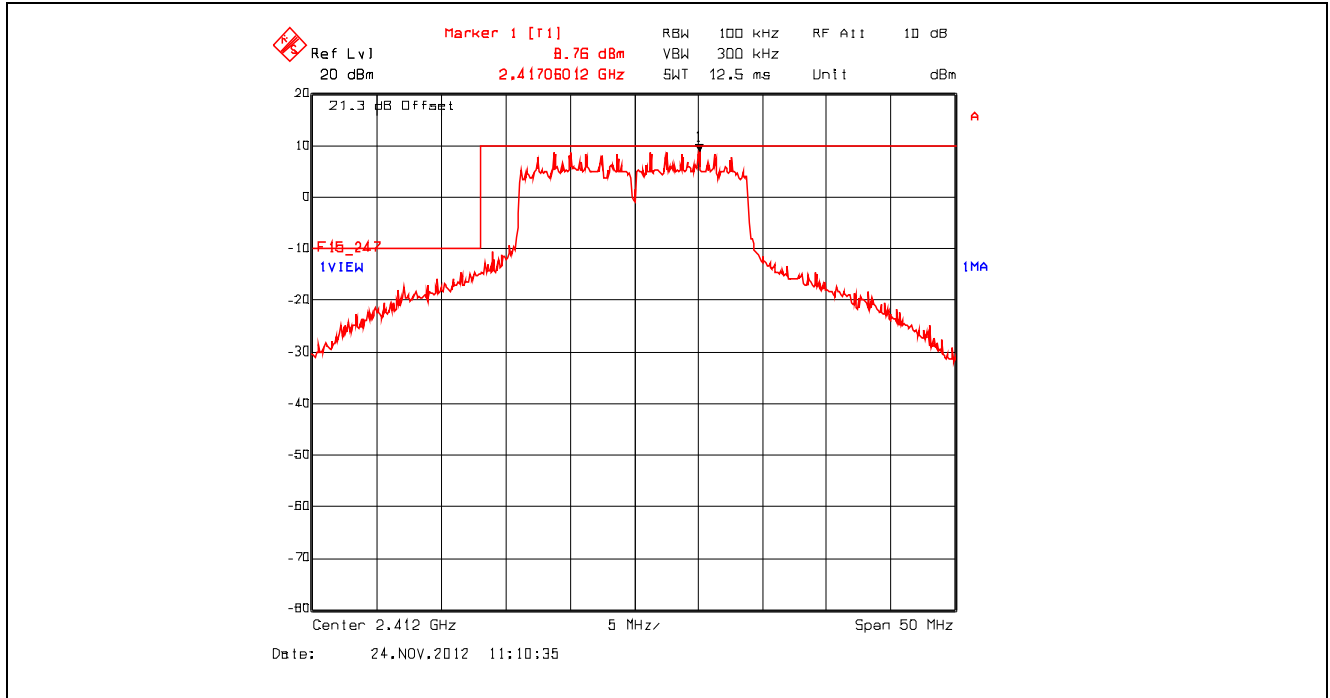


Plot 5.4.4.1.8. Band-Edge RF Conducted Emissions, Upper Band-edge, 2462 MHz, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6

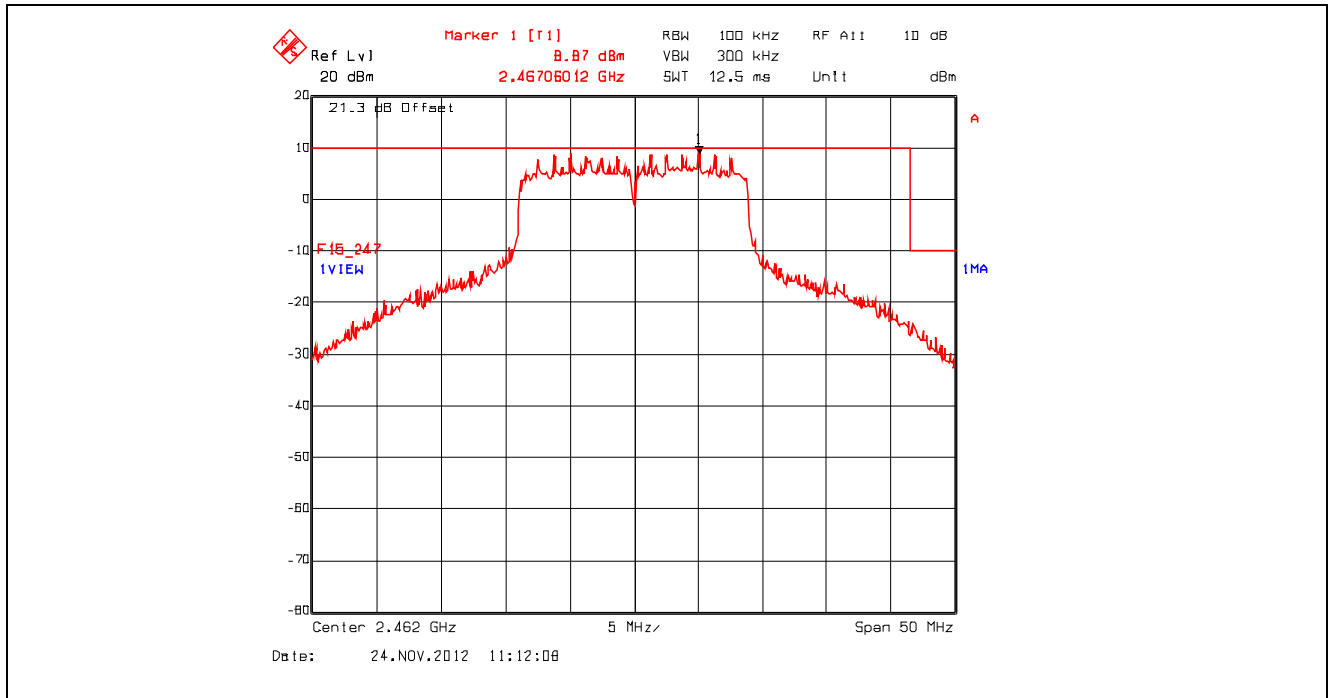


**5.4.4.2. Spurious RF Conducted Emissions – Non Restricted Frequency Bands**

Remark: The highest level from peak power test results were used to represent the final test configurations.


**Plot 5.4.4.2.1.** Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11b, 10 MHz – 4 GHz  
2412 MHz, High Power, 11 Mbps CCK, Power Setting 23 dBm

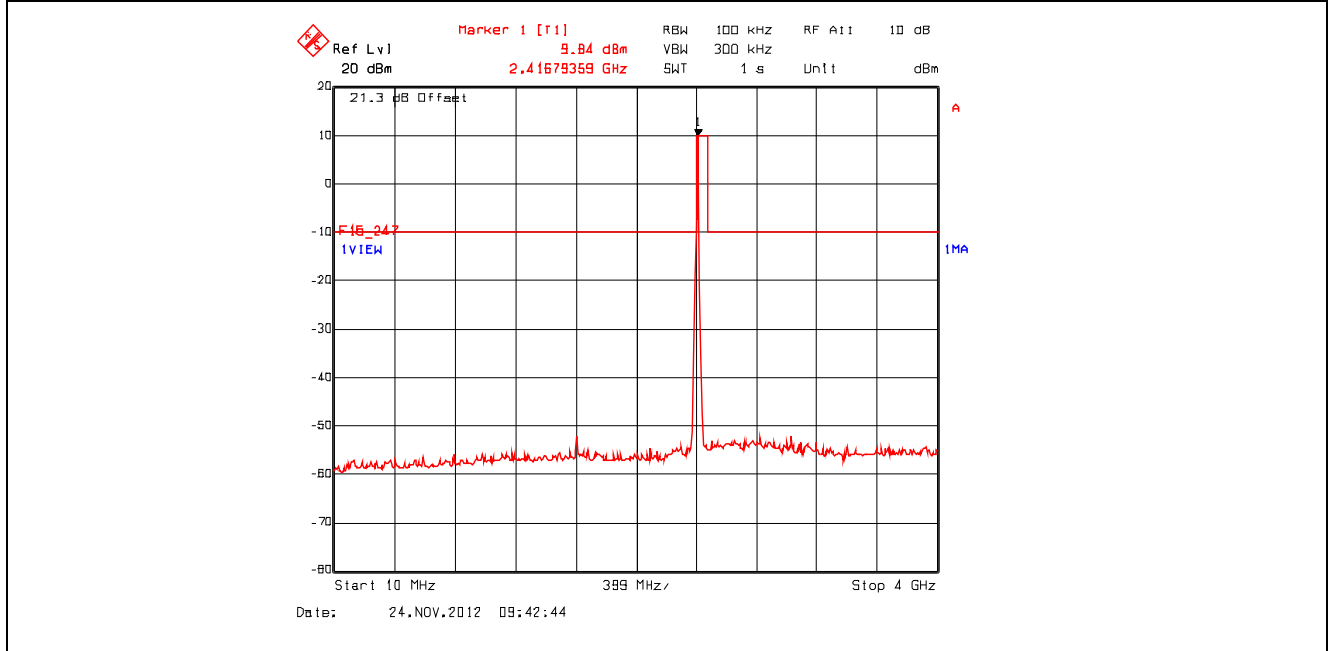


**Plot 5.4.4.2.2.** Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11b, 4 GHz – 25 GHz  
2412 MHz, High Power, 11 Mbps CCK, Power Setting 23 dBm

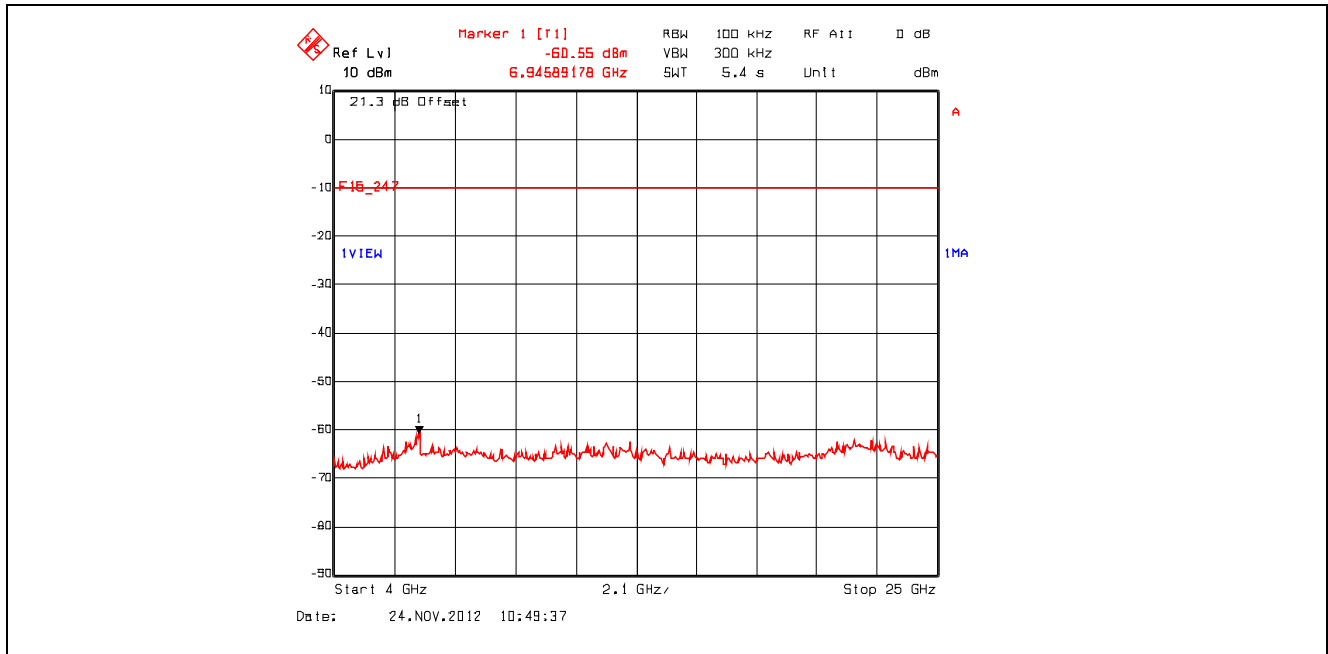


**Plot 5.4.4.2.3.** Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11b, 10 MHz – 4 GHz  
 2442 MHz, High Power, 11 Mbps CCK, Power Setting 23 dBm

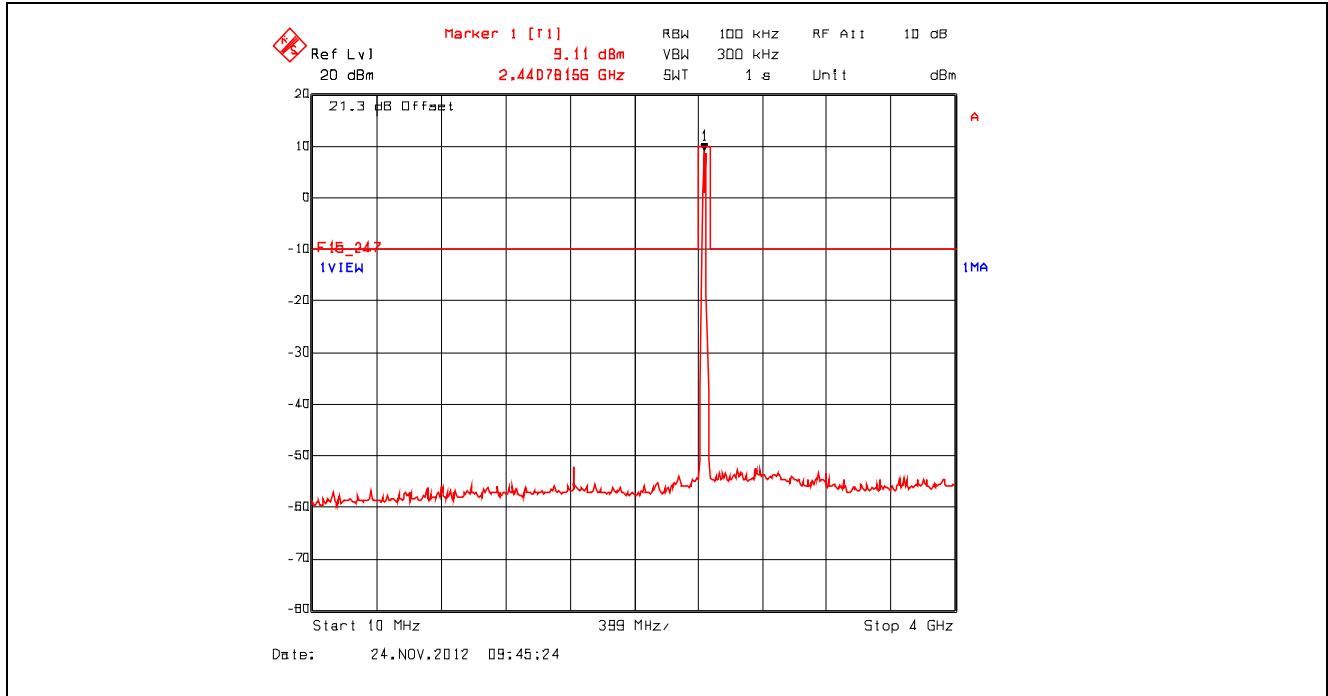


**Plot 5.4.4.2.4.** Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11b, 4 GHz – 25 GHz  
 2442 MHz, High Power, 11 Mbps CCK, Power Setting 23 dBm

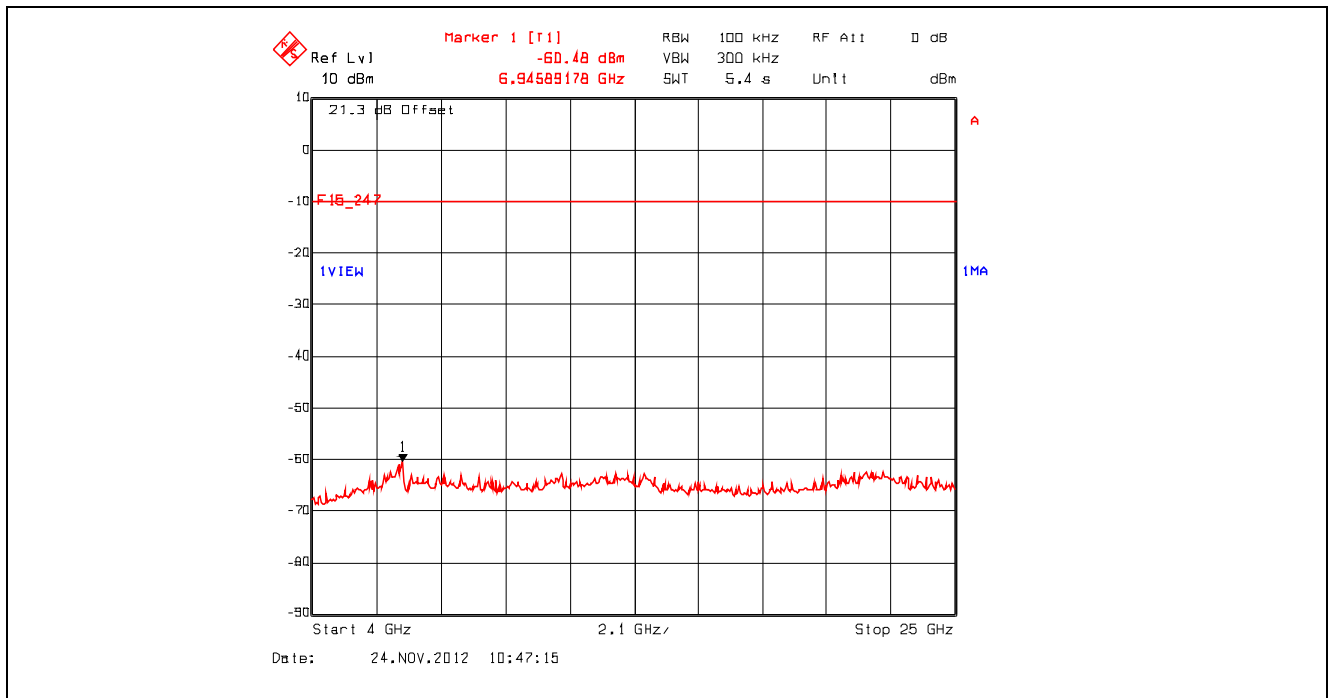


Plot 5.4.4.2.5. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11b, 10 MHz – 4 GHz  
2462 MHz, High Power, 11 Mbps CCK, Power Setting 23 dBm

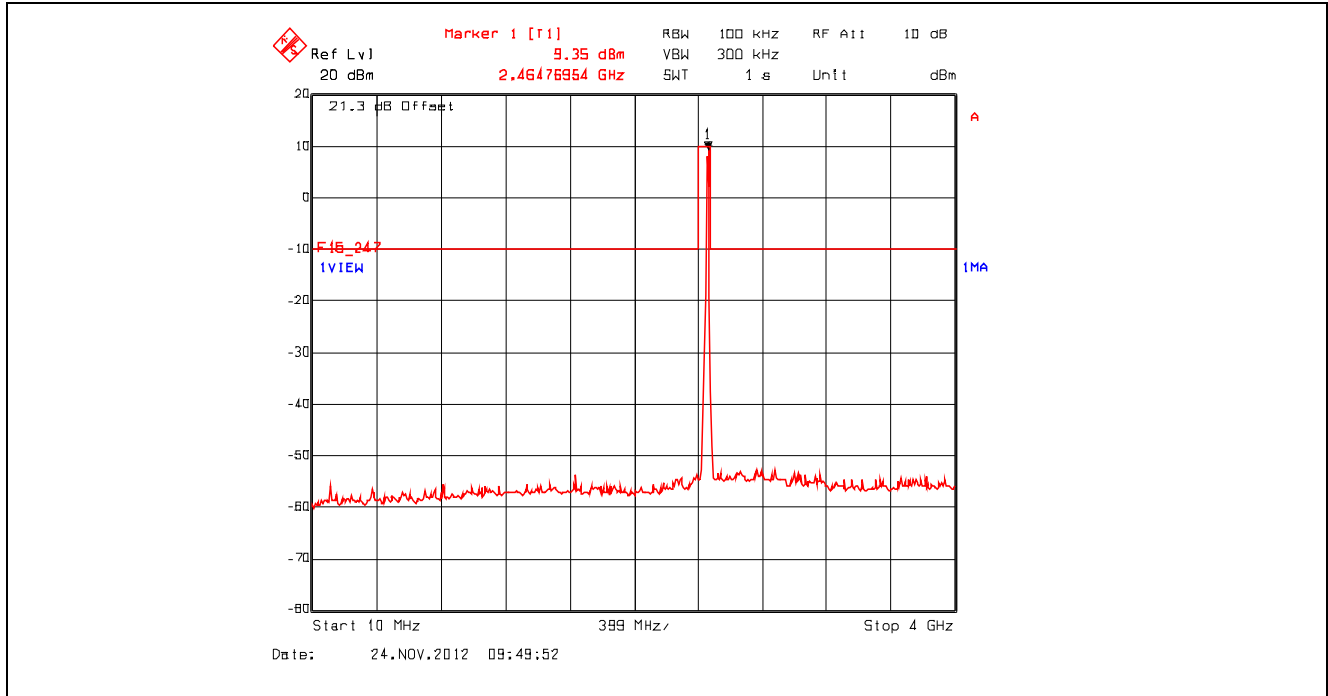


Plot 5.4.4.2.6. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11b, 4 GHz – 25 GHz  
2462 MHz, High Power, 11 Mbps CCK, Power Setting 23 dBm

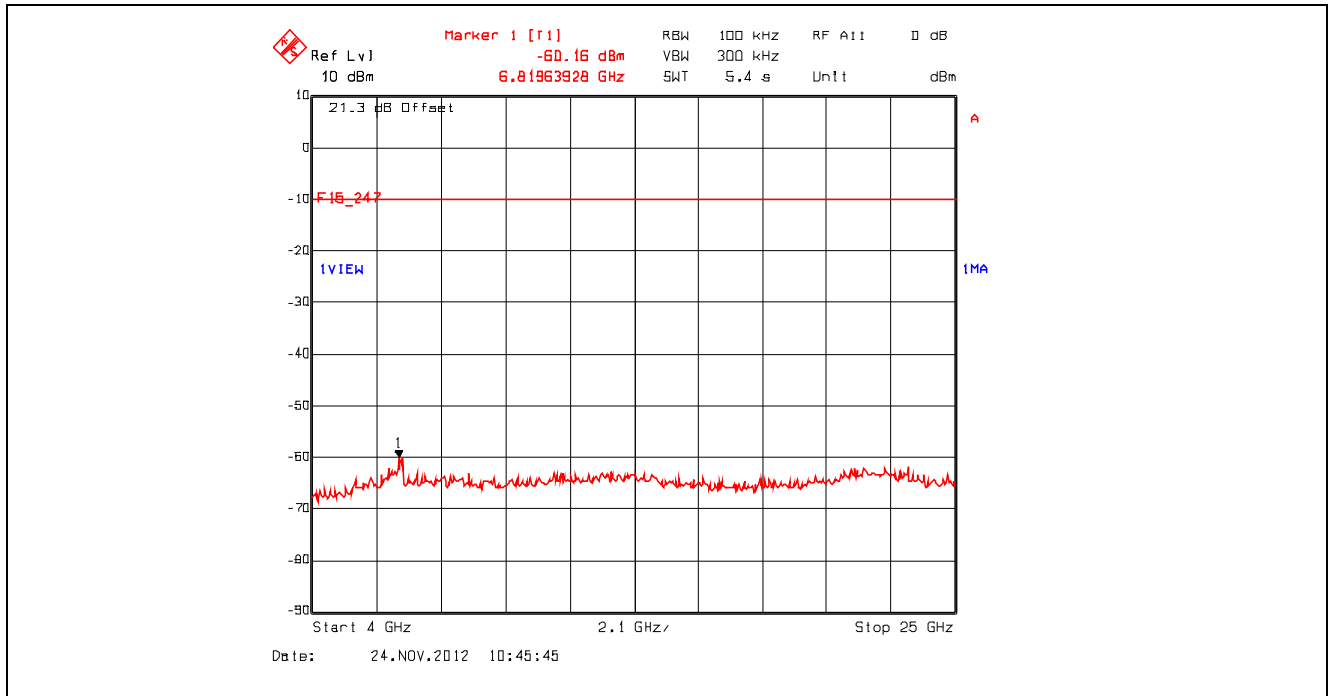


Plot 5.4.4.2.7. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11g, 10 MHz – 4 GHz  
2412 MHz, High Power, 9 Mbps BPSK, Power Setting 23 dBm

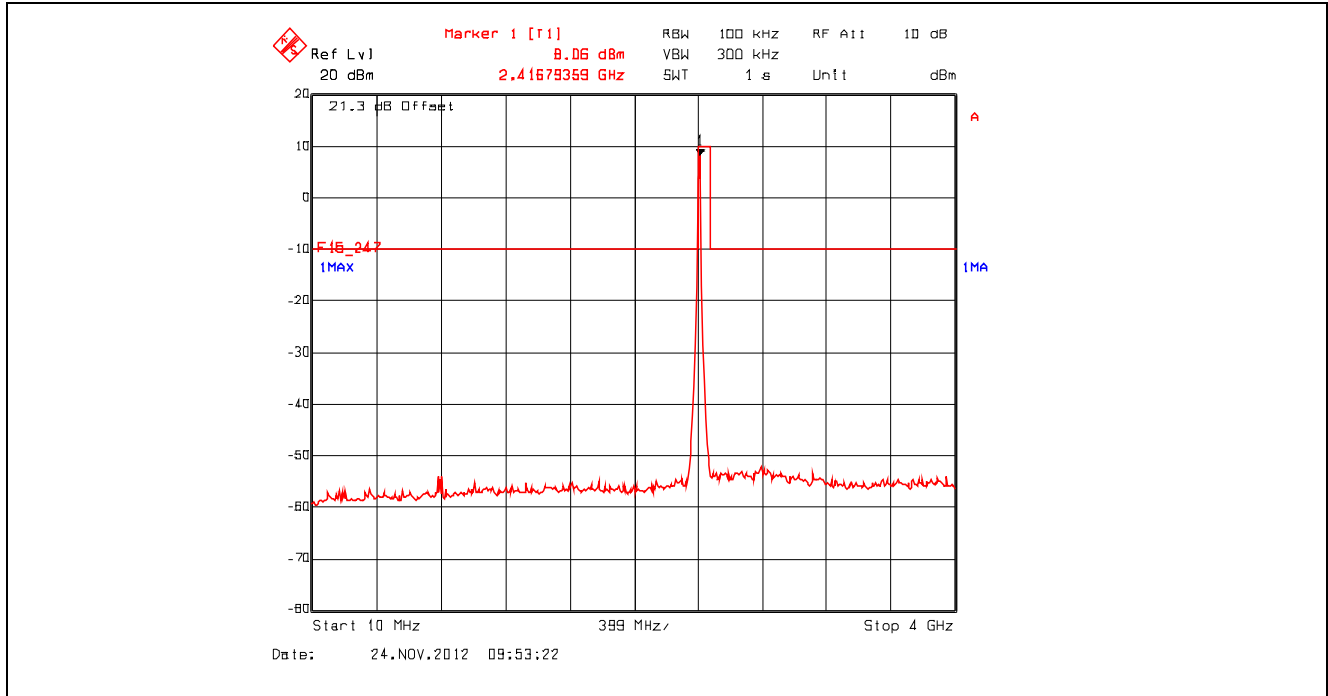


Plot 5.4.4.2.8. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11g, 4 GHz – 25 GHz  
2412 MHz, High Power, 9 Mbps BPSK, Power Setting 23 dBm

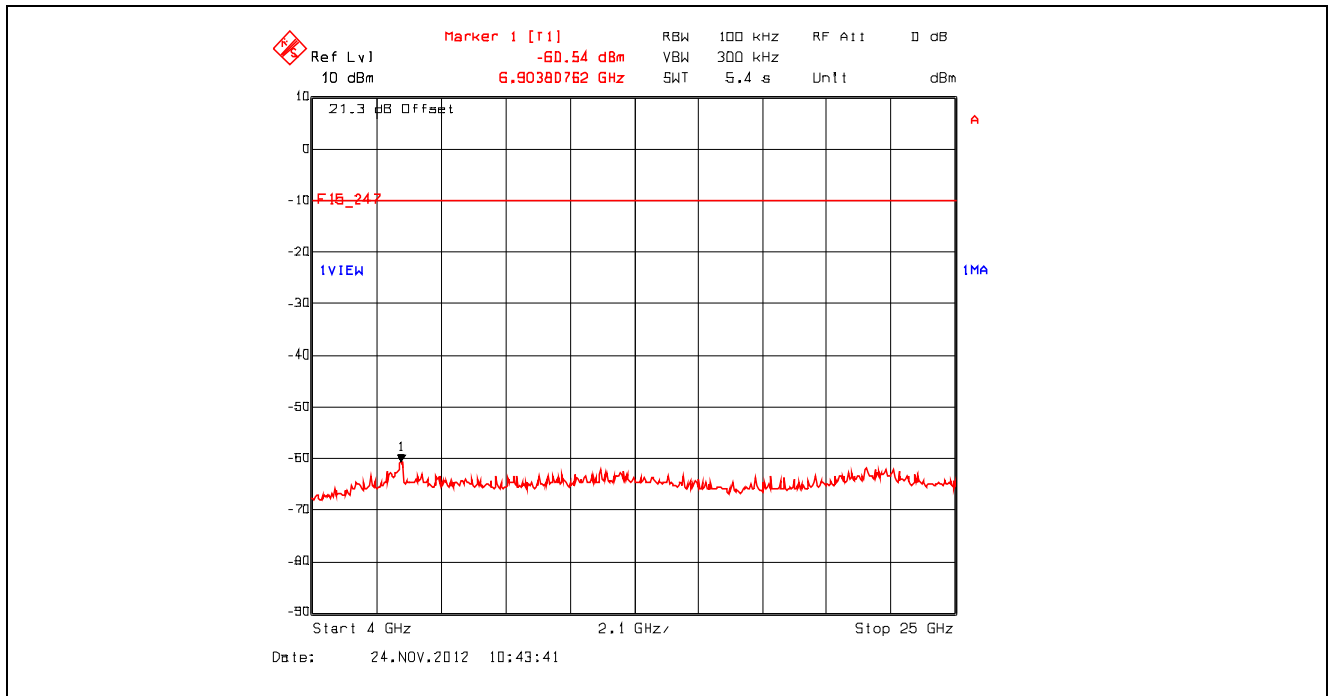

Plot 5.4.4.2.9. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11g, 10 MHz – 4 GHz  
2442 MHz, High Power, 9 Mbps BPSK, Power Setting 23 dBm

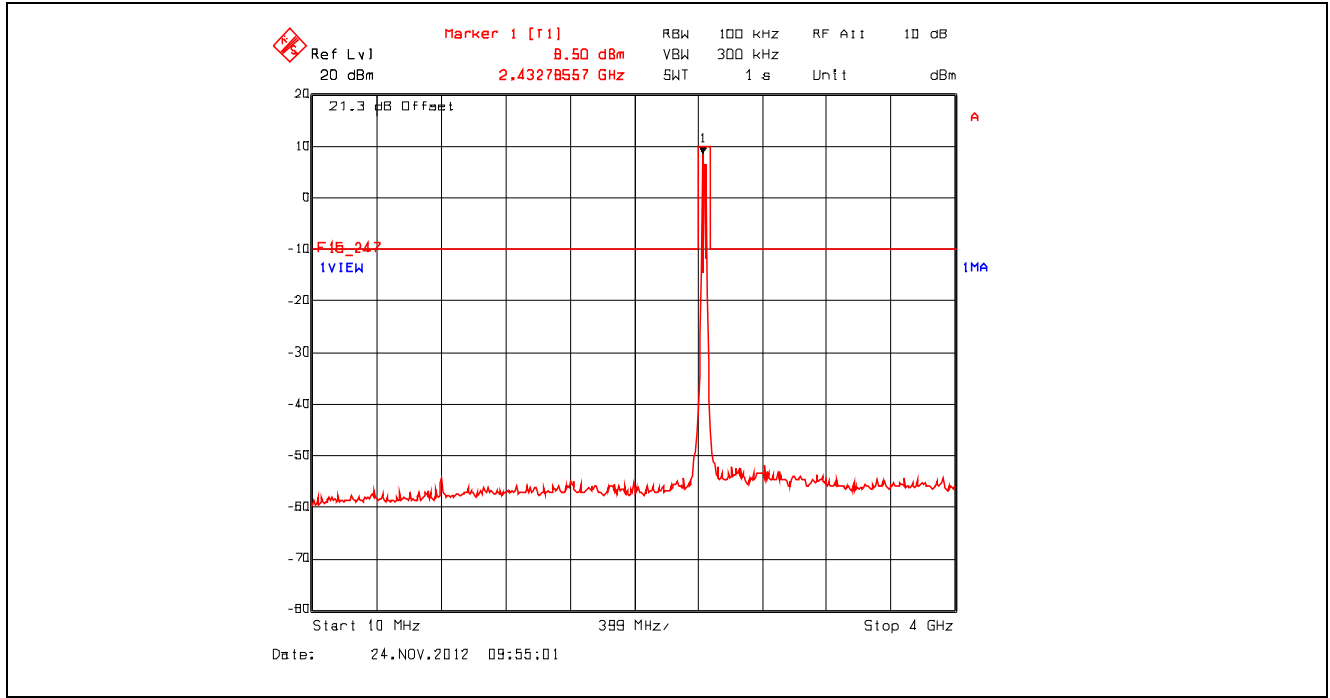


Plot 5.4.4.2.10. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11g, 4 GHz – 25 GHz  
2442 MHz, High Power, 9 Mbps BPSK, Power Setting 23 dBm

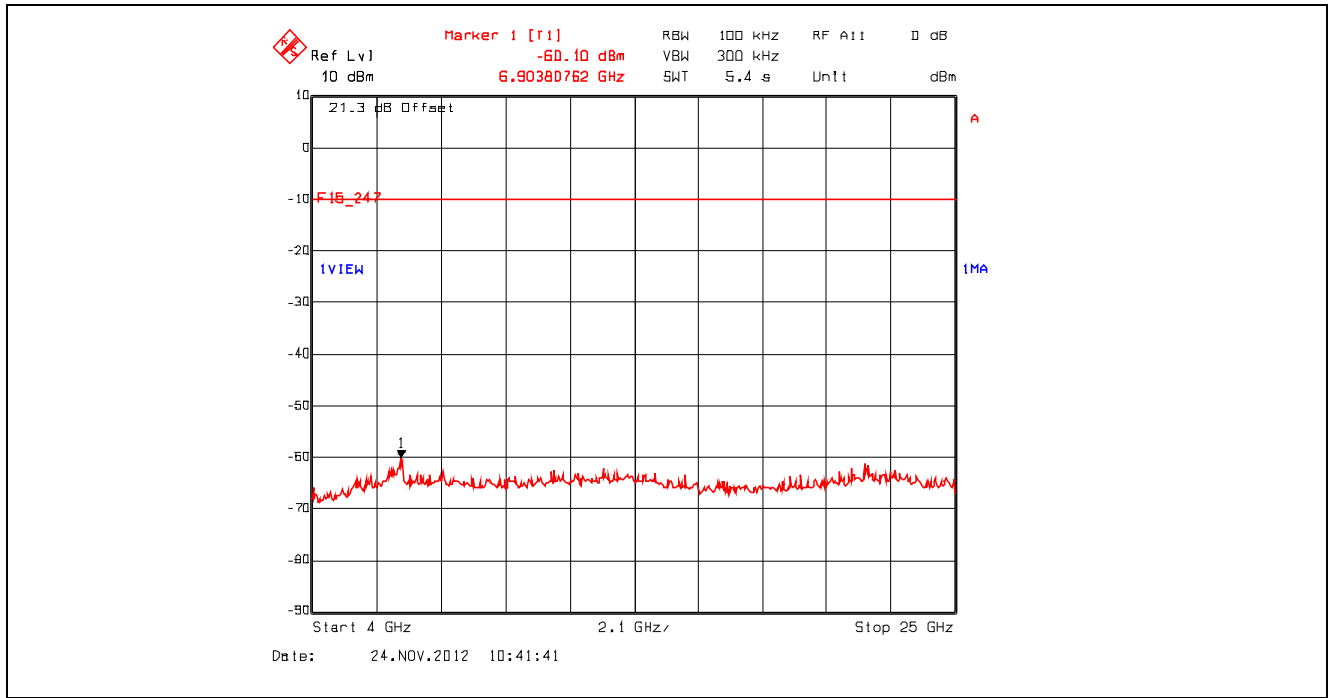





Plot 5.4.4.2.11. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11g, 10 MHz – 4 GHz  
2462 MHz, High Power, 9 Mbps BPSK, Power Setting 23 dBm

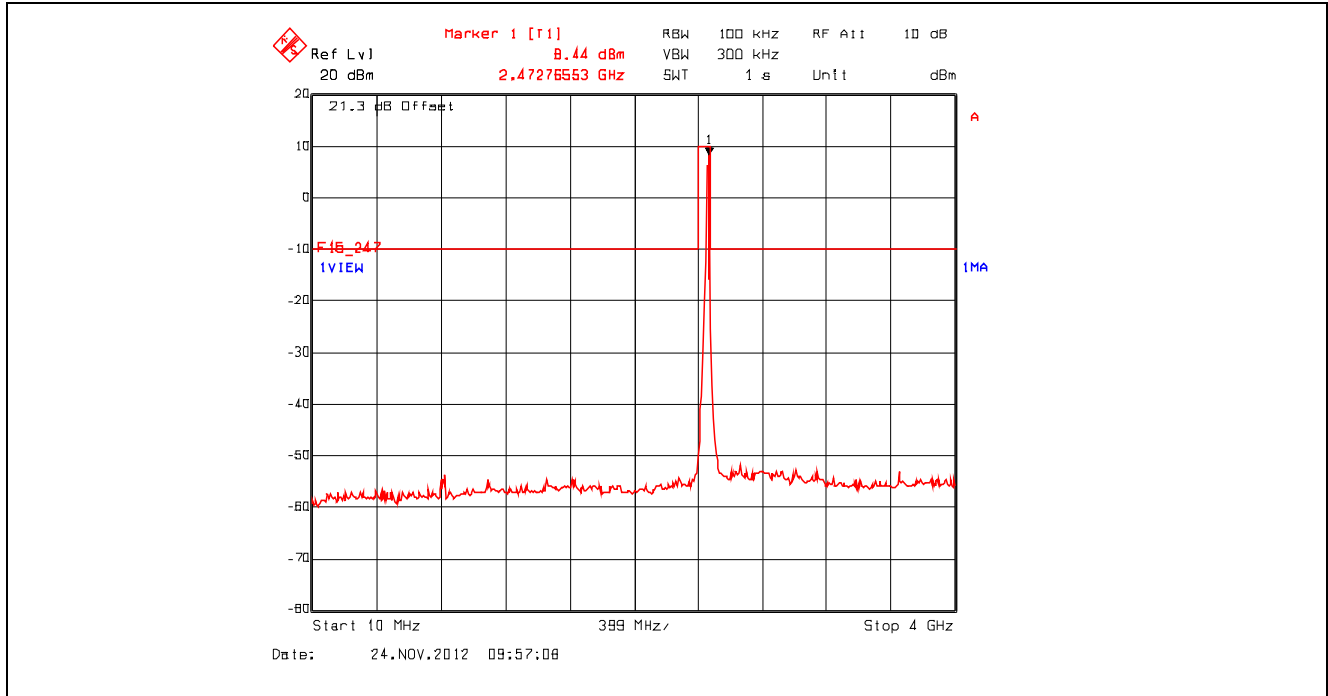


Plot 5.4.4.2.12. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11g, 4 GHz – 25 GHz  
2462 MHz, High Power, 9 Mbps BPSK, Power Setting 23 dBm

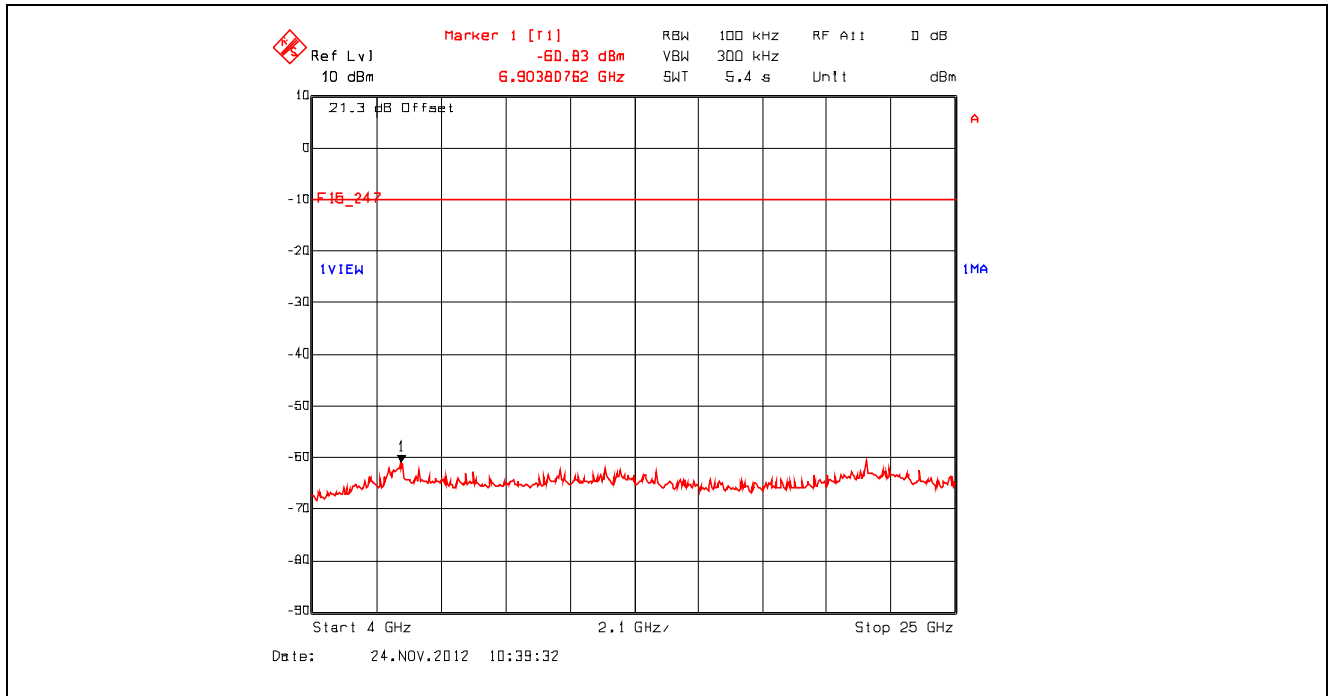


Plot 5.4.4.2.13. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 800ns, 10 MHz – 4 GHz  
2412 MHz, High Power, 65 Mbps 64-QAM 5/6, Power Setting 23 dBm

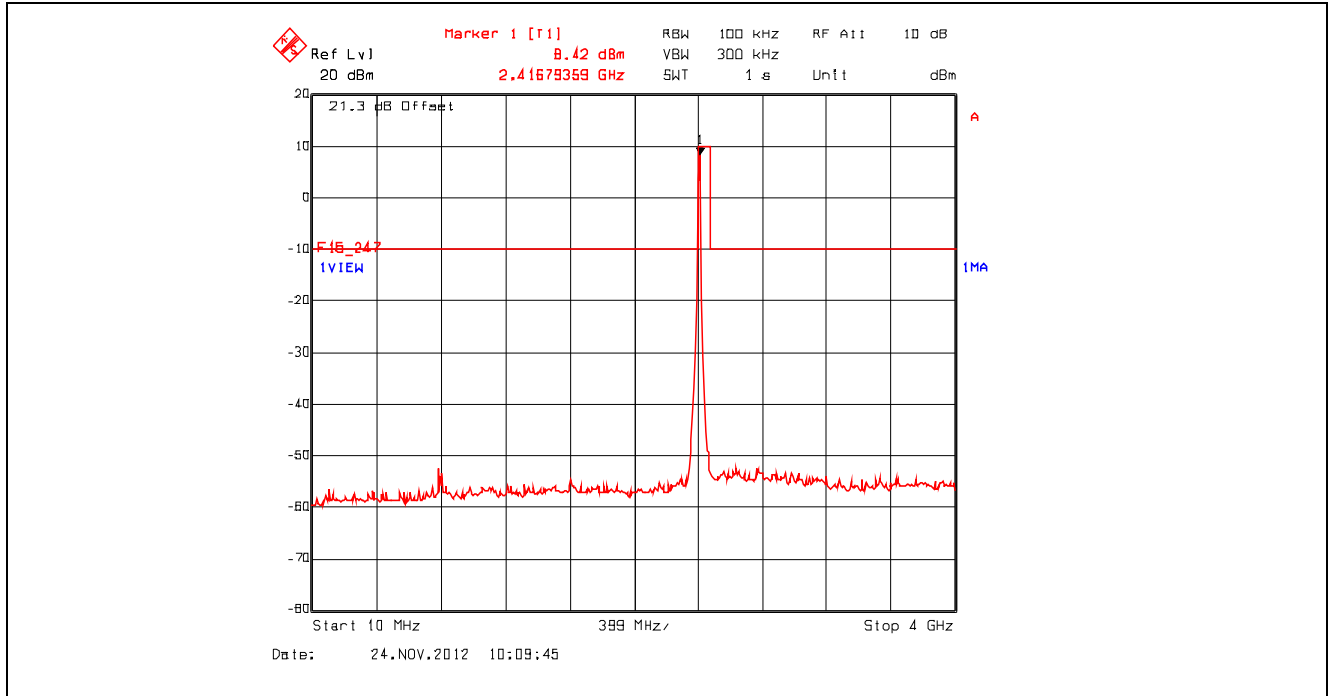


Plot 5.4.4.2.14. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 800ns, 4 GHz – 25 GHz  
2412 MHz, High Power, 65 Mbps 64-QAM 5/6, Power Setting 23 dBm

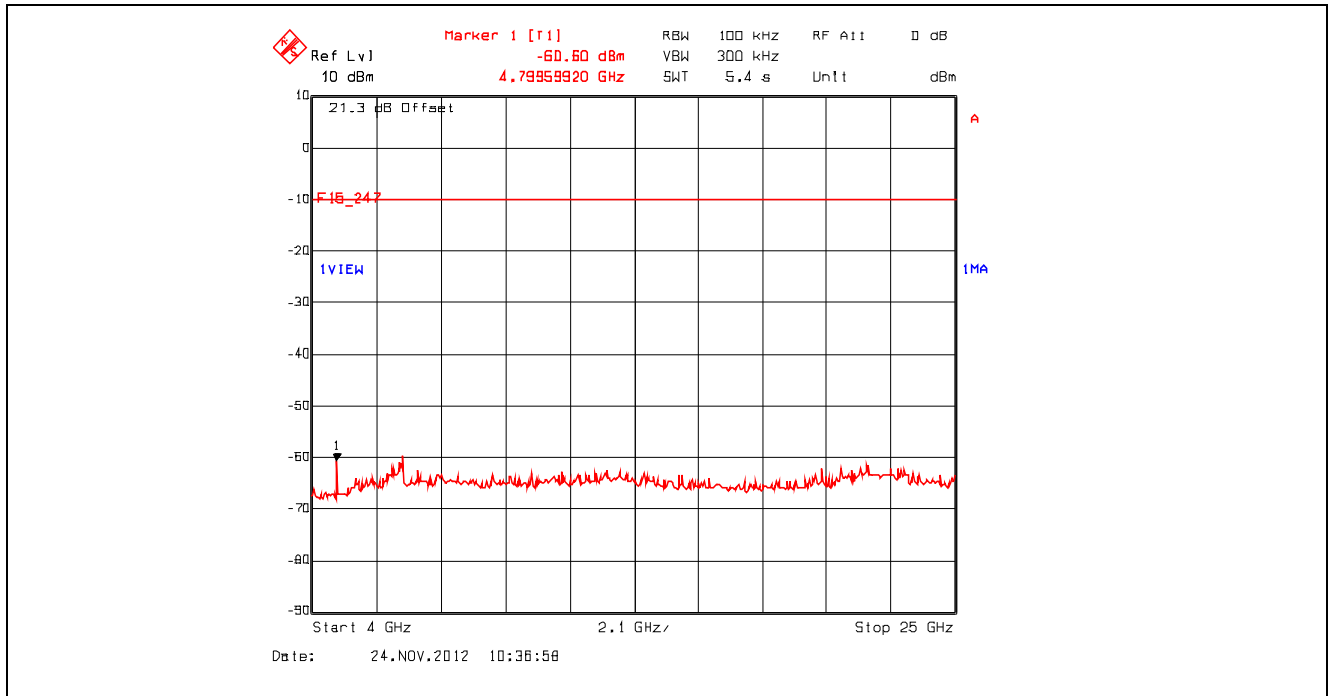


Plot 5.4.4.2.15. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 800ns, 10 MHz – 4 GHz  
2442 MHz, High Power, 65 Mbps 64-QAM 5/6, Power Setting 23 dBm

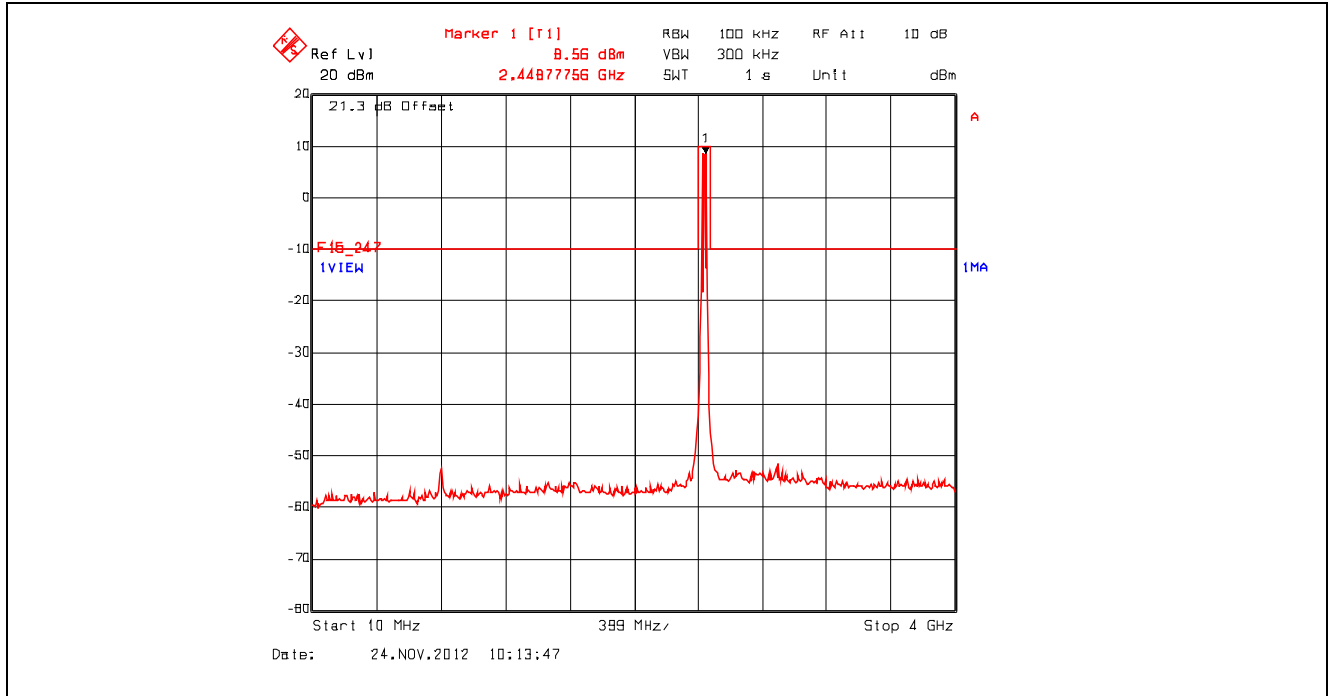


Plot 5.4.4.2.16. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 800ns, 4 GHz – 25 GHz  
2442 MHz, High Power, 65 Mbps 64-QAM 5/6, Power Setting 23 dBm

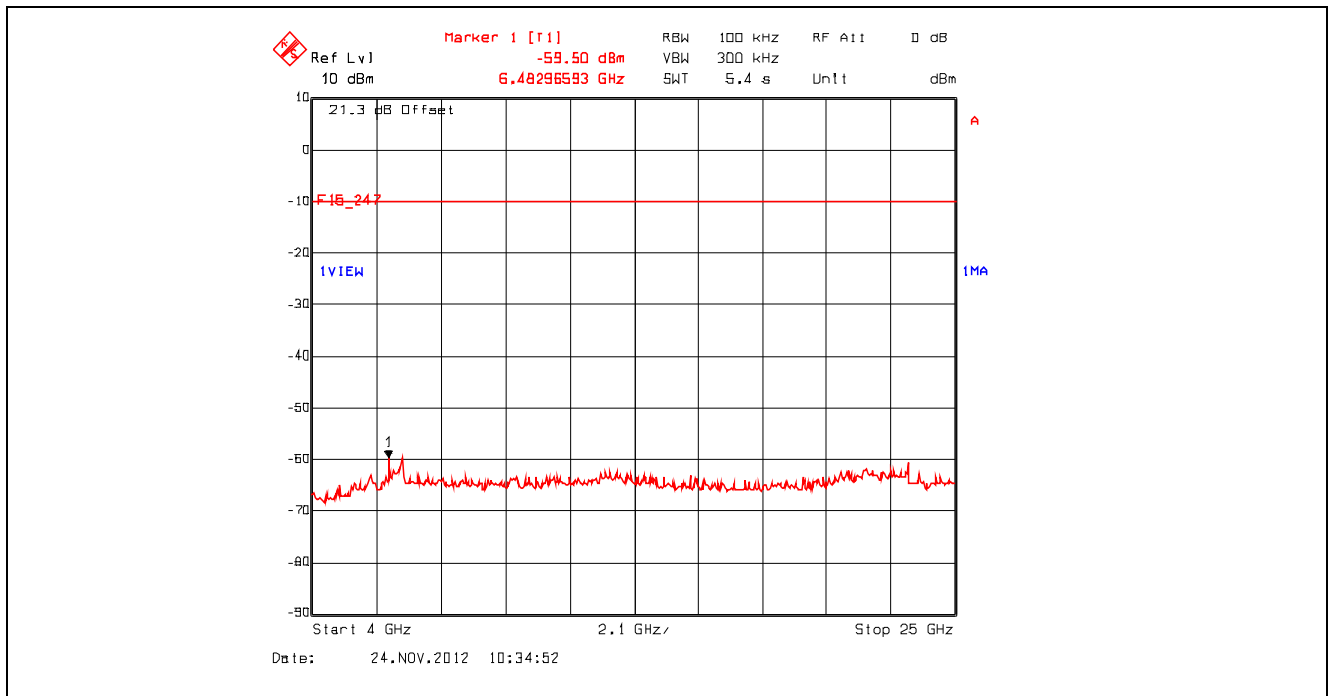


Plot 5.4.4.2.17. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 800ns, 10 MHz – 4 GHz  
2462 MHz, High Power, 65 Mbps 64-QAM 5/6, Power Setting 23 dBm

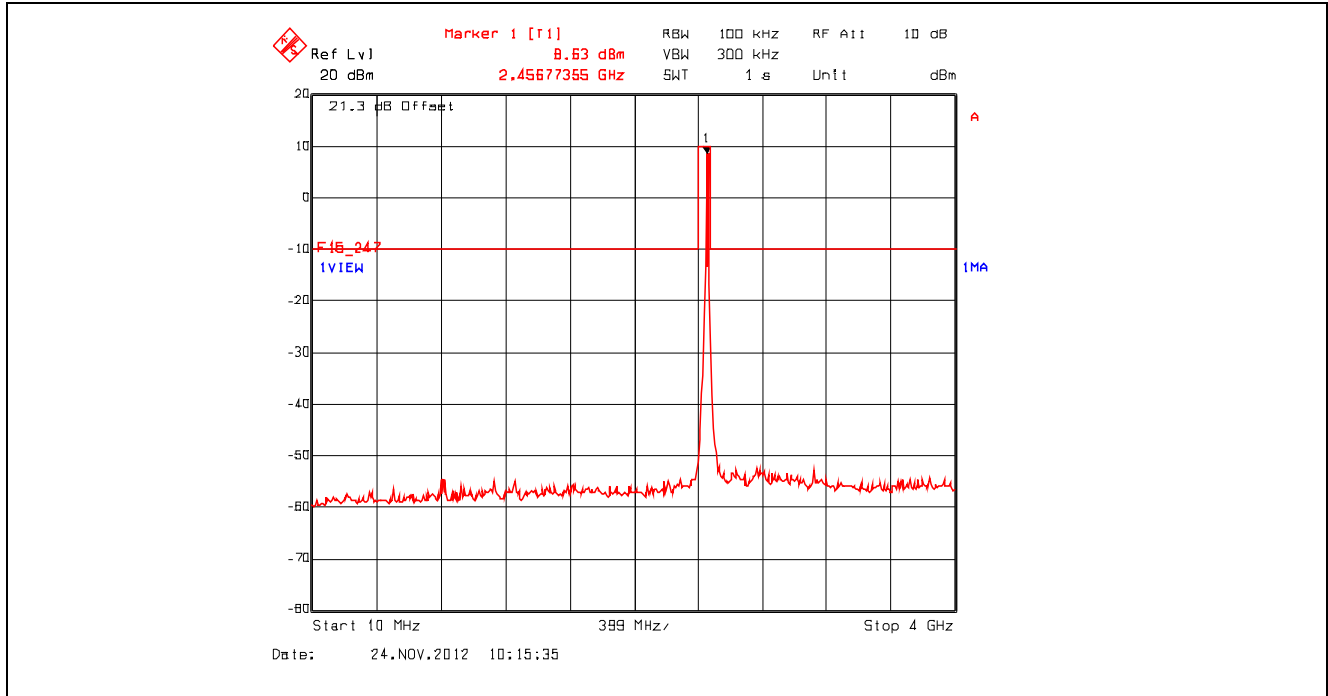


Plot 5.4.4.2.18. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 800ns, 4 GHz – 25 GHz  
2462 MHz, High Power, 65 Mbps 64-QAM 5/6, Power Setting 23 dBm

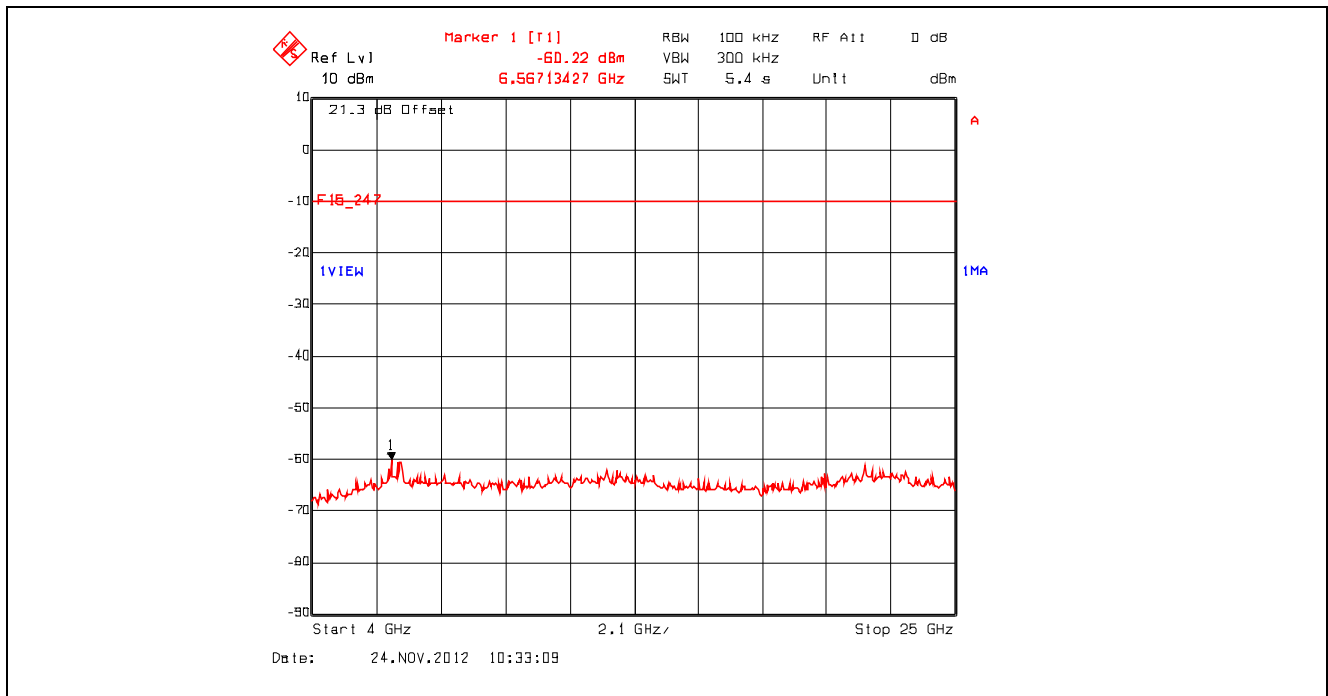


Plot 5.4.4.2.19. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 400ns, 10 MHz – 4 GHz  
2412 MHz, High Power, 7.2 Mbps BPSK 1/2, Power Setting 23 dBm

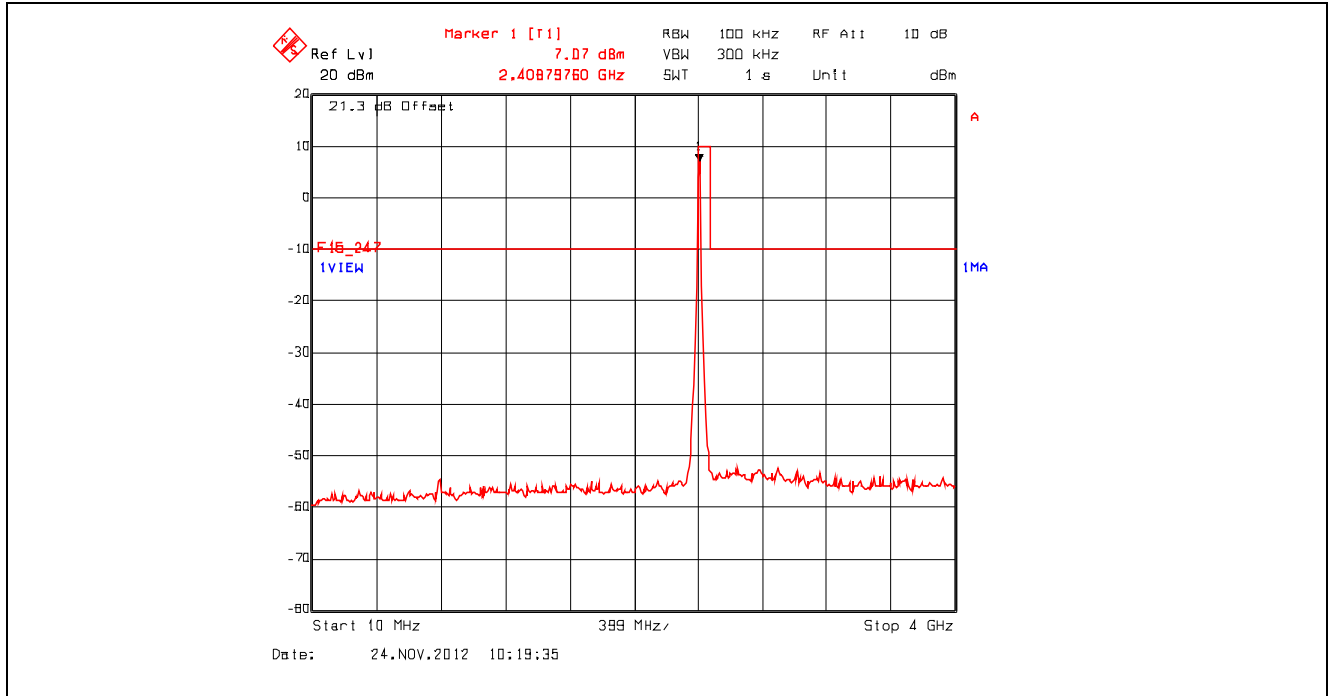


Plot 5.4.4.2.20. Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 400ns, 4 GHz – 25 GHz  
2412 MHz, High Power, 7.2 Mbps BPSK 1/2, Power Setting 23 dBm

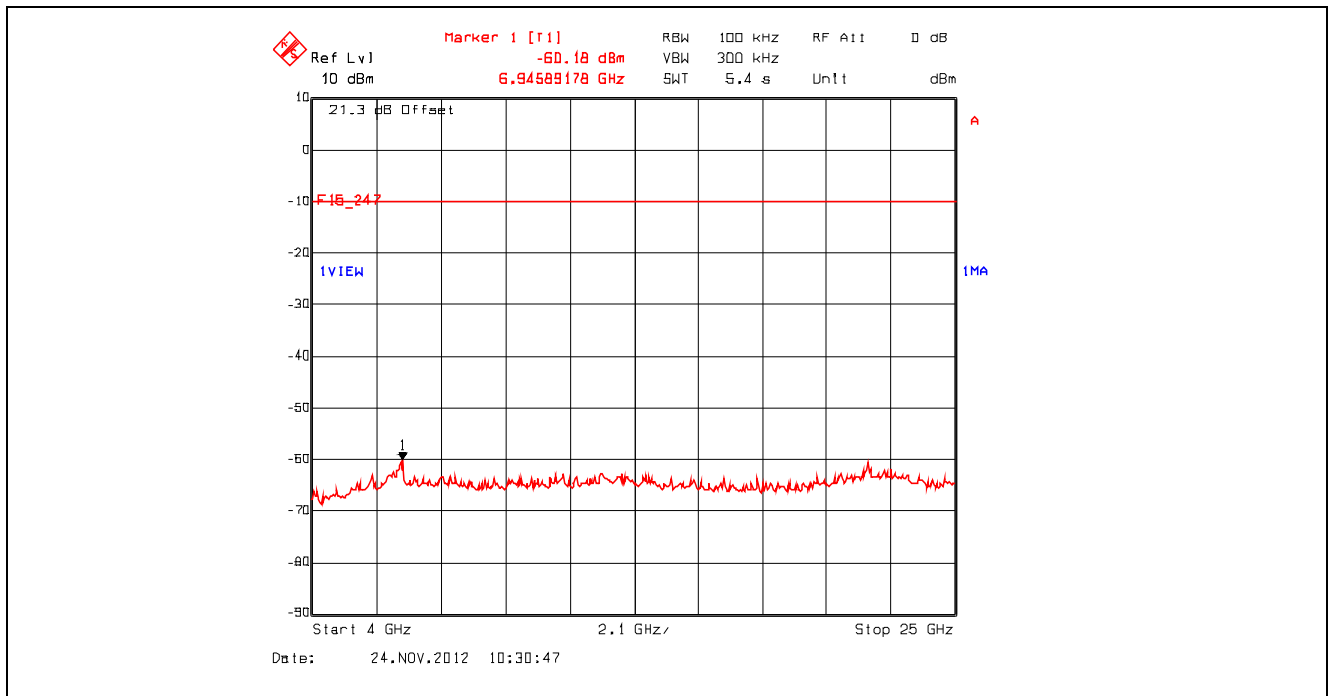


**Plot 5.4.4.2.21.** Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 400ns, 10 MHz – 4 GHz  
 2442 MHz, High Power, 7.2 Mbps BPSK 1/2, Power Setting 23 dBm

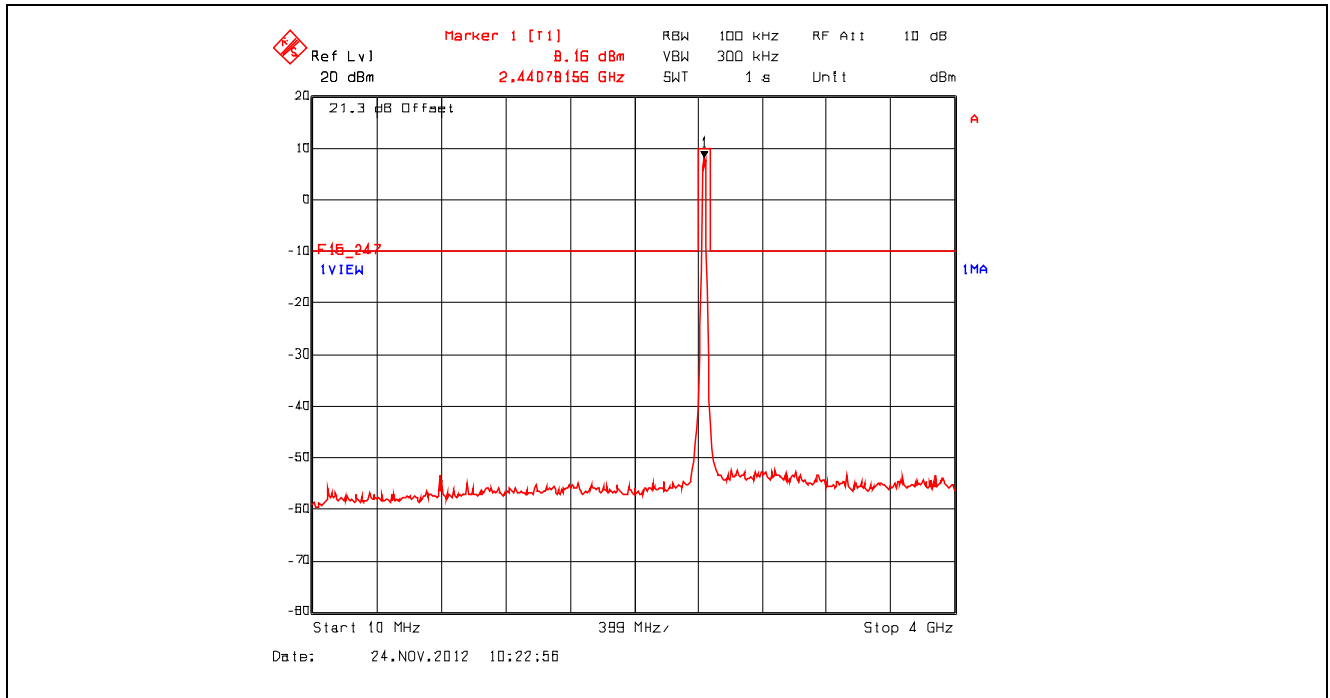


**Plot 5.4.4.2.22.** Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 400ns, 4 GHz – 25 GHz  
 2442 MHz, High Power, 7.2 Mbps BPSK 1/2, Power Setting 23 dBm

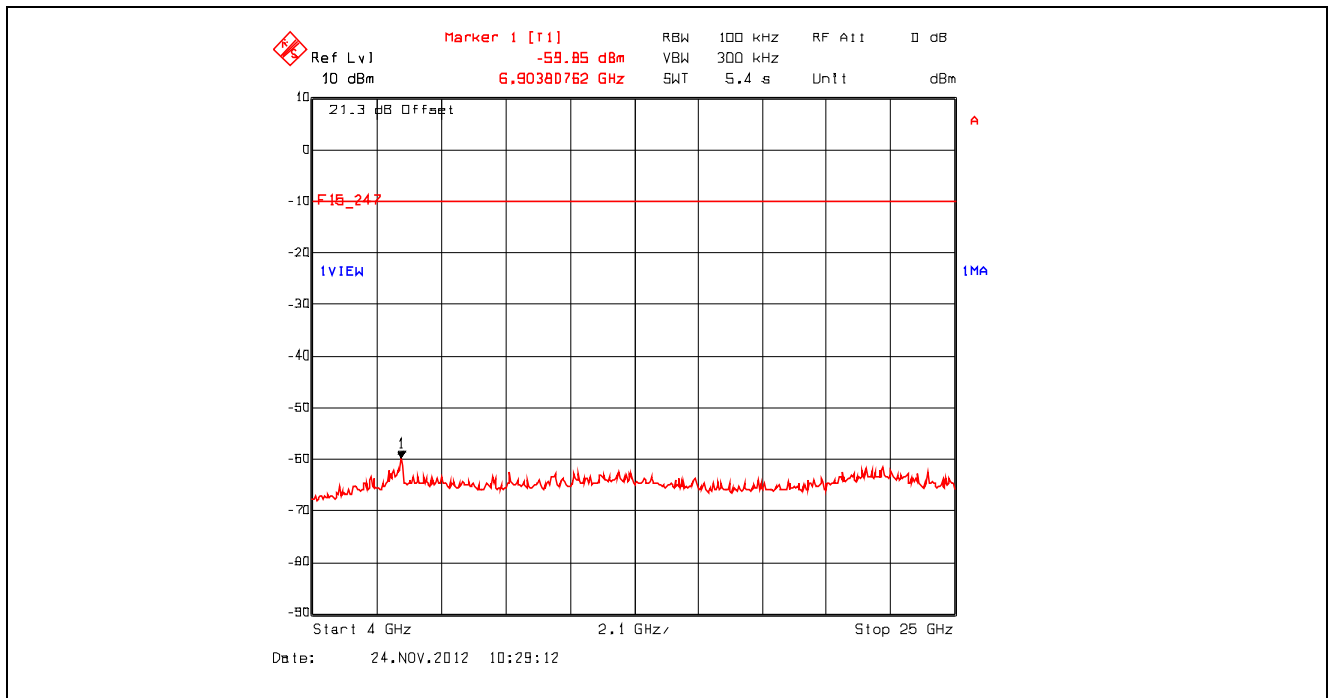

**Plot 5.4.4.2.23.** Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 400ns, 10 MHz – 4 GHz  
 2462 MHz, High Power, 7.2 Mbps BPSK 1/2, Power Setting 23 dBm

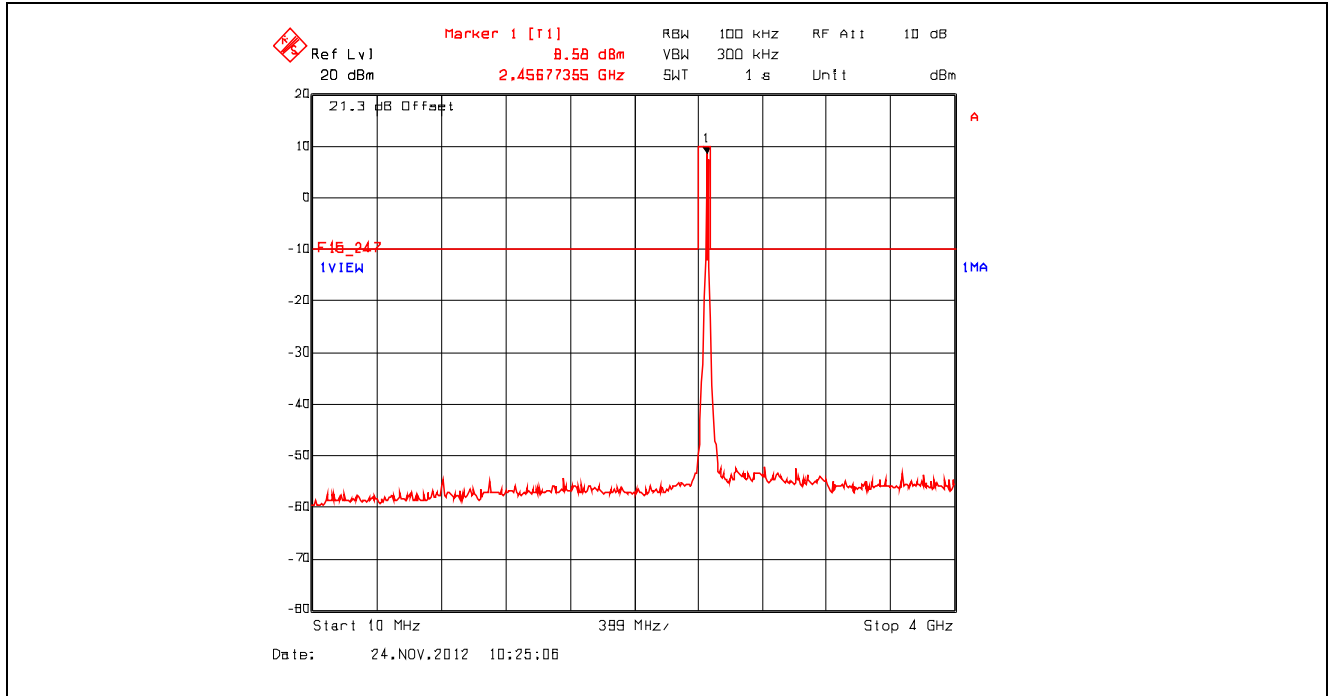

**Plot 5.4.4.2.24.** Conducted Spurious Emissions - Non Restricted Frequency Bands, 802.11n 400ns, 4 GHz – 25 GHz  
 2462 MHz, High Power, 7.2 Mbps BPSK 1/2, Power Setting 23 dBm

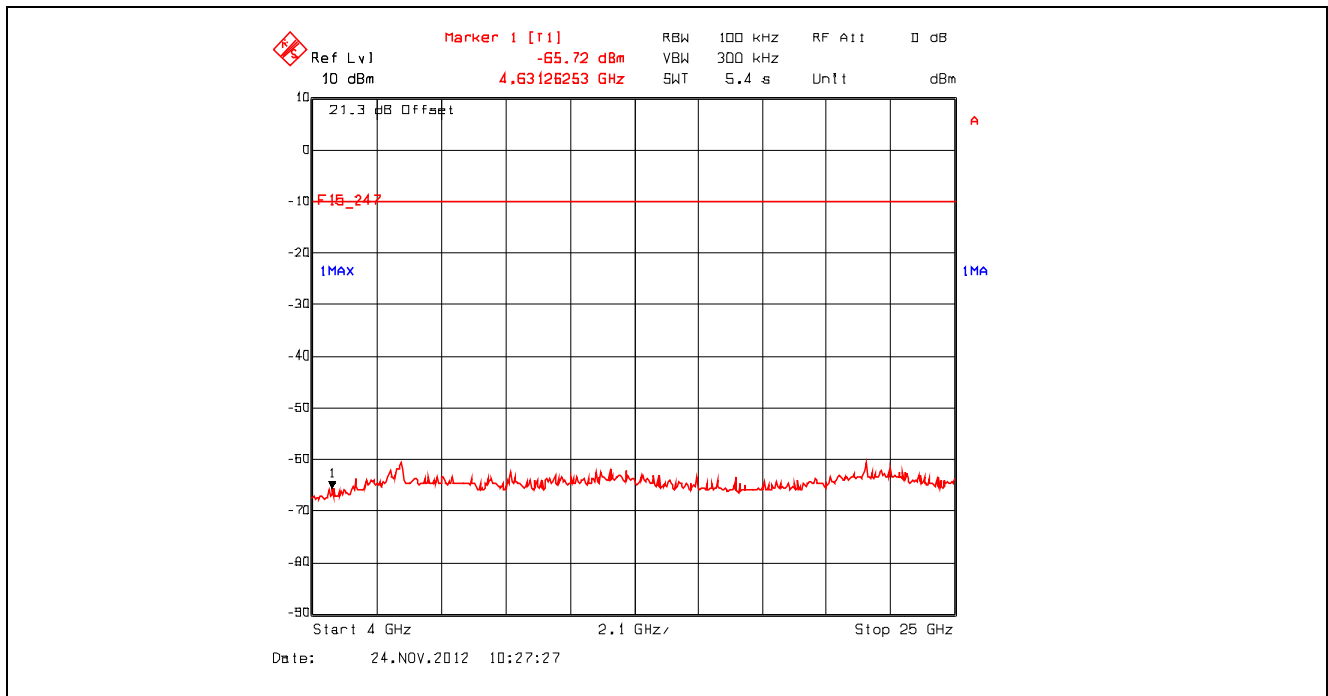


**5.4.4.3. Conducted Spurious Emissions – Restricted Bands, Highest Power Setting (23) with Highest Gain Antenna (15 dBi)**

**Remark(s):**


- Based on the peak power measurements, the highest power from each mode of operation were selected as the final test configurations.
- Offset for 802.11b mode: Insertion Loss (11.59 dB) + Highest Antenna Gain (19 dBi) - Minimum Antenna Feedline Loss (9.50 dB) = 21.1 dB
- Offset for 802.11g mode: Insertion Loss (11.59 dB) + Highest Antenna Gain (19 dBi) - Minimum Antenna Feedline Loss (11 dB) = 19.6 dB
- Offset for 802.11n 800ns mode: Insertion Loss (11.59 dB) + Highest Antenna Gain (19 dBi) - Minimum Antenna Feedline Loss (11 dB) = 19.6 dB
- Offset for 802.11n 400ns mode: Insertion Loss (11.59 dB) + Highest Antenna Gain (19 dBi) - Minimum Antenna Feedline Loss (11.5 dB) = 19.1dB

**Plot 5.4.4.3.1. Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK 2412 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter**

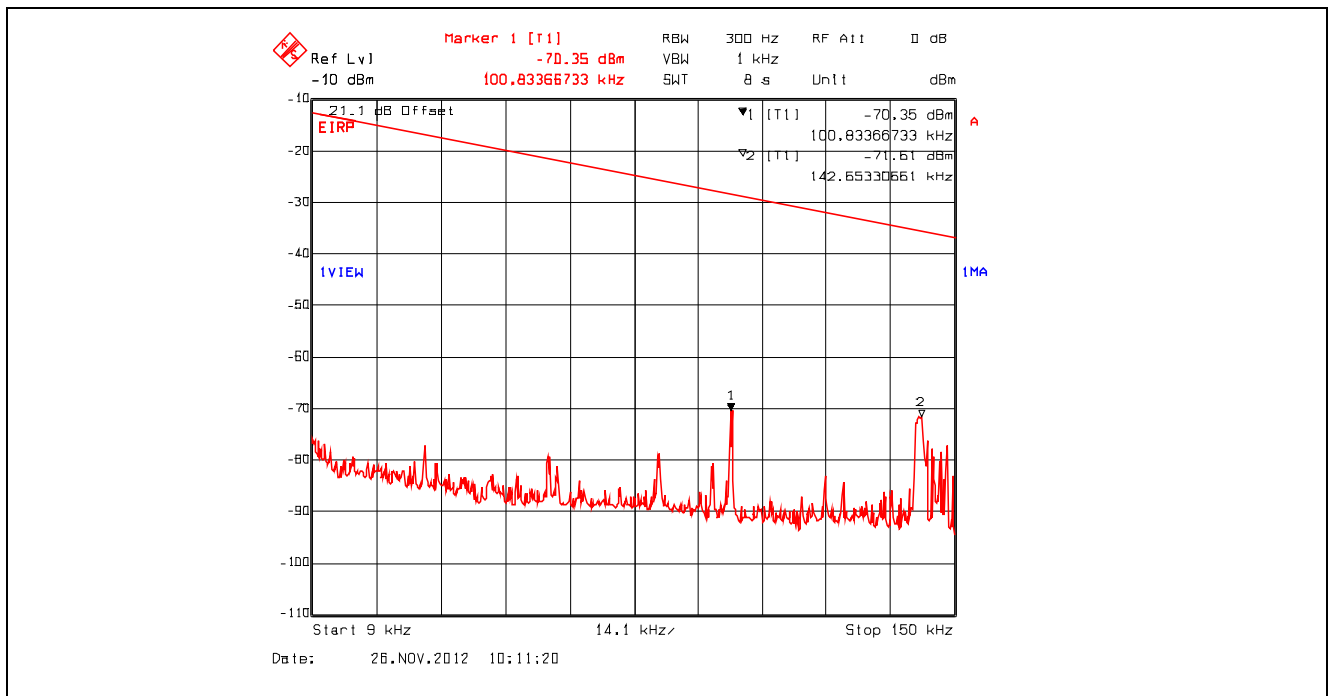





Plot 5.4.4.3.2. Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
2412 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

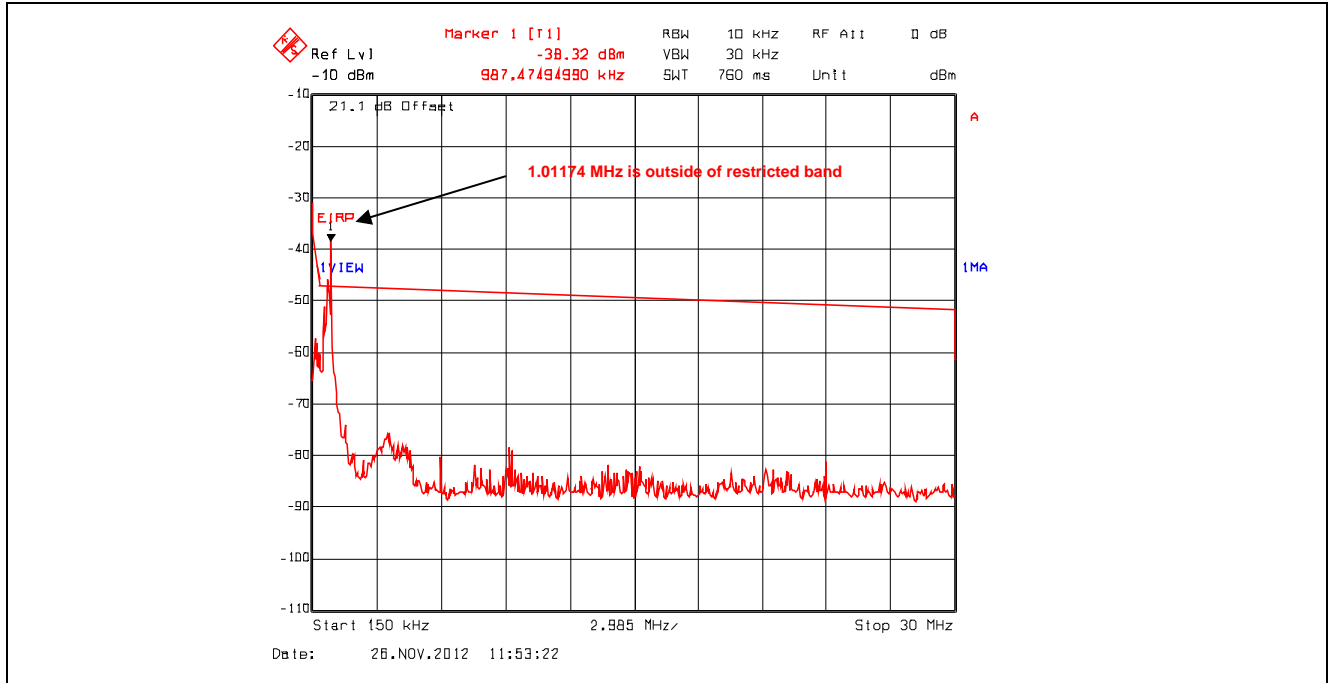


Plot 5.4.4.3.3. Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
2412 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

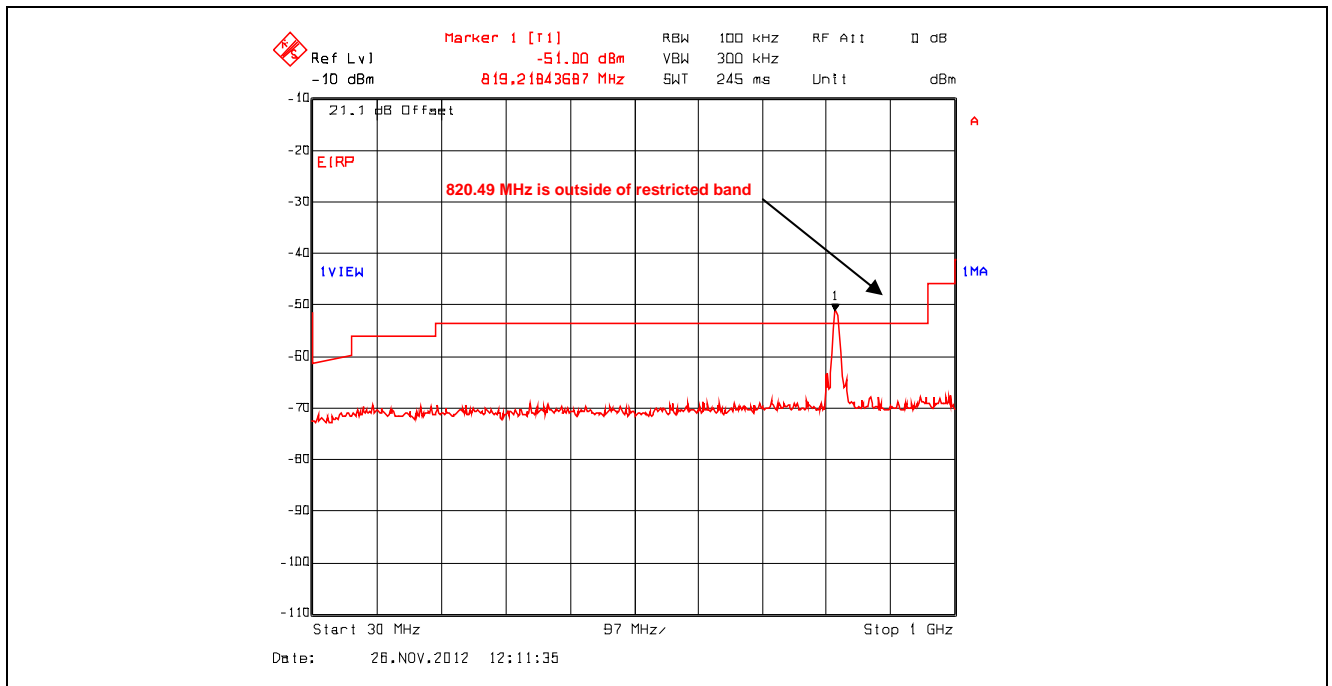


**Plot 5.4.4.3.4.** Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
 2412 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

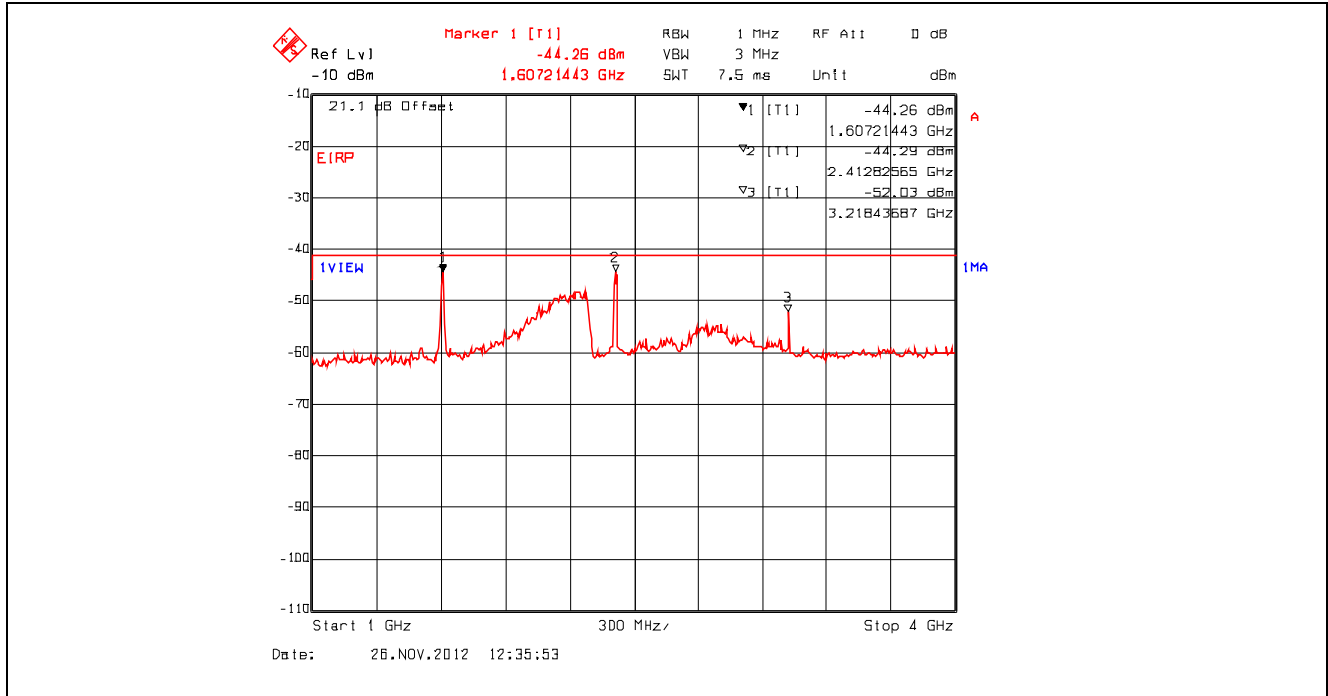


**Plot 5.4.4.3.5.** Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
 2412 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

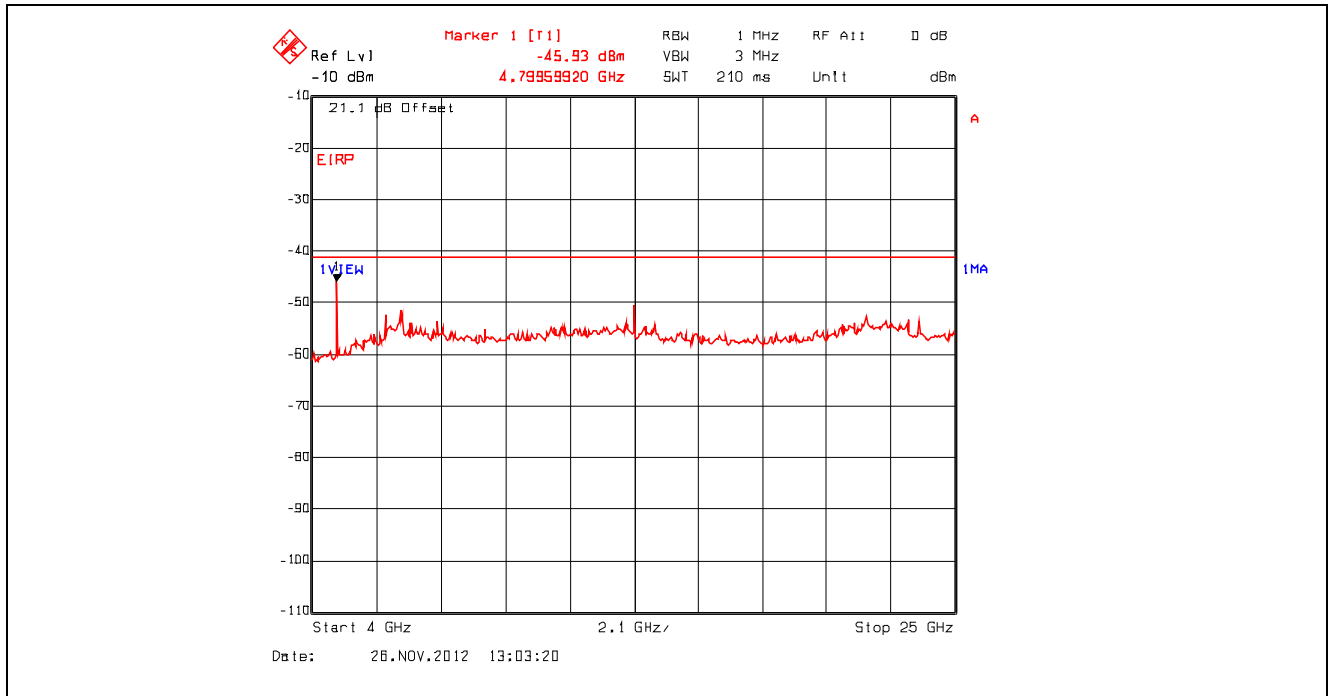


**Plot 5.4.4.3.6.** Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
 2442 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

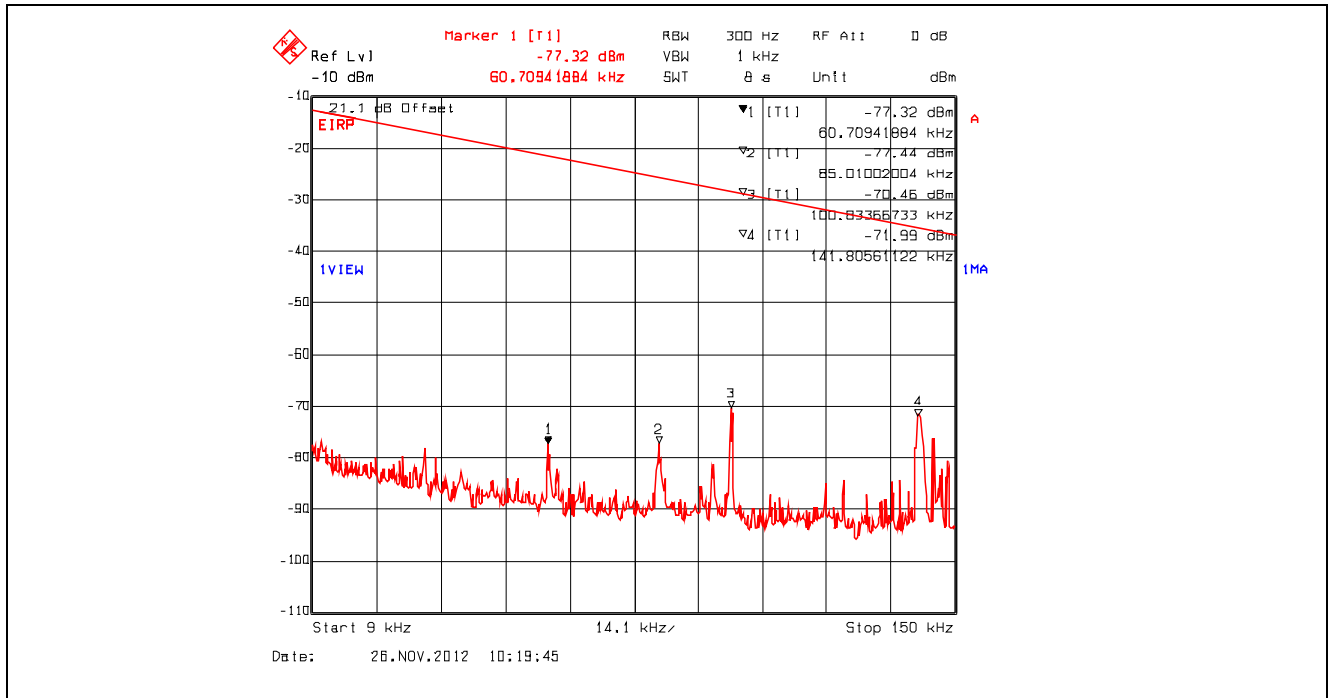


**Plot 5.4.4.3.7.** Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
 2442 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

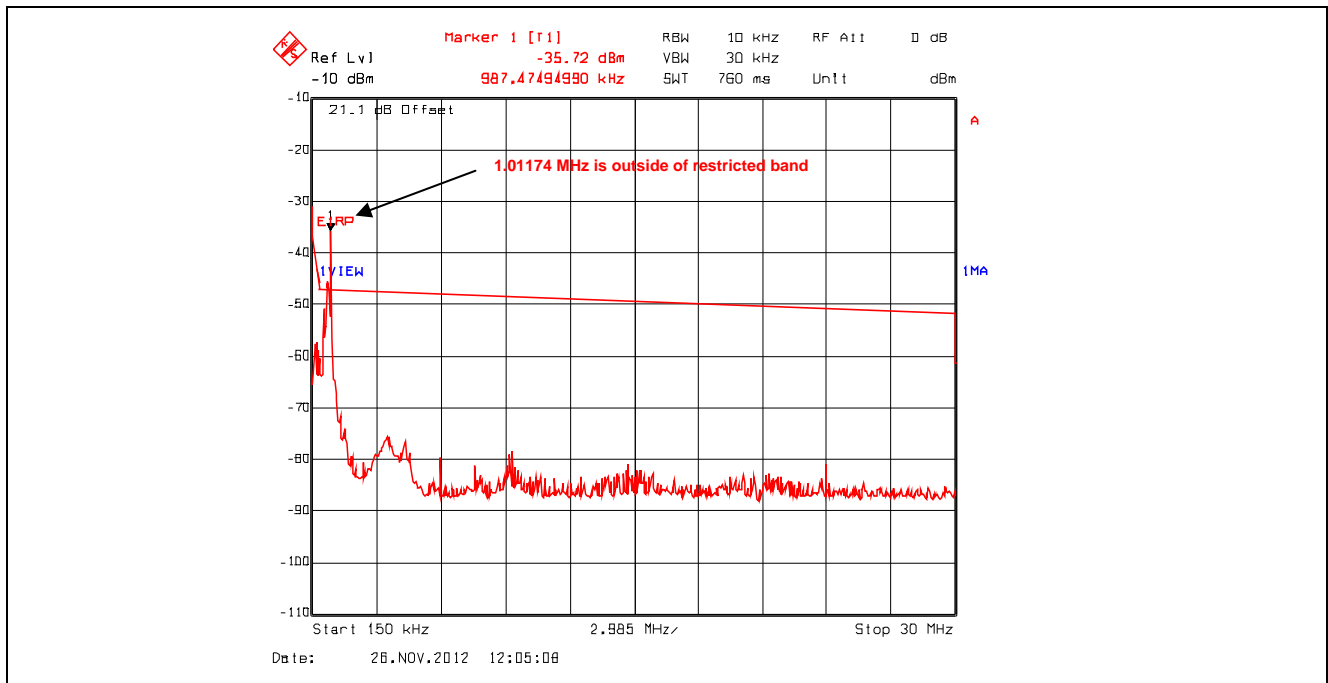


Plot 5.4.4.3.8. Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
 2442 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

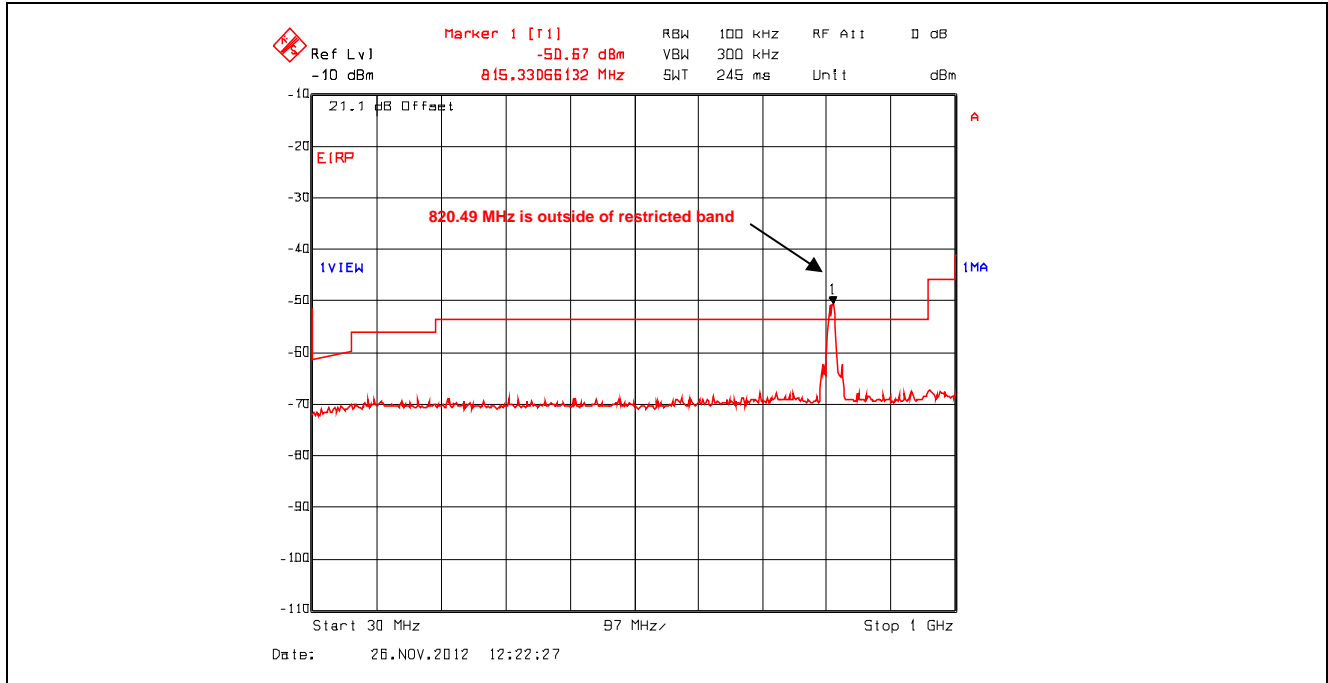


Plot 5.4.4.3.9. Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
 2442 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

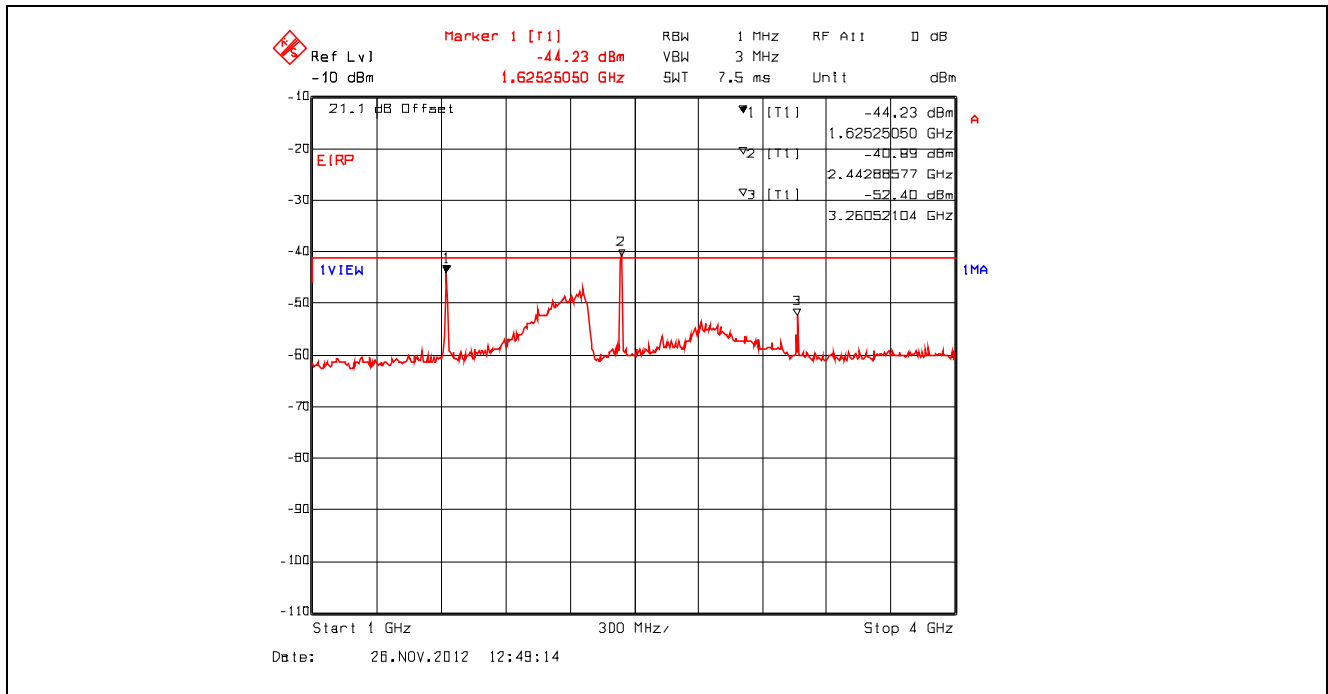


Plot 5.4.4.3.10. Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
2442 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

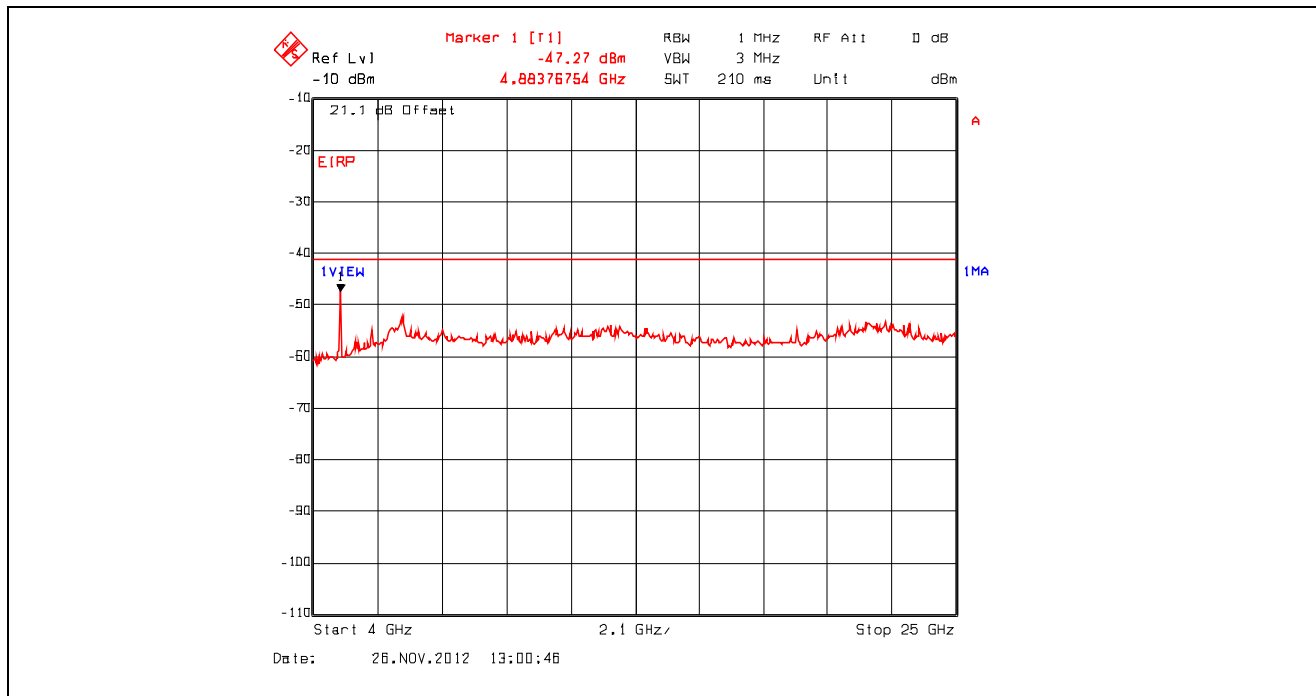


**Plot 5.4.4.3.11.** Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
 2462 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

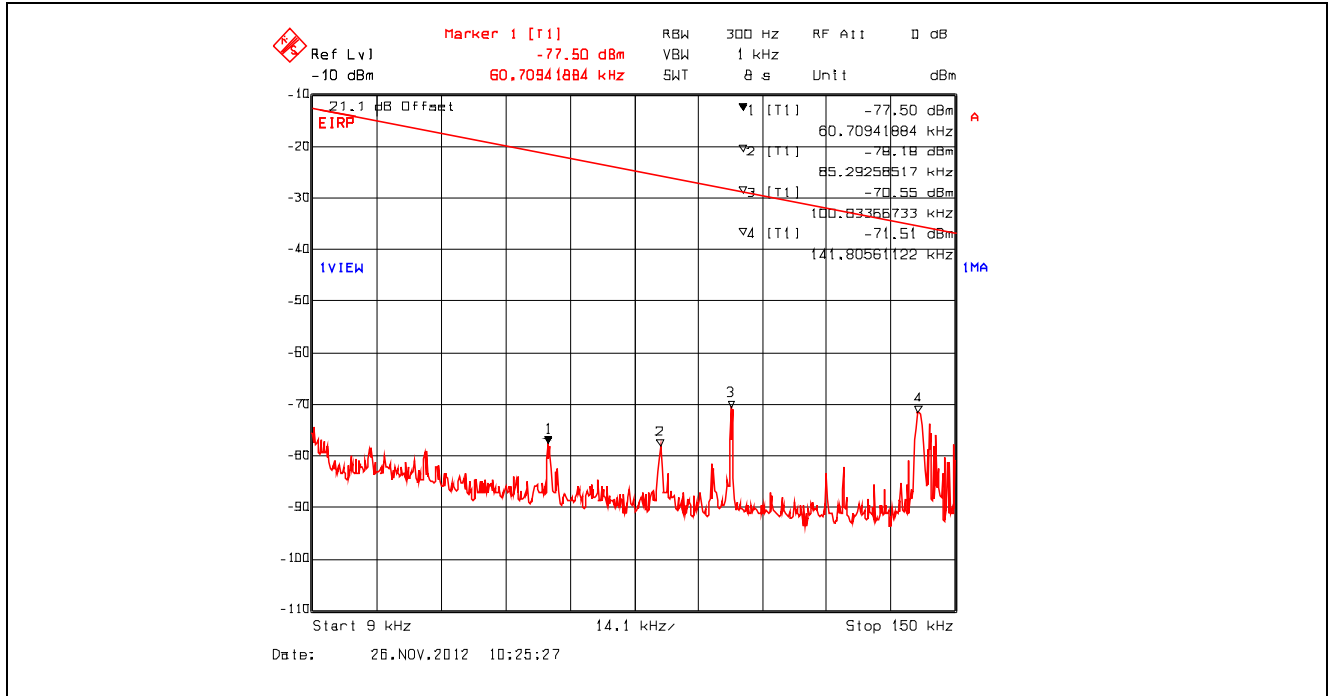


**Plot 5.4.4.3.12.** Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
 2462 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

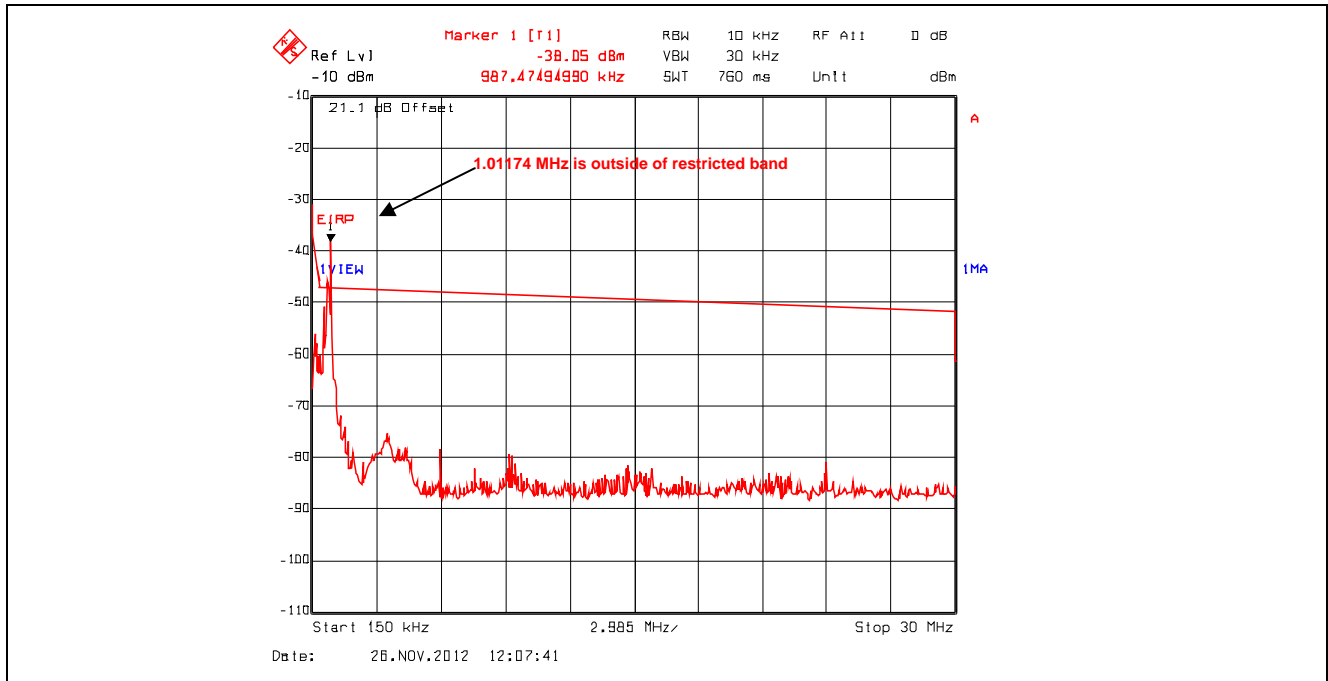


**Plot 5.4.4.3.13.** Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
 2462 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

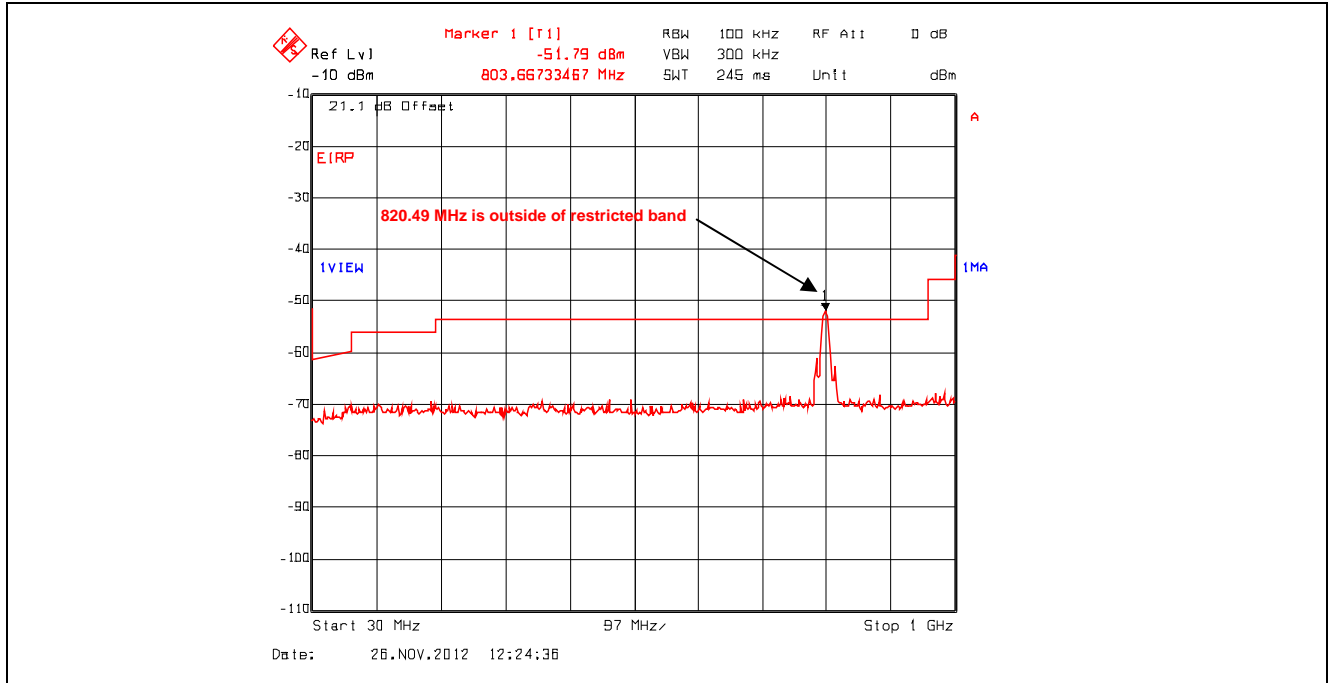

**Plot 5.4.4.3.14.** Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
 2462 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

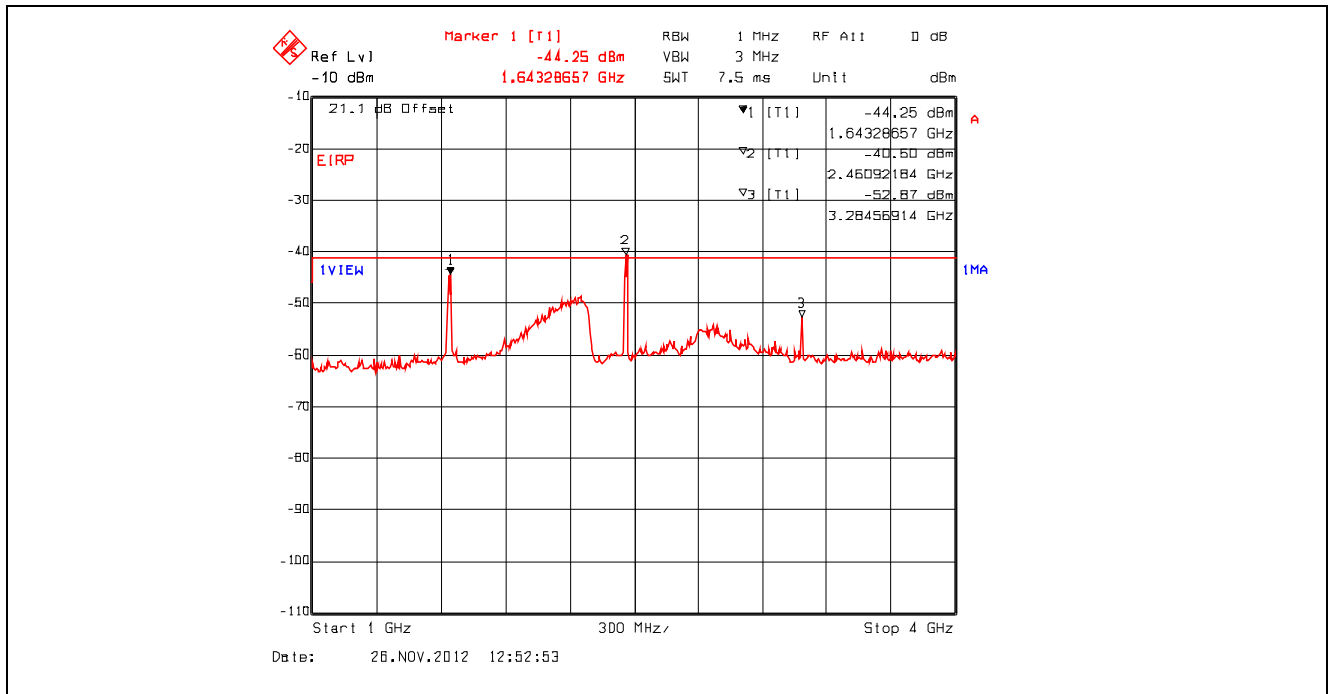

Plot 5.4.4.3.15. Conducted Spurious Emissions – Restricted Bands, 802.11b, 11 Mbps CCK  
2462 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

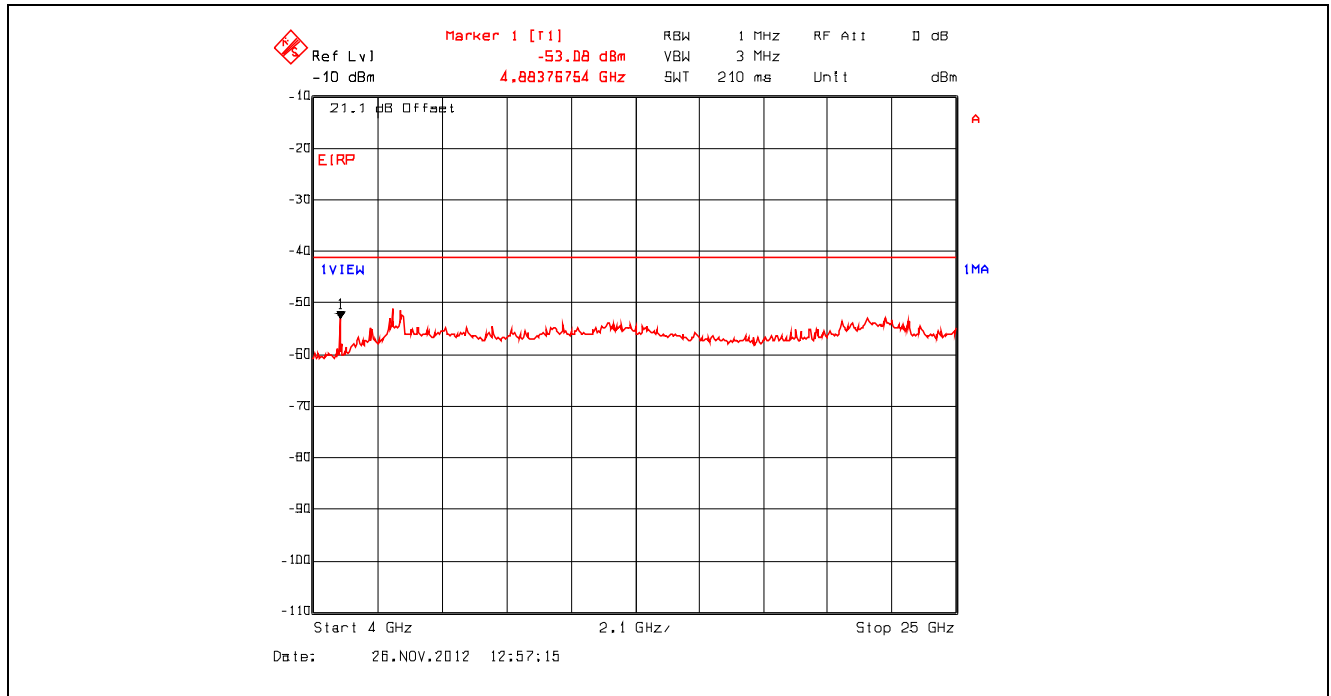

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: DIGI-070F15C247

December 17, 2012


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)




**Plot 5.4.4.3.16.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2412 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

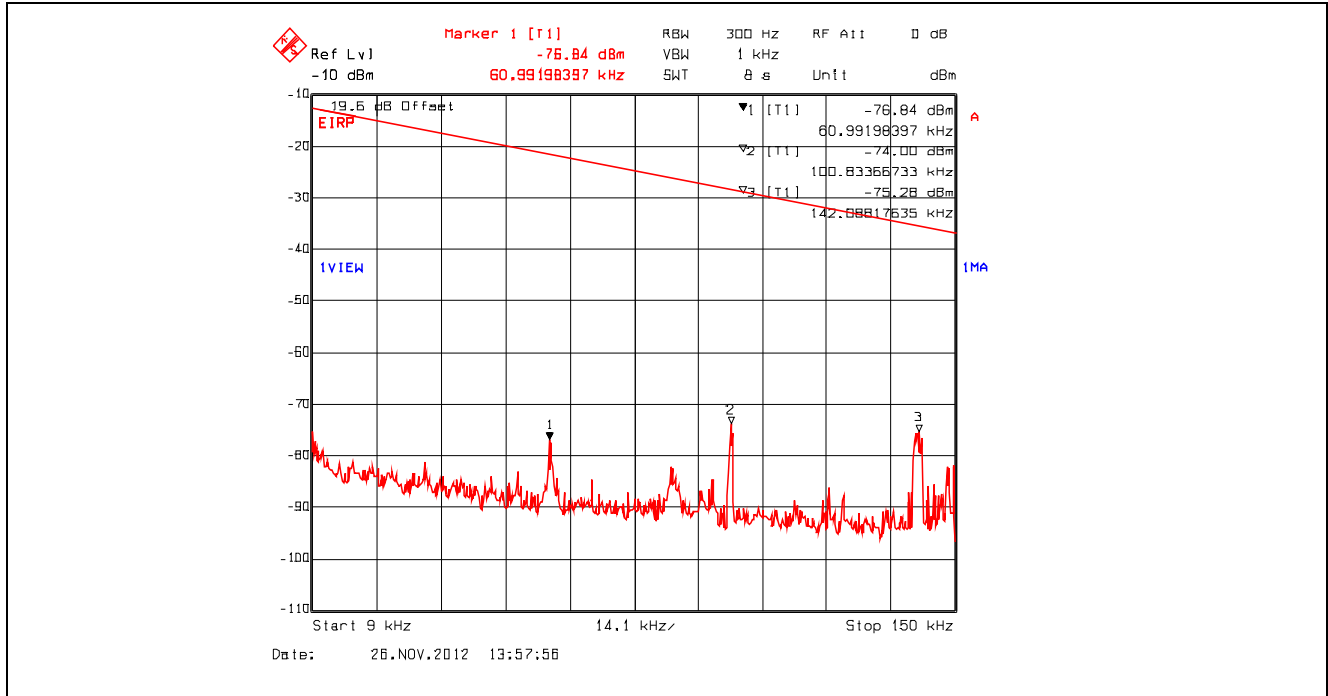


**Plot 5.4.4.3.17.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2412 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

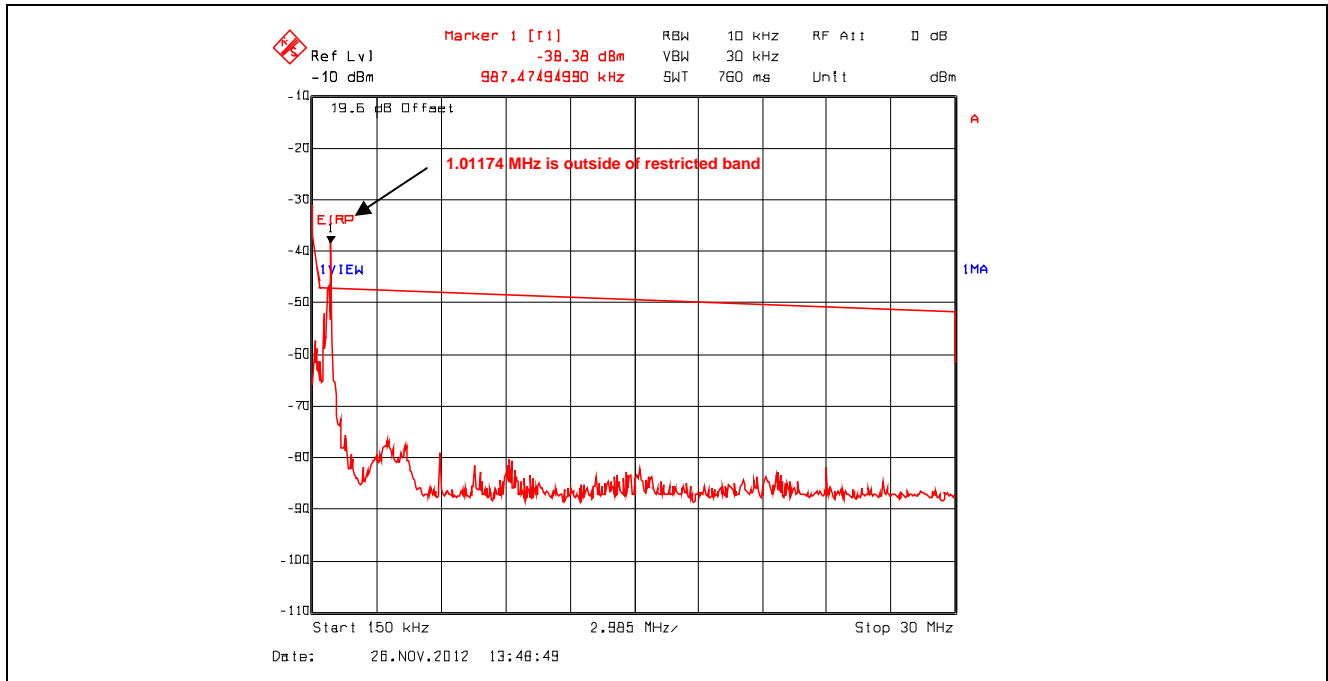


**Plot 5.4.4.3.18.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2412 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

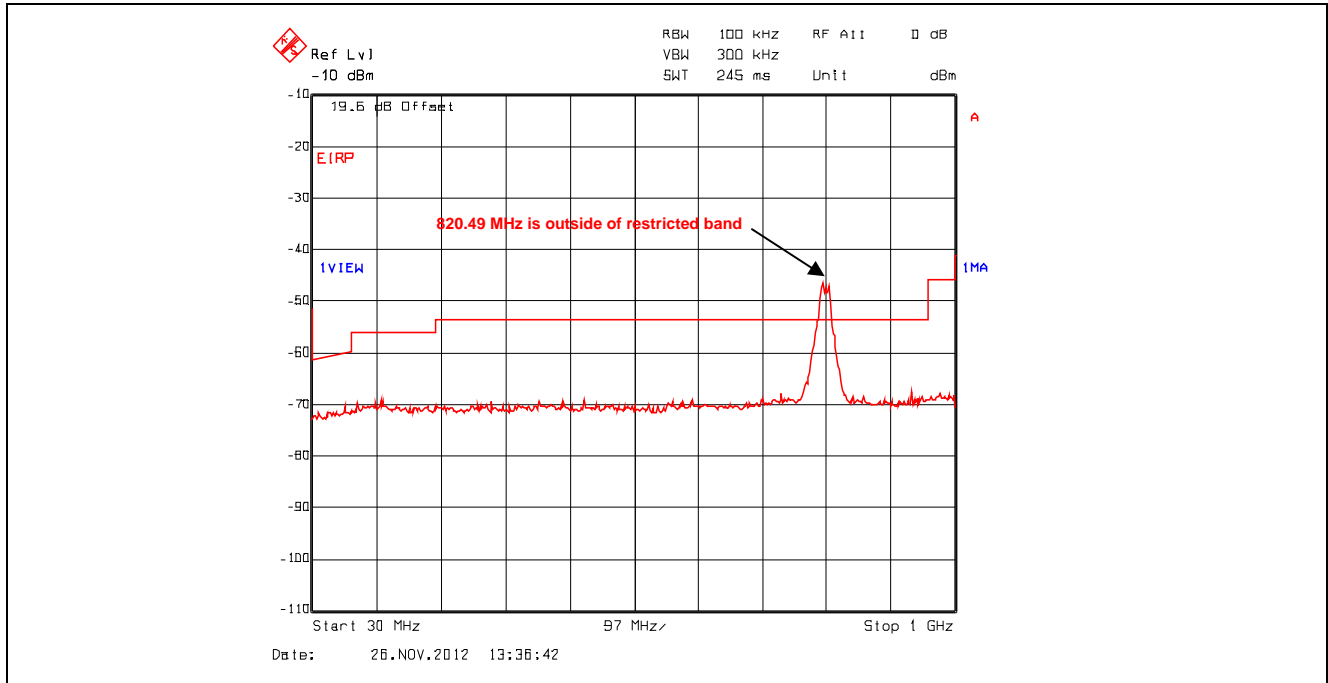


**Plot 5.4.4.3.19.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2412 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

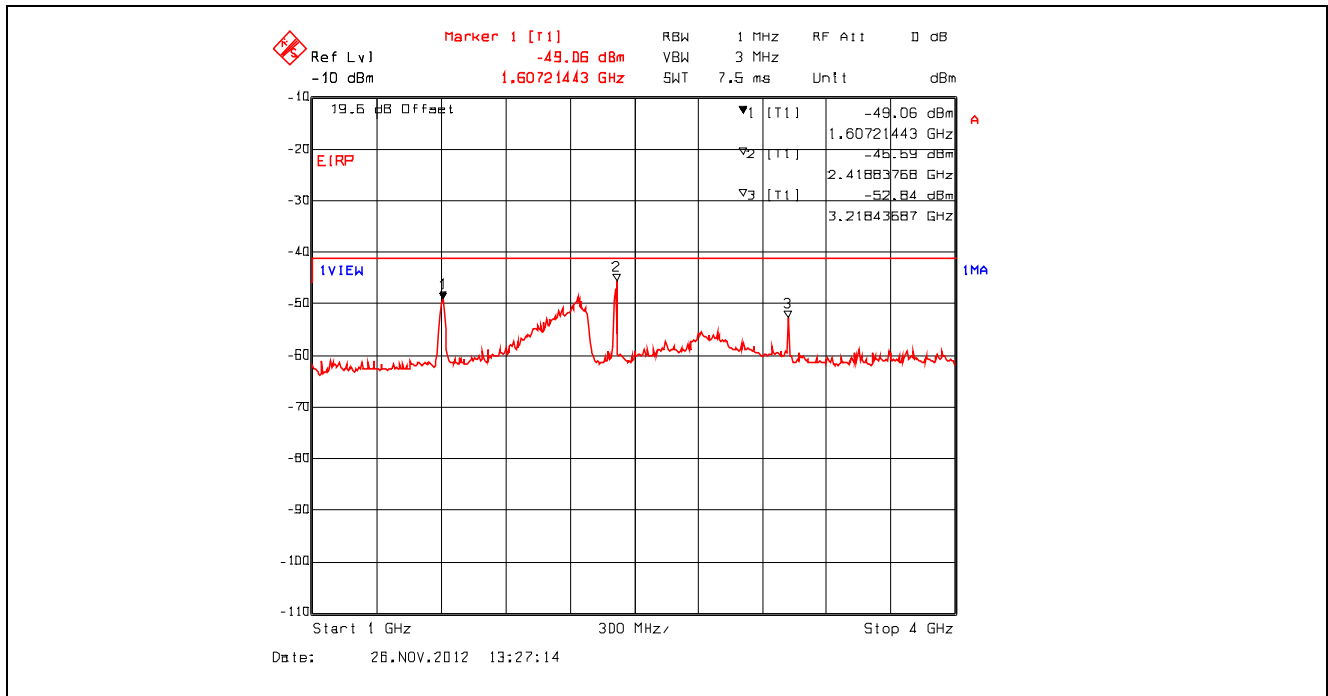


**Plot 5.4.4.3.20.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2412 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

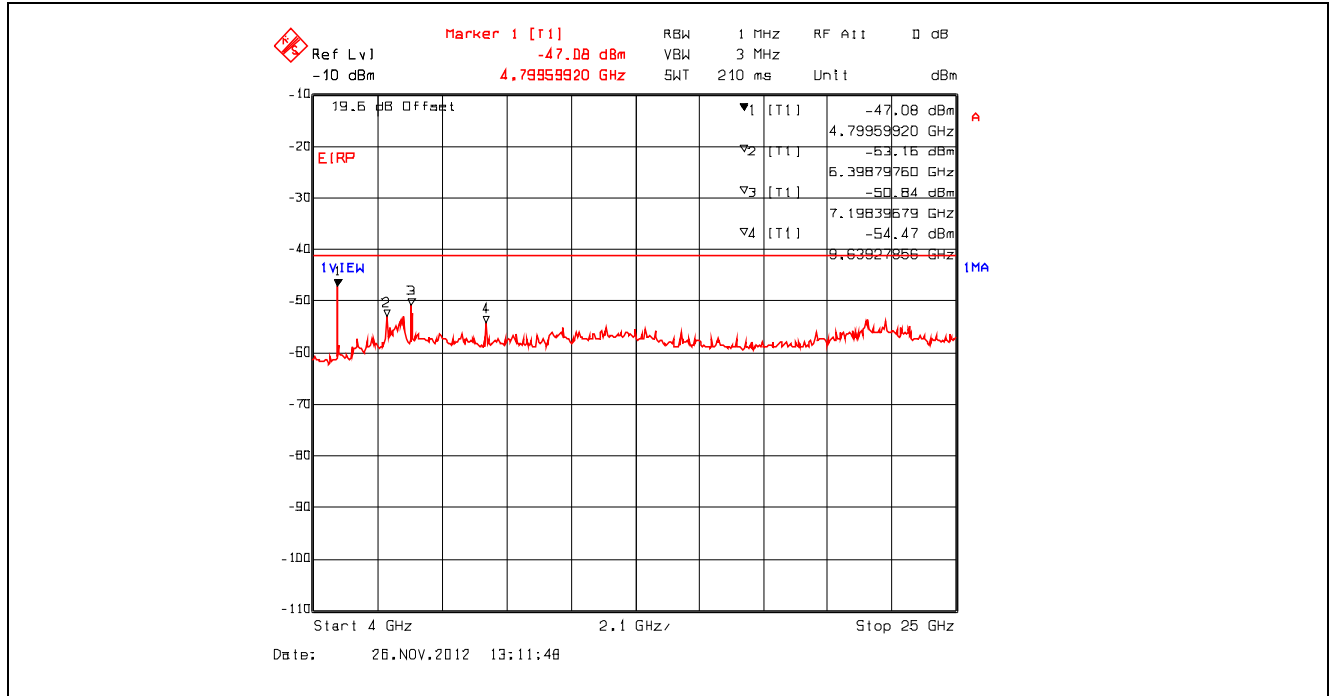


**Plot 5.4.4.3.21.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2442 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

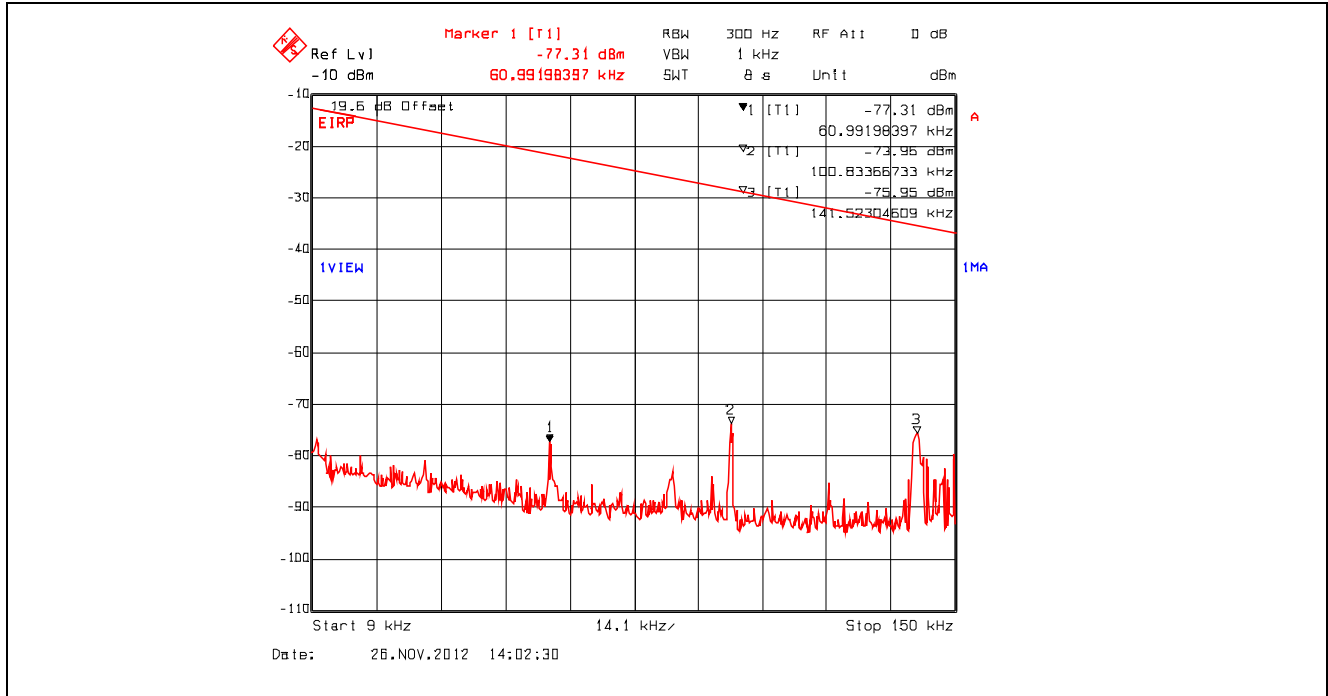


**Plot 5.4.4.3.22.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2442 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

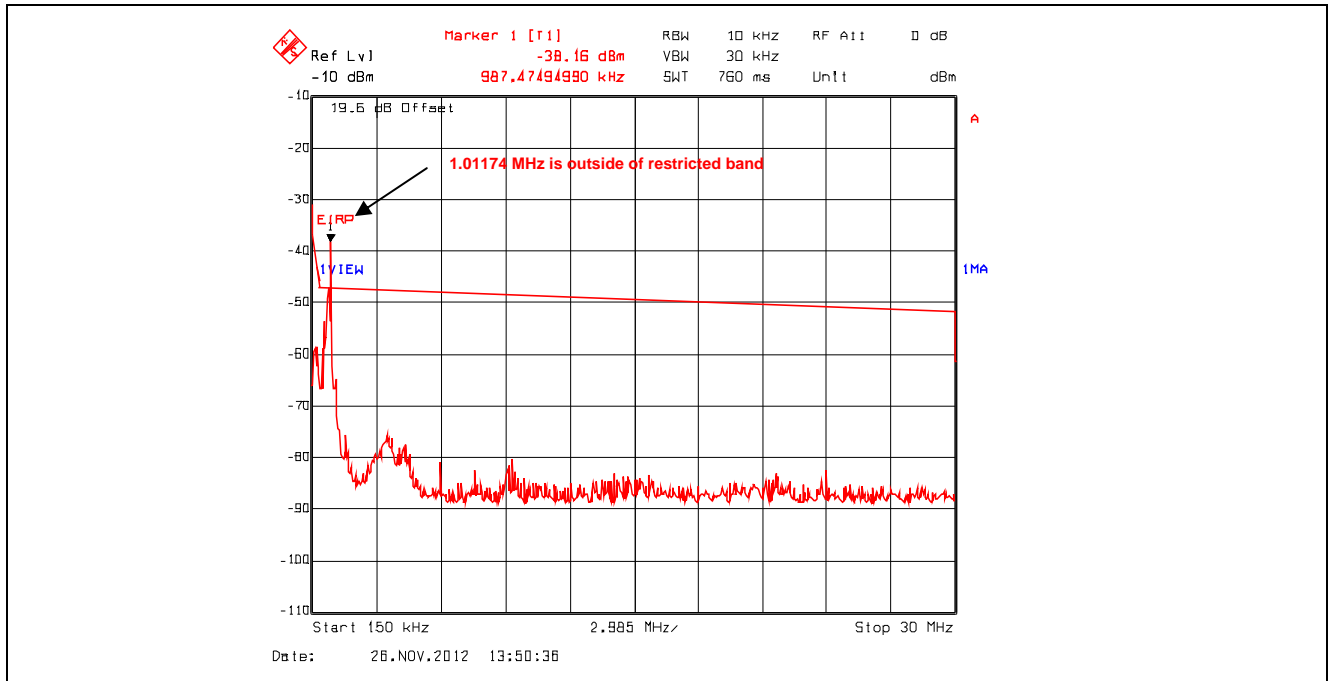


**Plot 5.4.4.3.23.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2442 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

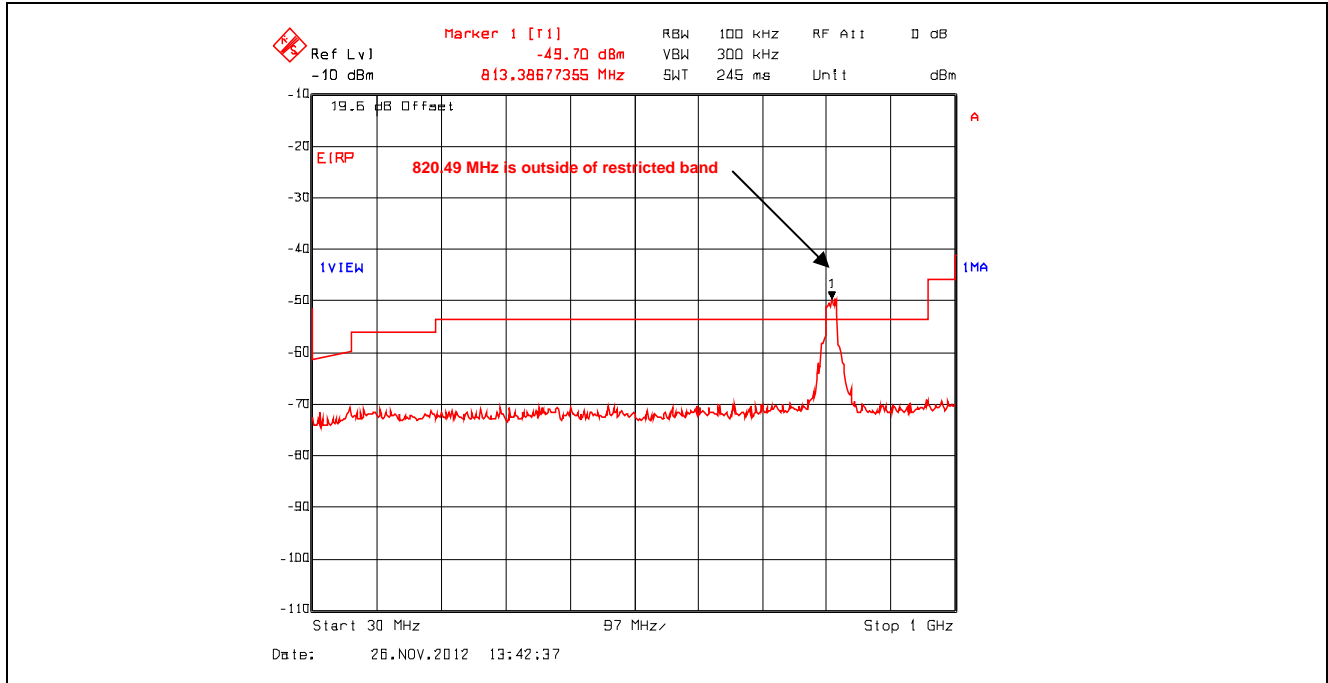


**Plot 5.4.4.3.24.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2442 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

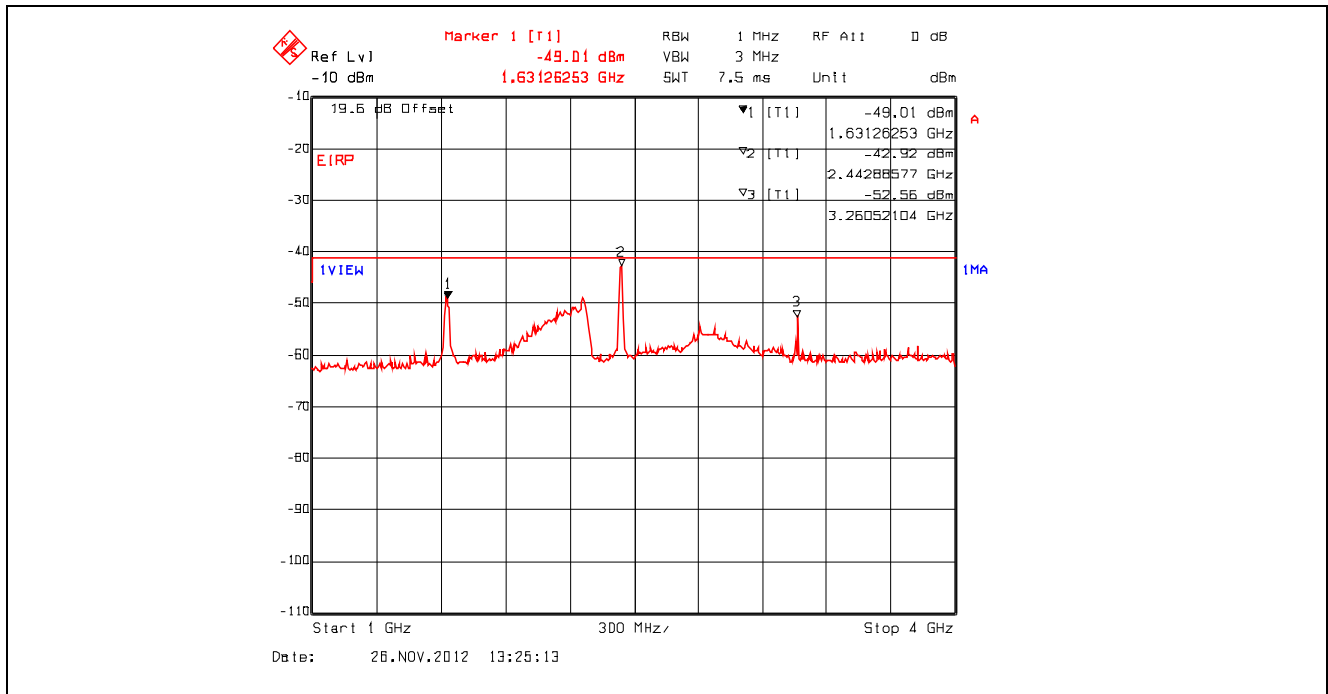


**Plot 5.4.4.3.25.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2442 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

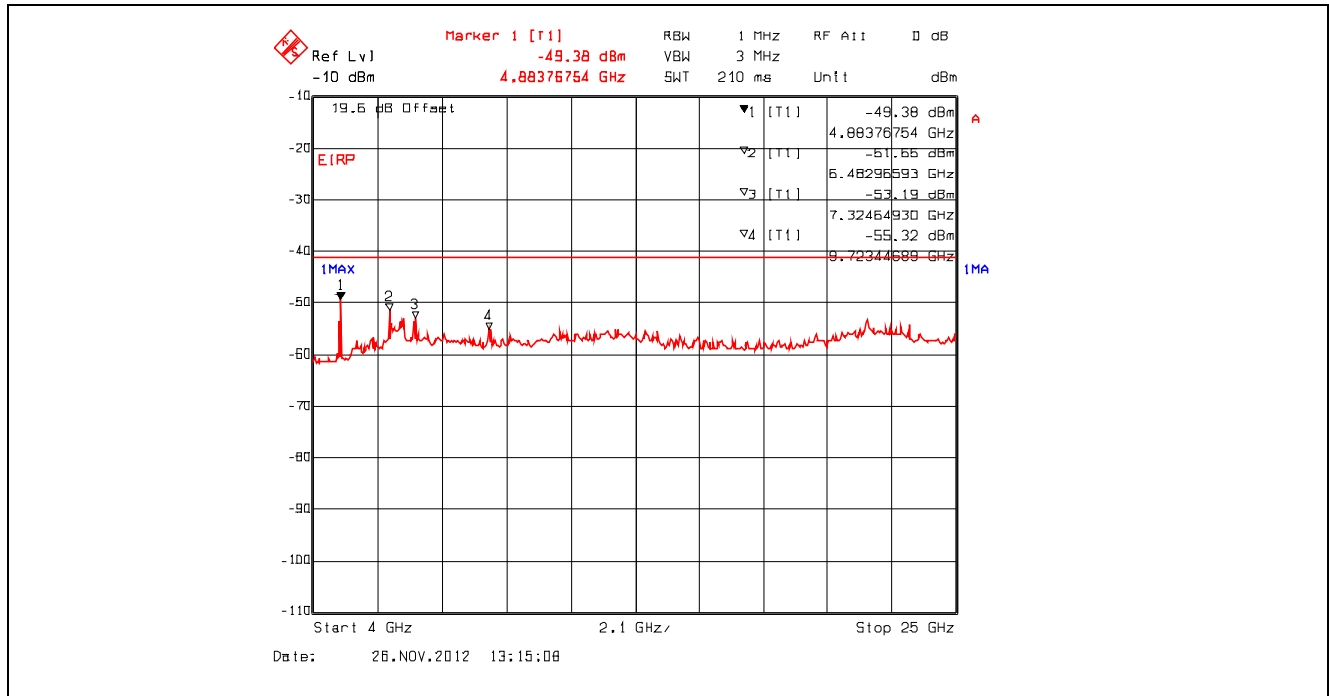


**Plot 5.4.4.3.26.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2462 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

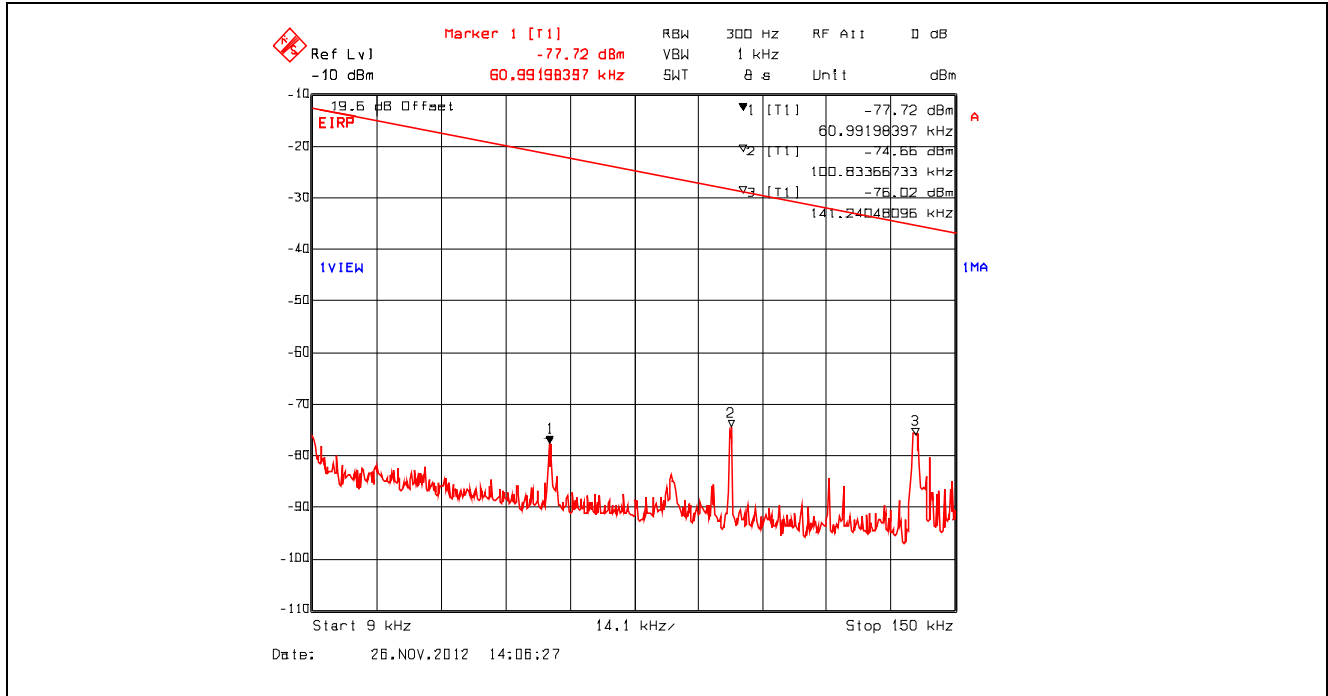


**Plot 5.4.4.3.27.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2462 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

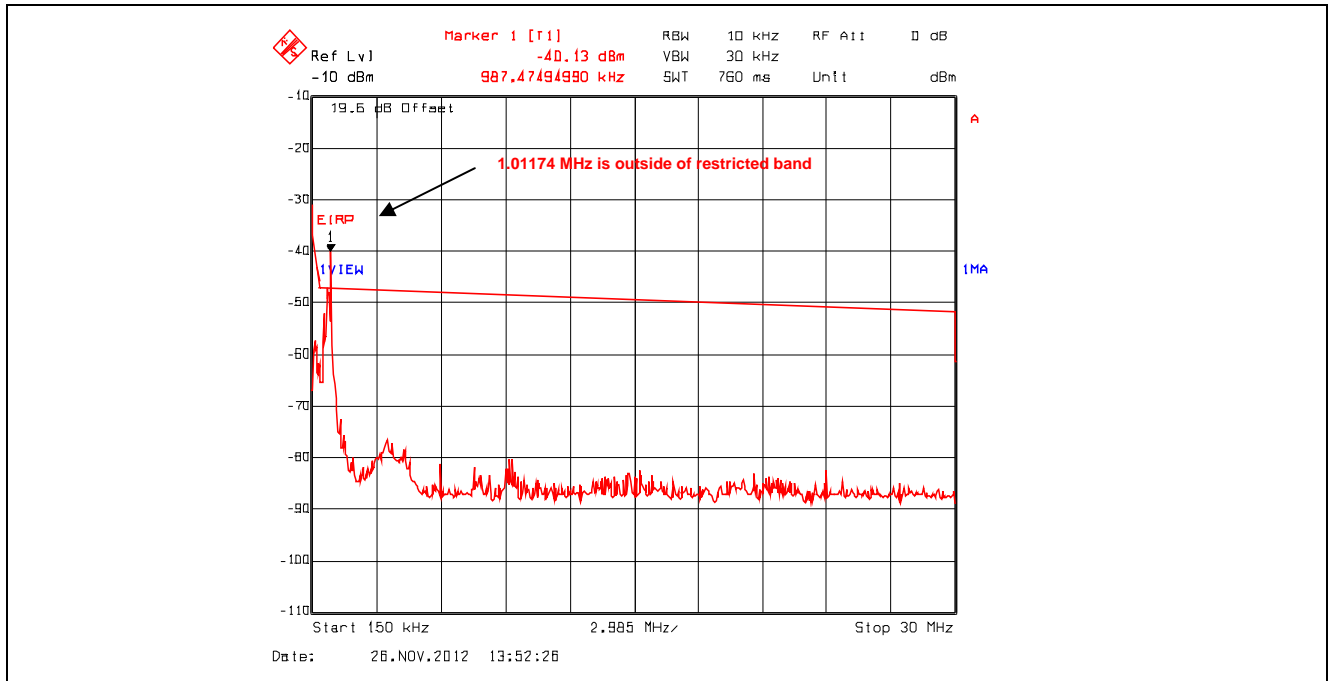

**Plot 5.4.4.3.28.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2462 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

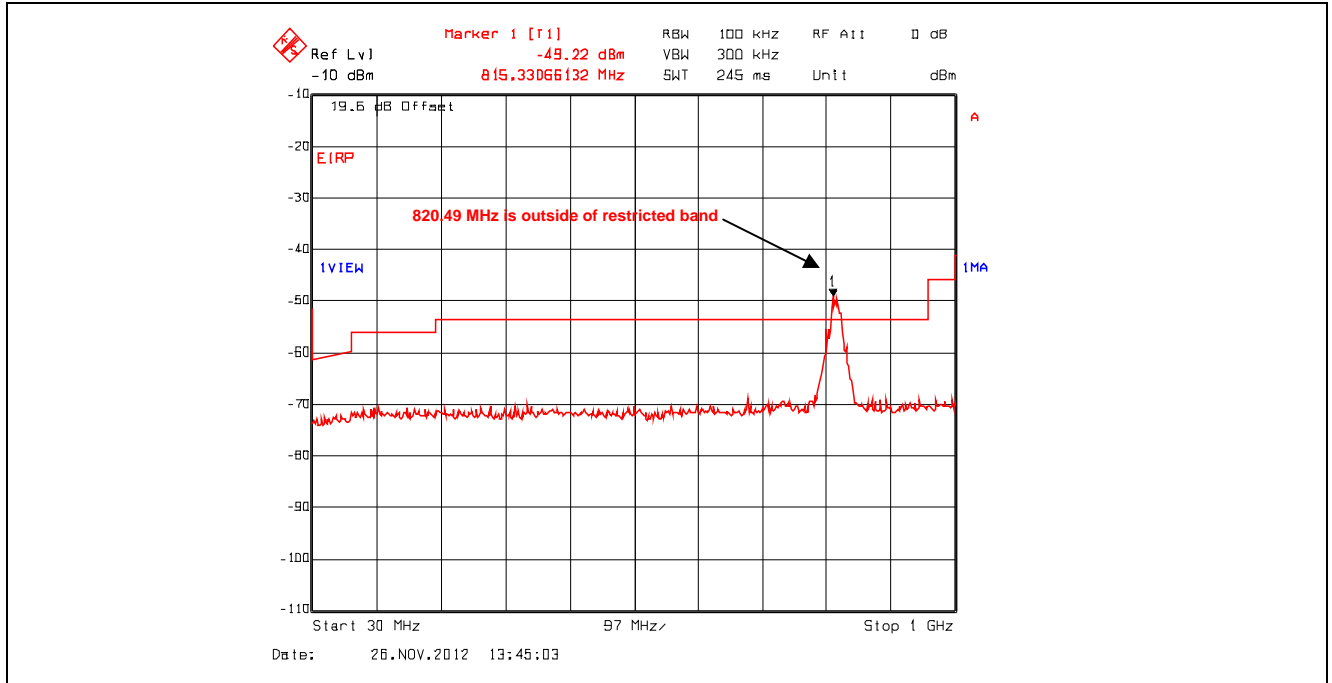


**Plot 5.4.4.3.29.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2462 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

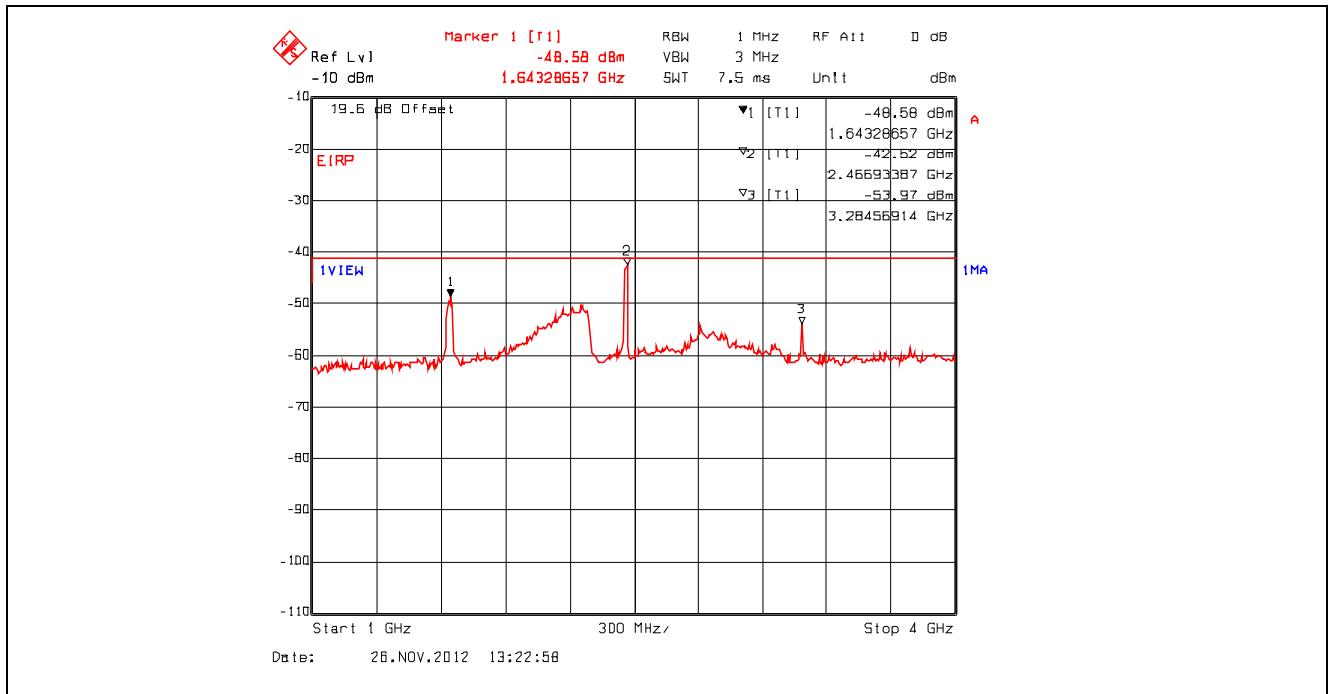





**Plot 5.4.4.3.30.** Conducted Spurious Emissions – Restricted Bands, 802.11g, BPSK 9 Mbps  
 2462 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

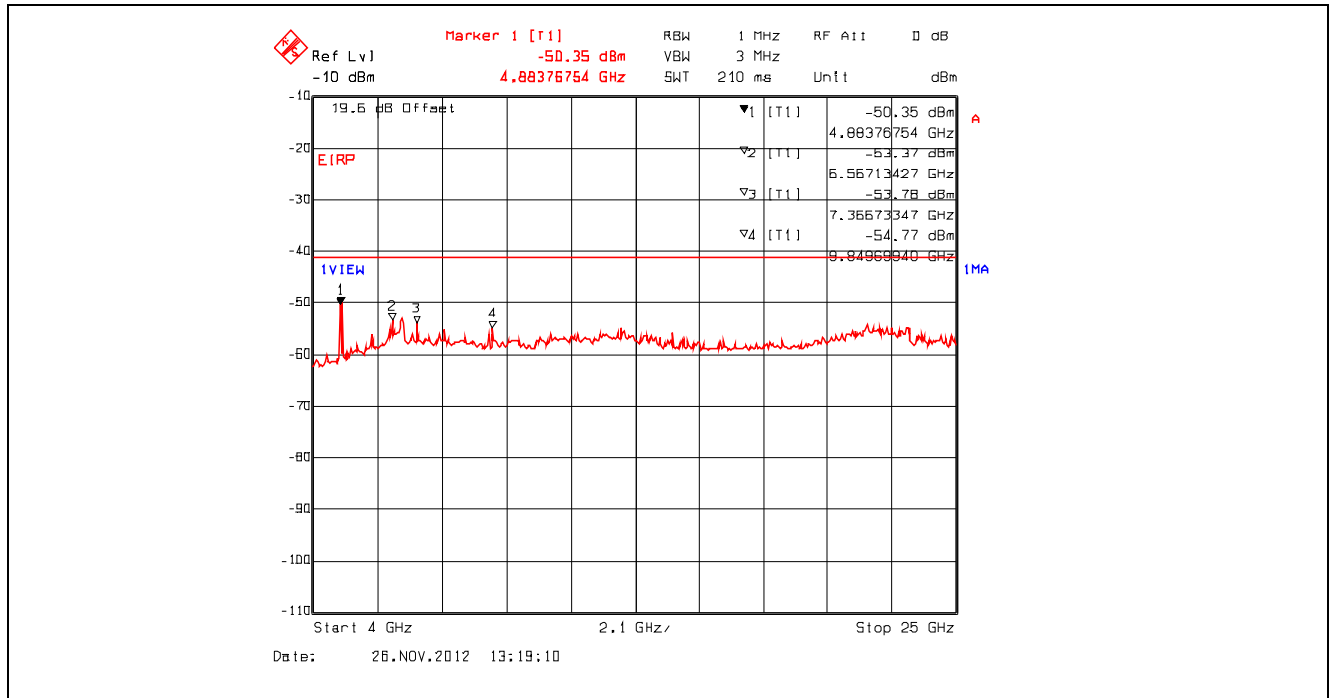


**Plot 5.4.4.3.31.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2412 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

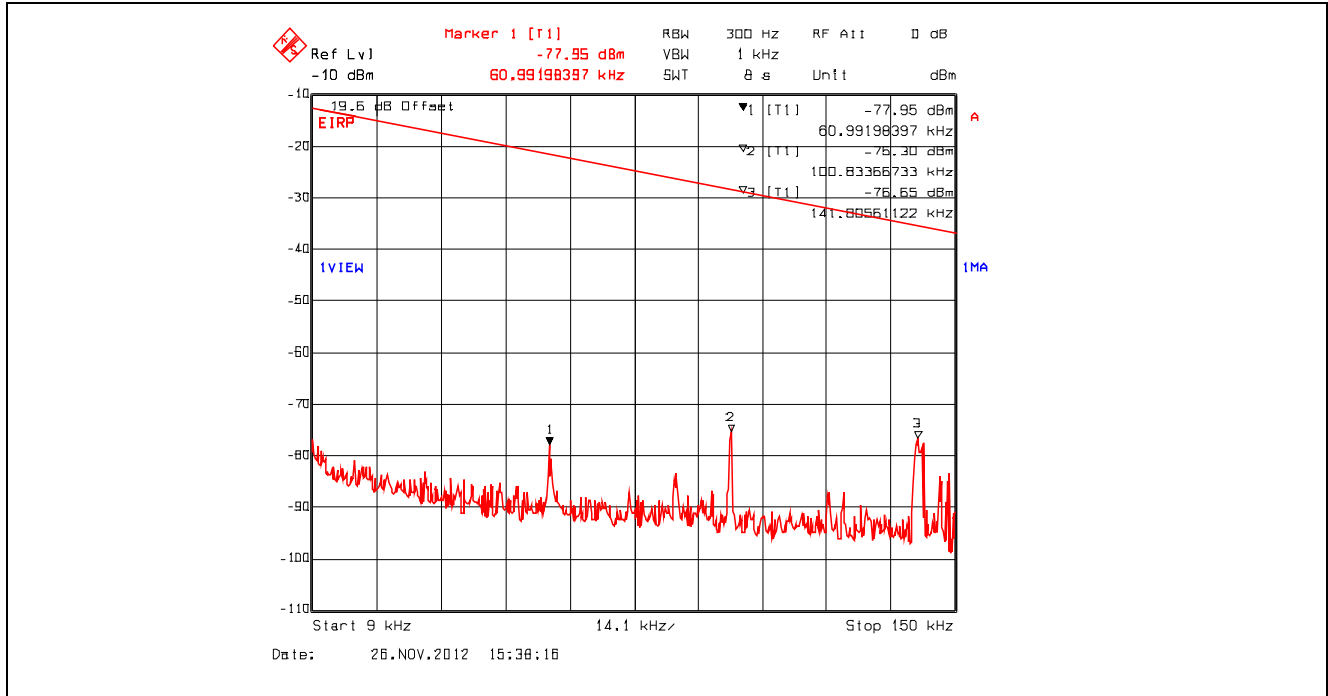


**Plot 5.4.4.3.32.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2412 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

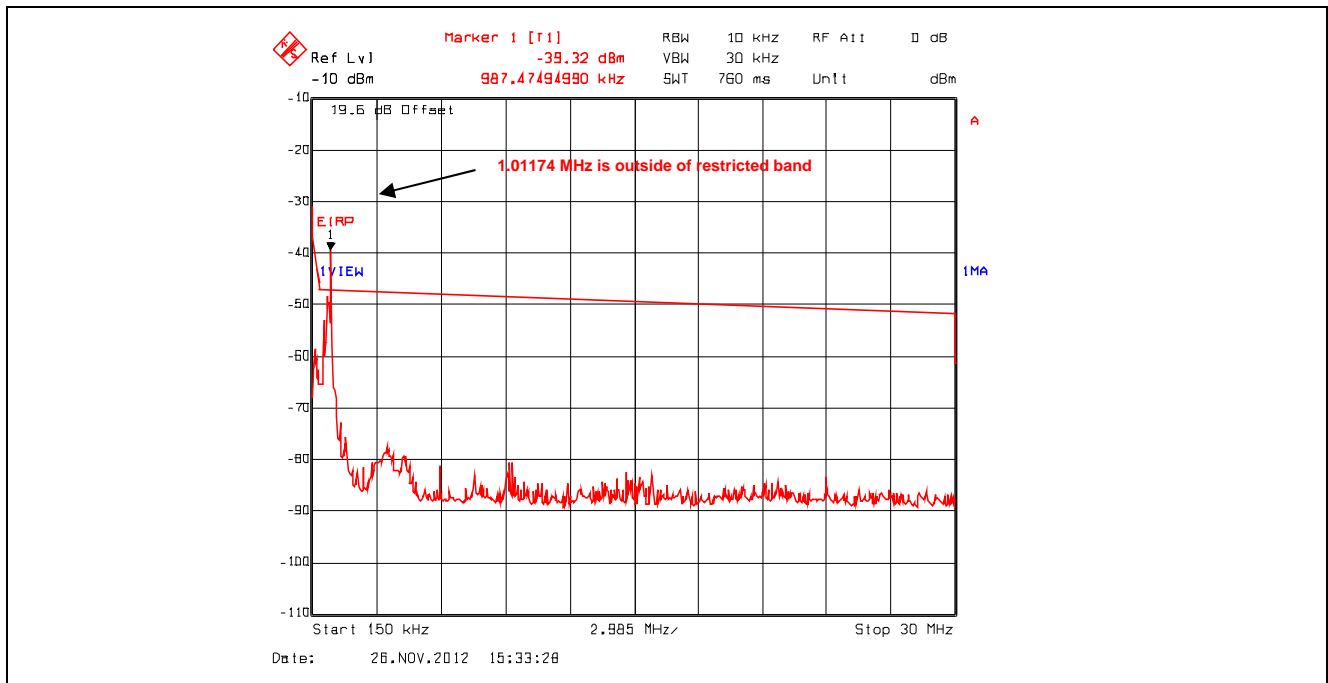


**Plot 5.4.4.33.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2412 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

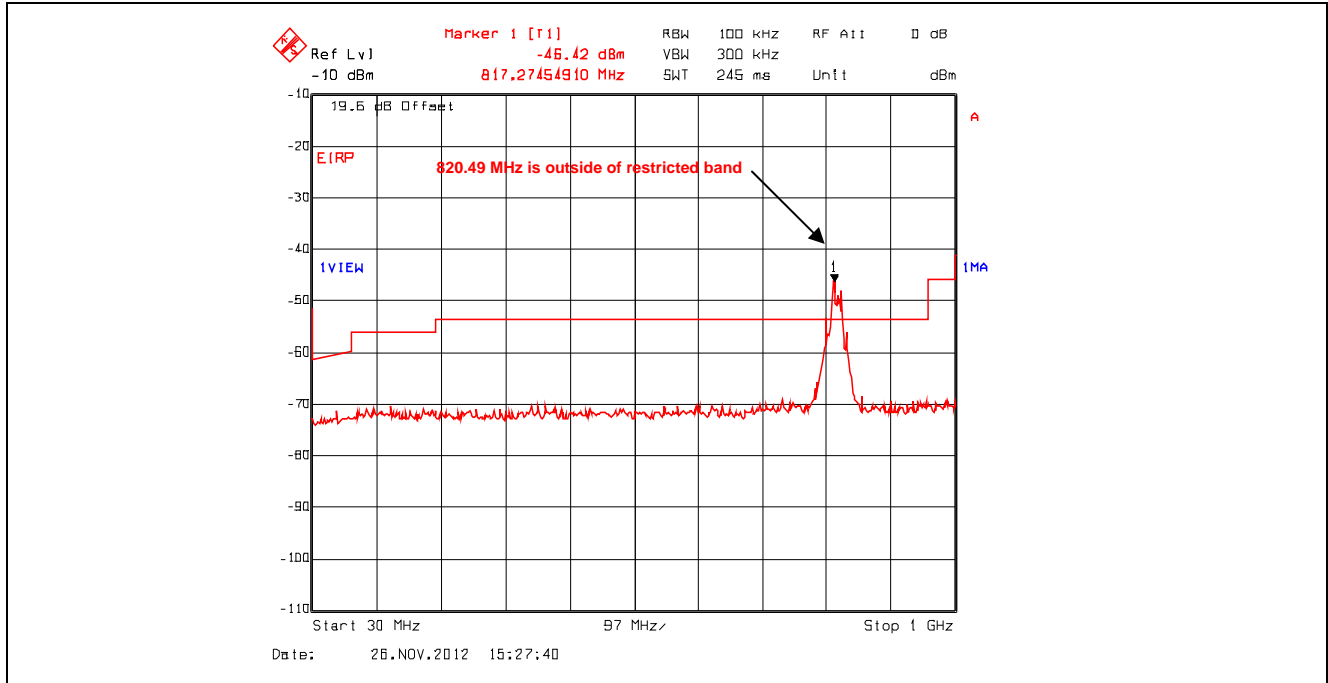


**Plot 5.4.4.34.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2412 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

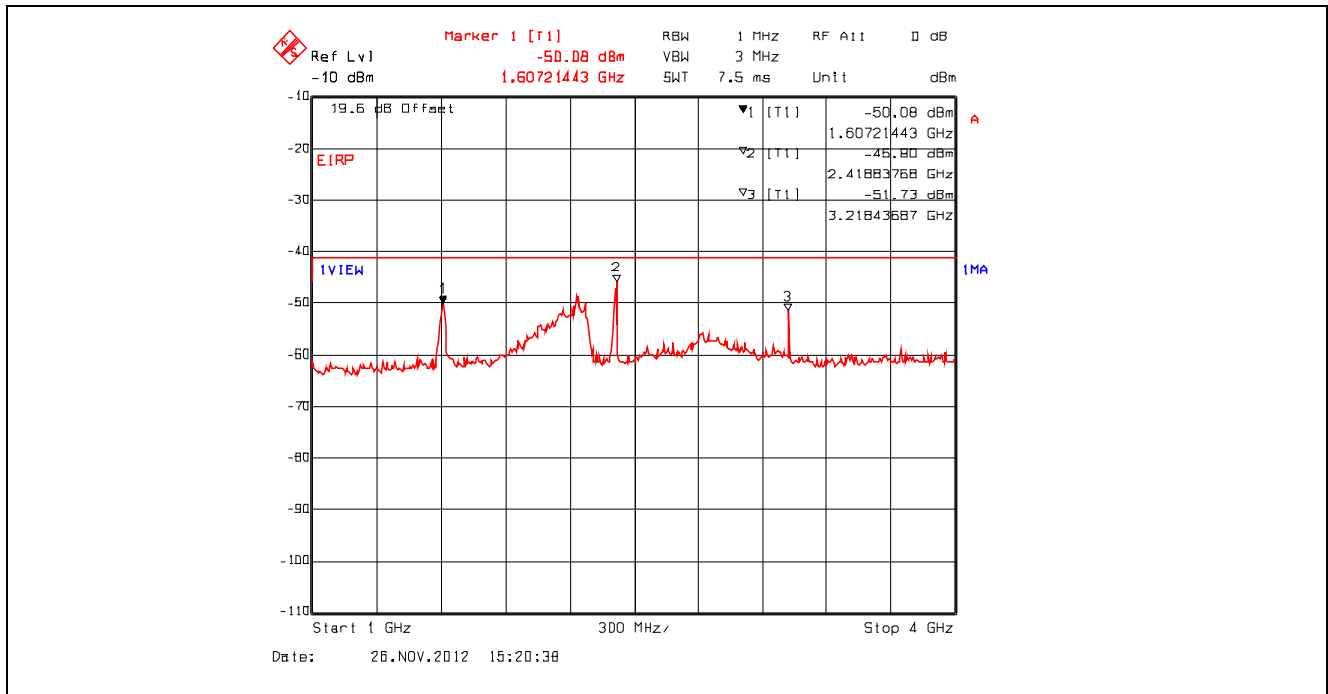


Plot 5.4.4.3.35. Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2412 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

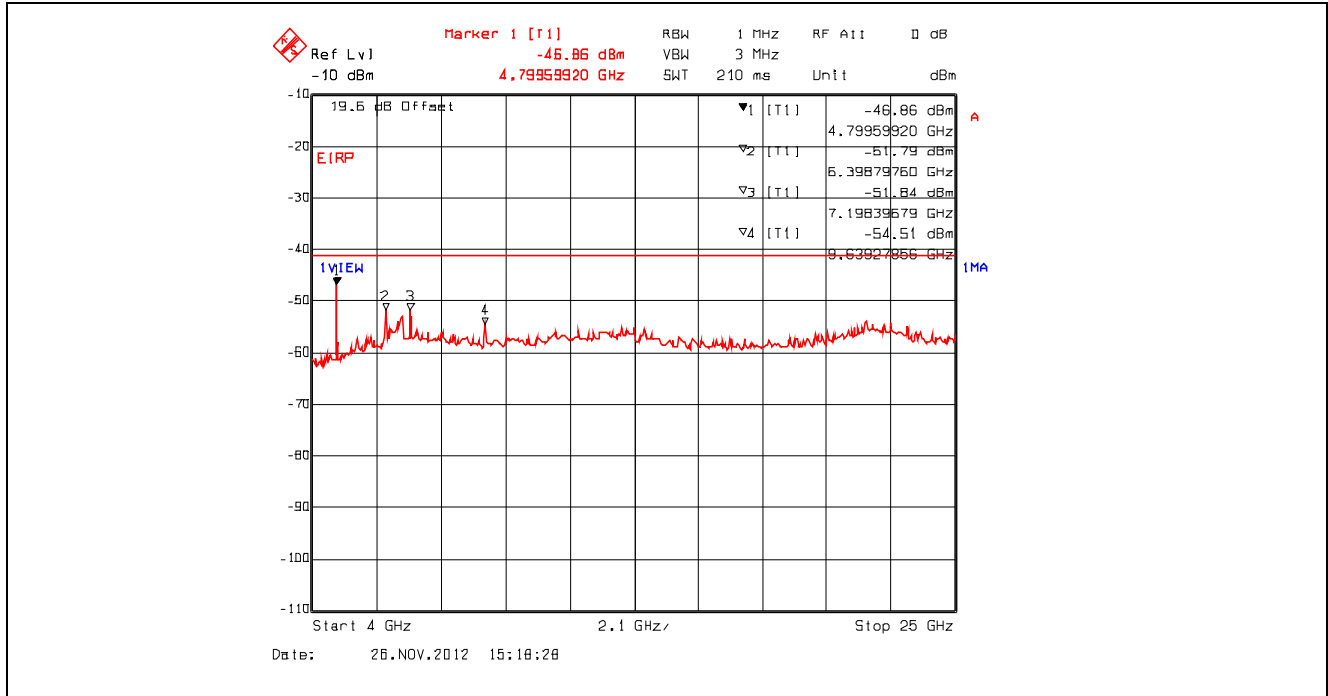


**Plot 5.4.4.3.36.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2442 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

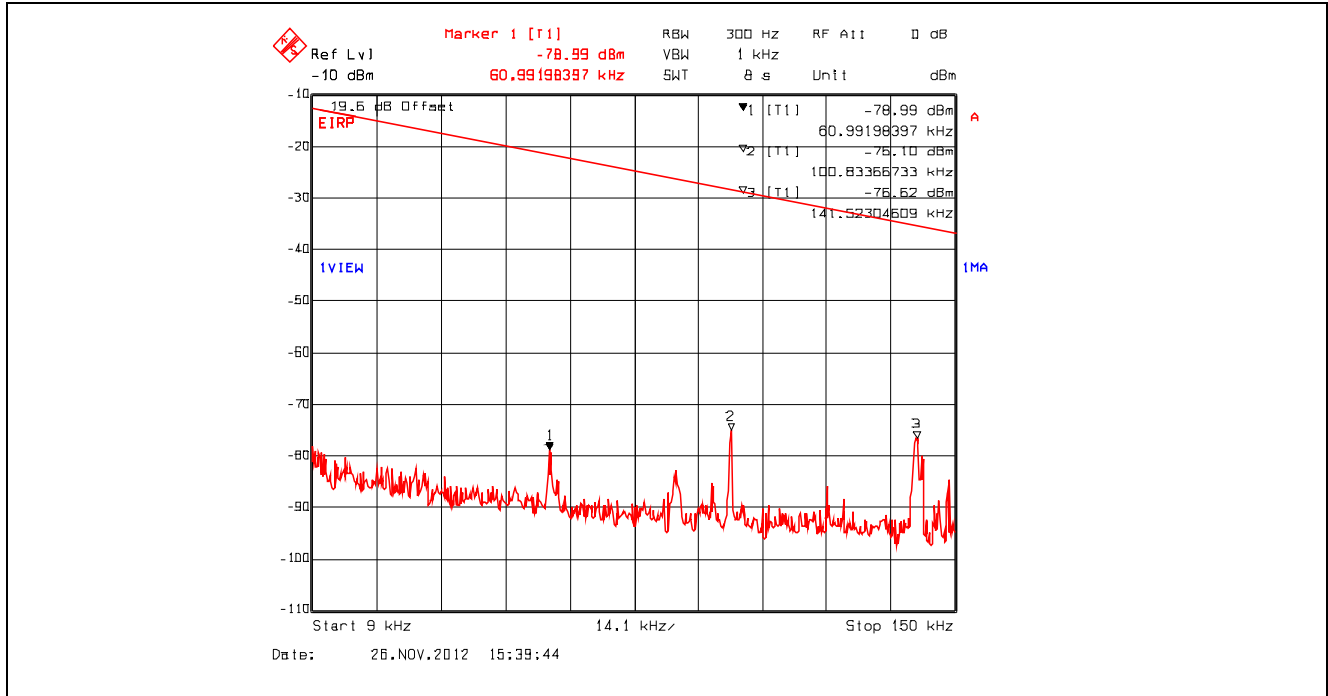


**Plot 5.4.4.3.37.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2442 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

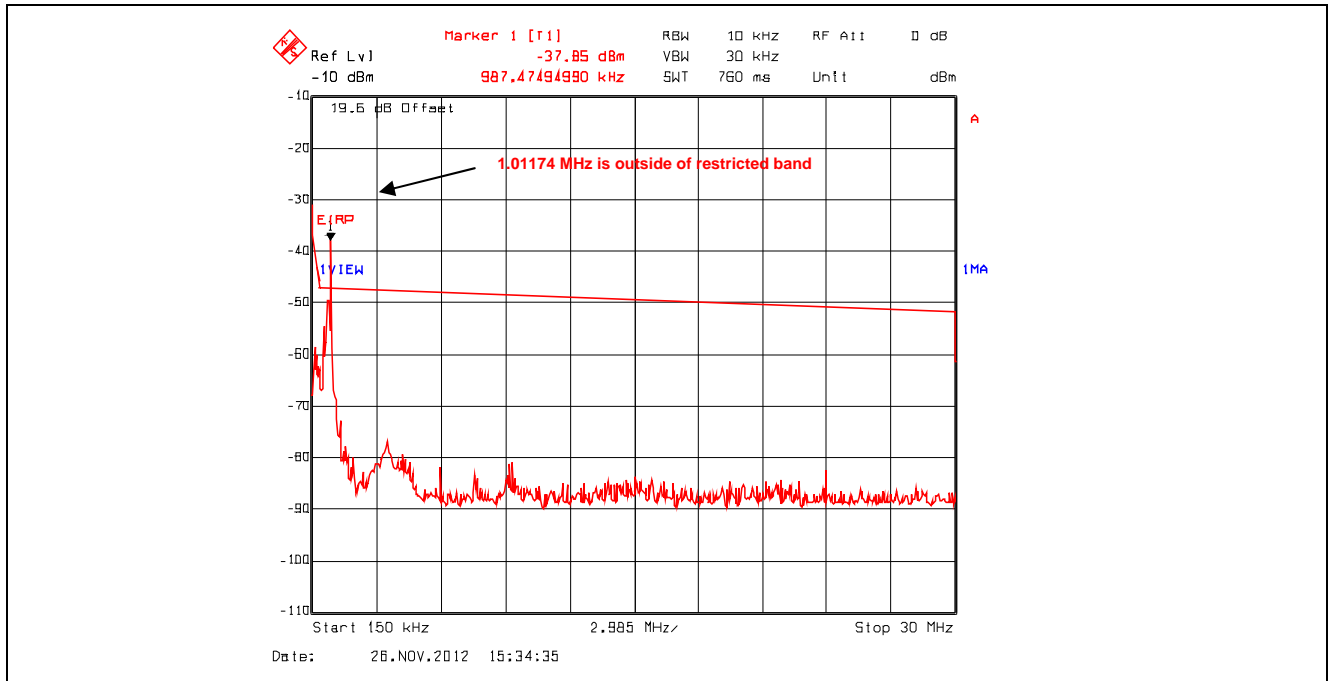


**Plot 5.4.4.38.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2442 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

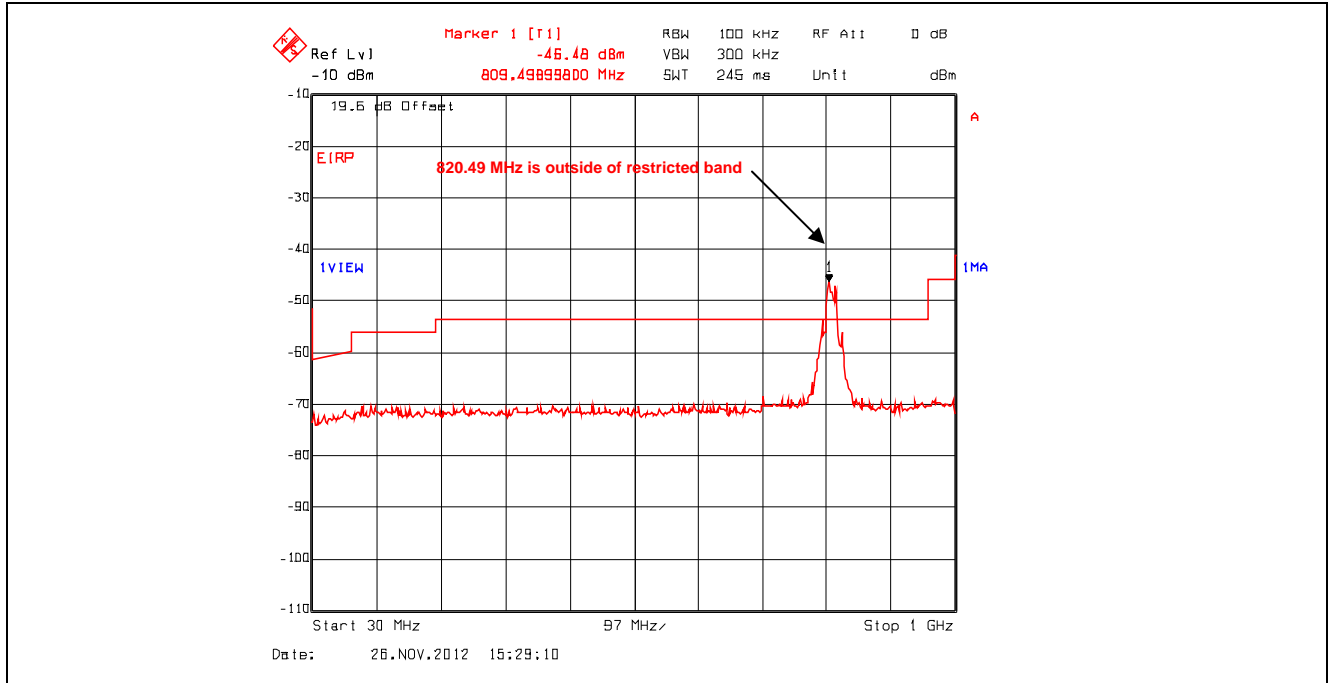


**Plot 5.4.4.39.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2442 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

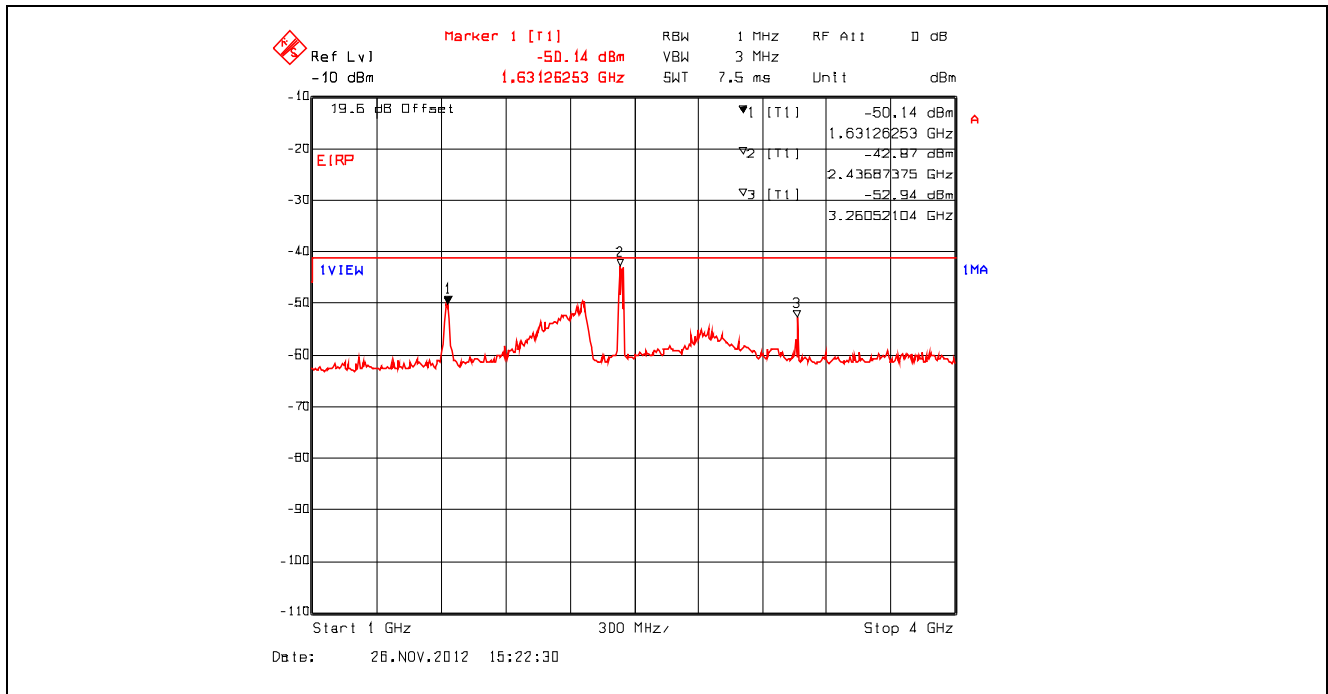


Plot 5.4.4.3.40. Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2442 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

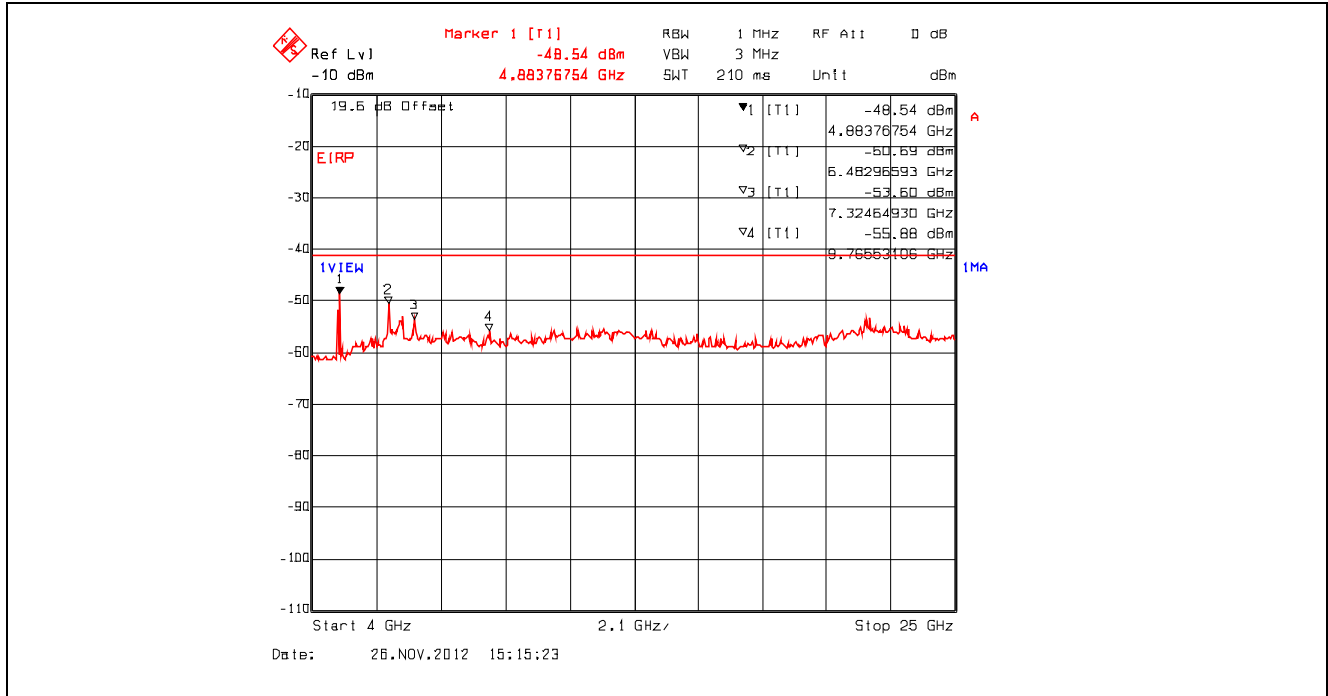

**Plot 5.4.4.3.41.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2462 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

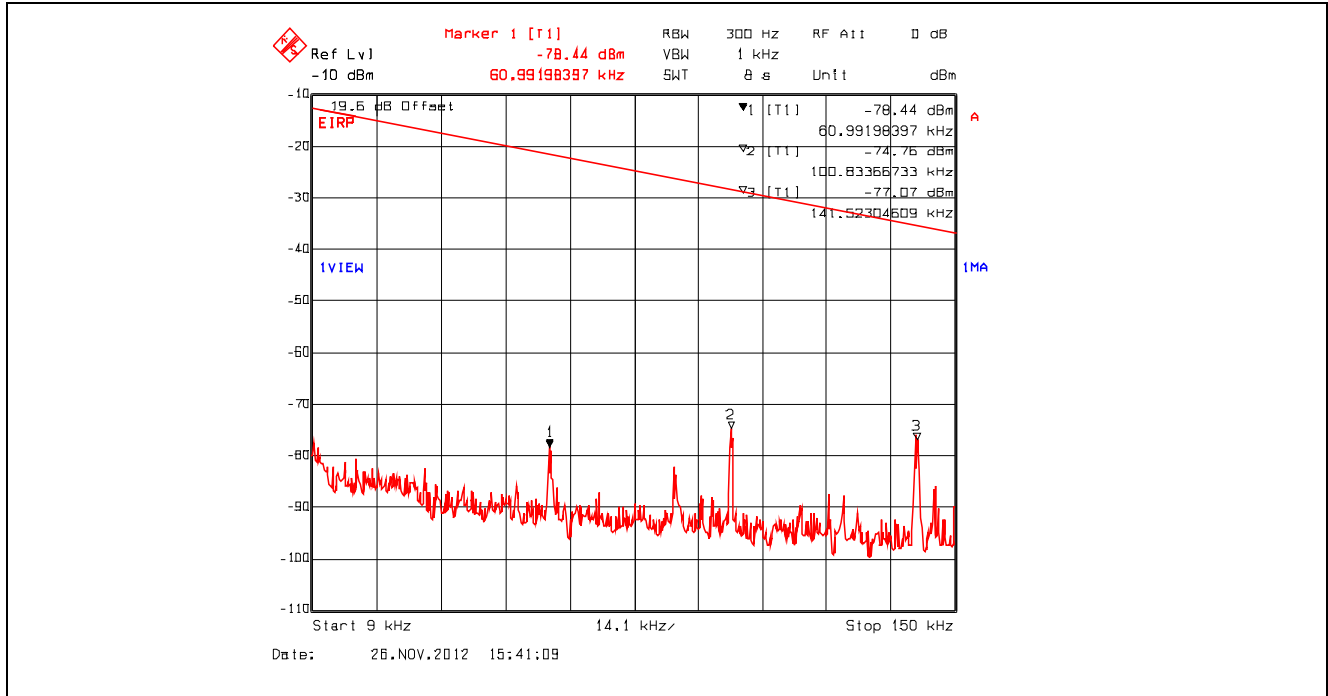


**Plot 5.4.4.3.42.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2462 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

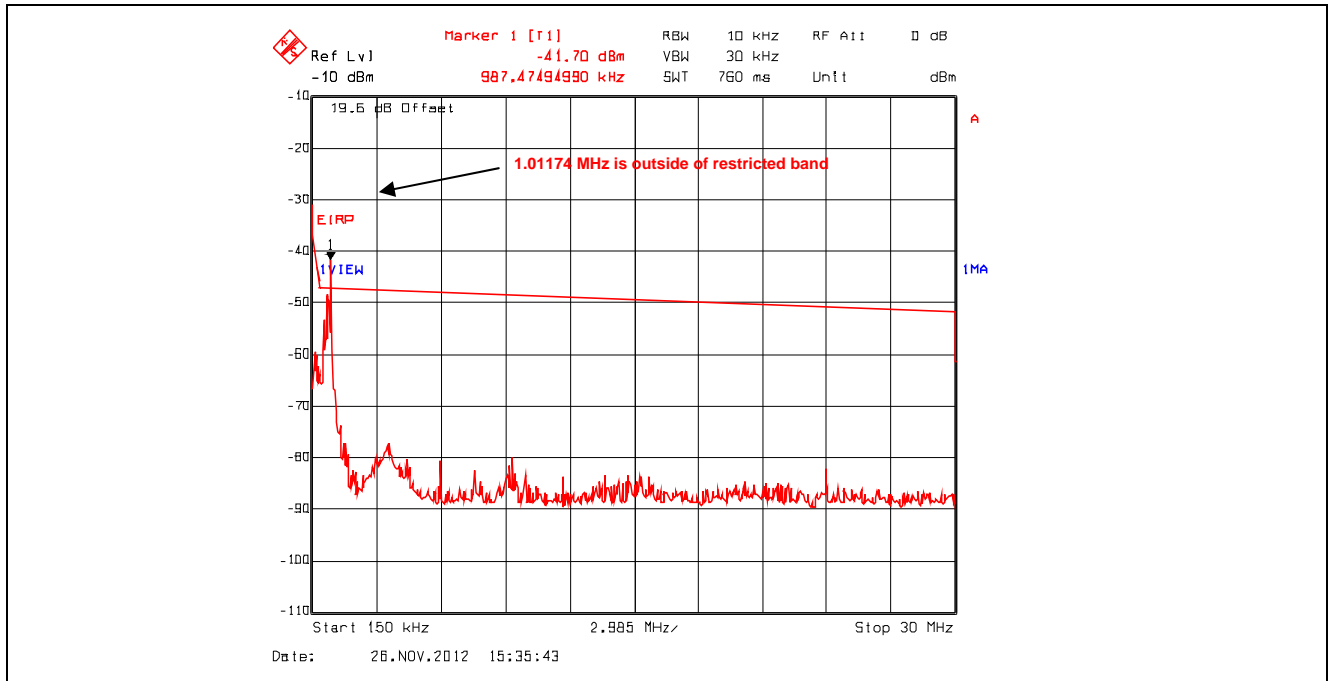





**Plot 5.4.4.3.3.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2462 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

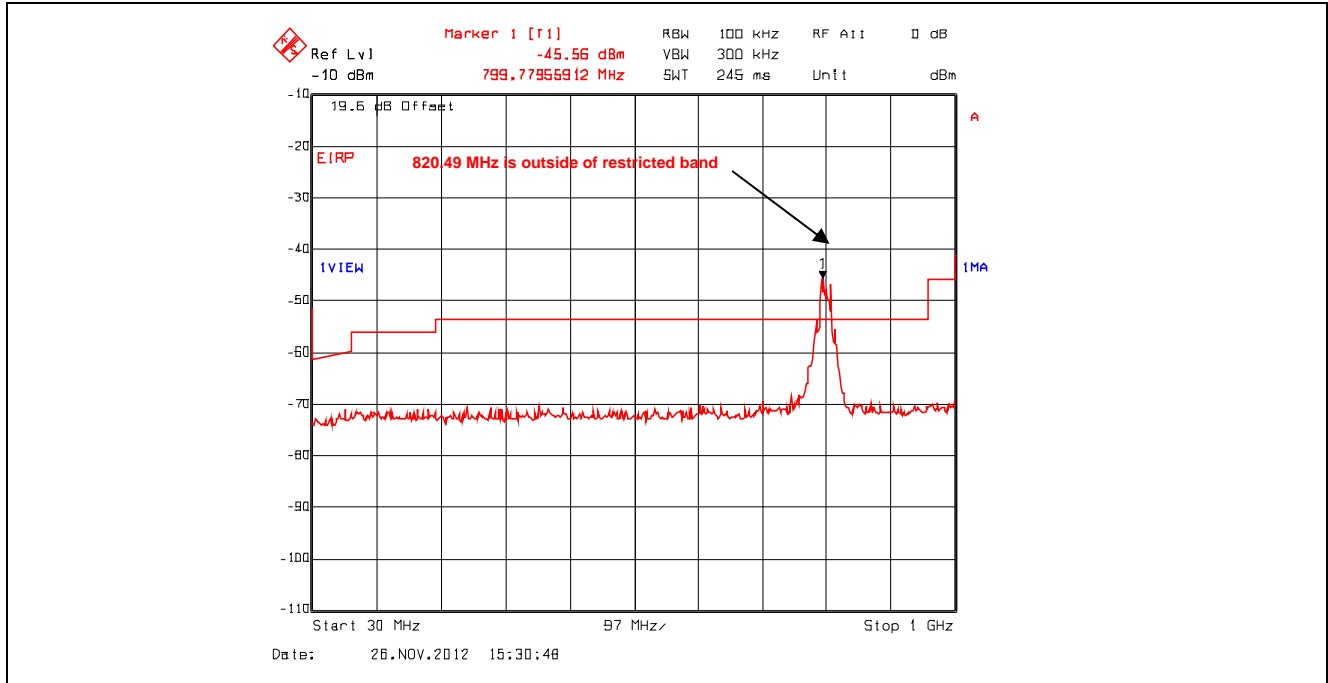


**Plot 5.4.4.3.4.** Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2462 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

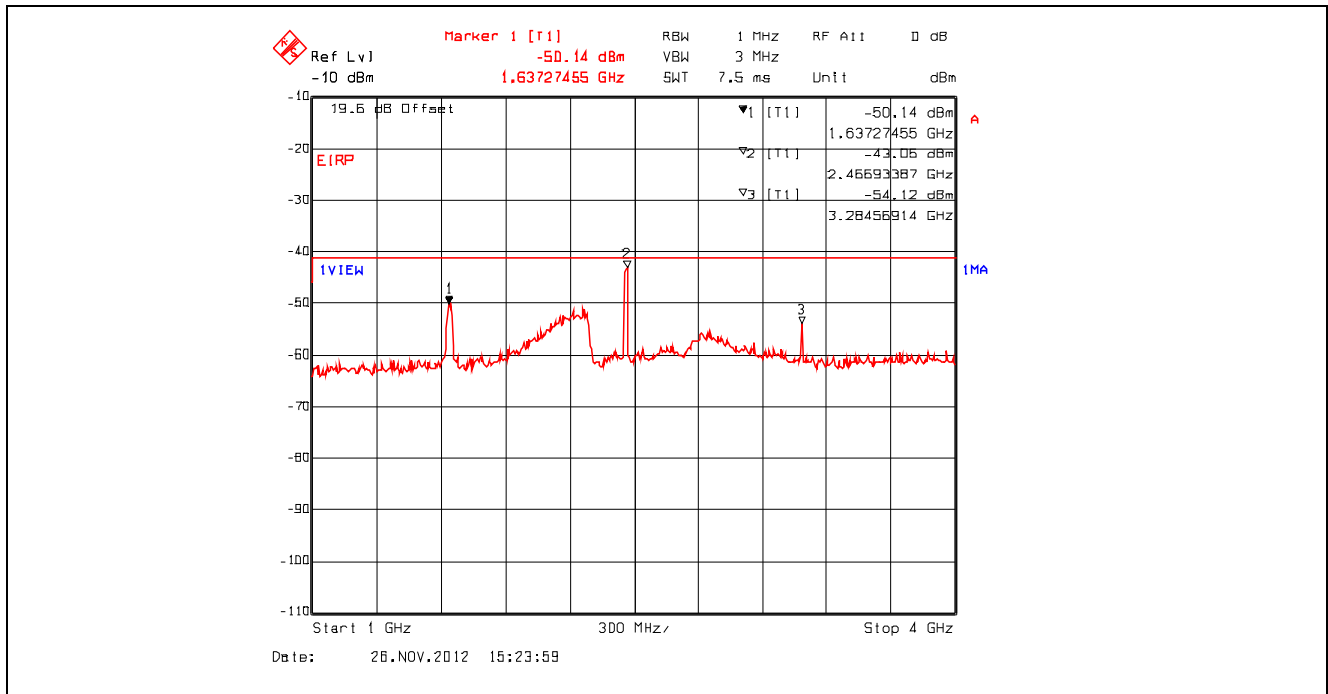


Plot 5.4.4.3.45. Conducted Spurious Emissions – Restricted Bands, 802.11n 800ns, 64-QAM 5/6 65 Mbps  
 2462 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

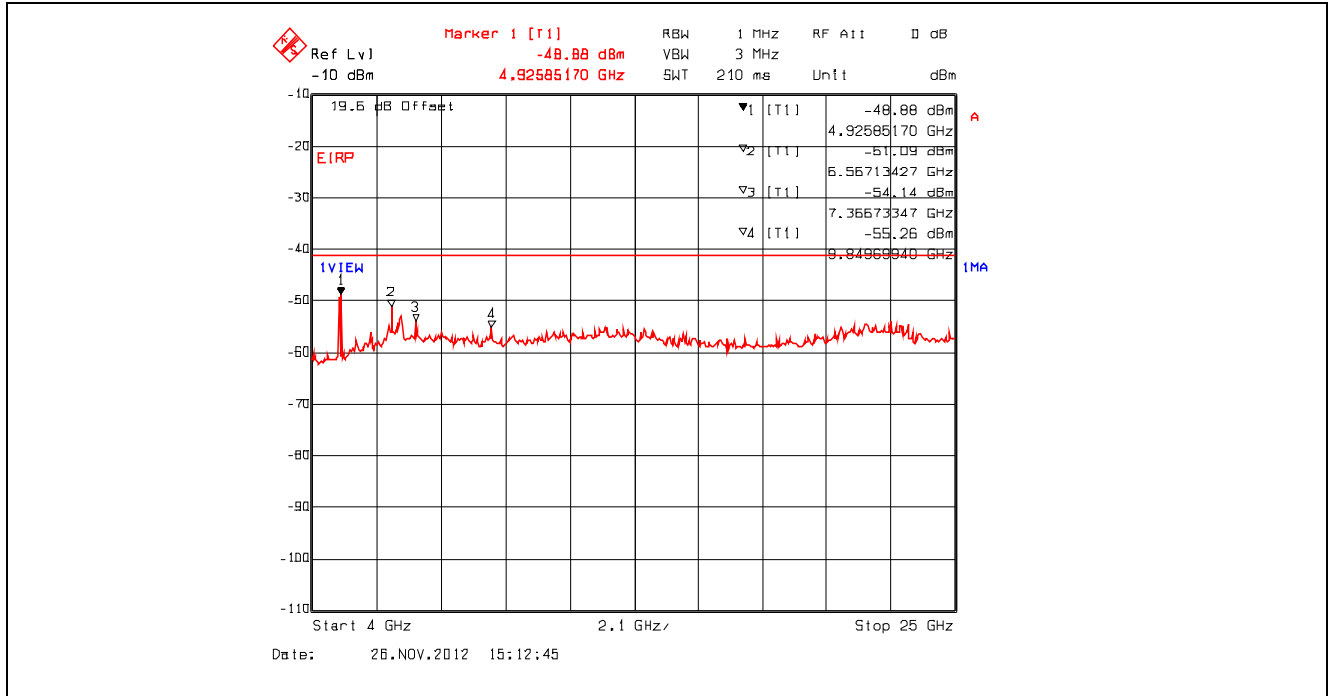


**Plot 5.4.4.3.46.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2412 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

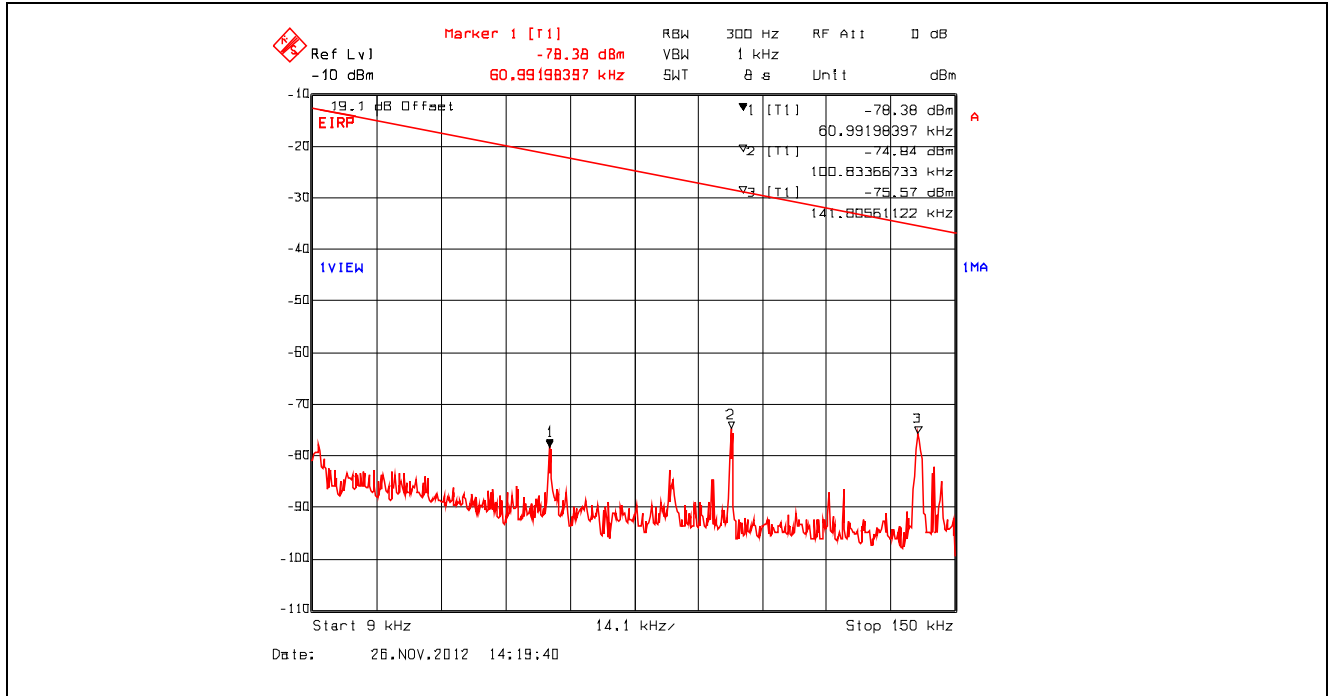


**Plot 5.4.4.3.47.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2412 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

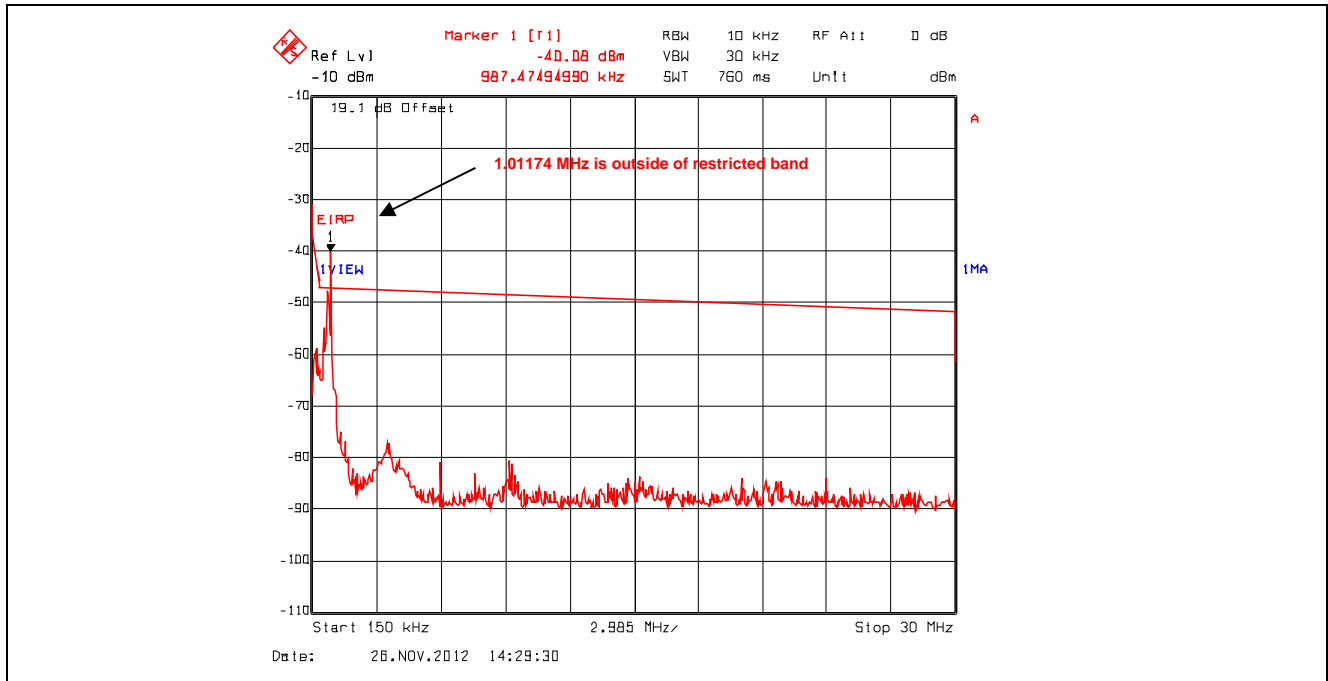


**Plot 5.4.4.3.48.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2412 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

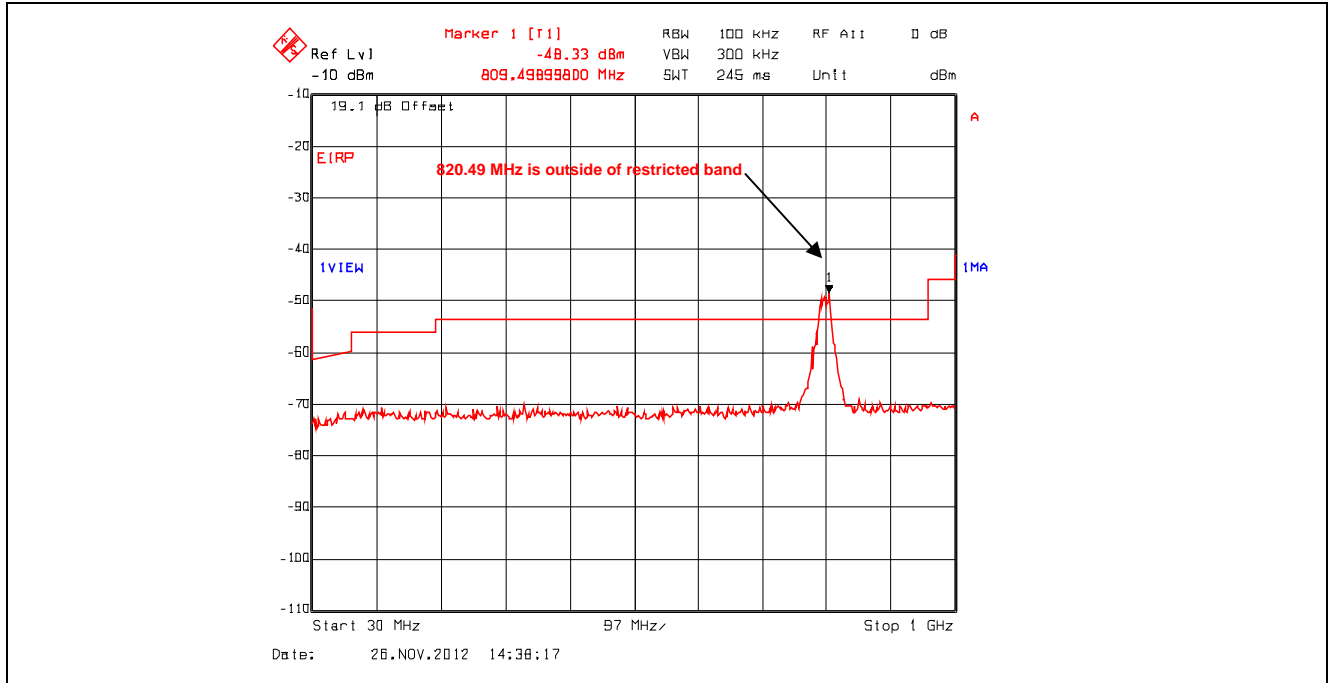

**Plot 5.4.4.3.49.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2412 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

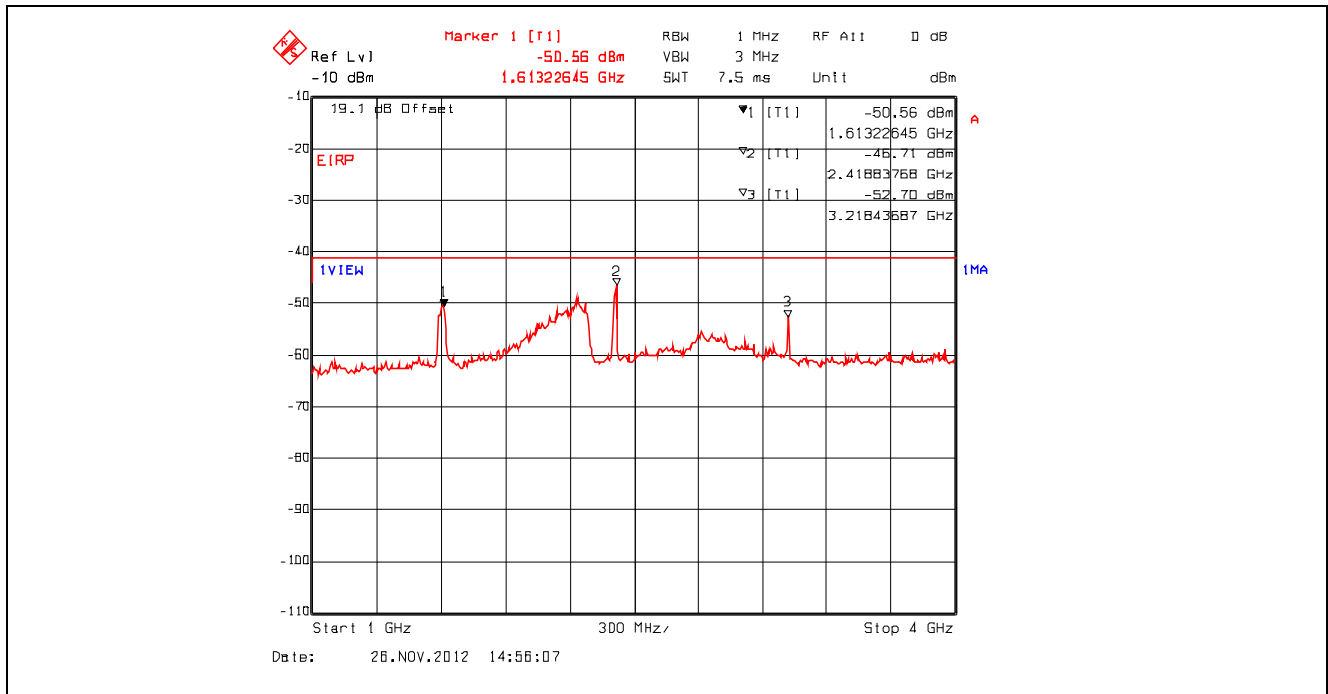

**Plot 5.4.4.3.50.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2412 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

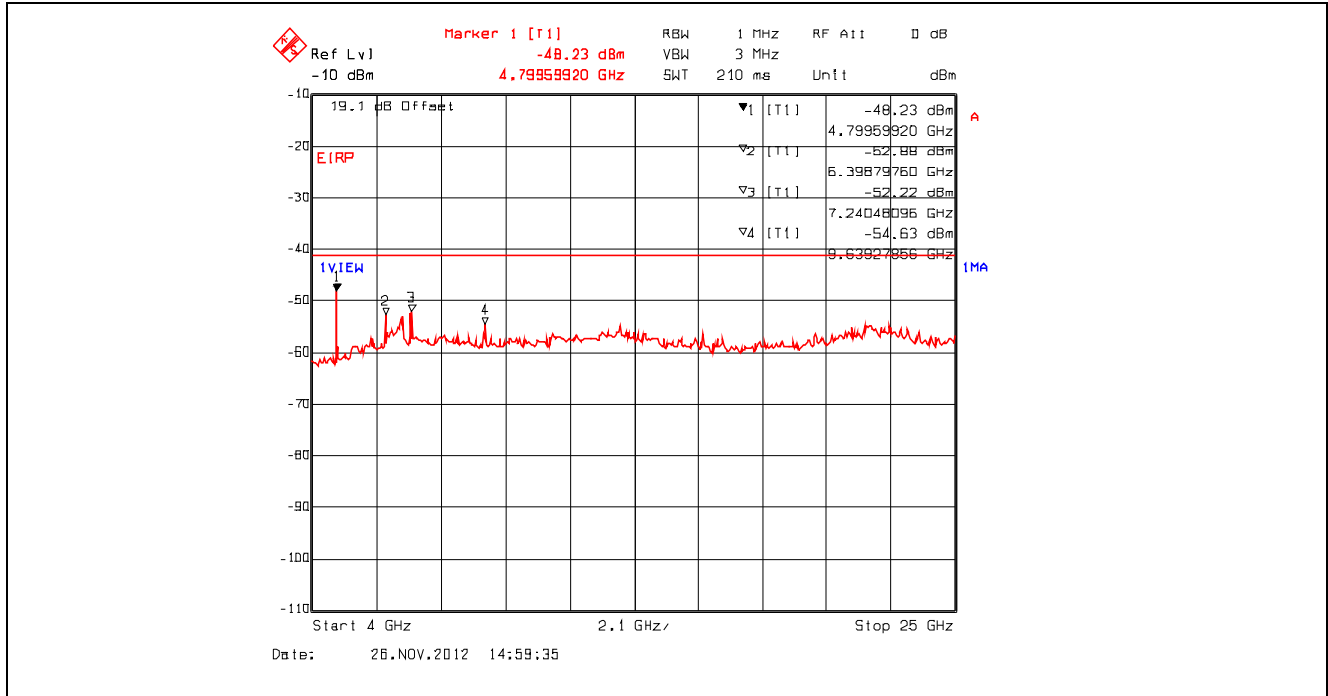


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: DIGI-070F15C247  
 December 17, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


**Plot 5.4.4.3.51.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2442 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

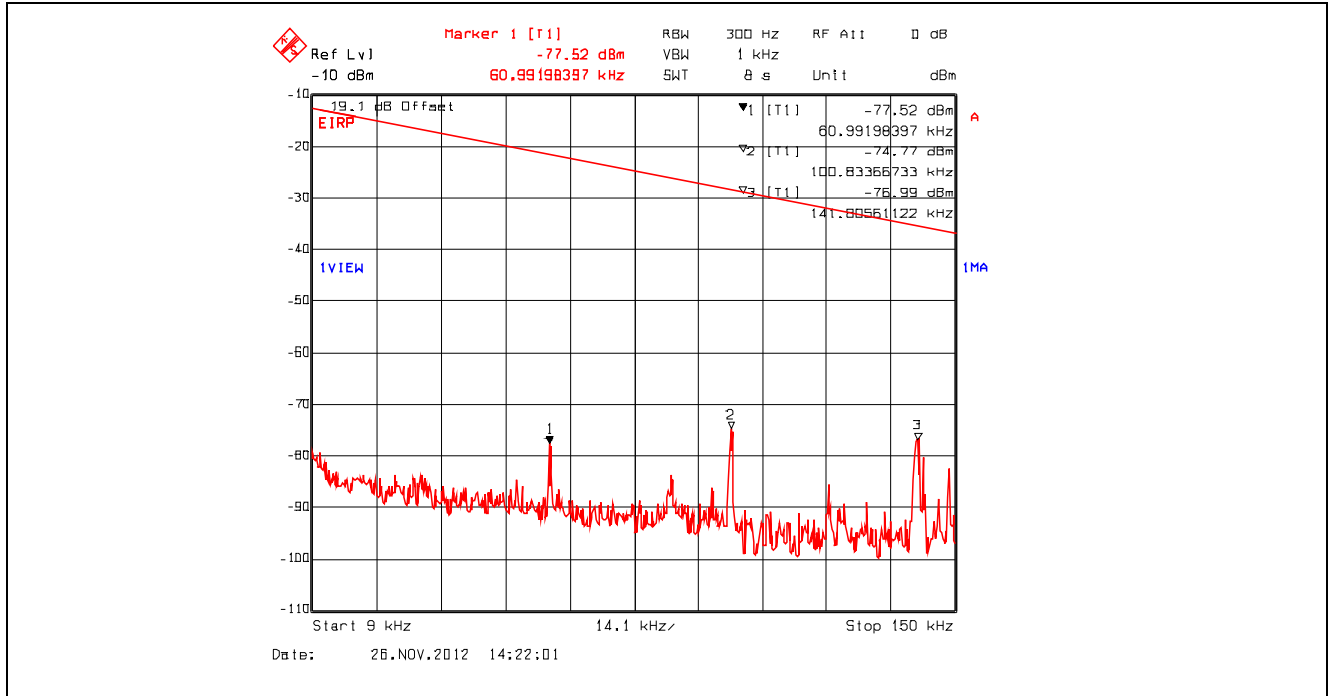


**Plot 5.4.4.3.52.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2442 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

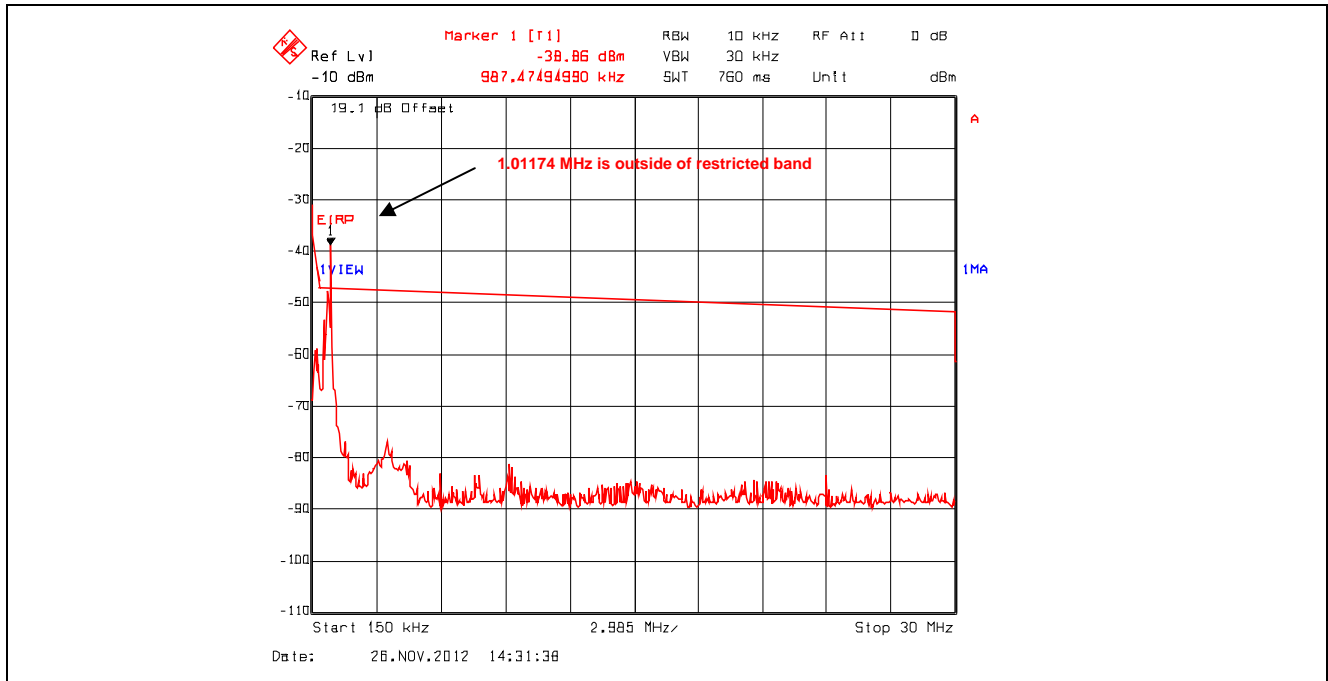


**Plot 5.4.4.3.53.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2442 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

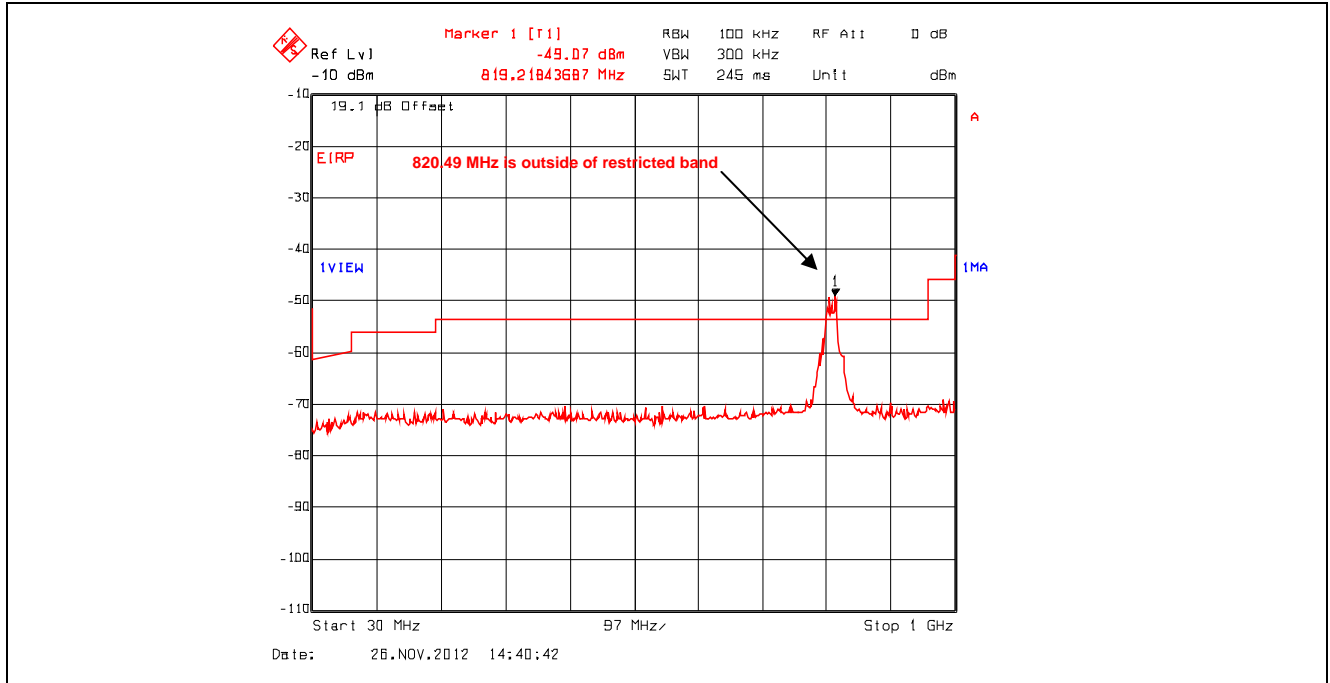

**Plot 5.4.4.3.54.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2442 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

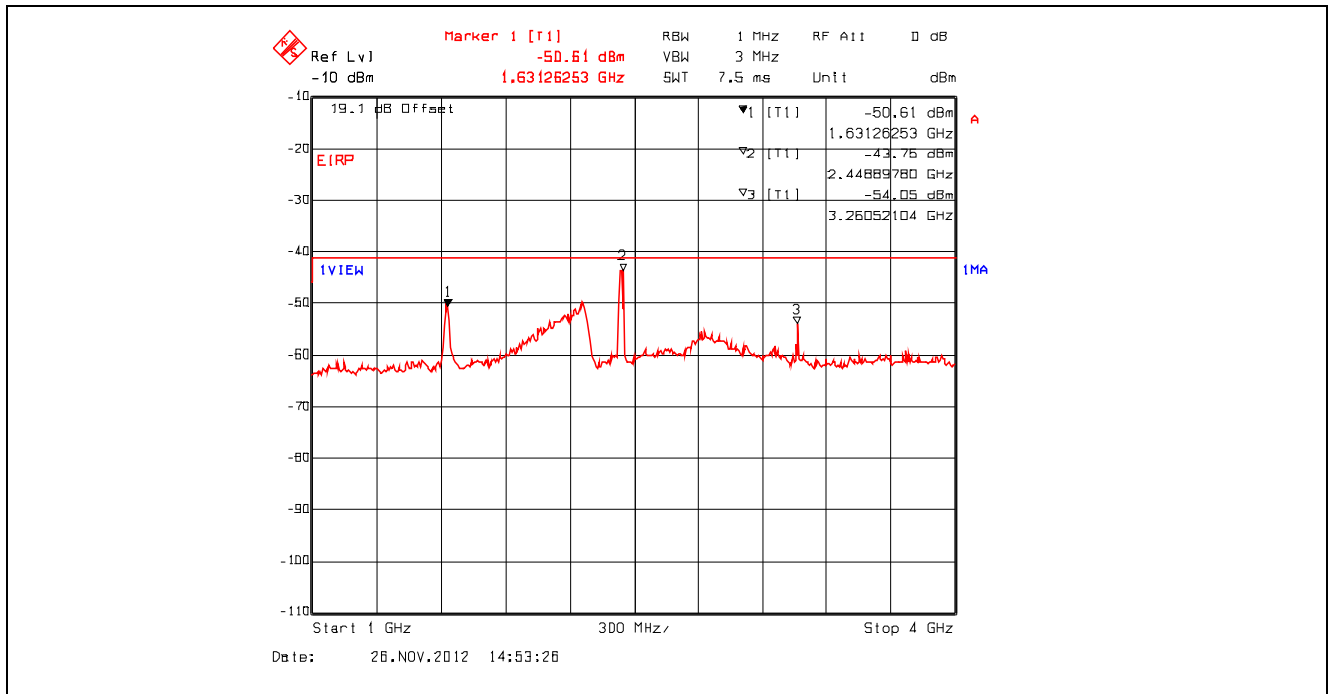


**Plot 5.4.4.3.55.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2442 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

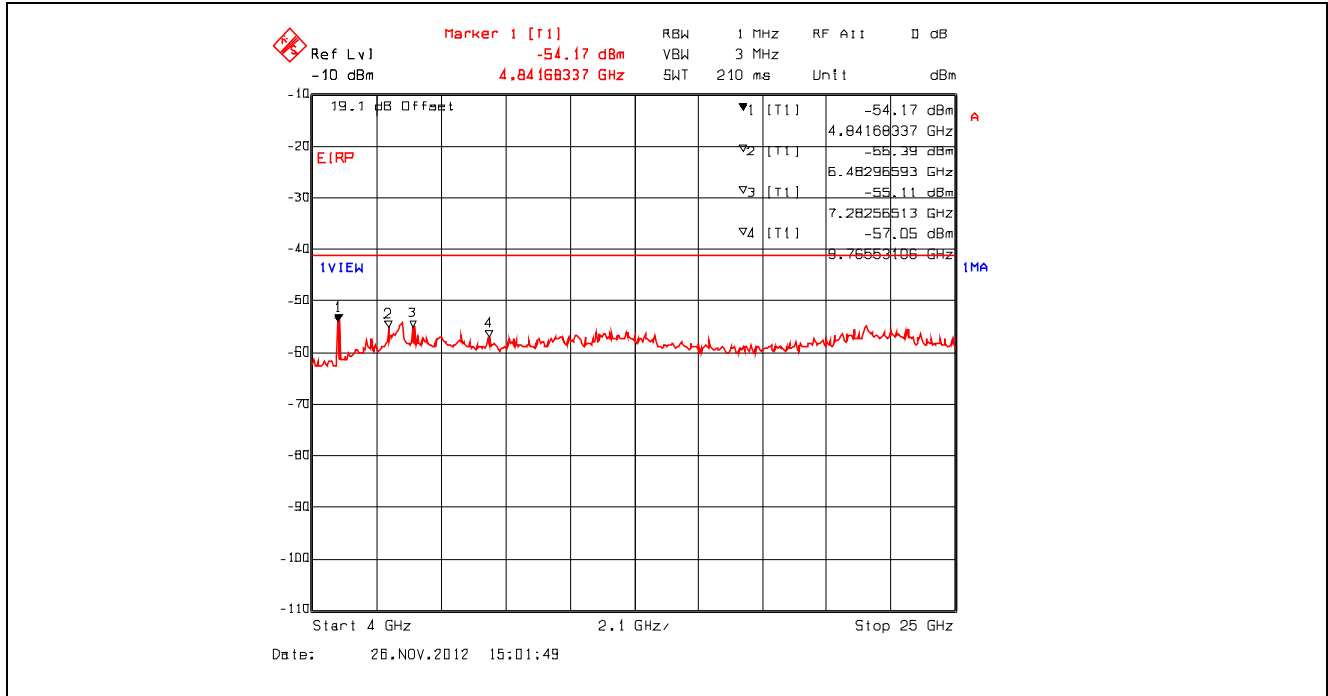





**Plot 5.4.4.3.56.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2462 MHz, 9 kHz - 150 kHz, Peak Detector with Band (Notch) Reject Filter

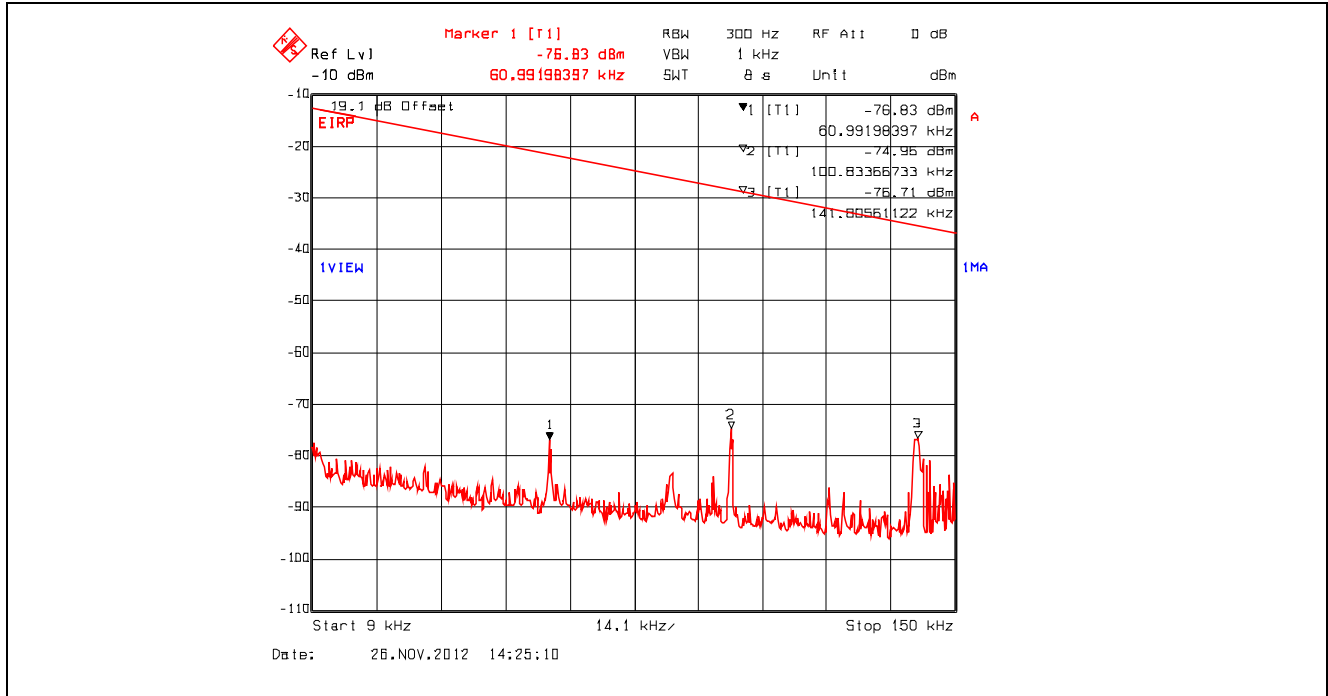


**Plot 5.4.4.3.57.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2462 MHz, 150 kHz - 30 MHz, Peak Detector with Band (Notch) Reject Filter

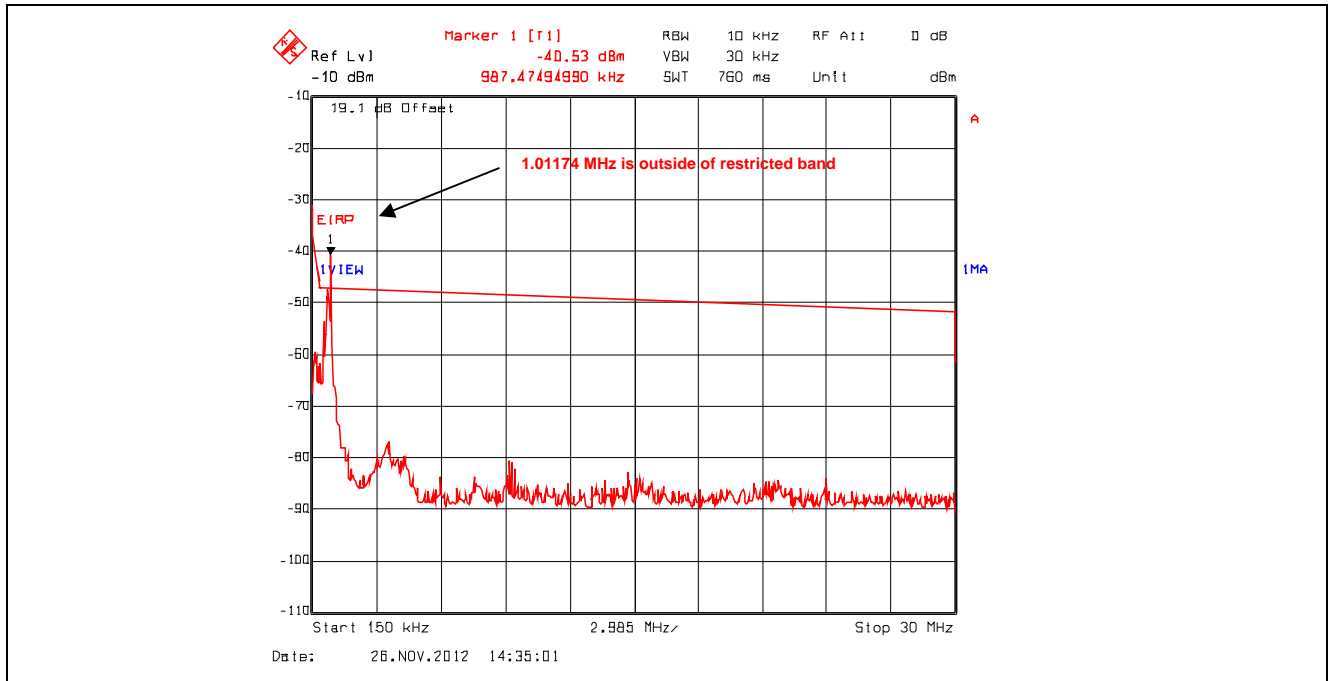


**Plot 5.4.4.3.58.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2462 MHz, 30 MHz - 1 GHz, Peak Detector with Band (Notch) Reject Filter

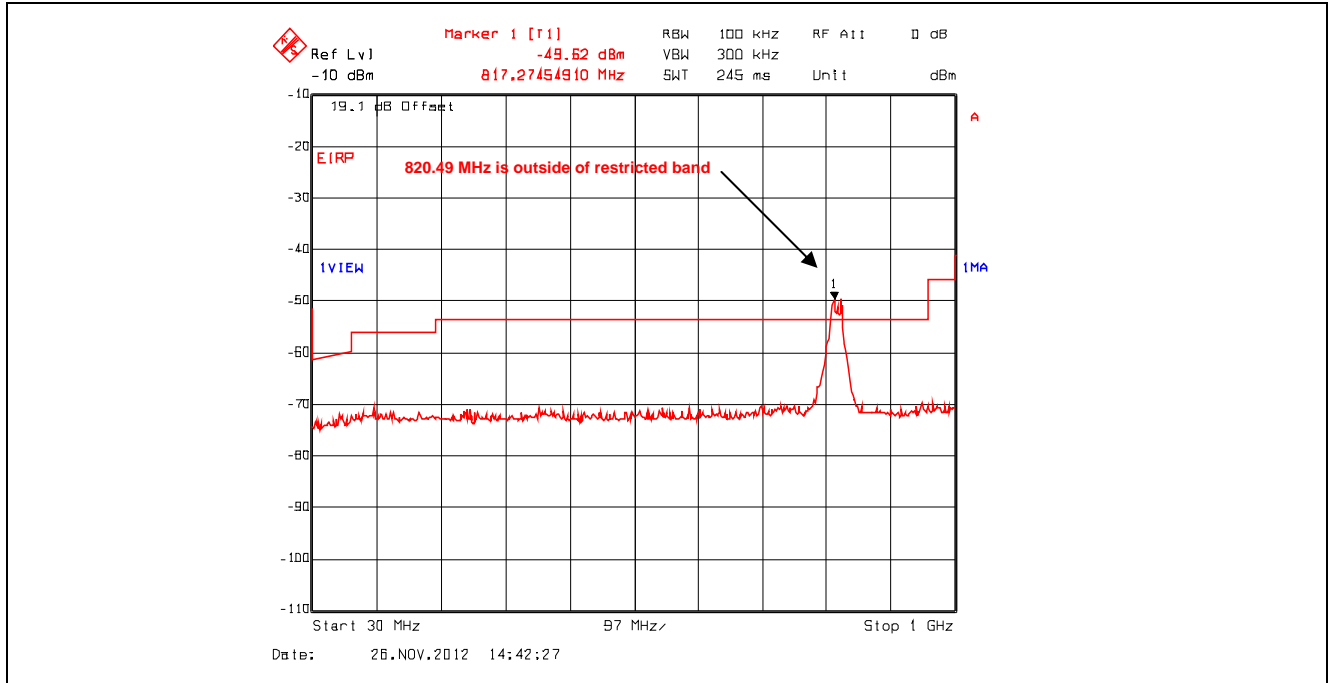

**Plot 5.4.4.3.59.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2462 MHz, 1 GHz - 4 GHz, Peak Detector with Band (Notch) Reject Filter

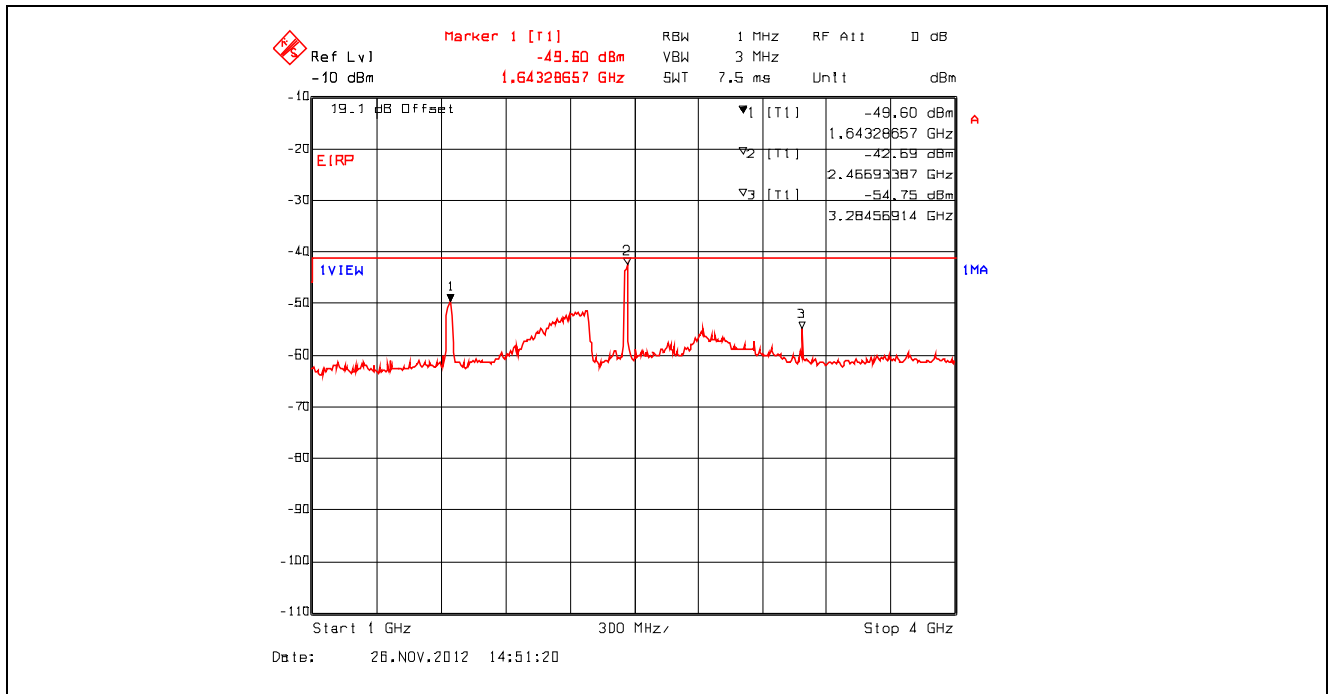

**Plot 5.4.4.3.60.** Conducted Spurious Emissions – Restricted Bands, 802.11n 400ns, BPSK 1/2 7.2 Mbps  
 2462 MHz, 4 GHz - 25 GHz, Peak Detector with High Pass Filter

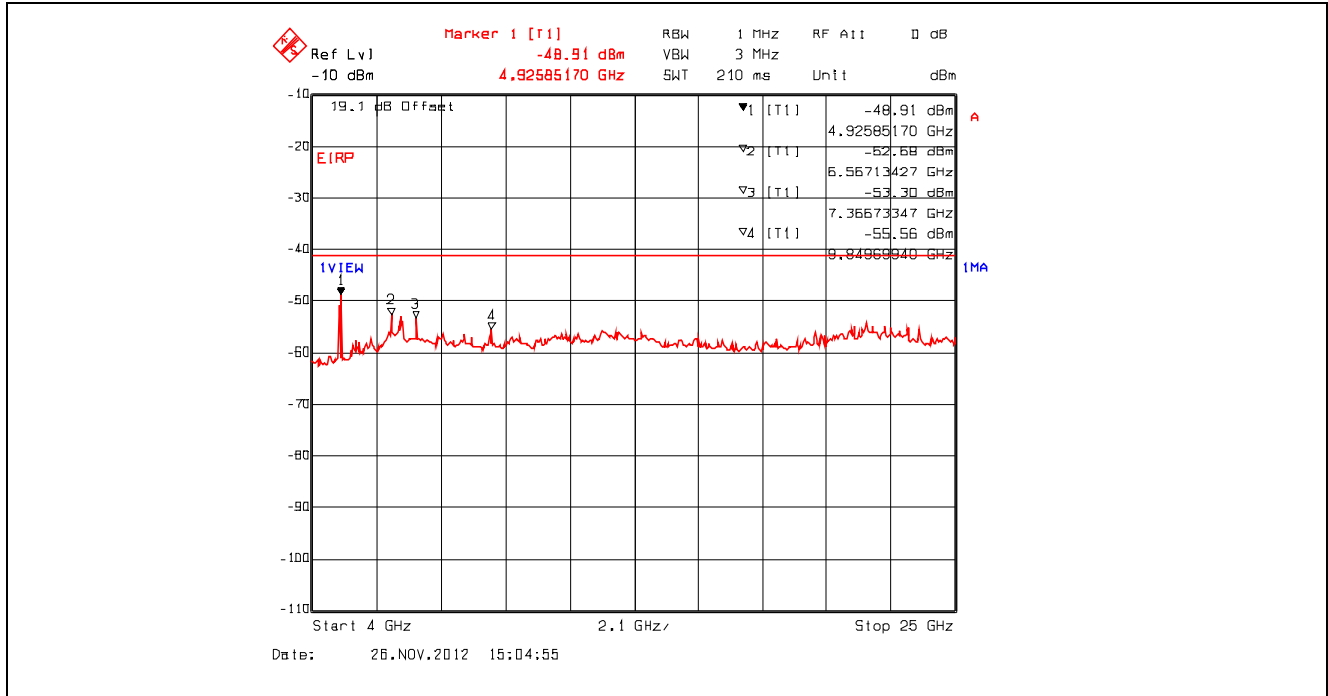

**5.5. TRANSMITTER SPURIOUS RADIATED EMISSIONS AT 3 METERS [§§ 15.247(d), 15.209 & 15.205]**

**5.5.1. Limit(s)**

§ 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Section 15.205(a) - Restricted Bands of Operation**

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	( <sup>2</sup> )
13.36–13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.  
<sup>2</sup> Above 38.6


**Section 15.209(a)**  
**-- Field Strength Limits within Restricted Frequency Bands --**

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2,400 / F (kHz)	300
0.490 - 1.705	24,000 / F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 5.5.2. Method of Measurements

KDB Publication No. 558074 D01 DTS Meas Guidance v02, Section 10.2.2.3 Radiated Spurious Emissions Measurement and ANSI C63.10.

### 5.5.3. Test Arrangement

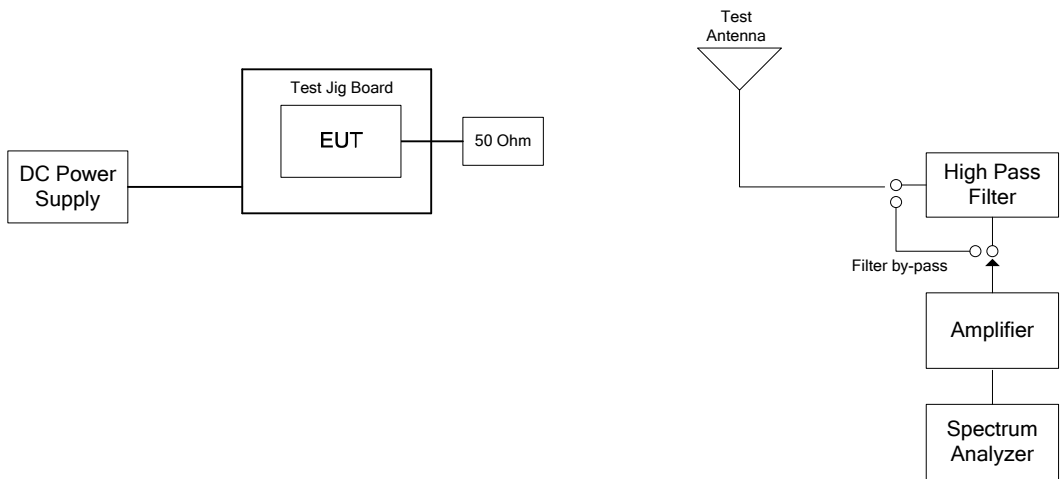

**5.5.4. Test Data**

**Remark(s):**

- All spurious emissions that are in excess of 20 dB below the specified limit shall be recorded.
- EUT shall be tested in three orthogonal positions.
- § 15.247 (d) spurious emission limit:  $E = (EIRP - 20\log(d) + 104.8) - 20 = (EIRP - 20\log(3) + 104.8) - 20$
- Exploratory testing were conducted to determine the final test configurations, the following represent the worst-case.

**5.5.4.1. 802.11b Mode, 11 Mbps CCK, High Power Setting 23**

Fundamental Frequency:		2412 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

Fundamental Frequency:		2442 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

Fundamental Frequency:		2462 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

**5.5.4.2. 802.11g Mode, 9 Mbps BPSK, High Power Setting 23**

Fundamental Frequency:		2412 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

Fundamental Frequency:		2442 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

Fundamental Frequency:		2462 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

**5.5.4.3. 802.11n 800ns Mode, 65Mbps 64-QAM 5/6, High Power Setting 23**

Fundamental Frequency:		2412 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

Fundamental Frequency:		2442 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

Fundamental Frequency:		2462 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.



**5.5.4.4. 802.11n 400ns Mode, 7.2 Mbps BPSK 1/2, High Power Setting 23**

Fundamental Frequency:		2412 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

Fundamental Frequency:		2442 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

Fundamental Frequency:		2462 MHz					
Output Power:		36 dBm EIRP Max.					
Frequency Test Range:		30 MHz – 25 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
30-25000	*	*	H/V	*	111.3	*	Pass

\*All spurious emissions/harmonics are more than 20 dB below the applicable limit.

**5.6. POWER SPECTRAL DENSITY [§ 15.247(e)]**


**5.6.1. Limit(s)**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

**5.6.2. Method of Measurements**

KDB Publication No. 558074 D01 DTS Meas Guidance v02, Section 9.1 Option 1.

**5.6.3. Test Arrangement**

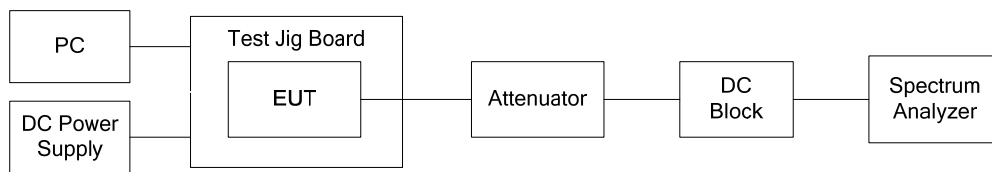

**5.6.4. Test Data**

**Remark:** Measurement method: Section 9.1 Option 1 Peak Power Spectral Density

Operating Mode	Modulation	Frequency (MHz)	*PSD in 3 kHz BW (dBm)	Limit (dBm)	Margin (dB)
802.11b	1 Mbps DBPSK	2412	-4.63	8	-12.63
		2442	-4.80	8	-12.80
		2462	-5.67	8	-13.67
	2 Mbps DQPSK	2412	-2.73	8	-10.73
		2442	-2.52	8	-10.52
		2462	-3.41	8	-11.41
	11 Mbps CCK	2412	-4.23	8	-12.23
		2442	-4.60	8	-12.60
		2462	-5.10	8	-13.10

Operating Mode	Modulation	Frequency (MHz)	*PSD in 3 kHz BW (dBm)	Limit (dBm)	Margin (dB)
802.11g	9 Mbps BPSK	2412	-5.48	8	-13.48
		2442	-6.31	8	-14.31
		2462	-5.15	8	-13.15
	18 Mbps QPSK	2412	-5.61	8	-13.61
		2442	-5.78	8	-13.78
		2462	-5.55	8	-13.55
	36 Mbps 16-QAM	2412	-5.43	8	-13.43
		2442	-6.23	8	-14.23
		2462	-5.16	8	-13.16
	54 Mbps 64-QAM	2412	-5.86	8	-13.86
		2442	-5.25	8	-13.25
		2462	-6.11	8	-14.11
802.11n 800ns	6.5 Mbps BPSK 1/2	2412	-5.92	8	-13.92
		2442	-6.70	8	-14.70
		2462	-5.29	8	-13.29
	19.5 Mbps QPSK 3/4	2412	-6.18	8	-14.18
		2442	-5.38	8	-13.38
		2462	-5.66	8	-13.86
	39 Mbps 16-QAM 3/4	2412	-5.96	8	-13.96
		2442	-6.60	8	-14.60
		2462	-6.08	8	-14.08
	65 Mbps 64-QAM 5/6	2412	-6.27	8	-14.27
		2442	-6.59	8	-14.59
		2462	-6.62	8	-14.62
802.11n 400ns	7.2 Mbps BPSK1/2	2412	-6.33	8	-14.33
		2442	-6.91	8	-14.91
		2462	-5.72	8	-13.72
	21.7 Mbps QPSK 3/4	2412	-7.01	8	-15.01
		2442	-6.89	8	-14.89
		2462	-6.43	8	-14.43
	43.3 Mbps 16-QAM 3/4	2412	-6.66	8	-14.66
		2442	-6.89	8	-14.89
		2462	-5.94	8	-13.94
	72.2 Mbps 64-QAM 5/6	2412	-7.22	8	-15.22
		2442	-5.98	8	-13.98
		2462	-6.62	8	-14.62

\*See the following plots for measurement details.


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: DIGI-070F15C247  
 December 17, 2012

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*


Plot 5.6.4.1. Power Spectral Density, 802.11b, 1 Mbps DBPSK, 2412 MHz, Setting 23

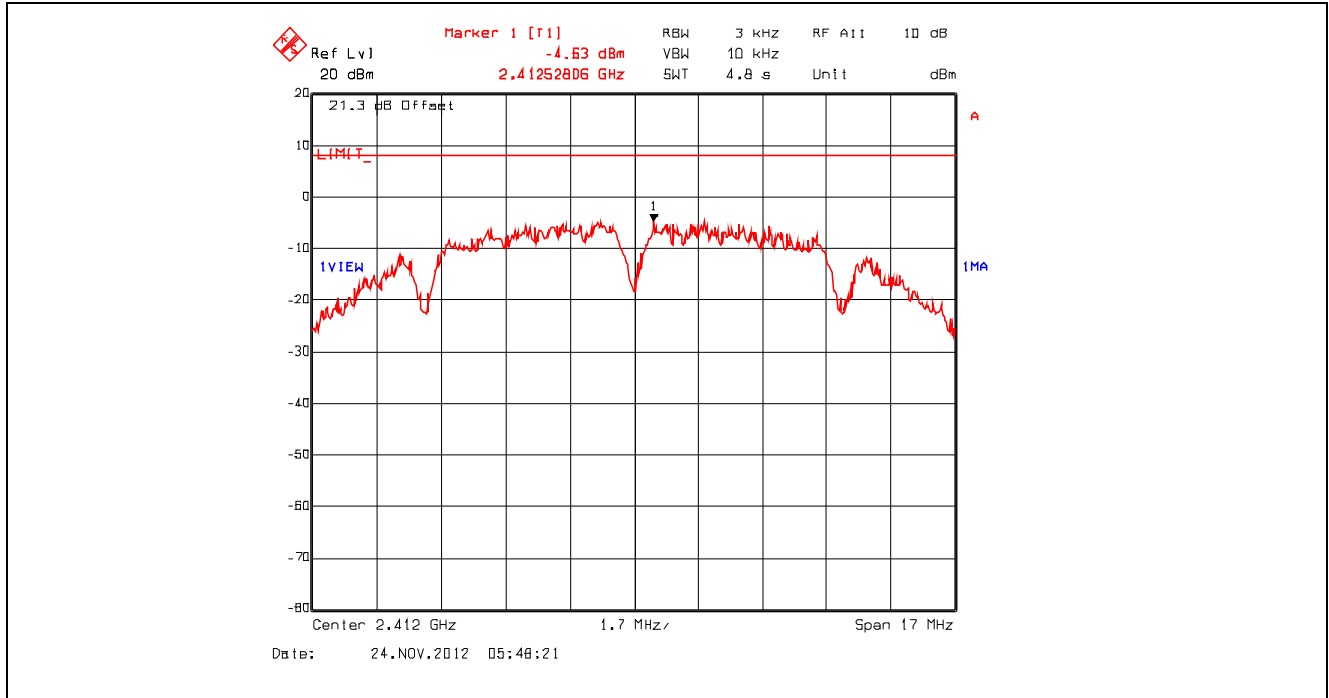


Plot 5.6.4.2. Power Spectral Density, 802.11b, 1 Mbps DBPSK, 2442 MHz, Setting 23

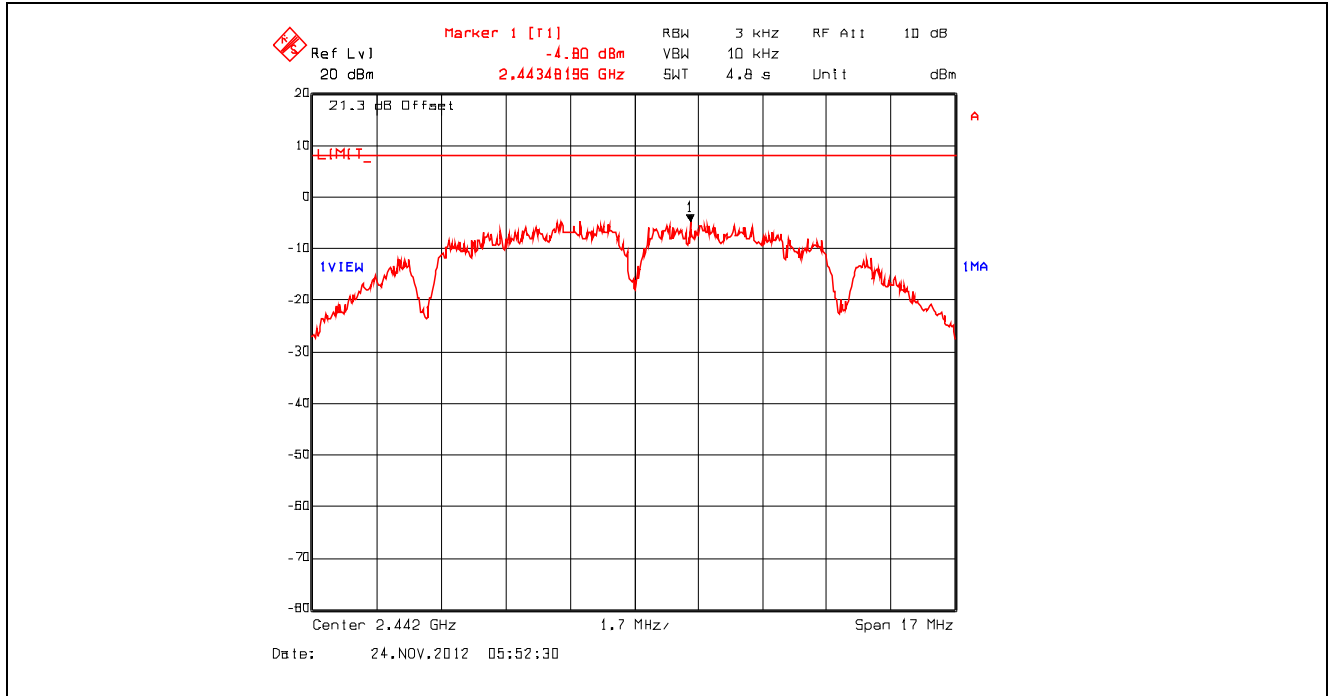


Plot 5.6.4.3. Power Spectral Density, 802.11b, 1 Mbps DBPSK, 2462 MHz, Setting 23

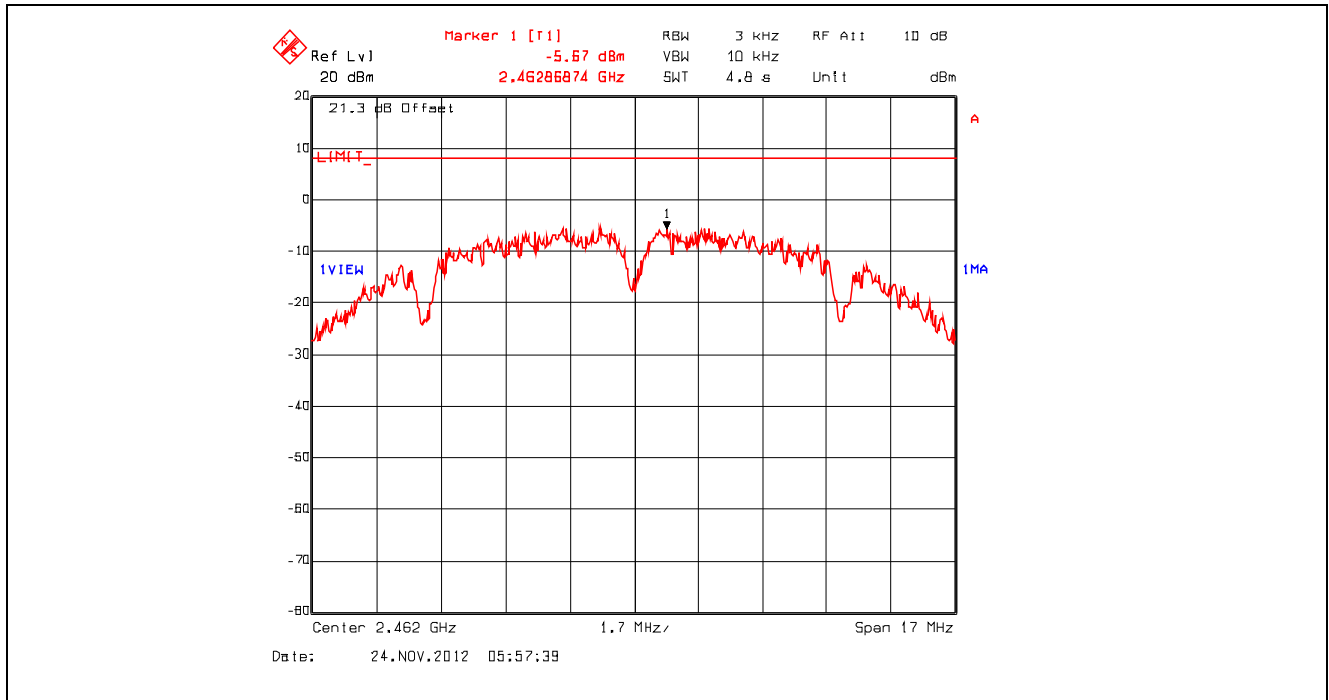


Plot 5.6.4.4. Power Spectral Density, 802.11b, 2 Mbps DQPSK, 2412 MHz, Setting 23

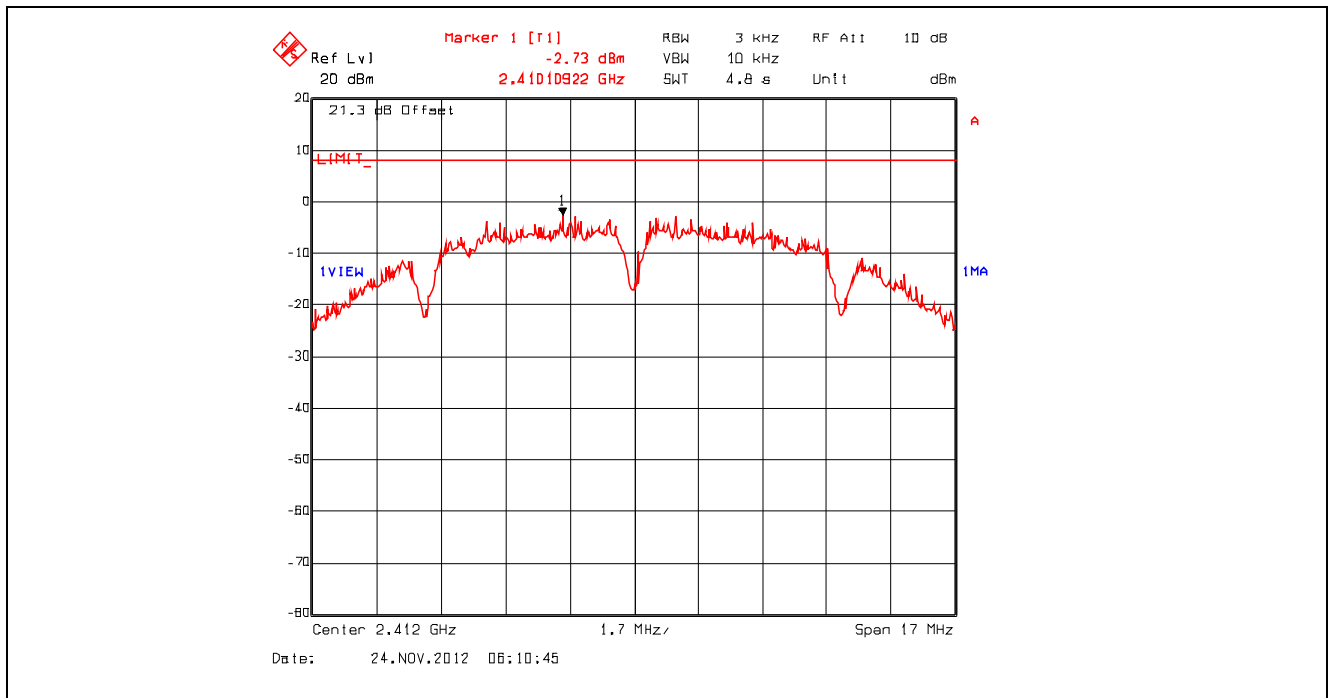


Plot 5.6.4.5. Power Spectral Density, 802.11b, 2 Mbps DQPSK, 2442 MHz, Setting 23

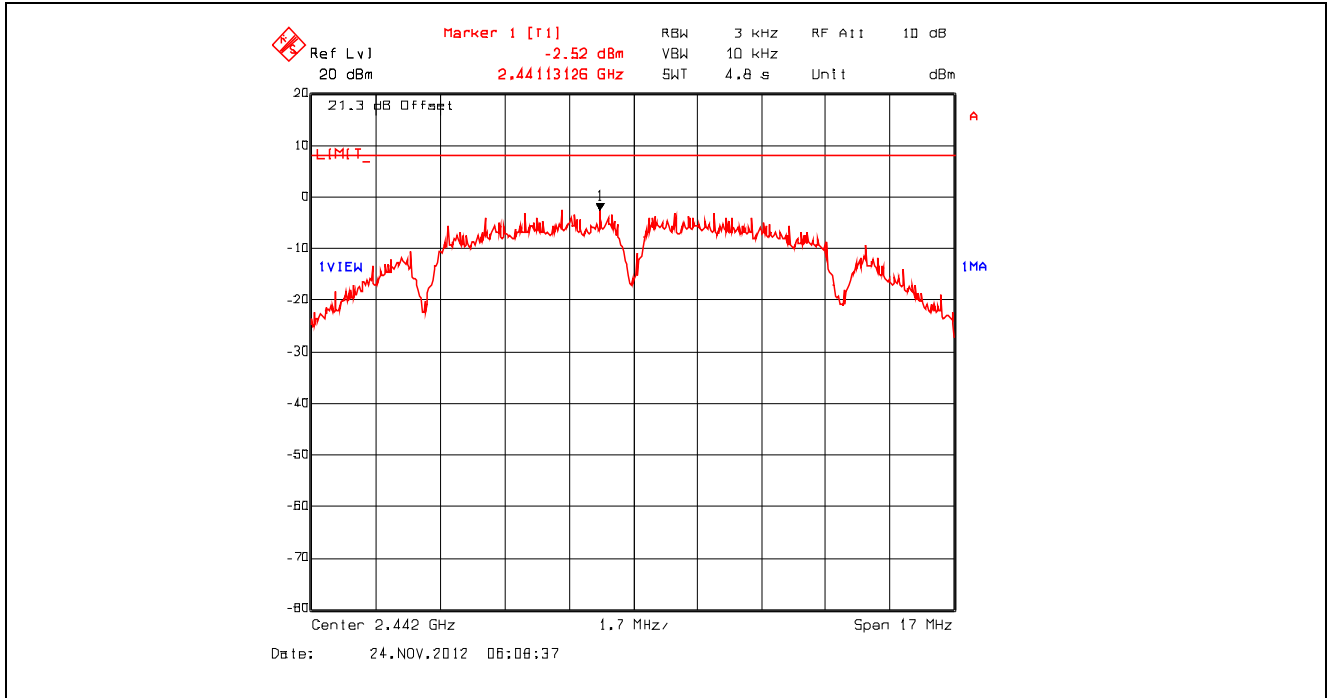


Plot 5.6.4.6. Power Spectral Density, 802.11b, 2 Mbps DQPSK, 2462 MHz, Setting 23

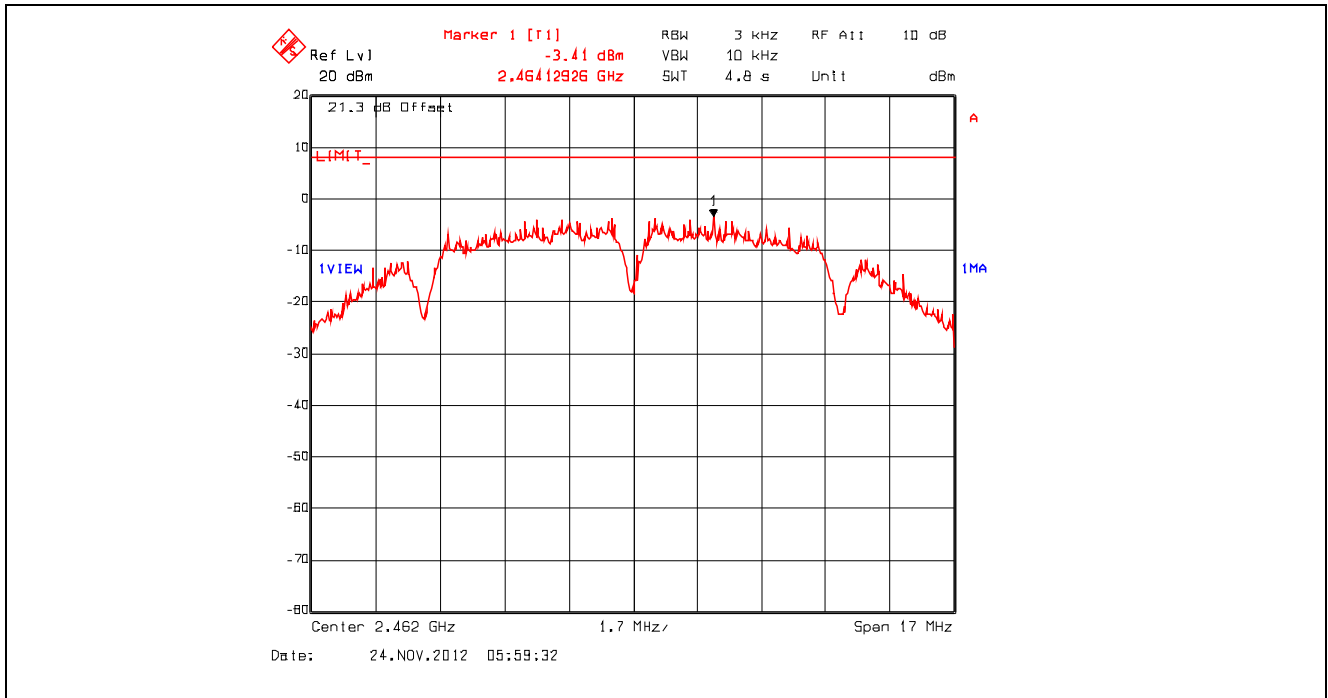


Plot 5.6.4.7. Power Spectral Density, 802.11b, 11 Mbps CCK, 2412 MHz, Setting 23

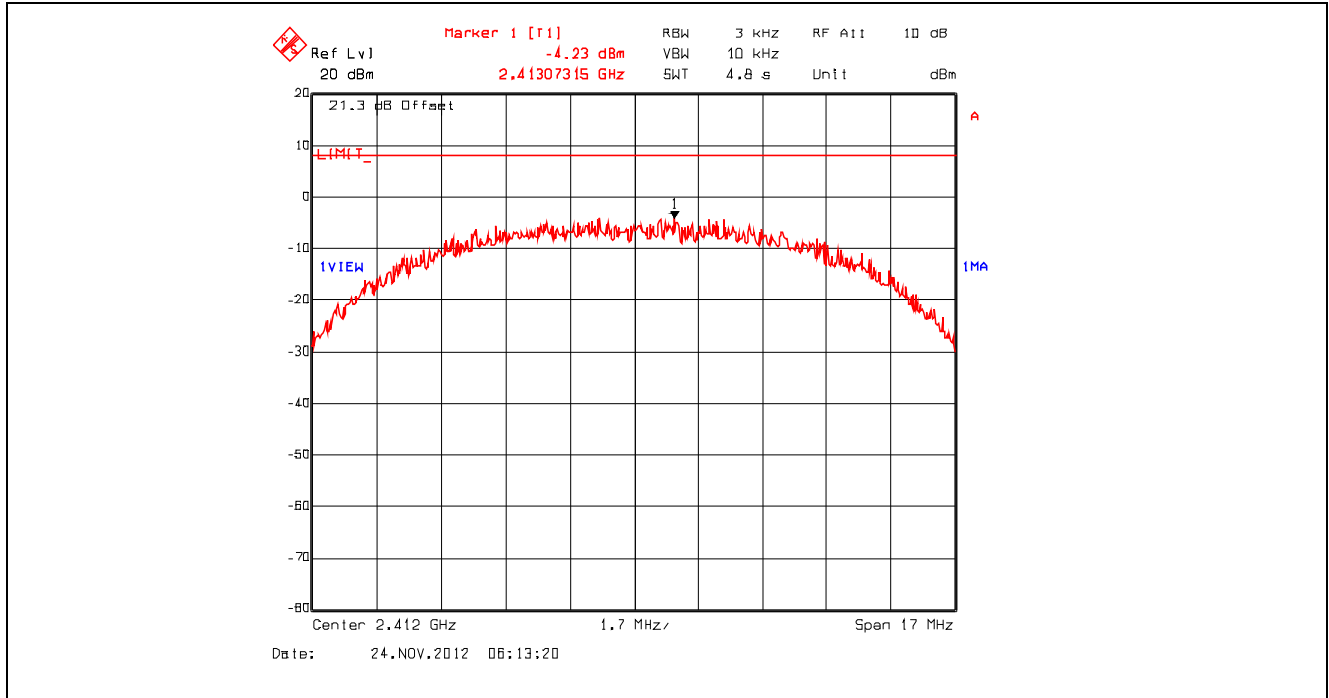

Plot 5.6.4.8. Power Spectral Density, 802.11b, 11 Mbps CCK, 2442 MHz, Setting 23

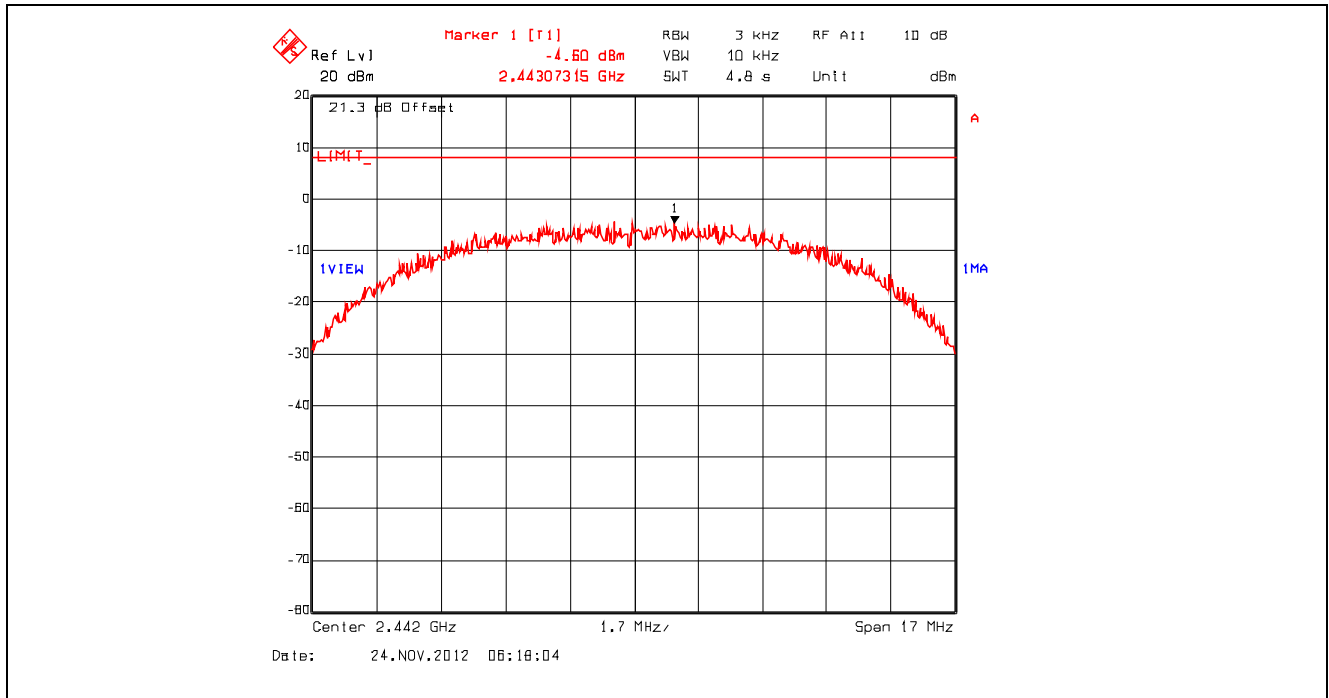


Plot 5.6.4.9. Power Spectral Density, 802.11b, 11 Mbps CCK, 2462 MHz, Setting 23

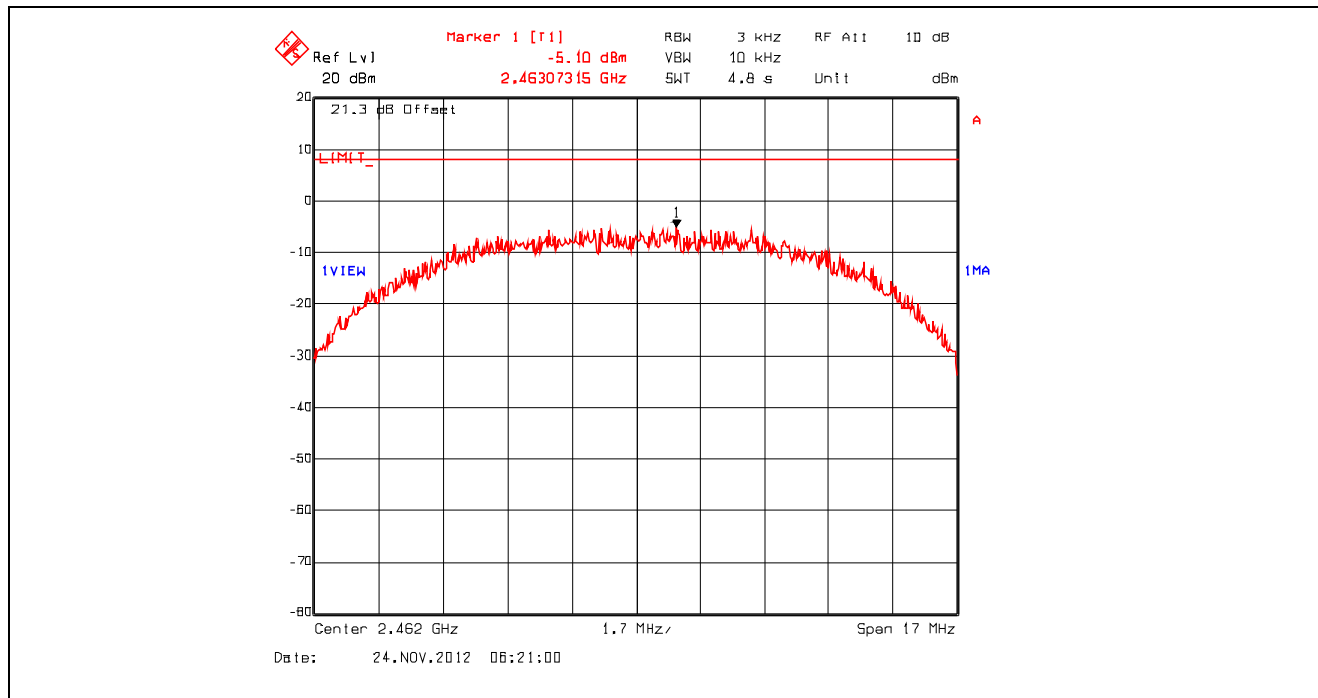





Plot 5.6.4.10. Power Spectral Density, 802.11g, 9 Mbps BPSK, 2412 MHz, Setting 23

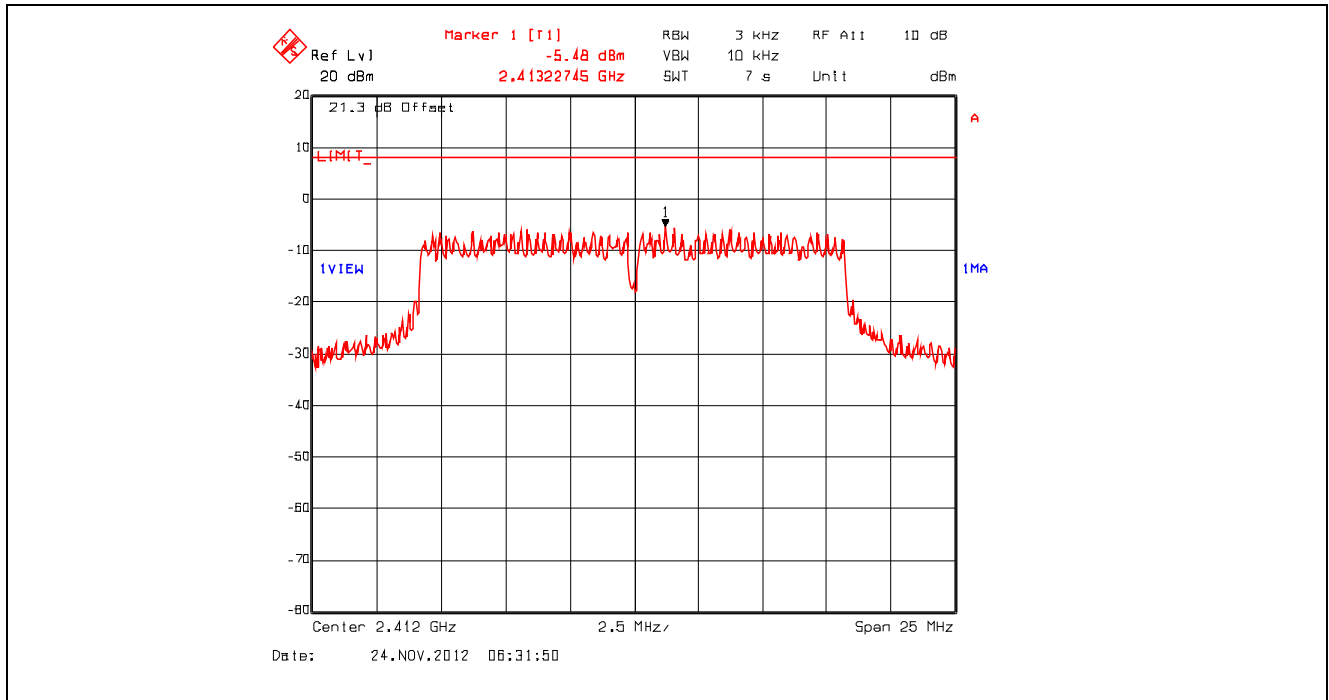


Plot 5.6.4.11. Power Spectral Density, 802.11g, 9 Mbps BPSK, 2442 MHz, Setting 23

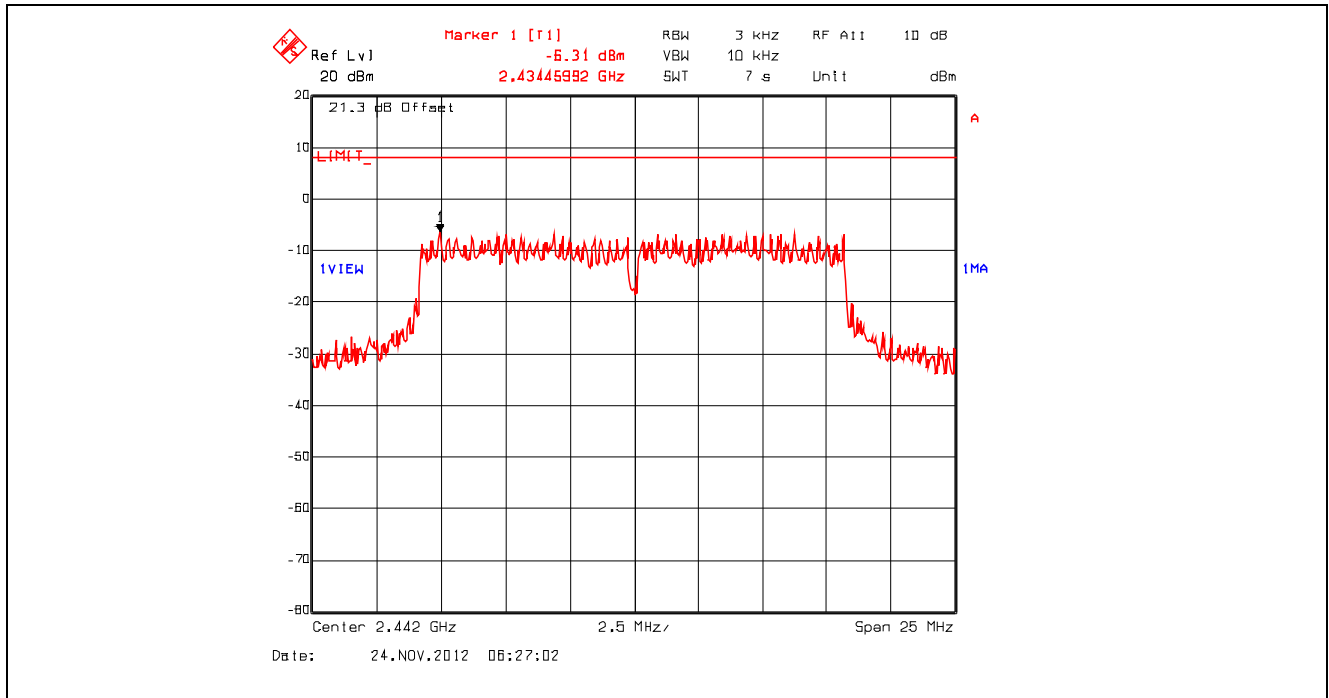


Plot 5.6.4.12. Power Spectral Density, 802.11g, 9 Mbps BPSK, 2462 MHz, Setting 23

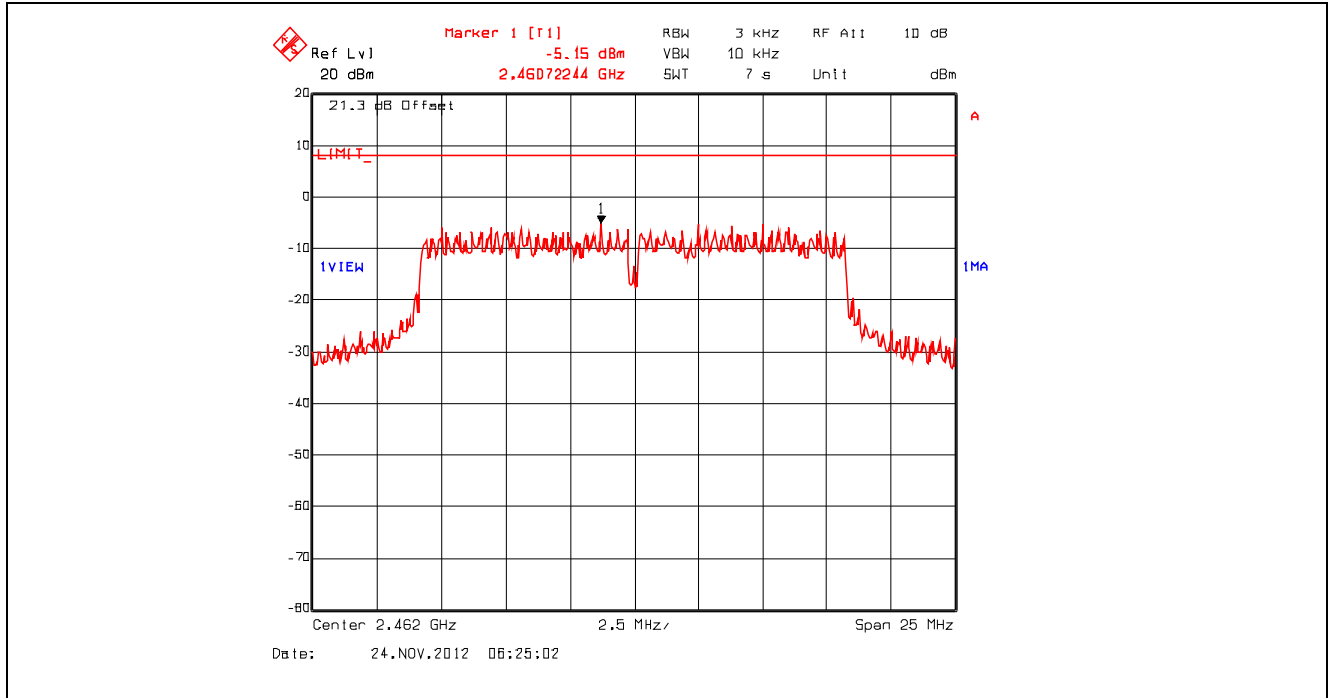


Plot 5.6.4.13. Power Spectral Density, 802.11g, 18 Mbps QPSK, 2412 MHz, Setting 23

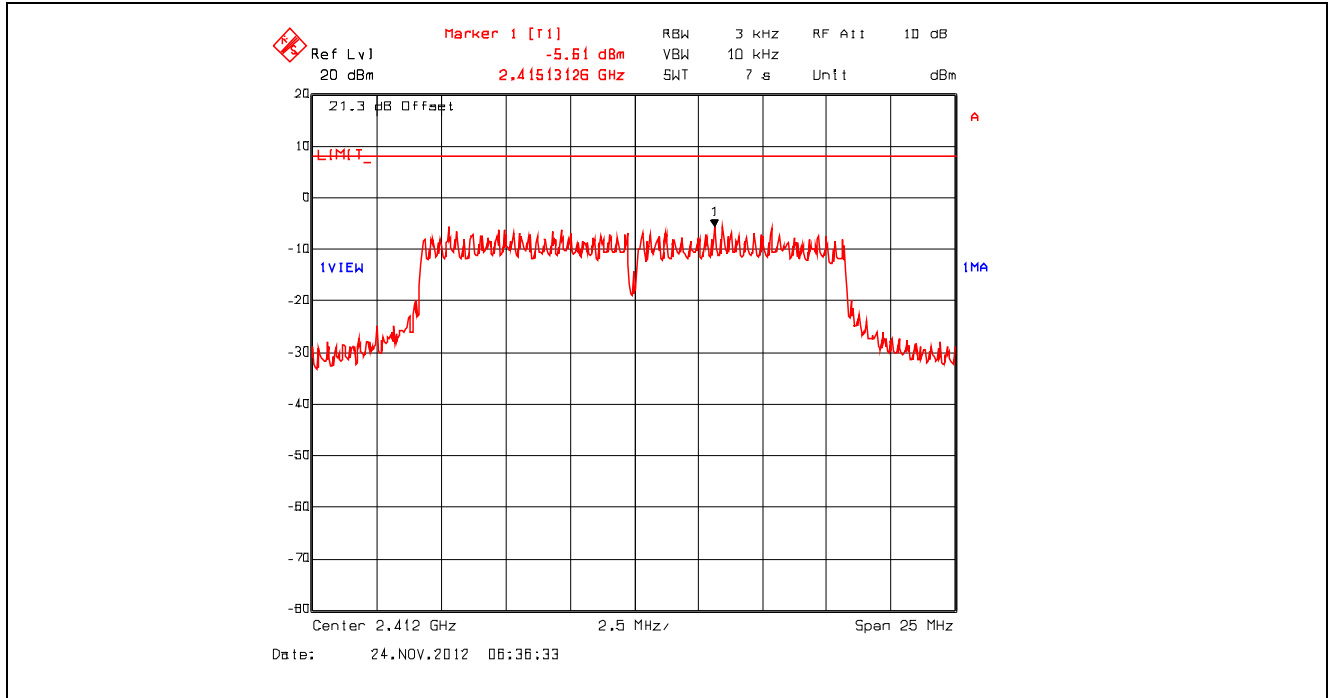


Plot 5.6.4.14. Power Spectral Density, 802.11g, 18 Mbps QPSK, 2442 MHz, Setting 23

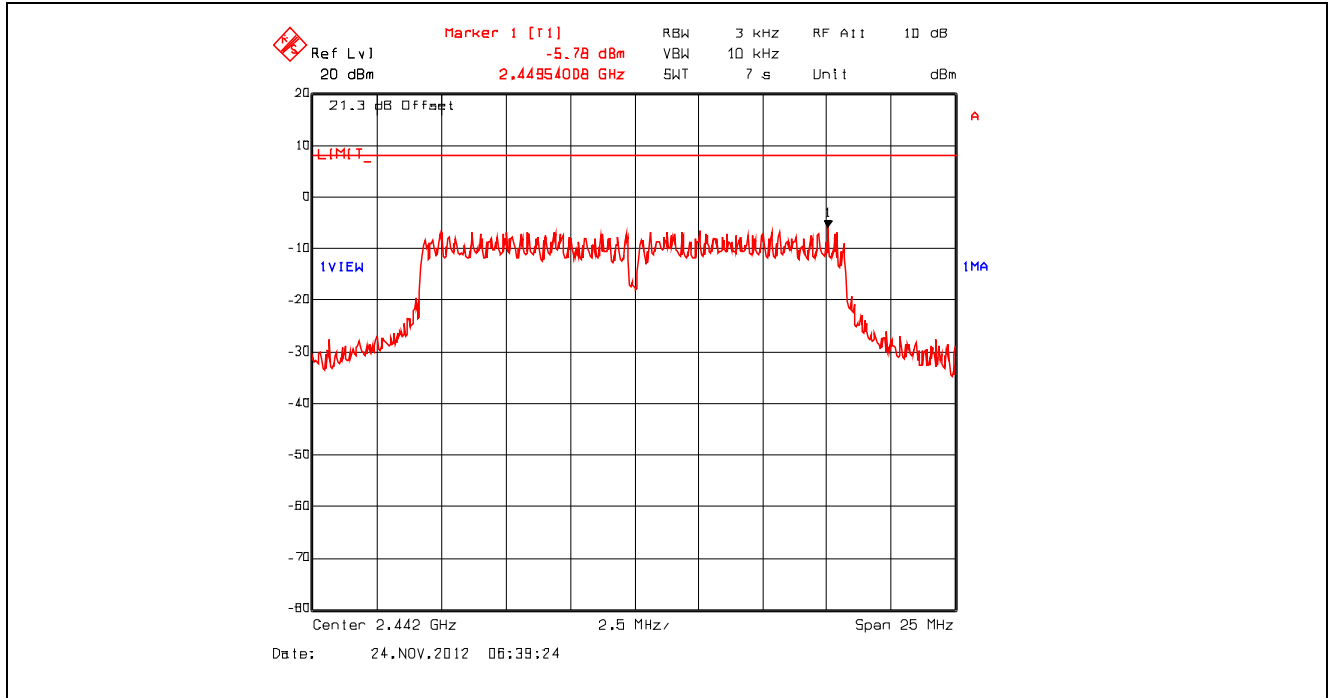


Plot 5.6.4.15. Power Spectral Density, 802.11g, 18 Mbps QPSK, 2462 MHz, Setting 23

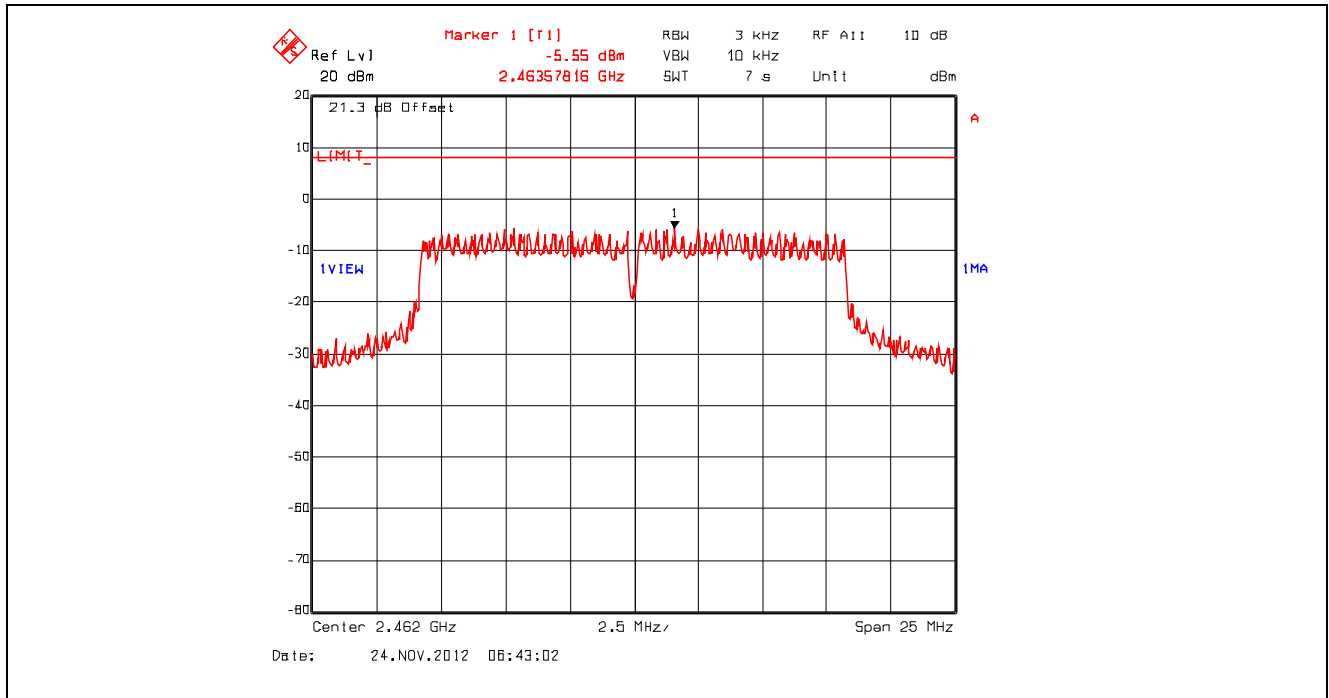


Plot 5.6.4.16. Power Spectral Density, 802.11g, 36 Mbps 16-QAM, 2412 MHz, Setting 23

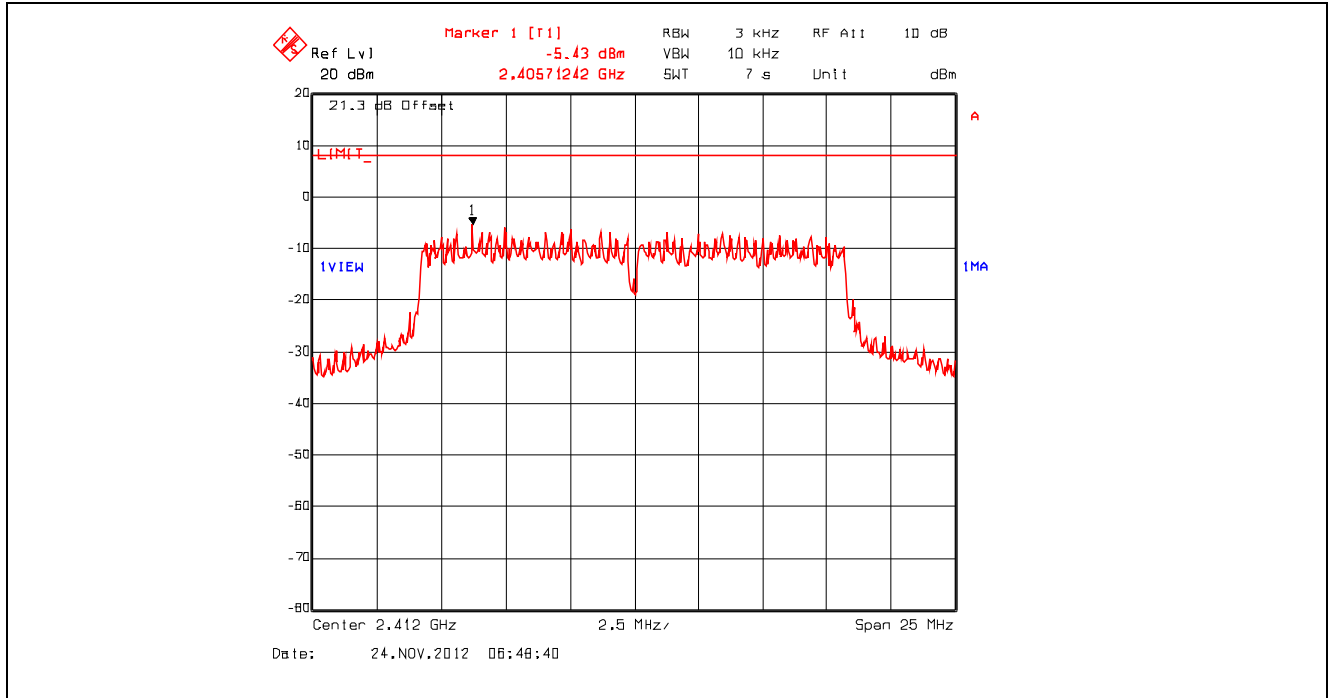


Plot 5.6.4.17. Power Spectral Density, 802.11g, 36 Mbps 16-QAM, 2442 MHz, Setting 23

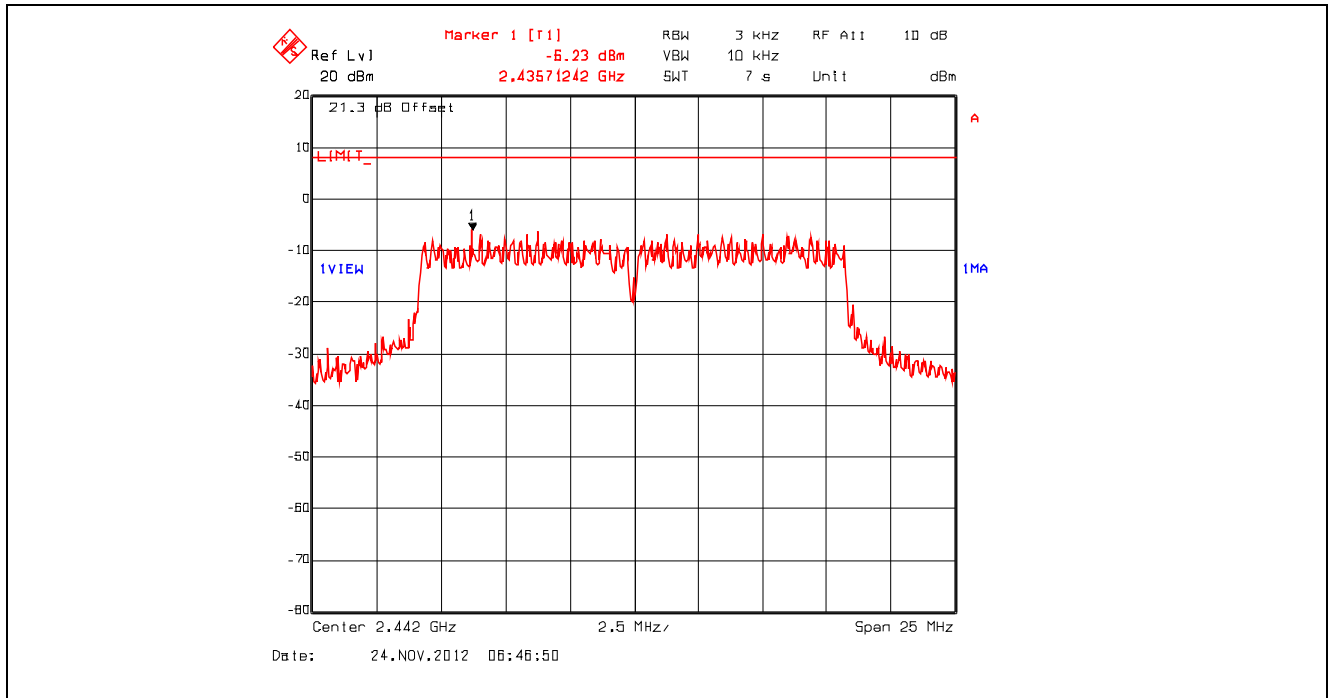


Plot 5.6.4.18. Power Spectral Density, 802.11g, 36 Mbps 16-QAM, 2462 MHz, Setting 23

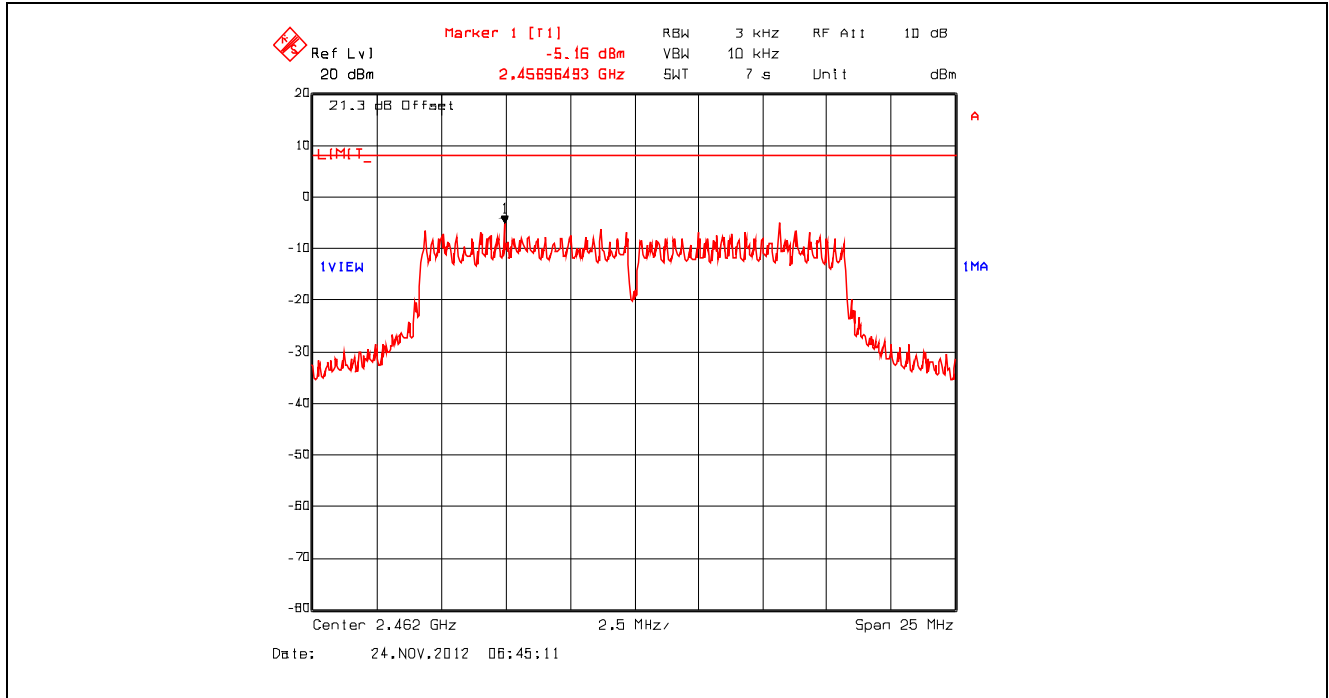


Plot 5.6.4.19. Power Spectral Density, 802.11g, 54 Mbps 64-QAM, 2412 MHz, Setting 23

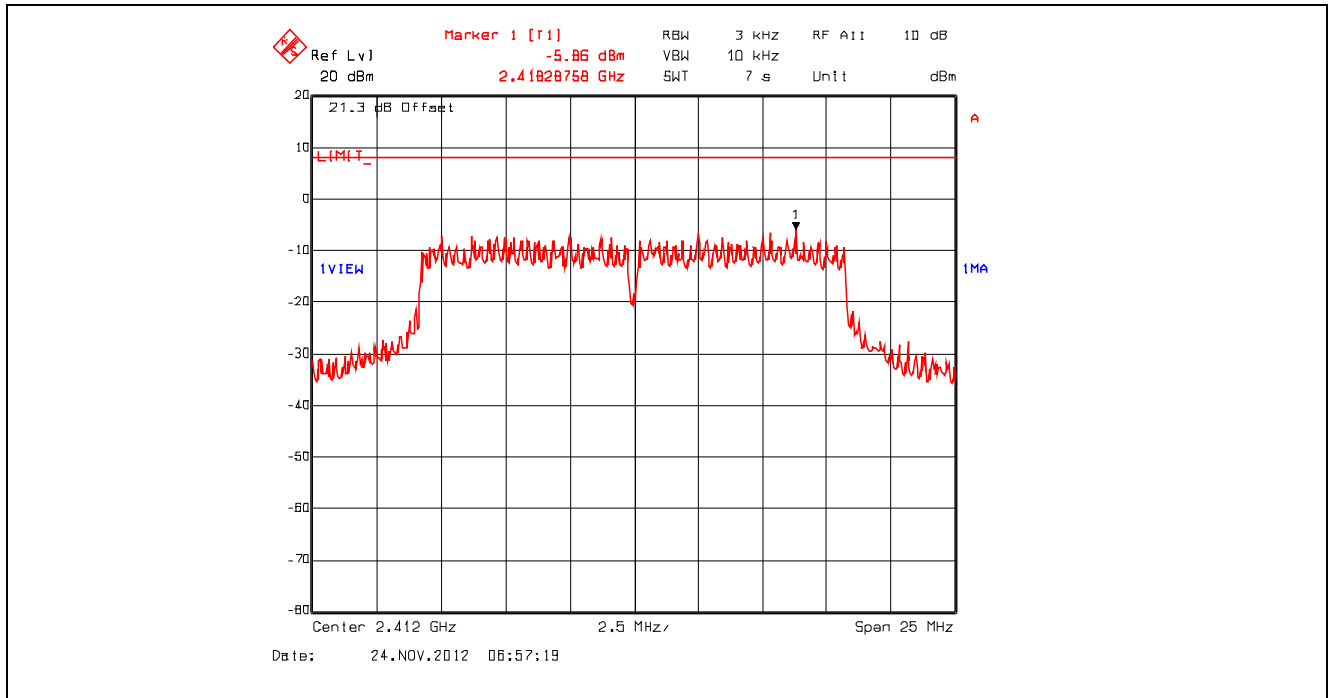


Plot 5.6.4.20. Power Spectral Density, 802.11g, 54 Mbps 64-QAM, 2442 MHz, Setting 23

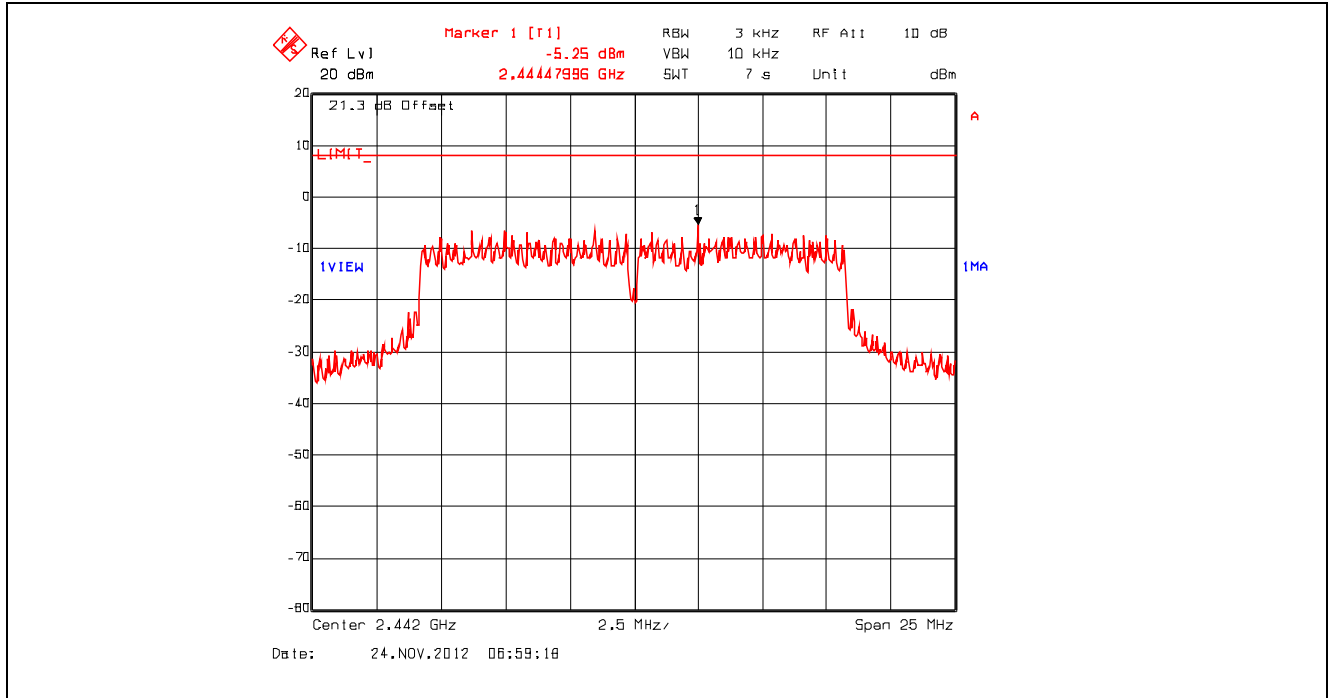


Plot 5.6.4.21. Power Spectral Density, 802.11g, 54 Mbps 64-QAM, 2462 MHz, Setting 23

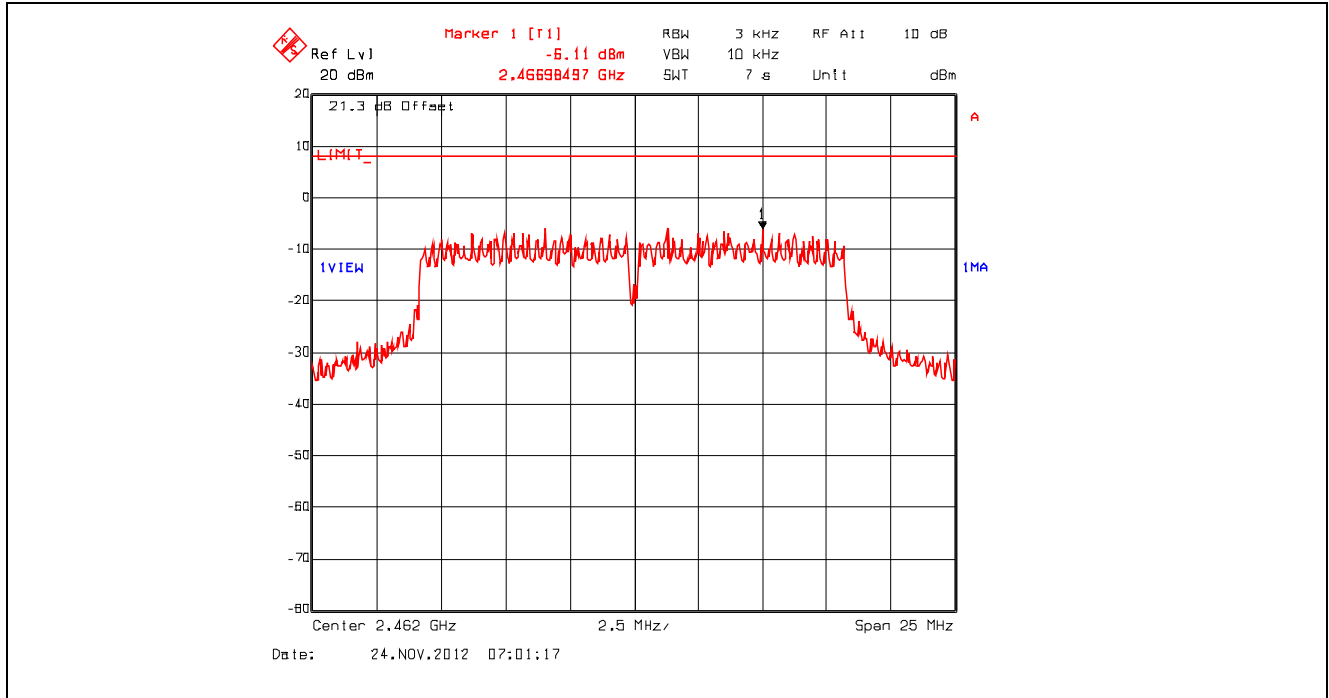


Plot 5.6.4.22. Power Spectral Density, 802.11n 800ns, 6.5 Mbps BPSK1/2, 2412 MHz, Setting 23

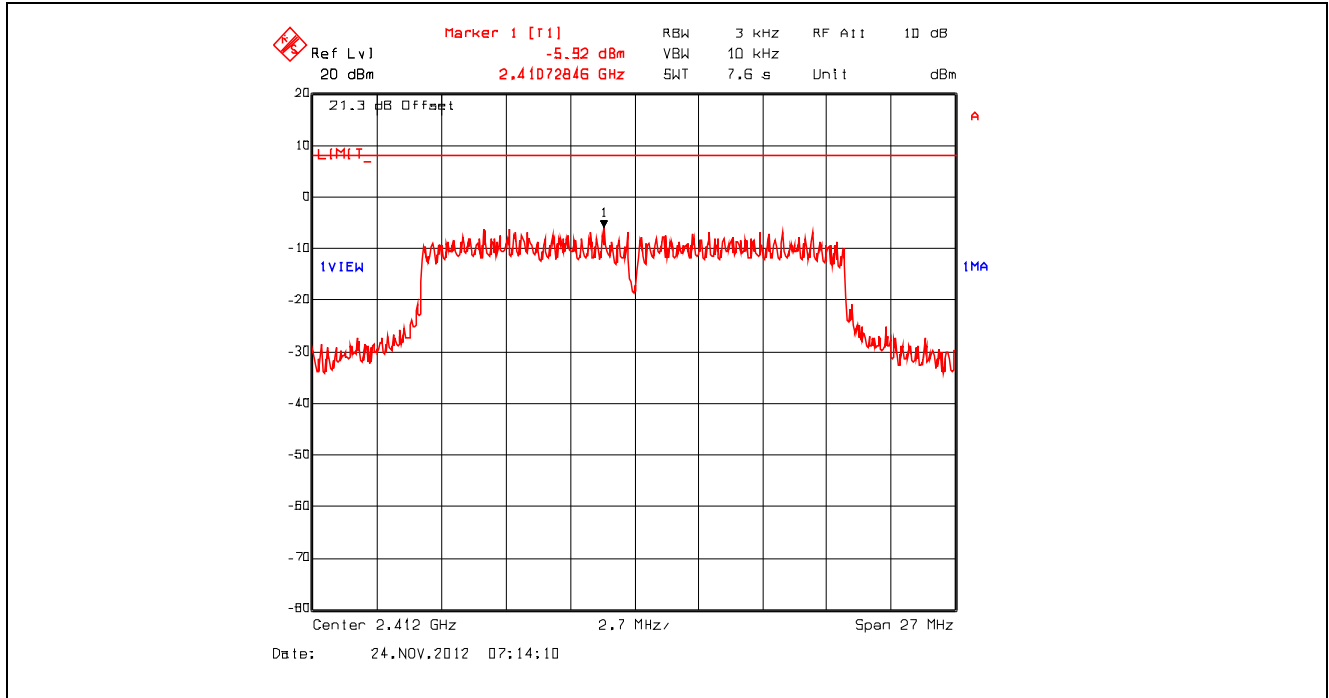


Plot 5.6.4.23. Power Spectral Density, 802.11n 800ns, 6.5 Mbps BPSK1/2, 2442 MHz, Setting 23

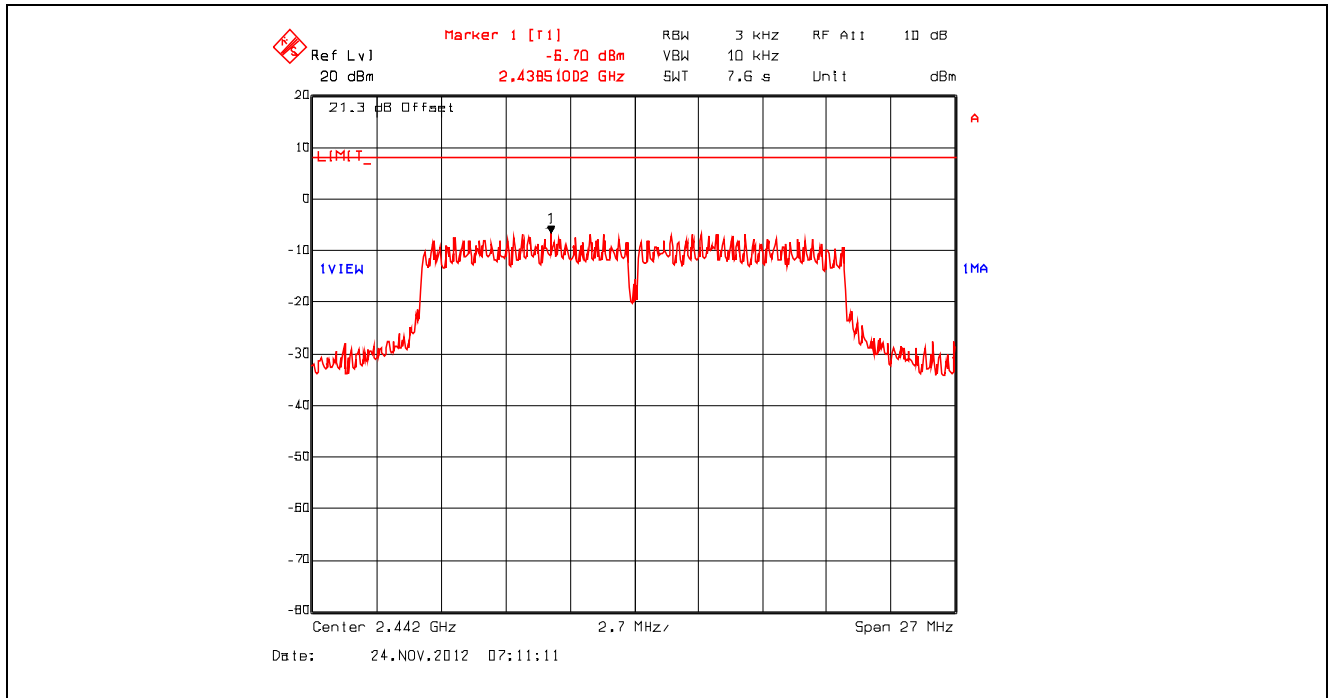

Plot 5.6.4.24. Power Spectral Density, 802.11n 800ns, 6.5 Mbps BPSK1/2, 2462 MHz, Setting 23

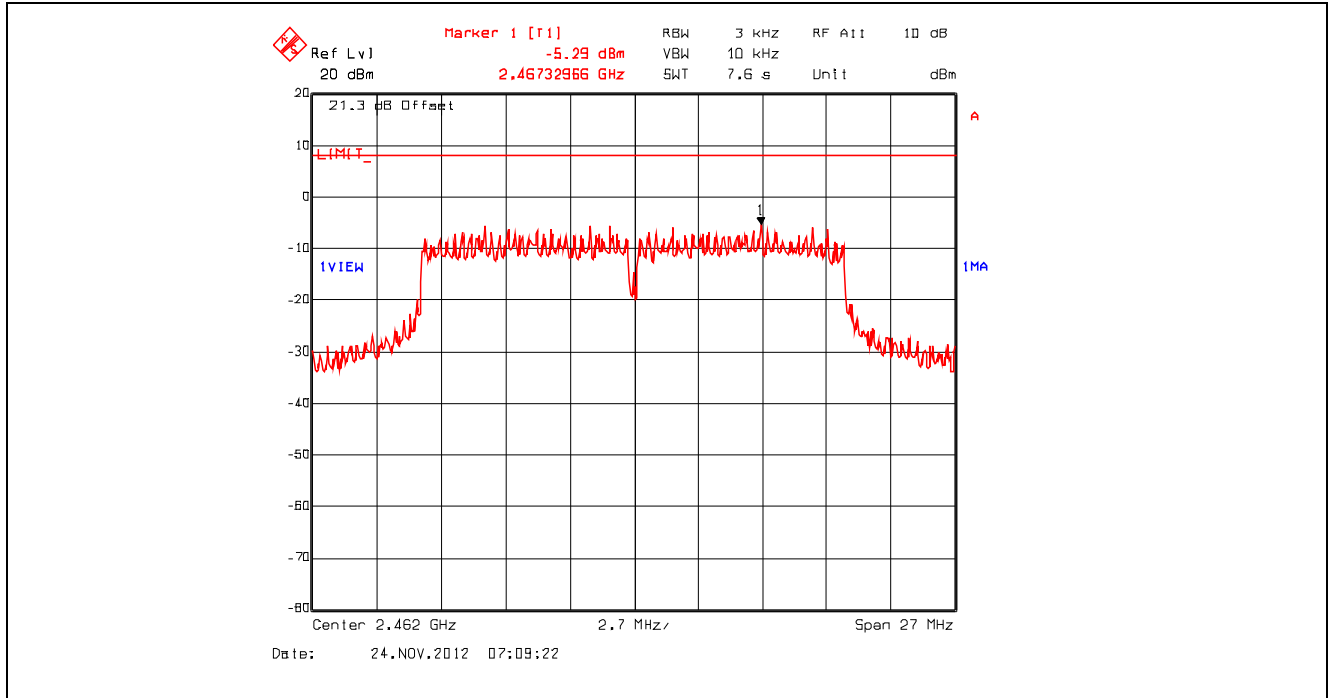


Plot 5.6.4.25. Power Spectral Density, 802.11n 800ns, 19.5 Mbps QPSK 3/4, 2412 MHz, Setting 23

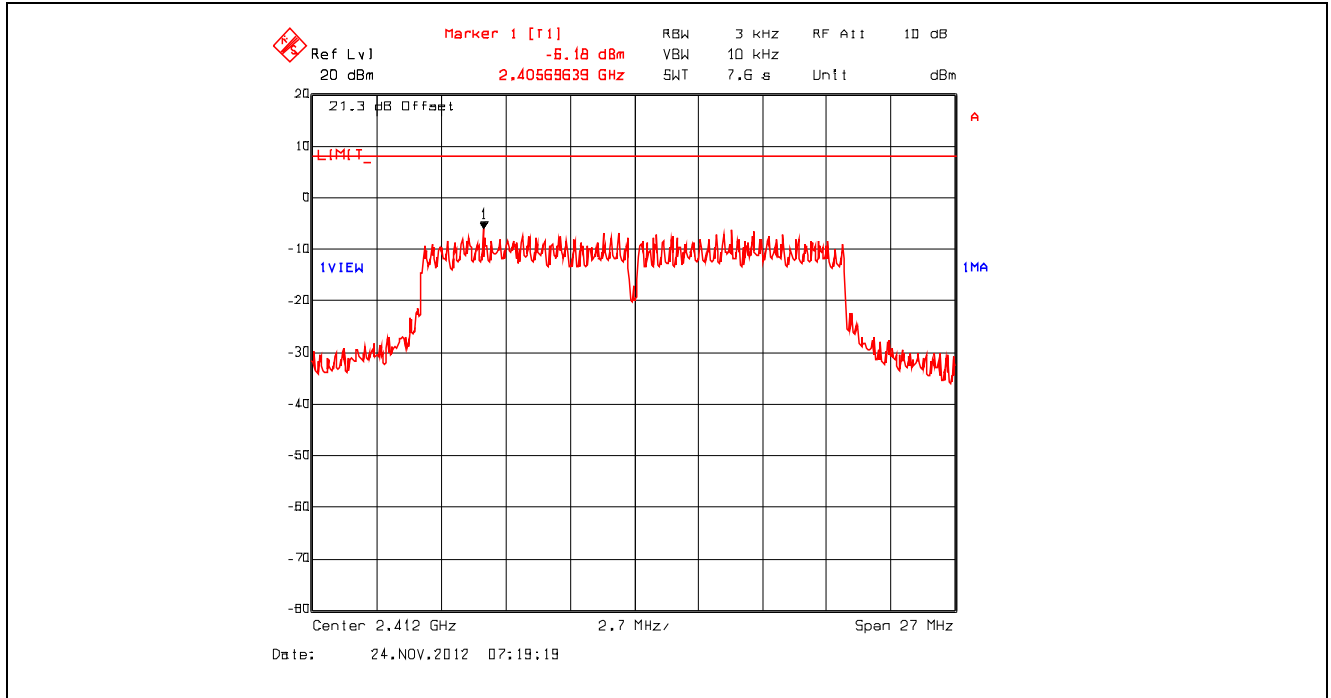





Plot 5.6.4.26. Power Spectral Density, 802.11n 800ns, 19.5 Mbps QPSK 3/4, 2442 MHz, Setting 23

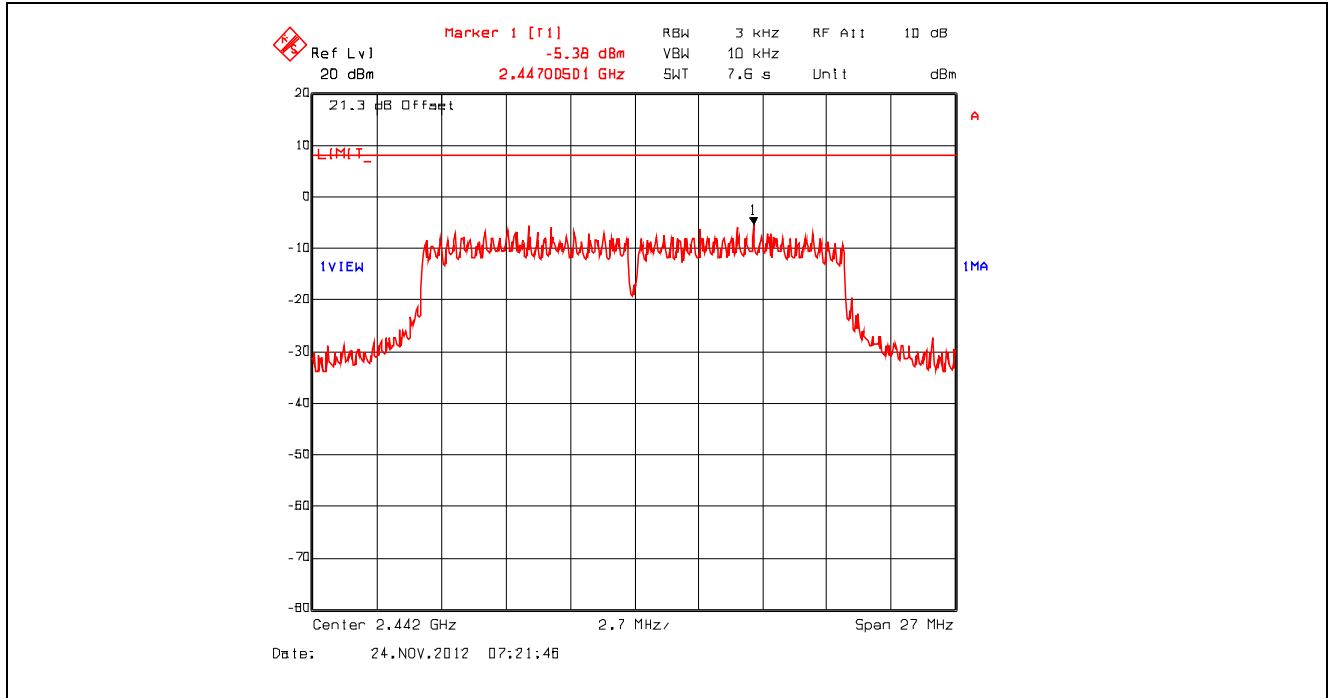


Plot 5.6.4.27. Power Spectral Density, 802.11n 800ns, 19.5 Mbps QPSK 3/4, 2462 MHz, Setting 23

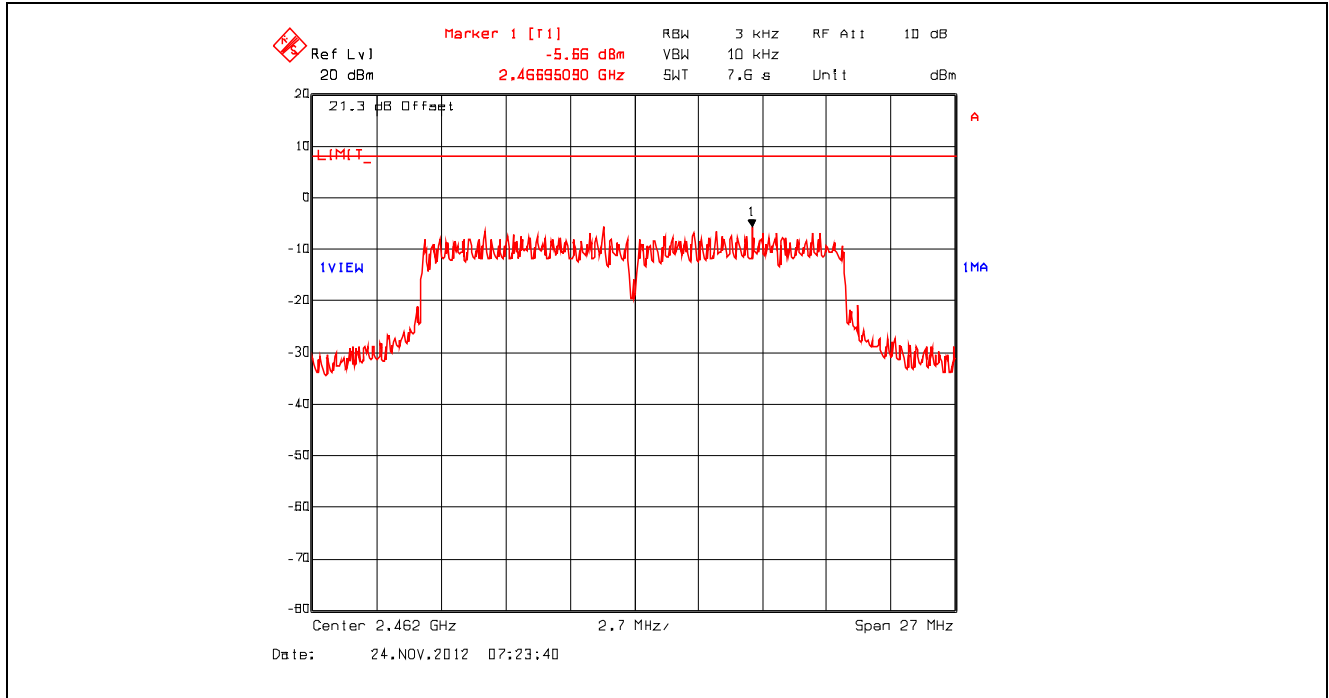


Plot 5.6.4.28. Power Spectral Density, 802.11n 800ns, 39 Mbps 16-QAM 3/4, 2412 MHz, Setting 23

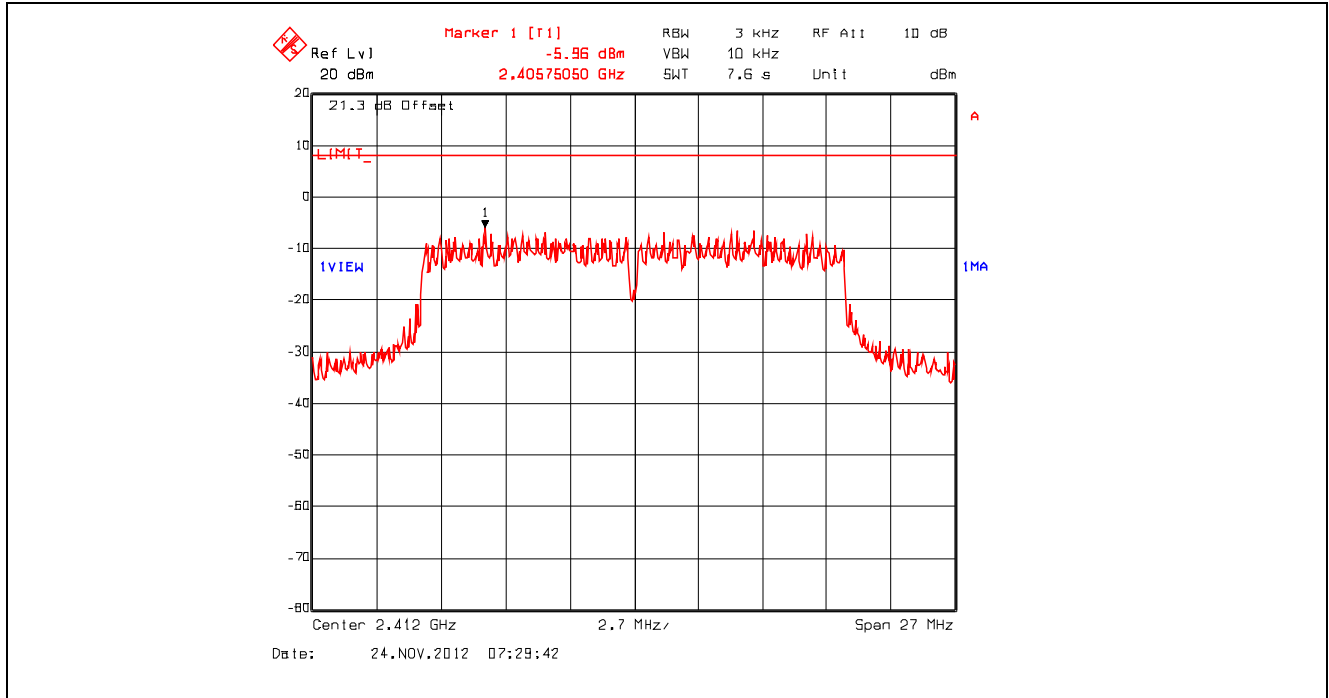


Plot 5.6.4.29. Power Spectral Density, 802.11n 800ns, 39 Mbps 16-QAM 3/4, 2442 MHz, Setting 23

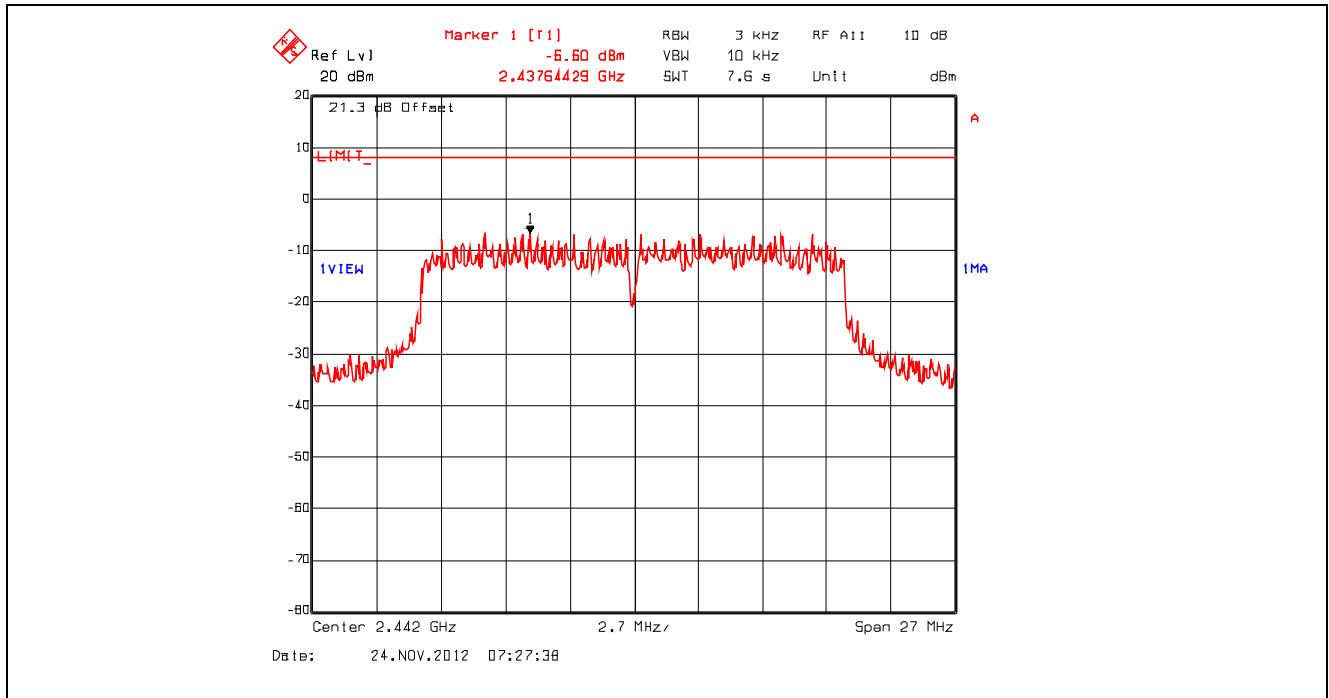


Plot 5.6.4.30. Power Spectral Density, 802.11n 800ns, 39 Mbps 16-QAM 3/4, 2462 MHz, Setting 23

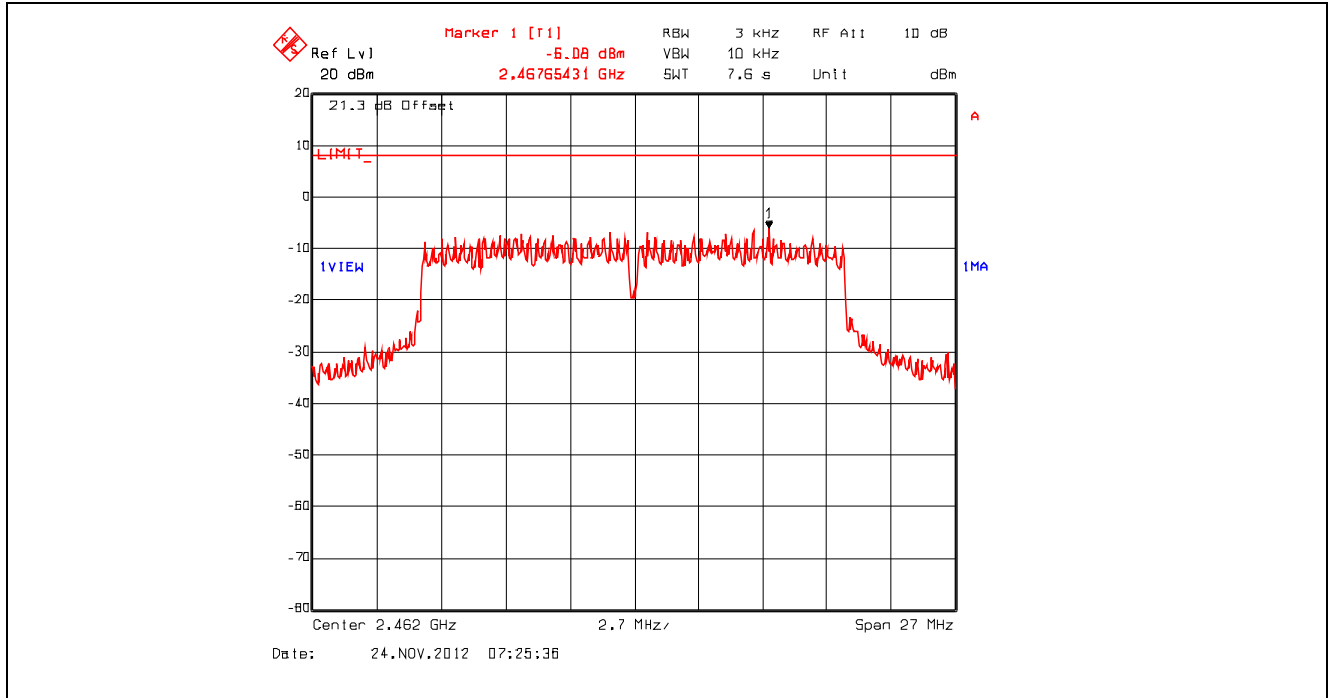


Plot 5.6.4.31. Power Spectral Density, 802.11n 800ns, 65 Mbps 64-QAM 5/6, 2412 MHz, Setting 23

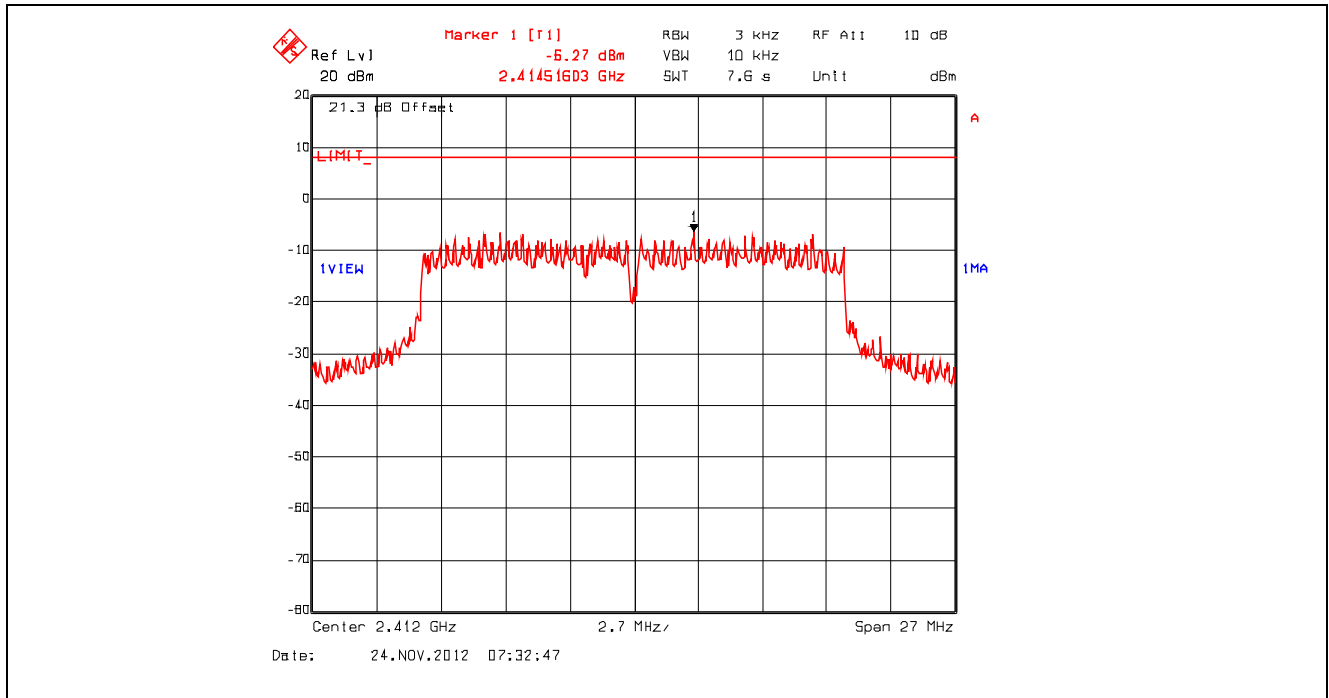


Plot 5.6.4.32. Power Spectral Density, 802.11n 800ns, 65 Mbps 64-QAM 5/6, 2442 MHz, Setting 23

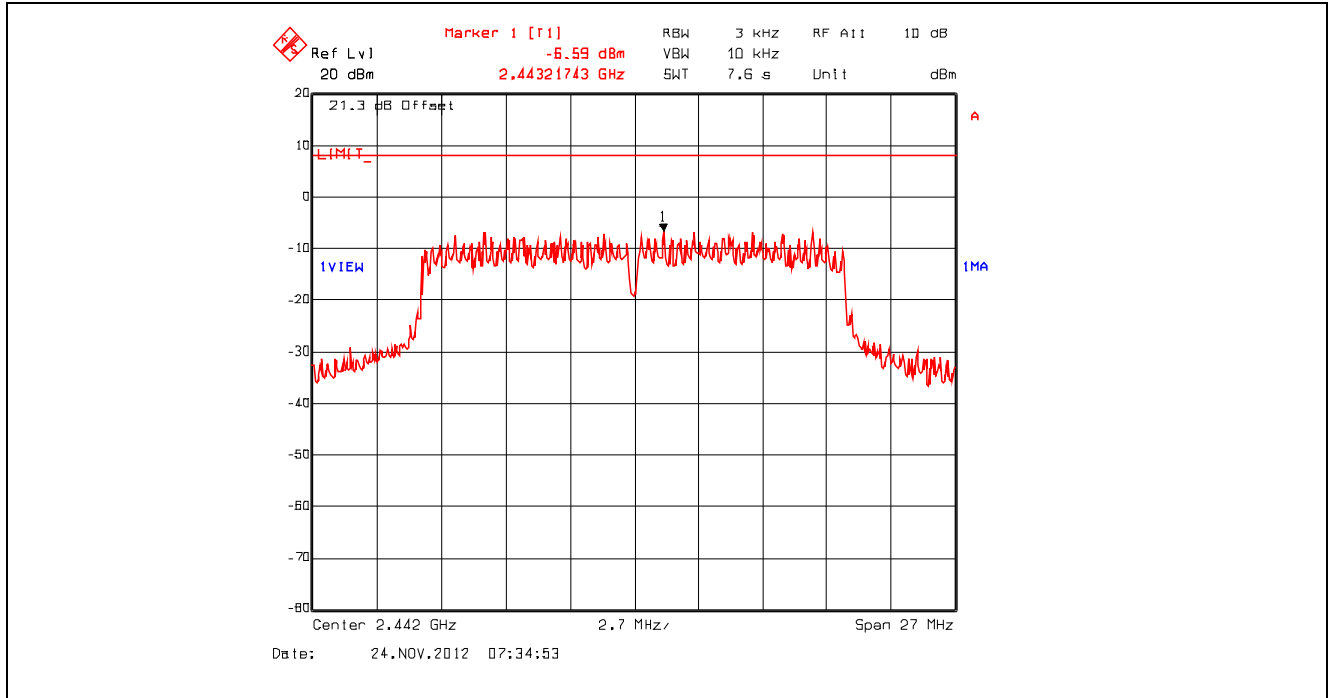


Plot 5.6.4.33. Power Spectral Density, 802.11n 800ns, 65 Mbps 64-QAM 5/6, 2462 MHz, Setting 23

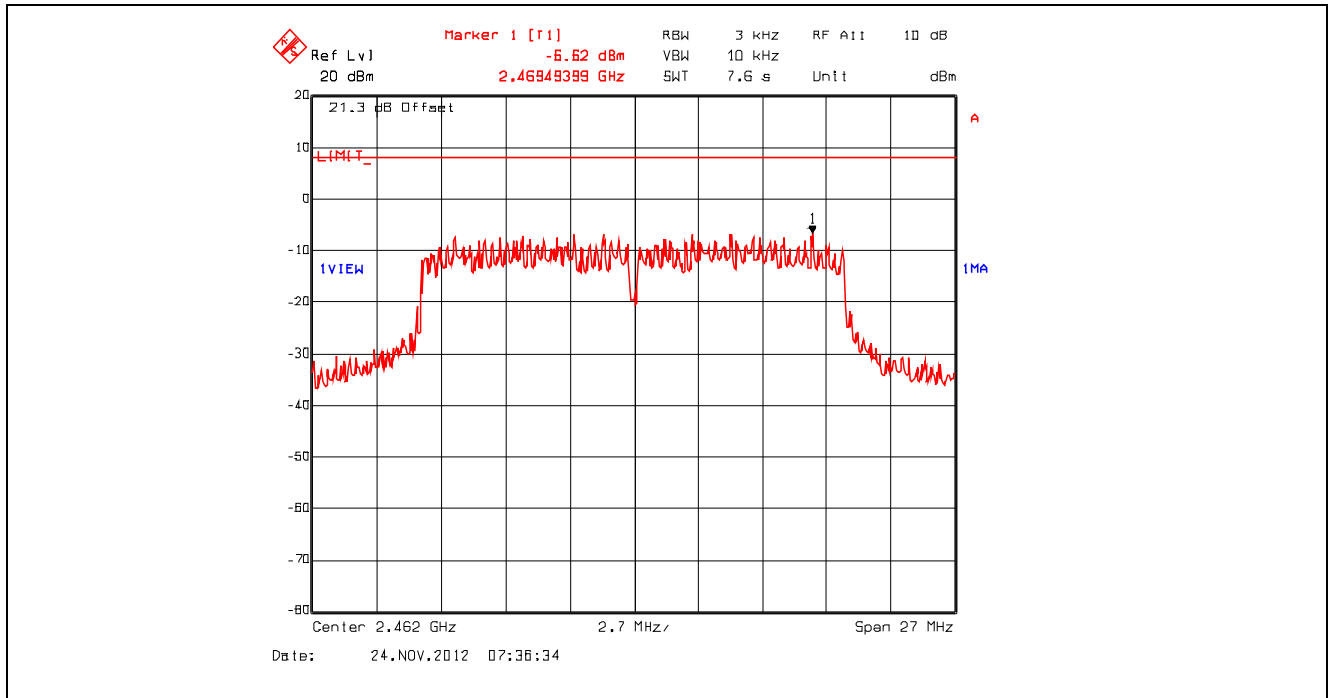


Plot 5.6.4.34. Power Spectral Density, 802.11n 400ns, 7.2 Mbps BPSK1/2, 2412 MHz, Setting 23

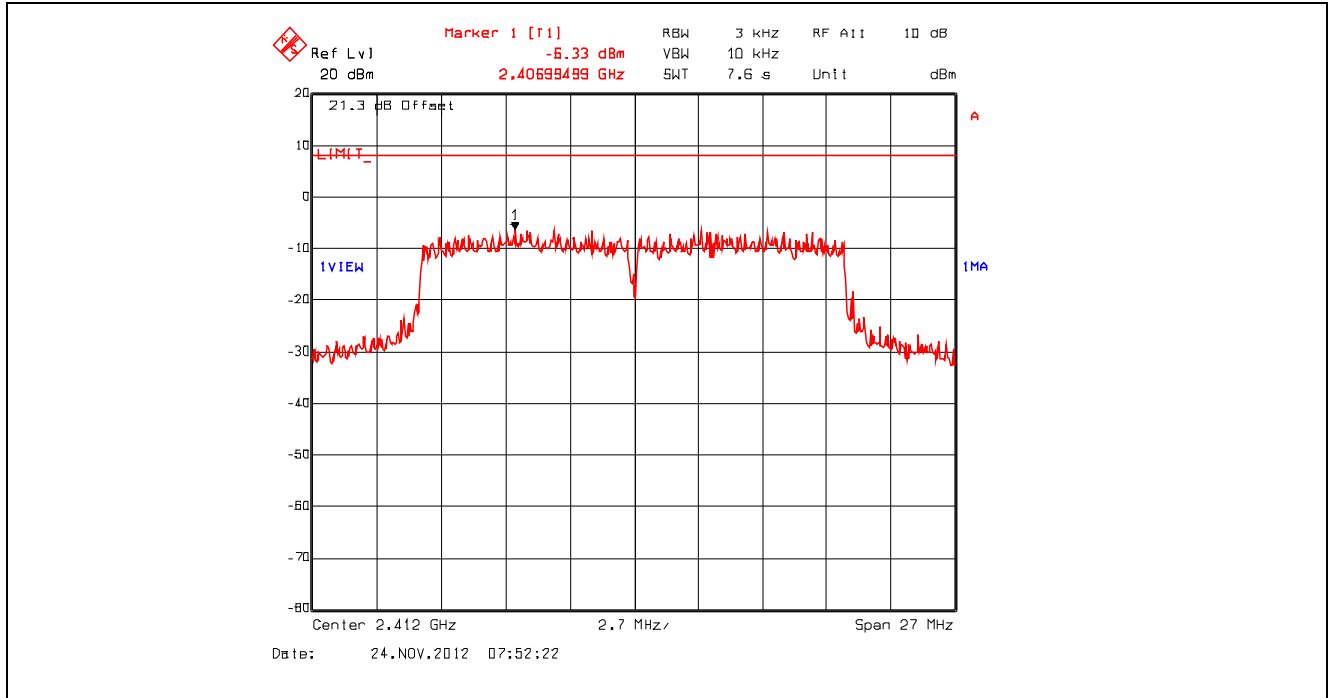


Plot 5.6.4.35. Power Spectral Density, 802.11n 400ns, 7.2 Mbps BPSK1/2, 2442 MHz, Setting 23

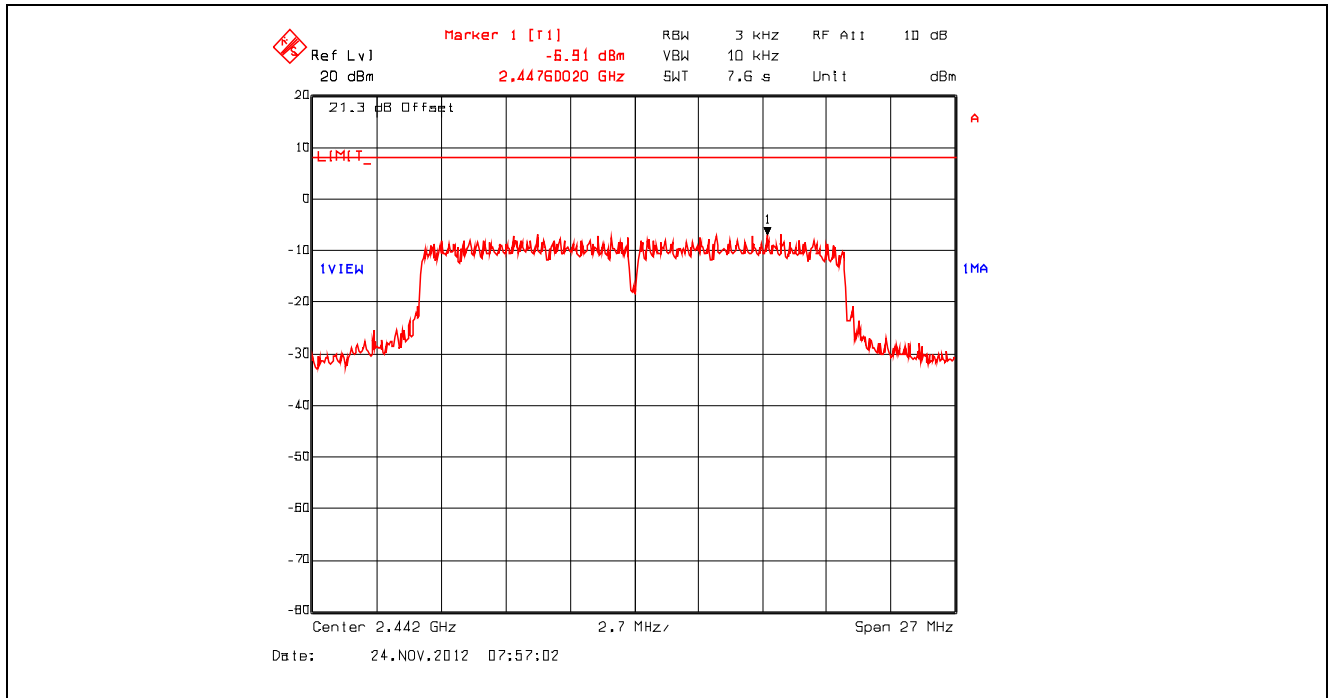


Plot 5.6.4.36. Power Spectral Density, 802.11n 400ns, 7.2 Mbps BPSK1/2, 2462 MHz, Setting 23

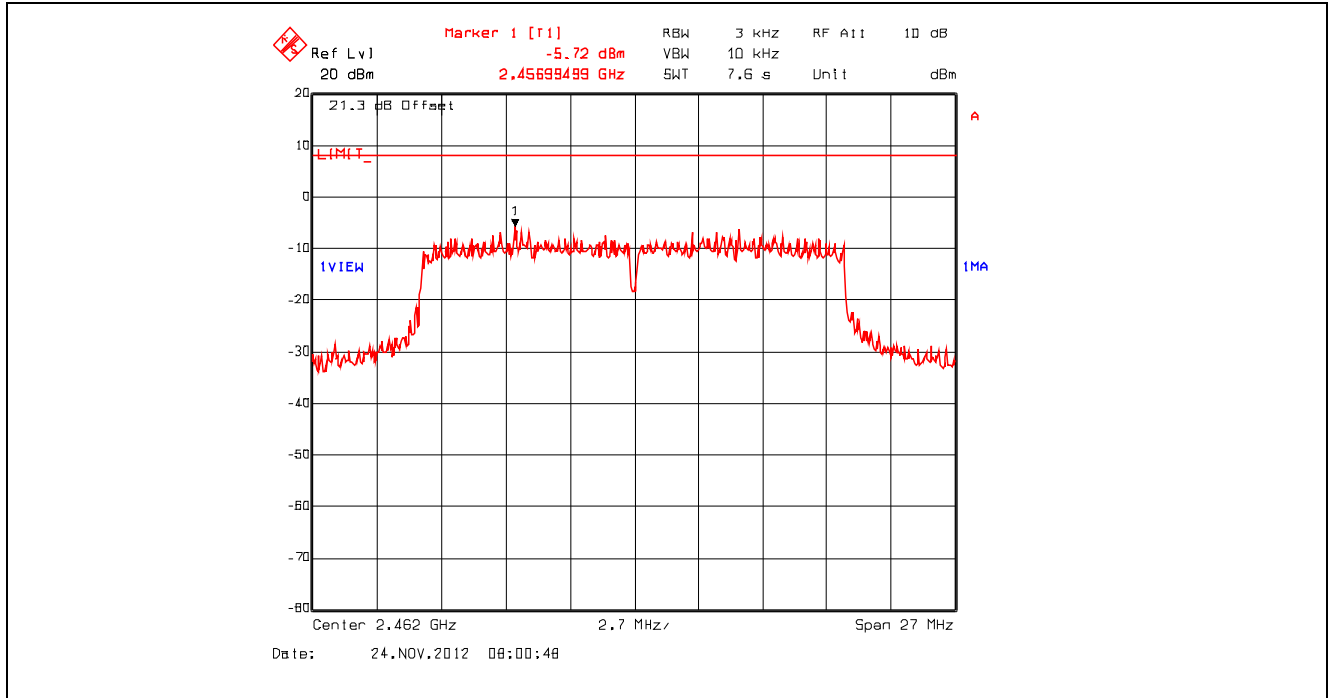


Plot 5.6.4.37. Power Spectral Density, 802.11n 400ns, 21.7 Mbps QPSK 3/4, 2412 MHz, Setting 23

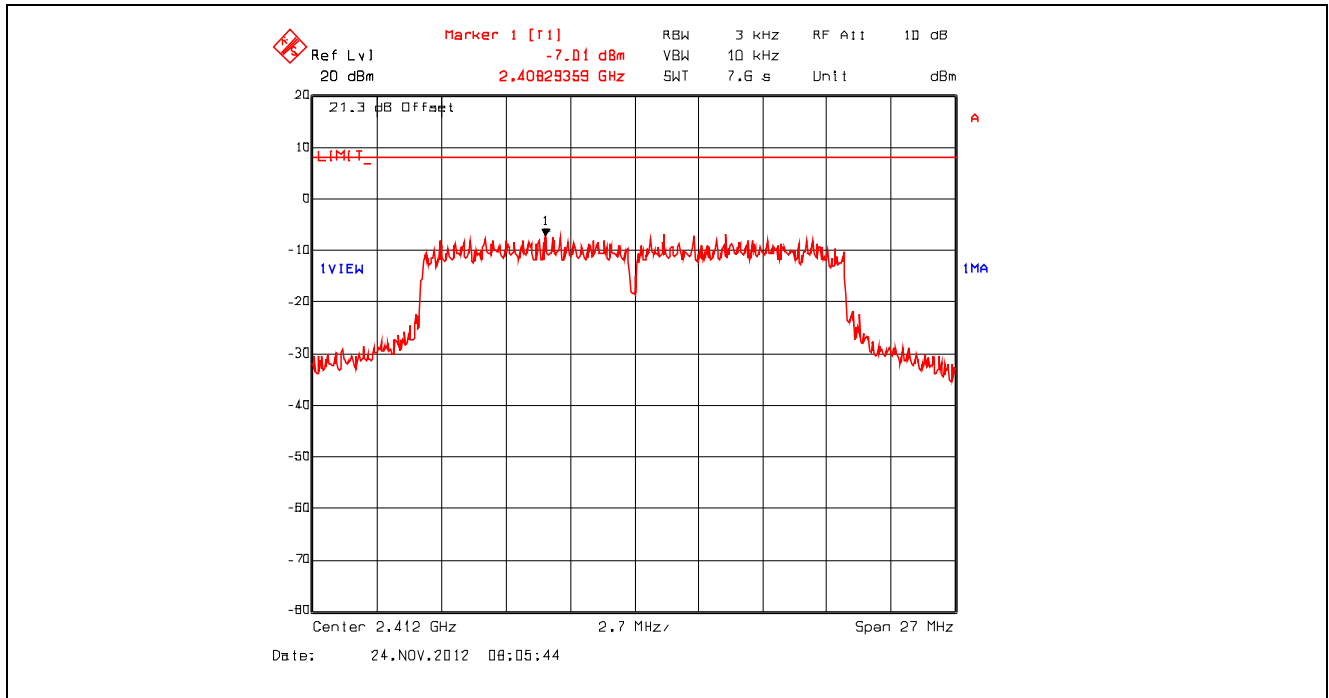


Plot 5.6.4.38. Power Spectral Density, 802.11n 400ns, 21.7 Mbps QPSK 3/4, 2442 MHz, Setting 23

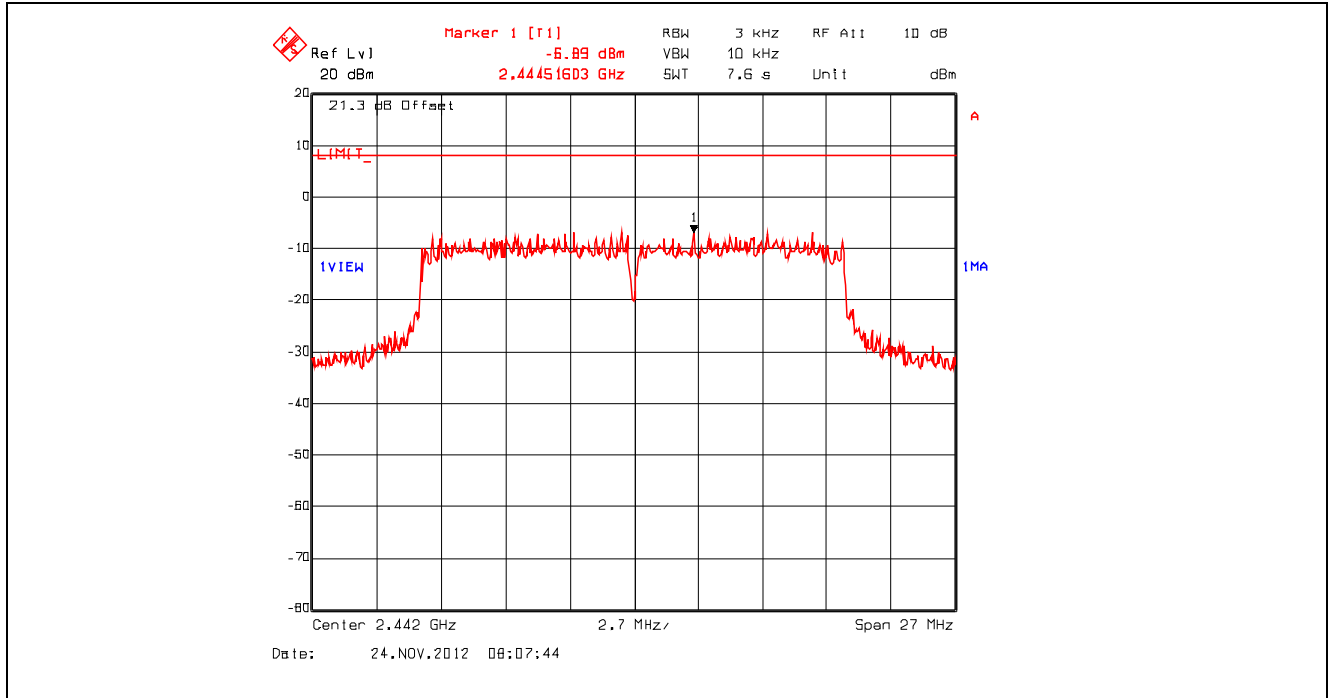


Plot 5.6.4.39. Power Spectral Density, 802.11n 400ns, 21.7 Mbps QPSK 3/4, 2462 MHz, Setting 23

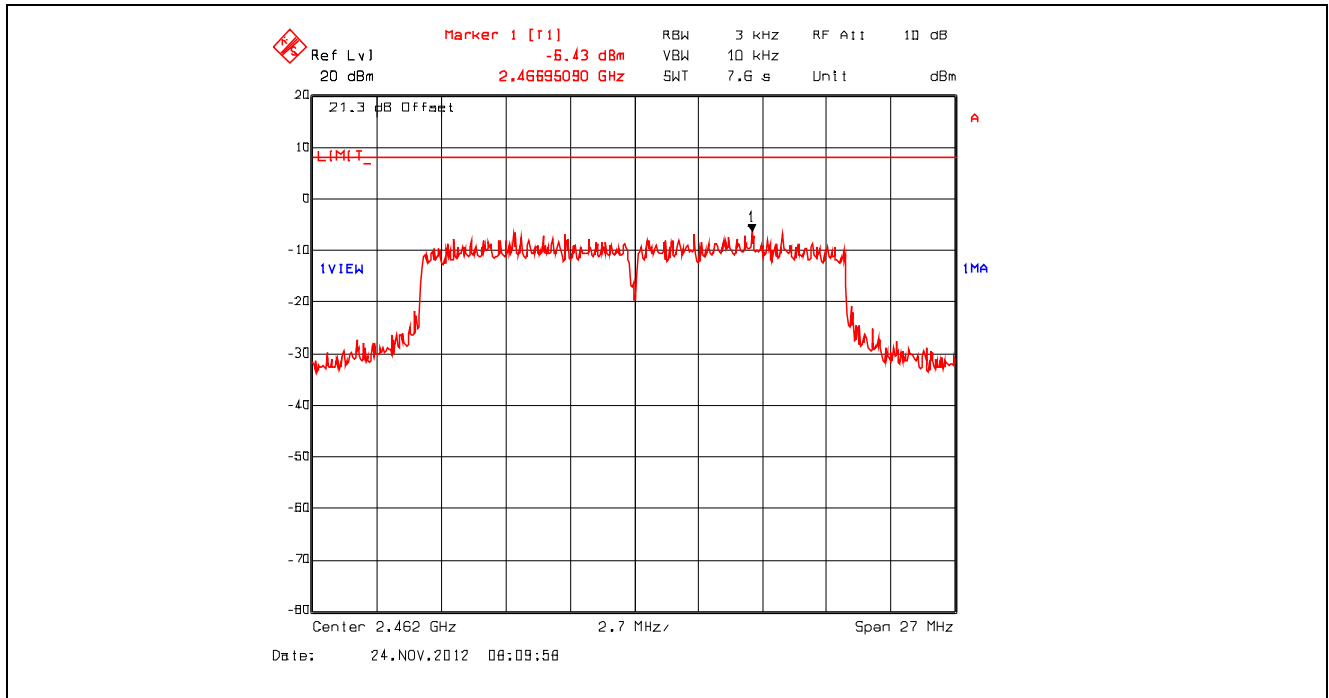

Plot 5.6.4.40. Power Spectral Density, 802.11n 400ns, 43.3 Mbps 16-QAM 3/4, 2412 MHz, Setting 23

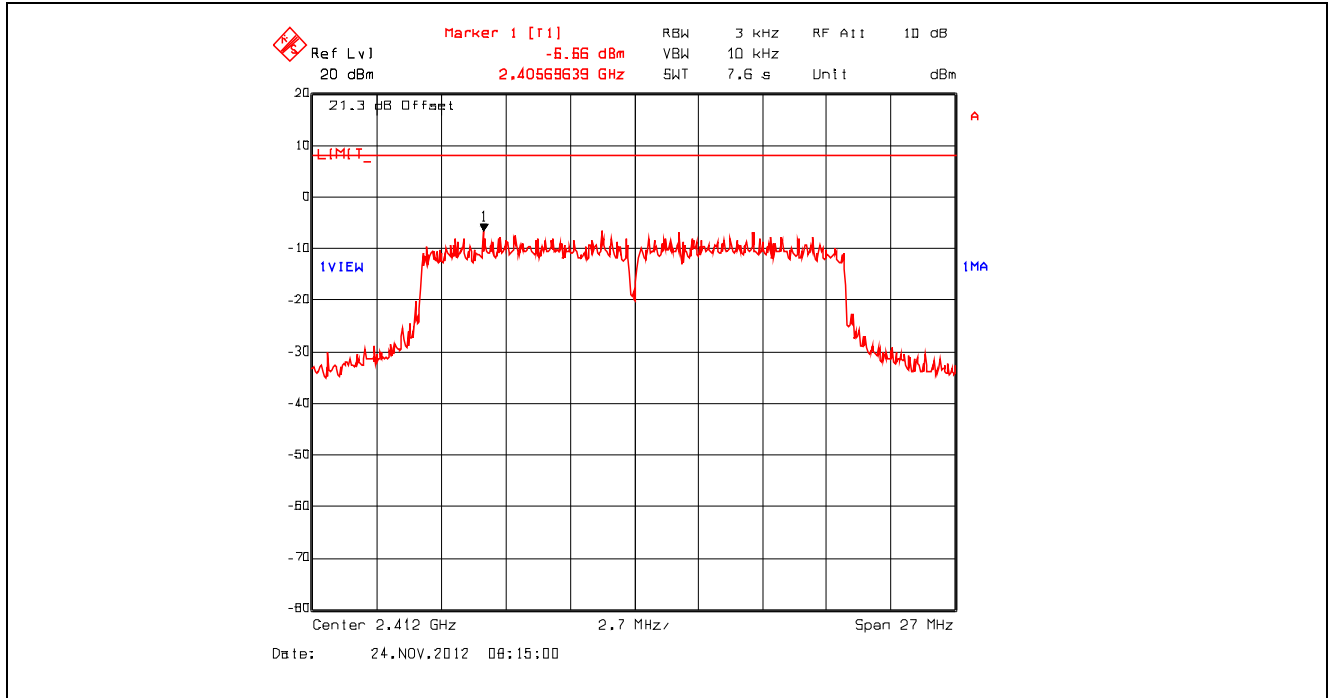


Plot 5.6.4.41. Power Spectral Density, 802.11n 400ns, 43.3 Mbps 16-QAM 3/4, 2442 MHz, Setting 23

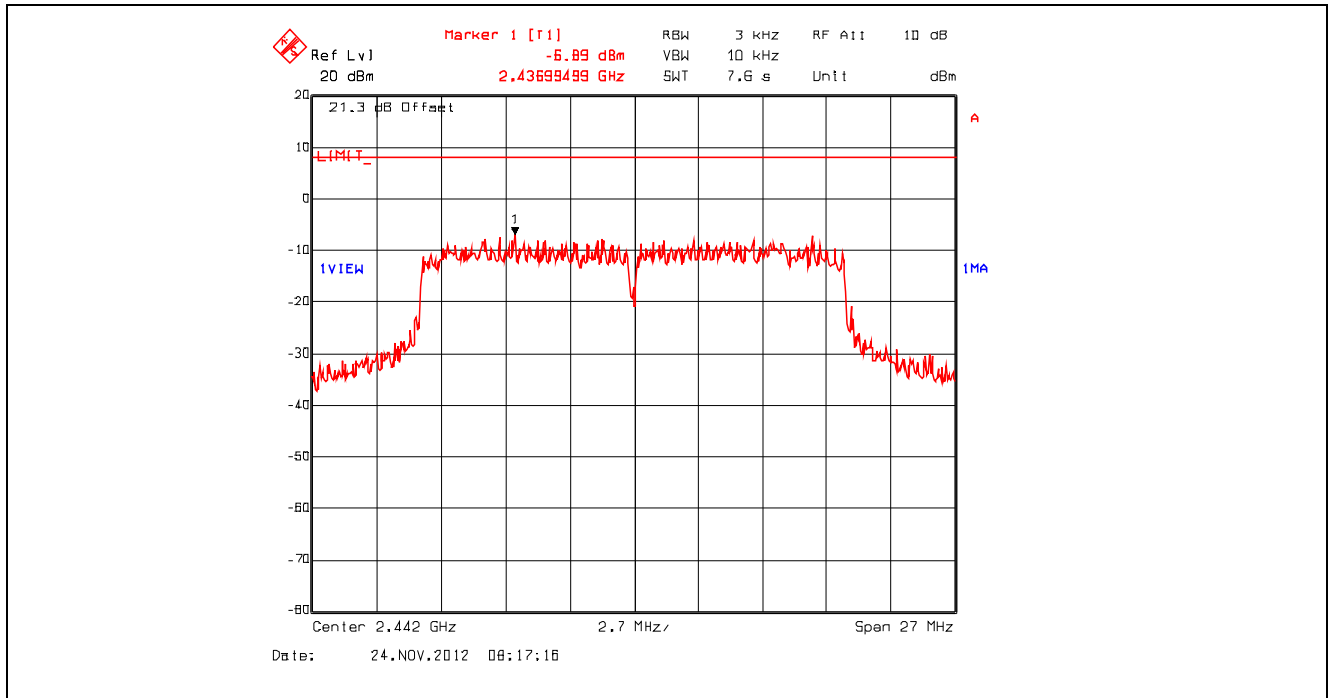





Plot 5.6.4.42. Power Spectral Density, 802.11n 400ns, 43.3 Mbps 16-QAM 3/4, 2462 MHz, Setting 23

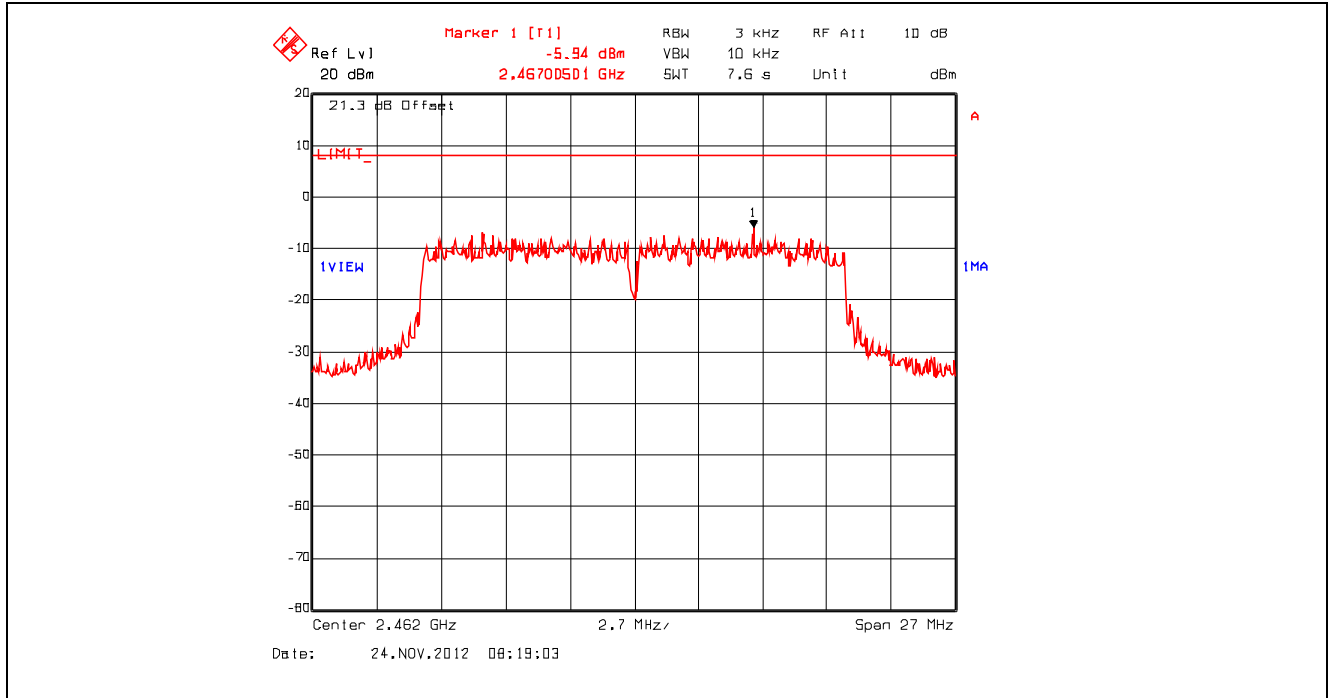


Plot 5.6.4.43. Power Spectral Density, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6, 2412 MHz, Setting 23

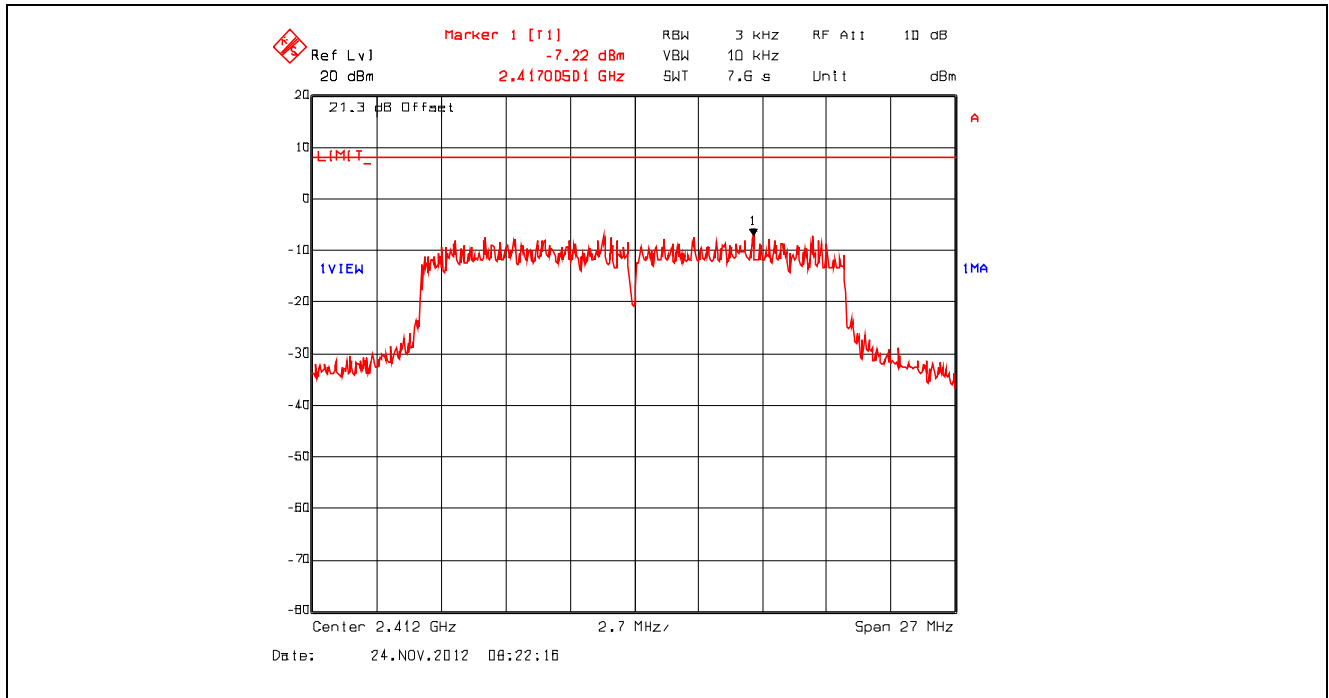

Plot 5.6.4.44. Power Spectral Density, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6, 2442 MHz, Setting 23

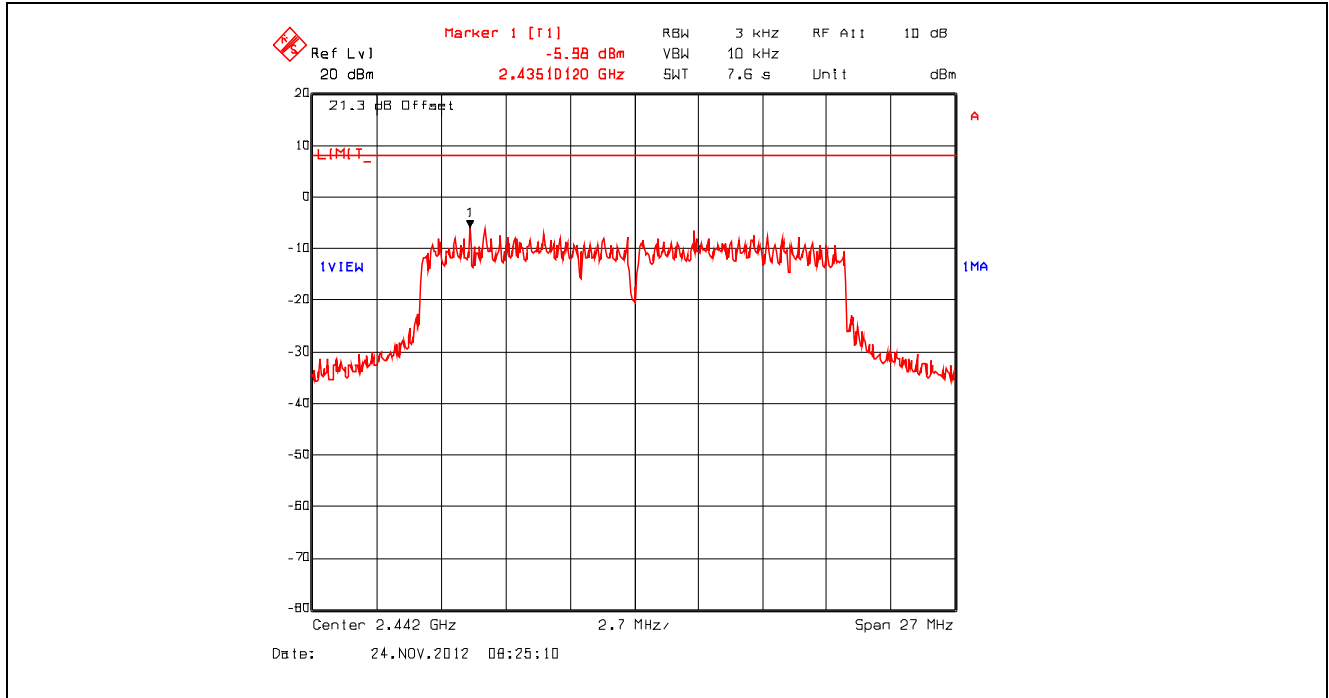

Plot 5.6.4.45. Power Spectral Density, 802.11n 400ns, 72.2 Mbps 64-QAM 5/6, 2462 MHz, Setting 23

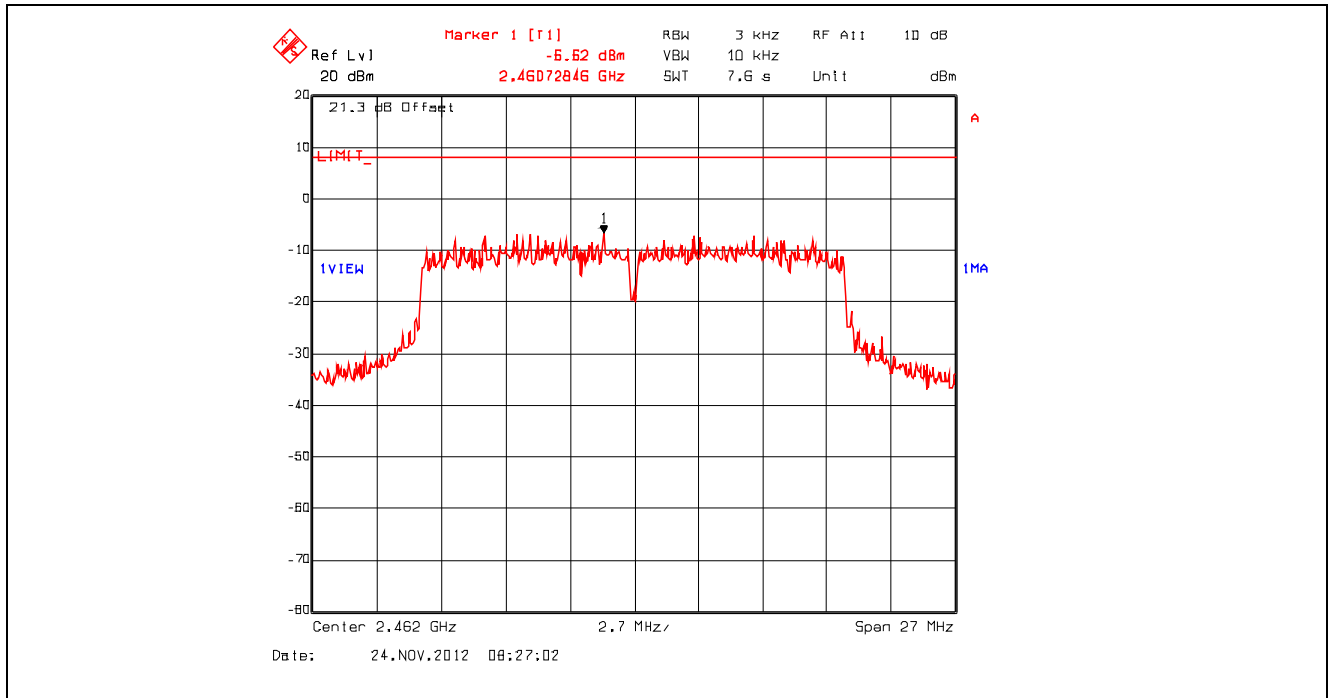

**5.7. RF EXPOSURE REQUIRMENTS [§§ 15.247(e)(i), 1.1310 & 2.1091]**

The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation.

**FCC 47 CFR § 1.1310:**

**TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

**5.7.1. Method of Measurements**

Refer to Sections 1.1310, 2.1091

In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:

- (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
- (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
- (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
- (4) Any other RF exposure related issues that may affect MPE compliance

**Calculation Method of RF Safety Distance:**

$$S = \frac{P \cdot G}{4 \cdot \pi \cdot r^2} = \frac{EIRP}{4 \cdot \pi \cdot r^2}$$

Where: P: power input to the antenna in mW  
 EIRP: Equivalent (effective) isotropic radiated power  
 S: power density mW/cm<sup>2</sup>  
 G: numeric gain of antenna relative to isotropic radiator  
 r: distance to centre of radiation in cm

**5.7.2. RF Evaluation**

Evaluation of RF Exposure Compliance Requirements	
RF Exposure Requirements	Compliance with FCC Rules
Minimum calculated separation distance between antenna and persons required: <b>*17.8 cm</b>	Manufacturer’ instruction for separation distance between antenna and persons required: <b>20 cm minimum</b>
Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement	Antenna installation and device operating instructions shall be provided to installers to maintain and ensure compliance with RF exposure requirements.
Caution statements and/or warning labels that are necessary in order to comply with the exposure limits	Refer to user’s manual for RF exposure Information.
Any other RF exposure related issues that may affect MPE compliance	None.

\*The minimum separation distance between the antenna and bodies of users are calculated using the following formula:

$$r = \sqrt{\frac{P \cdot G}{4 \cdot \pi \cdot S}} = \sqrt{\frac{EIRP}{4 \cdot \pi \cdot S}}$$

S = 1.0 mW/cm<sup>2</sup>  
 EIRP = 36 dBm = 10<sup>(36/10)</sup> mW = 3981 mW (Worst Case)

$$\text{(Minimum Safe Distance, r)} = \sqrt{\frac{EIRP}{4 \cdot \pi \cdot S}} = \sqrt{\frac{3981}{4 \cdot \pi \cdot (1.0)}} \approx 17.8\text{cm}$$

**EXHIBIT 6. TEST EQUIPMENT LIST**

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Cal. Due Date
Spectrum Analyzer	Agilent	E7401A	US40240432	9 kHz–1.5 GHz	1 May 2013
Attenuator	Pasternack	PE7010-20	-	DC–2 GHz	9 Jan 2013
L.I.S.N	EMCO	3825/2	8907-1531	10 kHz -100 MHz	5 Apr 2013
Attenuator	Pasternack	PE7024-20	6	DC–26.5 GHz	Cal on use
DC Block	Hewlett Packard	11742A	12460	0.045–26.5 GHz	Cal on use
Spectrum Analyzer	Rohde & Schwarz	FSEK30	100077	20Hz–40 GHz	02 Nov 2013
Attenuator	Pasternack	PE7024-10	4	DC–26.5 GHz	Cal on use
Band Reject Filter	Micro-Tronics	BRM50701	105	Cut off 2.4-2.483 GHz	Cal on use
High Pass Filter	K & L	11SH10- 4000/T12000	4	Cut off 2400 MHz	Cal on use
Spectrum Analyzer	Rohde & Schwarz	ESU40	100033	20 Hz – 40 GHz	19 Mar 2013
RF Amplifier	Hewlett Packard	84498	3008A00769	1 – 26.5 GHz	6 Aug 2013
RF Amplifier	AH System	PAM-0118	225	20 MHz – 18 GHz	16 Mar 2013
Biconi-Log Antenna	ETS Lindgren	3142B	1575	26 – 3000 MHz	4 May 2013
Horn Antenna	EMCO	3155	6570	1 – 18 GHz	2 Apr 2013
Horn Antenna	EMCO	3160-09	118385	18 – 26.5 GHz	30 July 2014

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: DIGI-070F15C247  
 December 17, 2012

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

**EXHIBIT 7. MEASUREMENT UNCERTAINTY**

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

**7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY**

	Line Conducted Emission Measurement Uncertainty (150 kHz – 30 MHz):	Measured	Limit
<b>u<sub>c</sub></b>	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	<b>± 1.57</b>	<b>± 1.8</b>
<b>U</b>	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	<b>± 3.14</b>	<b>± 3.6</b>

**7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY**

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
<b>u<sub>c</sub></b>	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	<b>± 2.15</b>	<b>± 2.6</b>
<b>U</b>	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	<b>± 4.30</b>	<b>± 5.2</b>

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
<b>u<sub>c</sub></b>	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	<b>± 2.39</b>	<b>± 2.6</b>
<b>U</b>	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	<b>± 4.78</b>	<b>± 5.2</b>

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
<b>u<sub>c</sub></b>	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	<b>± 1.87</b>	Under consideration
<b>U</b>	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	<b>± 3.75</b>	Under consideration

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: DIGI-070F15C247  
 December 17, 2012

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*