



REGULATORY COMPLIANCE TEST REPORT

FCC CFR 47 Part 15 Subpart C 15.247 & ISED RSS-247

Report No.: DIGI125-U2 Rev A

Company: Digi Inc

Model Name: XR 900

REGULATORY COMPLIANCE TEST REPORT

Company Name: Digi Inc

Model Name: XR 900

To: FCC CFR 47 Part 15 Subpart C 15.247 & ISED RSS-247

Test Report Serial No.: DIGI125-U2 Rev A

This report supersedes: NONE

Applicant: Digi Inc
9350 Excelsior Blvd.
Hopkins, MN 55343
USA

Issue Date: 24th August 2024

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. TESTING ACCREDITATION	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s).....	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	13
5.6. Test Configurations	13
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S).....	16
7.1. Radiated	16
7.2. Conducted Test Setup	19
8. MEASUREMENT AND PRESENTATION OF TEST DATA.....	21
9. TEST RESULTS.....	22
9.1. 20 dB & 99% Bandwidth	22
9.2. Frequency Hopping Tests	25
9.2.1. Number of Hopping Channels	26
9.2.2. Channel Separation.....	28
9.2.3. Channel Occupancy & Dwell Time	30
9.3. Output Power	32
9.4. Emissions	36
9.4.1. Conducted Emissions.....	36
9.4.1.1. Conducted Unwanted Spurious Emissions	37
9.4.1.2. Conducted Band-Edge Emissions	39
9.4.2. Radiated Emissions.....	47
9.4.2.3. TX Spurious & Restricted Band Emissions	49
FSK 10 kbps	49
GFSK 200kbps	56
A. APPENDIX - GRAPHICAL IMAGES.....	65
A.1. 20 dB & 99% Bandwidth	66
A.2. Frequency Hopping Tests.....	72
A.2.1. Number of Hopping Channels.....	72
A.2.2. Channel Separation	78
A.2.3. Dwell Time.....	80
A.2.4. Channel Occupancy.....	82
A.3. Emissions.....	84
A.3.1. Conducted Emissions	84
A.3.1.1. Conducted Unwanted Spurious Emissions	84
A.3.1.2. Conducted Band-Edge Emissions.....	90

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 28th day of February 2024.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2025

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

1.2. RECOGNITION

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM Labs test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Firm Designation#: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 ISED#: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA 2	NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB – Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body

AB – Approved Body

MRA – Mutual Recognition Agreement

MRA Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



Accredited Product Certification Body

A2LA has accredited

MiCOM LABS

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 Requirements for bodies certifying products, processes and services. This product certification body also meets the A2LA R322 – Specific Requirements – Notified Body Accreditation Requirements and A2LA R308 - Specific Requirements - ISO-IEC 17065 - Telecommunication Certification Body Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.



Presented this 28th day of February 2024.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2025

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
UK – Approved Body (AB), AB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	17 th August 2024	Draft Comments Additional two operating modes added to the device, see Section 5.2 Scope of Test Program Original Test Program: Ultratech Group of Labs Report #: 24MCRS201_FCC15C247 Dated March 27 th 2024
Rev A	24 th August 2024	Initial Release

In the above table the latest report revision will replace all earlier versions.

3. TEST RESULT CERTIFICATE

Manufacturer: Digi International Inc 9350 Excelsior Blvd. Hopkins MN 55343 USA	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: XB9XR	Telephone: +1 925 462 0304
Type Of Equipment: XR 900	Fax: +1 925 462 0306
S/N's: 001	
Test Date(s): 14 th – 15 th August 2024	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart C 15.247 & ISED RSS-247	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:



Graeme Grieve
Quality Manager MiCOM Labs, Inc.

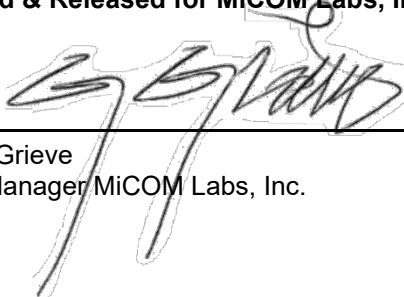

Gordon Hurst
President & CEO MiCOM Labs, Inc.

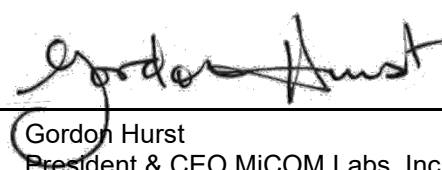

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 558074 D01 v05r02	Apr 2019	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC Rules.
II	A2LA	16th April 2024	R105 - Requirement's When Making Reference to A2LA Accreditation Status
III	ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices
IV	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
V	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VI	FCC 47 CFR Part 15, Subpart B	Nov 2017	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES, SubPart B; Unintentional Radiators
VII	FCC 47 CFR Part 15.247	Apr 2020	Radio Frequency Devices; Subpart C – Intentional Radiators
VIII	FCC Public Notice DA 00-705	Mar 2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
IX	ICES-003	Issue 7; Oct 2020	Information Technology Equipment (Including Digital Apparatus)
X	UKAS M3003	Edition 6 March 2024	The Expression of Uncertainty and Confidence in Measurements
XI	RSS-247 Issue 3	Aug 2023	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XII	RSS-Gen Issue 5	Amendment 1,2 (Feb 2021)	General Requirements for Compliance of Radio Apparatus. With Amendments 1: March 2019 and 2: Feb 2021.
XIII	FCC 47 CFR Part 2.1033	Feb 2023	FCC requirements and rules regarding photographs and test setup diagrams.
XIV	UKAS LAB 12	Edition 4 April 2022	The Expression of Uncertainty in Testing

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Digi International Inc XR 900 to FCC CFR 47 Part 15 Subpart C 15.247 & ISED RSS-247
Applicant:	Digi International Inc 9350 Excelsior Blvd. Hopkins MN 55343 United States of America
Manufacturer:	Digi International Inc
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	DIGI125-U2
Date EUT received:	1 st August 2025
Standard(s) applied:	FCC CFR 47 Part 15 Subpart C 15.247 & ISED RSS-247
Dates of test (from - to):	14 th – 15 th August 2024
No of Units Tested:	1
Product Family Name:	XBee XR 900 MHz 900HP
Model(s):	XB9XR
Location for use:	Both
Declared Frequency Range(s):	902 - 928 MHz;
Type of Modulation:	XR 900
EUT Modes of Operation:	902 - 928 MHz: FSK :10kbps; GFSK : 200kbps;
Declared Nominal Output Power (dBm):	+19
Transmit/Receive Operation:	Transceiver
Rated Input Voltage and Current:	3.3VDC
Operating Temperature Range:	-40°C to +85°C
ITU Emission Designator:	340K1D 409K1D
Equipment Dimensions:	2.199 / 0.305 / 3.4 mm
Weight:	0.0031 Kg
Hardware Rev:	01
Firmware Rev:	8000

5.2. Scope Of Test Program

Digi International Inc XB9XR

The scope of the test program was to test the Digi International Inc XB9XR, XR 900 configurations in the frequency ranges 902 - 928 MHz; for compliance against the following specification:

FCC CFR 47 Part 15 Subpart C 15.247 (FHSS)

Radio Frequency Devices; Subpart C – Intentional Radiators

ISED RSS-247 Issue 2

Digital Transmission Systems (DTs), Frequency Hopping System (FHSs) and License-Exempt Local Area Network (LE-LEN) Devices

Two additional modes were added to the device:

FSK 10 kbps
GFSK 200 kbps

For all additional modes or tests please refer to the original test report:

ULTRATECH GROUP OF LABS Report #: 24MCRS201_FCC15C247 Dated March 27th 2024

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description	Manufacturer	Model No.	Serial No.
EUT	900MHz Radio Module	Digi International	XB9XR	001
Support	Development Board	Digi International	--	--
Support	Laptop	Lenovo	ThinkPad	--

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
external	Laird	A09-Y15 NF FXUB65.07.0180	Yagi	15.1	-	360	-	902 - 928

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# of Ports	Screened	Conn Type	Data Type	Bit Rate	Environment
Antenna	--	1	--	U.FL, RP-SMA	Analog	RF	IndoorOutdoor
Discrete I/O output	--	17	--	module pins	User programmable analog/digital	N/A	IndoorOutdoor
dc	--	1	--	module pins	N/A	N/A	IndoorOutdoor

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power kbp/s	Channel Frequency (MHz)		
		Low	Mid	High
902 - 928 MHz				
FSK 10kbps	10	902.4	914.8	927.6
GFSK 200kbps	200	902.4	914.8	927.6

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

6. TEST SUMMARY

List of Measurements


Test Header	Result	Data Link
20 dB & 99% Bandwidth	Complies	View Data
Frequency Hopping Tests	Complies	-
Number of Hopping Channels	Complies	View Data
Channel Separation & Dwell Time	Complies	View Data
Channel Occupancy	Complies	View Data
Output Power	Complies	View Data
Emissions	Complies	-
(1) Conducted Emissions	Complies	-
(i) Conducted Unwanted Spurious Emissions	Complies	View Data
(ii) Conducted Band-Edge Emissions	Complies	View Data
(2) Radiated Emissions	Complies	-
(i) TX Spurious & Restricted Band Emissions	Complies	View Data

7. TEST EQUIPMENT CONFIGURATION(S)


7.1. Radiated

Radiated emissions above and below 1GHz.

Radiated Emissions Above 1GHz Test Setup

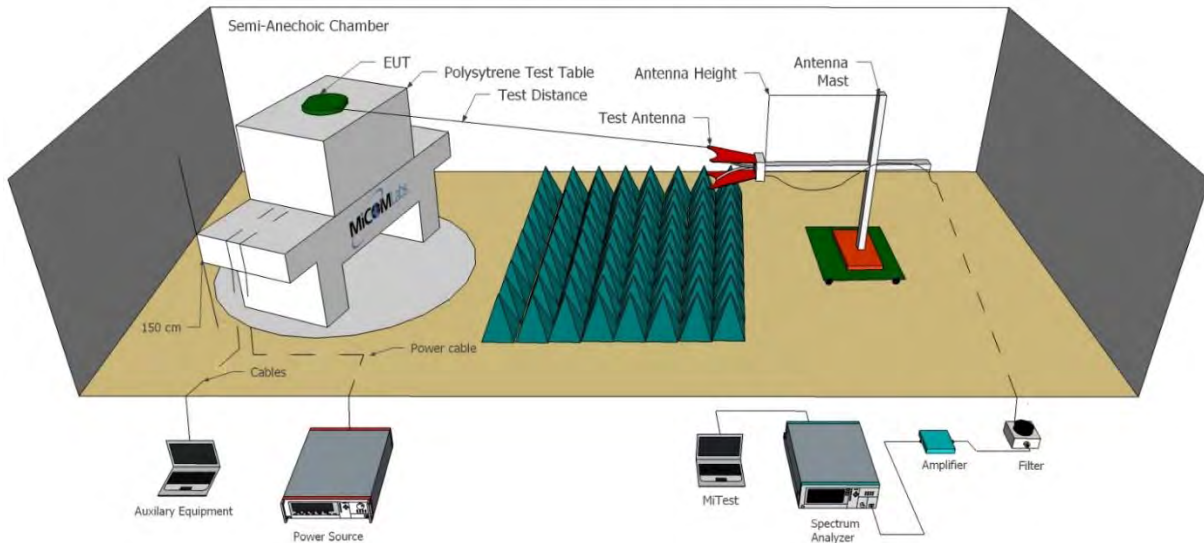

Radiated Emissions Below 1GHz Test Setup

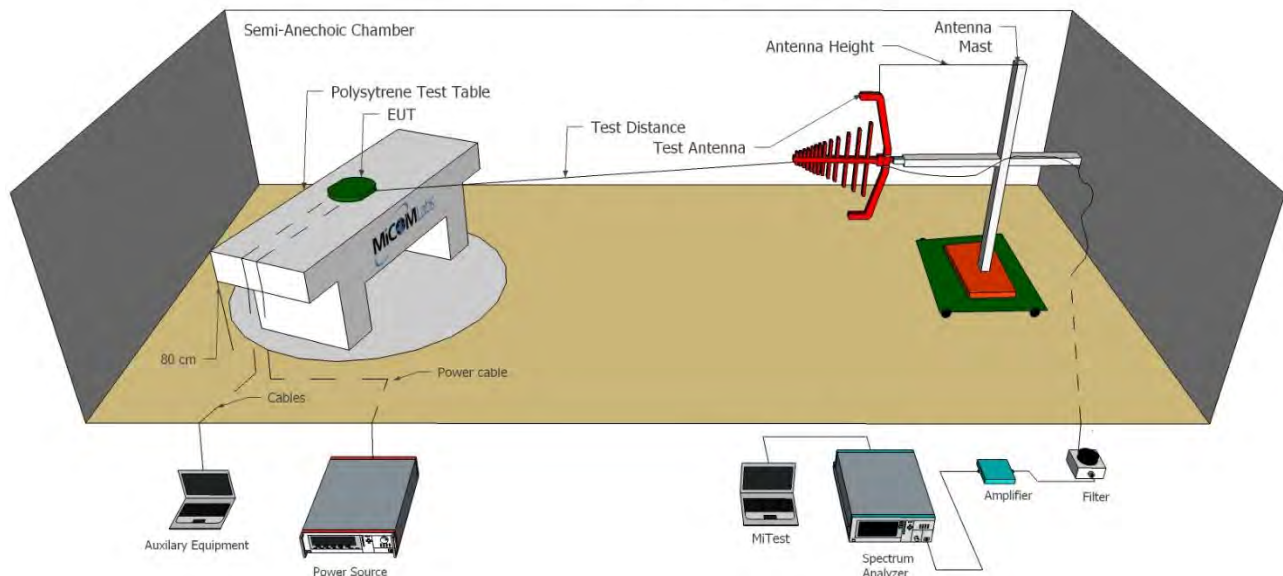


Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
266	10 Hz to 50GHz MXA Signal Analyzer	Keysight	N9020B	MY60110791	25 Jul 2025
285	DC Power Supply	Keysight	E36155A	MY63000156	4 Dec 2024
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	11 Oct 2024
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	7 Dec 2024
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	5 Dec 2024
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	13 Sep 2024
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	13 Sep 2024
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	29 Sep 2024
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	13 Sep 2024
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	13 Sep 2024
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	27 Oct 2024
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	7 Dec 2024
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	2 Nov 2024
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	18 Sep 2024
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	18 Sep 2024
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	16 Sep 2024

465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	14 Sep 2024
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	18 Sep 2024
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	18 Sep 2024
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2026
554	Precision SMA Cable	Fairview Microwave	SCE18060101-400CM	554	18 Sep 2024
555	Rhode & Schwarz Receiver (Firmware Version : 3.10 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2025
578	DC Power Supply 0 - 60 V, 0 - 15 A	HP	6274B	2537A-08192	Not Required
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	11 Nov 2024

7.2. Conducted Test Setup

MiTest Automated Test System

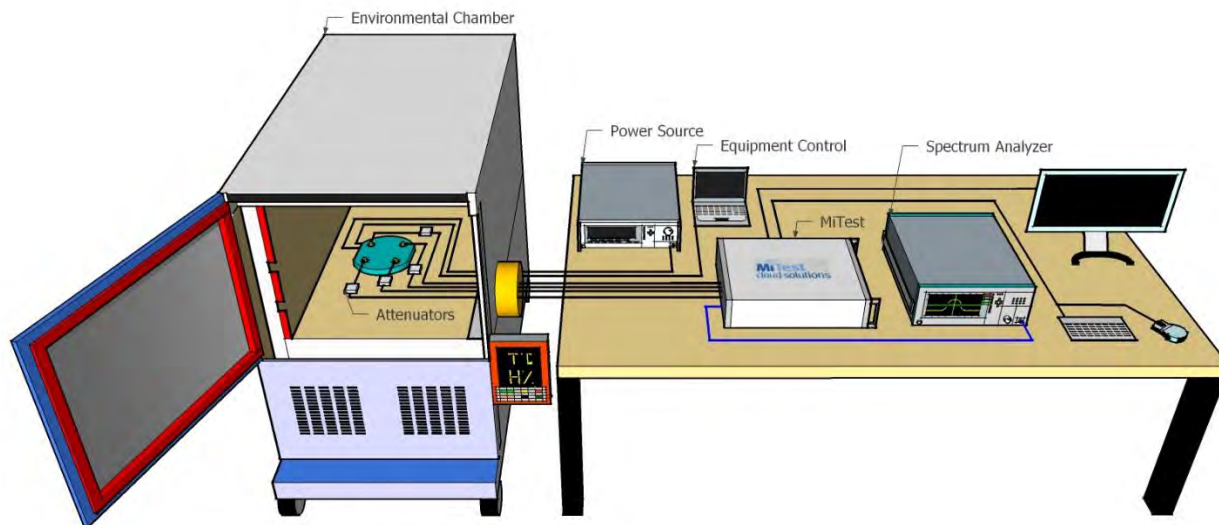

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	26 Oct 2024
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	26 Oct 2024
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	26 Oct 2024
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	26 Oct 2024
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	26 Oct 2024
249	Thermocouple; Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	22 Mar 2025
266	10 Hz to 50GHz MXA Signal Analyzer	Keysight	N9020B	MY60110791	25 Jul 2025
285	DC Power Supply	Keysight	E36155A	MY63000156	4 Dec 2024
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.2.3.0	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
441	USB Wideband Power Sensor	Boonton	55006	9179	4 Dec 2024

442	USB Wideband Power Sensor	Boonton	55006	9181	12 Dec 2024
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	27 Sep 2024
493	USB Wideband Power Sensor	Boonton	55006	9634	8 Oct 2024
494	USB Wideband Power Sensor	Boonton	55006	9726	12 Dec 2024
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2026
512	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen	512	24 Oct 2024
516	USB Wideband Power Sensor	Boonton	RTP5006	10511	4 Dec 2024
555	Rhode & Schwarz Receiver (Firmware Version : 3.10 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2025
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	20 Nov 2024

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

9. TEST RESULTS

9.1. 20 dB & 99% Bandwidth

Conducted Test Conditions for 20 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.247 ISED RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	20 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1)(i)/(ii) Section 5.1	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for 20 dB and 99% Bandwidth Measurement

The bandwidth at 20 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for 20 dB and 99% Bandwidth

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	FSK 10kbps	Duty Cycle (%):	99
Data Rate:	10.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	MHz
902.4	0.340	--	--	--	0.340	0.340	0.5	-0.16
914.8	0.340	--	--	--	0.340	0.340	0.5	-0.16
927.6	0.340	--	--	--	0.340	0.340	0.5	-0.16

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
	MHz	a	b	c	d		
902.4	0.357	--	--	--	0.357		
914.8	0.355	--	--	--	0.355		
927.6	0.355	--	--	--	0.355		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	GFSK 200kbps	Duty Cycle (%):	99
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	MHz
902.4	0.409	--	--	--	0.409	0.409	0.5	-0.09
914.8	0.409	--	--	--	0.409	0.409	0.5	-0.09
927.6	0.409	--	--	--	0.409	0.409	0.5	-0.09

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
	MHz	a	b	c	d		
902.4	0.343	--	--	--	0.343		
914.8	0.343	--	--	--	0.343		
927.6	0.346	--	--	--	0.346		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.2. Frequency Hopping Tests

Conducted Test Conditions for Frequency Hopping Measurements			
Standard:	FCC CFR 47:15.247 ISED RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Frequency Hopping Tests	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1)(i)/(ii) Section 5.1	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References, FCC Public Notice DA 00-705		

Test Procedure for Frequency Hopping Measurements

These tests cover the following measurements:

- i) channel separation
- ii) channel occupancy
- iii) dwell time
- iv) number of hopping frequencies

Frequency hopping testing was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency or hopping mode.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for Frequency Hopping Measurements

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

The XBLPX has a total possible of 64 channels. They begin at center frequency 902.4 MHz and end at center frequency 927.6 MHz, and channels center frequencies are spaced 400 kHz apart.

Each of the overlapping sections given in the script used 25 channels. This is fixed as the total number of channels to use.

9.2.1. Number of Hopping Channels

Equipment Configuration for Number of Hopping Channels

Variant:	FSK 10kbps	Antenna:	Not Applicable
Data Rate:	10.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	20	--	--
910.0-920.0	24	--	--
920.0-928.0	14	--	--
Total number of Hops	58	50	Pass

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Number of Hopping Channels

Variant:	GFSK 200kbps	Antenna:	Not Applicable
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	20	--	--
910.0-920.0	23	--	--
920.0-928.0	20	--	--
Total number of Hops	63	50	Pass

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.2.2. Channel Separation

Equipment Configuration for Channel Separation

Variant: FSK 10kbps	Antenna: Not Applicable
Data Rate: 10.00 KBit/s	Antenna Gain (dBi): Not Applicable
Modulation: FSK	Beam Forming Gain (Y)(dB): Not Applicable
Duty Cycle (%): 99.0	Tested By: SB
Engineering Test Notes:	

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
914.8	0.400	0.025	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Channel Separation

Variant:	GFSK 200kbps	Antenna:	Not Applicable
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
914.8	0.400	0.025	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.2.3. Channel Occupancy & Dwell Time

Equipment Configuration for Channel Occupancy & Dwell Time

Variant: FSK 10kbps	Antenna: Not Applicable
Data Rate: 10.00 KBit/s	Antenna Gain (dBi): Not Applicable
Modulation: FSK	Beam Forming Gain (Y)(dB): Not Applicable
Duty Cycle (%): 99.0	Tested By: SB
Engineering Test Notes:	

Test Measurement Results

Channel Frequency(MHz)	Dwell Time (Single Burst) (S)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
914.80	0.015	45.450	10.00	400.000	Pass

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Channel Occupancy & Dwell Time

Variant:	GFSK 200kbps	Antenna:	Not Applicable
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency(MHz)	Dwell Time (Single Burst) (S)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
914.80	0.015	30.460	10.00	400.000	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.3. Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
Standard:	FCC CFR 47:15.247 ISED RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1), (b)(1)/(2)/(3) Section 5.4	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement

In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions, nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information

Calculated Power = A + G + Y + 10 log (1/x) dBm

A = Total Power [$10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits for Fundamental Emission Output Power

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for frequency hopping systems:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time

intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Equipment Configuration for Output Power Peak

Variant:	FSK 10kbps	Duty Cycle (%):	99.0
Data Rate:	10.00 KBit/s	Antenna Gain (dBi):	1.00
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
902.4	18.84	--	--	--	18.84	30.00	-11.16	Max
914.8	18.79	--	--	--	18.79	30.00	-11.21	Max
927.6	18.64	--	--	--	18.64	30.00	-11.36	Max

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Output Power Peak

Variant:	GFSK 200kbps	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	1.00
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
902.4	18.83	--	--	--	18.83	30.00	-11.17	Max
914.8	18.78	--	--	--	18.78	30.00	-11.22	Max
927.6	18.64	--	--	--	18.64	30.00	-11.36	Max

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

9.4. Emissions

9.4.1. Conducted Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247 ISED RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Transmitter Conducted Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d) Section 5.5	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

9.4.1.1. Conducted Unwanted Spurious Emissions

Equipment Configuration for Unwanted Emissions Peak			
Variant:	FSK 10kbps	Duty Cycle (%):	99
Data Rate:	10.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
		SE	Limit	SE	Limit	SE	Limit	SE	Limit
902.4	30.0 - 10000.0	-30.940	-1.30	--	--	--	--	--	--
914.8	30.0 - 10000.0	-31.556	-1.27	--	--	--	--	--	--
927.6	30.0 - 10000.0	-31.518	-1.40	--	--	--	--	--	--

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Unwanted Emissions Peak

Variant:	GFSK 200kbps	Duty Cycle (%):	99
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
902.4	30.0 - 10000.0	-31.743	-1.45	--	--	--	--	--	--
914.8	30.0 - 10000.0	-31.141	-1.44	--	--	--	--	--	--
927.6	30.0 - 10000.0	-30.871	-1.69	--	--	--	--	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.1.2. Conducted Band-Edge Emissions

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant: FSK 10kbps	Duty Cycle (%): 99.0
Data Rate: 10.00 KBit/s	Antenna Gain (dBi): Not Applicable
Modulation: FSK	Beam Forming Gain (Y)(dB): Not Applicable
TPC: Not Applicable	Tested By: SB
Engineering Test Notes:	

Test Measurement Results

Channel Frequency:	902.4 MHz					
Band-Edge Frequency:	902.0 MHz					
Test Frequency Range:	875.0 - 905.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-18.46	-1.19	902.10	--	--	-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant:	GFSK 200kbps	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.4 MHz					
Band-Edge Frequency:	902.0 MHz					
Test Frequency Range:	875.0 - 905.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-17.88	-1.27	902.10	--	--	-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	FSK 10kbps	Duty Cycle (%):	99.0
Data Rate:	10.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.4 MHz					
Band-Edge Frequency:	902.0 MHz					
Test Frequency Range:	875.0 - 905.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-7.63	-1.16	902.10	--	--	-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	GFSK 200kbps	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.4 MHz					
Band-Edge Frequency:	902.0 MHz					
Test Frequency Range:	875.0 - 905.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-19.25	-1.20	902.10	--	--	-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	FSK 10kbps	Duty Cycle (%):	99.0
Data Rate:	10.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	927.6 MHz					
Band-Edge Frequency:	928.0 MHz					
Test Frequency Range:	925.0 - 950.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-5.48	-1.24	928.00	--	--	0.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	GFSK 200kbps	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	927.6 MHz					
Band-Edge Frequency:	928.0 MHz					
Test Frequency Range:	925.0 - 950.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-16.46	-1.40	927.90	--	--	-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	FSK 10kbps	Duty Cycle (%):	99.0
Data Rate:	10.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	927.6 MHz					
Band-Edge Frequency:	928.0 MHz					
Test Frequency Range:	925.0 - 950.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-6.45	-1.33	927.90	--	--	-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	GFSK 200kbps	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	927.6 MHz					
Band-Edge Frequency:	928.0 MHz					
Test Frequency Range:	925.0 - 950.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-18.28	-1.41	927.90	--	--	-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2. Radiated Emissions

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

9.4.2.3. TX Spurious & Restricted Band Emissions

FSK 10 kbps

Equipment Configuration for 30 MHz TO 1 GHz


Antenna:	Yagi	Variant:	FSK 10kbps
Antenna Gain (dBi):	15.1	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	902.4	Data Rate:	10 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz

Antenna: Yagi 15.1 dBi

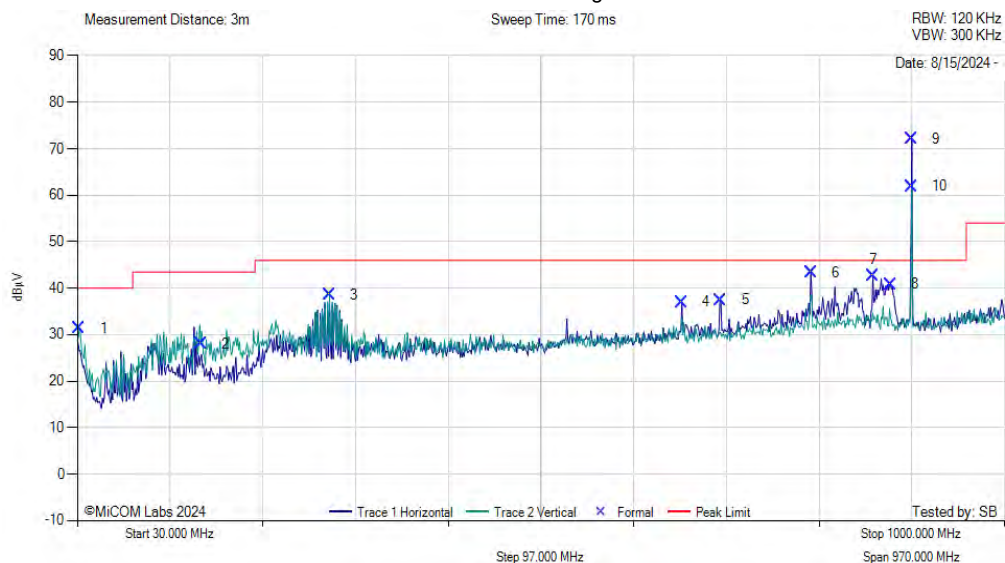

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	31.94	32.62	3.53	-4.85	31.30	MaxP	Vertical	100	0	40.0	-8.7	Pass
2	159.01	36.51	4.39	-12.86	28.04	MaxP	Vertical	99	179	43.5	-15.5	Pass
3	293.84	45.01	4.97	-11.35	38.62	MaxP	Vertical	99	89	46.0	-7.4	Pass
4	662.44	35.50	6.21	-4.69	37.02	MaxP	Horizontal	199	120	46.0	-9.0	Pass
5	703.18	35.24	6.32	-4.10	37.46	MaxP	Horizontal	99	120	46.0	-8.5	Pass
6	797.27	39.91	6.62	-3.14	43.39	MaxP	Horizontal	199	270	46.0	-2.6	Pass
7	862.26	38.11	6.81	-2.24	42.67	MaxP	Horizontal	99	268	46.0	-3.3	Pass
8	880.69	36.14	6.88	-2.21	40.81	MaxP	Horizontal	199	270	46.0	-5.2	Pass
9	903.00	66.95	6.93	28.70	72.03	Fundamental	Horizontal	199	270	--	--	Pass
10	903.00	56.86	6.93	28.70	61.94	Fundamental	Vertical	99	269	--	--	Pass

Test Notes: 3.3VDC, 10kbps, Maximum Power


Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

Antenna:	Yagi	Variant:	FSK 10kbps
Antenna Gain (dBi):	15.1	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	902.4	Data Rate:	10 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

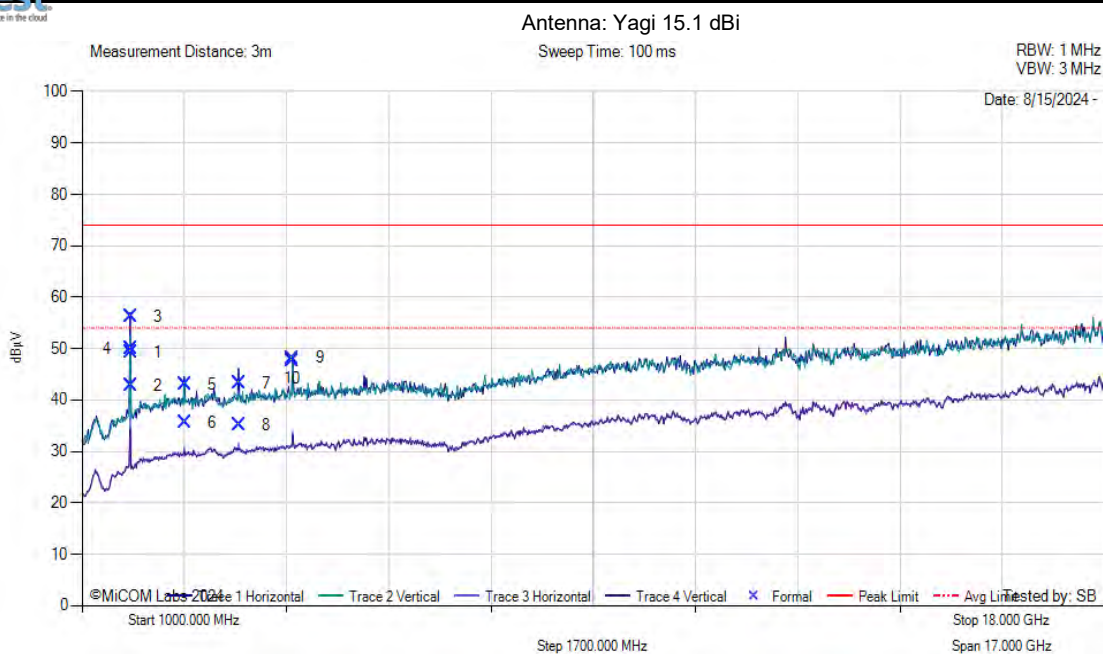

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1804.98	62.10	1.71	-14.54	49.28	MaxP	Vertical	195	120	74.0	-24.7	Pass
2	1804.98	55.58	1.71	-14.54	42.76	AVG	Vertical	195	120	54.0	-11.2	Pass
3	1804.98	69.06	1.71	-14.54	56.24	MaxP	Horizontal	192	97	74.0	-17.8	Pass
4	1804.98	62.78	1.71	-14.54	49.95	AVG	Horizontal	192	97	54.0	-4.1	Pass
5	2707.49	52.73	2.06	-11.76	43.03	MaxP	Horizontal	150	68	74.0	-31.0	Pass
6	2707.49	45.32	2.06	-11.76	35.62	AVG	Horizontal	150	68	54.0	-18.4	Pass
7	3609.23	52.60	2.43	-11.82	43.20	MaxP	Horizontal	193	87	74.0	-30.8	Pass
8	3609.23	44.45	2.43	-11.82	35.06	AVG	Horizontal	193	87	54.0	-18.9	Pass
9	4502.00	57.64	2.76	33.90	48.21	MaxP	Horizontal	149	270	74.0	-25.8	Pass
10	4502.00	57.11	2.76	33.90	47.67	MaxP	Vertical	149	179	74.0	-26.3	Pass

Test Notes: 3.3VDC, 10kbps, Maximum Power

Equipment Configuration for 30 MHz TO 1 GHz

Antenna:	Yagi	Variant:	FSK 10kbps
Antenna Gain (dBi):	15.1	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	914.8	Data Rate:	10 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz

Antenna: Yagi 15.1 dBi



30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	31.94	31.93	3.53	-4.85	30.62	MaxP	Vertical	99	0	40.5	-9.88	Pass
2	120.21	39.37	4.19	-11.45	32.11	MaxP	Vertical	99	179	44.0	-11.89	Pass
3	297.72	36.00	4.99	-11.29	29.70	MaxP	Vertical	99	179	47.0	-17.30	Pass
4	795.33	36.98	6.61	-3.13	40.46	MaxP	Horizontal	199	270	47.0	-6.54	Pass
5	798.24	36.17	6.62	-3.12	39.66	MaxP	Vertical	99	119	47.0	-7.34	Pass
6	836.07	31.22	6.72	-2.47	35.47	MaxP	Horizontal	199	270	47.0	-11.53	Pass
7	874.87	42.54	6.86	-2.19	46.21	MaxP	Horizontal	99	270	47.0	-0.79	Pass
8	914.64	60.02	6.98	-1.74	65.26	Fundamental	Vertical	99	270	--	--	Pass
9	914.64	50.63	6.98	-1.74	55.87	Fundamental	Horizontal	199	240	--	--	Pass
10	915.61	62.40	6.98	-1.75	67.63	Fundamental	Horizontal	99	270	--	--	Pass
11	915.61	58.74	6.98	-1.75	63.97	Fundamental	Vertical	99	270	--	--	Pass

Test Notes: 3.3VDC, 10kbps, Maximum Power


Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

Antenna:	Yagi	Variant:	FSK 10kbps
Antenna Gain (dBi):	15.1	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	914.8	Data Rate:	10 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

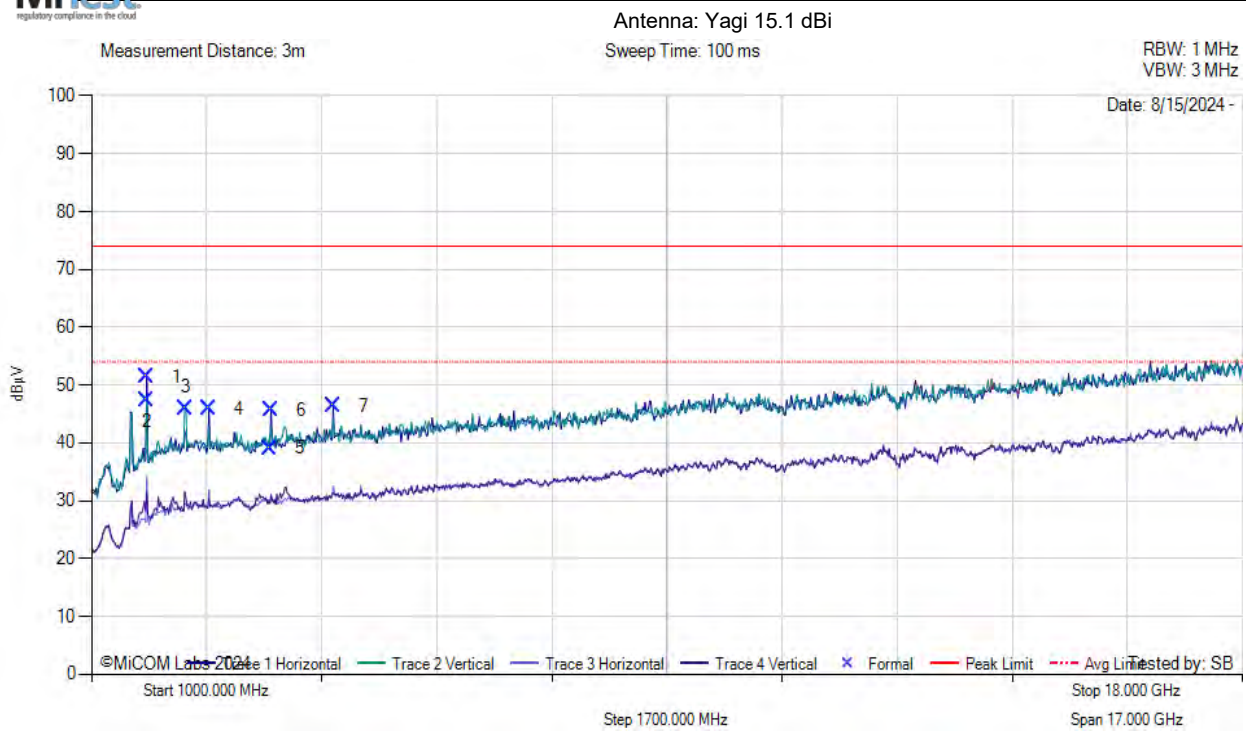

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1816.00	64.21	1.73	30.49	51.49	MaxP	Horizontal	149	120	74.0	-22.5	Pass
2	1816.00	60.13	1.73	30.49	47.41	MaxP	Vertical	199	240	74.0	-26.6	Pass
3	2394.00	56.21	1.96	32.16	46.01	MaxP	Vertical	199	269	74.0	-28.0	Pass
4	2734.00	55.61	2.11	32.44	45.97	MaxP	Horizontal	149	30	74.0	-28.0	Pass
5	3635.00	48.42	2.43	33.18	39.10	MaxP	Horizontal	149	180	74.0	-34.9	Pass
6	3652.00	54.99	2.43	33.22	45.69	MaxP	Horizontal	199	90	74.0	-28.3	Pass
7	4570.00	55.82	2.80	33.97	46.35	MaxP	Horizontal	149	270	74.0	-27.7	Pass

Test Notes: 3.3VDC, 10kbps, Maximum Power

Equipment Configuration for 30 MHz TO 1 GHz

Antenna:	Yagi	Variant:	FSK 10kbps
Antenna Gain (dBi):	15.1	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	927.6	Data Rate:	10 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz


Antenna: Yagi 15.1 dBi

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz
VBW: 300 KHz

Date: 8/15/2024

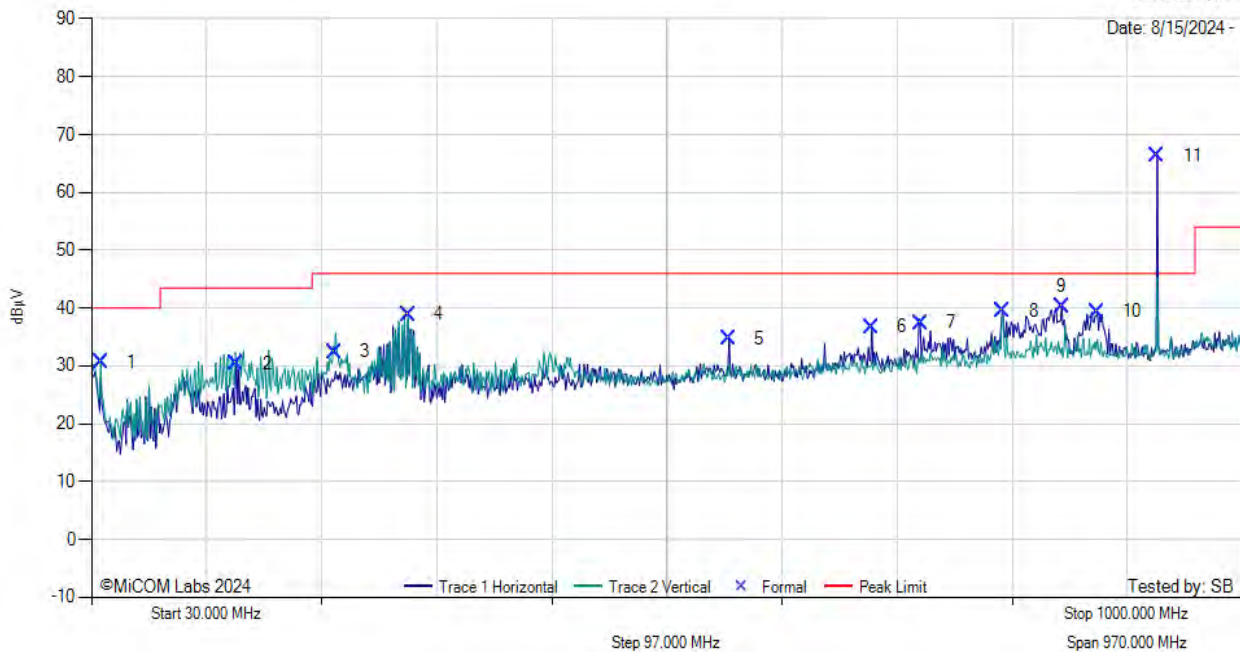

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	37.76	36.38	3.60	-9.35	30.63	MaxP	Vertical	99	29	40.5	-9.87	Pass
2	152.22	38.92	4.36	-12.83	30.45	MaxP	Vertical	99	209	44.0	-13.55	Pass
3	234.67	40.82	4.73	-13.09	32.46	MaxP	Vertical	99	239	47.0	-14.54	Pass
4	296.75	45.22	4.99	-11.30	38.91	MaxP	Vertical	99	89	47.0	-8.09	Pass
5	567.38	34.77	5.91	-6.01	34.68	MaxP	Horizontal	199	120	47.0	-12.32	Pass
6	687.66	34.92	6.28	-4.45	36.76	MaxP	Horizontal	99	90	47.0	-10.24	Pass
7	728.40	34.95	6.40	-3.93	37.43	MaxP	Horizontal	99	120	47.0	-9.57	Pass
8	798.24	36.05	6.62	-3.12	39.54	MaxP	Horizontal	99	270	47.0	-7.46	Pass
9	847.71	35.79	6.79	-2.38	40.20	MaxP	Horizontal	199	270	47.0	-6.8	Pass
10	877.78	34.73	6.86	-2.19	39.39	MaxP	Horizontal	199	270	47.0	-7.61	Pass
11	928.22	60.93	7.00	-1.56	66.37	Fundamental	Horizontal	199	270	--	--	Pass

Test Notes: 3.3VDC, 10kbps, Maximum Power


Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

Antenna:	Yagi	Variant:	FSK 10kbps
Antenna Gain (dBi):	15.1	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	927.6	Data Rate:	10 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

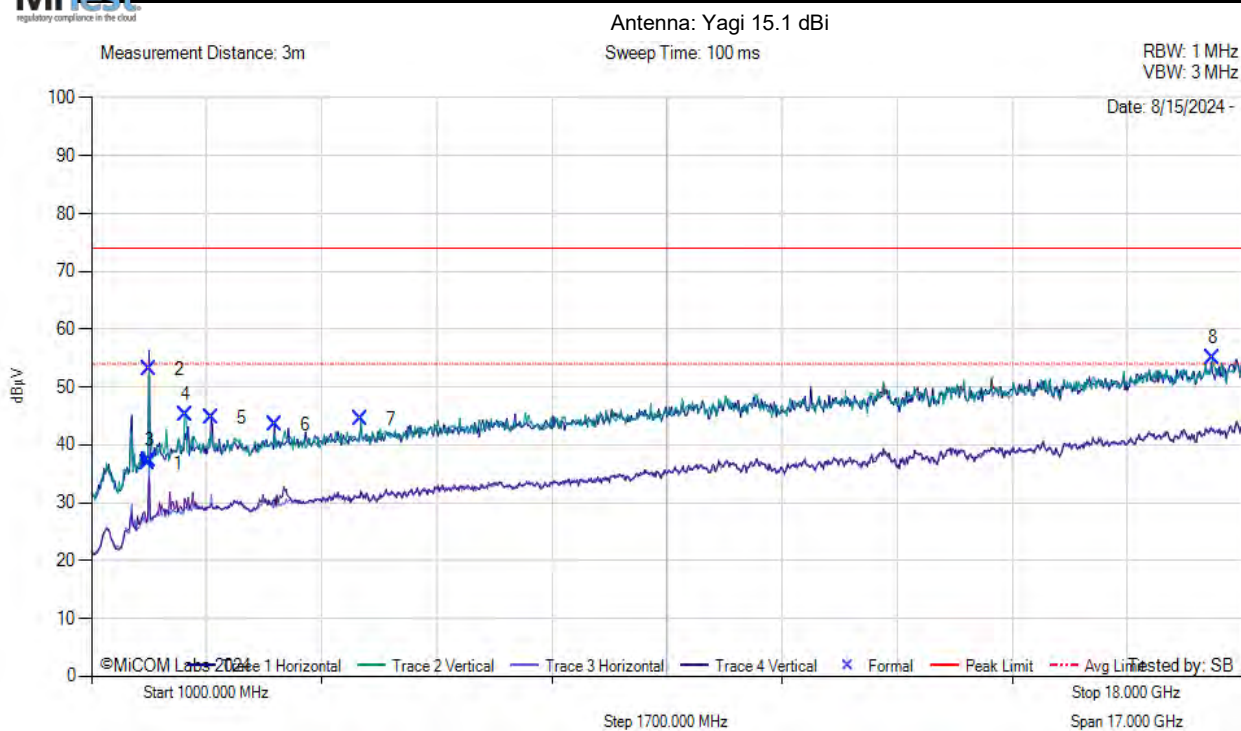

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1833.00	49.34	1.75	30.60	36.75	MaxP	Horizontal	199	150	74.0	-37.3	Pass
2	1850.00	65.61	1.70	30.70	53.13	MaxP	Vertical	199	119	74.0	-20.9	Pass
3	1850.00	49.73	1.70	30.70	37.24	AVG	Horizontal	199	90	54.0	-16.8	Pass
4	2394.00	55.41	1.96	32.16	45.21	MaxP	Vertical	199	269	74.0	-28.8	Pass
5	2768.00	54.24	2.16	32.47	44.65	MaxP	Horizontal	149	30	74.0	-29.3	Pass
6	3703.00	52.88	2.47	33.35	43.55	MaxP	Horizontal	149	90	74.0	-30.5	Pass
7	4978.00	53.60	2.94	34.02	44.45	MaxP	Vertical	199	179	74.0	-29.5	Pass
8	17558.00	49.37	6.26	41.57	55.06	MaxP	Vertical	149	89	74.0	-18.9	Pass

Test Notes: 3.3VDC, 10kbps, Maximum Power

GFSK 200kbps

Equipment Configuration for 30 MHz TO 1 GHz CLASS

Antenna:	Yagi	Variant:	GFSK 200kbps
Antenna Gain (dBi):	15.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	902.4	Data Rate:	200 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz Class

Antenna: Yagi 15.1 dBi



30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	31.94	33.14	3.53	-4.85	31.83	MaxP	Vertical	100	0	40.5	-8.67	Pass
2	77.53	31.69	3.95	-16.98	18.65	MaxP	Vertical	199	29	40.5	-21.85	Pass
3	156.10	36.56	4.38	-12.85	28.08	MaxP	Vertical	99	210	44	-15.92	Pass
4	272.50	44.16	4.88	-11.30	37.74	MaxP	Horizontal	199	150	47	-9.26	Pass
5	290.93	32.30	4.96	-11.36	25.90	MaxP	Vertical	99	89	47	-21.10	Pass
6	662.44	34.79	6.21	-4.69	36.31	MaxP	Horizontal	99	90	47	-10.69	Pass
7	704.15	28.46	6.33	-4.09	30.70	MaxP	Horizontal	99	90	47	-16.30	Pass
8	798.24	37.15	6.62	-3.12	40.64	MaxP	Horizontal	199	270	47	-6.36	Pass
9	822.49	37.47	6.69	-2.65	41.52	MaxP	Horizontal	199	270	47	-5.48	Pass
10	863.23	40.08	6.81	-2.22	44.67	MaxP	Horizontal	199	270	47	-2.33	Pass
11	903.00	71.86	6.93	28.70	76.94	Fundamental	Horizontal	99	270	--	--	Pass
12	903.00	64.93	6.93	28.70	70.01	Fundamental	Vertical	99	269	--	--	Pass

Test Notes: 3.3VDC, 200kbps, Maximum Power


Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

Antenna:	Yagi	Variant:	GFSK 200kbps
Antenna Gain (dBi):	15.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	902.4	Data Rate:	200 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

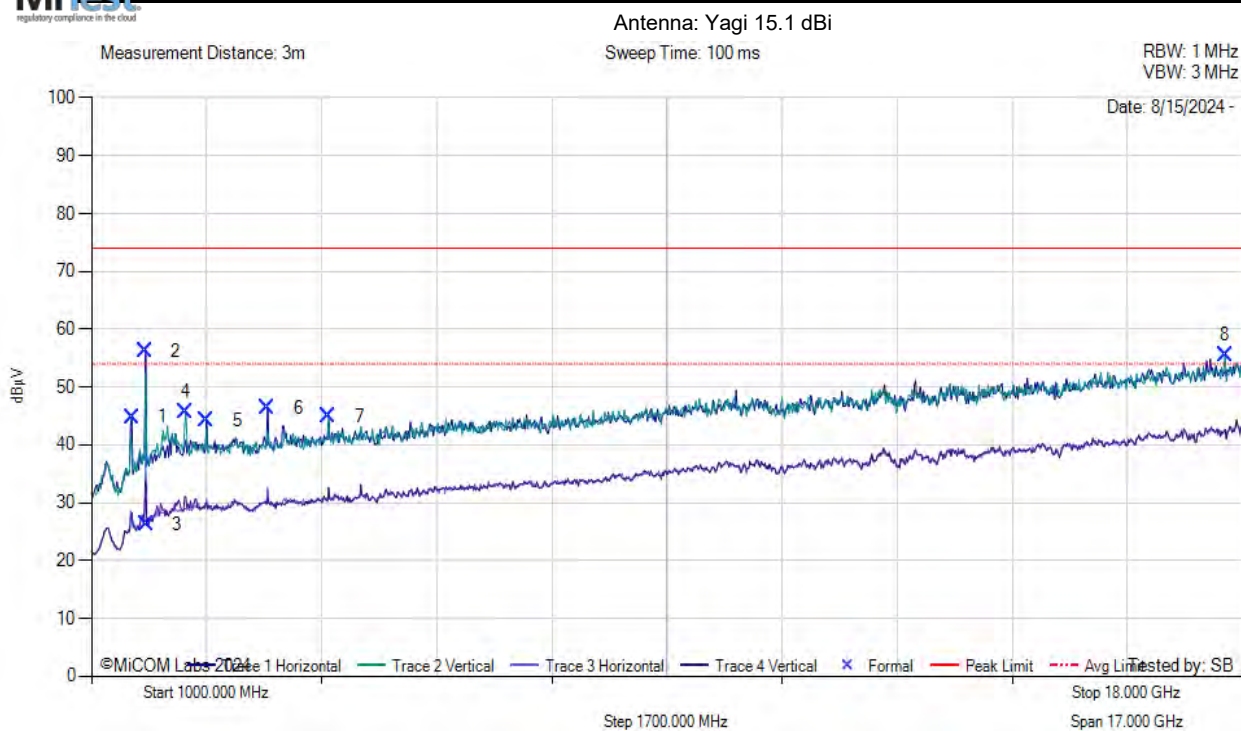

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1595.00	59.56	1.63	28.60	44.81	MaxP	Horizontal	199	180	74.0	-29.2	Pass
2	1799.00	69.10	1.73	30.39	56.26	MaxP	Horizontal	199	90	74.0	-17.7	Pass
3	1816.00	38.95	1.73	30.49	26.23	AVG	Horizontal	149	300	54.0	-27.8	Pass
4	2394.00	55.94	1.96	32.16	45.73	MaxP	Vertical	199	269	74.0	-28.3	Pass
5	2700.00	53.96	2.06	32.43	44.26	MaxP	Horizontal	149	60	74.0	-29.7	Pass
6	3601.00	55.84	2.41	33.09	46.44	MaxP	Horizontal	199	90	74.0	-27.6	Pass
7	4502.00	54.33	2.76	33.90	44.90	MaxP	Vertical	149	179	74.0	-29.1	Pass
8	17745.00	49.04	6.45	41.66	55.52	MaxP	Vertical	149	0	74.0	-18.5	Pass

Test Notes: 3.3VDC, 200kbps, Maximum Power

Equipment Configuration for 30 MHz TO 1 GHz CLASS


Antenna:	Yagi	Variant:	GFSK 200kbps
Antenna Gain (dBi):	15.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	914.8	Data Rate:	200 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz Class

Antenna: Yagi 15.1 dBi

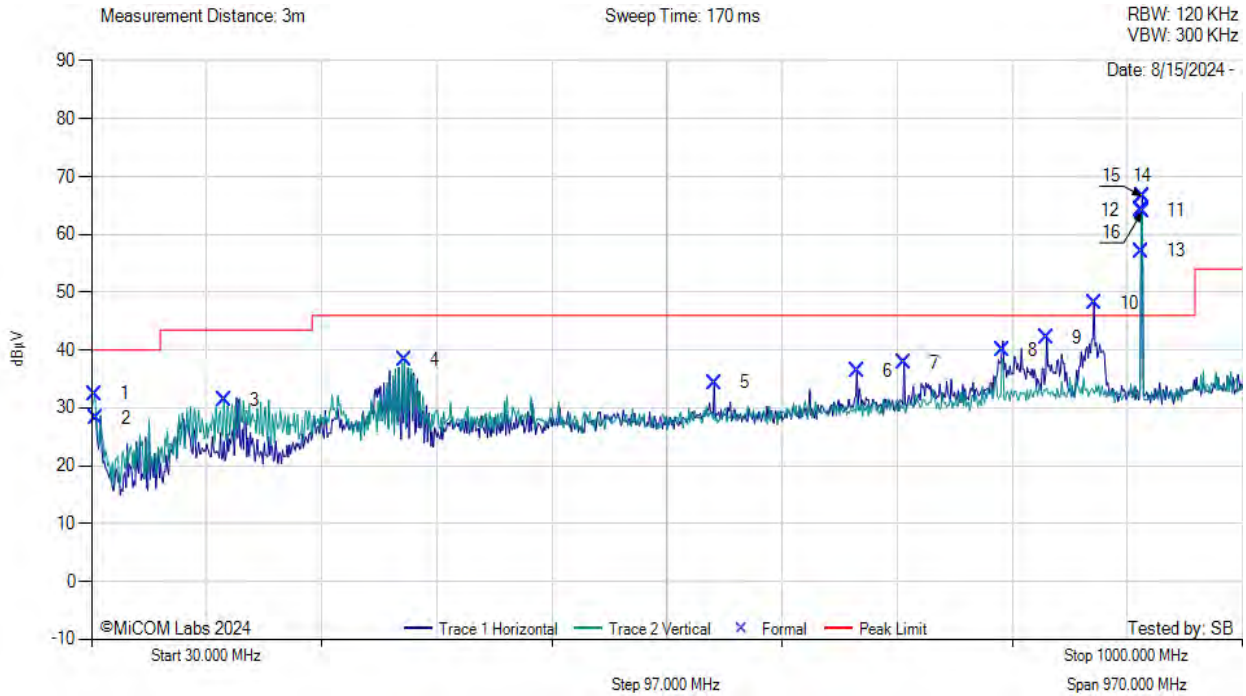

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	32.91	34.60	3.55	-5.69	32.45	MaxP	Vertical	99	29	-8.05	-8.05	Pass
2	33.88	31.02	3.56	-6.39	28.19	MaxP	Vertical	99	0	-12.31	-12.31	Pass
3	141.55	39.51	4.31	-12.38	31.43	MaxP	Vertical	99	209	-12.57	-12.57	Pass
4	293.84	44.68	4.97	-11.35	38.30	MaxP	Vertical	99	89	-8.70	-8.70	Pass
5	554.77	34.72	5.88	-6.29	34.31	MaxP	Horizontal	99	300	-12.69	-12.69	Pass
6	675.05	34.80	6.25	-4.70	36.35	MaxP	Horizontal	199	300	-10.65	-10.65	Pass
7	714.82	35.39	6.37	-3.97	37.79	MaxP	Horizontal	99	90	-9.21	-9.21	Pass
8	797.27	36.44	6.62	-3.14	39.92	MaxP	Horizontal	99	270	-7.08	-7.08	Pass
9	835.10	37.85	6.72	-2.49	42.08	MaxP	Horizontal	99	270	-4.92	-4.92	Pass
10	874.87	43.48	6.86	-2.19	48.15	MaxP	Horizontal	99	270	1.15	1.15	Pass
11	914.64	59.01	6.98	-1.74	64.24	Fundamental	Vertical	99	270	--	--	Pass
12	914.64	59.01	6.98	-1.74	64.24	Fundamental	Vertical	99	270	--	--	Pass
13	914.64	51.84	6.98	-1.74	57.08	Fundamental	Horizontal	99	300	--	--	Pass
14	915.61	61.33	6.98	-1.75	66.56	Fundamental	Horizontal	99	270	--	--	Pass
15	915.61	61.33	6.98	-1.75	66.56	Fundamental	Horizontal	99	270	--	--	Pass
16	915.61	58.75	6.98	-1.75	63.98	Fundamental	Vertical	99	270	--	--	Pass

Test Notes: 3.3VDC, 200kbps, Maximum Power


Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

Antenna:	Yagi	Variant:	GFSK 200kbps
Antenna Gain (dBi):	15.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	914.8	Data Rate:	200 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

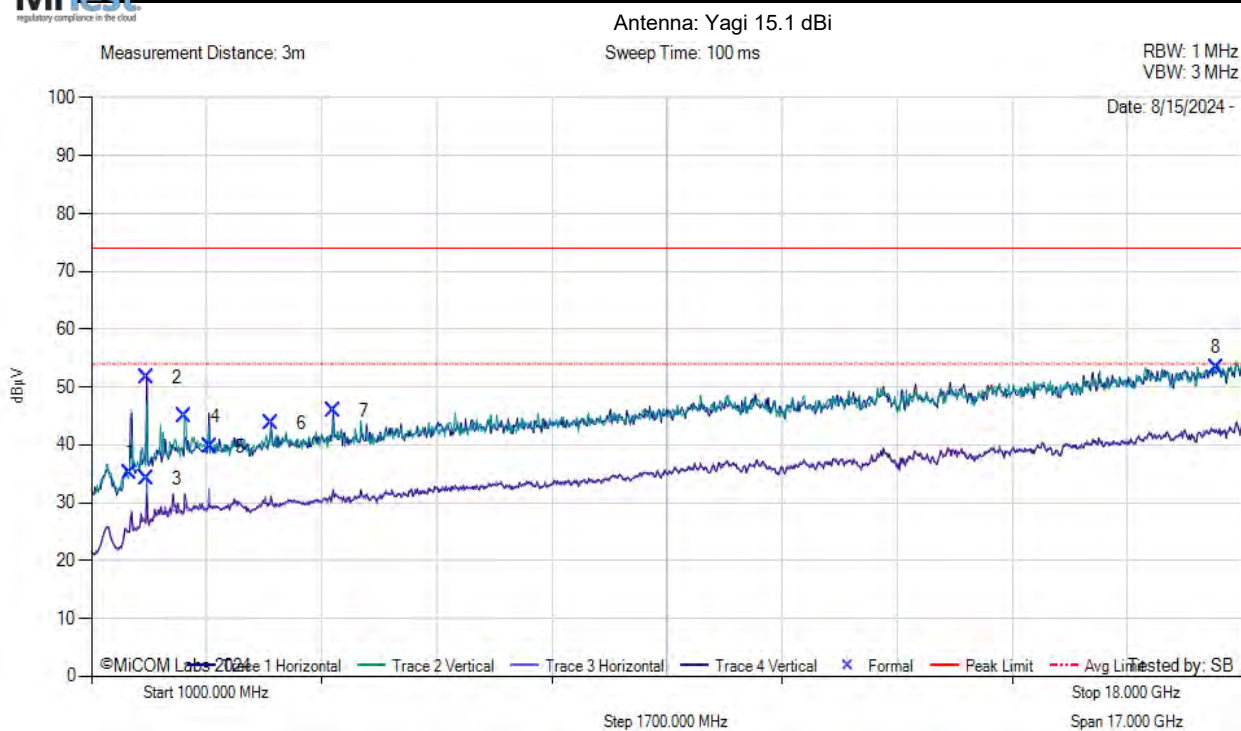

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1561.00	50.13	1.59	28.36	35.10	MaxP	Horizontal	199	150	74.0	-38.9	Pass
2	1816.00	64.33	1.73	30.49	51.61	MaxP	Horizontal	199	90	74.0	-22.4	Pass
3	1816.00	46.95	1.73	30.49	34.23	AVG	Horizontal	150	120	54.0	-19.8	Pass
4	2377.00	55.30	1.97	32.08	44.95	MaxP	Vertical	199	119	74.0	-29.0	Pass
5	2751.00	49.35	2.11	32.45	39.72	MaxP	Horizontal	199	270	74.0	-34.3	Pass
6	3652.00	53.06	2.43	33.22	43.76	MaxP	Horizontal	199	90	74.0	-30.2	Pass
7	4570.00	55.33	2.80	33.97	45.85	MaxP	Horizontal	150	270	74.0	-28.1	Pass
8	17609.00	47.74	6.37	41.62	53.38	MaxP	Vertical	150	149	74.0	-20.6	Pass

Test Notes: 3.3VDC, 200kbps, Maximum Power

Equipment Configuration for 30 MHz TO 1 GHz CLASS

Antenna:	Yagi	Variant:	GFSK 200kbps
Antenna Gain (dBi):	15.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	927.6	Data Rate:	200 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz Class


Antenna: Yagi 15.1 dBi

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz
VBW: 300 KHz

Date: 8/15/2024

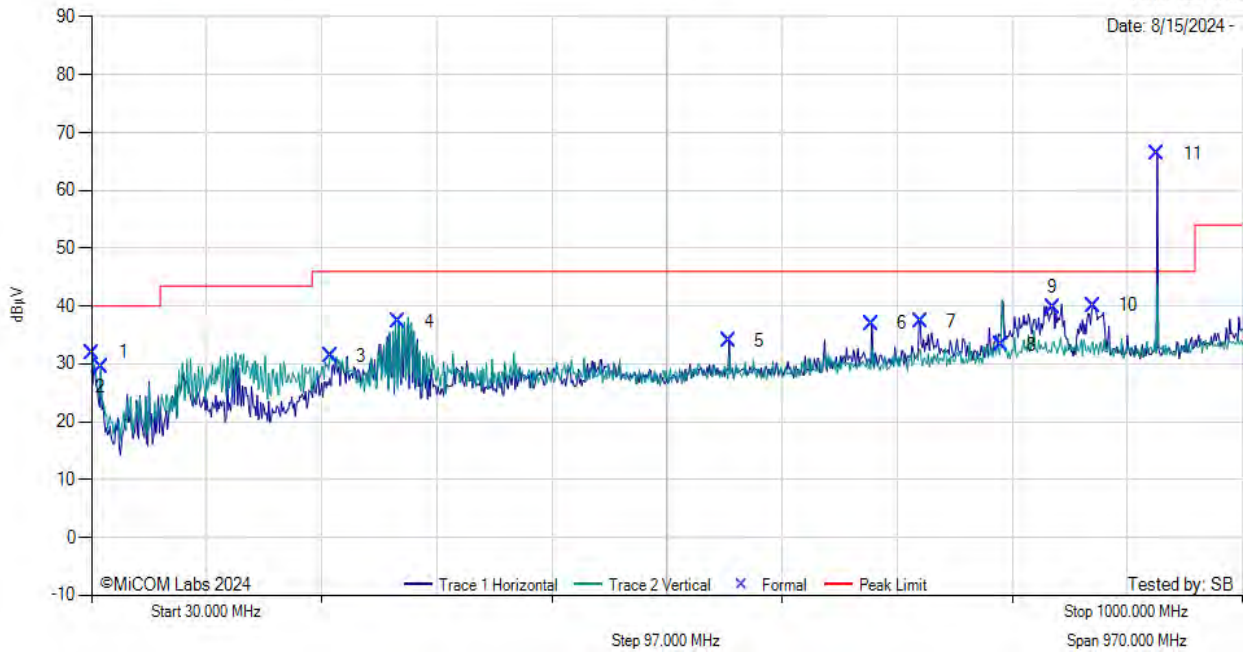

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	30.97	32.57	3.52	-4.10	31.99	MaxP	Vertical	100	119	40.5	-8.51	Pass
2	37.76	35.32	3.60	-9.35	29.57	MaxP	Vertical	100	0	40.5	-10.93	Pass
3	231.76	39.81	4.71	-13.17	31.36	MaxP	Vertical	100	270	47.0	-15.64	Pass
4	288.99	43.81	4.95	-11.36	37.41	MaxP	Vertical	100	119	47.0	-9.59	Pass
5	567.38	34.08	5.91	-6.01	33.99	MaxP	Horizontal	100	300	47.0	-13.01	Pass
6	687.66	35.18	6.28	-4.45	37.01	MaxP	Horizontal	100	90	47.0	-9.99	Pass
7	728.40	34.81	6.40	-3.93	37.29	MaxP	Horizontal	199	120	47.0	-9.71	Pass
8	796.30	29.73	6.61	-3.13	33.22	MaxP	Vertical	100	179	47.0	-13.78	Pass
9	839.95	35.48	6.74	-2.41	39.81	MaxP	Horizontal	100	270	47.0	-7.19	Pass
10	873.90	35.44	6.86	-2.17	40.13	MaxP	Horizontal	100	270	47.0	-6.87	Pass
11	928.22	60.82	7.00	-1.56	66.27	Fundamental	Horizontal	100	270	--	--	Pass

Test Notes: 3.3VDC, 200kbps, Maximum Power


Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

Antenna:	Yagi	Variant:	GFSK 200kbps
Antenna Gain (dBi):	15.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	927.6	Data Rate:	200 kbps
Power Setting:	Max	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

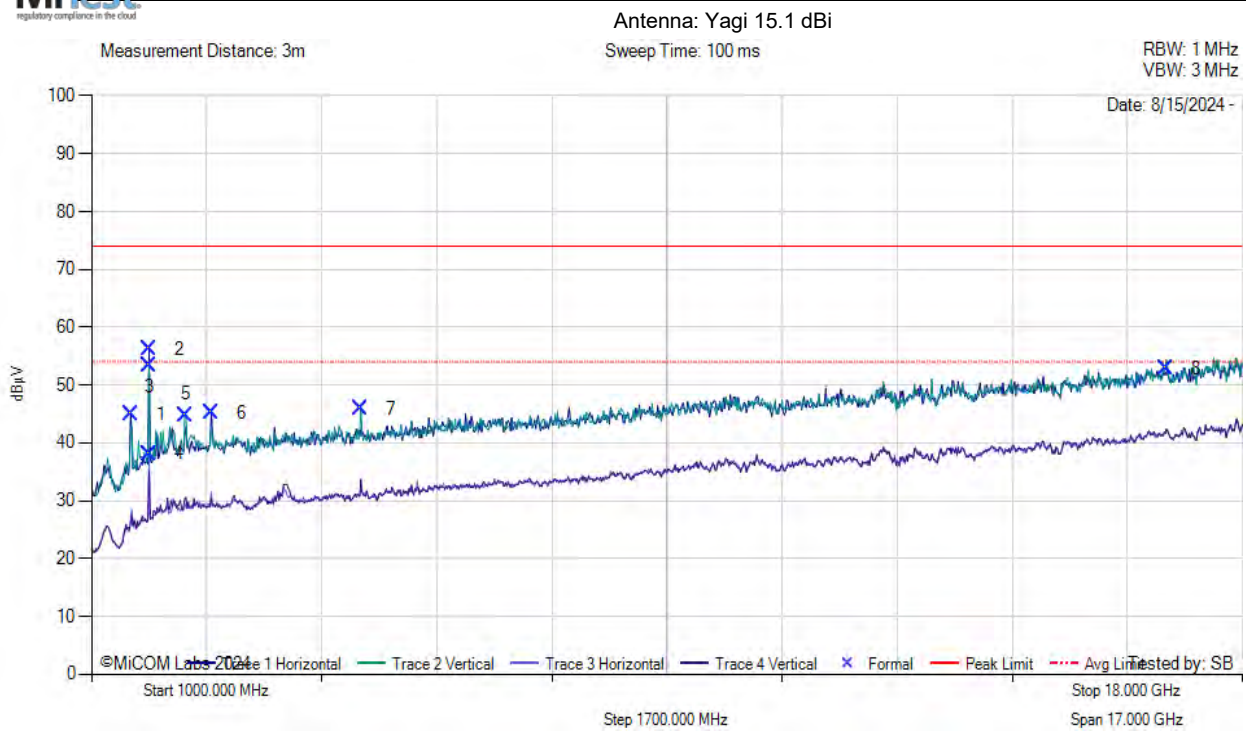

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1578.00	59.91	1.60	28.48	44.99	MaxP	Horizontal	199	210	74.0	-29.0	Pass
2	1850.00	68.68	1.70	30.70	56.19	MaxP	Horizontal	199	90	74.0	-17.8	Pass
3	1850.00	65.80	1.70	30.70	53.32	MaxP	Vertical	199	119	74.0	-20.7	Pass
4	1850.00	50.62	1.70	30.70	38.13	AVG	Horizontal	199	90	54.0	-15.9	Pass
5	2394.00	55.04	1.96	32.16	44.84	MaxP	Vertical	199	119	74.0	-29.2	Pass
6	2768.00	54.77	2.16	32.47	45.19	MaxP	Horizontal	150	30	74.0	-28.8	Pass
7	4978.00	55.03	2.94	34.02	45.88	MaxP	Vertical	199	150	74.0	-28.1	Pass
8	16861.00	47.32	6.18	41.70	52.89	MaxP	Vertical	150	149	74.0	-21.1	Pass

Test Notes: 3.3VDC, 200kbps, Maximum Power


A. APPENDIX - GRAPHICAL IMAGES

A.1. 20 dB & 99% Bandwidth



20 dB 99% BANDWIDTH

Variant: FSK 10kbps, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

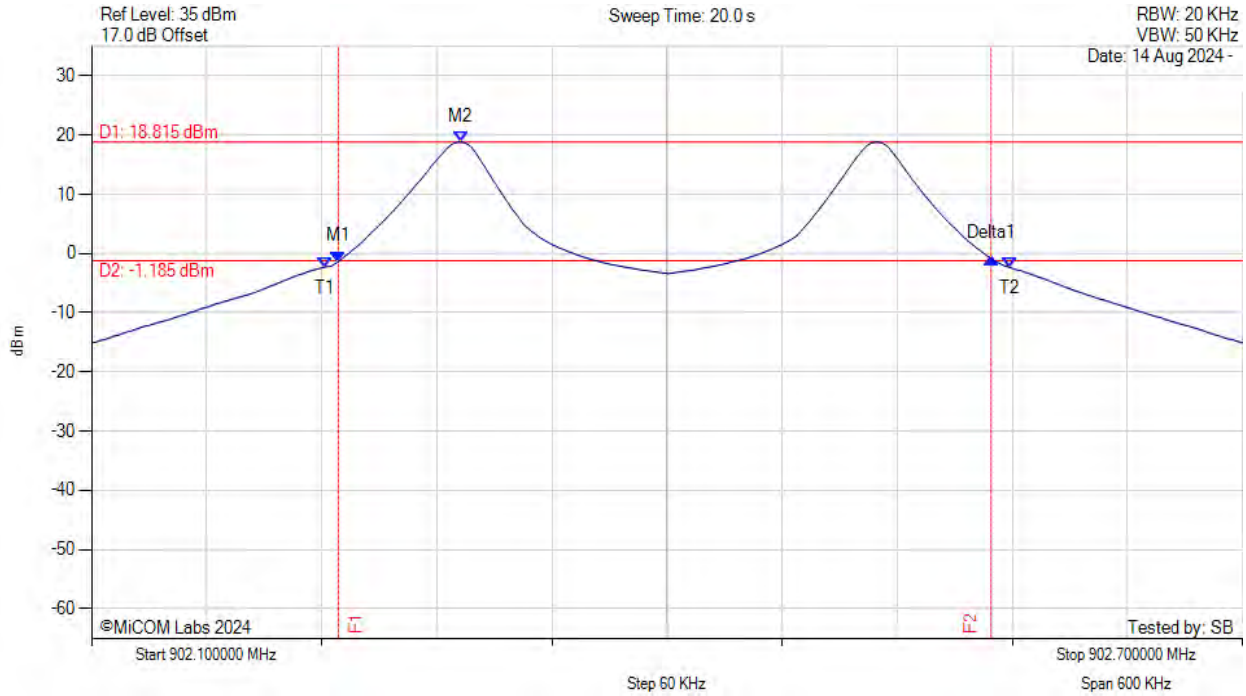


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.229 MHz : -1.380 dBm M2 : 902.292 MHz : 18.815 dBm Delta1 : 340 KHz : 0.547 dB T1 : 902.221 MHz : -2.329 dBm T2 : 902.579 MHz : -2.348 dBm OBW : 357 KHz	Measured 20 dB Bandwidth : 0.340 MHz Limit: 0.5 kHz Margin: 0.16 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: FSK 10kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

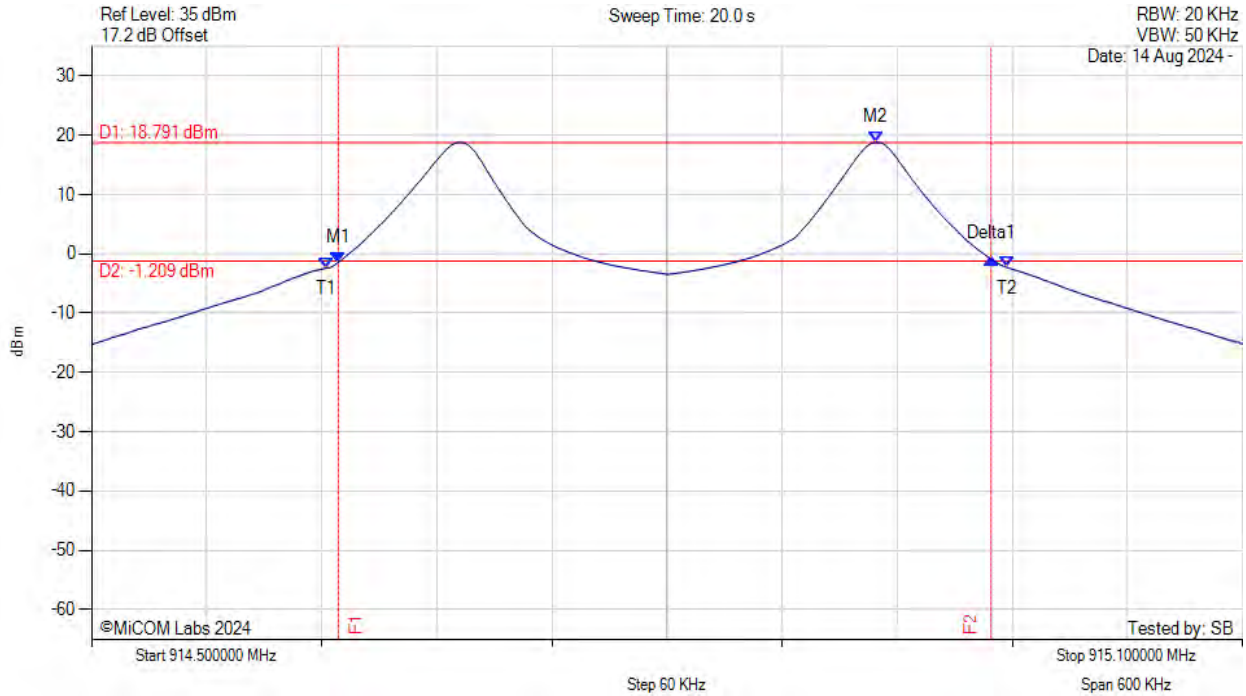


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 914.629 MHz : -1.416 dBm M2 : 914.909 MHz : 18.791 dBm Delta1 : 340 KHz : 0.537 dB T1 : 914.623 MHz : -2.358 dBm T2 : 914.977 MHz : -2.274 dBm OBW : 355 KHz	Measured 20 dB Bandwidth: 0.340 MHz Limit: 0.5 kHz Margin: 0.16 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: FSK 10kbps, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

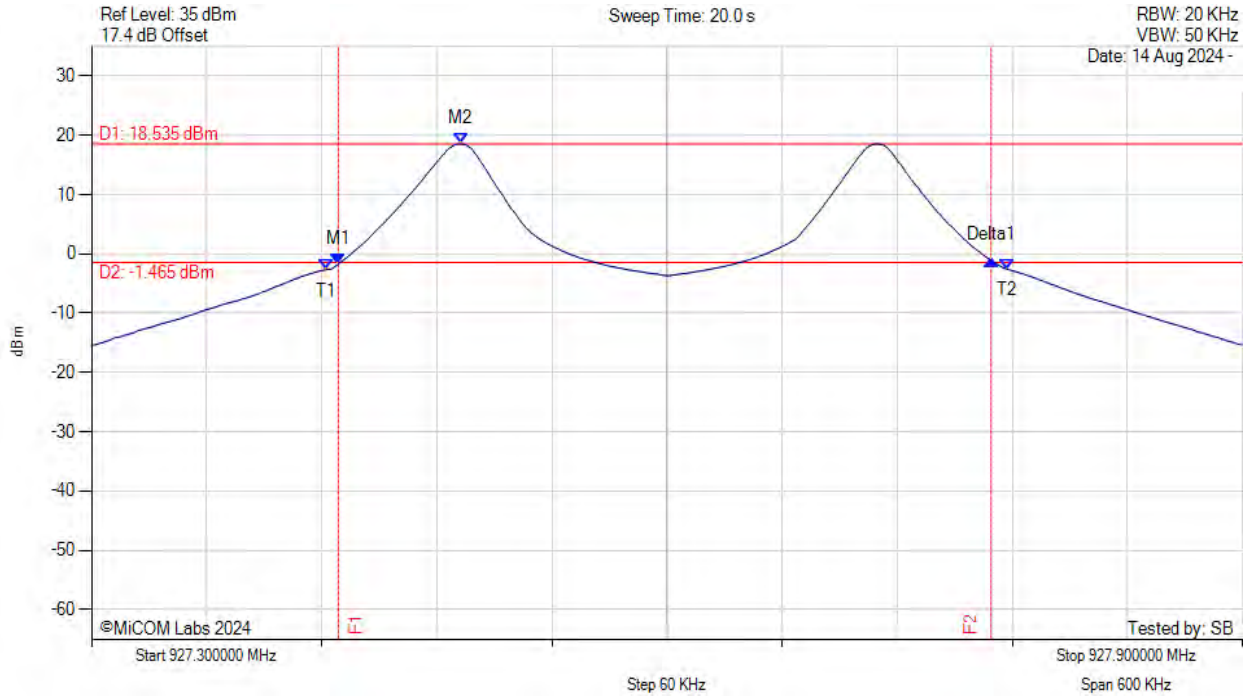


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 927.429 MHz : -1.719 dBm M2 : 927.492 MHz : 18.535 dBm Delta1 : 340 KHz : 0.641 dB T1 : 927.423 MHz : -2.634 dBm T2 : 927.777 MHz : -2.573 dBm OBW : 355 KHz	Measured 20 dB Bandwidth : 0.340 MHz Limit: 0.5 kHz Margin: 0.16 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: GFSK 200kbps, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

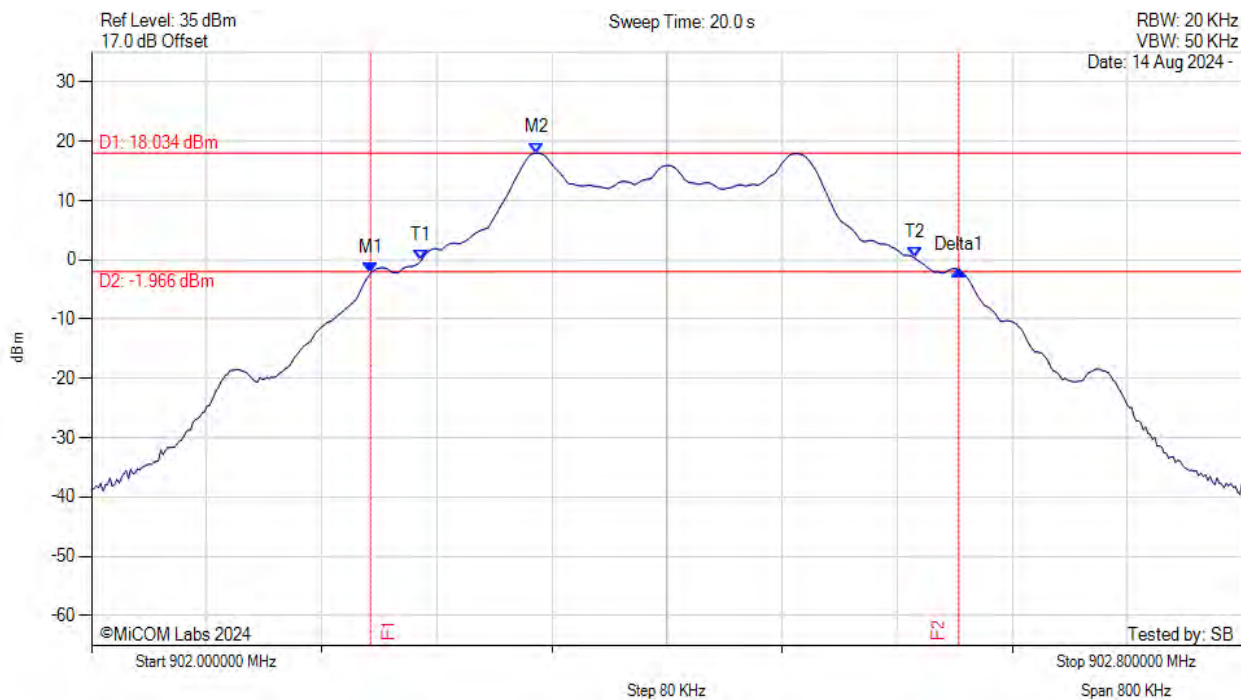


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.194 MHz : -2.279 dBm M2 : 902.309 MHz : 18.034 dBm Delta1 : 409 KHz : 0.614 dB T1 : 902.229 MHz : -0.080 dBm T2 : 902.572 MHz : 0.321 dBm OBW : 343 KHz	Measured 20 dB Bandwidth: 0.409 MHz Limit: 0.5 kHz Margin: 0.09 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: GFSK 200kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

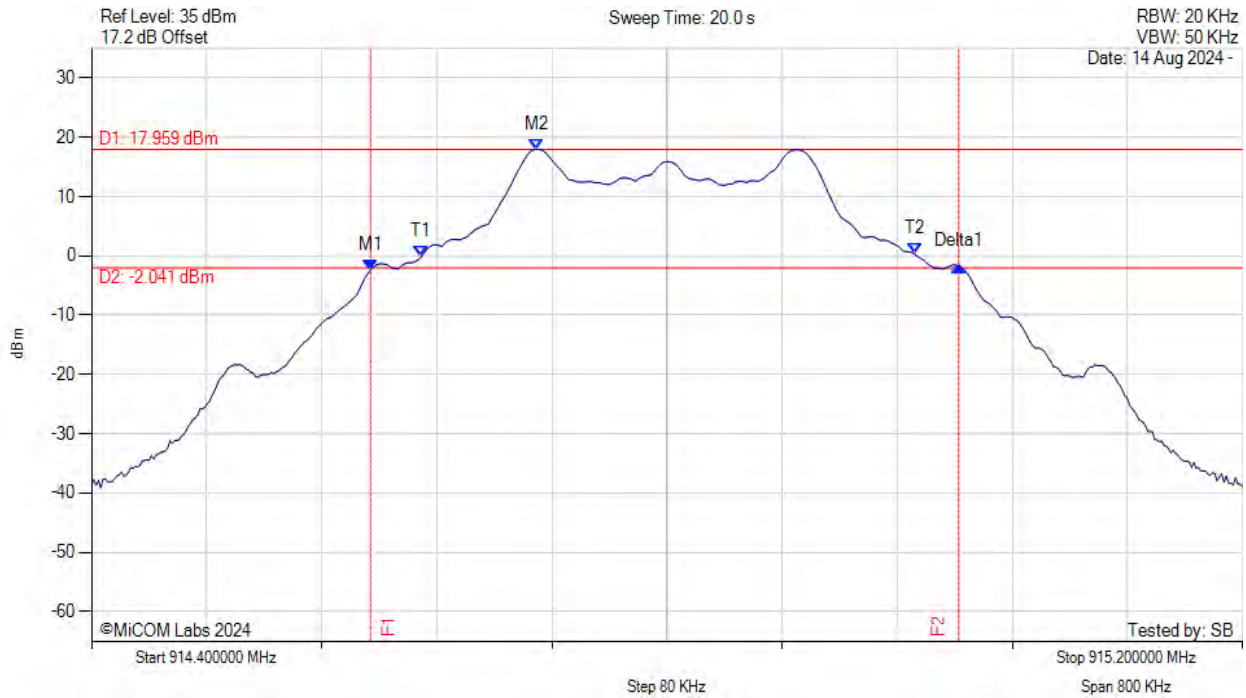


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 914.594 MHz : -2.342 dBm M2 : 914.709 MHz : 17.959 dBm Delta1 : 409 KHz : 0.673 dB T1 : 914.629 MHz : -0.165 dBm T2 : 914.972 MHz : 0.312 dBm OBW : 343 KHz	Measured 20 dB Bandwidth: 0.409 MHz Limit: 0.5 kHz Margin: 0.09 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: GFSK 200kbps, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

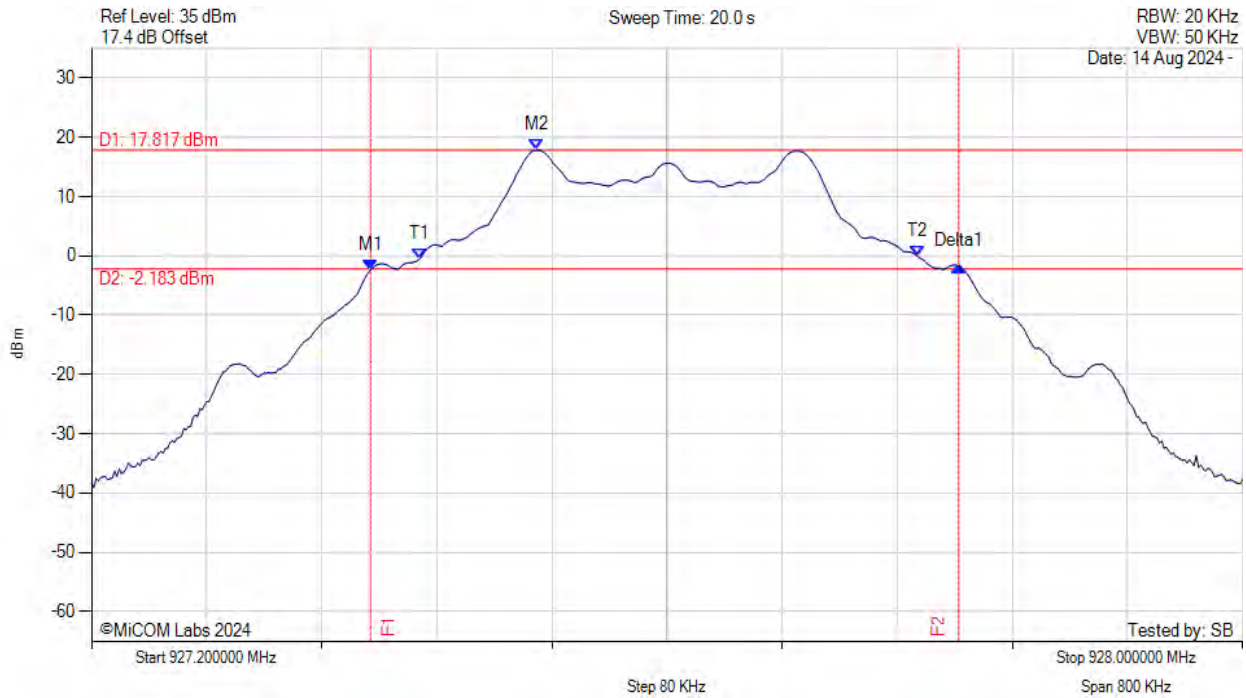


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 927.394 MHz : -2.340 dBm M2 : 927.509 MHz : 17.817 dBm Delta1 : 409 KHz : 0.614 dB T1 : 927.428 MHz : -0.601 dBm T2 : 927.774 MHz : -0.017 dBm OBW : 346 KHz	Measured 20 dB Bandwidth: 0.409 MHz Limit: 0.5 kHz Margin: 0.09 MHz

[back to matrix](#)

A.2. Frequency Hopping Tests

A.2.1. Number of Hopping Channels

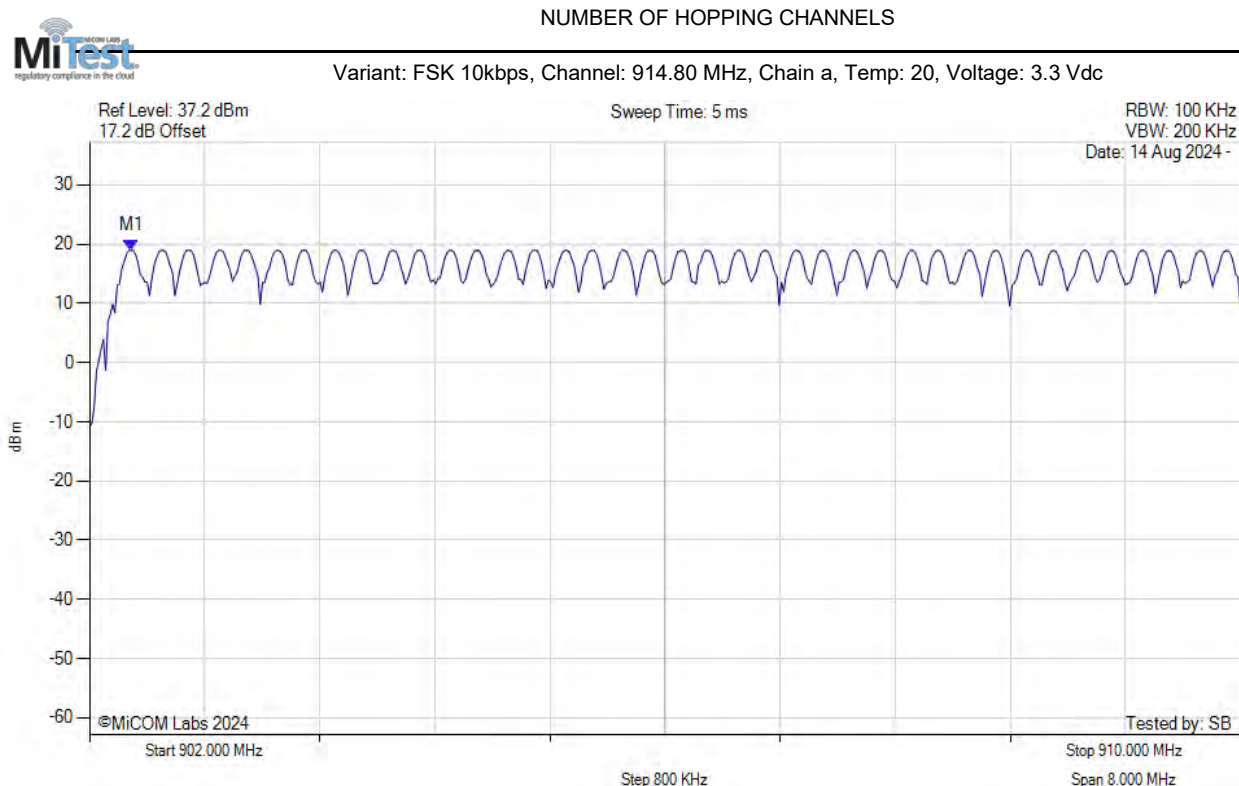


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.289 MHz : 18.951 dBm	Channel Frequency: 914.80 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: FSK 10kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

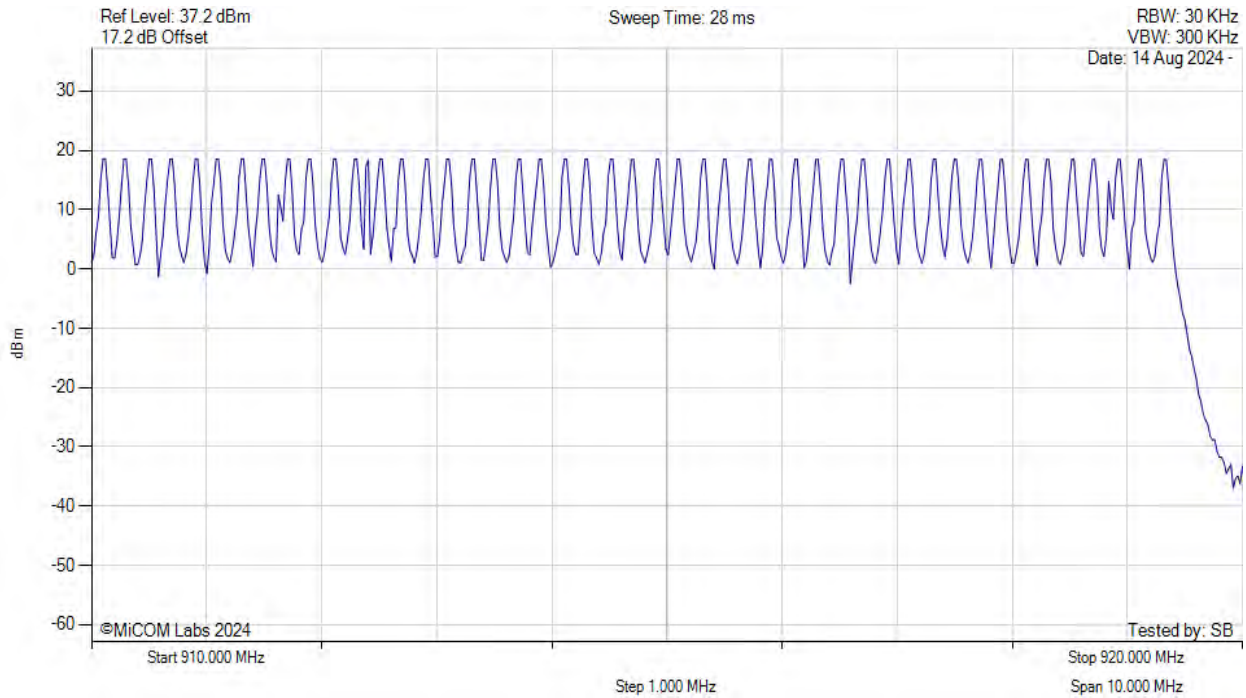


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 914.80 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: FSK 10kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

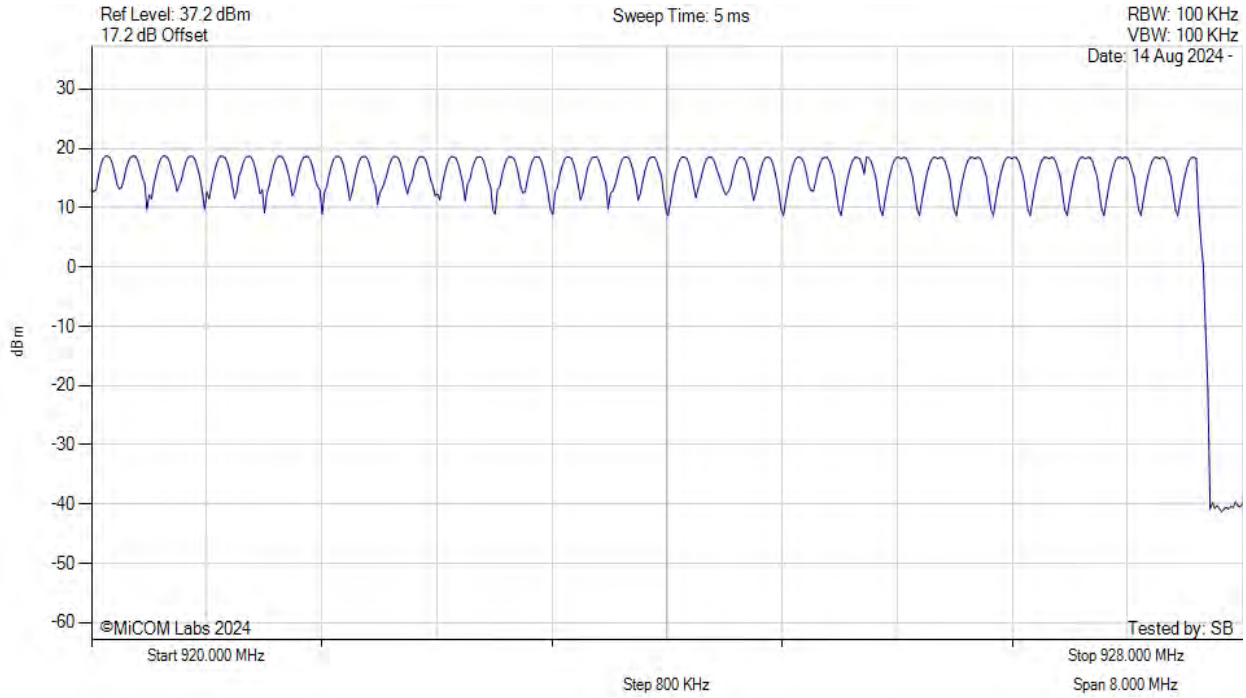


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 914.80 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: GFSK 200kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

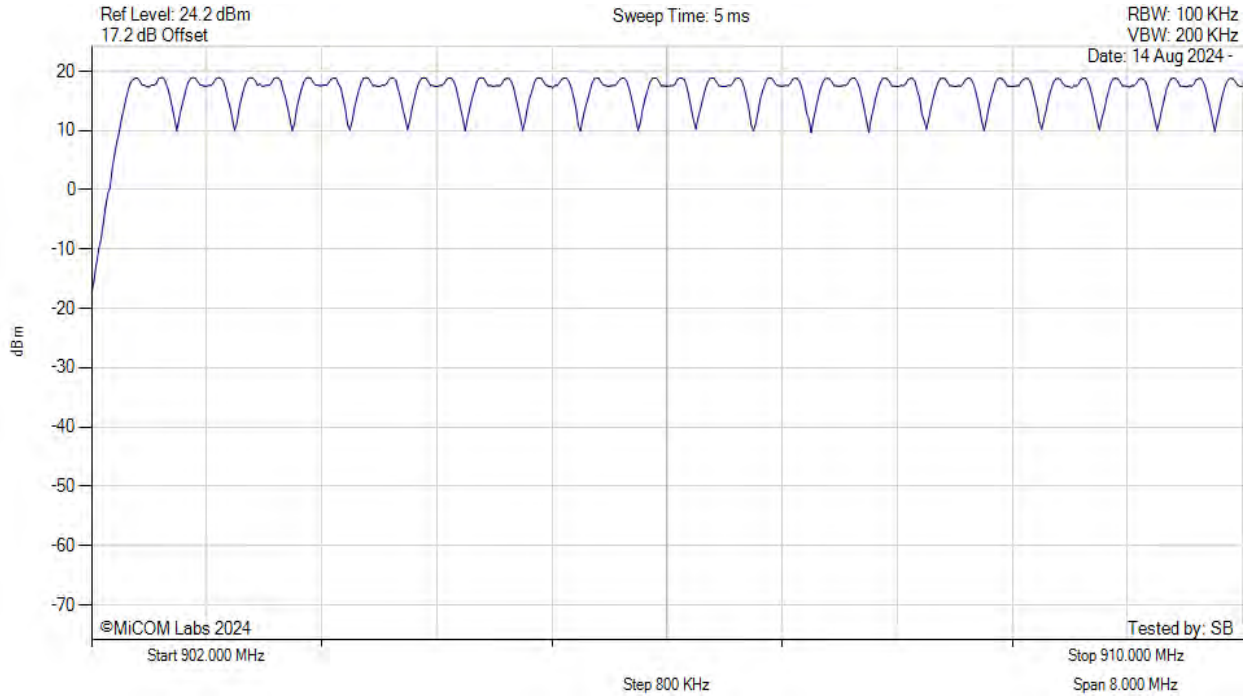


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 914.80 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: GFSK 200kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

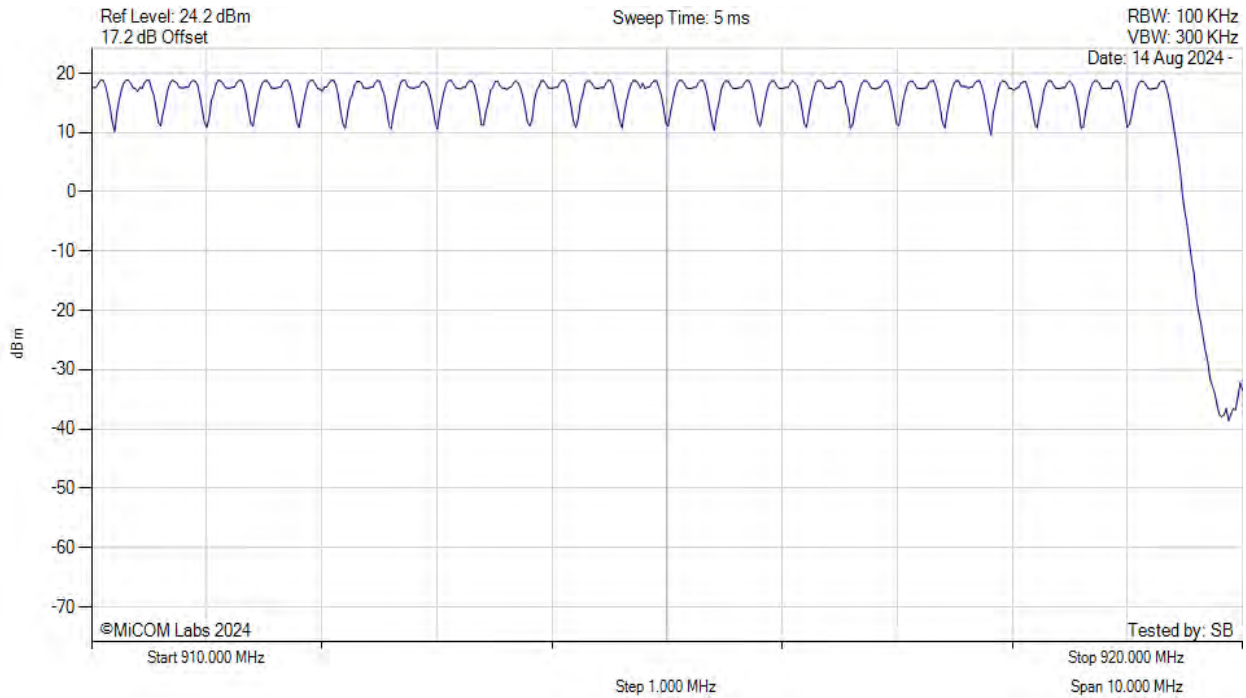


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 914.80 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: GFSK 200kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

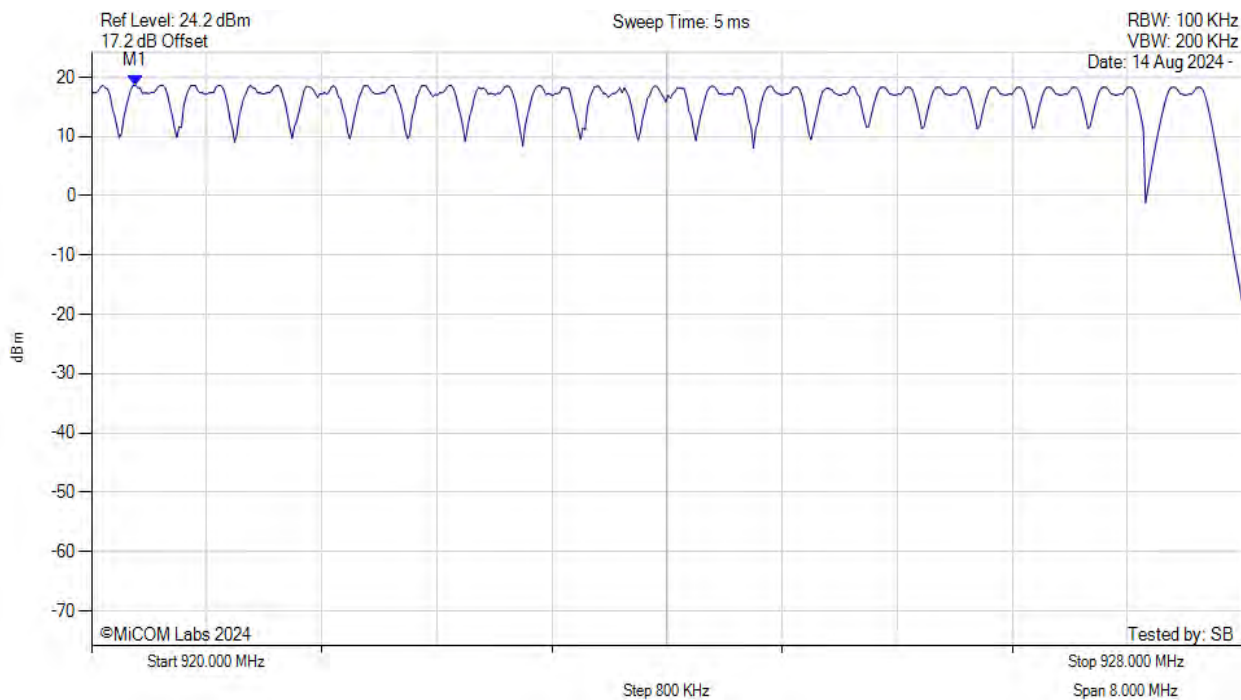

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 920.305 MHz : 18.654 dBm	Channel Frequency: 914.80 MHz


[back to matrix](#)

A.2.2. Channel Separation

CHANNEL SEPARATION



Variant: FSK 10kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

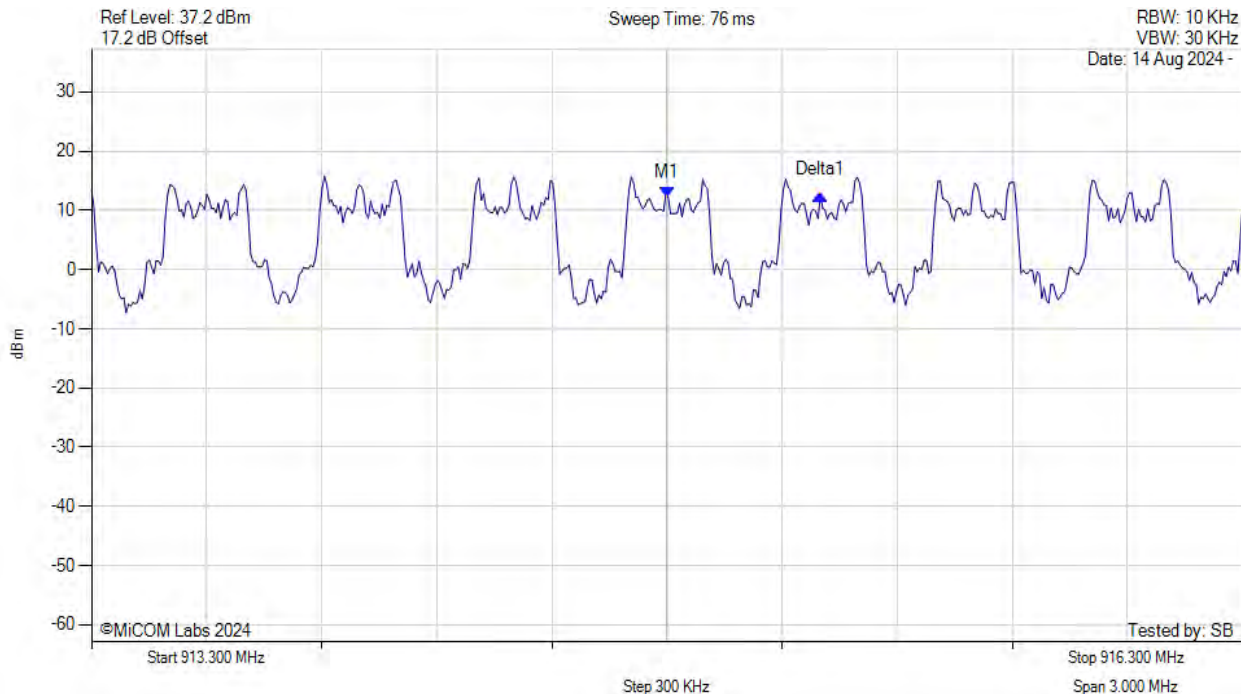


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 914.800 MHz : 12.262 dBm Delta1 : 400 KHz : 0.358 dB	Channel Frequency: 914.80 MHz

[back to matrix](#)

CHANNEL SEPARATION



Variant: GFSK 200kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

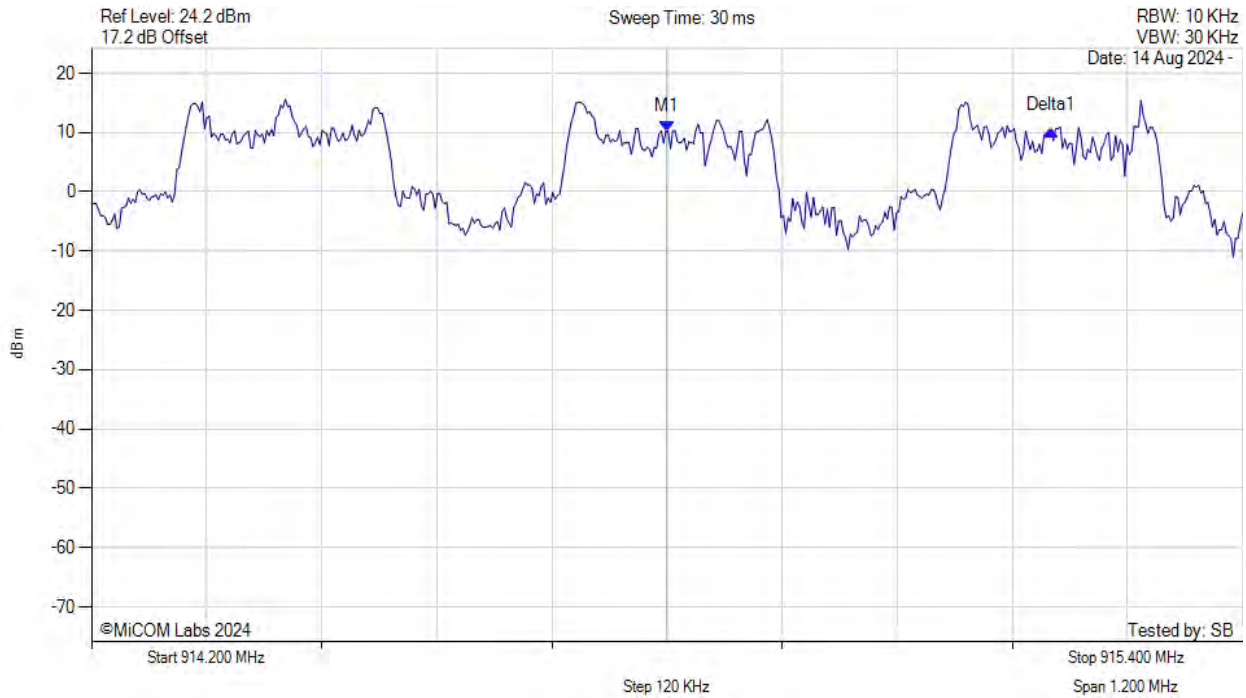

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 914.800 MHz : 10.220 dBm Delta 1 : 400 KHz : 0.203 dB	Channel Frequency: 914.80 MHz


[back to matrix](#)

A.2.3. Dwell Time

DWELL TIME



Variant: FSK 10kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

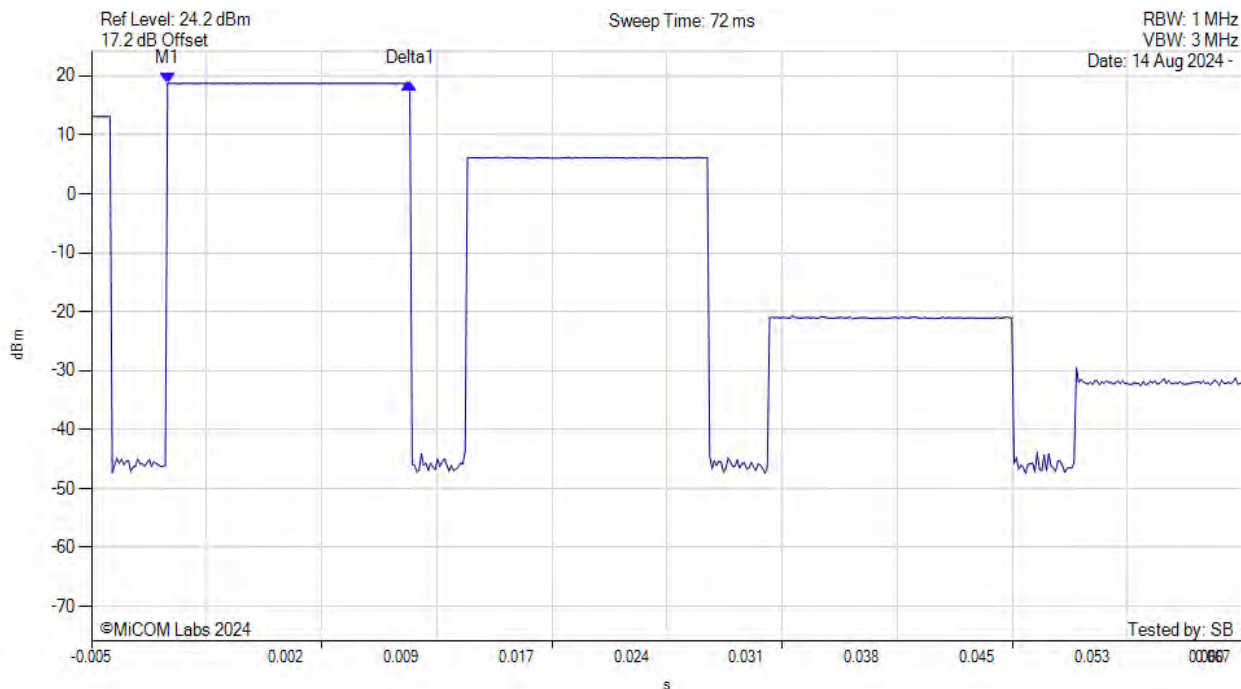


Analyzer Setup	Marker: Time: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(914.80 MHz) : 0.000 s : 18.756 dBm Delta1(914.80 MHz) : 0.015 s : -0.010 dB	Channel Frequency: 914.80 MHz

[back to matrix](#)

DWELL TIME



Variant: GFSK 200kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

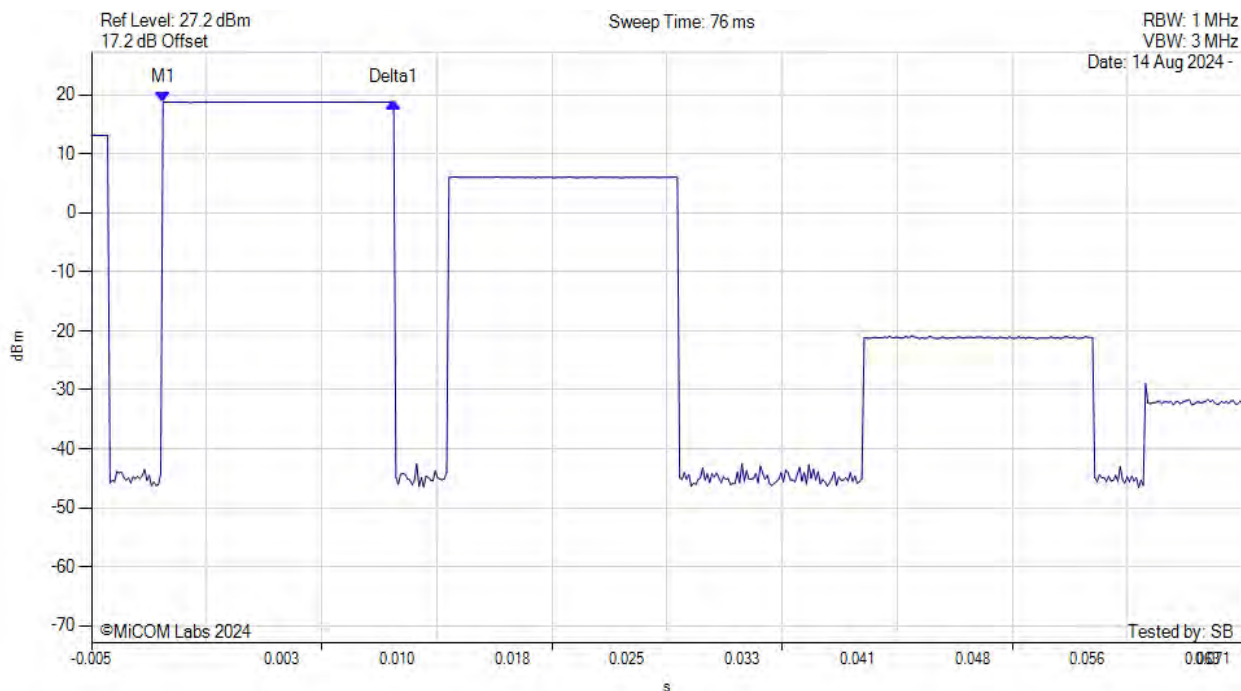

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(914.80 MHz) : 0.000 s : 18.731 dBm Delta1(914.80 MHz) : 0.015 s : 0.000 dB	Channel Frequency: 914.80 MHz


[back to matrix](#)

A.2.4. Channel Occupancy

CHANNEL OCCUPANCY



Variant: FSK 10kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

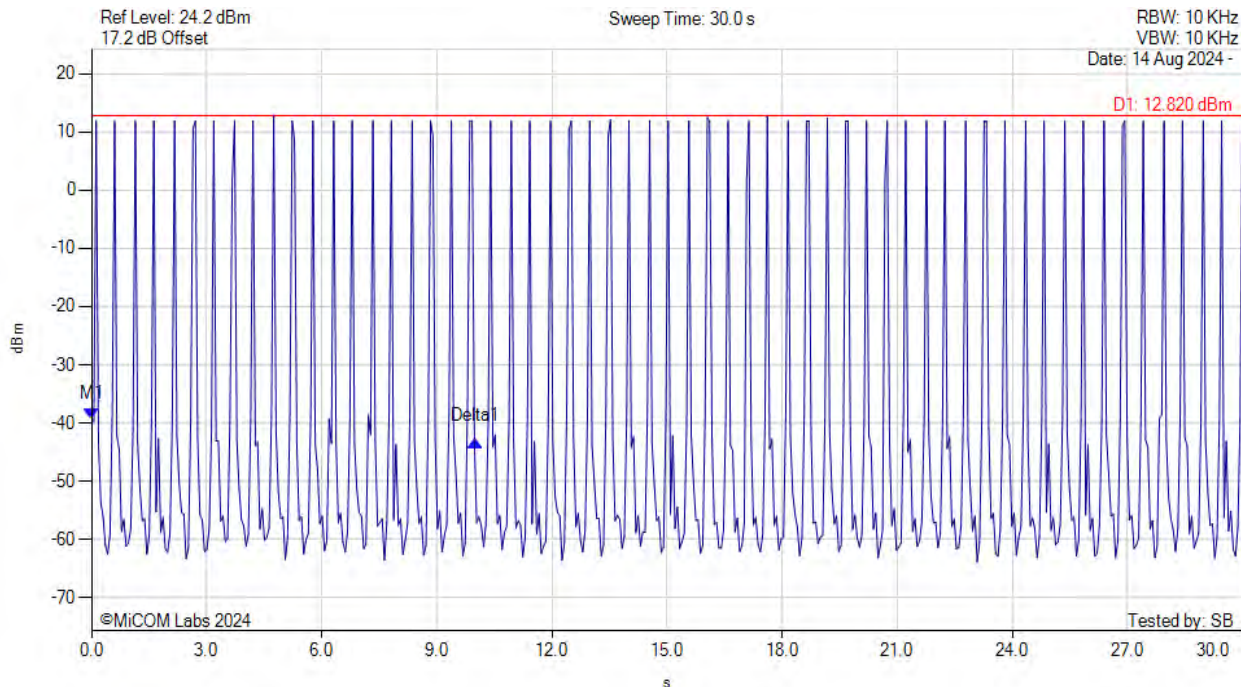


Analyzer Setup	Marker: Time: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(914.80 MHz) : 0.000 s : -39.326 dBm Delta1(914.80 MHz) : 10.000 s : -3.840 dB	Channel Frequency: 914.80 MHz

[back to matrix](#)

CHANNEL OCCUPANCY



Variant: GFSK 200kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

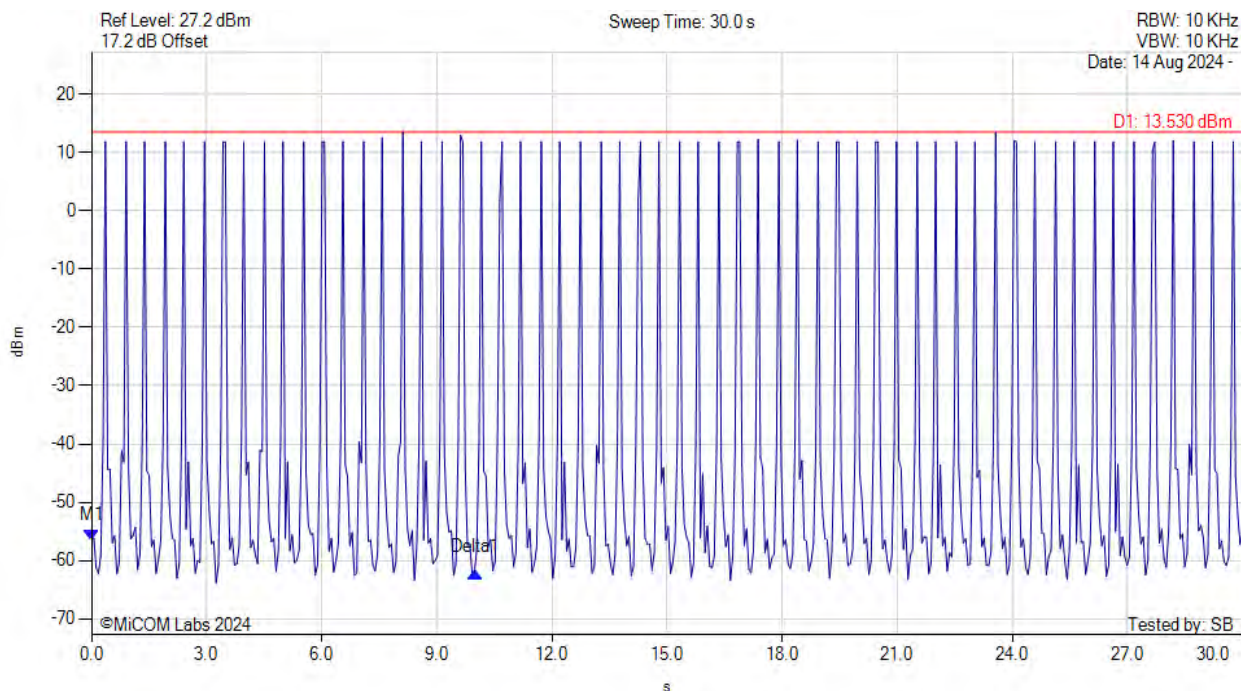


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(914.80 MHz) : 0.000 s : -56.580 dBm Delta1(914.80 MHz) : 10.000 s : -5.503 dB	Channel Frequency: 914.80 MHz

[back to matrix](#)

A.3. Emissions

A.3.1. Conducted Emissions

A.3.1.1. Conducted Unwanted Spurious Emissions

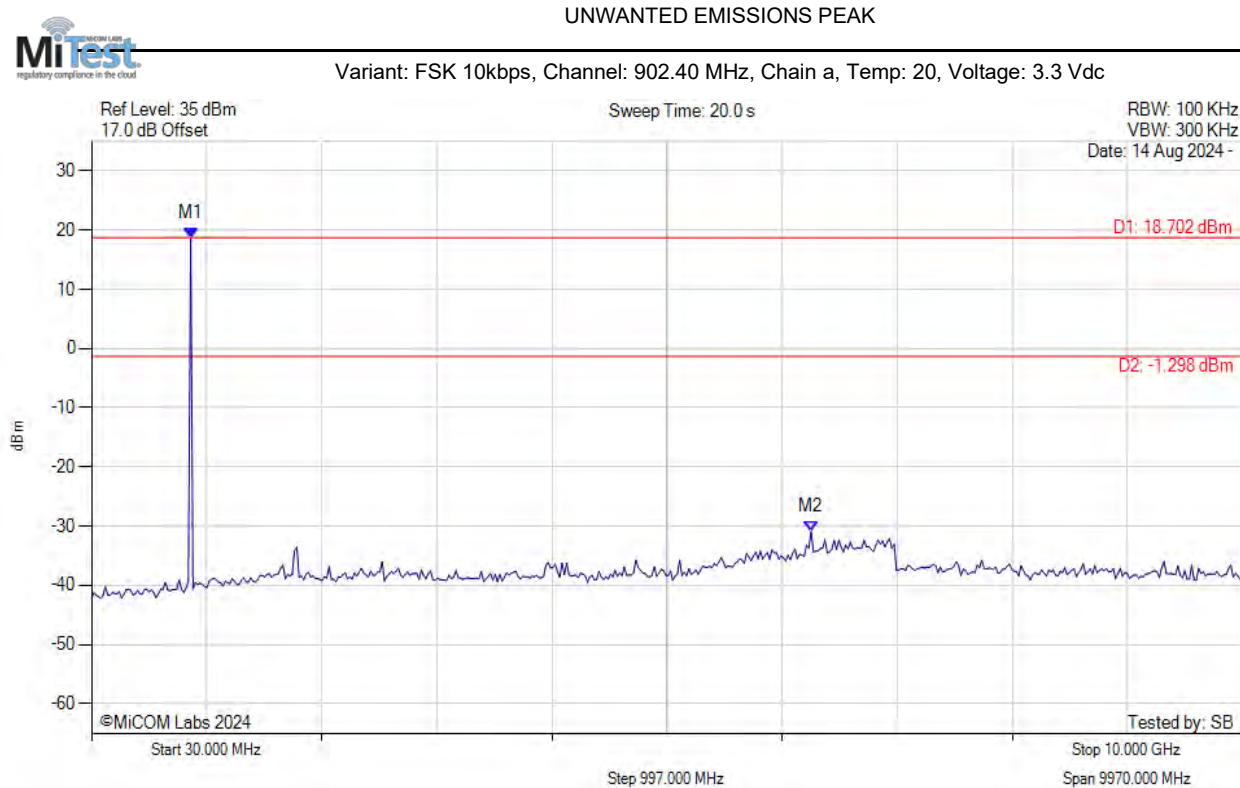


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 889.138 MHz : 18.702 dBm M2 : 6263.747 MHz : -30.940 dBm	Limit: -1.30 dBm Margin: -29.64 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: FSK 10kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

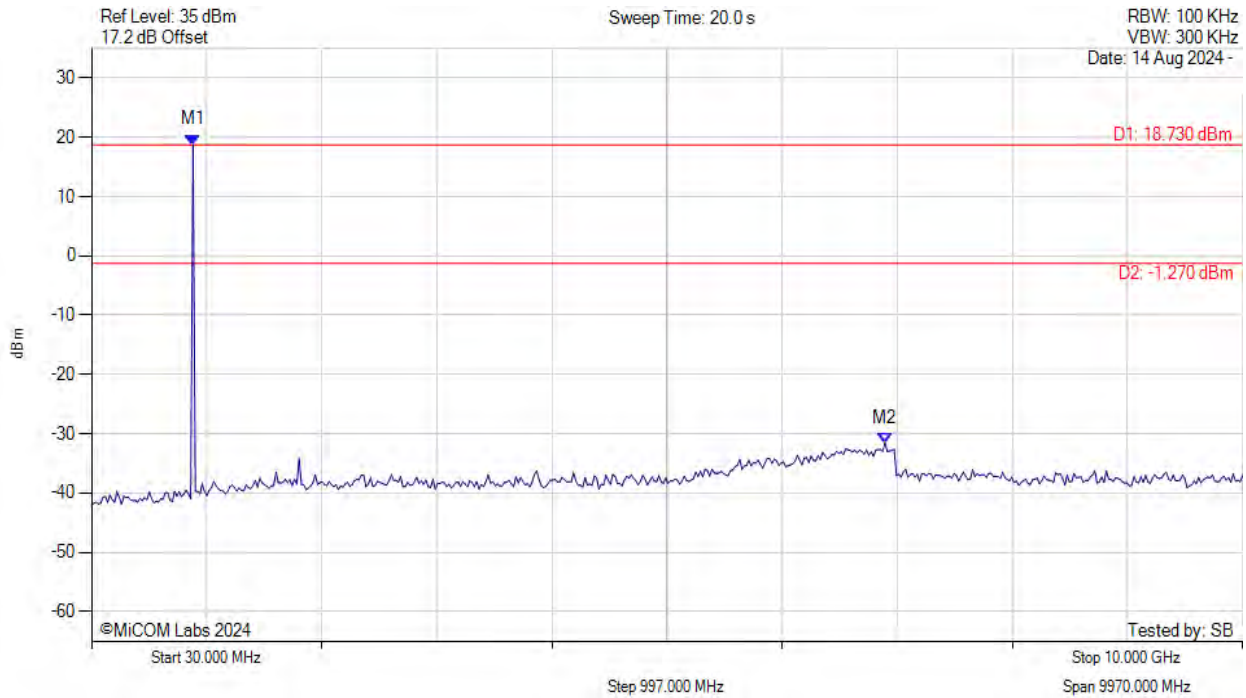


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 909.118 MHz : 18.730 dBm M2 : 6903.106 MHz : -31.556 dBm	Limit: -1.27 dBm Margin: -30.29 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: FSK 10kbps, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

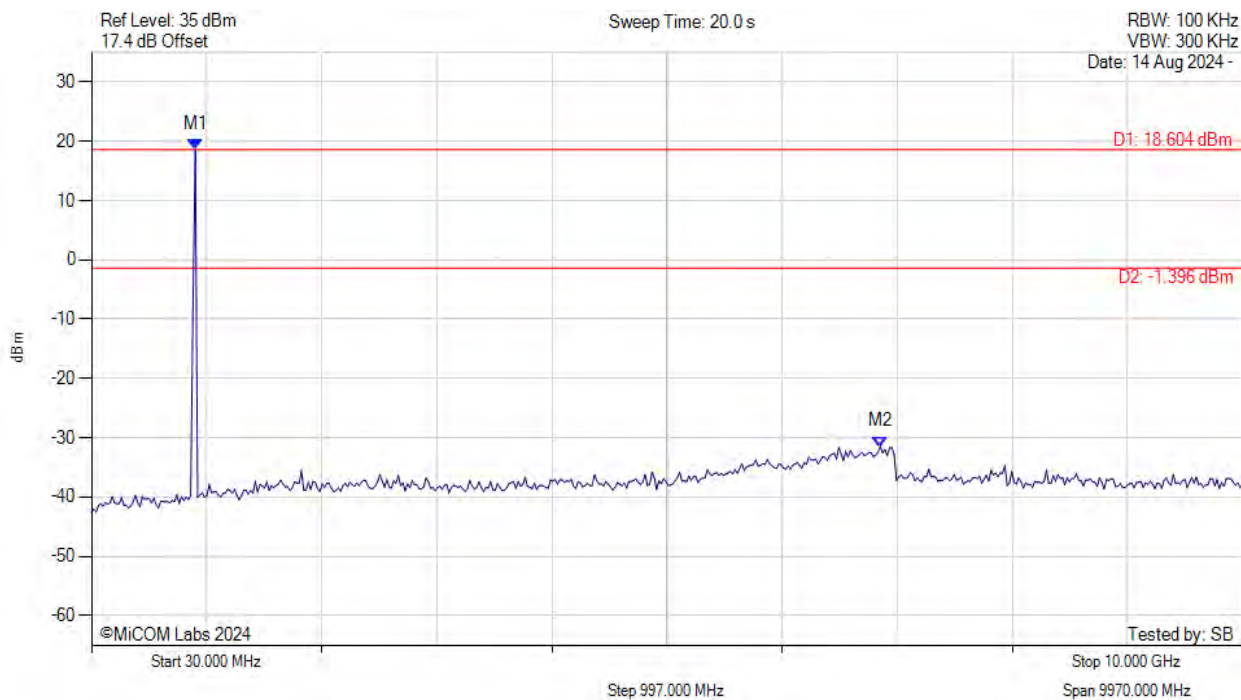


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 929.098 MHz : 18.604 dBm M2 : 6863.146 MHz : -31.518 dBm	Limit: -1.40 dBm Margin: -30.12 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: GFSK 200kbps, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

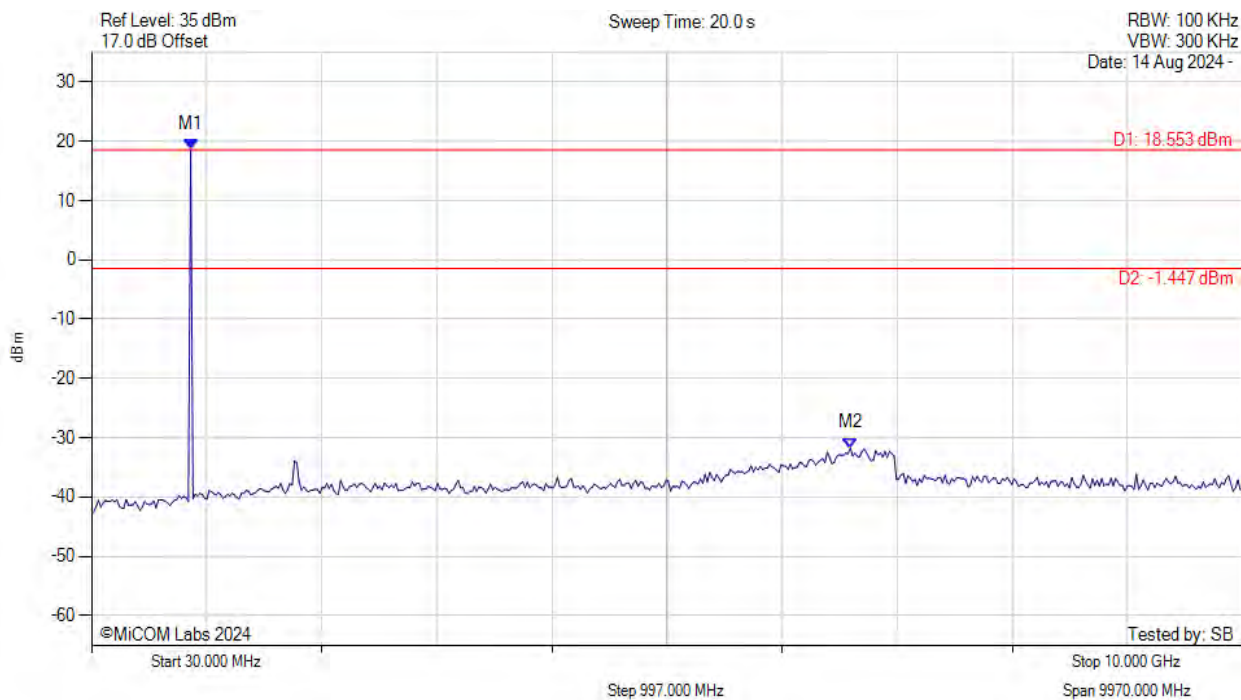


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 889.138 MHz : 18.553 dBm M2 : 6603.407 MHz : -31.743 dBm	Limit: -1.45 dBm Margin: -30.29 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: GFSK 200kbps, Channel: 914.80 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

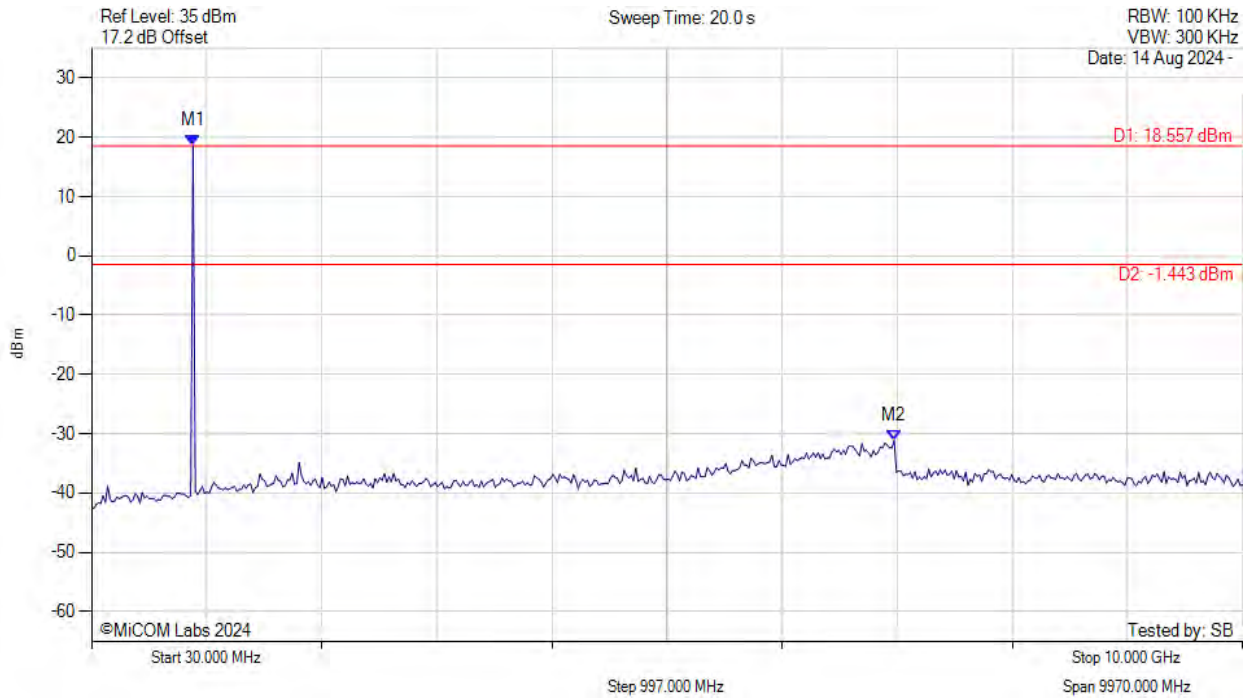


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 909.118 MHz : 18.557 dBm M2 : 6983.026 MHz : -31.141 dBm	Limit: -1.44 dBm Margin: -29.70 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: GFSK 200kbps, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

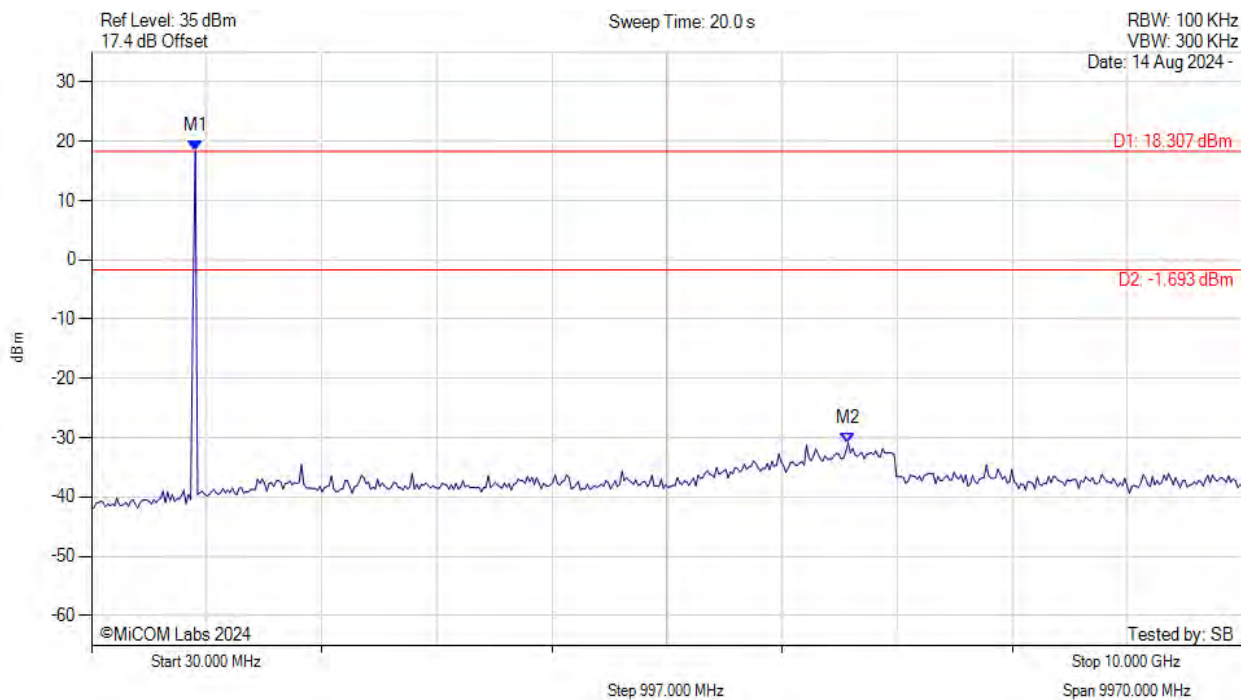

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 929.098 MHz : 18.307 dBm M2 : 6583.427 MHz : -30.871 dBm	Limit: -1.69 dBm Margin: -29.18 dB


[back to matrix](#)

A.3.1.2. Conducted Band-Edge Emissions

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: FSK 10kbps, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

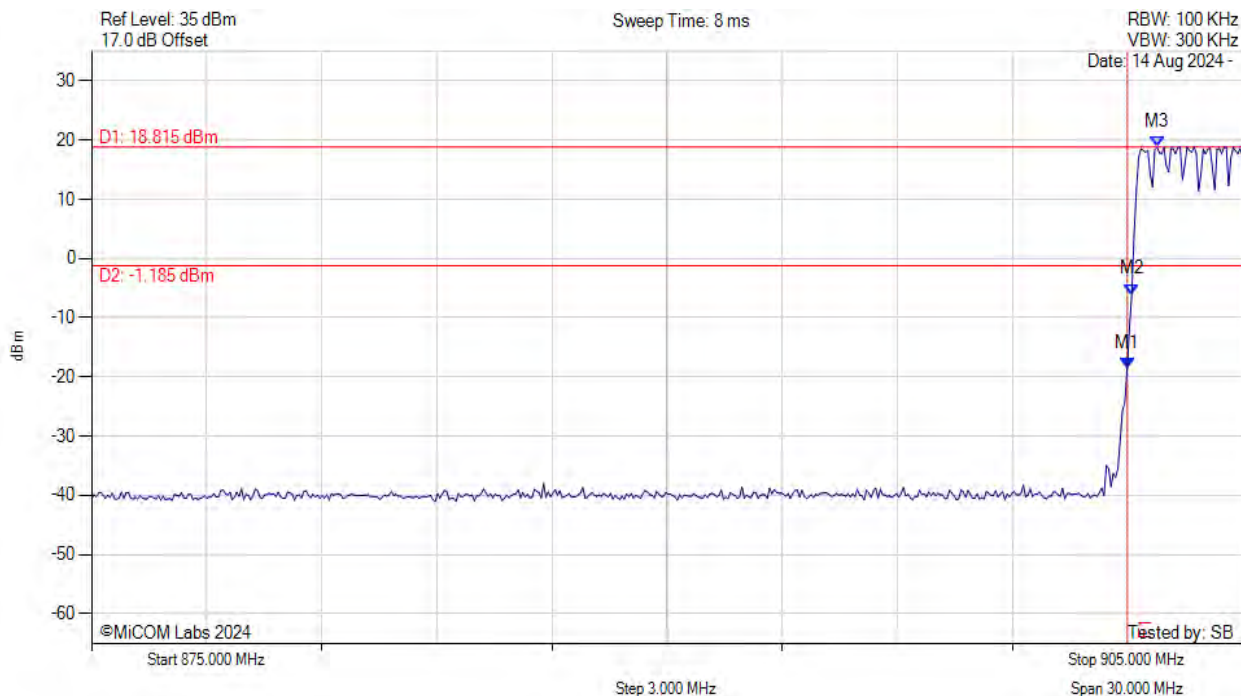


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -18.455 dBm M2 : 902.114 MHz : -6.033 dBm M3 : 902.776 MHz : 18.815 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: GFSK 200kbps, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

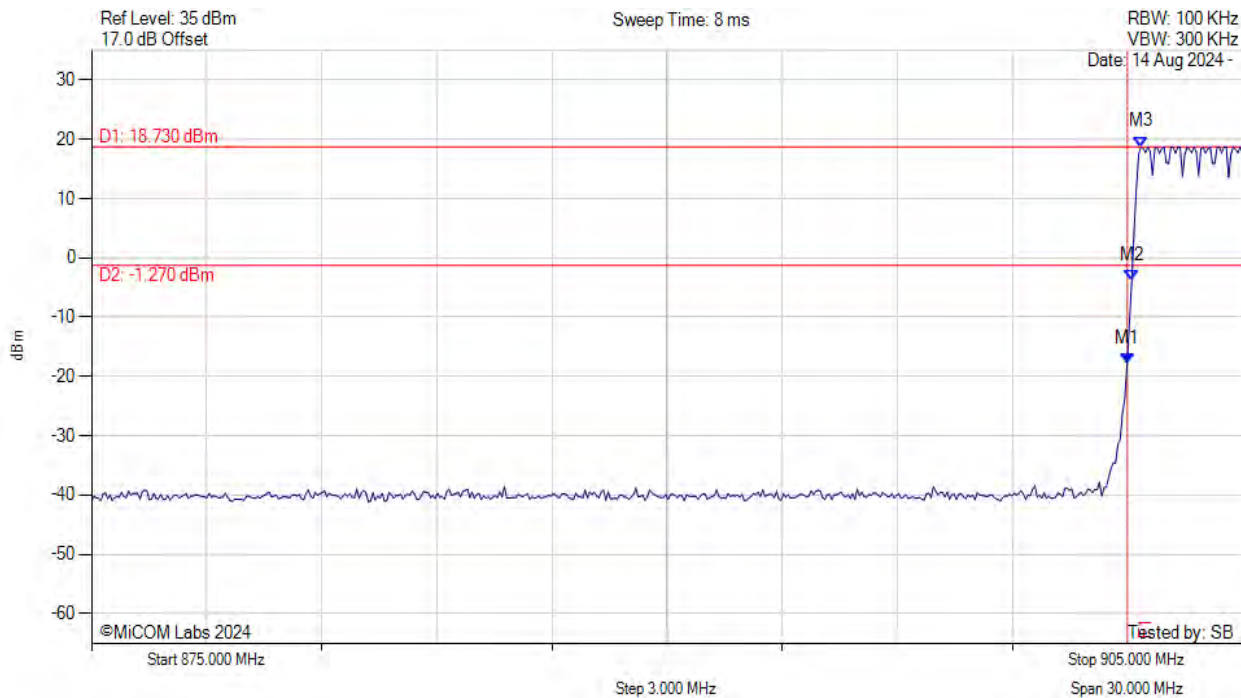


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -17.877 dBm M2 : 902.114 MHz : -3.784 dBm M3 : 902.355 MHz : 18.730 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: FSK 10kbps, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

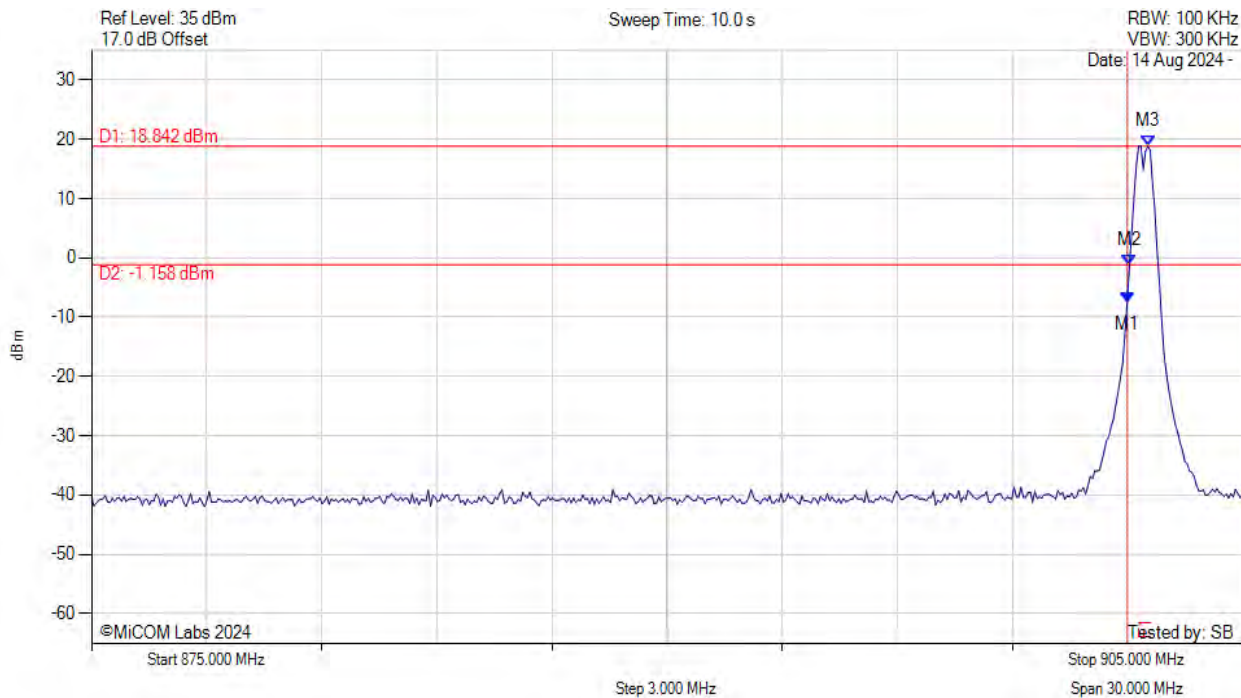


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -7.625 dBm M2 : 902.054 MHz : -1.341 dBm M3 : 902.535 MHz : 18.842 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: GFSK 200kbps, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

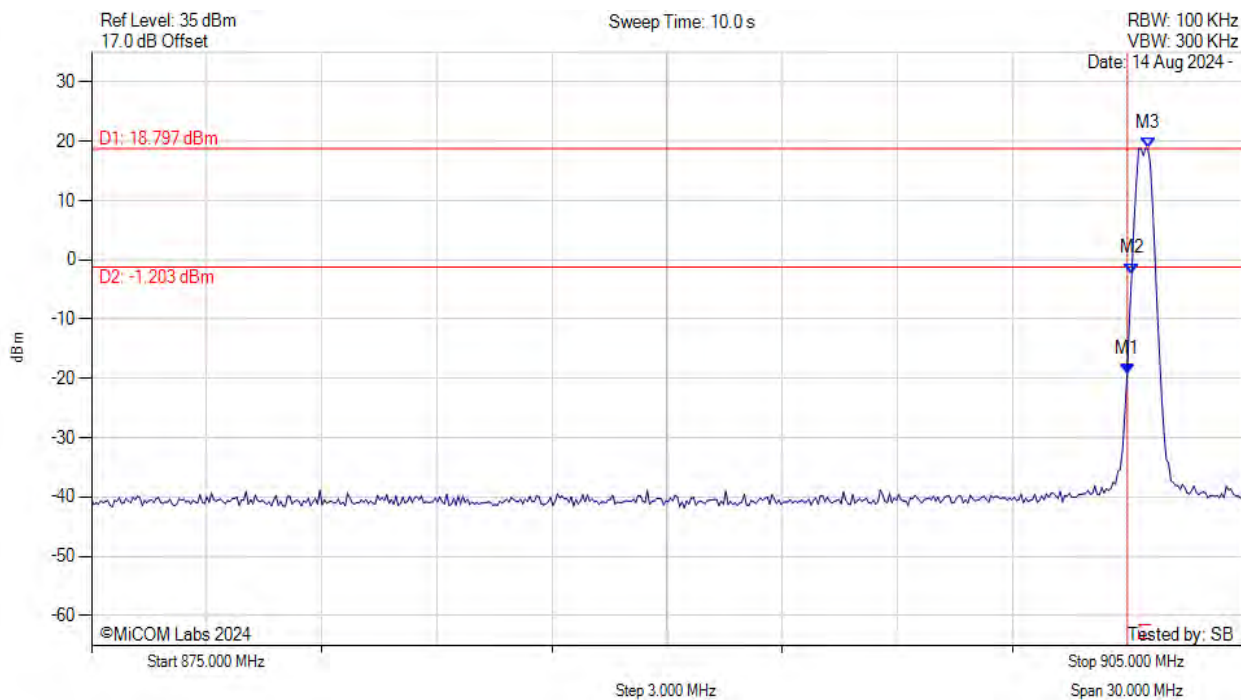


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -19.250 dBm M2 : 902.114 MHz : -2.301 dBm M3 : 902.535 MHz : 18.797 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: FSK 10kbps, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

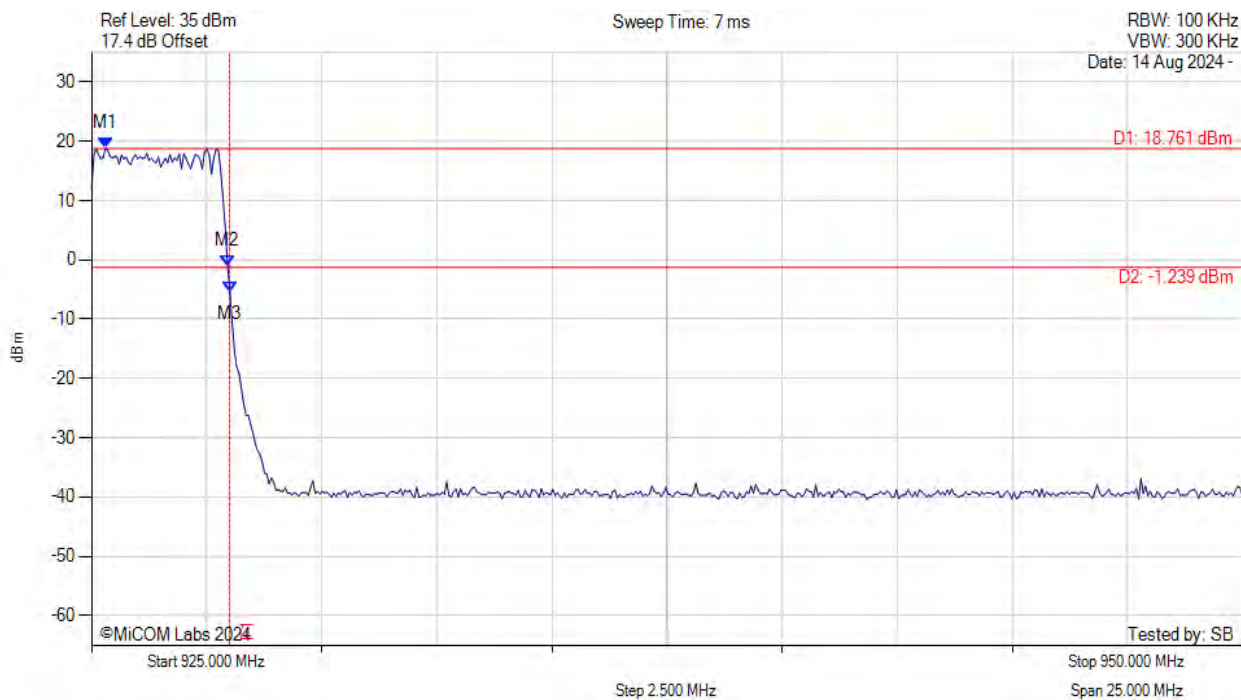


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 925.301 MHz : 18.761 dBm M2 : 927.956 MHz : -1.020 dBm M3 : 928.000 MHz : -5.484 dBm	Channel Frequency: 927.60 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: GFSK 200kbps, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

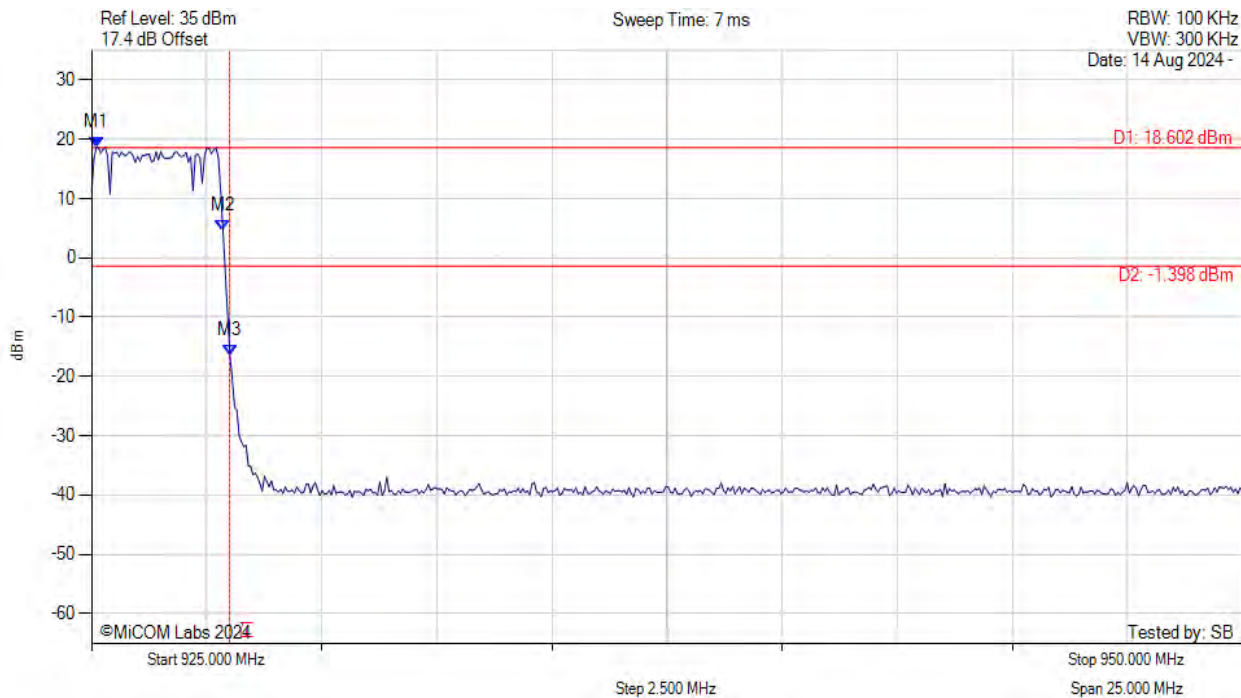


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 925.100 MHz : 18.602 dBm M2 : 927.856 MHz : 4.547 dBm M3 : 928.000 MHz : -16.460 dBm	Channel Frequency: 927.60 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: FSK 10kbps, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

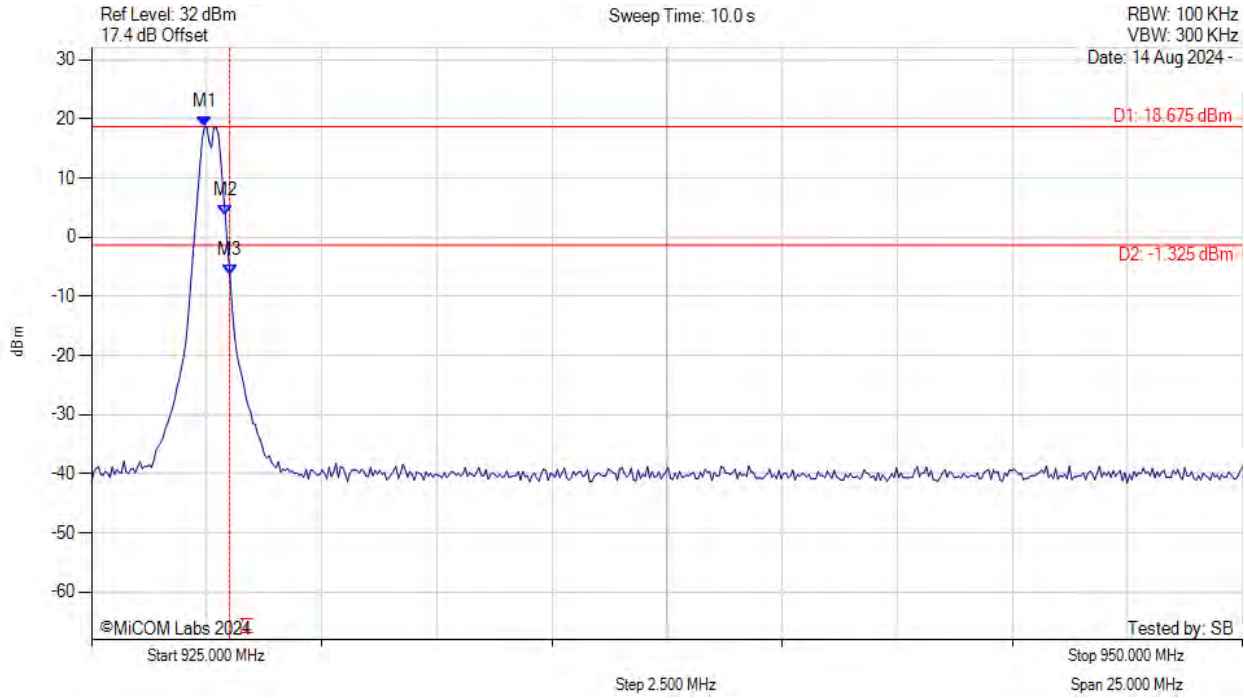


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 927.455 MHz : 18.675 dBm M2 : 927.906 MHz : 3.595 dBm M3 : 928.000 MHz : -6.448 dBm	Channel Frequency: 927.60 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: GFSK 200kbps, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

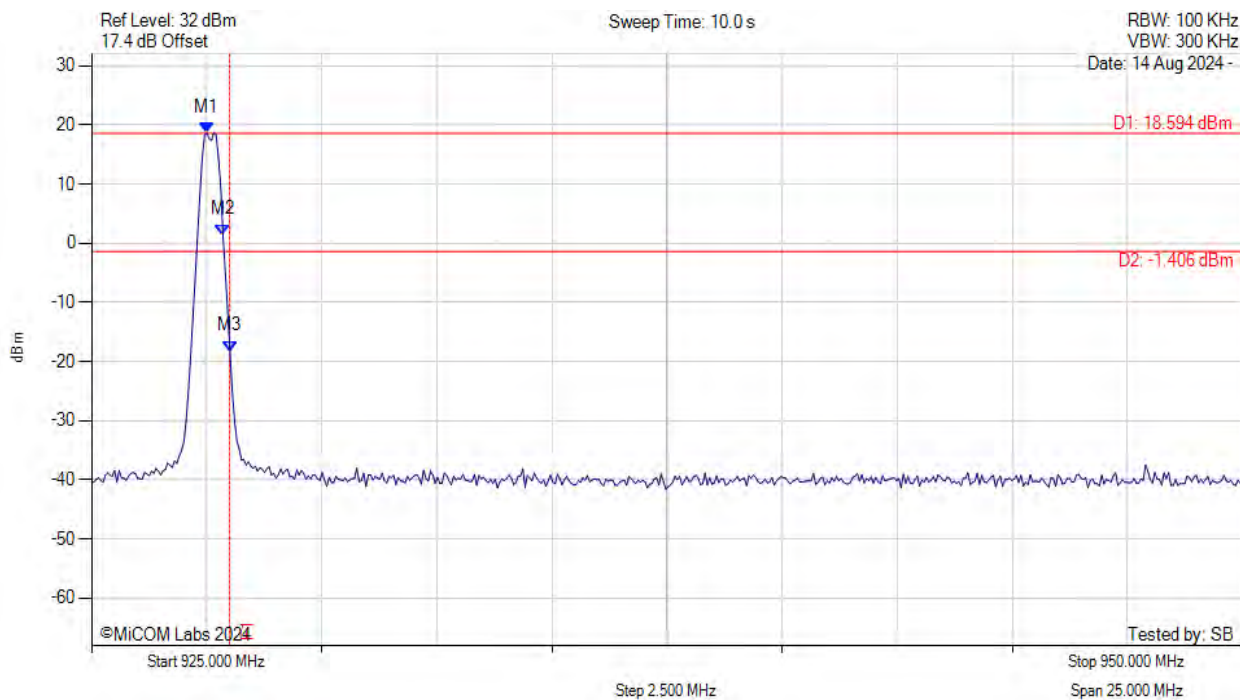

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 927.505 MHz : 18.594 dBm M2 : 927.856 MHz : 1.429 dBm M3 : 928.000 MHz : -18.276 dBm	Channel Frequency: 927.60 MHz

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com