

TABLE OF CONTENTS LIST

APPLICANT: RANGER ELECTRONIC ( SHANGHAI ) INC.

FCC ID: MEE-DX-979

PAGE 1.....	COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE 2-3....	TECHNICAL DESCRIP. CONTINUED. AND RF POWER OUTPUT
PAGE 4.....	AUDIO FREQUENCY RESPONSE
PAGE 5-6....	AUDIO INPUT VS MODULATION GRAPH
PAGE 7.....	PEP POWER PLOT
PAGE 8.....	OVERMODULATION TRANSIENT RESPONSE
PAGE 9.....	TRANSIENT RESPONSE PLOTS
PAGE 10.....	OCCUPIED BANDWIDTH TEST PROCEDURES
PAGE 11.....	OCCUPIED BANDWIDTH PLOT AM
PAGE 12.....	OCCUPIED BANDWIDTH PLOT - 2500 SIGNAL AM
PAGE 13.....	OCCUPIED BANDWIDTH PLOT -CW
PAGE 14.....	OCCUPIED BANDWIDTH TEST PROCEDURES
PAGE 15.....	LOWER SIDE BAND PLOT
PAGE 16.....	UPPER SIDE BAND PLOT
PAGE 17-18..	SPURIOUS EMISSIONS AT ANTENNA TERMINALS TEST PROCEDURE
PAGE 19.....	UNWANTED EMISSIONS
PAGE 20.....	MEHTOD OF MESAURING RADIATED EMISSIONS
PAGE 21.....	FREQUENCY STABILITY
PAGE 22-25..	LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1...	SCHEMATICS
EXHIBIT 2...	BLOCK DIAGRAM
EXHIBIT 3...	EXTERNAL PHOTOGRAPHS
EXHIBIT 4...	INTERNAL PHOTOGRAPHS
EXHIBIT 5...	FCC ID LABEL SAMPLE AND SKETCH OF LOCATION
EXHIBIT 6...	PARTS LIST
EXHIBIT 7...	TUNING PROCEDURE
EXHIBIT 8...	CIRCUIT DESCRIPTION
EXHIBIT 9...	OWNER'S MANUAL
EXHIBIT 10..	TEST SETUP PHOTOGRAPH
EXHIBIT 11...	AMPLIFIER SPECIFICATION

APPLICANT: RANGER ELECTRONIC ( SHANGHAI ) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

TABLE OF CONTENTS LIST



GENERAL INFORMATION REQUIRED  
FOR TYPE ACCEPTANCE

2.1033(c)(1)(2) RANGER ELECTRONIC ( SHANGHAI) INC. will manufacture the FCC ID:  
MEE-DX-979 CITIZENS BAND 40 CHANNEL TRANSCEIVER in  
quantity, for use under FCC RULES PART 95 SUBPART D.

RANGER ELECTRONIC (SHANGHAI) INC.  
FL.9, BLDG.1  
889 YISHAN ROAD  
SHANGHAI CHINA 200233

2.1033(c)(3) Instruction book. A draft copy of the instruction manual is  
included as Exhibit # 10.

2.983 (d) TECHNICAL DESCRIPTION

2.1033(c)(4) Type of Emission: 6K00A3E/2K70J3E  
95.633 ALLOWED AUTHORIZED BANDWIDTH = 8.0 kHz  
95.625 Frequency Range: 26.965 - 27.405 MHz

Calculation:

Max modulation (M) in kHz = 3 kHz  
 $B_n = 2 * M = 2 * 3 \text{ kHz} = 6 \text{ kHz}$  Amplitude Modulation  
 $B_n = M = 3 \text{ kHz} - 300 = 2.7 \text{ kHz}$  Single Sideband

2.1033(c)(6) Power Range and Controls: There are NO user Power controls.

2.1033(c)(7) Maximum Output Power Rating as defined in the rules:  
4 watts carrier power when transmitting emission type A3E.  
12 watts PEP when transmitting emission type J3E.

2.1033(c)(8) DC 12 Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY:

CHANNEL 1	CHANNEL 20	CHANNEL 40
Vce = 13.8 Volts DC	Vce = 13.8 Volts DC	Vce = 13.8 Volts DC
Ice = 1.95 A.	Ice = 1.98 A.	Ice = 1.94 A.
Pin = 26.91 Watts	Pin = 27.234	Pin = 26.772

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included as  
Exhibit # 8.

2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included  
as Exhibit # 2. The block diagram is included as Exhibit # 1.

2.1033(c)(11) A photograph for drawing of the FCC ID Label and the  
where it will be placed on the device is included as  
Exhibit # 5.

2.1033(c)(12) Photographs of the equipment of sufficient clarity to reveal  
equipment construction and layout, including meters, labels  
for controls, including any view under shields are included  
as Exhibits # 3-4.

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

2.1033(c)(13) Digital modulation. This unit does not use digital modulation.

2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.

2.1046 RF power output.  
95.639

The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.


With applied voltage of 13.8 VDC, output measurement results are:

CHANNEL 1 = 3.6 WATTS  
AM PEP = 39 dBm

CHANNEL 20 = 3.6 WATTS  
AM PEP = 39 dBm

CHANNEL 40 = 3.5 WATTS  
AM PEP = 39 dBm

#### METHOD OF MEASURING RF POWER OUTPUT

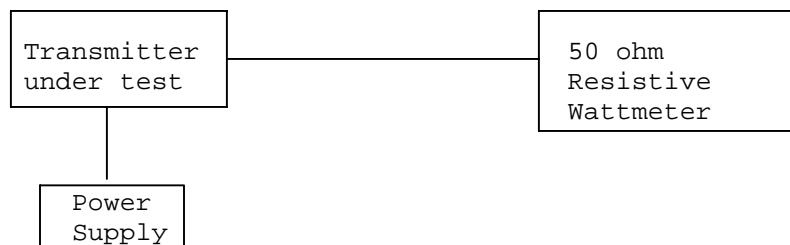

95.645(a) No control, switch, or other type adjustment, which, when manipulated can results in a violation of the rules.


95.655 All frequency determining elements, including crystals, PLL integrated circuits, and channel selection are permanently mounted and soldered internal to the transmitter and cannot be accessed through the front panel or from the enclosure exterior.

- 95.667        Dissipation rating of the final amplifier which supplies RF power to the antenna terminal must not exceed 10 W. This EUT uses 2SC2078, 27 MHz High Frequency Power Amplifier. The specification sheet is shown as Exhibit 11. Collector dissipation is listed at 1.2 Watts.
- 95.669        External Controls:  
This EUT meets the applicable provisions of 95.669. External controls are limited to the control functions as described in Chapter 3 of the users manual.
- 95.671        The serial number of each unit will be implemented in accordance with 95.671. Please see label sample submitted.
- 95.673        A copy of Part 95, Subpart D, of the FCC rules, current at the time of packing of the transmitter will be furnished with each EUT marketed.

2.1047 Modulation characteristics:

2.1047(a) AUDIO FREQUENCY RESPONSE


The audio frequency response was measured in accordance with EIA Specification RS-382A. The audio frequency response curve is shown below. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured.

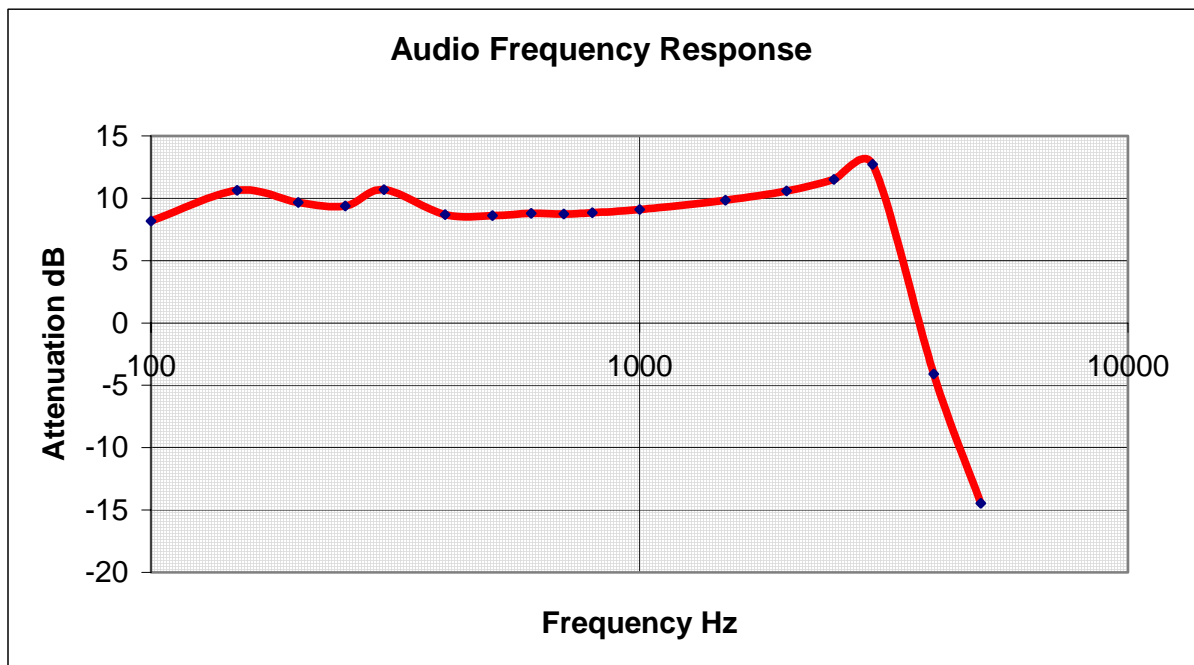


2.1047(b)

Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with EIA Specification RS-382A. The audio input curves versus modulation are below. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz.

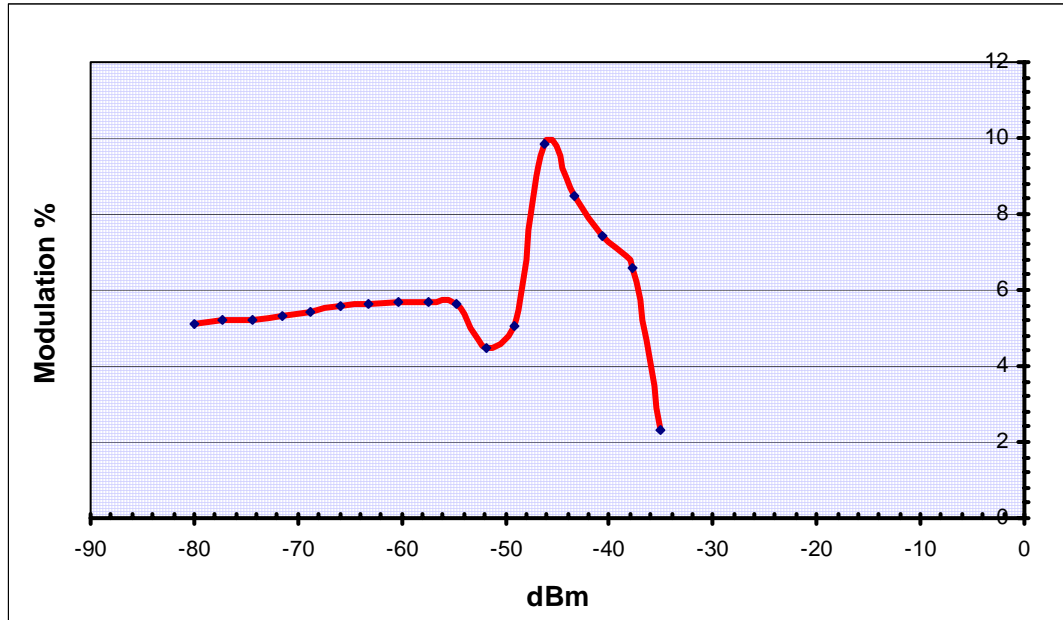

300Hz

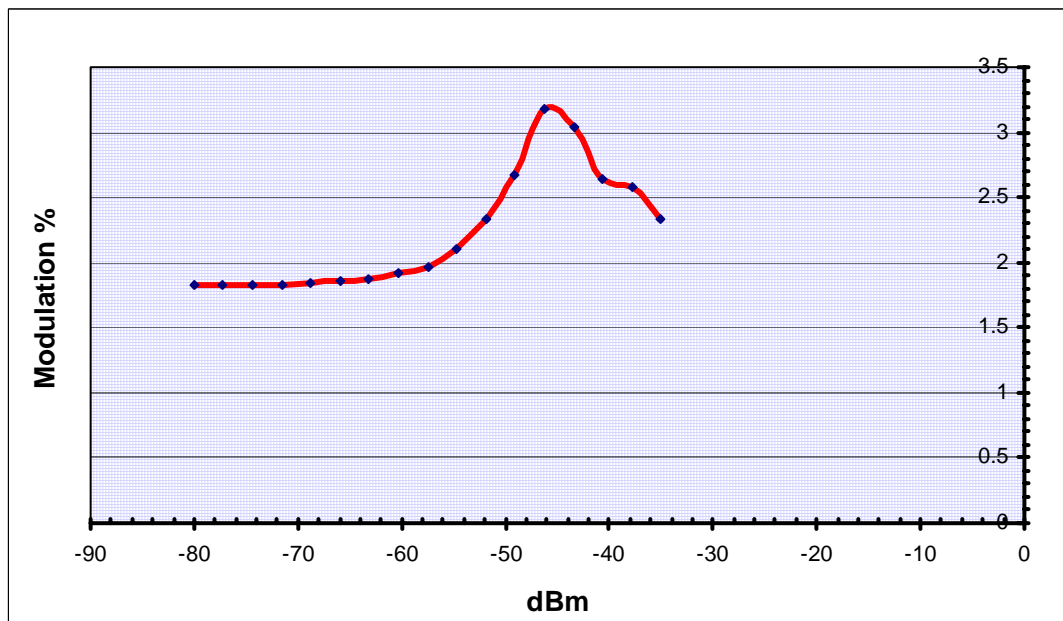



1000Hz

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

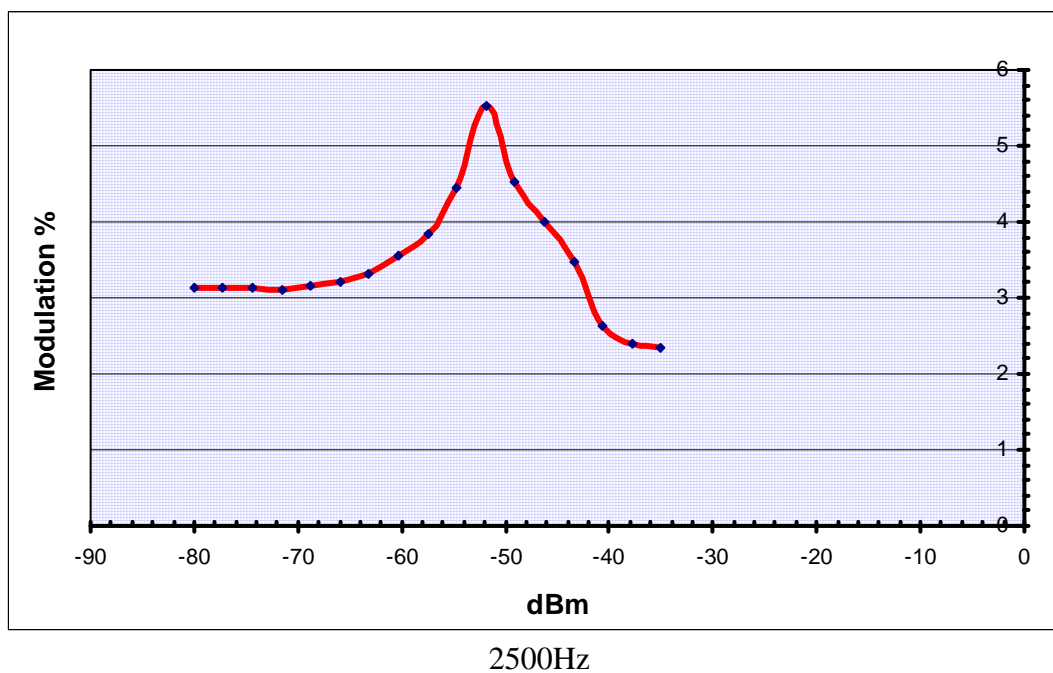

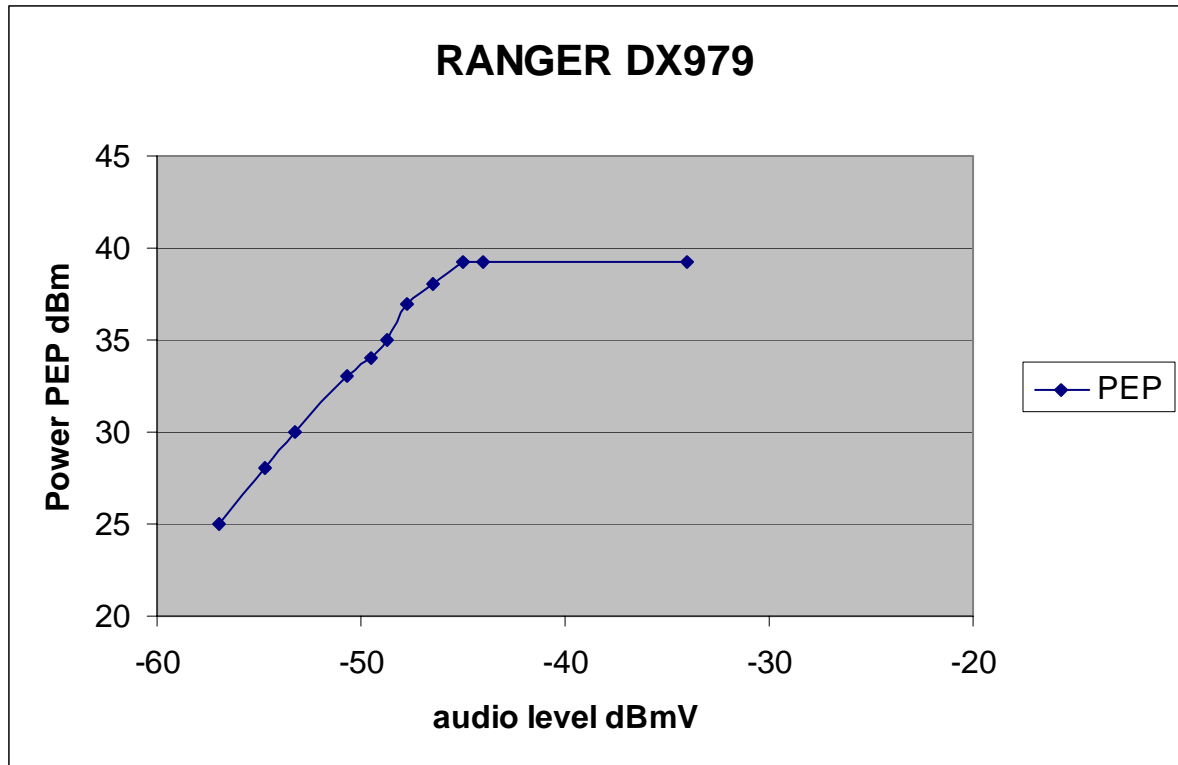


OVER MODULATION TRANSIENT RESPONSE


## A. MEASUREMENT PROCEDURE

1. Set audio modulating signal at 2500Hz, at a level 16dB greater than required for 50% modulation at audio frequency of maximum response. This signal is pulsed at one(1) P.P.S. with a pulse width of 0.5sec.
2. Tune the Spectrum Analyzer to the channel on which channel on which the transmitter is set and adjust the settings as for the measurement of occupied bandwidth.
3. Then tune the Spectrum analyzer to the adjacent channel (+,-10KHz) to that on which the transmitter is set, place it in the "ZERO-SCAN", then observe the transients caused by the pulsed modulation.
4. The transients must have a duration of less than 100 milliseconds and be attenuated by at least 26dB.


## B. TEST SET UP

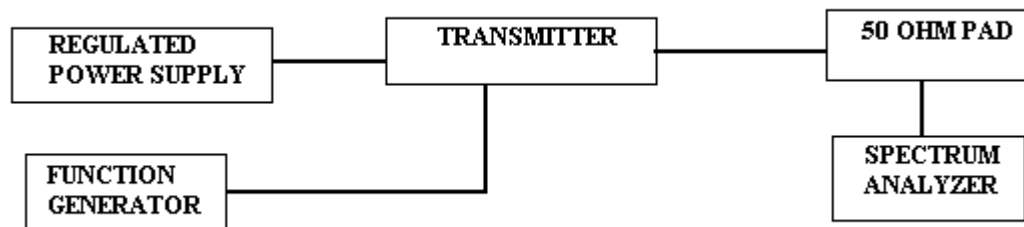

Lower Plot

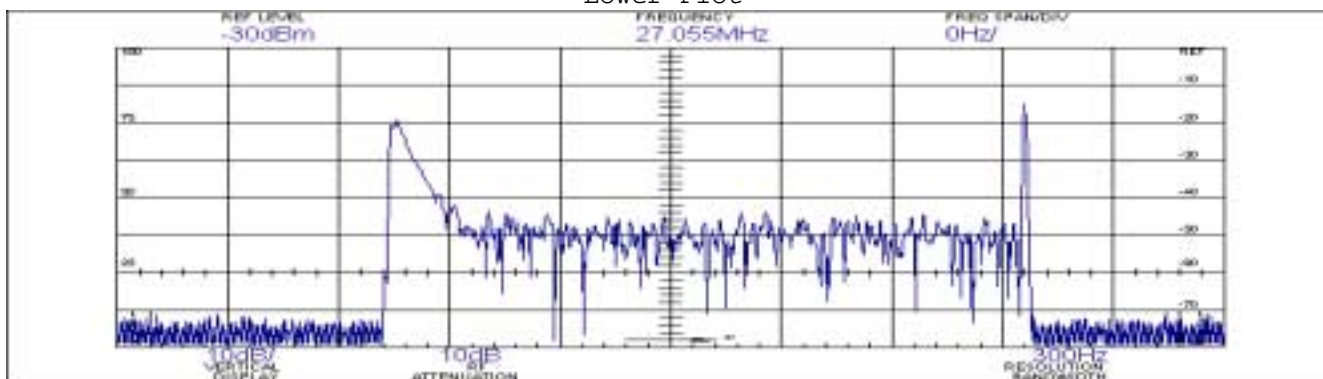

Upper Plot

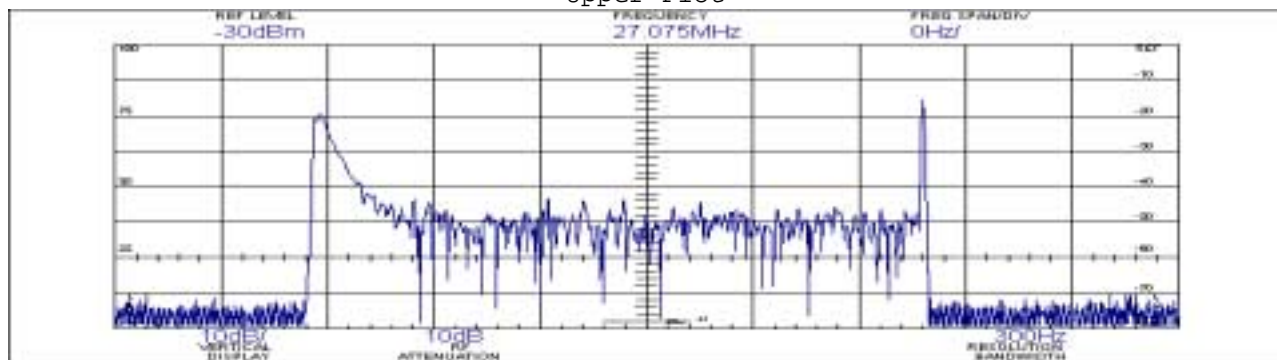

The horizontal span is 500 milliseconds or 50 milliseconds/division.

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

Page 9 of 25

2.1049  
95.633


Occupied bandwidth:

Data in the plots shows that the sidebands from greater than 50% to 100% of the authorized bandwidth must be attenuated by at least 25dB and from 100 to 250% the sidebands must be attenuated by at least 35dB. Beyond 250% the sidebands must be attenuated by at least  $53 + \log_{10}(TP)$ . The transmitter was modulated with 2500 Hz, adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the un-modulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth photographs follow.

Transmitter with modulation limiter.

Test procedure diagram


Occupied BW Test Equipment Setup

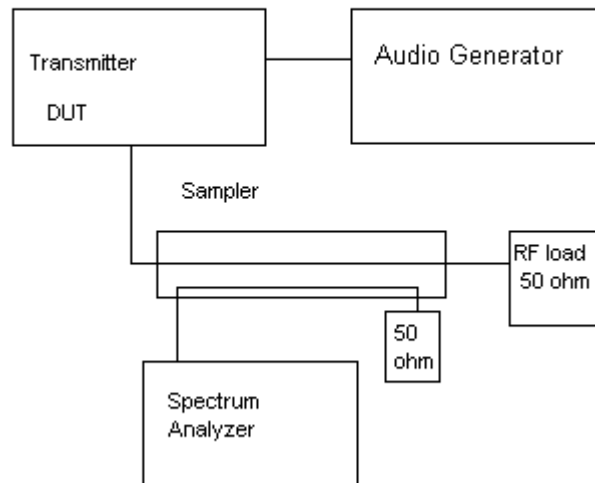

Data was taken at low, mid, and highest frequency.

Only the worse case data is shown.

OCCUPIED BANDWIDTH PLOT AM

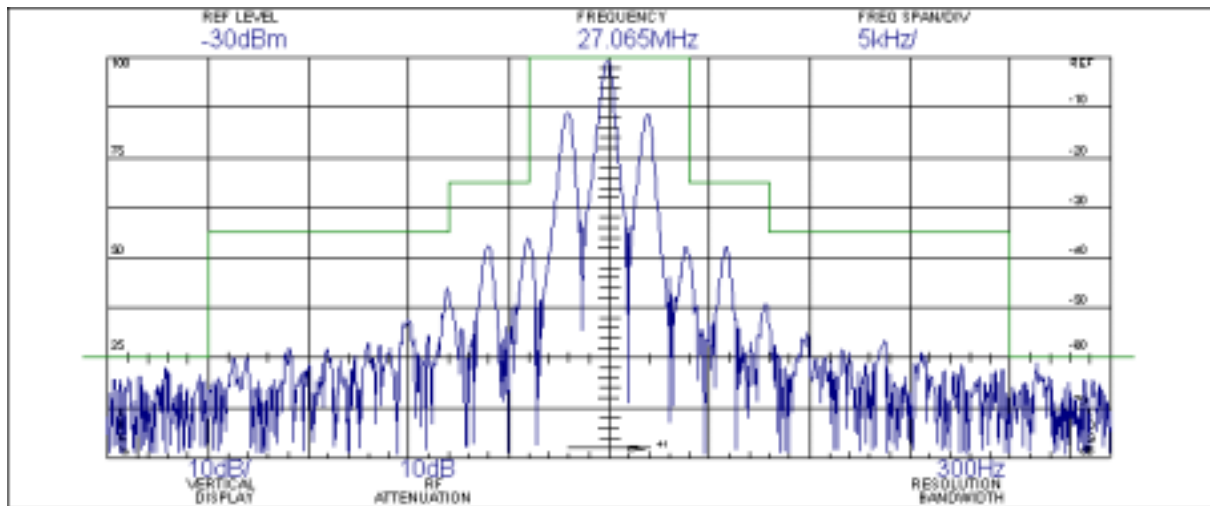


APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979


REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

Page 11 of 25

OCCUPIED BANDWIDTH - 2500 Hz SIGNAL - AM

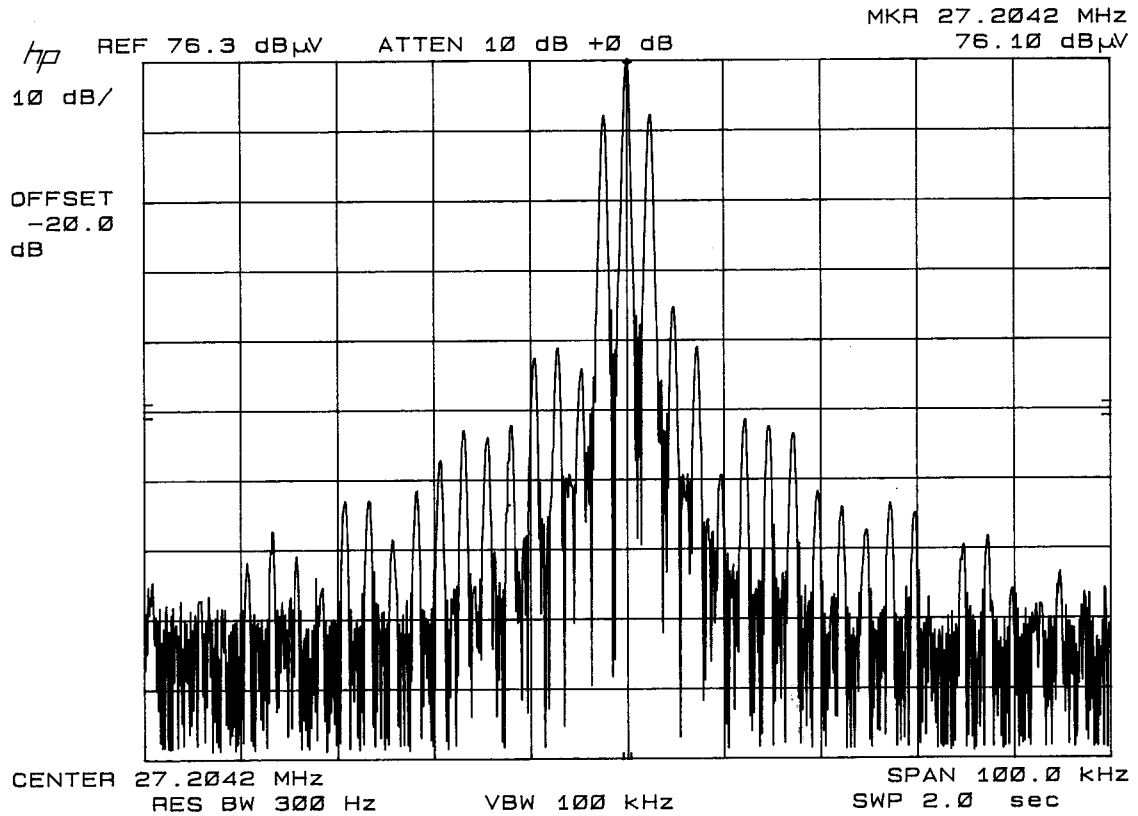

Occupied Bandwidth CW Plot

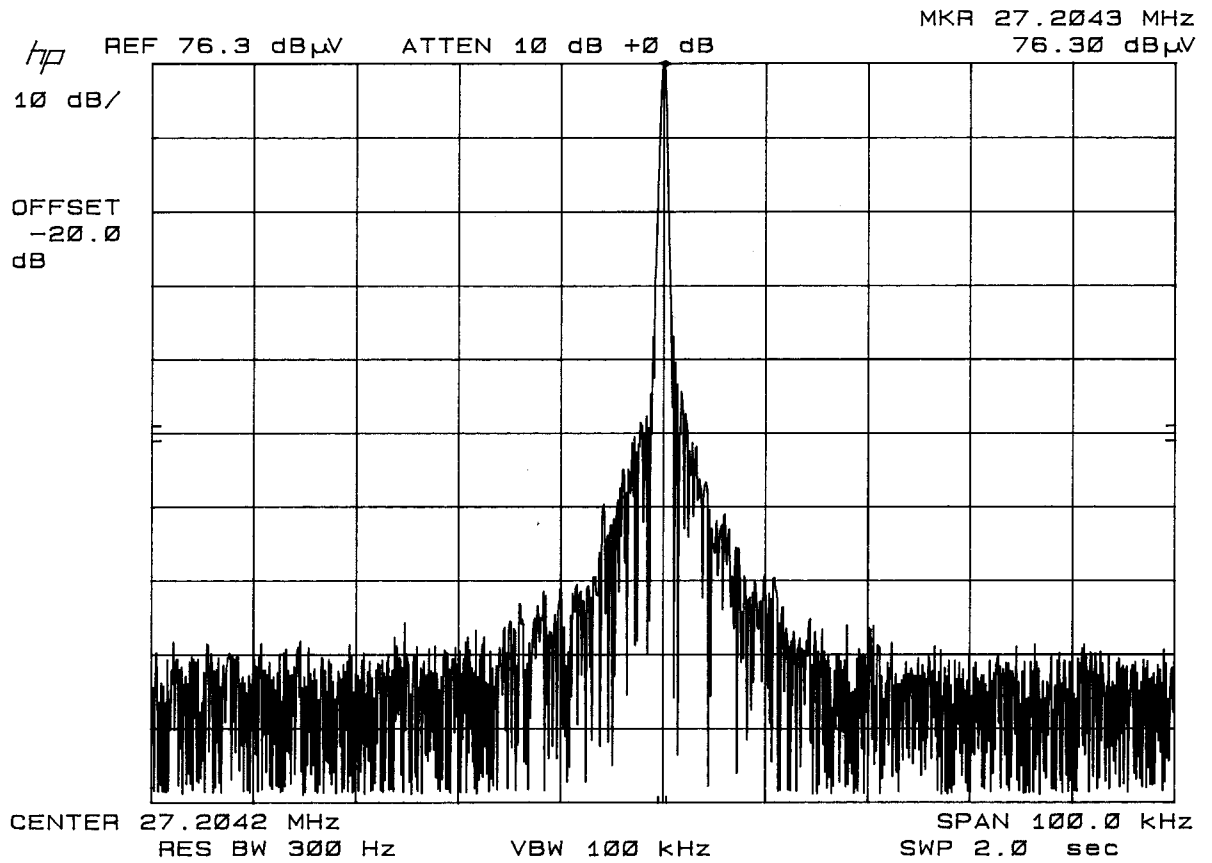


APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979


REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

# OCCUPIED BANDWIDTH PLOT - USB

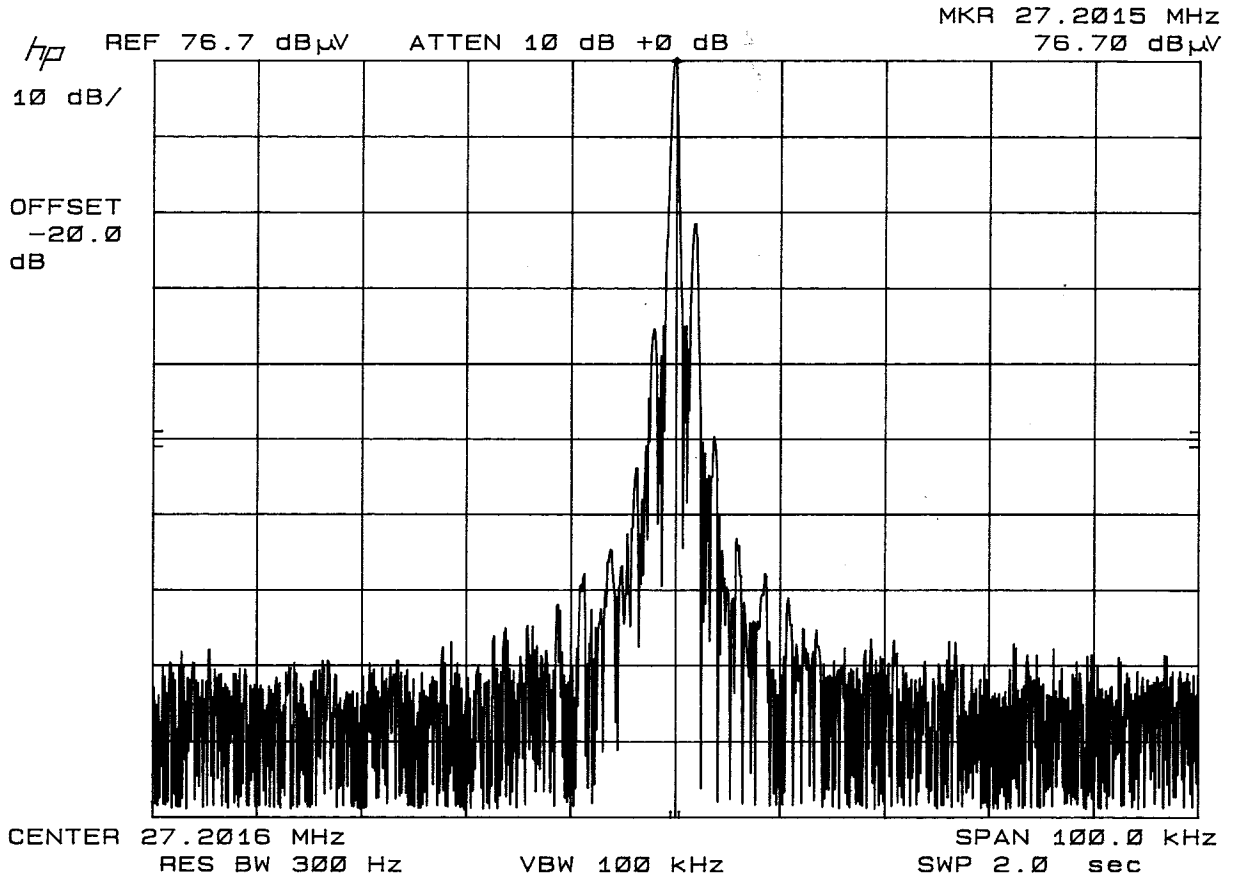

Occupied bandwidth plots for USB and LSB were made using two-tone modulation at frequencies of 500 Hz and 2400 Hz applied simultaneously at levels to produce equal magnitude sidebands per 2.1049(c)(2)

# OCCUPIED BANDWIDTH PLOT - LSB

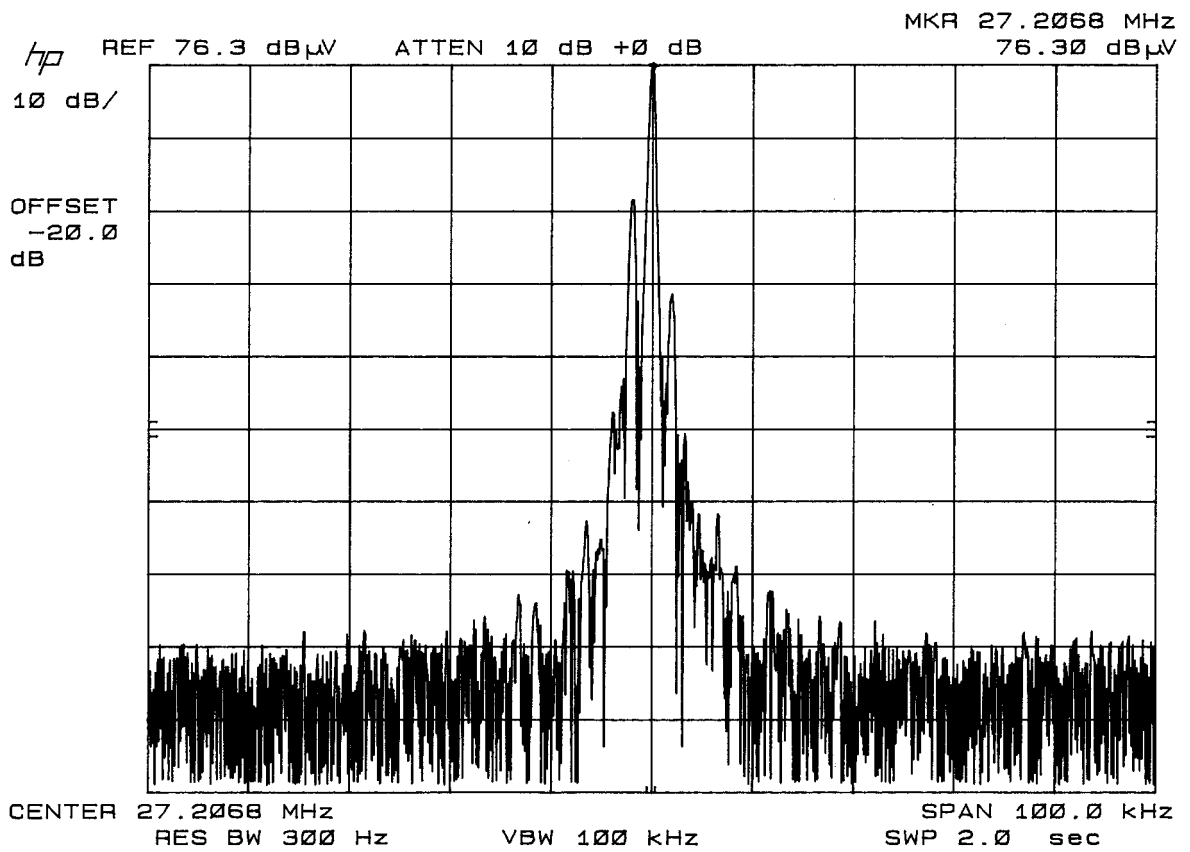

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc


Page 15 of 25

2.1051

# SPURIOUS EMISSIONS AT ANTENNA TERMINALS:

The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIA/EIA 603 with the exception that the emissions were recorded in dBc. The spectrum was scanned from 0.4 MHz to at least the 10th harmonic of the fundamental.

Spurious Emissions at  
Antenna Terminals

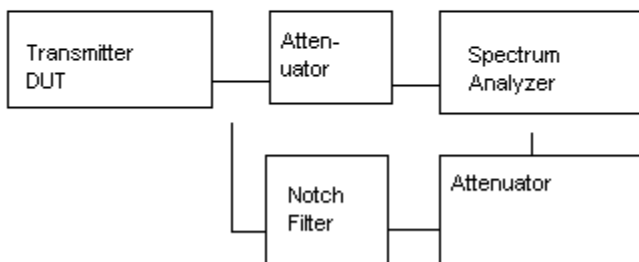

## Method of Measuring Conducted Spurious Emissions

2.1051 Spurious emissions at the Antenna Terminals

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be  $53 + 10\log(P_o)$  dB below the mean power output of the transmitter.

$$53 + 10\log(3.6) = 56 \text{ dB or } 60\text{dB Whichever is the lesser.}$$

CHANNEL 1

TF	EF	dB below carrier
26.965	143.8	0
	53.9	72.4
	80.8	67.9
	107.8	107.3
	134.8	79
	161.7	88.2
	188.7	78.7
	215.7	92.2
	242.6	89.5
	269.6	96.6

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS: (CONTINUED)

CHANNEL 20

TF	EF	dB below carrier
27.205	27.205	0
	54.4	74.1
	81.6	68.6
	108.8	108.8
	136	78.5
	163.2	87.1
	190.4	79.6
	217.6	91
	244.8	91.5
	272	93.2

CHANNEL 40

TF	EF	dB below carrier
27.405	27.405	0
	54.8	75.2
	82.2	68
	109.6	105.8
	137	78.7
	164.4	86.1
	191.8	81.7
	219.2	91
	246.6	92
	274	90.8

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load through a pre-selector filter of the spectrum analyzer. The spectrum was scanned from 400KHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 849 STATE ROAD, NEWBERRY FLORIDA 32669.

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

2.1053  
95.635(b)(8)(9)

UNWANTED RADIATION:

REQUIREMENTS: Emissions must be attenuated by at least the following below the output of the transmitter.

$$53 + 10\log(3.6) = 56\text{dB or}$$

Greater than 60dB for any frequency beyond twice the fundamental.

TEST DATA:


Emission Frequency MHz	ATTN dBc	Margin dBm
CH 1		
26.965	0	35.6
53.9	76	-40
80.8	73	-37
107.8	84	-48
134.8	88	-52
161.7	74	-38
188.7	73	-37
215.7	79	-43
242.6	90	-54
269.6	98	-62
CH 20		
27.205	0	35.6
54.4	74	-38
81.6	72	-36
108.8	82	-46
136	86	-50
163.2	71	-35
190.4	72	-36
217.6	80	-44
244.8	89	-53
272	99	-63
CH 40		
24.705	0	35.4
54.8	71	-36
82.2	73	-38
109.6	83	-48
137	86	-51
164.4	68	-33
191.8	70	-35
219.2	81	-46
246.6	86	-51
274	98	-63

METHOD OF MEASUREMENT: The procedure used was C63.4-1992 using a dipole antenna operating at a height of four feet. When the antenna was vertically polarized, the lower end of the antenna was spaced at 0.3 meters above ground. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located 849 NW State Road 45, Newberry, FL 32669.

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

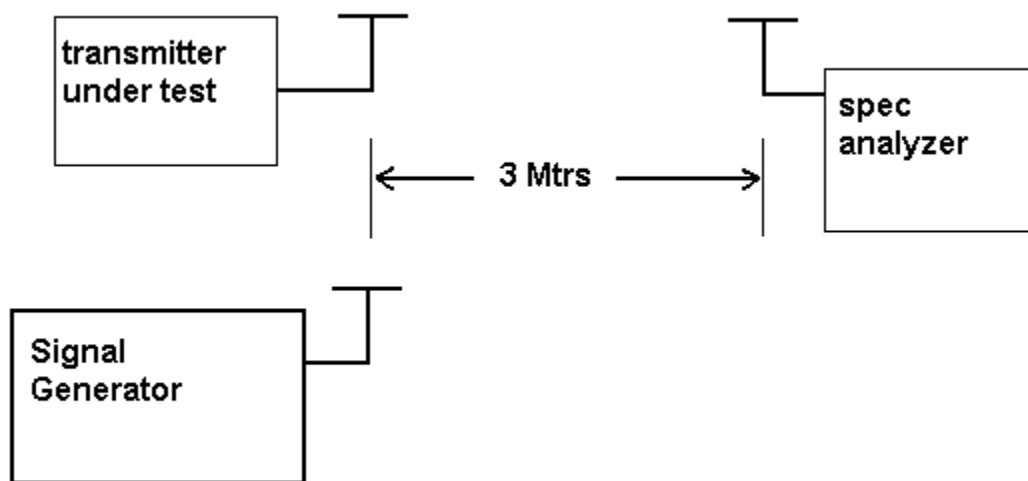

Equipment was placed 80 cm above the ground on a rotating platform.

Appropriate antenna raised from 1 to 4 M.

2.1055(a)(b)(d) Frequency stability:

Temperature and voltage tests were performed to verify that the frequency remains within the .005%, 50 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at the end point of the battery voltage of 13.8VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 27.205 129

TEMPERATURE°C	FREQUENCY MHz	PPM
REFERENCE_____	27.205 129	00.00
-30_____	27.205 837	26.02
-20_____	27.205 809	25.00
-10_____	27.205 629	18.38
0_____	27.205 401	10.00
+10_____	27.205 242	4.15
+20_____	27.205 129	0.00
+30_____	27.205 019	-4.04
+40_____	27.204 930	-7.31
+50_____	27.204 873	-9.41

BATT.End-Point 10.8 V/dc      27.205 127 -0.07

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

## EMC Equipment List

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
X	3-Meter OATS	TEI	N/A	N/A	Listed 12/22/99	12/22/02
	3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
	Receiver, Beige Tower Spectrum Analyzer (Tan)	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/03
	RF Preselector (Tan)	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
	Quasi-Peak Adapter (Tan)	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
X	Receiver, Blue Tower Spectrum Analyzer (Blue)	HP	8568B	2928A04729	CHAR 10/22/01	10/22/03
X	RF Preselector (Blue)	HP	85685A	2848A18049 2926A00983	CHAR 10/22/01	10/22/03
X	Quasi-Peak Adapter (Blue)	HP	85650A	2811A01279	CHAR 10/22/01	10/22/03
X	Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
	Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
	Biconnical Antenna	Eaton	94455-1	1057	CHAR 3/15/00	3/15/02
	BiconiLog Antenna	EMCO	3143	9409-1043		
X	Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
	Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
	Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CHAR 10/16/01	10/16/03
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 11/24/00	11/24/03
	Double-Ridged Horn Antenna	Electro-Metrics	RGA-180	2319	CAL 12/19/01	12/19/03

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

	DEVICE	MFGR	MODEL	<u>SERNO</u>	CAL/CHAR DATE	DUE DATE or STATUS
	Horn Antenna	Electro-Metrics	EM-6961	6246	CAL 3/21/01	3/21/03
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	
	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
	Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/16/01	3/16/03
	Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	5/25/01
	Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CAL 12/12/01	12/12/03
	Oscilloscope	Tektronix	2230	300572	CHAR 2/1/01	2/1/03
	Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
	AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
	AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
	AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
X	Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
	Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/04
	Digital Multimeter	HP	E2377A	2927J05849	CHAR 1/8/02	1/8/04
	Multimeter	Fluke	FLUKE-77-3	79510405	CAL 9/26/01	9/26/03
	Peak Power Meter	HP	8900C	2131A00545	CHAR 1/26/01	1/26/03
	Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02	1/16/04
	Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/04
X	Temp/Humidity gauge	EXTech	44577F	E000901	CHAR 1/22/02	1/22/04

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

	DEVICE	MFGR	MODEL	<u>SERNO</u>	CAL/CHAR DATE	DUE DATE or STATUS
	Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/03
	Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 1/26/01	1/26/03
	Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	11/22/02
	Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 5/12/02	5/12/04
	Signal Generator	HP	8640B	2308A21464	CAL 11/15/01	11/15/03
	Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
	Near Field Probe	HP	HP11940A	2650A02748	CHAR 2/1/01	2/1/03
	BandReject Filter	Lorch Microwave	5BR4-2400/ 60-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	6BR6-2442/ 300-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	5BR4-10525/ 900-S	Z1	CHAR 3/2/01	3/2/03
	High Pas Filter	Microlab	HA-10N		CHAR 10/4/01	10/4/03
	Audio Oscillator	HP	653A	832-00260	CHAR 3/1/01	3/1/03
	Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/03
	Frequency Counter	HP	5385A	3242A07460	CHAR 12/11/01	12/11/03
	Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
	Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/03
	Egg Timer	Unk			CHAR 8/31/01	8/31/03
	Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
	Measuring Tape, 7.5M	Kraftixx	7.5M PROFI		2/1/02	2/1/04
	Coaxial Cable #51	Insulated Wire Inc.	NPS 2251- 2880	Timco #51	CHAR 1/23/02	1/23/04

APPLICANT: RANGER ELECTRONIC ( SHANGHAI) INC.

FCC ID: MEE-V-DX-979

REPORT #: R\Ranger\_MEE\180UT3\180UT3TestReport.doc

Page 23 of 25

	<b>DEVICE</b>	<b>MFGR</b>	<b>MODEL</b>	<u>SERNO</u>	<b>CAL/CHAR DATE</b>	<b>DUE DATE or STATUS</b>
	Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
	Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
	Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04