

1 TEST REPORT

1.1 System test configuration

1.1.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). A typical smart card was introduced in the GemPC430 reader, which was itself connected to a personal computer. It has been tested with a Dell XPS T500 Personal computer. Each ports of the Personal Computer were loaded with a typical peripheral device.

1.1.2 EUT Exercise software

The EUT exercise program (gemtst.exe screader0 option r, running under DOS) used during radiated and conducted testing was designed to exercise the GemPC430 reader in a manner similar to a typical use (reading the smart card in loop)

1.1.3 Special accessories

The cable which connect the GemPC430 reader to USB port of the Personal Computer, is shielded and attached to the GemPC430.

The smart card used in the GemPC430 is a GemPlus MPC0S64K-3DES.

Figure #1, shows the installation of the GemPC430. All interfaces cables used for compliance testing are shielded as normally supplied. All these cables are normally recommended to be used with the Personal Computer.

1.1.4 Equipment modifications

No equipment modification has been necessary during testing to achieve compliance to Class B levels. The unit tested was representative to a production unit.

1.1.5 Configuration of tested system

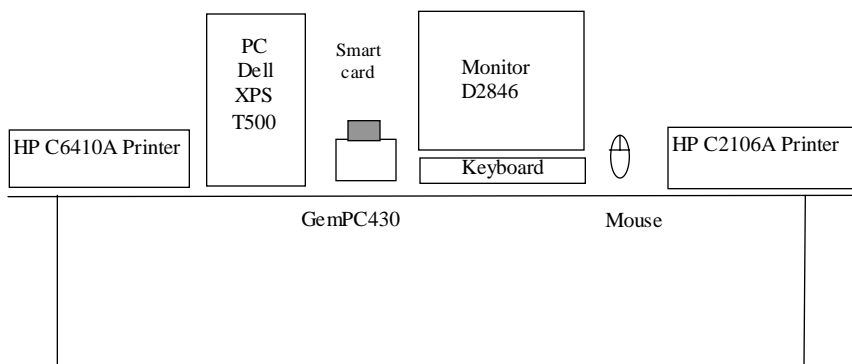


Fig #1

1.2 Conducted emission data

1.2.1 Test procedure

The product has been tested according to ANSI C63.4-1992, CISPR22-1993/A1:1995/A2:1996 and EN55022:1994/A1:1995/A2:1997.

The product has been tested with 120V / 60Hz power line voltage and compared to the CISPR22 Class B limits. Measurement bandwidth was 9KHz from 150 KHz to 30 MHz.

Measurement was initially made with an HP-8591EM Spectrum Analyzer in peak mode. This was followed by a Quasi-Peak, i.e. CISPR measurement with the Rohde & Schwarz ESH3 receiver for any strong signal. If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

The Peak data are shown on the following plots. Quasi-Peak and Average measurements are detailed in a table with frequencies and levels measured.

Interconnecting cables and equipment's were moved to position that maximized emission. A summary of the worst case emissions found in all test configurations and modes is shown on the following page.

Test equipment :


HP 8591EM Spectrum Analyzer

Rhode & Schwarz ESH3 Receiver

EMCO 3810/2SH LISN N°1


TELEMETER NNB-2/16L LISN N°2

1.2.2 Neutral conducted emission data on GemPC430

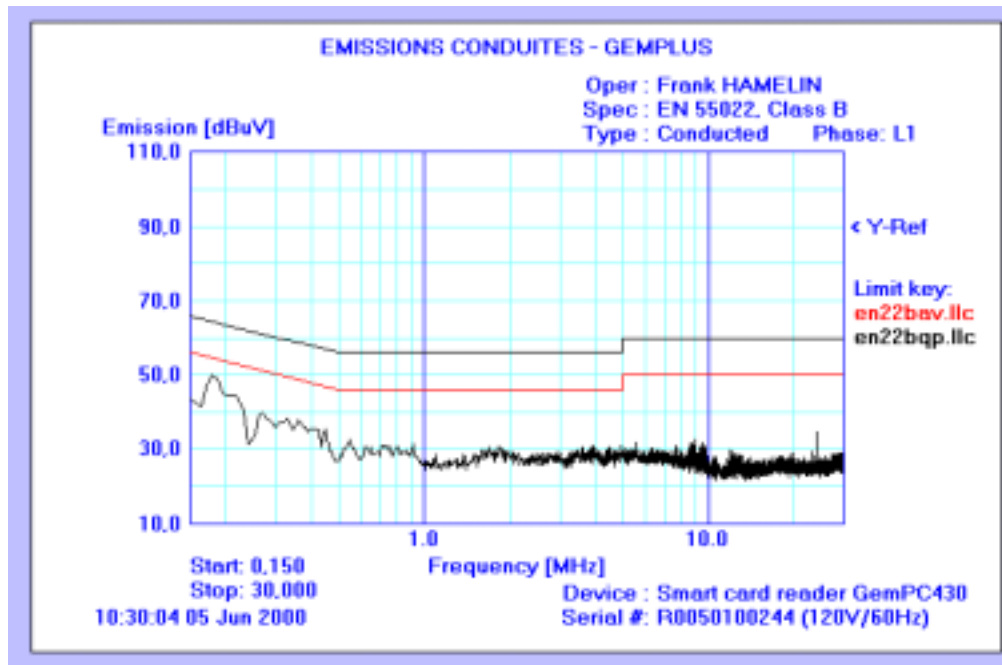

Num.	Freq. [MHz]	Peak [dBμV]	Q-Peak [dBμV]	QP limit [dBμV]	<i>QP delta</i> [dBμV]	Average [dBμV]	AVG Limit [dBμV]	<i>AVG Delta</i> [dBμV]
1	0,180	50,89	40,82	64,00	-23,18	34,02	54,00	-19,98
2	0,220	47,73	42,97	62,00	-19,03	36,50	52,00	-15,5
3	0,270	41,23	37,87	60,00	-22,13	31,49	50,00	-18,51
4	0,360	40,86	37,49	58,00	-20,51	31,26	48,00	-16,74
5	0,450	35,99	32,62	56,00	-23,38	28,38	46,00	-17,62
6	24,03	35,94	33,91	60,00	-26,09	32,56	50,00	-17,44

1.2.3 Line conducted emission data on GemPC430

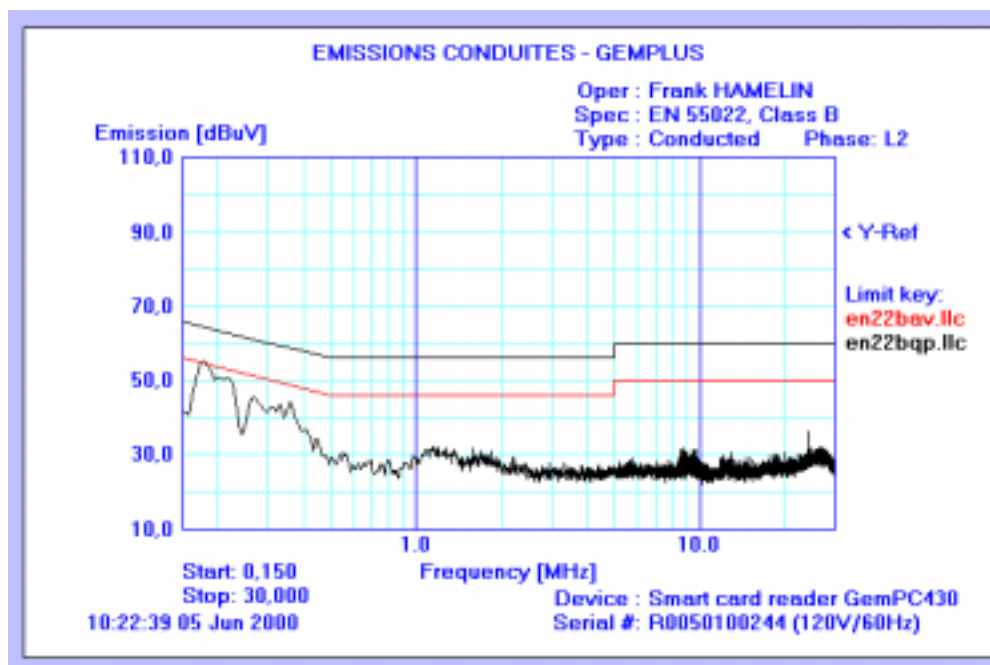

Num.	Freq. [MHz]	Peak [dBμV]	Q-Peak [dBμV]	QP limit [dBμV]	<i>QP delta</i> [dBμV]	Average [dBμV]	AVG Limit [dBμV]	<i>AVG Delta</i> [dBμV]
1	0,180	55,69	53,65	64,00	-10,35	47,54	54,00	-6,46
2	0,220	51,25	49,31	62,00	-12,69	43,71	52,00	-8,29
3	0,270	46,82	44,42	60,00	-15,58	38,97	50,00	-11,03
4	0,360	45,36	43,15	58,00	-14,85	38,02	48,00	-9,98
5	24,02	37,85	34,96	60,00	-25,04	33,10	50,00	-16,9

1.3 RADIATED EMISSION DATA

1.3.1 Test Procedure

The product has been tested according to ANSI C63.4-1992, CISPR22-1993/A1:1995/A2:1996 and EN55022:1994/A1:1995/A2:1997.

The product has been tested with 230V / 50Hz power line voltage, at a distance of 10 meters from the antenna and compared to the CISPR 22 Class B limits. Measurement bandwidth was 120 KHz from 30 MHz to 1 GHz. Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range.

Interconnecting cables and equipment's were moved to position that maximized emission. A summary of the worst case emissions found in all test configurations and modes is shown on the following page.

Test Equipment: HP-8574A E.M.I Receiver

(HP-8568B Analyzer + HP-85650 Quasi-Peak adapter + HP-85685A RF Preselector).


EMCO 3104C Biconical Antenna & EMCO 3146 Log Periodic Antenna

EMCO-1050, 6 meters height antenna mast & EMCO-1060, 3 meters diameter Turntable.

1.3.2 Radiated emission data

Final result 30-1000 MHz

Graph example - 30-1000MHz

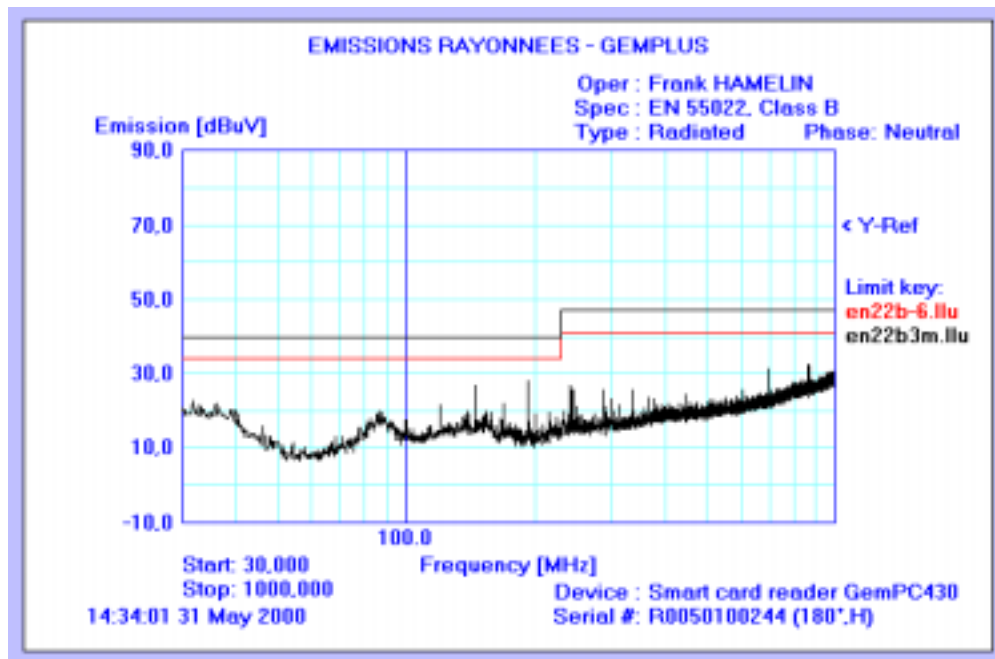

Frequency (MHz)	QPeak Lmt (dBuV/m)	QPeak (dBuV/m)	QPeak-Lmt (dB)	Angle (deg)	Pol	Hgt (cm)	Tot Corr (dB)	Comments
119.99	30	29.4	-0.6	285	V	131	17.0	EUT - Ambient noise=4dB
144.05	30	24.6	-5.4	255	H	360	15.0	
168.05	30	19.7	-10.3	56	V	103	18.0	
192.04	30	29.4	-0.6	348	H	386	19.5	EUT - Ambient noise=3dB
199.67	30	23.1	-6.9	320	H	375	19.9	
240.07	37	28.2	-8.8	235	H	311	14.5	
698.82	37	29.7	-7.3	251	H	277	26.3	
865.37	37	31.5	-5.5	222	H	233	27.6	

1.3.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow :

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength
 RA = Receiver Amplitude
 AF = Antenna Factor
 CF = Cable Factor
 AG = Amplifier Gain

Assume a receiver reading of 52.5dB μ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 is added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB μ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$