PRODUCT LABELING

40

R=1

gemalto

M/N: Prox-DU
P/N: HWP118184V
B/N: YAAMLLCCCC

FCC ID : MESPROXDU

AAMXXXXX
Bar Code Area

Rating: 5V ⎓ 200 mA

"This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation."

C ϵ (!)
c UL us

20

(Label scale is 300%)
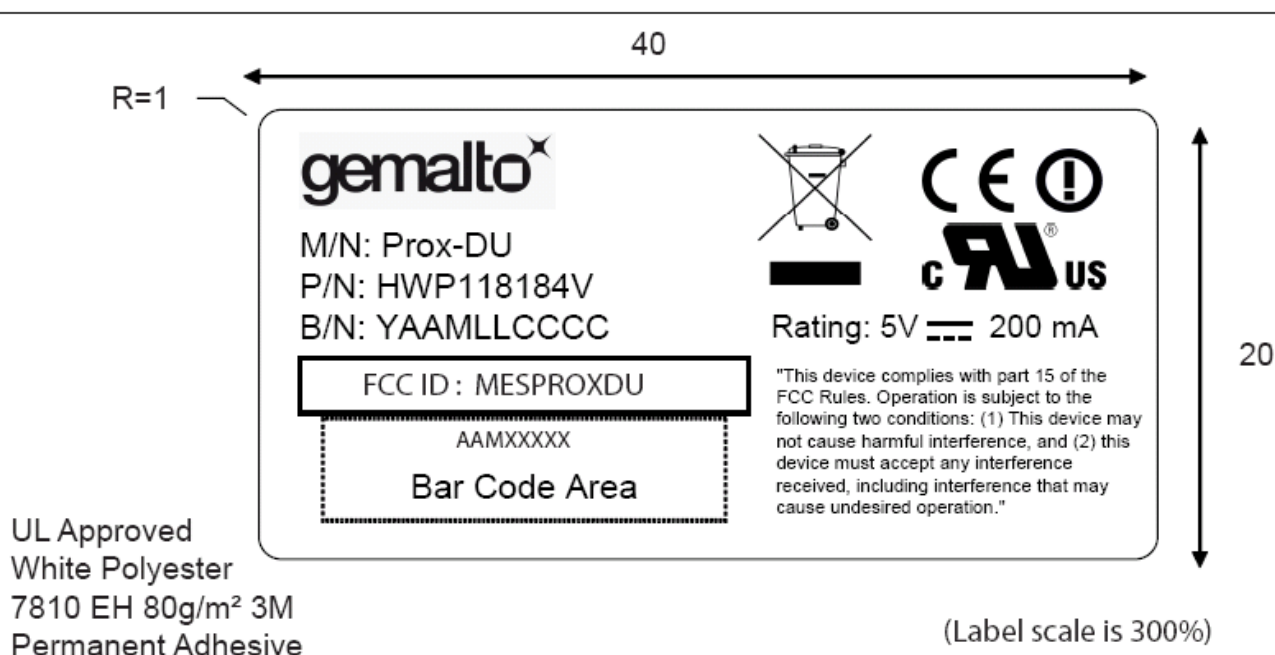
UL Approved
White Polyester
7810 EH 80g/m² 3M
Permanent Adhesive

Marking: Black printing
Character size and location to be adjusted
according to label size

Stick the label on the rear cabinet
in the dedicated label location

Part Number structure :
P/N : HWP118184 +V (example HWP118184B)
V = letter of version of the product (example B)

Serial Number structure :
B/N : YAAMLLCCCC (example I003020883)
Y = subcontractor code (example I for MIGHT)
AA = manufacturing year (example 00 for year 2000)
M = manufacturing month in alphanumeric character, from 1 to C (example 3 for March)
LL = batch number within the month (example 02, second batch of the current month)
CCCC = Baseline Number (This information is provided with the "DIDO")

Bar Code Area: AAMXXXXX followed by Code 128 print
AA = manufacturing year (example 00 for year 2000)
M = manufacturing month in alphanumeric character, from 1 to C (example 3 for March)
XXXXX = incremental serial number on 5 digits (example 00001~10000)