



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 15.231 TEST REPORT

LOW POWER UNLICENSED TRANSMITTER

Applicant	M+H MESSTECHNIK GMBH GERMANY
Address	AM LANGHOLZ 11 D-88289 WALDBURG GERMANY
Product Description	Radio Wave Probe 38.xx
FCC ID	FCC ID: MFFRWP38XX
Model Number	38.xx
Date Sample Received	11/30/2009
Date Tested	12/17/2009
Report No.	2916GT9TestReport.pdf
Tested By	Nam Nguyen
Approved By	Mario de Aranzeta
Test Results	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



TABLE OF CONTENTS

ATTESTATIONS.....	3
REPORT SUMMARY	4
TEST ENVIRONMENT.....	4
TEST SETUP.....	4
DUT SPECIFICATION	5
MANUFACTURE DECLARATION OF COMPLIANCE WITH PART 15.231(A).....	6
TEST EQUIPMENT LIST	7
TEST PROCEDURES	8
RADIATION INTERFERENCE.....	9
OCCUPIED BANDWIDTH.....	11
POWER LINE CONDUCTED INTERFERENCE	12



ATTESTATIONS

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, Fl 32669

Authorized Signatory Name: *Mario de Aranzeta*

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: December 31, 2009

APPLICANT: M+H MESSTECHNIK GMBH GERMANY
FCC ID: MFFRWP38XX
REPORT: M\M+H\2916GT9\2916GT9TestReport.doc

REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	FCC Pt 15.231, Pt 15.209, Pt 15.207, ANSI C63.4: 2003
Related Report(s) or Approval(s)	No related report

TEST ENVIRONMENT

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 26°C Relative humidity: 50%

TEST SETUP

Test Exercise (e.g software description, test signal, etc.):	The DUT was placed in continuous transmit mode of operation.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote control radio.



DUT SPECIFICATION

Applicant	M+H MESSTECHNIK GMBH GERMANY		
Description	Radio Wave Probe 38XX		
FCC ID	MFFRWP38XX		
Model Number	38.xx		
Frequency Range	(433.075 – 434.650) MHz		
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively		
Test Item	<input type="checkbox"/> Prototype	<input type="checkbox"/> Pre-Production	<input checked="" type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable



MANUFACTURE DECLARATION OF COMPLIANCE WITH PART 15.231(A)

Item	Description	Yes	No
1	Does this device transmit a signal that is only used to control another device?		X
2	Does this device send data with this control signal?		X
3	Does this device send data? Data is, things like: temperature, wind direction, fluid amount, rate of flow, etc.	X	
4	Does this device transmit continuously or automatically?		
5	If manually operated does this device stop transmitting within 5 seconds of releasing the button?		
6	If automatically operated does it deactivate 5 seconds after activation?		
7	Does it transmit at regular predetermined intervals?		
8	Does it poll or send supervisory information? If yes does it do a system integrity check? How often?		
9	Is this a fire, security or safety of life device? If YES does the device stop transmitting after the alarm condition is satisfied?		
10	Duty cycle: Maximum on-time? If YES, on-time in 100 ms? If Other, please specify here On time in		
11	Modulation technique: Please specify the modulation of the test sample, FM, or AFSK, or FSK, or on-off keying, or others?		

This device falls under 15.231 (e)



TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/09	1/10/12
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
Analyzer Silver Tower Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 10/30/08	10/30/10
Analyzer Silver Tower RF Preselector	HP	85685A	2620A00294	CAL 3/6/09	3/6/11
Analyzer Silver Tower Spectrum Analyzer	HP	8566B Opt 462	3552A22064 3638A08608	CAL 10/30/08	10/30/10
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 12/8/07	12/8/09
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 12/8/07	12/8/09
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 12/7/09	12/7/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 12/7/09	12/7/11
Antenna: Biconnical	Eaton	94455-1	1057	CAL 12/12/09	12/12/11
Antenna: Biconnical	Eaton	94455-1	1096	CAL 10/11/08	10/11/10
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	CAL 12/1/08	12/1/10

APPLICANT: M+H MESSTECHNIK GMBH GERMANY
 FCC ID: MFFRWP38XX
 REPORT: M\M+H\2916GT9\2916GT9TestReport.doc



TEST PROCEDURES

Power line conducted Emissions: The test procedure used was ANSI C63.4-2003.

Spurious Emissions: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and a was generated. The vertical scale is set to 10 dB per division.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq MHz	Meter Reading dB μ V	ACF dB/m	Cable Loss dB	Field Strength dB μ V/m @ 3 m
33	20	+10.36	+1.2	= 31.56

ANSI C63.4-2003 Measurement: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes when necessary and the highest readings were converted to average readings based on the duty cycle.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

RADIATION INTERFERENCE

Rules Part No.: FCC Pt 15.231(a)

Requirements: 15.231 (a)

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m)	Field Strength of Harmonics and Spurious Emissions (dB μ V/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

15.231 (e)

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m)	Field Strength of Harmonics and Spurious Emissions (dB μ V/m @ 3m)
40.66 to 40.70	60	40
70 to 130	54	34
130 to 174	54 to 63.5	34 to 43.5
174 to 260	63.5	43.5
260 to 470	63.5 to 74	43.5 to 54
470 and above	74	54

No fundamental frequency is allowed in the restricted bands.

Spurious emissions in the restricted bands must be less than 54 dB μ V/m or to the limits of 15.209.

FOR THIS DUT:

The limit for average field strength in dB μ V/m for the fundamental frequency is 72.8 dB μ V/m.

The limit for average field strength in dB μ V/m for the harmonics and other spurious frequencies is 52.80 dB μ V/m unless it is in a restricted band.



Test Data:

Tuned Frequency MHz	Emission Frequency MHz	*	Meter Reading dBμV	Ant. Polarity V/H	Coax Loss dB/m	Correction Factor dB/m	Field Strength dBμV/m	Margin dB
433.1	433.13		46.8	H	1.23	16.59	64.62	8.18
433.1	433.13		50.2	V	1.23	16.16	67.59	5.21
433.1	866.26		18.1	V	1.93	22.4	42.43	10.37
433.1	866.26		19.1	H	1.93	22.93	43.96	8.84
433.1	1,299.39		9.4	H	2.34	27.84	39.58	13.22
433.1	1,299.39	P	23	V	2.34	27.84	53.18	
433.1	1,299.39	A	20.3	V	2.34	27.84	50.48	2.32
433.1	1,732.52		19.1	V	2.69	29.49	51.28	1.52
433.1	1,732.52	P	22.1	H	2.69	29.49	54.28	
433.1	1,732.52	A	19.2	H	2.69	29.49	51.38	1.42
433.1	2,165.65		8.8	V	3.02	31.63	43.45	9.35
433.1	2,165.65		10.1	H	3.02	31.63	44.75	8.05
433.1	2,598.78		8.3	H	3.32	32.52	44.14	8.66
433.1	2,598.78		8.9	V	3.32	32.52	44.74	8.06
434.7	434.65		47	H	1.23	16.64	64.87	7.93
434.7	434.65		49.8	V	1.23	16.19	67.22	5.58
434.7	869.3		26.9	V	1.93	22.4	51.23	1.57
434.7	869.3	P	29.3	H	1.93	22.99	54.22	
434.7	869.3	A	26.3	H	1.93	22.99	51.22	1.58
434.7	1,303.95	**	8.8	V	2.34	27.84	38.98	13.82
434.7	1,303.95	**	9.7	H	2.34	27.84	39.88	12.92
434.7	1,738.60		17.6	H	2.69	29.53	49.82	2.98
434.7	1,738.60	P	21.1	V	2.69	29.53	53.32	
434.7	1,738.60	A	19.8	V	2.69	29.53	52.02	0.78
434.7	2,173.25		8	H	3.02	31.65	42.67	10.13
434.7	2,173.25		8.6	V	3.02	31.65	43.27	9.53
434.7	2,607.90		7.8	H	3.33	32.52	43.65	9.15
434.7	2,607.90		8	V	3.33	32.52	43.85	8.95

** -Denotes restricted bands

P is equal to Peak. All values not annotated are Peak unless noted otherwise.

A is equal to average


Note: Emissions that are 20 dB below the limit are not required to be reported.

OCCUPIED BANDWIDTH

Rules Part No.: FCC Pt 15.231(C)

Requirements: The bandwidth of the emission shall be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Data: Please refer to the following plots.

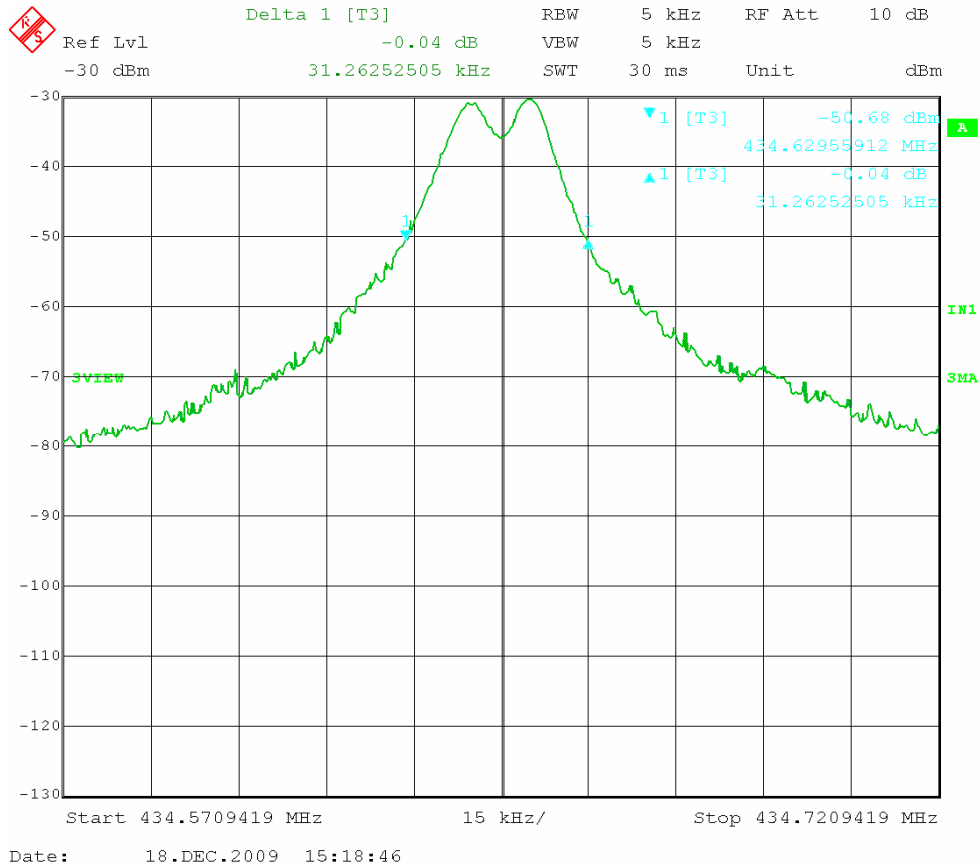



POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Pt 15.207

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBuV)	Average Limits (dBuV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

Test Data: Not applicable because the DUT is battery operated exclusively.