

SAR Test Report

Report No.: AGC00151180701FH01

FCC ID : MG3-2236B

APPLICATION PURPOSE : Class II Permissive Change

PRODUCT DESIGNATION : Wi-Fi Dongle

BRAND NAME : UNIVERSAL ELECTRONICS INC

MODEL NAME : UEI2236B

CLIENT : UNIVERSAL ELECTRONICS INC

DATE OF ISSUE : Sep. 12, 2018

STANDARD(S) : IEEE Std. 1528:2013
FCC 47CFR § 2.1093
IEEE/ANSI C95.1:2005

REPORT VERSION : V1.0

Attestation of Global Compliance(Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 12,2018	Valid	Class II Permissive Change

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Report

Applicant Name	UNIVERSAL ELECTRONICS INC
Applicant Address	201 East Sandpointe Ave, 8th Floor, Santa Ana, CA, United States
Manufacturer Name	ITON Technology Corp.
Manufacturer Address	Room 1302, Block A, Building 4, Tianan Cyber Park, Huangge Road, Longgang District, Shenzhen, China
Product Designation	Wi-Fi Dongle
Brand Name	UNIVERSAL ELECTRONICS INC
Model Name	UEI2236B
Different Description	N/A
Applicable Standard	IEEE Std. 1528:2013 FCC 47CFR § 2.1093 IEEE/ANSI C95.1:2005
Test Date	Aug. 20,2018 to Aug. 24,2018
Report Template	AGCRT- US -5G/SAR (2018-01-01)

Note: The results of testing in this report apply to the product/system which was tested only.

Qwen Xiao

Tested By

Qwen Xiao(Xiao Qi)

Aug. 24,2018

Angela Li

Checked By

Angela Li(Li Jiao)

Sep. 12,2018

Forrest Lei

Authorized By

Forrest Lei(Lei Yonggang)

Sep. 12,2018

Authorized Officer

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TABLE OF CONTENTS

1. SUMMARY OF MAXIMUM SAR VALUE	5
2. GENERAL INFORMATION.....	6
2.1. EUT DESCRIPTION.....	6
3. SAR MEASUREMENT SYSTEM.....	7
3.1. THE DASY5 SYSTEM USED FOR PERFORMING COMPLIANCE TESTS CONSISTS OF FOLLOWING ITEMS	7
3.2. DASY5 E-FIELD PROBE.....	8
3.3. DATA ACQUISITION ELECTRONICS DESCRIPTION	8
3.4. ROBOT.....	9
3.5. LIGHT BEAM UNIT	9
3.6. DEVICE HOLDER	10
3.7. MEASUREMENT SERVER.....	10
3.8. PHANTOM.....	11
4. SAR MEASUREMENT PROCEDURE	12
4.1. SPECIFIC ABSORPTION RATE (SAR).....	12
4.2. SAR MEASUREMENT PROCEDURE	13
4.3. RF EXPOSURE CONDITIONS	15
5. TISSUE SIMULATING LIQUID	16
5.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID.....	16
5.2. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	16
5.3. TISSUE CALIBRATION RESULT	17
6. SAR SYSTEM CHECK PROCEDURE	20
6.1. SAR SYSTEM CHECK PROCEDURES	20
6.2. SAR SYSTEM CHECK.....	21
7. EUT TEST POSITION.....	22
7.1. BODY PART POSITION	22
8. SAR EXPOSURE LIMITS	23
9. TEST FACILITY	24
10. TEST EQUIPMENT LIST	25
11. MEASUREMENT UNCERTAINTY	26
12. CONDUCTED POWER MEASUREMENT.....	29
13. TEST RESULTS.....	33
13.1. SAR TEST RESULTS SUMMARY.....	33
APPENDIX A. SAR SYSTEM CHECK DATA	39
APPENDIX B. SAR MEASUREMENT DATA.....	46
APPENDIX C. TEST SETUP PHOTOGRAPHS.....	74
APPENDIX D. CALIBRATION DATA	78

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

Ant. 0

Frequency Band	Highest Reported 1g-SAR(W/Kg)	SAR Test Limit (W/Kg)
	Body (with 5mm separation)	
U-NII-2A	0.450	1.6
U-NII-2C	1.517	
U-NII-3	1.211	
SAR Test Result	PASS	

Ant. 1

Frequency Band	Highest Reported 1g-SAR(W/Kg)	SAR Test Limit (W/Kg)
	Body (with 5mm separation)	
U-NII-2A	0.457	1.6
U-NII-2C	1.335	
U-NII-3	1.123	
SAR Test Result	PASS	

Ant. 0+1(MIMO)

Frequency Band	Highest Reported 1g-SAR(W/Kg)	SAR Test Limit (W/Kg)
	Body (with 5mm separation)	
U-NII-1	0.390	1.6
U-NII-2A	0.562	
U-NII-2C	1.554	
U-NII-3	1.244	
SAR Test Result	PASS	

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/Kg) specified in IEEE Std. 1528:2013; FCC 47CFR § 2.1093; IEEE/ANSI C95.1:2005 and the following specific FCC Test Procedures:

- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 447498 D02 SAR Procedures for Dongle Xmtr v02r01
- KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04
- KDB 248227 D01 802.11 Wi-Fi SAR v02r02

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

2. GENERAL INFORMATION


2.1. EUT Description

General Information	
Product Designation	Wi-Fi Dongle
Test Model	UEI2236B
Hardware Version	V1.1
Software Version	V1.0
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
5 GHz WIFI	
WIFI Specification	<input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n20 <input checked="" type="checkbox"/> 802.11n40 <input type="checkbox"/> 802.11ac20 <input type="checkbox"/> 802.11ac40 <input type="checkbox"/> 802.11ac80
Operation Frequency	U-NII-1: 5180MHz~5240MHz; U-NII-2A: 5260MHz~5320MHz; U-NII-2C: 5500MHz~5700MHz; U-NII-3: 5745MHz~5825MHz
Max. conducted Power	Ant.0:U-NII-1: 5.61dBm; U-NII-2A: 8.06dBm; U-NII-2C: 7.93dBm; U-NII-3: 8.54dBm; Ant.1:U-NII-1: 6.56dBm; U-NII-2A: 8.01dBm; U-NII-2C: 8.80dBm; U-NII-3: 8.65dBm; Ant.0+1(MIMO):U-NII-1: 8.74dBm; U-NII-2A: 9.94dBm; U-NII-2C: 12.59dBm; U-NII-3: 11.61dBm;
Antenna Gain	3.0dBi
Note: The sample used for testing is end product.	
Product	Type <input checked="" type="checkbox"/> Production unit <input type="checkbox"/> Identical Prototype

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

3. SAR MEASUREMENT SYSTEM

3.1. The DASY5 system used for performing compliance tests consists of following items

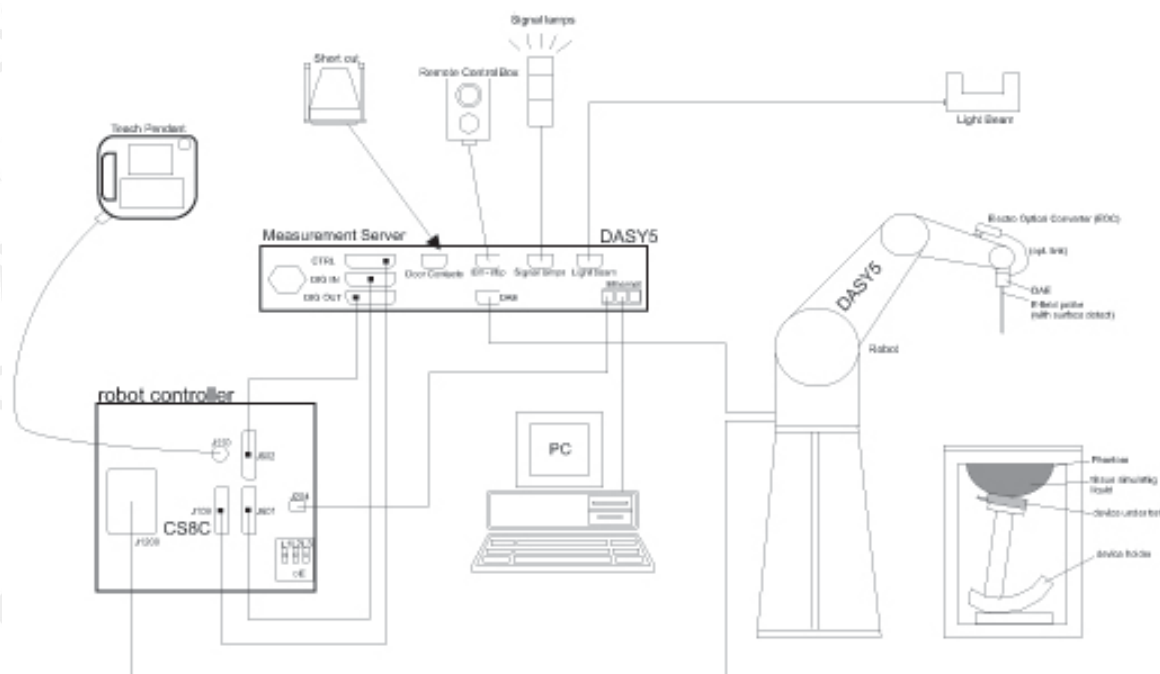


- A standard high precision 6-axis robot with controller, teach pendant and software.
- Data acquisition electronics (DAE) which attached to the robot arm extension. The DAE consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock
- A dosimetric probe equipped with an optical surface detector system.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital Communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- A Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- Phantoms, device holders and other accessories according to the targeted measurement.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

3.2. DASY5 E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528 and relevant KDB files.) The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

Model	EX3DV4-SN:3953	
Manufacture	SPEAG	
frequency	0.7GHz-6GHz Linearity:±0.9%	
Dynamic Range	0.01W/Kg-100W/Kg Linearity: ±0.9%	
Dimensions	Overall length:337mm Tip diameter:2.5mm Typical distance from probe tip to dipole centers:1mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

3.3. Data Acquisition Electronics description

The data acquisition electronics (DAE) consist if a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement sever is accomplished through an optical downlink fir data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

DAE4

Input Impedance	200MOhm	
The Inputs	Symmetrical and floating	
Common mode rejection	above 80 dB	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

3.4. Robot

The DASY system uses the high precision robots (DASY5:TX60) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from is used.

The XL robot series have many features that are important for our application:

- ☐ High precision (repeatability 0.02 mm)
- ☐ High reliability (industrial design)
- ☐ Jerk-free straight movements
- ☐ Low ELF interference (the closed metallic construction shields against motor control fields)
- ☐ 6-axis controller



3.5. Light Beam Unit

The light beam switch allows automatic “tooling” of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned prob.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position. e, the same position will be reached with another aligned probe within 0



3.6. Device Holder

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



3.7. Measurement Server


The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chip-disk (DASY5: 128MB), RAM (DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DAYS I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



3.8. PHANTOM ELI4 Phantom

□ Flat phantom a fiberglass shell flat phantom with 2mm+/- 0.2 mm shell thickness. It has only one measurement area for Flat phantom

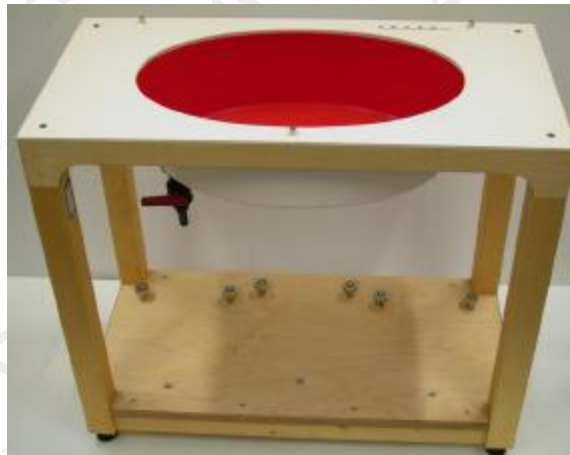

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

4. SAR MEASUREMENT PROCEDURE

4.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of given mass density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/Kg)

SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

Where

SAR	is the specific absorption rate in watts per kilogram;
E	is the r.m.s. value of the electric field strength in the tissue in volts per meter;
σ	is the conductivity of the tissue in siemens per metre;
ρ	is the density of the tissue in kilograms per cubic metre;
c _h	is the heat capacity of the tissue in joules per kilogram and Kelvin;
$\left. \frac{dT}{dt} \right _{t=0}$	is the initial time derivative of temperature in the tissue in kelvins per second

4.2. SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface is 2.7mm This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties,

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in db) is specified in the standards for compliance testing. For example, a 2db range is required in IEEE Standard 1528 standards, whereby 3db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan) If one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximum are detected, the number of Zoom Scan has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100MHz to 6GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scan are used to assess the peak spatial SAR value within a cubic average volume containing 1g and 10g of simulated tissue. The Zoom Scan measures points(refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1g and 10g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB865664 d01 SAR Measurement 100MHz to 6GHz

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the same settings. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

4.3. RF Exposure Conditions

Test Configuration and setting:

For WLAN testing, the EUT is configured with the WLAN continuous TX tool through engineering command.

Antenna Location:

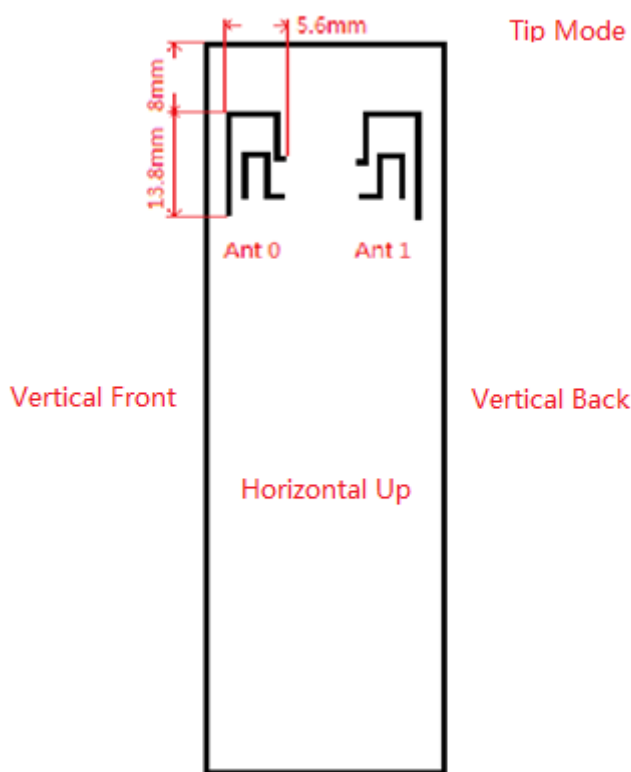

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

5. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 5.2

5.1. The composition of the tissue simulating liquid

Ingredient (% Weight)	Water	NaCl	Polysorbate 20	DGBE	1,2- Propanediol	Triton X-100	Diethylen glycol monohex ylether
Frequency (MHz)							
5000 Body	80	0.0	0.0	10	0.0	10	0.0

5.2. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in IEEE 1528.

Target Frequency (MHz)	head		body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	1.01	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5600	35.5	5.07	48.5	5.77
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

5.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using DASY5 Dielectric Probe Kit and R&S Network Analyzer ZVL6.

Tissue Stimulant Measurement for 5200MHz					
Body	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r	$\delta[s/m]$		
		49.0(46.55-51.450)	5.30(5.035 -5.565)		
	5180	50.25	5.35	21.7	Aug. 21,2018
	5200	50.10	5.44		
	5240	49.26	5.47		

Tissue Stimulant Measurement for 5300MHz					
Body	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r	$\delta[s/m]$		
		48.9(46.455-51.345)	5.42(5.149-5.691)		
	5260	49.65	5.32	21.5	Aug. 20,2018
	5280	49.26	5.33		
	5300	49.05	5.48		
	5320	48.63	5.53		

Tissue Stimulant Measurement for 5300MHz					
Body	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r	$\delta[s/m]$		
		48.9(46.455-51.345)	5.42(5.149-5.691)		
	5260	50.26	5.13	22.0	Aug. 21,2018
	5280	49.86	5.26		
	5300	49.58	5.55		
	5320	49.20	5.62		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Tissue Stimulant Measurement for 5600MHz

	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 48.5 (46.075-50.925)	δ [s/m] 5.77(5.4815 -6.059)		
Body	5500	49.77	5.52	22.2	Aug. 22,2018
	5580	49.68	5.61		
	5600	49.33	5.69		
	5700	48.62	5.73		

Tissue Stimulant Measurement for 5600MHz

	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 48.5 (46.075-50.925)	δ [s/m] 5.77(5.4815 -6.059)		
Body	5500	49.76	5.62	22.0	Aug. 24,2018
	5580	49.33	5.69		
	5600	49.15	5.71		
	5700	48.23	5.76		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Tissue Stimulant Measurement for 5800MHz					
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 48.2 (45.79-50.610)	δ [s/m] 6.00 (5.70-6.30)		
Body	5745	49.26	5.73	22.2	Aug. 22,2018
	5785	48.79	5.76		
	5800	48.77	5.82		
	5825	48.23	5.90		

Tissue Stimulant Measurement for 5800MHz					
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 48.2 (45.79-50.610)	δ [s/m] 6.00 (5.70-6.30)		
Body	5745	50.02	5.75	22.7	Aug. 23,2018
	5785	49.82	5.86		
	5800	47.95	5.92		
	5825	46.52	6.03		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


6. SAR SYSTEM CHECK PROCEDURE

6.1. SAR System Check Procedures

SAR system check is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

Each DASY system is equipped with one or more system check kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system check setup is shown as below.

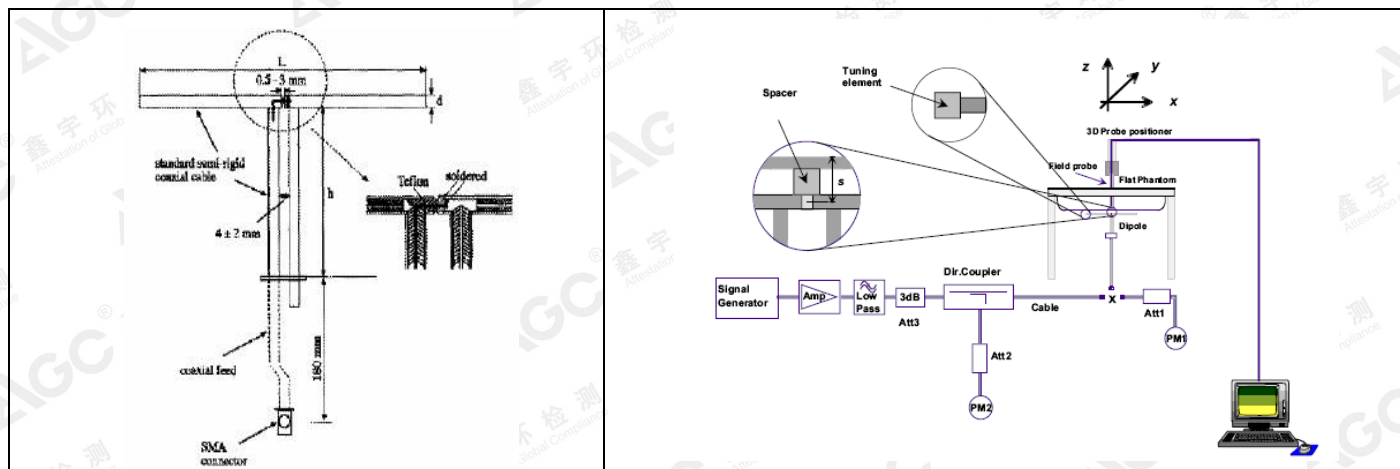

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

6.2. SAR System Check

6.2.1. Wave Guide



The wave guide is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of IEEE. The table below provides details for the mechanical and electrical specifications for the wave guide.

Frequency	L (mm)	W (mm)	L _f (mm)	W _f (mm)
5000MHz	40.39	20.19	81.03	61.98

6.2.2. System Check Result

System Performance Check at 5000-6000MHz for Body								
Frequency [MHz]	Target Value(W/Kg)		Reference Result (± 10%)		Normalized to 1W(W/Kg)		Tissue Temp. [°C]	Test time
	1g	10g	1g	10g	1g	10g		
5200	158.49	56.44	142.641-174.339	50.796-62.084	154.00	54.39	21.7	Aug. 21,2018
5200	158.49	56.44	142.641-174.339	50.796-62.084	171.71	59.77	21.5	Aug. 20,2018
5200	158.49	56.44	142.641-174.339	50.796-62.084	159.38	55.97	22.0	Aug. 20,2018
5600	171.11	59.96	153.999-188.221	53.964-65.956	168.23	58.19	22.2	Aug. 22,2018
5600	171.11	59.96	153.999-188.221	53.964-65.956	165.70	57.55	22.0	Aug. 24,2018
5800	176.30	61.30	158.67-193.93	55.17-67.43	184.99	64.51	22.2	Aug. 22,2018
5800	176.30	61.30	158.67-193.93	55.17-67.43	171.08	59.45	22.7	Aug. 23,2018

Note:

- (1) We use a CW signal of 15dBm for system check, and then all SAR values are normalized to 1W forward power. The result must be within ± 10% of target values.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

7. EUT TEST POSITION

This EUT was tested in **Horizontal-Up, Horizontal-Down, Vertical-Front, Vertical-Back** and the tip.

7.1. Body Part Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to **5mm**



(A)
Horizontal-Up



(B)
Horizontal-Down



(C)
Vertical-Front



(D)
Vertical-Back

8. SAR EXPOSURE LIMITS

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit (W/kg)
Spatial Peak SAR (1g cube tissue for brain or body)	1.60
Spatial Average SAR (Whole body)	0.08
Spatial Peak SAR (Limbs)	4.0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

9. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

10. TEST EQUIPMENT LIST

Equipment description	Manufacturer/ Model	Identification No.	Current calibration date	Next calibration date
Stäubli Robot	Stäubli-TX60	F13/5Q2UD1/A/01	N/A	N/A
Robot Controller	Stäubli-CS8	139522	N/A	N/A
E-Field Probe	Speag- EX3DV4	SN:3953	Aug. 10,2018	Aug. 09,2019
SAM Twin Phantom	Speag-SAM	1790	N/A	N/A
Device Holder	Speag-SD 000 H01 KA	SD 000 H01 KA	N/A	N/A
DAE4	Speag-SD 000 D04 BM	1398	Feb. 08,2018	Feb. 07,2019
SAR Software	Speag-DASY5	DASY52.8	N/A	N/A
Liquid	SATIMO	-	N/A	N/A
Dipole	SWG5500	SN 15/15 WGA 36	July 05,2016	July 04,2019
Signal Generator	Agilent-E4438C	US41461365	Mar. 01,2018	Feb. 28,2019
Vector Analyzer	Agilent / E4440A	US41421290	Mar. 01,2018	Feb. 28,2019
Network Analyzer	Rhode & Schwarz ZVL6	SN100132	Mar. 01,2018	Feb. 28,2019
Attenuator	Warison /WATT-6SR1211	N/A	N/A	N/A
Attenuator	Mini-circuits / VAT-10+	N/A	N/A	N/A
Amplifier	EM30180	SN060552	Mar. 01,2018	Feb. 28,2019
Directional Couple	Werlatone/ C5571-10	SN99463	Jun. 12,2018	Jun. 11,2019
Directional Couple	Werlatone/ C6026-10	SN99482	Jun. 12,2018	Jun. 11,2019
Power Sensor	NRP-Z21	1137.6000.02	Oct. 12,2017	Oct. 11,2018
Power Sensor	NRP-Z23	US38261498	Mar. 01,2018	Feb. 28,2019
Power Viewer	R&S	V2.3.1.0	N/A	N/A

Note: Per KDB 865664 Dipole SAR Validation, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement;
4. Impedance is within 5Ω of calibrated measurement.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

11. MEASUREMENT UNCERTAINTY

DASY Uncertainty- EX3DV4 Measurement uncertainty for Dipole averaged over 1 gram / 10 gram.									
a	b	c	d	e f(d,k)	f	g	h cx/f/e	i cxg/e	k
Uncertainty Component	Sec.	Tol (± %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (±%)	10g Ui (±%)	vi
Measurement System									
Probe calibration	E.2.1	6.65	N	1	1	1	6.65	6.65	∞
Axial Isotropy	E.2.2	0.6	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.24	0.24	∞
Hemispherical Isotropy	E.2.2	1.6	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.65	0.65	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	0.45	R	$\sqrt{3}$	1	1	0.26	0.26	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response 调制响应	E.2.5	3.3	R	$\sqrt{3}$	1	1	1.91	1.91	∞
Readout Electronics	E.2.6	0.15	N	1	1	1	0.15	0.15	∞
Response Time	E.2.7	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	E.2.8	1.7	R	$\sqrt{3}$	1	1	0.98	0.98	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	E.6.2	0.4	R	$\sqrt{3}$	1	1	0.37	0.37	∞
Probe positioning with respect to phantom shell	E.6.3	6.7	R	$\sqrt{3}$	1	1	3.87	3.87	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Test sample Related									
Test sample positioning	E.4.2	2.9	N	1	1	1	2.90	2.90	∞
Device holder uncertainty	E.4.1	3.6	N	1	1	1	3.60	3.60	∞
Output power variation—SAR drift measurement	E.2.9	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	E.6.5	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	6.6	R	$\sqrt{3}$	1	1	3.81	3.81	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity measurement	E.3.3	5	N	1	0.23	0.26	1.15	1.30	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty			RSS				11.80	11.635	
Expanded Uncertainty (95% Confidence interval)			K=2				23.60	23.27	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

DASY Uncertainty- EX3DV4									
System Check uncertainty for Dipole averaged over 1 gram / 10 gram.									
a	b	c	d	e f(d,k)	f	g	h cx _f /e	i cx _g /e	k
Uncertainty Component	Sec.	Tol (± %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (±%)	10g Ui (±%)	vi
Measurement System									
Probe calibration drift	E.2.1	0.5	N	1	1	1	0.5	0.5	∞
Axial Isotropy	E.2.2	0.6	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Hemispherical Isotropy	E.2.2	1.6	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Linearity	E.2.4	0.45	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Modulation response	E.2.5	3.3	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	E.2.6	0.15	N	1	0	0	0.00	0.00	∞
Response Time	E.2.7	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	E.2.8	1.7	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Probe positioner mechanical tolerance	E.6.2	0.4	R	$\sqrt{3}$	1	1	0.37	0.37	∞
Probe positioning with respect to phantom shell	E.6.3	6.7	R	$\sqrt{3}$	1	1	3.87	3.87	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System check source (dipole)									
Deviation of experimental dipoles	E.6.4	2.0	N	1	1	1	2.00	2.00	∞
Input power and SAR drift measurement	8,6.6.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	6.6	R	$\sqrt{3}$	1	1	3.81	3.81	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity measurement	E.3.3	5	N	1	0.23	0.26	1.15	1.30	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty			RSS				7.344	7.076	
Expanded Uncertainty (95% Confidence interval)			K=2				14.689	14.153	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

DASY Uncertainty- EX3DV4									
System Validation uncertainty for Dipole averaged over 1 gram / 10 gram.									
a	b	c	d	e f(d,k)	f	g	h cx/f/e	i cx/g/e	k
Uncertainty Component	Sec.	Tol (±%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (±%)	10g Ui (±%)	vi
Measurement System									
Probe calibration	E.2.1	6.65	N	1	1	1	6.65	6.65	∞
Axial Isotropy	E.2.2	0.6	R	$\sqrt{3}$	1	1	0.35	0.35	∞
Hemispherical Isotropy	E.2.2	1.6	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	0.45	R	$\sqrt{3}$	1	1	0.26	0.26	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	3.3	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	E.2.6	0.15	N	1	1	1	0.15	0.15	∞
Response Time	E.2.7	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	E.2.8	1.7	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	E.6.2	0.4	R	$\sqrt{3}$	1	1	0.37	0.37	∞
Probe positioning with respect to phantom shell	E.6.3	6.7	R	$\sqrt{3}$	1	1	3.87	3.87	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
System check source (dipole)									
Deviation of experimental dipole from numerical dipole	E.6.4	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	8,6.6.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	6.6	R	$\sqrt{3}$	1	1	3.81	3.81	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity measurement	E.3.3	5	N	1	0.23	0.26	1.15	1.30	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty			RSS				11.451	11.281	
Expanded Uncertainty (95% Confidence interval)			K=2				22.901	22.561	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

12. CONDUCTED POWER MEASUREMENT

WLAN 5GHz Average output power

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-1 ANT 0	802.11a 6Mbps	CH 36	5180	5.61
		CH 40	5200	4.72
		CH 48	5240	4.22
	802.11n-HT20 MCS0	CH 36	5180	5.29
		CH 40	5200	4.65
		CH 48	5240	4.42
	802.11n-HT40 MCS0	CH 38	5190	3.03
		CH 46	5230	2.91

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-1 ANT 1	802.11a 6Mbps	CH 36	5180	6.44
		CH 40	5200	6.56
		CH 48	5240	5.12
	802.11n-HT20 MCS0	CH 36	5180	6.12
		CH 40	5200	6.11
		CH 48	5240	4.84
	802.11n-HT40 MCS0	CH 38	5190	4.17
		CH 46	5230	4.35

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-1 ANT 0+1	802.11n-HT20 MCS0	CH 36	5180	8.74
		CH 40	5200	8.64
		CH 48	5240	7.65
	802.11n-HT40 MCS0	CH 38	5190	6.65
		CH 46	5230	6.70

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-2A ANT 0	802.11a 6Mbps	CH 52	5260	7.99
		CH 56	5280	8.06
		CH 64	5320	7.43
	802.11n-HT20 MCS0	CH 52	5260	6.49
		CH 56	5280	6.66
		CH 64	5320	6.74
	802.11n-HT40 MCS0	CH 54	5270	5.12
		CH 62	5310	5.42

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-2A ANT 1	802.11a 6Mbps	CH 52	5260	7.98
		CH 56	5280	8.01
		CH 64	5320	7.70
	802.11n-HT20 MCS0	CH 52	5260	6.75
		CH 56	5280	6.97
		CH 64	5320	6.79
	802.11n-HT40 MCS0	CH 54	5270	6.32
		CH 62	5310	6.35

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-2A ANT 0+1	802.11n-HT20 MCS0	CH 52	5260	9.63
		CH 60	5300	9.94
		CH 64	5320	9.88
	802.11n-HT40 MCS0	CH 54	5270	8.77
		CH 62	5310	8.92

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-2C ANT 0	802.11a 6Mbps	CH 100	5500	6.25
		CH 116	5580	7.93
		CH 140	5700	6.05
	802.11n-HT20 MCS0	CH 100	5500	6.14
		CH 116	5580	6.82
		CH 140	5700	5.02
	802.11n-HT40 MCS0	CH 102	5510	2.24
		CH 126	5630	6.10
		CH 134	5670	5.95

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-2C ANT 1	802.11a 6Mbps	CH 100	5500	6.17
		CH 116	5580	8.80
		CH 140	5700	5.85
	802.11n-HT20 MCS0	CH 100	5500	5.67
		CH 116	5580	8.76
		CH 140	5700	4.60
	802.11n-HT40 MCS0	CH 102	5510	1.36
		CH 126	5630	7.66
		CH 134	5670	6.05

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-2C ANT 0+1	802.11n-HT20 MCS0	CH 100	5500	8.92
		CH 116	5580	12.59
		CH 140	5700	7.83
	802.11n-HT40 MCS0	CH 102	5510	4.83
		CH 126	5630	10.80
		CH 134	5670	9.01

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-3 ANT 0	802.11a 6Mbps	CH 149	5745	8.49
		CH 157	5785	8.35
		CH 165	5825	7.85
	802.11n-HT20 MCS0	CH 149	5745	8.54
		CH 157	5785	7.75
		CH 165	5825	7.46
	802.11n-HT40 MCS0	CH 151	5755	7.28
		CH 159	5795	7.20

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-3 ANT 1	802.11a 6Mbps	CH 149	5745	8.43
		CH 157	5785	8.51
		CH 165	5825	8.10
	802.11n-HT20 MCS0	CH 149	5745	8.65
		CH 157	5785	8.20
		CH 165	5825	7.61
	802.11n-HT40 MCS0	CH 151	5755	7.25
		CH 159	5795	7.45

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
WLAN U-NII-3 ANT 0+1	802.11n-HT20 MCS0	CH 149	5745	11.61
		CH 157	5785	10.99
		CH 165	5825	10.55
	802.11n-HT40 MCS0	CH 151	5755	10.28
		CH 159	5795	10.34

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

13. TEST RESULTS

13.1. SAR Test Results Summary

13.1.1. Test position and configuration

Body SAR was performed with the device 5mm from the phantom according to KDB 616217.

13.1.2. Operation Mode

1. Per KDB 447498 D01 v06 ,for each exposure position, if the highest 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional.
2. Per KDB 865664 D01 v01r04,for each frequency band, if the measured SAR is ≥ 0.8 W/Kg, testing for repeated SAR measurement is required , that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
 - (1) When the original highest measured SAR is ≥ 0.8 W/Kg, repeat that measurement once.
 - (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥ 1.45 W/Kg.
 - (3) Perform a third repeated measurement only if the original, first and second repeated measurement is ≥ 1.5 W/Kg and ratio of largest to smallest SAR for the original, first and second measurement is ≥ 1.20 .
3. Per KDB 248227 D01 v02r02 Chapter 5.3.4, SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, the procedures in 5.3.2 are applied to determine the test configuration. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.
 - (1) When SAR test exclusion provisions of KDB Publication 447498 D01 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
 - (2) When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
 - (3) When the specified maximum output power is same for both UNII 1 and UNII 2A,begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the report SAR for UNII 2A is <1.2 W/Kg, SAR is nor required for UNII 1;otherwise treat the remaining bands separately and test them independently for SAR.
 - (4) When the specified maximum output power different between UNII 1 and UNII 2A,begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/Kg, testing for the band with the lower specialized output power is

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

not required; otherwise test is remaining separately for SAR;

4. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:
Maximum Scaling SAR = tested SAR (Max.) × [maximum turn-up power (mw)/ maximum measurement output power(mw)]

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

13.1.3. Test Result

SAR MEASUREMENT

Depth of Liquid (cm): >15

Product: Wi-Fi Dongle

Test Antenna: Ant 0

Position	Ch.	Fr. (MHz)	Power Drift (<±0.2dB)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
U-NII-2A-802.11a								
Horizontal-Up	56	5280	-0.10	0.129	8.10	8.06	0.130	1.6
Horizontal-Down	56	5280	-0.19	0.199	8.10	8.06	0.201	1.6
Vertical-Front	56	5280	-0.09	0.446	8.10	8.06	0.450	1.6
Vertical-Back	56	5280	0.16	0.104	8.10	8.06	0.105	1.6
Tip	56	5280	-0.04	0.026	8.10	8.06	0.026	1.6
U-NII-2C-802.11a								
Horizontal-Up	116	5580	-0.11	0.401	8.00	7.93	0.408	1.6
Horizontal-Down	116	5580	0.03	0.531	8.00	7.93	0.540	1.6
Vertical-Front	100	5500	0.15	0.730	6.30	6.25	0.738	1.6
Vertical-Front	116	5580	0.10	1.18	8.00	7.93	1.199	1.6
Vertical-Front	140	5700	-0.12	1.5	6.10	6.05	1.517	1.6
Vertical-Back	116	5580	0.15	0.102	8.00	7.93	0.104	1.6
Tip	116	5580	-0.13	0.092	8.00	7.93	0.093	1.6
U-NII-3-802.11n-HT20								
Horizontal-Up	149	5745	-0.11	0.524	8.60	8.54	0.531	1.6
Horizontal-Down	149	5745	0.03	0.740	8.60	8.54	0.750	1.6
Vertical-Front	149	5745	0.17	1.18	8.60	8.54	1.196	1.6
Vertical-Front	157	5785	-0.12	1.16	7.80	7.75	1.173	1.6
Vertical-Front	165	5825	-0.19	1.2	7.50	7.46	1.211	1.6
Vertical-Back	149	5745	-0.01	0.0019	8.60	8.54	0.002	1.6
Tip	149	5745	0.17	0.149	8.60	8.54	0.151	1.6

Note:

1. When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB447498.
2. The test separation of all above table is 5mm.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

SAR MEASUREMENT								
Depth of Liquid (cm):>15								
Product: Wi-Fi Dongle								
Test Antenna: Ant 1								
Position	Ch.	Fr. (MHz)	Power Drift (<±0.2dB)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
U-NII-2A-802.11a								
Horizontal-Up	56	5280	0.15	0.124	8.10	8.01	0.127	1.6
Horizontal-Down	56	5280	-0.19	0.219	8.10	8.01	0.224	1.6
Vertical-Front	56	5280	0.17	0.131	8.10	8.01	0.134	1.6
Vertical-Back	56	5280	0.00	0.448	8.10	8.01	0.457	1.6
Tip	56	5280	-0.16	0.0025	8.10	8.01	0.003	1.6
U-NII-2C-802.11a								
Horizontal-Up	116	5580	0.11	0.405	8.80	8.80	0.405	1.6
Horizontal-Down	116	5580	-0.10	0.544	8.80	8.80	0.544	1.6
Vertical-Front	116	5580	0.16	0.024	8.80	8.80	0.024	1.6
Vertical-Back	100	5500	-0.02	0.593	6.20	6.17	0.597	1.6
Vertical-Back	116	5580	0.14	1.19	8.80	8.80	1.190	1.6
Vertical-Back	140	5700	-0.07	1.32	5.90	5.85	1.335	1.6
Tip	116	5580	0.18	0.096	8.80	8.80	0.096	1.6
U-NII-3-802.11n-HT20								
Horizontal-Up	149	5745	0.12	0.435	8.70	8.65	0.440	1.6
Horizontal-Down	149	5745	-0.13	0.642	8.70	8.65	0.649	1.6
Vertical-Front	149	5745	-0.19	0.0038	8.70	8.65	0.004	1.6
Vertical-Back	149	5745	-0.00	1.11	8.70	8.65	1.123	1.6
Vertical-Back	157	5785	-0.16	1.03	8.30	8.20	1.054	1.6
Vertical-Back	165	5825	-0.09	0.934	7.70	7.61	0.954	1.6
Tip	149	5745	-0.15	0.102	8.70	8.65	0.103	1.6

Note:

1. When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB447498.
2. The test separation of all above table is 5mm.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

SAR MEASUREMENT								
Depth of Liquid (cm):>15								
Product: Wi-Fi Dongle								
Test Antenna: Ant 0+1(MIMO)								
Position	Ch.	Fr. (MHz)	Power Drift (<±0.2dB)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
U-NII-1-802.11n-HT20								
Horizontal-Up	36	5180	0.04	0.126	8.80	8.74	0.128	1.6
Horizontal-Down	36	5180	-0.17	0.222	8.80	8.74	0.225	1.6
Vertical-Front	36	5180	-0.05	0.385	8.80	8.74	0.390	1.6
Vertical-Back	36	5180	0.18	0.338	8.80	8.74	0.343	1.6
Tip	36	5180	-0.09	0.025	8.80	8.74	0.025	1.6
U-NII-2A-802.11n-HT20								
Horizontal-Up	60	5300	0.02	0.112	10.00	9.94	0.114	1.6
Horizontal-Down	60	5300	0.07	0.225	10.00	9.94	0.228	1.6
Vertical-Front	60	5300	0.06	0.554	10.00	9.94	0.562	1.6
Vertical-Back	60	5300	0.18	0.474	10.00	9.94	0.481	1.6
Tip	60	5300	-0.13	0.025	10.00	9.94	0.025	1.6
U-NII-2C-802.11n-HT20								
Horizontal-Up	116	5580	-0.14	0.484	12.60	12.59	0.485	1.6
Horizontal-Down	100	5500	-0.01	0.267	9.00	8.92	0.272	1.6
Horizontal-Down	116	5580	-0.04	0.940	12.60	12.59	0.942	1.6
Horizontal-Down	140	5700	0.06	0.566	7.85	7.83	0.569	1.6
Vertical-Front	100	5500	0.15	0.669	9.00	8.92	0.681	1.6
Vertical-Front	116	5580	0.11	1.55	12.60	12.59	1.554	1.6
Vertical-Front	140	5700	0.01	1.49	7.85	7.83	1.497	1.6
Vertical-Back	100	5500	0.10	0.604	9.00	8.92	0.615	1.6
Vertical-Back	116	5580	-0.09	1.32	12.60	12.59	1.323	1.6
Vertical-Back	140	5700	0.13	1.53	7.85	7.83	1.537	1.6
Tip	116	5580	-0.08	0.136	12.60	12.59	0.136	1.6
U-NII-3-802.11n-HT20								
Horizontal-Up	149	5745	-0.16	0.501	11.70	11.61	0.511	1.6
Horizontal-Down	149	5745	-0.13	0.659	11.70	11.61	0.673	1.6
Vertical-Front	149	5745	0.16	0.942	11.70	11.61	0.962	1.6
Vertical-Front	157	5785	0.15	0.982	11.00	10.99	0.984	1.6
Vertical-Front	165	5825	-0.03	1.23	10.60	10.55	1.244	1.6
Vertical-Back	149	5745	-0.17	0.777	11.70	11.61	0.793	1.6
Vertical-Back	157	5785	-0.02	0.839	11.00	10.99	0.841	1.6
Vertical-Back	165	5825	-0.04	1.06	10.60	10.55	1.072	1.6
Tip	149	5745	0.14	0.136	11.70	11.61	0.139	1.6

Note:

1. When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB447498.
2. The test separation of all above table is 5mm.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Repeated SAR											
Product: Wi-Fi Dongle											
Position	Test Ant.	Mode	Ch.	Fr. (MHz)	Power Drift (<±0.2dB)	Once SAR (1g) (W/kg)	Power Drift (<±0.2dB)	Twice SAR (1g) (W/kg)	Power Drift (<±0.2dB)	Third SAR (1g) (W/kg)	Limit (W/kg)
Vertical-Front	Ant 0	U-NII-2C-802.11a	140	5700	-0.05	1.46	0.12	1.44	-	-	1.6
Vertical-Front	Ant 0	U-NII-3-802.11n-HT20	165	5825	-0.09	1.08	-	-	-	-	1.6
Vertical-Back	Ant 1	U-NII-2C-802.11a	140	5700	-0.07	1.29	-	-	-	-	1.6
Vertical-Back	Ant 1	U-NII-3-802.11n-HT20	149	5745	-0.12	1.06	-	-	-	-	1.6
Vertical-Front	MIMO	U-NII-2C-802.11n-HT20	116	5580	0.11	1.52	0.04	1.42	-	-	1.6
Vertical-Front	MIMO	U-NII-3-802.11n-HT20	165	5825	-0.03	1.16	-	-	-	-	1.6

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab

Date: Aug. 21, 2018

System Check Body 5200 MHz

DUT: Dipole 5000MHz Type: SWG5500

Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1;
Frequency: 5200 MHz; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.44$ mho/m; $\epsilon_r = 50.10$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=15dbm
Ambient temperature (°C): 22.3, Liquid temperature (°C): 21.7, Relative Humidity (%): 52.7

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(5.18, 5.18, 5.18); Calibrated: Aug. 10, 2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08, 2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/System Check 5200MHz Body/Area Scan (10x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 8.24 W/kg


Configuration/System Check 5200MHz Body /Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 27.308 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 4.87 W/kg; SAR(10 g) = 1.72 W/kg

Maximum value of SAR (measured) = 9.00 W/kg

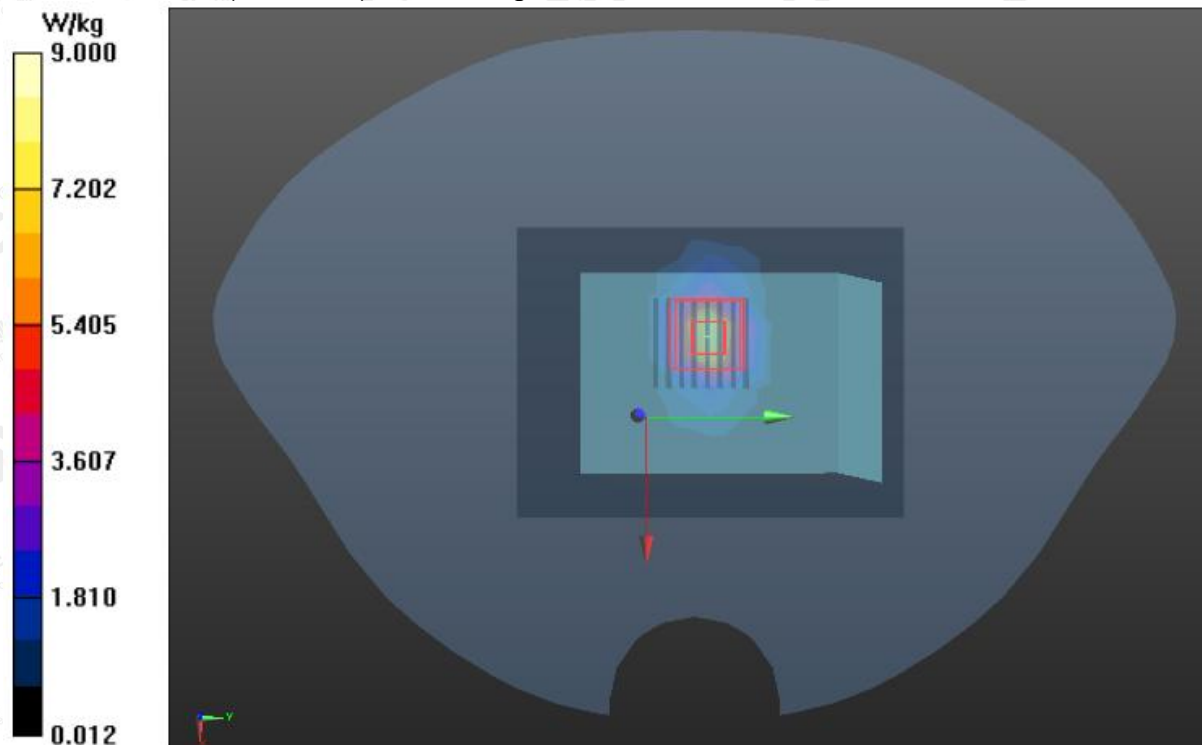

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
System Check Body 5200 MHz
DUT: Dipole 5000MHz Type: SWG5500

Date: Aug. 20,2018


Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1;
Frequency: 5200 MHz; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 49.05$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=15dBm
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.5, Relative Humidity (%):51.6

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(5.18, 5.18, 5.18); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/System Check 5200MHz Body/Area Scan (10x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 9.00 W/kg

Configuration/System Check 5200MHz Body /Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 36.873 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 17.7 W/kg
SAR(1 g) = 5.43 W/kg; SAR(10 g) = 1.89 W/kg
Maximum value of SAR (measured) = 9.87 W/kg

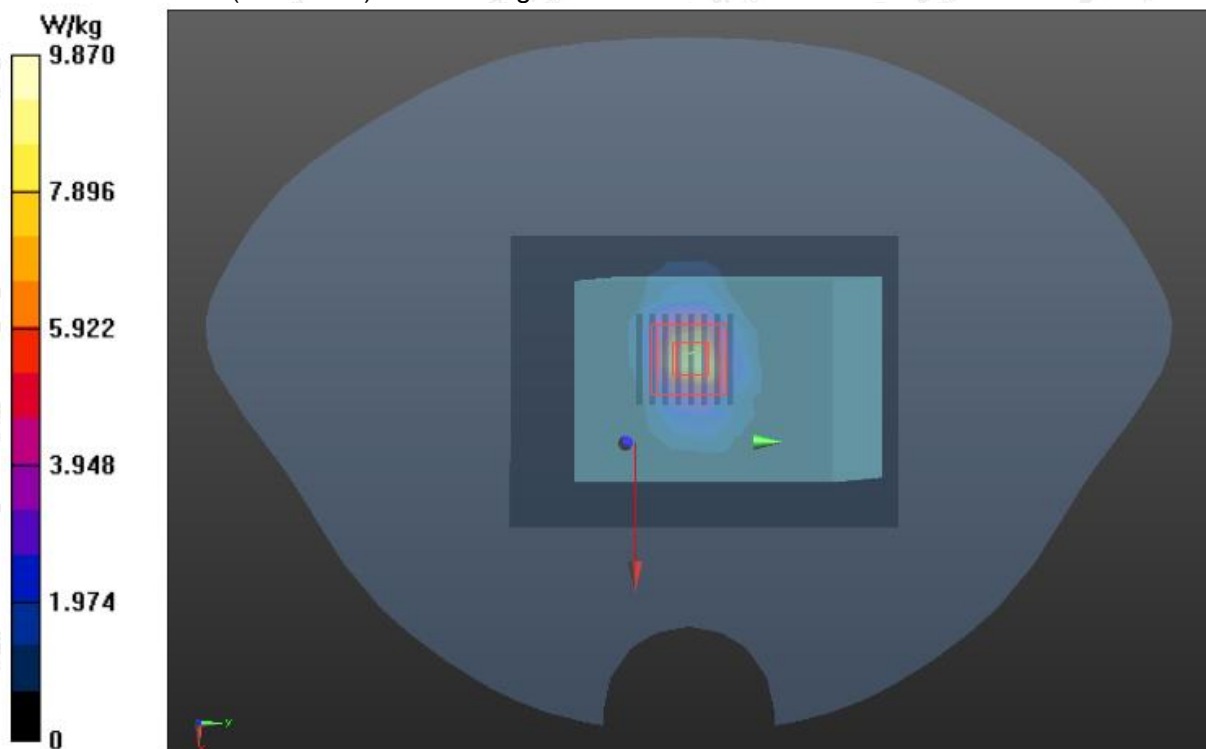

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
System Check Body 5200 MHz
DUT: Dipole 5000MHz Type: SWG5500

Date: Aug. 21, 2018


Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1;
Frequency: 5200 MHz; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.55$ mho/m; $\epsilon_r = 49.58$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=15dBm
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.0, Relative Humidity (%): 52.3

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(5.18, 5.18, 5.18); Calibrated: Aug. 10, 2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08, 2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/System Check 5200MHz Body/Area Scan (10x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 7.67 W/kg

Configuration/System Check 5200MHz Body /Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 35.991 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 16.3 W/kg
SAR(1 g) = 5.04 W/kg; SAR(10 g) = 1.77 W/kg
Maximum value of SAR (measured) = 9.08 W/kg

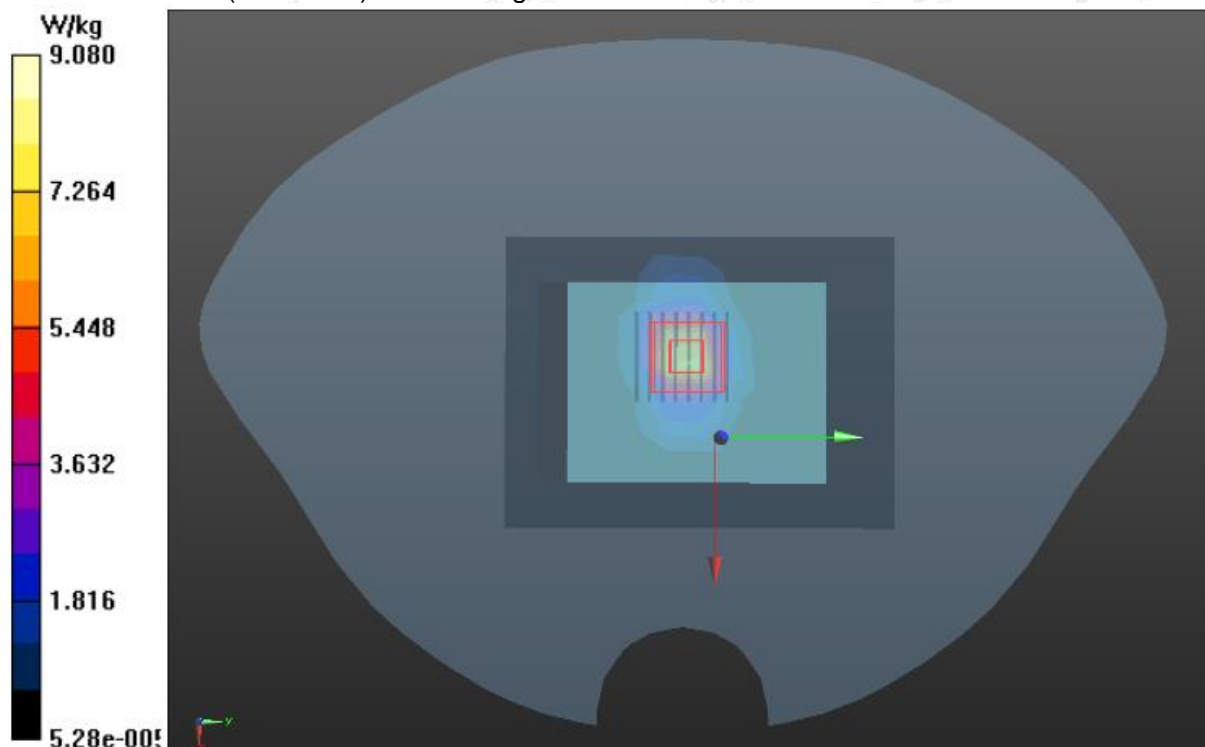

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
System Check Body 5600 MHz
DUT: Dipole 5000MHz Type: SWG5500

Date: Aug. 22,2018


Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1;
Frequency: 5600 MHz; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.69$ mho/m; $\epsilon_r = 49.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=15dBm
Ambient temperature (°C): 22.9, Liquid temperature (°C): 22.2, Relative Humidity (%):43.8

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.50, 4.50, 4.50); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/System Check 5600MHz Body/Area Scan (10x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 8.79 W/kg

Configuration/System Check 5600MHz Body /Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 37.100 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 18.4 W/kg
SAR(1 g) = 5.32 W/kg; SAR(10 g) = 1.84 W/kg
Maximum value of SAR (measured) = 9.74 W/kg

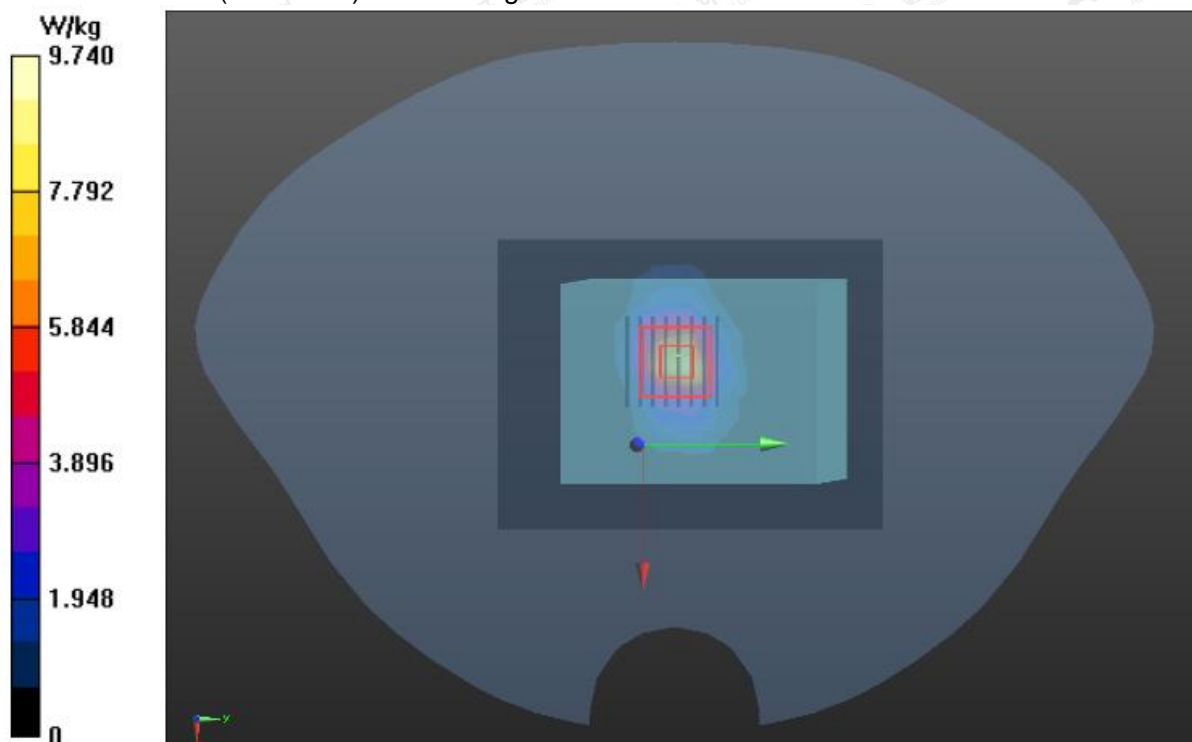

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
System Check Body 5600 MHz
DUT: Dipole 5000MHz Type: SWG5500

Date: Aug. 24,2018


Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1;
Frequency: 5600 MHz; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.71$ mho/m; $\epsilon_r = 49.15$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=15dBm
Ambient temperature (°C): 22.8, Liquid temperature (°C): 22.0, Relative Humidity (%):48.5

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.50, 4.50, 4.50); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/System Check 5600MHz Body/Area Scan (10x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 8.60 W/kg

Configuration/System Check 5600MHz Body /Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 36.817 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 18.0 W/kg
SAR(1 g) = 5.24 W/kg; SAR(10 g) = 1.82 W/kg
Maximum value of SAR (measured) = 9.55 W/kg

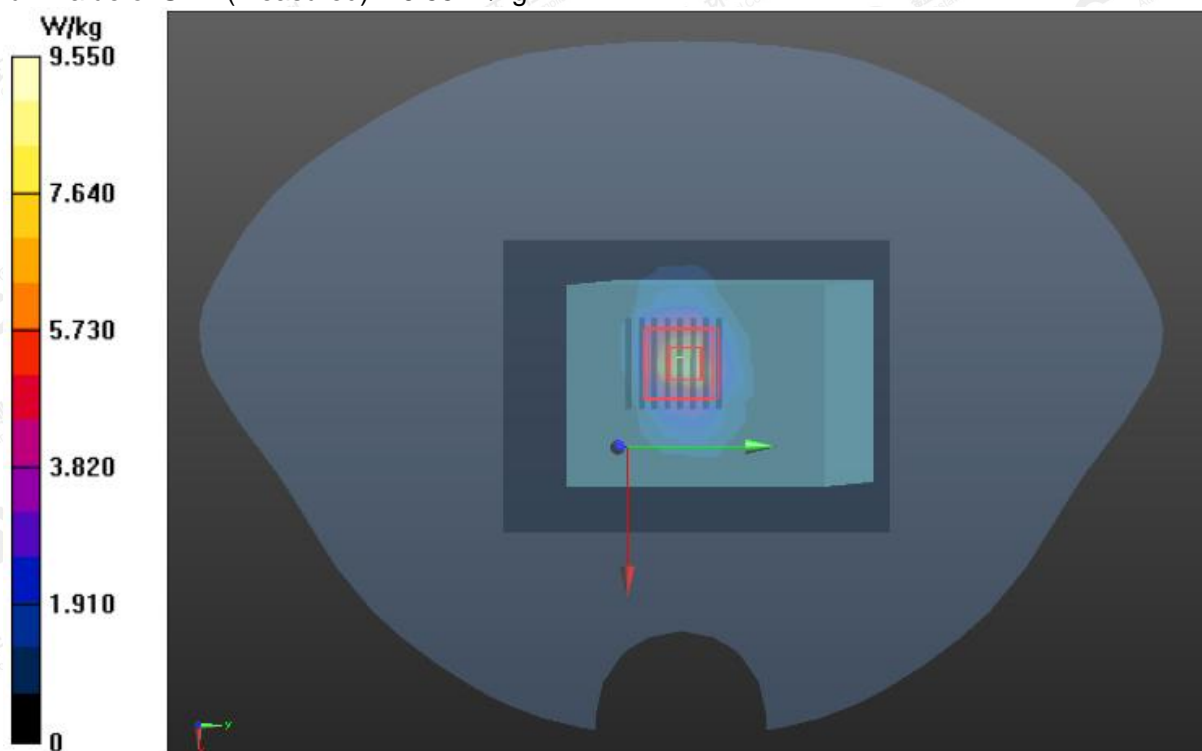

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
System Check Body 5800 MHz
DUT: Dipole 5000MHz Type: SWG5500

Date: Aug. 22,2018


Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1;
Frequency: 5800 MHz; Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.82 \text{ mho/m}$; $\epsilon_r = 48.77$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=15dBm
Ambient temperature (°C): 22.7, Liquid temperature (°C): 22.2, Relative Humidity (%):42.5

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.33, 4.33, 4.33); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/System Check 5800MHz Body/Area Scan (10x13x1): Measurement grid: $dx=10\text{mm}$,
 $dy=10\text{mm}$
Maximum value of SAR (measured) = 9.19 W/kg

Configuration/System Check 5800MHz Body /Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 38.439 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 19.6 W/kg
SAR(1 g) = 5.85 W/kg; SAR(10 g) = 2.04 W/kg
Maximum value of SAR (measured) = 10.5 W/kg

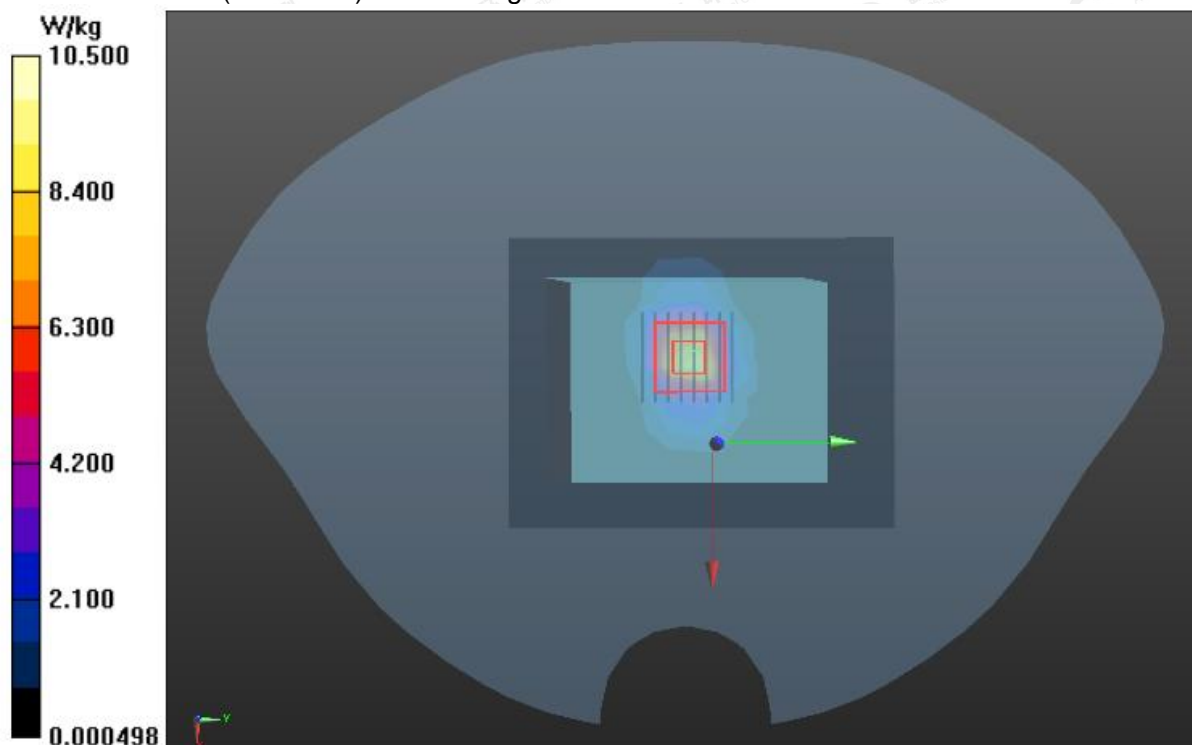

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
System Check Body 5800 MHz
DUT: Dipole 5000MHz Type: SWG5500

Date: Aug. 23,2018


Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1;
Frequency: 5800 MHz; Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.92 \text{ mho/m}$; $\epsilon_r = 47.95$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=15dBm
Ambient temperature (°C): 23.6, Liquid temperature (°C): 22.7, Relative Humidity (%):46.2

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.33, 4.33, 4.33); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/System Check 5800MHz Body/Area Scan (10x13x1): Measurement grid: $dx=10\text{mm}$,
 $dy=10\text{mm}$
Maximum value of SAR (measured) = 8.85 W/kg

Configuration/System Check 5800MHz Body /Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 36.891 V/m; Power Drift = 0.39 dB
Peak SAR (extrapolated) = 17.7 W/kg
SAR(1 g) = 5.41 W/kg; SAR(10 g) = 1.88 W/kg
Maximum value of SAR (measured) = 9.87 W/kg

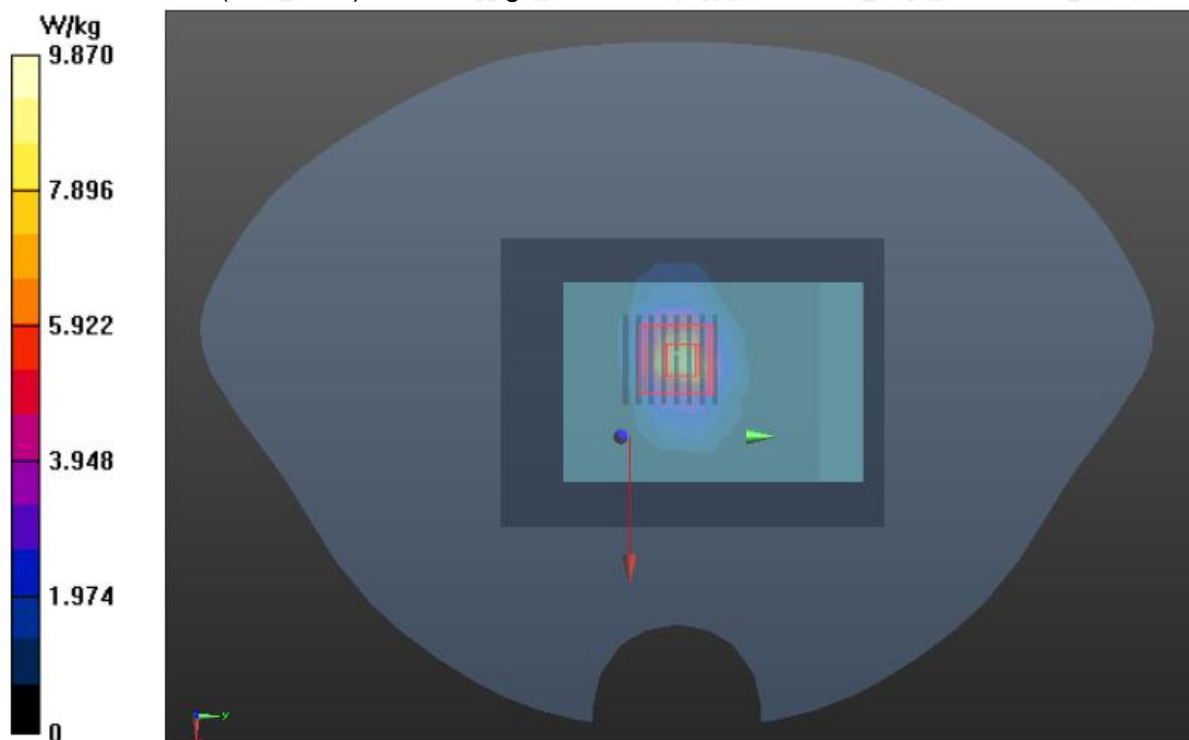

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

APPENDIX B. SAR MEASUREMENT DATA

Test Antenna: Ant 0

Test Laboratory: AGC Lab

U-NII-2A -802.11a CH56- Vertical-Front

DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 20,2018

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1

Frequency: 5280 MHz; Medium parameters used: $f = 5300$ MHz; $\sigma = 5.33$ mho/m; $\epsilon_r = 49.26$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 22.1 Liquid temperature (°C): 21.5

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(5.05, 5.05, 5.05); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH56/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.872 W/kg


BODY/VERTICAL FRONT-CH56/Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.842 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.880 W/kg

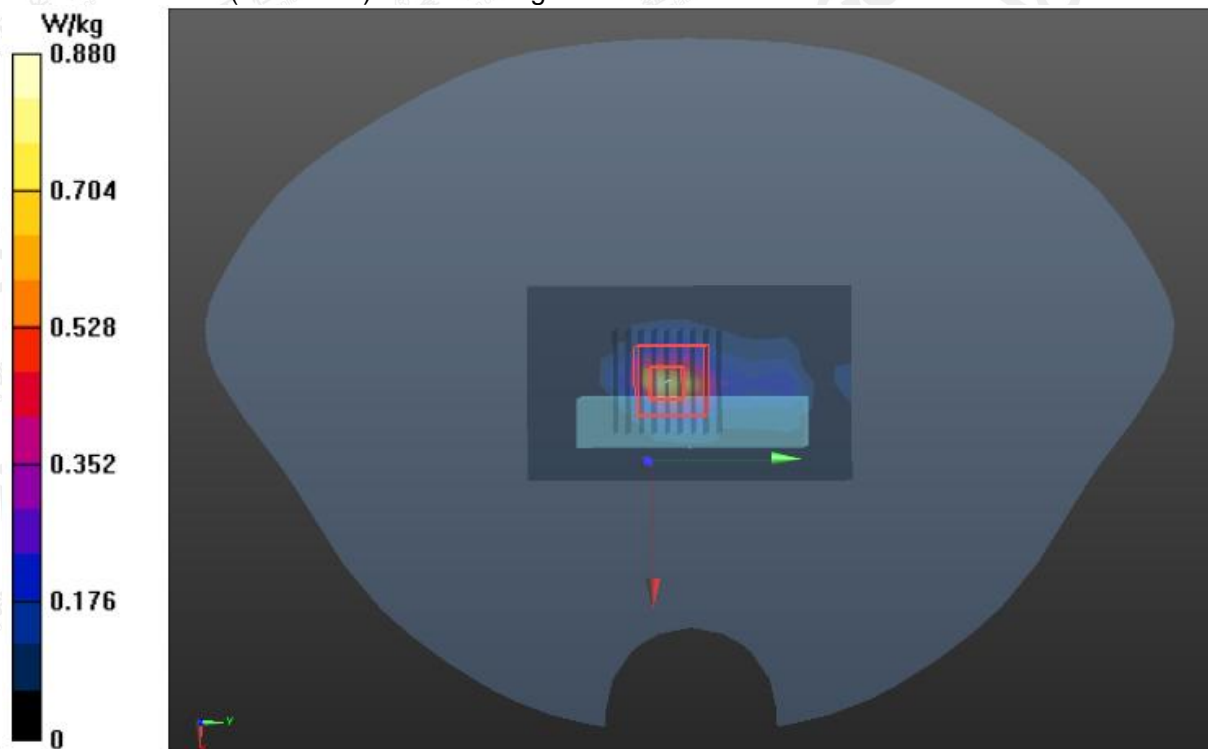

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

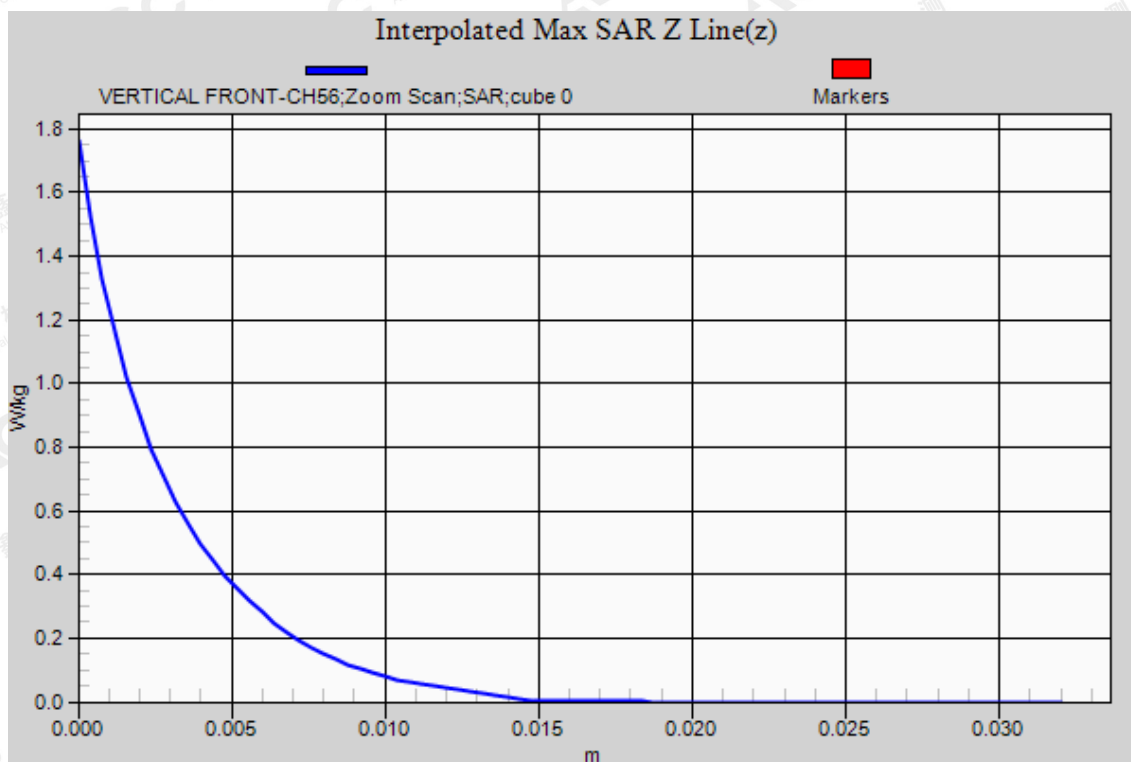

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-2C -802.11a CH140- Vertical-Front
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 22,2018

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1
Frequency: 5700; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.73$ mho/m; $\epsilon_r = 48.62$ $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.9, Liquid temperature (°C): 22.2

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.50, 4.50, 4.50); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH140/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.99 W/kg


BODY/VERTICAL FRONT-CH140/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 24.150 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 6.37 W/kg

SAR(1 g) = 1.5 W/kg; SAR(10 g) = 0.435 W/kg

Maximum value of SAR (measured) = 3.02 W/kg

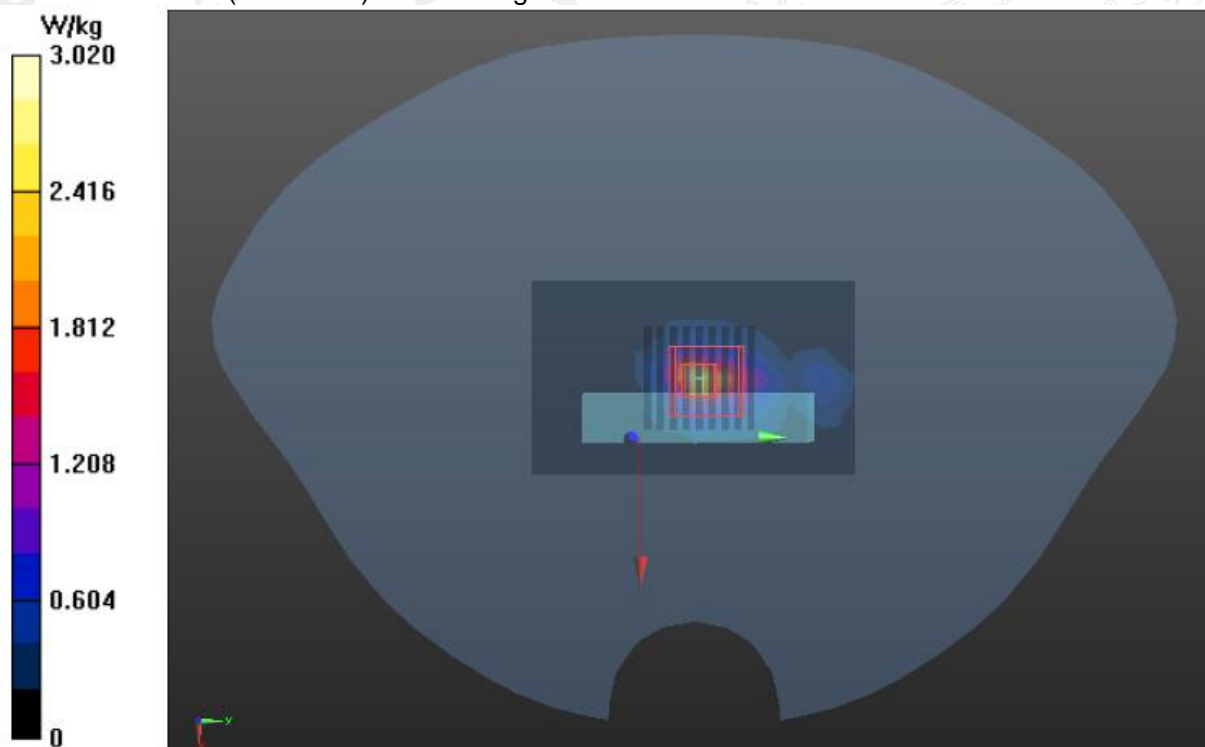

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

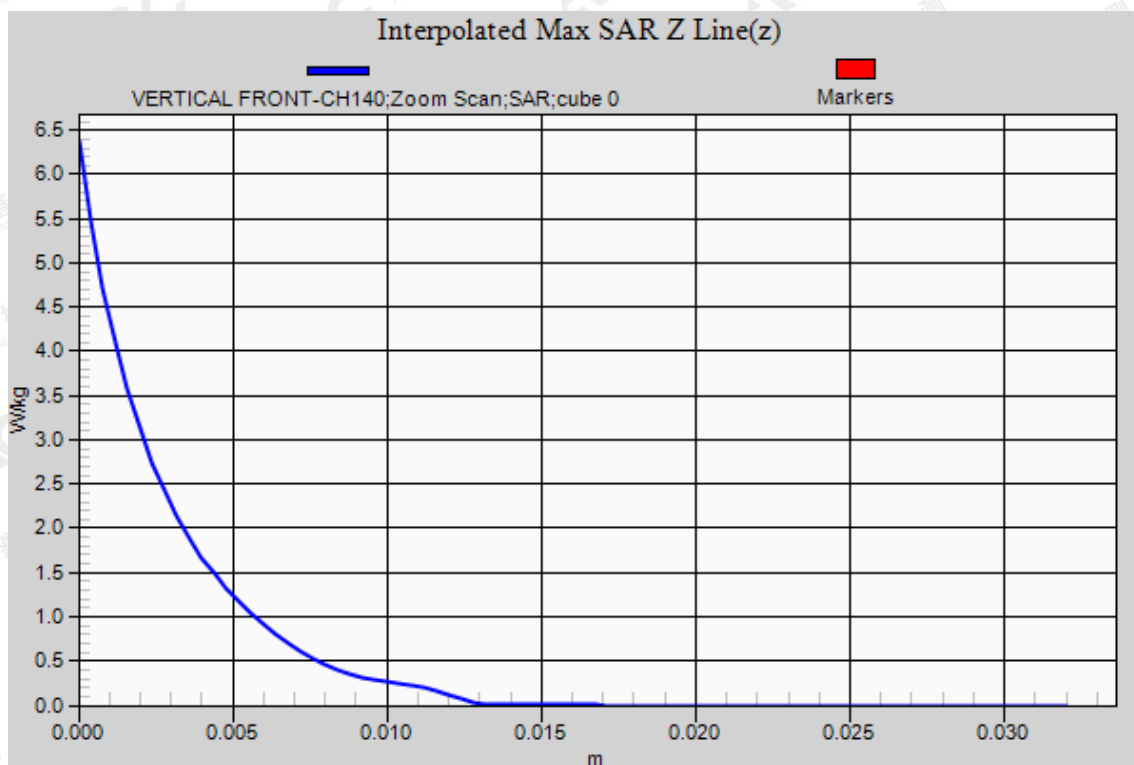

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-3 -802.11n-HT20 CH165- Vertical-Front
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 23,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5825 MHz; Medium parameters used: $f = 5800$ MHz; $\sigma = 6.03$ mho/m; $\epsilon_r = 46.52$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 23.6, Liquid temperature (°C): 22.7

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.33, 4.33, 4.33); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH165/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.78 W/kg


BODY/VERTICAL FRONT-CH165/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 17.932 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 5.01 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.358 W/kg

Maximum value of SAR (measured) = 2.46 W/kg

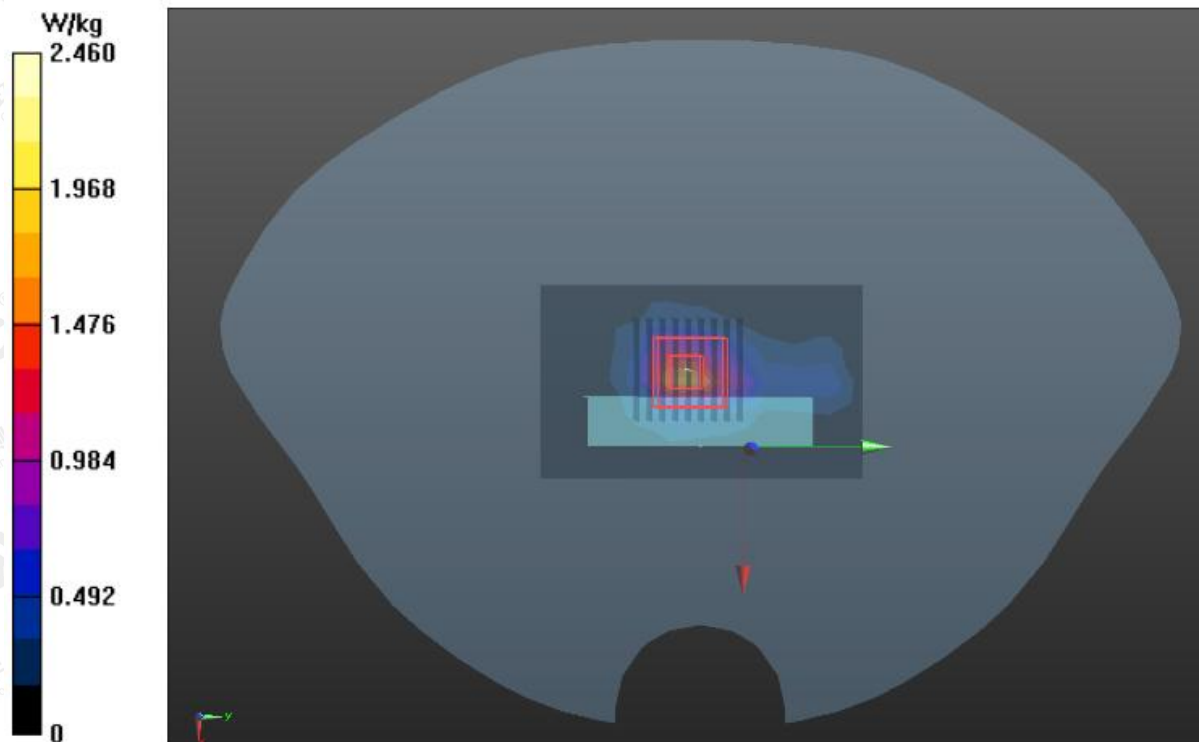

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

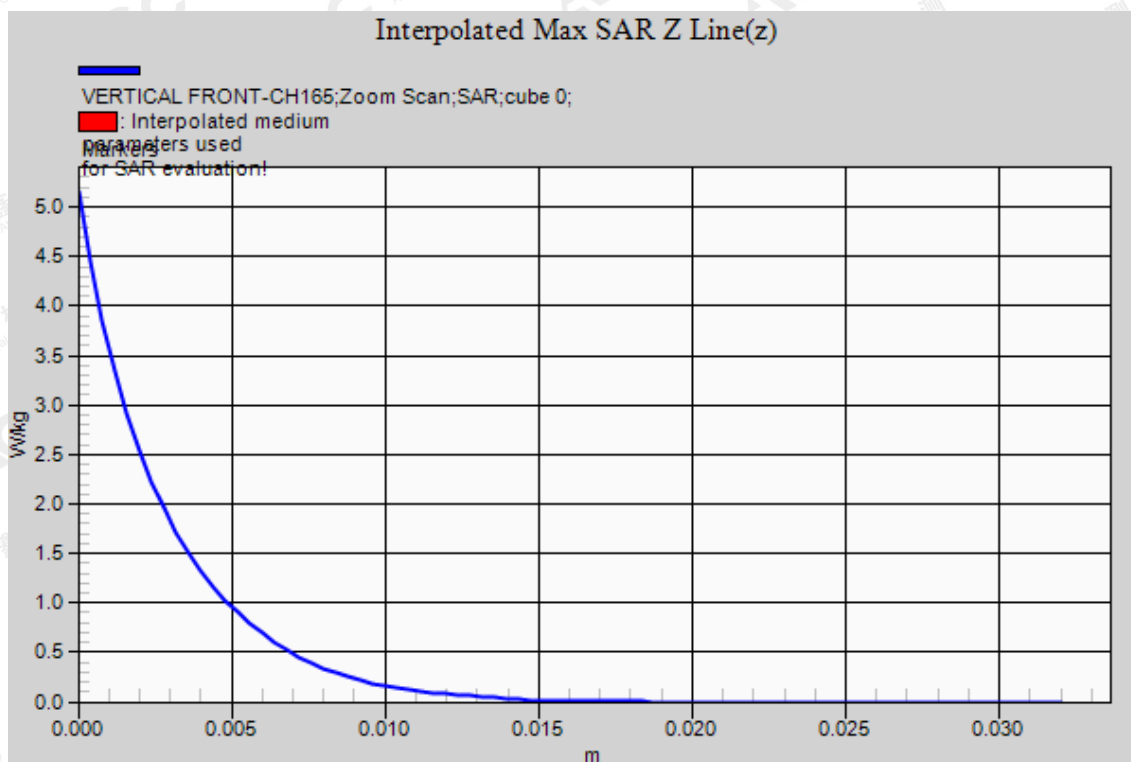

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Antenna: Ant 1

Test Laboratory: AGC Lab

U-NII-2A -802.11a CH56- Vertical-Back

DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 21, 2018

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1

Frequency: 5280 MHz; Medium parameters used: $f = 5300$ MHz; $\sigma = 5.26$ mho/m; $\epsilon_r = 49.86$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.0

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(5.05, 5.05, 5.05); Calibrated: Aug. 10, 2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08, 2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL BACK-CH56/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.746 W/kg


BODY/VERTICAL BACK-CH56/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.094 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.884 W/kg

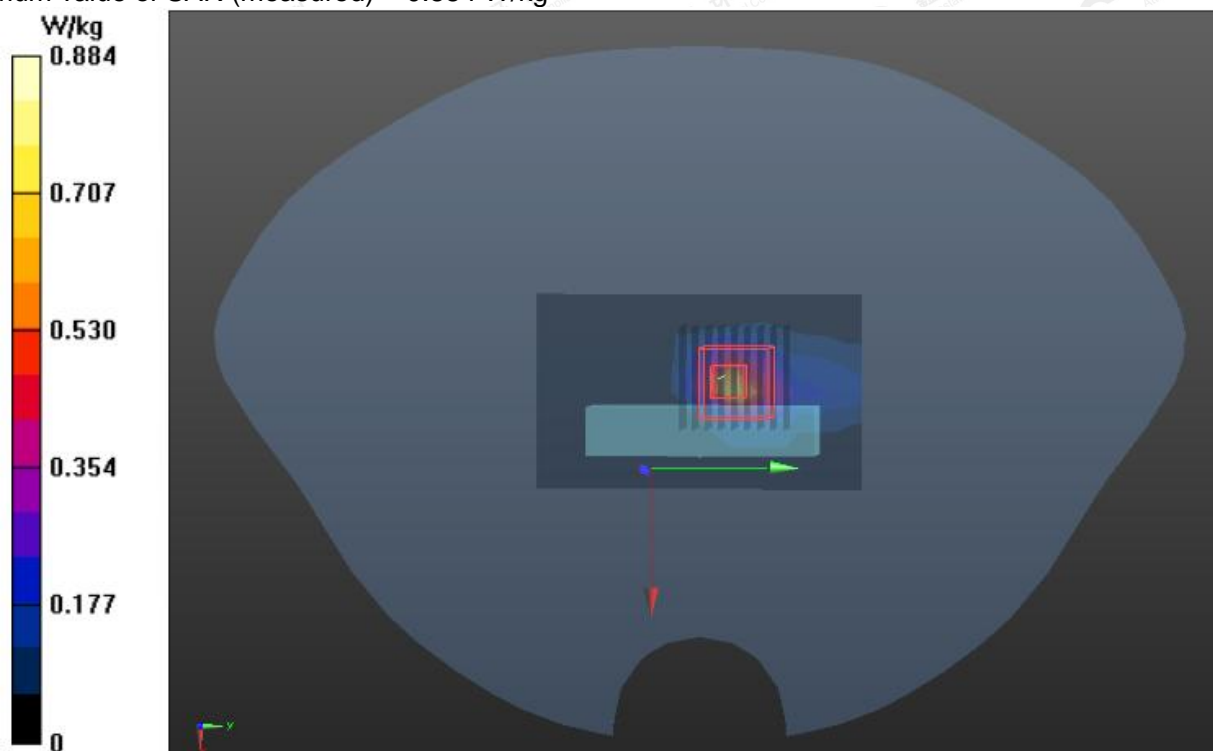

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

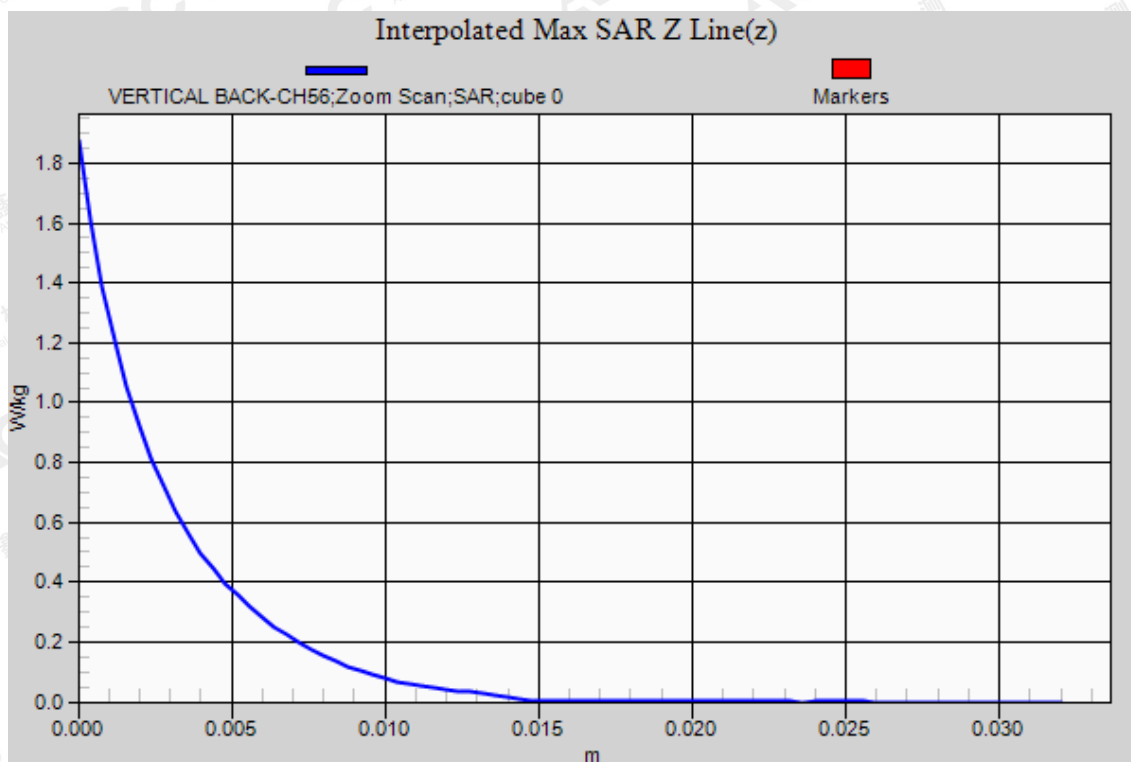

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-2C-802.11a CH140- Vertical-Back
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 24,2018

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1
Frequency: 5700; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.76$ mho/m; $\epsilon_r = 48.23$ $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.8, Liquid temperature (°C): 22.0

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.50, 4.50, 4.50); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL BACK-CH140/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.52 W/kg


BODY/VERTICAL BACK-CH140/Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 22.150 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 5.76 W/kg

SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.384 W/kg

Maximum value of SAR (measured) = 2.69 W/kg

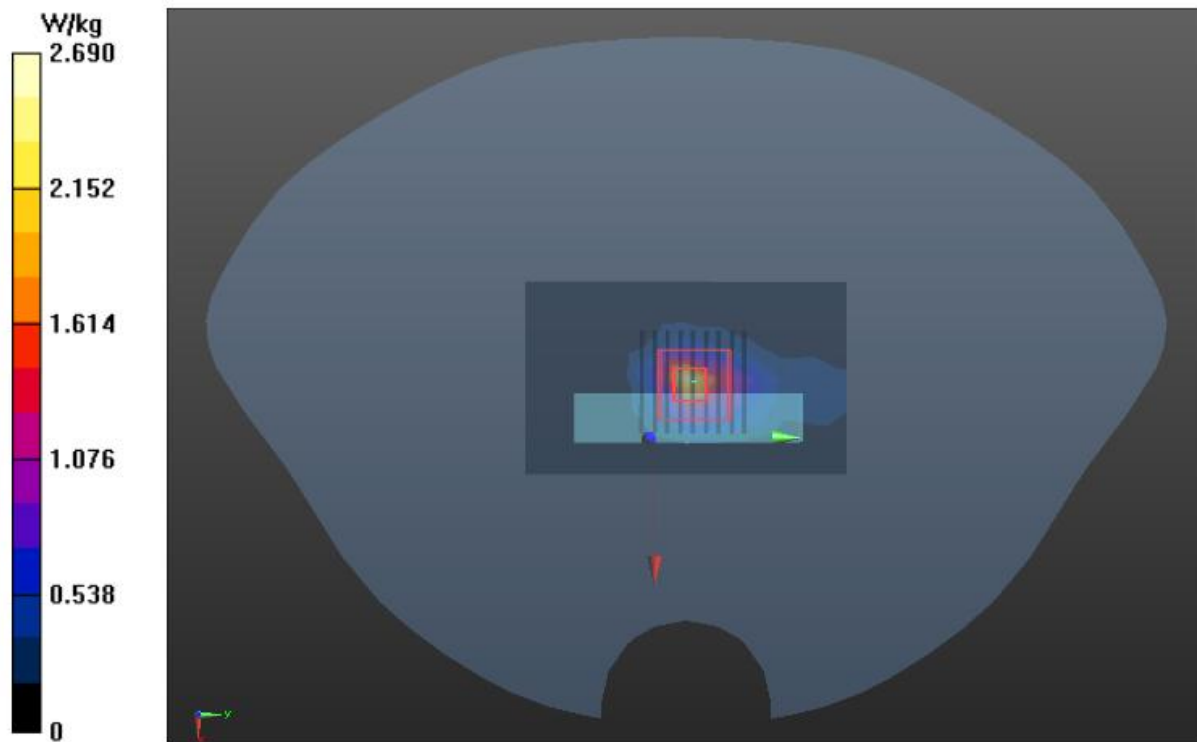

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

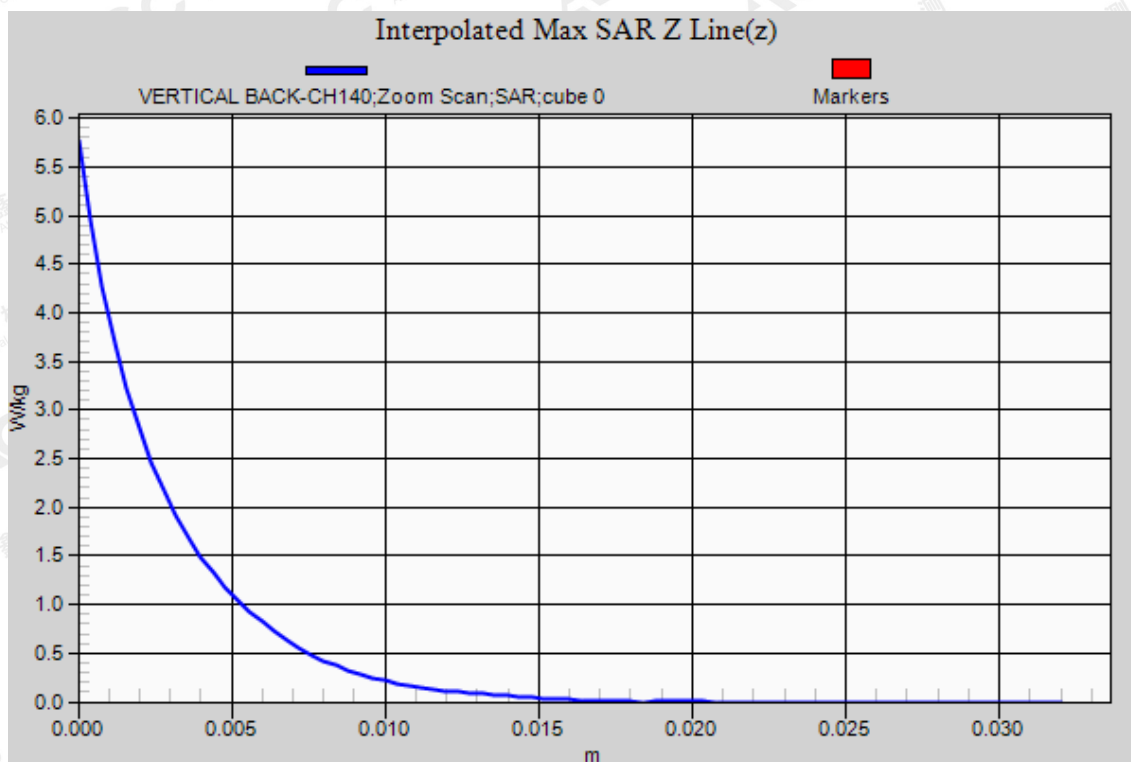

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-3 -802.11n-HT20 CH149- Vertical-Back
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 23,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5745 MHz; Medium parameters used: $f = 5800$ MHz; $\sigma = 5.75$ mho/m; $\epsilon_r = 50.02$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 23.6, Liquid temperature (°C): 22.7

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.33, 4.33, 4.33); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL BACK-CH149/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.28 W/kg


BODY/VERTICAL BACK-CH149/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 20.581 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 4.93 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 2.34 W/kg

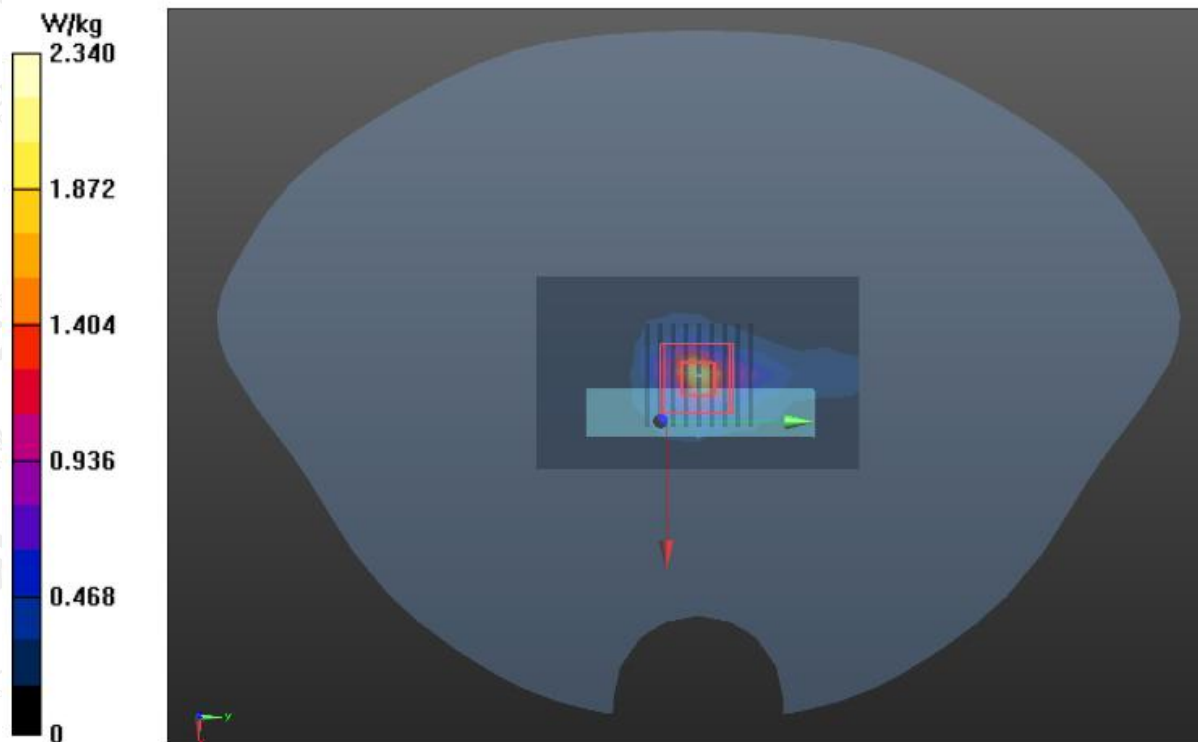

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

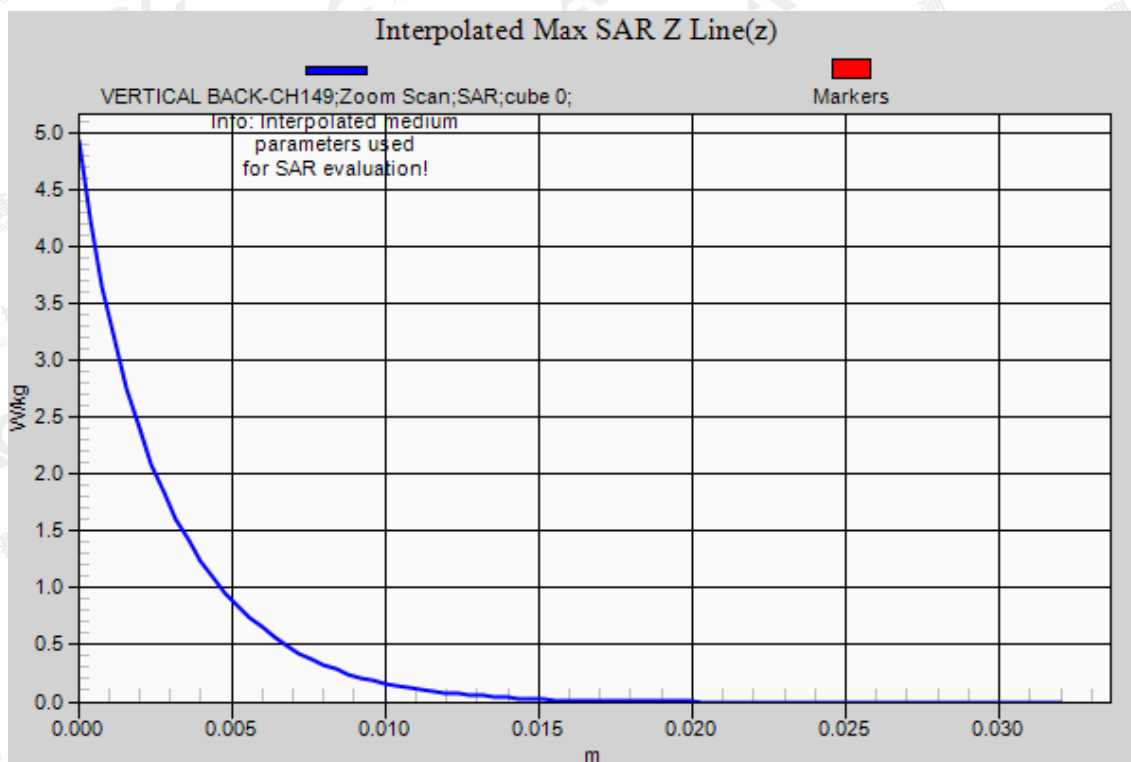

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Antenna: Ant 0+1(MIMO)
Test Laboratory: AGC Lab
U-NII-1 -802.11n-HT20 CH36- Vertical-Front
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 21,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5180 MHz; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.35$ mho/m; $\epsilon_r = 50.25$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 21.7

DASY Configuration:

- Probe: ES3DV4 – SN3753; ConvF(5.18, 5.18, 5.18); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH36/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.503 W/kg


BODY/VERTICAL FRONT-CH36/Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.258 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.780 W/kg

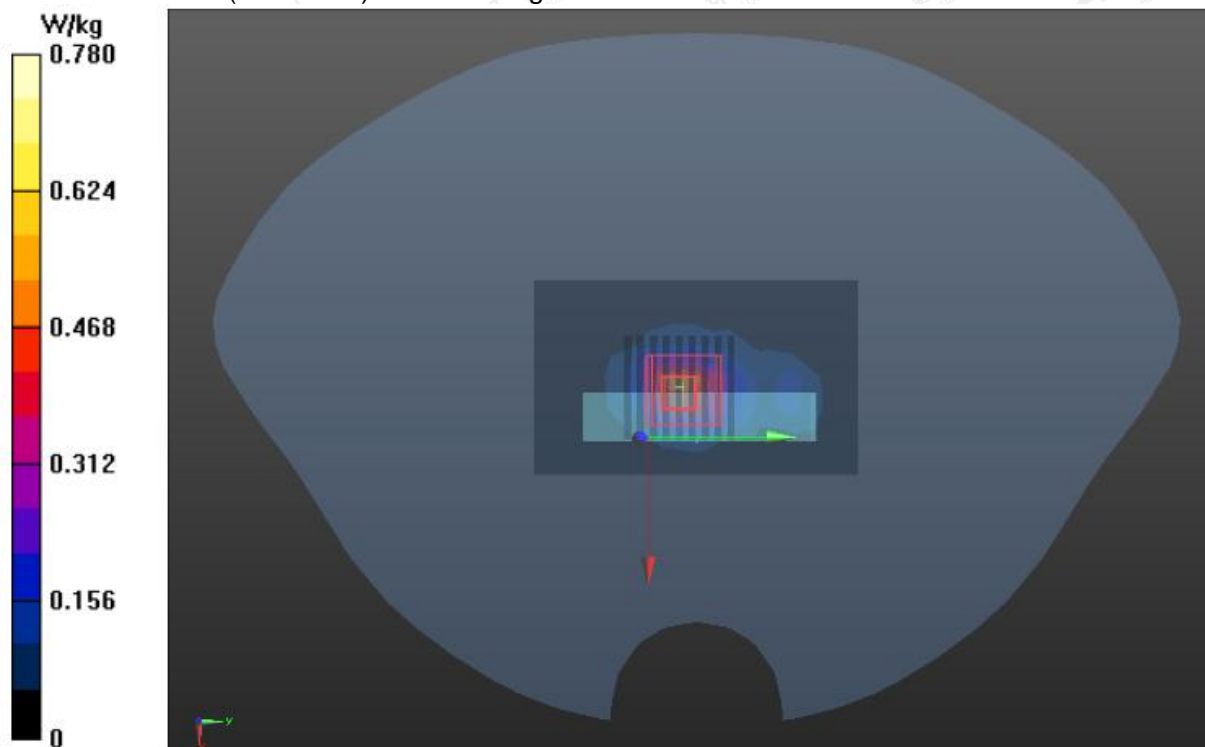

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

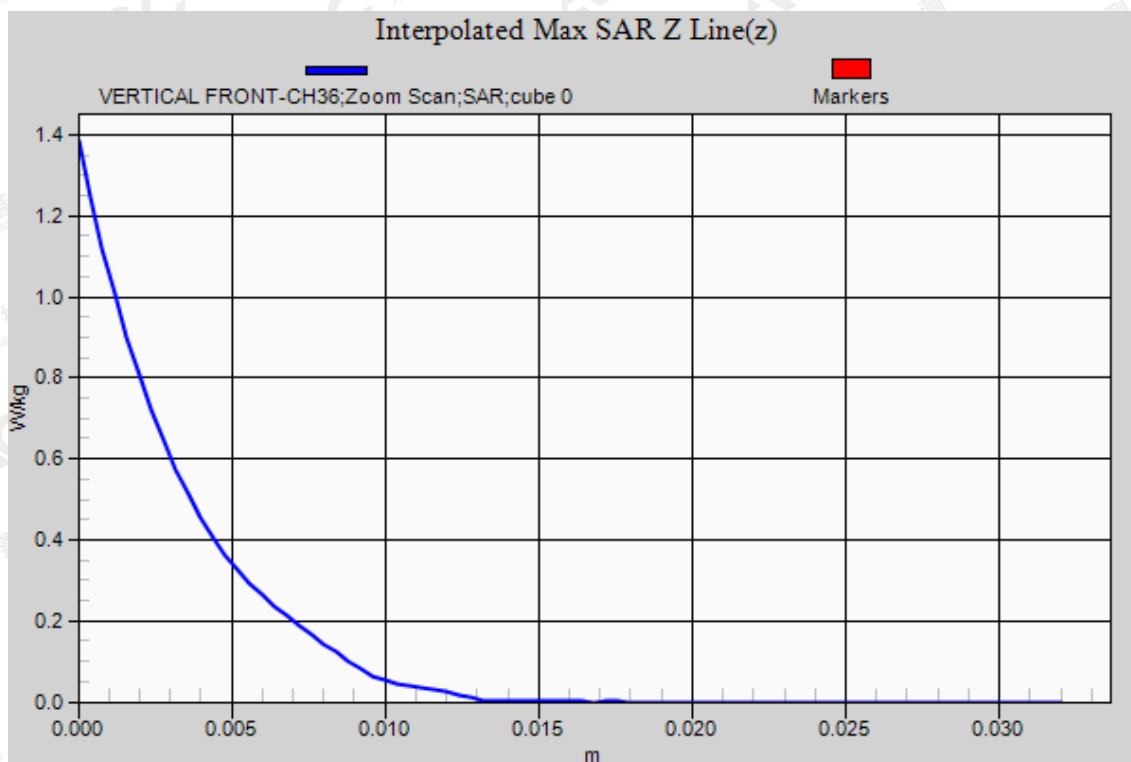

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-2A -802.11n-HT20 CH60- Vertical-Front
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 21,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5300 MHz; Medium parameters used: $f = 5300$ MHz; $\sigma = 49.58$ mho/m; $\epsilon_r = 5.55$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.0

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(5.05, 5.05, 5.05); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH60/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.776 W/kg


BODY/VERTICAL FRONT-CH60/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 12.761 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

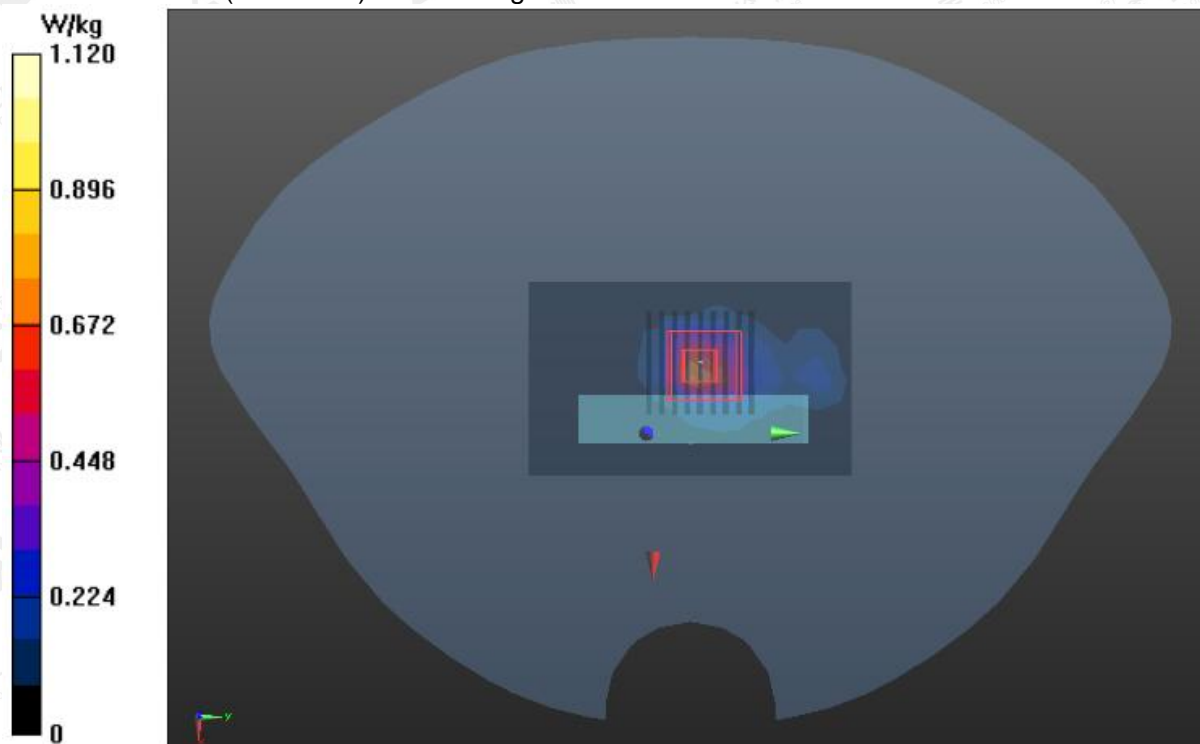

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

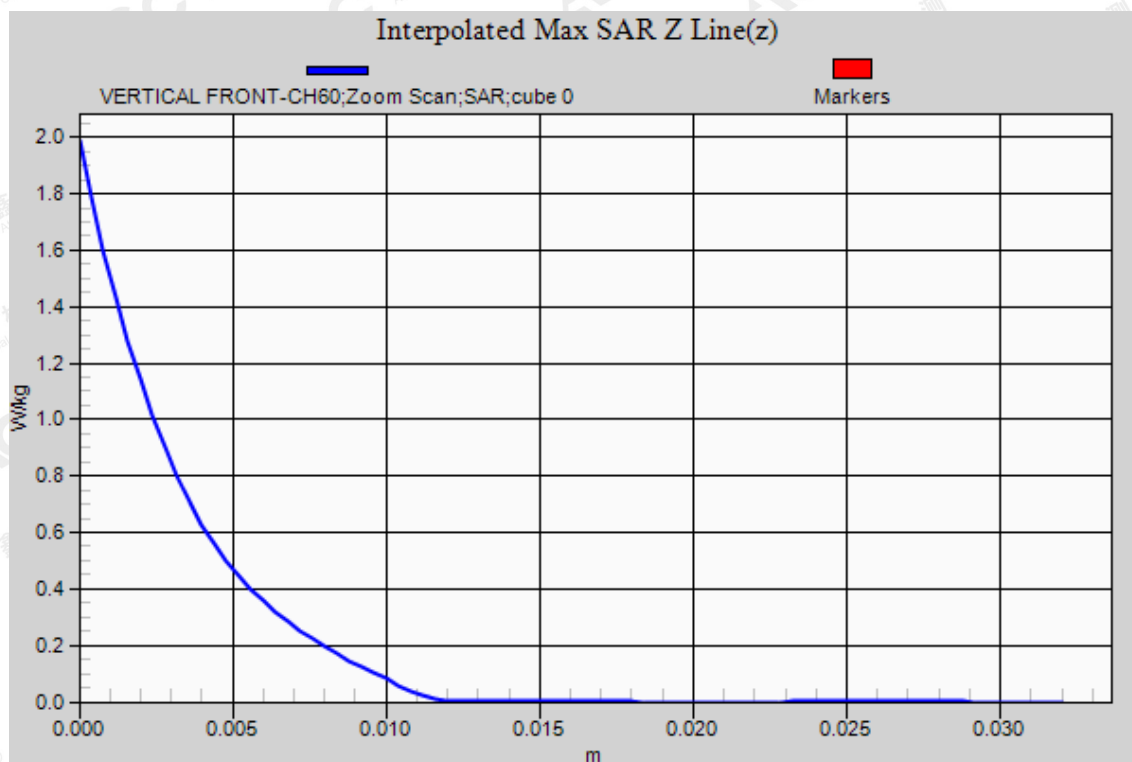

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-2C -802.11n-HT20 CH116- Vertical-Front
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 22,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5580; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.61$ mho/m; $\epsilon_r = 49.68$ $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.9, Liquid temperature (°C): 22.2

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.50, 4.50, 4.50); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH116/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 3.05 W/kg


BODY/VERTICAL FRONT-CH116/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 23.856 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 7.16 W/kg

SAR(1 g) = 1.55 W/kg; SAR(10 g) = 0.421 W/kg

Maximum value of SAR (measured) = 3.21 W/kg

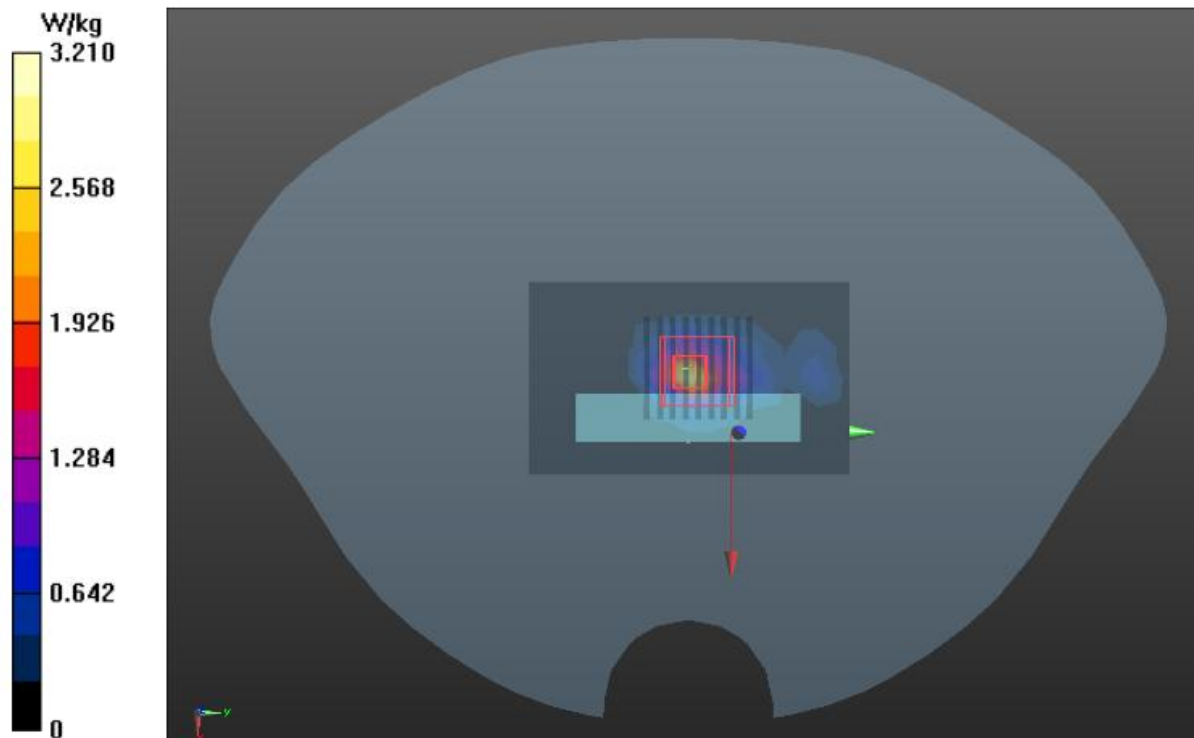

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

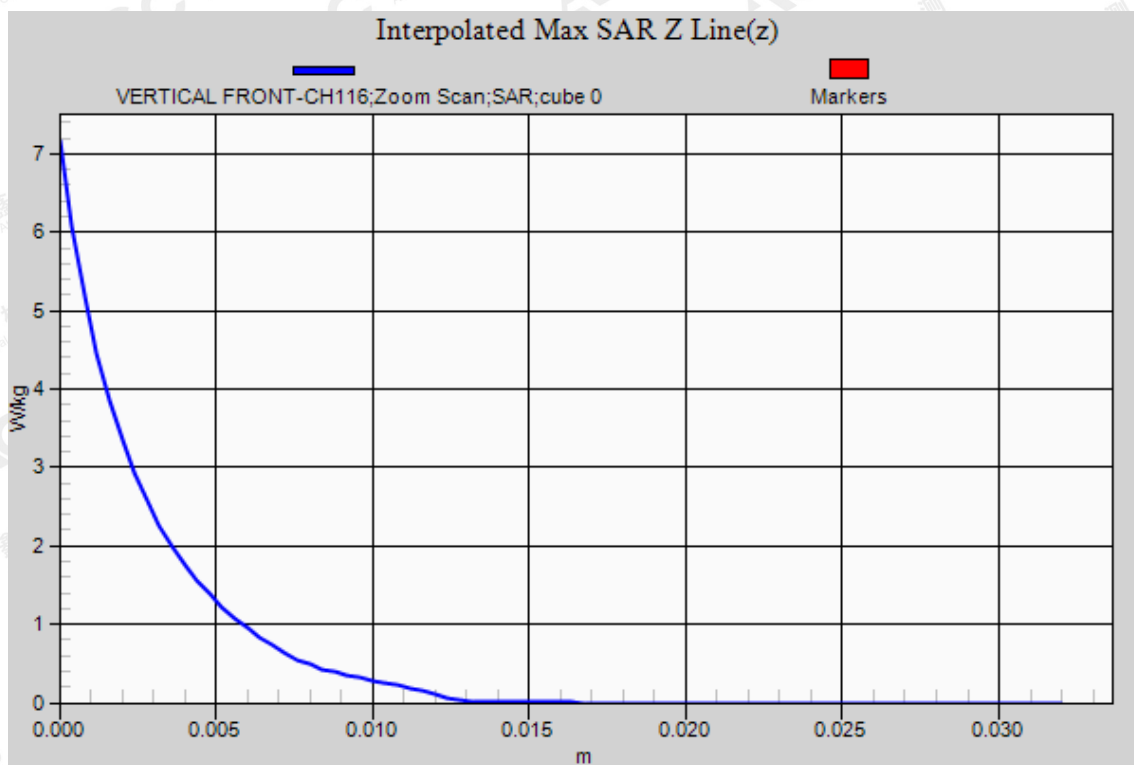

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-3 -802.11n-HT20 CH165- Vertical-Front
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 22,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5825 MHz; Medium parameters used: $f = 5800$ MHz; $\sigma = 5.90$ mho/m; $\epsilon_r = 48.23$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.7, Liquid temperature (°C): 22.2

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.33, 4.33, 4.33); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH165/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.53 W/kg


BODY/VERTICAL FRONT-CH-165/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 15.282 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 5.34 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 2.61 W/kg

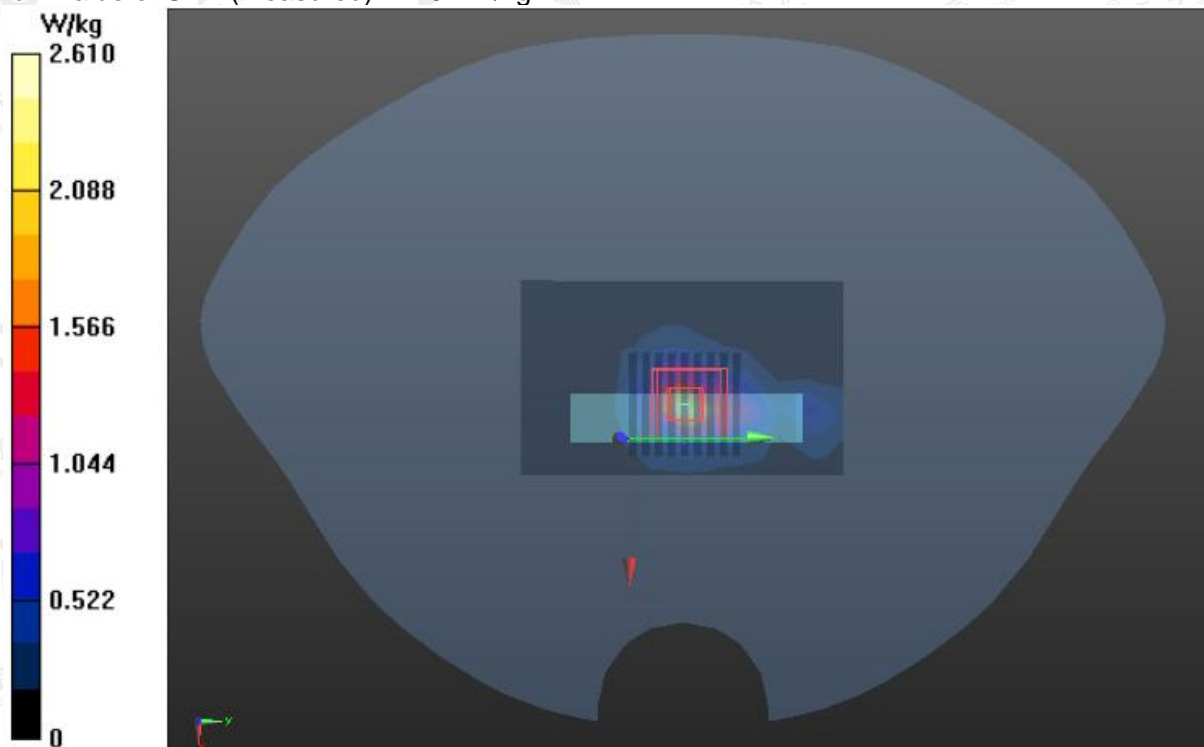

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

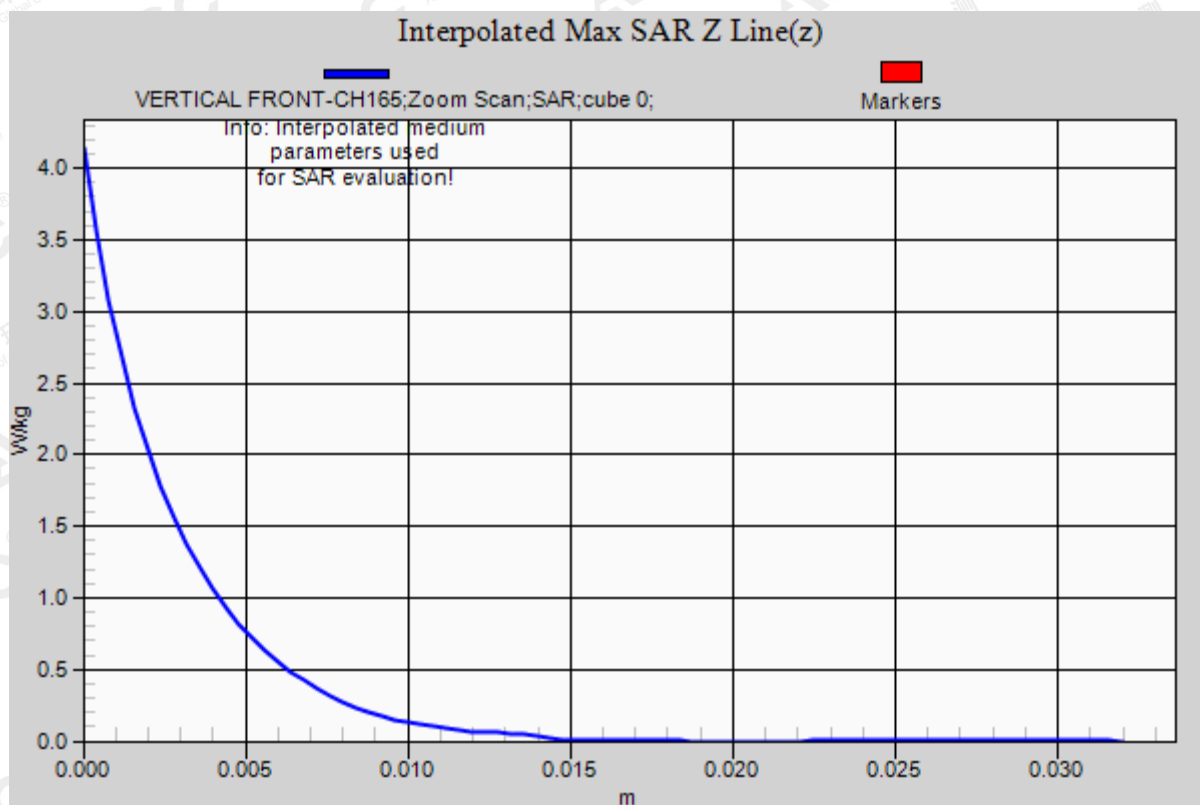

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Repeated SAR Once

Test Laboratory: AGC Lab

U-NII-2C -802.11a CH140- Vertical-Front

DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 22,2018

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1

Frequency: 5700; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.73$ mho/m; $\epsilon_r = 48.62$ $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 22.9, Liquid temperature (°C): 22.2

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.50, 4.50, 4.50); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH140/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.97 W/kg


BODY/VERTICAL FRONT-CH140/Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 24.082 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 6.24 W/kg

SAR(1 g) = 1.46 W/kg; SAR(10 g) = 0.428 W/kg

Maximum value of SAR (measured) = 2.96 W/kg

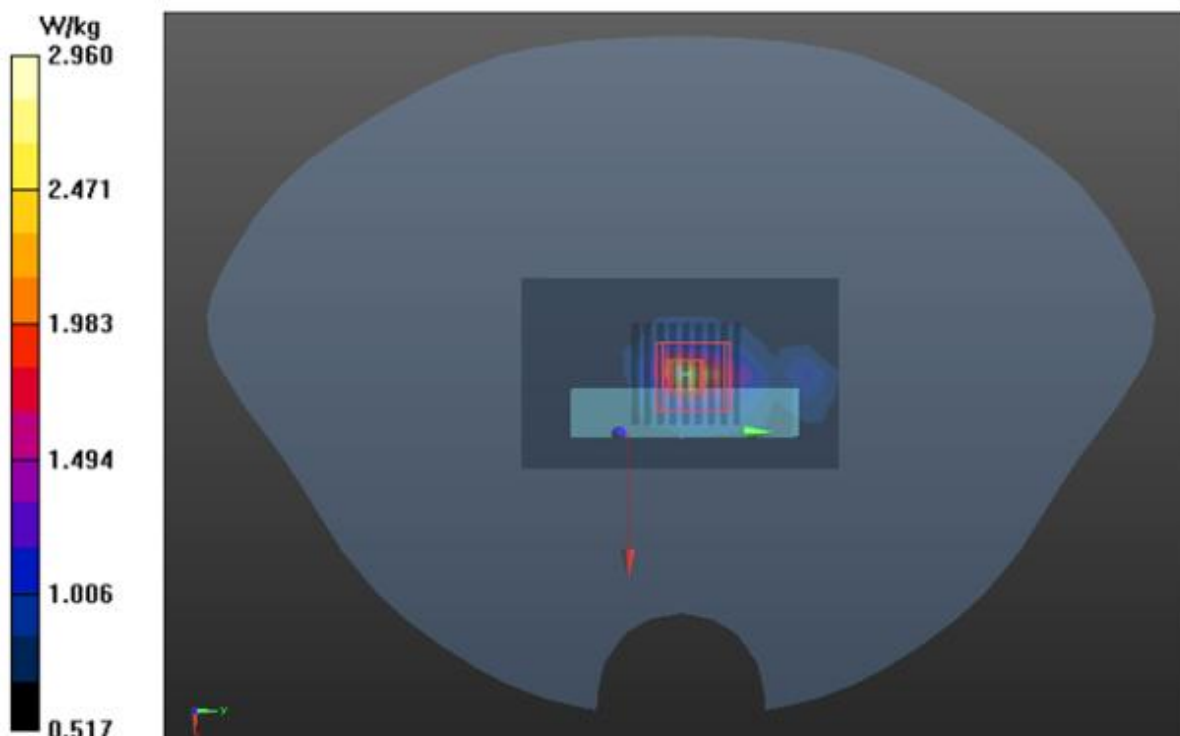

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-3 -802.11n-HT20 CH165- Vertical-Front
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 23,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5825 MHz; Medium parameters used: $f = 5800$ MHz; $\sigma = 6.03$ mho/m; $\epsilon_r = 46.52$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 23.6, Liquid temperature (°C): 22.7

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.33, 4.33, 4.33); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH165/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.85 W/kg


BODY/VERTICAL FRONT-CH165/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 16.637 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 5.03 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 2.27 W/kg

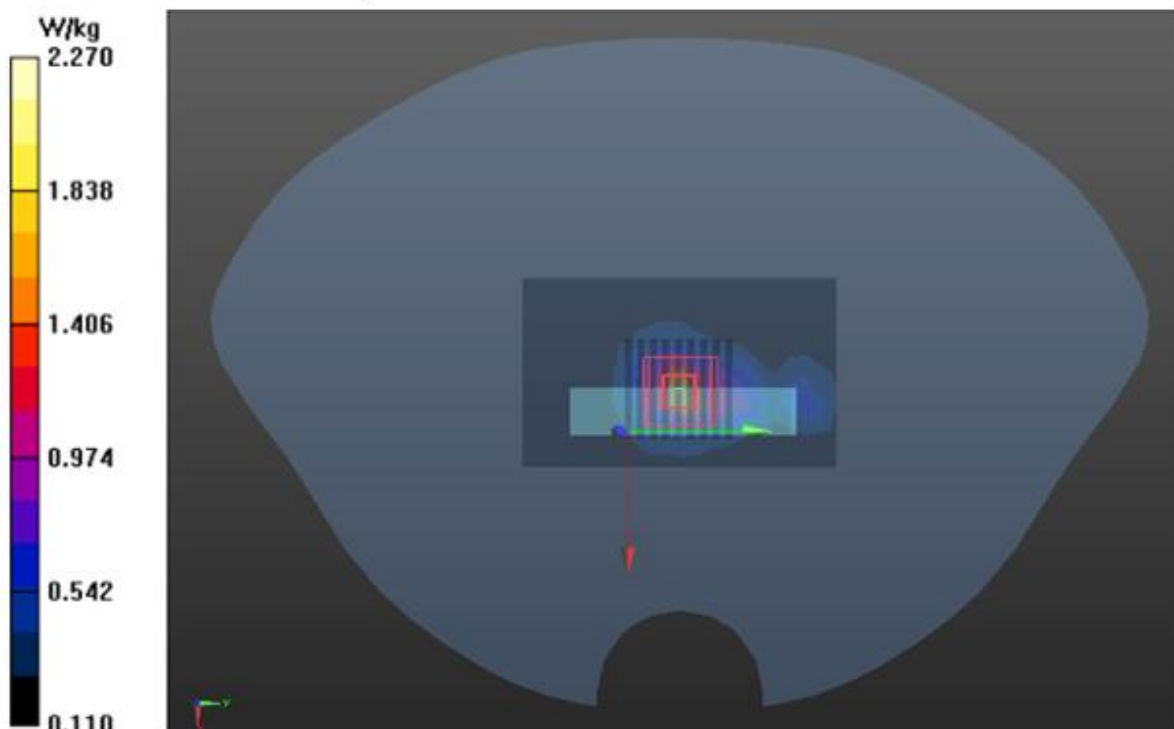

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-2C-802.11a CH140- Vertical-Back
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 24, 2018

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1
Frequency: 5700; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.76$ mho/m; $\epsilon_r = 48.23$ $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.8, Liquid temperature (°C): 22.0

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.50, 4.50, 4.50); Calibrated: Aug. 10, 2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08, 2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL BACK-CH140/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.46 W/kg


BODY/VERTICAL BACK-CH140/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 22.068 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 5.58 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.361 W/kg

Maximum value of SAR (measured) = 2.35 W/kg

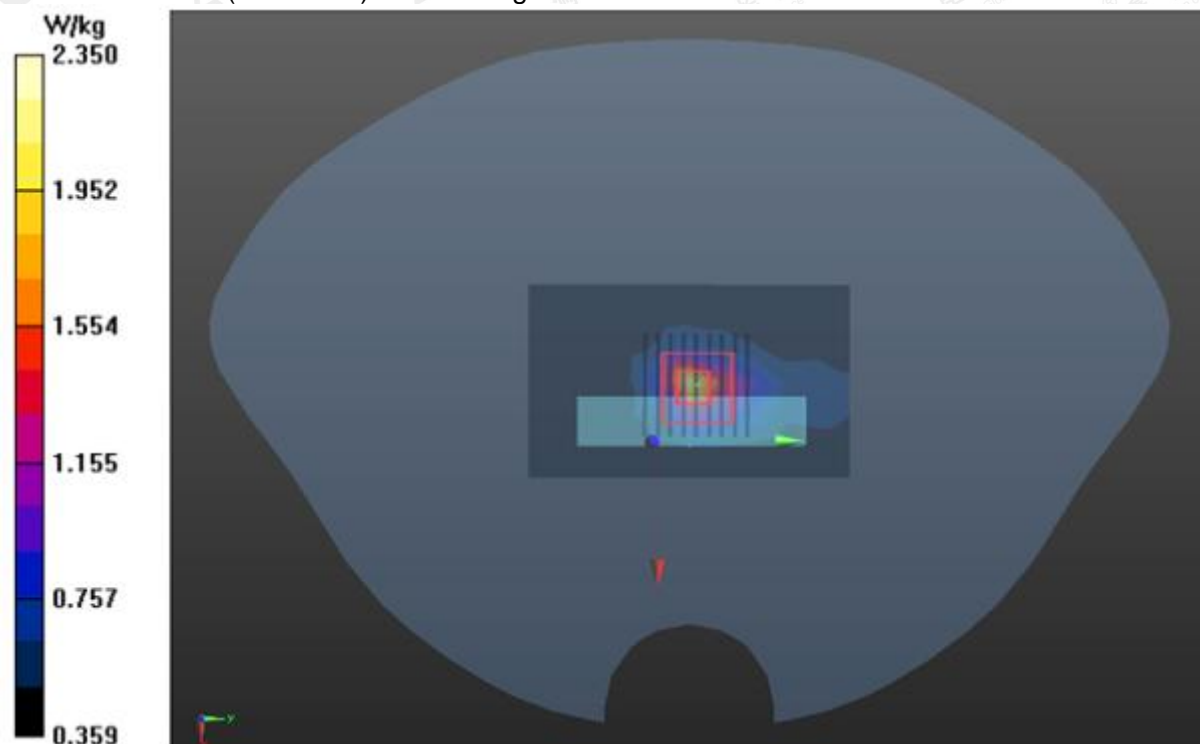

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-3 -802.11n-HT20 CH149- Vertical-Back
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 23,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5745 MHz; Medium parameters used: $f = 5800$ MHz; $\sigma = 5.75$ mho/m; $\epsilon_r = 50.02$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 23.6, Liquid temperature (°C): 22.7

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.33, 4.33, 4.33); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL BACK-CH149/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.95 W/kg


BODY/VERTICAL BACK-CH149/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 20.376 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 4.76 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 2.30 W/kg

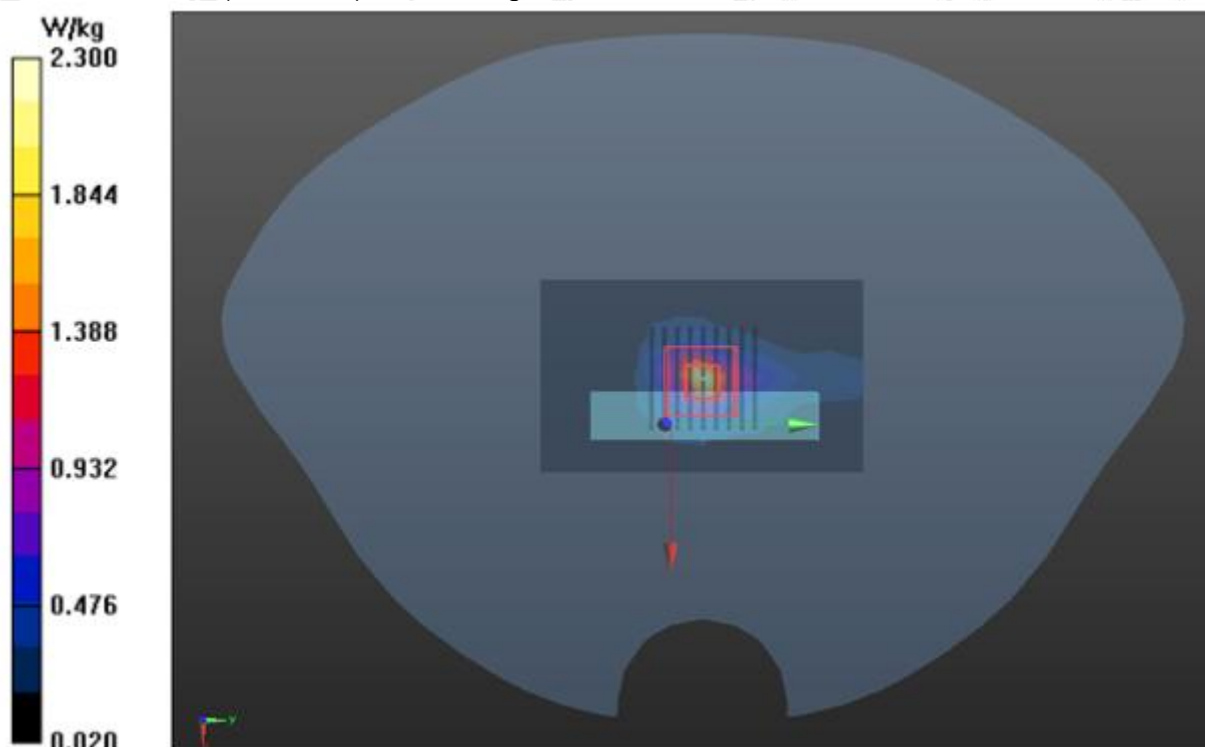

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-2C -802.11n-HT20 CH116- Vertical-Front
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 22,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5580; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.61$ mho/m; $\epsilon_r = 49.68$ $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.9, Liquid temperature (°C): 22.2

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.50, 4.50, 4.50); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH116/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 3.02 W/kg


BODY/VERTICAL FRONT-CH116/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 23.732 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 7.03 W/kg

SAR(1 g) = 1.52 W/kg; SAR(10 g) = 0.413 W/kg

Maximum value of SAR (measured) = 2.96 W/kg

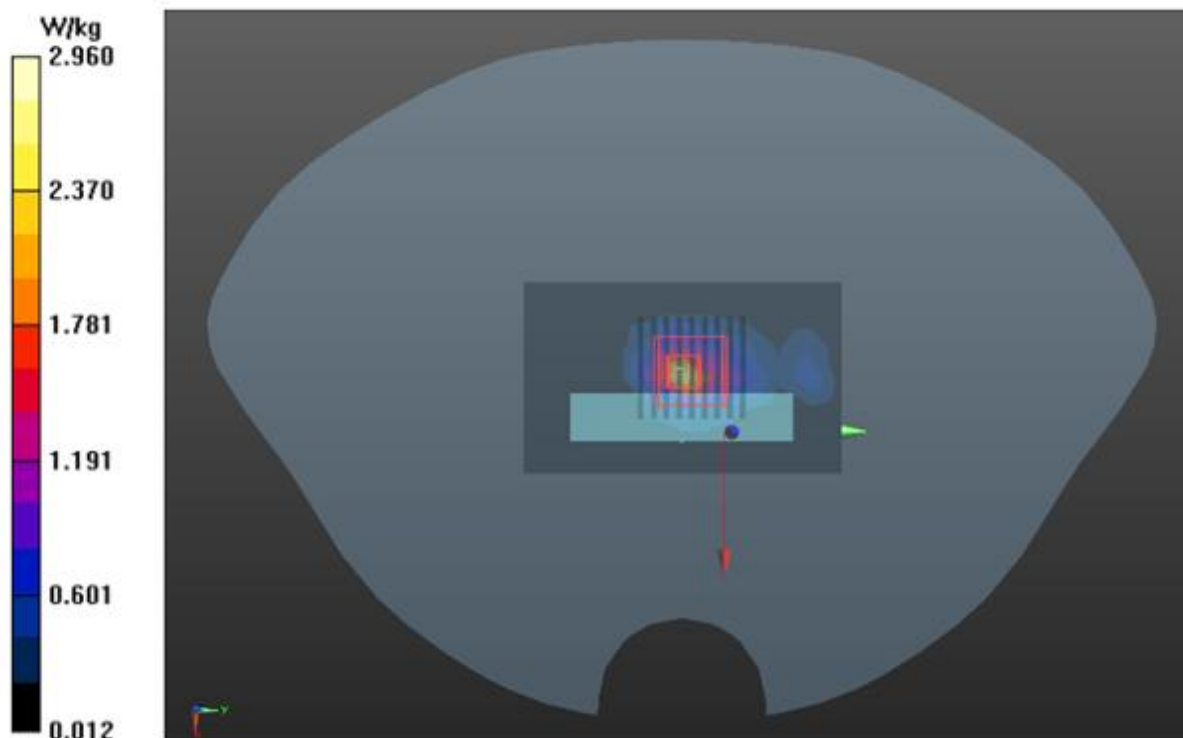

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-3 -802.11n-HT20 CH165- Vertical-Front
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 22,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5825 MHz; Medium parameters used: $f = 5800$ MHz; $\sigma = 5.90$ mho/m; $\epsilon_r = 48.23$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.7, Liquid temperature (°C): 22.2

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.33, 4.33, 4.33); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH165/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.47 W/kg


BODY/VERTICAL FRONT-CH165/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 15.176 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 5.24 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 2.52 W/kg

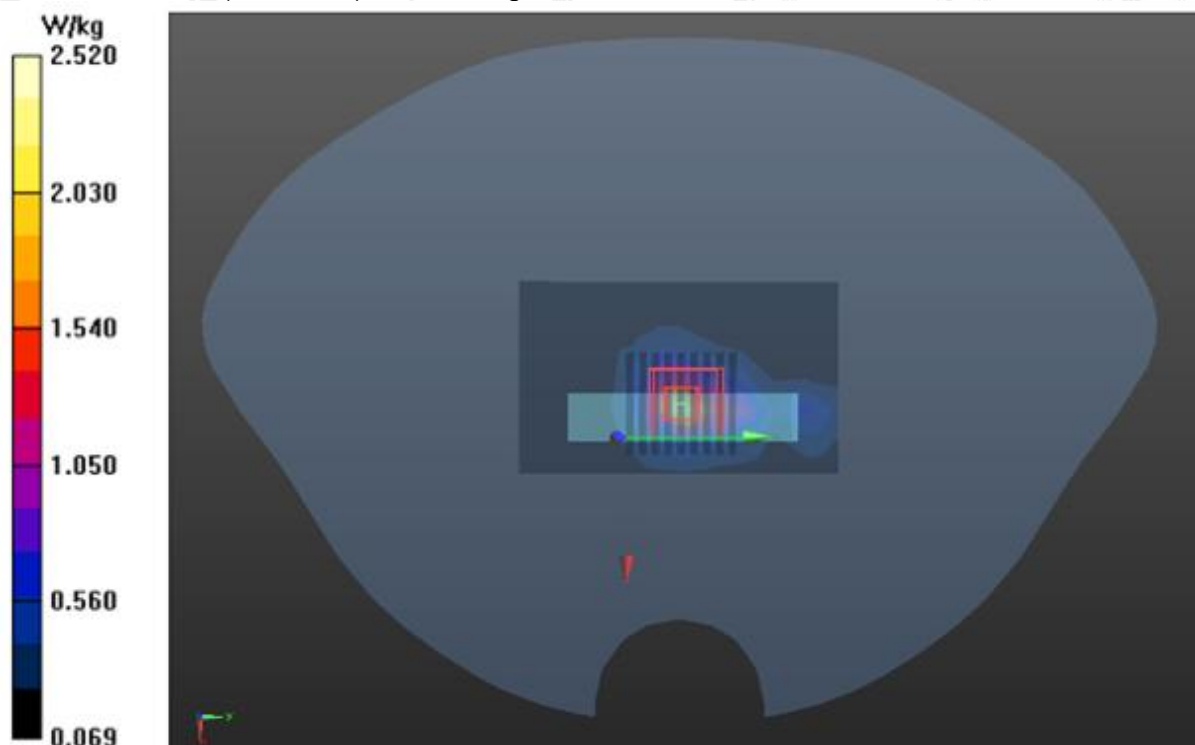

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Repeated SAR Twice

Test Laboratory: AGC Lab

U-NII-2C -802.11a CH140- Vertical-Front

DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 22,2018

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1

Frequency: 5700; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.73$ mho/m; $\epsilon_r = 48.62$ $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 22.9, Liquid temperature (°C): 22.2

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.50, 4.50, 4.50); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL FRONT-CH140/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.86 W/kg


BODY/VERTICAL FRONT-CH140/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 23.462 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 7.01 W/kg

SAR(1 g) = 1.44 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 2.74 W/kg

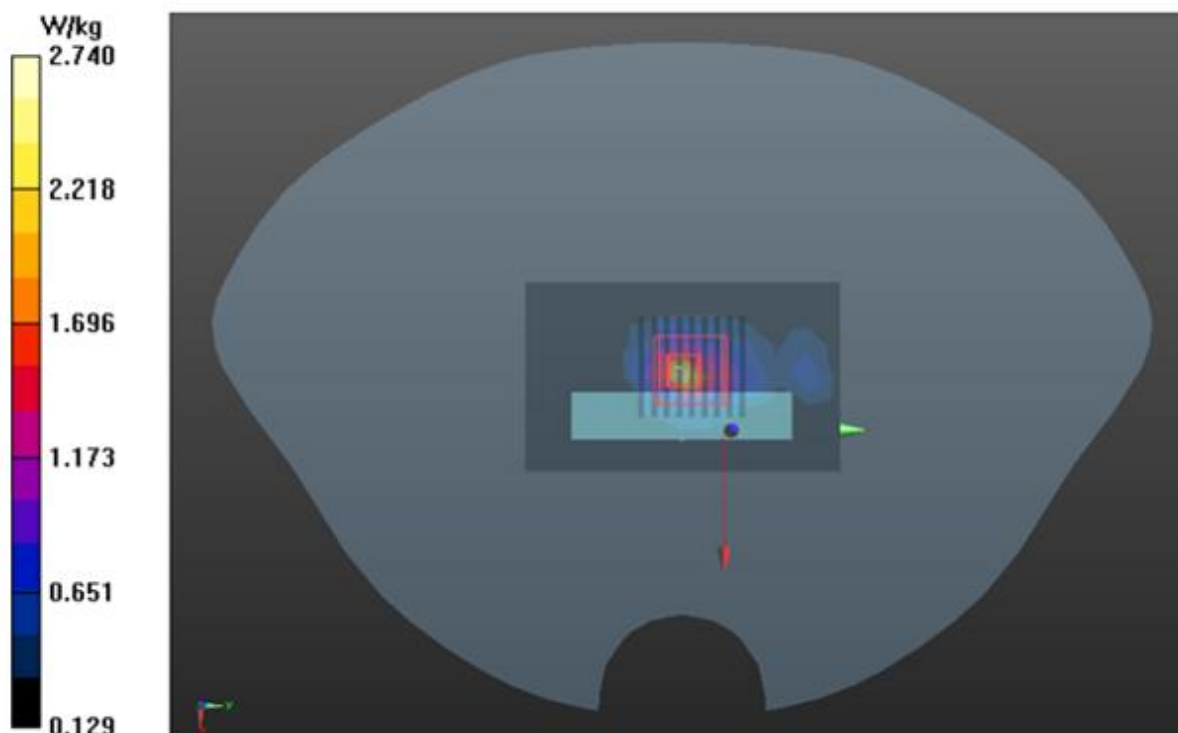

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab
U-NII-2C -802.11n-HT20 CH116- Vertical-Front
DUT: Wi-Fi Dongle; Type: UEI2236B

Date: Aug. 22,2018

Communication System: Wi-Fi; Communication System Band: 802.11n-HT20; Duty Cycle: 1:1
Frequency: 5580; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.61$ mho/m; $\epsilon_r = 49.68$ $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.9, Liquid temperature (°C): 22.2

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.50, 4.50, 4.50); Calibrated: Aug. 10,2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1398; Calibrated: Feb. 08,2018
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

BODY/VERTICAL BACK-CH116/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.58 W/kg


BODY/VERTICAL BACK-CH116/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 23.375 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 6.57 W/kg

SAR(1 g) = 1.42 W/kg; SAR(10 g) = 0.398 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

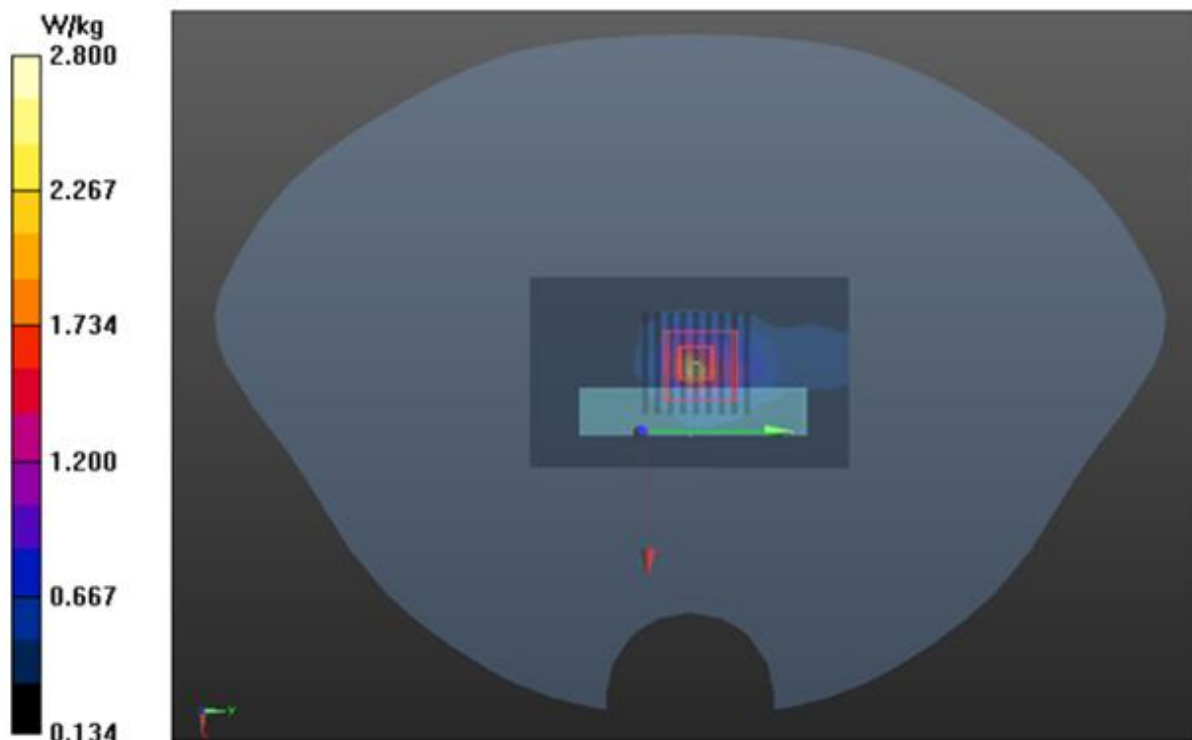


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

APPENDIX C. TEST SETUP PHOTOGRAPHS

Horizontal-Up_5mm



Horizontal-Down_5mm

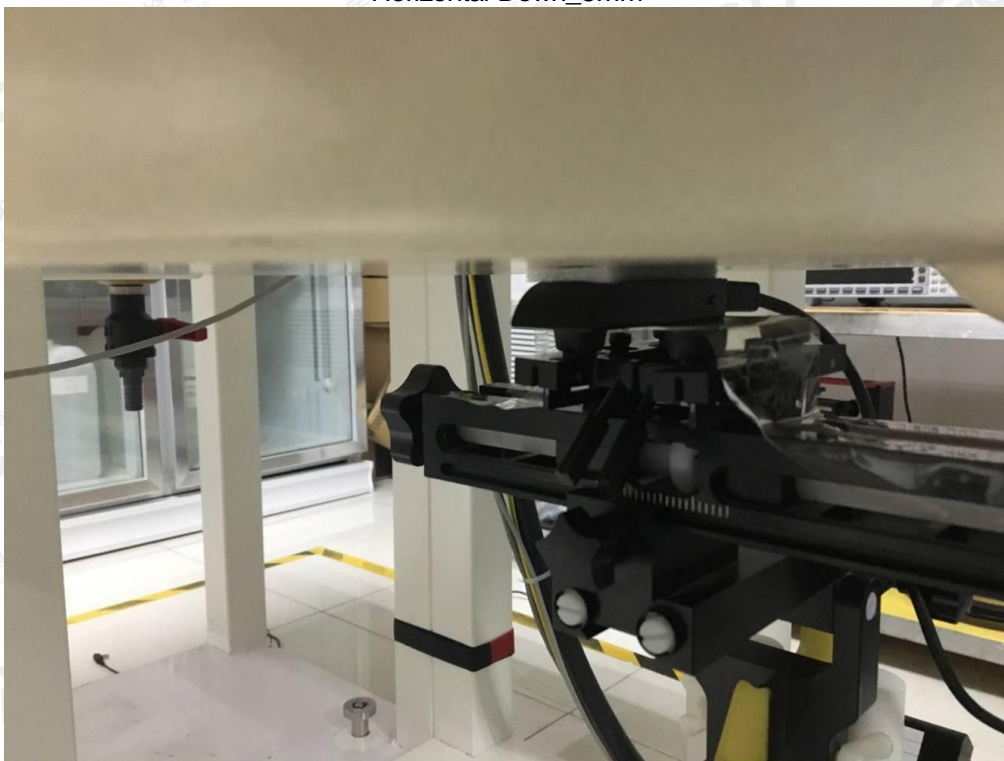

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Vertical-Front_5mm



Vertical-Back_5mm



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


Tip Mode_5mm



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note : The position used in the measurement were according to IEEE 1528-2013

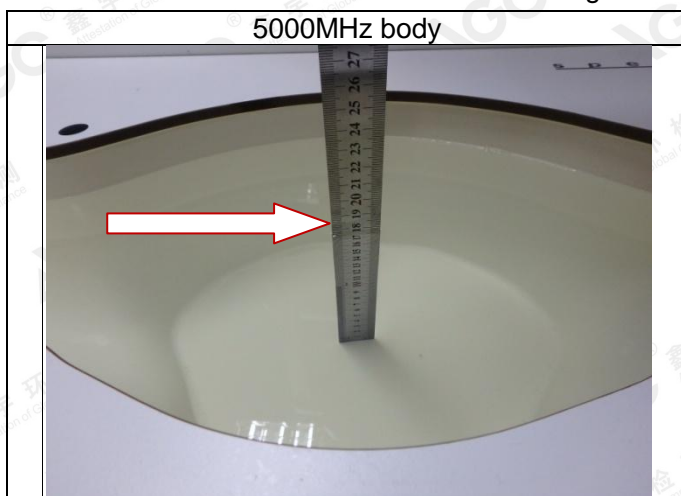

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

APPENDIX D. CALIBRATION DATA

Refer to Attached files.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.