




Delta 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl 0.80 dB VBW 3 MHz
92 dBV 2.2044019 ms SWT 100 ms Unit dBV

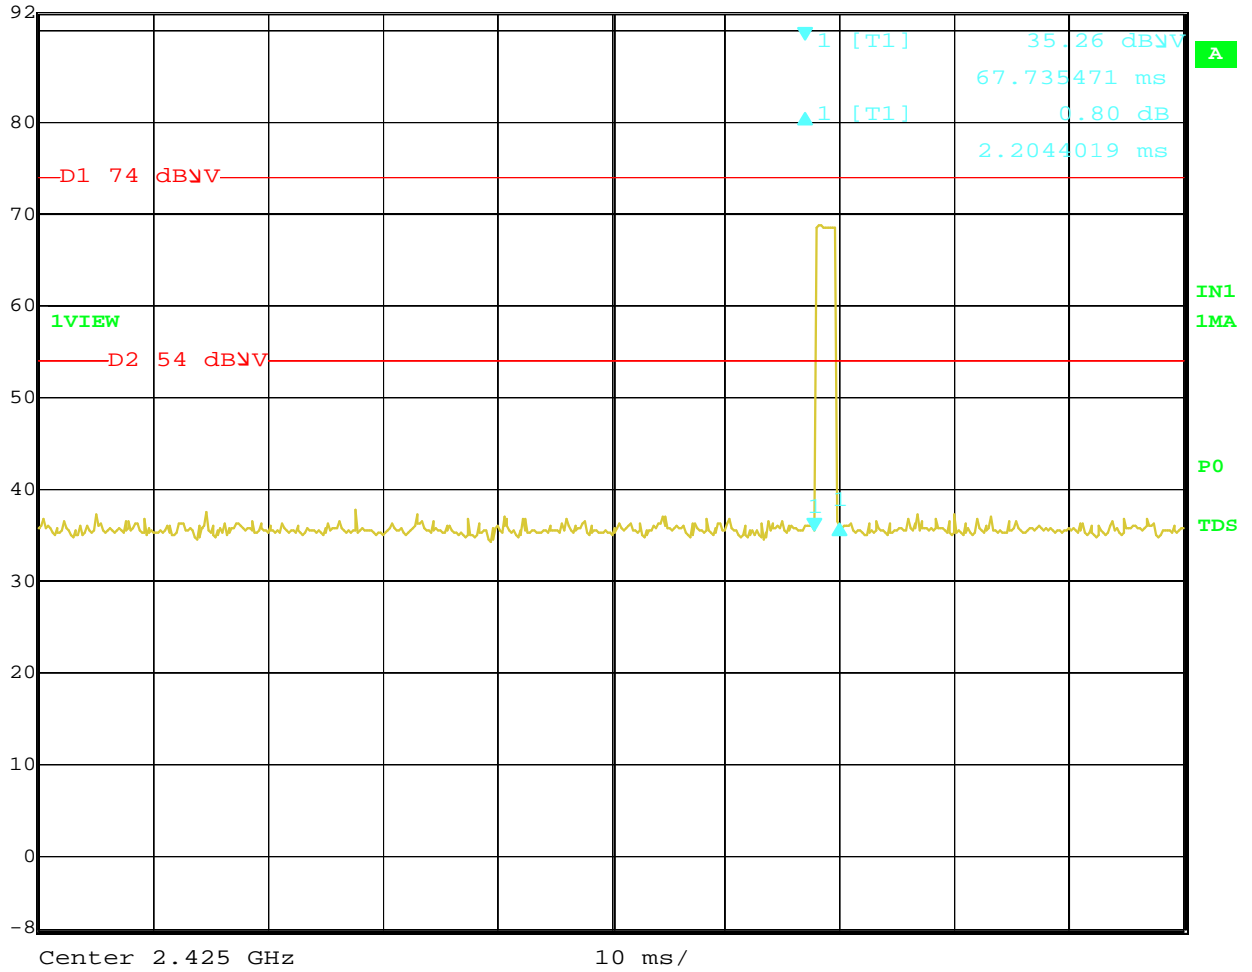


Date: 29.JAN.2014 16:25:32

Time of One Pulse – Advertising Mode



Delta 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 1.39 dB VBW 3 MHz
102 dB μ V 410.821643 ms SWT 1 s Unit dB μ V

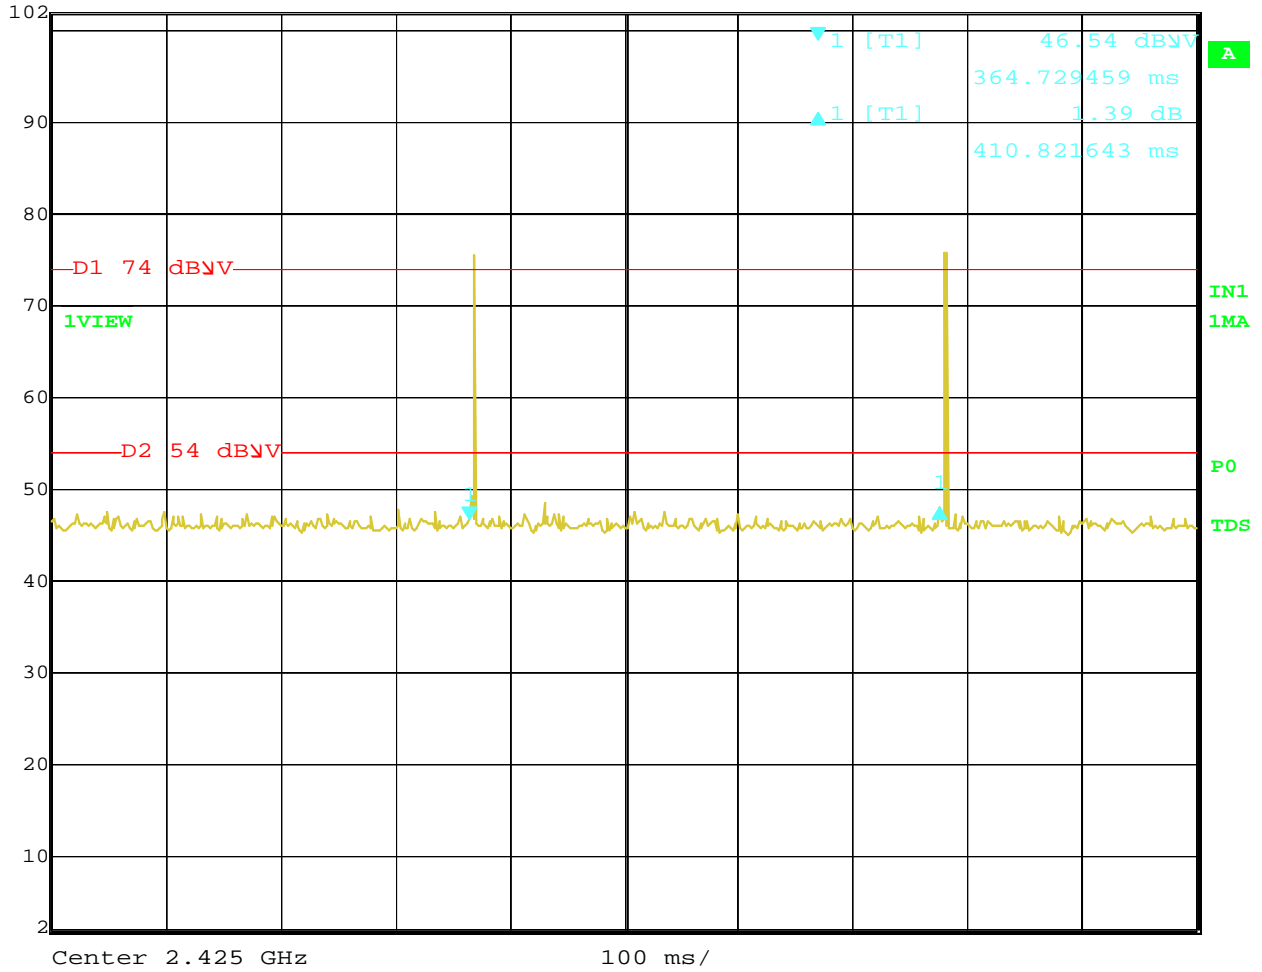


Date: 29.JAN.2014 16:28:45

Number of Pulses in 100 mS in Advertising Mode
The duty cycle is less than 10%



Max/Ref Lvl Delta 1 [T1] RBW 1 MHz RF Att 0 dB
102 dBV 0.17 dB VBW 3 MHz
92 dBV 2.905691 ms SWT 200 ms Unit dBV

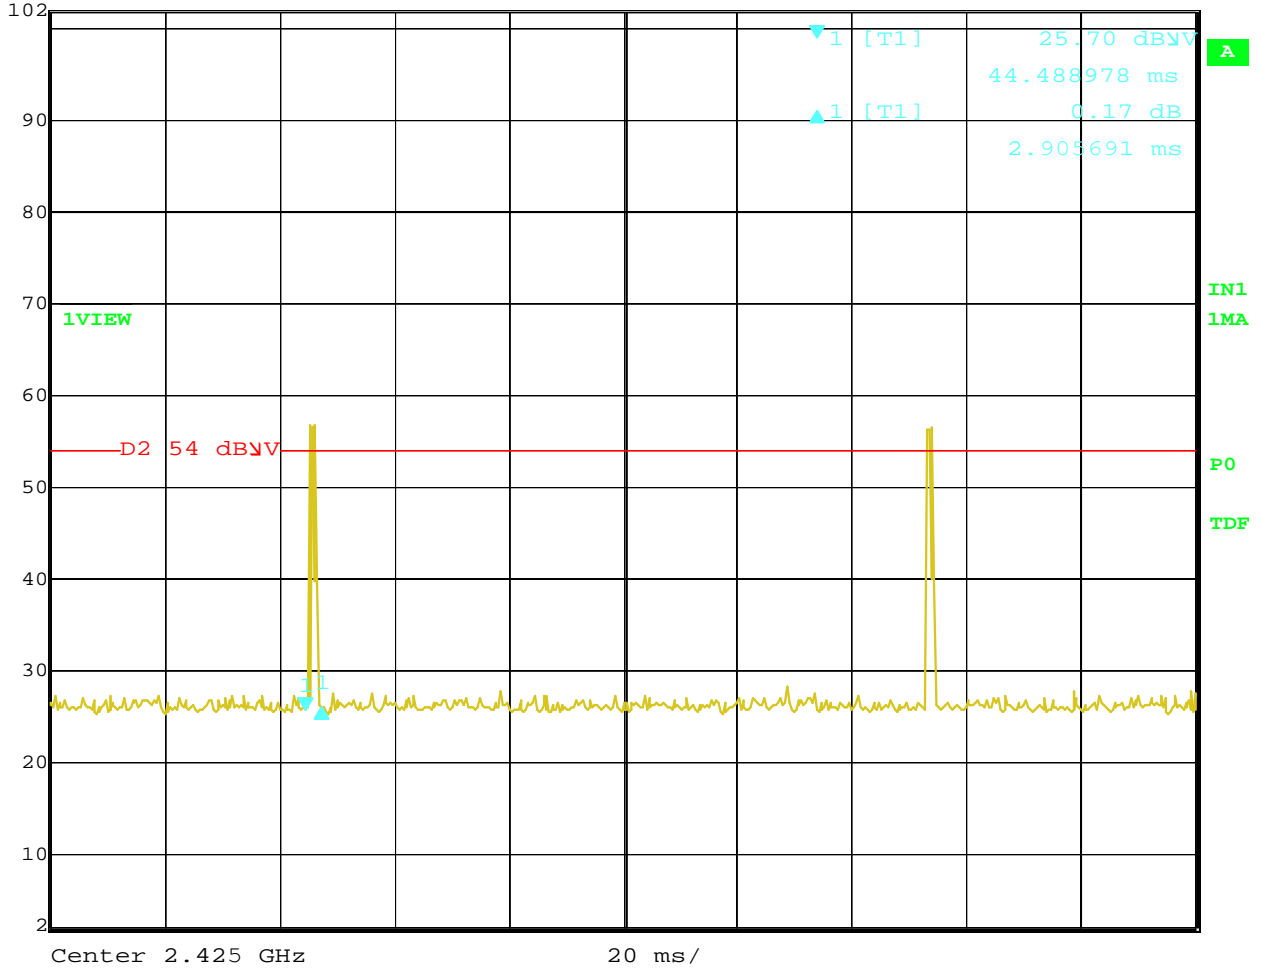


Date: 29.JAN.2014 16:35:46

Time in Data Mode = 2.905691 mS



Max/Ref Lvl Delta 1 [T1] RBW 1 MHz RF Att 0 dB
102 dBV -0.73 dB VBW 3 MHz
92 dBV 71.563487 ms SWT 200 ms Unit dBV

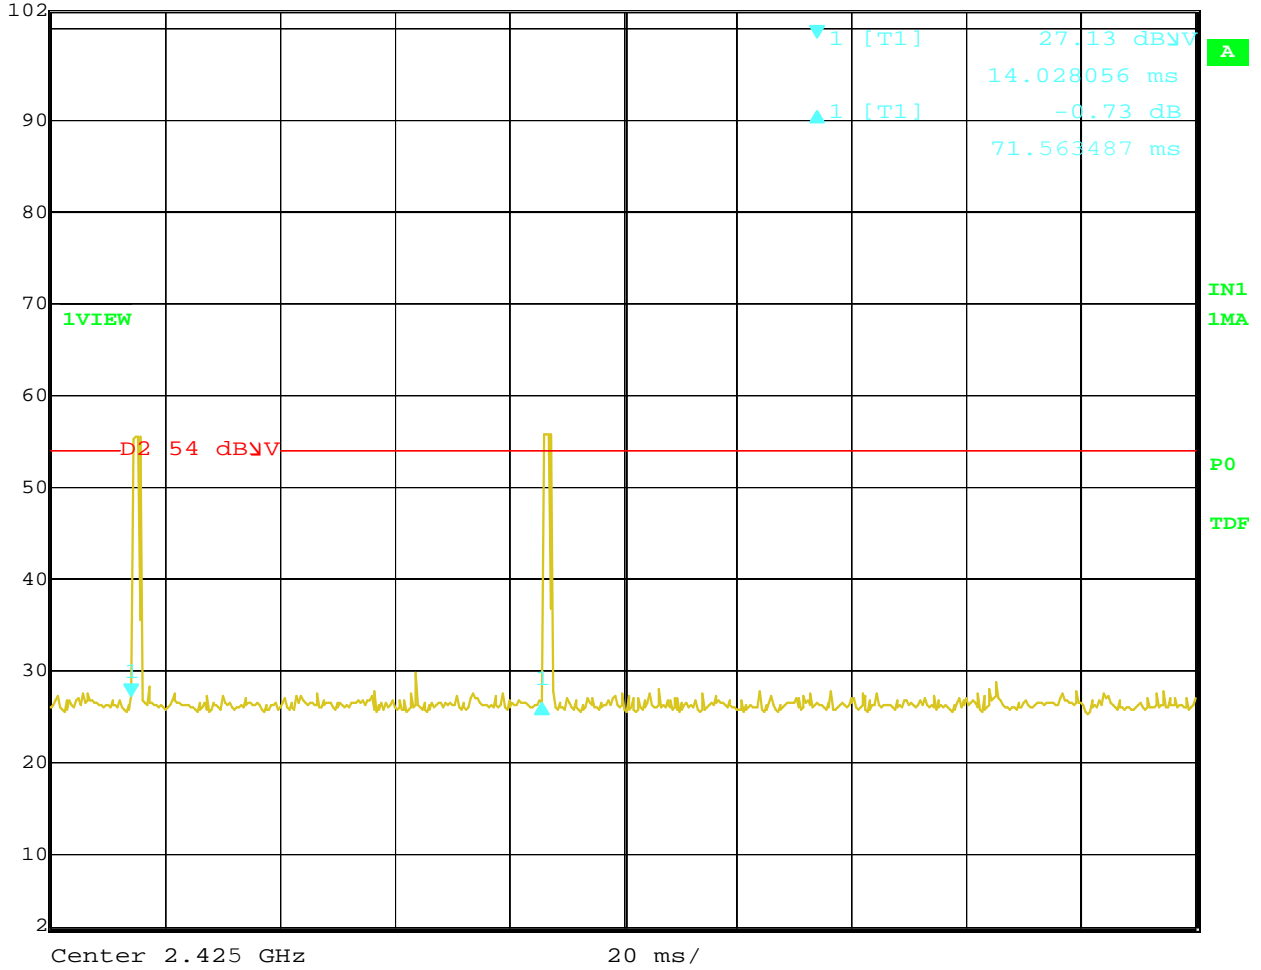

Date: 29.JAN.2014 16:45:57

Time of pulse train with blanking interval = 71.563487 mS

Duty Cycle for Data Mode = 2.905691 mS / 71.563487 mS = 4.06%

The maximum 20 dB Peak to Average Ratio can be applied because they duty cycle is less than 10 percent.