

*FCC PART 15, SUBPART B and C; and FCC 15.231  
TEST REPORT*

*for*

**DISH 21.2 REMOTE IC CONVERSION 2022**

**MODEL: DISH 21.2**

Prepared for

UNIVERSAL ELECTRONICS, INC.  
201 EAST SANDPOINTE AVENUE, 7<sup>TH</sup> FLOOR  
SANTA ANA, CALIFORNIA 92707

Prepared by: *James Ross*

JAMES ROSS

Approved by: *Kyle Fujimoto*

KYLE FUJIMOTO

COMPATIBLE ELECTRONICS INC.  
114 OLINDA DRIVE  
BREA, CALIFORNIA 92823  
(714) 579-0500

DATE: NOVEMBER 14, 2022

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	22	2	2	2	11	37	76

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**TABLE OF CONTENTS**

<b>Section / Title</b>	<b>PAGE</b>
<b>GENERAL REPORT SUMMARY</b>	<b>4</b>
<b>SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>1. PURPOSE</b>	<b>6</b>
1.1 Decision Rule & Risk	7
<b>2. ADMINISTRATIVE DATA</b>	<b>8</b>
2.1 Location of Testing	8
2.2 Traceability Statement	8
2.3 Cognizant Personnel	8
2.4 Date Test Sample was Received	8
2.5 Disposition of the Test Sample	8
2.6 Abbreviations and Acronyms	8
<b>3. APPLICABLE DOCUMENTS</b>	<b>9</b>
<b>4. DESCRIPTION OF TEST CONFIGURATION</b>	<b>10</b>
4.1 Description of Test Configuration – Emissions	10
4.1.1 Cable Construction and Termination	10
<b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b>	<b>11</b>
5.1 EUT and Accessory List	11
5.2 Emissions Test Equipment	12
<b>6. TEST SITE DESCRIPTION</b>	<b>13</b>
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Measurement Uncertainty	13
<b>7. TEST PROCEDURES</b>	<b>14</b>
7.1 RF Emissions	14
7.1.1 Conducted Emissions Test	14
7.1.2 Radiated Emissions Test	15
7.1.3 RF Emissions Test Results	17
7.1.4 Sample Calculations	18
7.1.5 Duty Cycle Calculation	19
7.1.6 -20 dB Bandwidth	20
7.1.8 Transmission Time	21
7.1.9 Variation of the Input Power	21
<b>8. CONCLUSIONS</b>	<b>22</b>

**LIST OF APPENDICES**

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Models Covered Under This Report
D	Diagrams, Charts, and Photos <ul style="list-style-type: none"><li>• Test Setup Diagrams</li><li>• Antenna and Effective Gain Factors</li><li>• Radiated and Conducted Emissions Photos</li></ul>
E	Data Sheets

**LIST OF FIGURES**

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Layout of the Semi-Anechoic Test Chamber

**LIST OF TABLES**

TABLE	TITLE
1	Radiated Emission Results

## GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the United States government.

Device Tested: Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2  
S/N: Unit #20

Product Description: The equipment under test is a Dish 21.2 Remote IC Conversion 2022 that uses RF technology.  
The transmit frequencies are 369.5 MHz, 375.3 MHz, 388.3 MHz, and 394.3 MHz.  
The clock oscillator is 12 MHz.  
Dimensions: 19.0 cm (L) 5.5 cm (W) x 3.0 cm (L).

Modifications: The EUT was not modified to meet the specifications.

Customer: Universal Electronics, Inc.  
201 East Sandpointe Avenue, 7<sup>th</sup> Floor  
Santa Ana, California 92707

Test Date(s): October 13 and 19, 2022

Test Specifications covered by accreditation:

Test Specifications: Emissions requirements  
CFR Title 47, Part 15, Subpart B;  
CFR Title 47, Part 15, Subpart C, sections 15.205, 15.207, 15.209, and 15.231



Test Procedures: ANSI C63.4 and ANSI C63.10

Test Deviations: The test procedure was not deviated from during the testing.

## SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz – 30 MHz	This test was not performed because the EUT operates on battery power only and cannot be plugged into the AC public mains.
2	Spurious Radiated RF Emissions, 9 kHz – 3943 MHz (Transmitter and Digital portion)	Complies with the <b>Class B</b> limits of CFR Title 47, Part 15 Subpart B; the limits of CFR Title 47, Part 15 Subpart C, sections 15.205, 15.209, and 15.231 Highest reading in relation to spec limit: 72.64 dBuV/m (AVG) @ 375.30 MHz (*U = 3.30 dB)
3	-20 dB Bandwidth	Complies with limits of CFR Title 47, Part 15 Subpart C, section 15.231 (c)
4	Transmission Time	Complies with limits of CFR Title 47, Part 15 Subpart C, section 15.231 (a)(1) and (a)(2)

\*U = Expanded Uncertainty with a coverage factor of k=2

**1. PURPOSE**

This document is a qualification test report based on the emissions tests performed on the Dish 21.2 Remote IC Conversion 2022, Model: Dish 21.2. The emissions measurements were performed according to the measurement procedure described in ANSI C63.4 and ANSI C63.10. The tests were performed to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15 Subpart B section, 15.109; the specification limits defined by CFR Title 47, Part 15 Subpart C sections 15.205, 15.209 and 15.231.



## 1.1 Decision Rule & Risk

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant, however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the considering of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a pre-production representation of the final product, that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

## 2. ADMINISTRATIVE DATA

### 2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

### 2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

### 2.3 Cognizant Personnel

Universal Electronics, Inc.

Jesse Mendez                      Staff Engineer, Electrical

Compatible Electronics Inc.

Kyle Fujimoto                      Senior Test Engineer

James Ross                          Senior Test Engineer

### 2.4 Date Test Sample was Received

The test sample was received prior to the initial test date in this report.

### 2.5 Disposition of the Test Sample

The test sample has not been returned to Universal Electronics, Inc. as of the date of this report.

### 2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
FCC	Federal Communications Commission
DoC	Declaration of Conformity
N/A	Not Applicable
Tx	Transmit
Rx	Receive
Inc.	Incorporated
RSS	Radio Standards Specification
RF	Radio Frequency
BLE	Bluetooth Low Energy
CFR	Code of Federal Regulations
PCB	Printed Circuit Board
DC	Direct Current
LED	Light Emitting Diode



### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emission Test Report.

<b>SPEC</b>	<b>TITLE</b>
FCC Title 47, Part 15 Subpart B	FCC Rules – Radio frequency devices (including digital devices) – Unintentional Radiators
FCC Title 47, Part 15 Subpart C	FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10: 2013	American National Standard of procedure for compliance testing of unlicensed wireless devices

#### **4. DESCRIPTION OF TEST CONFIGURATION**

##### **4.1 Description of Test Configuration – Emissions**

The Dish 21.2 Remote IC Conversion 2022, Model: Dish 21.2 (EUT) tested as a stand alone unit and placed in the middle of the turntable. The EUT was transmitting at 369.50 MHz, 375.30 MHz, or 394.30 MHz on a continuous basis.

The EUT was tested for emissions while in the X, Y and Z axis. The X orientation is when the EUT is parallel to the ground mounted horizontally. The Y orientation is when the EUT is perpendicular to the ground mounted vertically. The Z orientation is when the EUT is perpendicular to the ground mounted horizontally.

The EUT had fresh batteries installed prior to the testing.

The firmware inside the EUT allowed the EUT to continuously transmit at 369.50 MHz, 375.30 MHz, or 394.30 MHz.

The firmware is stored on the company's servers.

The final radiated emissions data for the EUT was taken in the configuration described above. Please see Appendix E for the data sheets.

##### **4.1.1 Cable Construction and Termination**

There were no external cables connected to the EUT.

**5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT****5.1 EUT and Accessory List**

<b>EQUIPMENT</b>	<b>MANUFACTURER</b>	<b>MODEL NUMBER</b>	<b>SERIAL NUMBER</b>	<b>FCC ID</b>
DISH 21.2 REMOTE IC CONVERSION 2022 (EUT)	UNIVERSAL ELECTRONICS, INC.	DISH 21.2	UNIT #20	MG3-R32010AB00
FIRMWARE	UNIVERSAL ELECTRONICS, INC.	Version: 1.0	N/A	N/A



## 5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
<b>RF RADIATED AND AC CONDUCTED EMISSIONS TEST EQUIPMENT</b>					
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
EMI Receiver, 20 Hz – 26.5 GHz	Keysight Technologies, Inc.	N9038A	MY51210150	September 17, 2021	September 17, 2023
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Loop Antenna	Com-Power	AL-130R	121090	February 10, 2022	February 10, 2025
CombiLog Antenna	Com-Power	AC-220	61093	December 14, 2021	December 14, 2023
Horn Antenna	Com-Power	AH-118	10050113	December 16, 2021	December 16, 2023
Preamplifier	Com-Power	PA-118	181653	March 7, 2022	March 7, 2023
Below 1 GHz Conducted Cable	N/A	N/A	Asset #: 0009	October 3, 2022	October 3, 2023
Below 1 GHz Radiated Cable	N/A	N/A	Asset #: 0006	October 3, 2022	October 3, 2023
Above 1 GHz Cable	Suhner	Sucoflex 102EA	2291	August 2, 2021	August 2, 2023
Above 1 GHz Cable	Suhner	Sucoflex 102EA	501393	August 2, 2021	August 2, 2023
Above 1 GHz Cable	Suhner	Sucoflex 102EA	501394	August 2, 2021	August 2, 2023
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A



## 6. TEST SITE DESCRIPTION

### 6.1 Test Facility Description

Please refer to section 2.1 of this report for emissions test location.

### 6.2 EUT Mounting, Bonding and Grounding

**For frequencies 1 GHz and below:** The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 0.8 meters above the ground plane.

**For frequencies above 1 GHz:** The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

### 6.3 Measurement Uncertainty

Compatible Electronics'  $U_{lab}$  value is less than  $U_{cispr}$ , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		$U_{cispr}$	$U_{lab} = 2 u_c (y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.72 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	6.3 dB	3.32 dB (Vertical) 3.30 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz - 6 GHz)	5.2 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26.5 GHz)	N/A	4.43 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.57 dB



## 7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 7.1 RF Emissions

#### 7.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

#### **Test Results:**

This test was not performed because the EUT operates on battery power only and cannot be plugged into the AC public mains.

## 7.1.2 Radiated Emissions Test

The EMI Receiver was used as the measuring meter. An internal preamplifier was used to increase the sensitivity of the instrument during emissions tests up to 1000 MHz, and an external preamplifier was used to increase the sensitivity of the instrument during emissions tests above 1 GHz. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which considers the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz, except for the fundamental frequency, and the 2<sup>nd</sup> and 3<sup>rd</sup> harmonic of the fundamental frequency, were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The harmonic frequencies above 1 GHz were averaged using the duty cycle correction calculation.

All other frequencies above 1 GHz were averaged using the average detector of the EMI Receiver.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

**Radiated Emissions Test (Continued)**

The measurement bandwidths and transducers used for the radiated emissions test were:

<b>FREQUENCY RANGE</b>	<b>EFFECTIVE MEASUREMENT BANDWIDTH</b>	<b>TRANSDUCER</b>
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 3.1943 GHz	1 MHz	Horn Antenna

**Test Results:**

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C sections 15.205, 15.209 and 15.231.





### 7.1.3 RF Emissions Test Results

Table 1 RADIATED EMISSION RESULTS  
Dish 21.2 Remote IC Conversion 2022, MODEL: DISH 21.2

Frequency (MHz)	Corrected Reading* (dB $\mu$ V/m)	Specification Limit (dB $\mu$ V/m)	Delta (Cor. Reading – Spec. Limit) (dB)
375.30 (H) (Z-Axis)	72.64 (Avg)	78.64	-6.00
369.50 (H) (Z-Axis)	69.38 (Avg)	78.39	-9.01
375.30 (H) (X-Axis)	67.61 (Avg)	78.64	-11.03
369.50 (H) (X-Axis)	66.33 (Avg)	78.39	-12.06
394.30 (H) (Z-Axis)	67.32 (Avg)	79.41	-12.09
375.30 (V) (Y-Axis)	66.43 (Avg)	78.64	-12.21

Notes:

- \* The complete emissions data is given in Appendix E of this report.
- (V) Vertical
- (H) Horizontal
- (QP) Quasi-Peak
- (AV) Average

## 7.1.4 Sample Calculations

A correction factor for the antenna, cable and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit ( $\mu\text{V}/\text{m}$ )  $\log \times 20 =$  Specification Limit in  $\text{dB}\mu\text{V}/\text{m}$

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance)  $\log \times 40 =$  distance factor

For measurements above 30 MHz: (Specification distance / test distance)  $\log \times 20 =$  distance factor

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F - A + C

where: F = antenna factor  
A = amplifier gain  
C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

When the limit is in terms of magnetic field, the following equation applies:

$$H[\text{dB}(\mu\text{A}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C [\text{dB}] - G_{PA} [\text{dB}] + AF^H [\text{dB}(\text{S}/\text{m})]$$

where:  $H$  is the magnetic field strength (to be compared with the limit),  
 $V$  is the voltage level measured by the receiver or spectrum analyzer,  
 $L_C$  is the cable loss,  
 $G_{PA}$  is the gain of the preamplifier (if used), and  
 $AF^H$  is the magnetic antenna factor.

The  $G_{PA}$  term is only included in the equation when an external preamplifier is used in the measurement chain, in front of the receiver or spectrum analyzer. An external preamplifier is not usually necessary (or even advisable, due to risk of saturating the input mixer of the receiver) when an active loop antenna is used. In that case, the antenna factor of the loop already includes the gain of its built-in preamplifier.

If the “electrical” antenna factor is used instead, the above equation becomes:

$$H[\text{dB}(\mu\text{A}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C [\text{dB}] - G_{PA}[\text{dB}] + AF^E [\text{dB}(\text{m}^{-1})] - 51.5 [\text{dB}\Omega]$$

where:  $AF^E$  is the “electric” antenna factor, as provided by the antenna calibration laboratory.

When the limit is in terms of electric field, the following equation applies:

$$E[\text{dB}(\mu\text{V}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C[\text{dB}] - G_{PA}[\text{dB}] + AF^E [\text{dB}(\text{m}^{-1})]$$

or, if the magnetic antenna factor is used:

$$E[\text{dB}(\mu\text{V}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C[\text{dB}] - G_{PA}[\text{dB}] + AF^H [\text{dB}(\text{S}/\text{m})] + 51.5[\text{dB}\Omega]$$

The display of the receiver (or spectrum analyzer) **shall not** be configured in units of current, e.g.  $\mu\text{A}$  or  $\text{dB}(\mu\text{A})$ . That conversion is calculated inside the receiver (or spectrum analyzer) using its input impedance, which is  $50 \Omega$ , while the magnetic field calculation is based on the free-space impedance of  $377 \Omega$ .

### 7.1.5 Duty Cycle Calculation

The EMI Receiver was used to obtain the duty cycle. The final qualification data sheets are in Appendix E.

Where

$$\delta(\text{dB}) = 20 \log \left[ \frac{\sum (nt_1 + mt_2 + \dots + \xi t_x)}{T} \right]$$

$n$  is the number of pulses of duration  $t_1$

$m$  is the number of pulses of duration  $t_2$

$\xi$  is the number of pulses of duration  $t_x$

$T$  is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

Duty Cycle Correction Factor = -8.89 dB

Time of Pulse = 35.54 ms

Number of Pulses = 1

Total On Time = 35.54 ms

The time between pulses is 99 ms

Duty Cycle = 35.54 ms / 99 ms = 35.90%

### 7.1.6 -20 dB Bandwidth

The -20 dB bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the -20 dB bandwidth:

1. Set RBW from 1% to 5% of the Occupied Bandwidth.
2. Set the span to 500 kHz.
3. Set VBW to greater than 3 times the RBW.
4. Set the peak detector to max hold.
5. Set the sweep time to auto
6. Allow the trace to stabilize.
7. Set the markers to -20 dB of the peak fundamental emission

#### **Test Results:**

The EUT complies with limits of CFR Title 47, Part 15, Subpart C section 15.231 (c).

### 7.1.8 Transmission Time

The transmission time was measured using an EMI Receiver.

The following steps were performed for measuring transmission time:

1. Set RBW = 120 kHz
2. Set VBW = 510 kHz
3. Span = 0 Hz
4. Set the sweep time to 10 seconds
5. Push a button on the EUT, which automatically activated the transmitter
6. Allow the trace to stabilize
7. Set the 1<sup>st</sup> marker to start of the transmission
8. Set the 2<sup>nd</sup> marker to the end of the transmission
9. Verify the transmission does not go beyond 5 seconds

#### **Test Results:**

The EUT complies with limits of CFR Title 47, Part 15, Subpart C section 15.231 (a)(1) and (a)(2). The EUT stops transmitting immediately after the button is released.

### 7.1.9 Variation of the Input Power

The variation of the input power test was performed using the EMI Receiver. The EUT input power was varied between 85% and 115% of the nominal rated supply voltage. The carrier frequency was monitored for any change in amplitude.

#### **Test Results:**

This test was not performed because the EUT is battery power only.



## 8. CONCLUSIONS

The Dish 21.2 Remote IC Conversion 2022, Model: Dish 21.2 (EUT), as tested, meets all the specification limits defined in CFR Title 47, Part 15, Subpart B, **Class B**; and the specification limits defined in CFR Title 47, Part, 15, Subpart C, sections 15.205, 15.207, 15.209 and 15.231.



  
**APPENDIX A*****LABORATORY ACCREDITATIONS AND RECOGNITIONS***

---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

<http://celectronics.com/quality/scope/>

Quote from ISO-ILAC-IAF Communiqué on the Management Systems Requirements of ISO/IEC 17025, General Requirements for the competence of testing and calibration laboratories:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025 are written in language relevant to laboratory operations and operate generally in accordance with the principles of ISO 9001"

Innovation, Science and Economic Development Canada  
Lab Code 2154A



**APPENDIX B**

***MODIFICATIONS TO THE EUT***

## **MODIFICATIONS TO THE EUT**

The modifications listed below were made to the EUT to pass FCC Subpart B and FCC 15.231 specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.



**APPENDIX C**

***MODELS COVERED UNDER THIS REPORT***

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2  
S/N: Unit #20

There are no additional models or part numbers covered under this report.







**APPENDIX D**

***DIAGRAMS, CHARTS, AND PHOTOS***

**FIGURE 1: CONDUCTED EMISSIONS TEST SETUP**

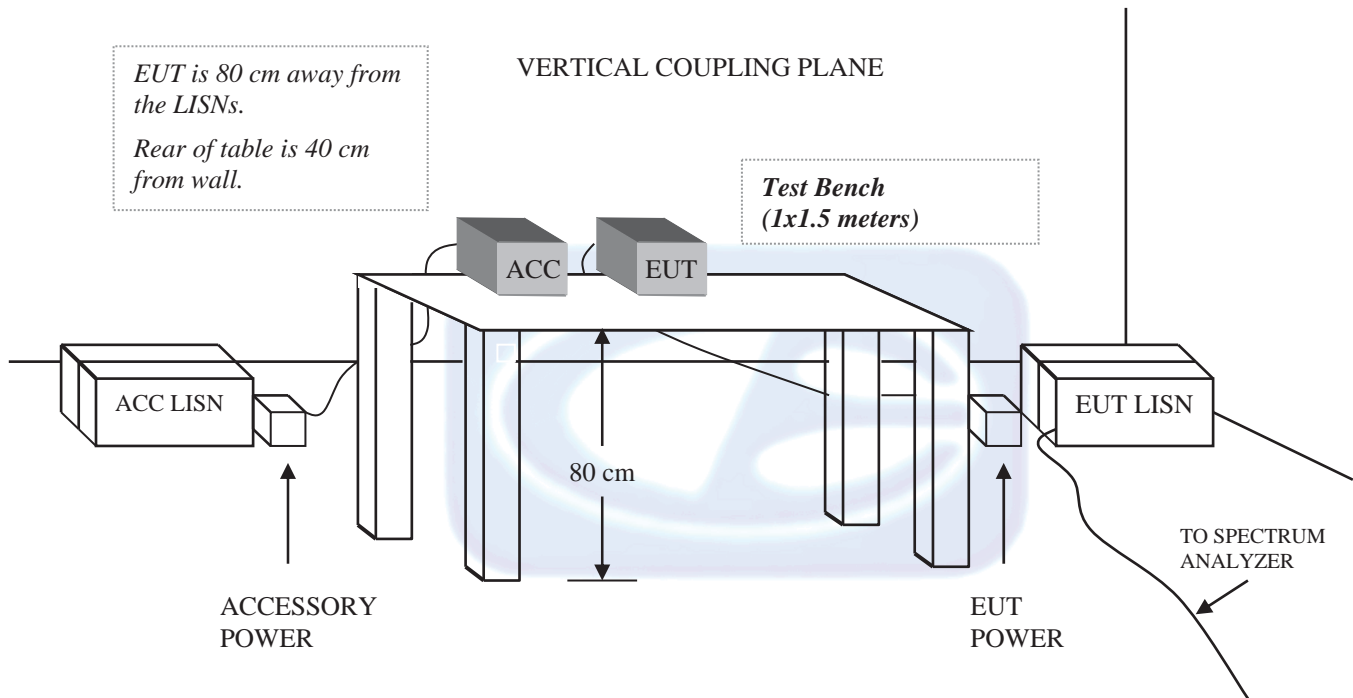

**FIGURE 2: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER**

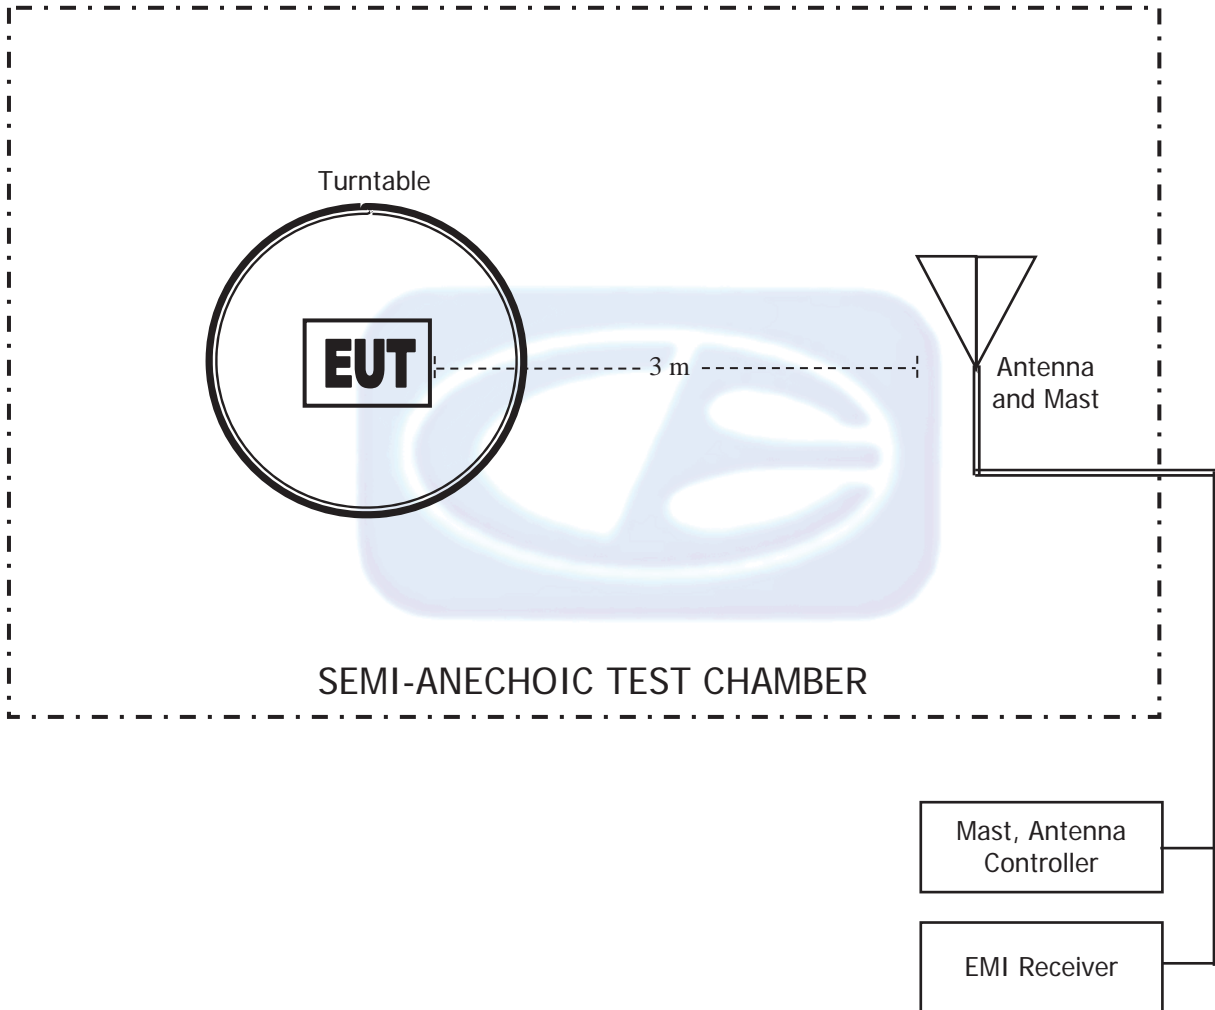

**COM-POWER AL-130R****LOOP ANTENNA**

S/N: 121090

**CALIBRATION DATE: FEBRUARY 10, 2022**

<b>FREQUENCY (MHz)</b>	<b>MAGNETIC (dB/m)</b>	<b>ELECTRIC (dB/m)</b>
0.009	15.6	-35.8
0.01	15.8	-35.6
0.02	14.8	-36.6
0.03	15.6	-35.9
0.04	15.0	-36.5
0.05	14.4	-37.1
0.06	14.6	-36.9
0.07	14.3	-37.2
0.08	14.3	-37.2
0.09	14.4	-37.0
0.10	14.1	-37.4
0.20	14.1	-37.4
0.30	14.0	-37.5
0.40	13.9	-37.6
0.50	14.1	-37.3
0.60	14.1	-37.3
0.70	14.2	-37.3
0.80	14.2	-37.3
0.90	14.2	-37.2
1.00	14.4	-37.0
2.00	14.6	-36.9
3.00	14.6	-36.8
4.00	14.9	-36.6
5.00	14.9	-36.7
6.00	14.8	-36.7
7.00	14.6	-36.8
8.00	14.5	-37.0
9.00	14.3	-37.2
10.00	14.5	-37.0
11.00	14.6	-36.9
12.00	14.7	-36.7
13.00	14.9	-36.6
14.00	15.0	-36.5
15.00	14.9	-36.6
16.00	14.9	-36.6
17.00	14.6	-36.8
18.00	14.4	-37.1
19.00	14.5	-37.0
20.00	14.5	-37.0
21.00	14.2	-37.3
22.00	13.9	-37.5
23.00	13.9	-37.5
24.00	13.8	-37.7
25.00	13.4	-38.0
26.00	13.2	-38.2
27.00	13.2	-38.3
28.00	12.7	-38.7
29.00	12.7	-38.8
30.00	12.4	-39.0



**COM-POWER AC-220****COMBILOG ANTENNA**

S/N: 61093

CALIBRATION DATE: DECEMBER 14, 2021

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
30	22.50	200	16.00
35	21.40	250	17.40
40	21.00	300	19.70
45	20.60	350	20.00
50	19.70	400	22.20
60	16.10	450	22.40
70	12.80	500	23.10
80	12.50	550	23.40
90	14.20	600	24.90
100	15.40	650	25.30
120	16.50	700	25.40
125	16.80	750	26.40
140	15.90	800	26.70
150	16.60	850	27.10
160	18.50	900	27.90
175	15.90	950	28.00
180	15.50	1000	28.00

**COM POWER AH-118****HORN ANTENNA****S/N: 10050113****CALIBRATION DATE: DECEMBER 16, 2021**

<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>
1.0	23.86	10.0	38.91
1.5	25.67	10.5	39.94
2.0	28.25	11.0	39.10
2.5	29.17	11.5	39.70
3.0	29.78	12.0	40.29
3.5	30.88	12.5	41.93
4.0	31.21	13.0	41.34
4.5	32.96	13.5	40.57
5.0	33.30	14.0	40.23
5.5	34.24	14.5	42.25
6.0	34.57	15.0	43.63
6.5	35.61	15.5	39.96
7.0	36.60	16.0	40.38
7.5	37.49	16.5	40.56
8.0	37.44	17.0	40.93
8.5	37.98	17.5	42.27
9.0	38.01	18.0	43.77
9.5	38.53		

**COM-POWER PAM-118****PREAMPLIFIER**

S/N: 181653

CALIBRATION DATE: MARCH 7, 2022

<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>
1.0	40.02	6.0	38.84
1.1	39.72	6.5	39.20
1.2	39.93	7.0	39.46
1.3	39.98	7.5	39.67
1.4	39.99	8.0	39.28
1.5	40.20	8.5	38.63
1.6	40.05	9.0	38.96
1.7	40.15	9.5	39.33
1.8	40.20	10.0	39.58
1.9	40.33	11.0	38.25
2.0	40.33	12.0	40.03
2.5	40.60	13.0	40.55
3.0	40.76	14.0	40.36
3.5	40.87	15.0	39.34
4.0	40.39	16.0	37.34
4.5	39.55	17.0	42.14
5.0	40.34	18.0	42.54
5.5	39.45		




**FRONT VIEW**

UNIVERSAL ELECTRONICS, INC.  
DISH 21.2 REMOTE IC CONVERSION 2022  
MODEL: DISH 21.2

FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

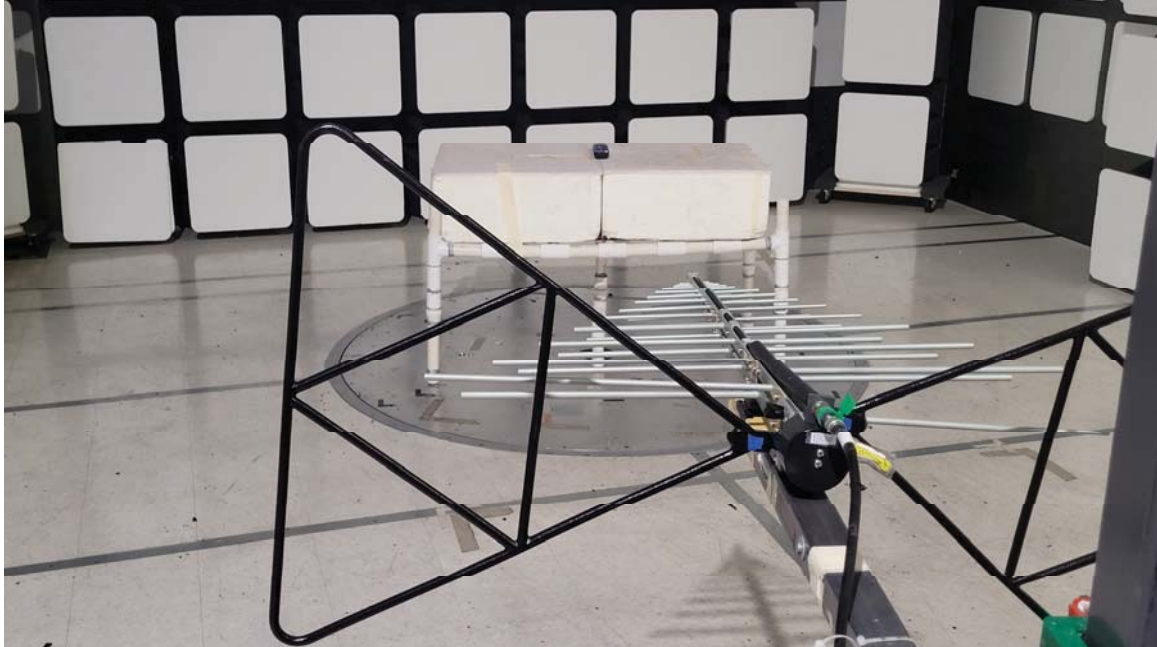

**REAR VIEW**

UNIVERSAL ELECTRONICS, INC.  
DISH 21.2 REMOTE IC CONVERSION 2022  
MODEL: DISH 21.2

FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**


**FRONT VIEW**

UNIVERSAL ELECTRONICS, INC.  
DISH 21.2 REMOTE IC CONVERSION 2022  
MODEL: DISH 21.2

FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

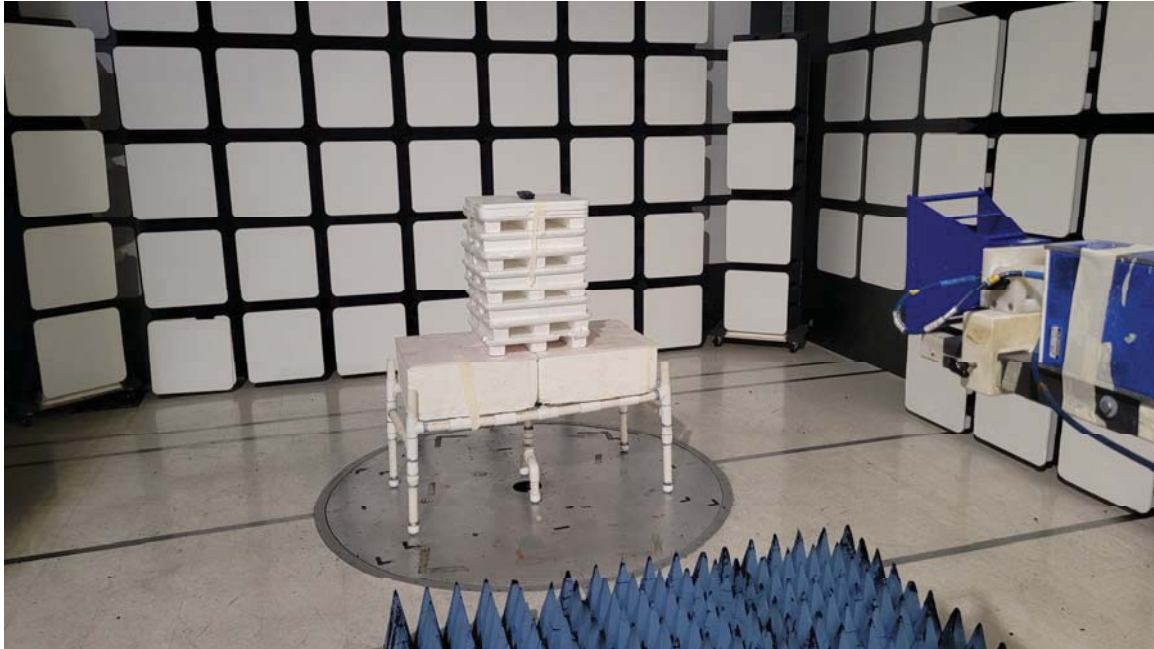


**REAR VIEW**

UNIVERSAL ELECTRONICS, INC.  
DISH 21.2 REMOTE IC CONVERSION 2022  
MODEL: DISH 21.2

FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

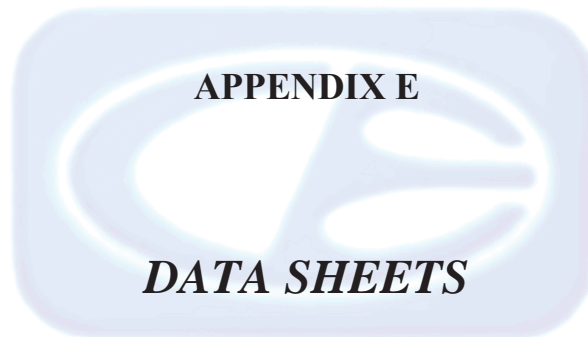



***RADIATED EMISSIONS***  
***DATA SHEETS***

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Fundamental - Low Channel - Unit #20**

**Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
369.50	64.99	V	98.39	-33.40	Peak	150.25	228.23	X-Axis
369.50	56.10	V	78.39	-22.29	Avg	150.25	228.23	Vertical Polarization
369.50	74.70	V	98.39	-23.69	Peak	217.75	122.92	Y-Axis
369.50	65.81	V	78.39	-12.58	Avg	217.75	122.92	Vertical Polarization
369.50	64.22	V	98.39	-34.17	Peak	82.75	121.37	Z-Axis
369.50	55.33	V	78.39	-23.06	Avg	82.75	121.37	Vertical Polarization
369.50	75.22	H	98.39	-23.17	Peak	348.25	100.04	X-Axis
369.50	66.33	H	78.39	-12.06	Avg	348.25	100.04	Horizontal Polarization
369.50	66.05	H	98.39	-32.35	Peak	62.50	145.13	Y-Axis
369.50	57.16	H	78.39	-21.24	Avg	62.50	145.13	Horizontal Polarization
369.50	78.27	H	98.39	-20.12	Peak	0.25	100.00	Z-Axis
369.50	69.38	H	78.39	-9.01	Avg	0.25	100.00	Horizontal Polarization

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Fundamental - Middle Channel - Unit #20**  
**Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
375.30	69.34	V	98.64	-29.30	Peak	195.75	240.11	X-Axis
375.30	60.49	V	78.64	-18.15	Avg	195.75	240.11	Vertical Polarization
375.30	75.28	V	98.64	-23.36	Peak	283.25	190.80	Y-Axis
375.30	66.43	V	78.64	-12.21	Avg	283.25	190.80	Vertical Polarization
375.30	71.24	V	98.64	-27.40	Peak	253.75	269.91	Z-Axis
375.30	62.39	V	78.64	-16.25	Avg	253.75	269.91	Vertical Polarization
375.30	76.46	H	98.64	-22.18	Peak	94.25	317.91	X-Axis
375.30	67.61	H	78.64	-11.03	Avg	94.25	317.91	Horizontal Polarization
375.30	70.99	H	98.64	-27.65	Peak	276.00	238.68	Y-Axis
375.30	62.14	H	78.64	-16.50	Avg	276.00	238.68	Horizontal Polarization
375.30	81.53	H	98.64	-17.11	Peak	195.25	100.00	Z-Axis
375.30	72.64	H	78.64	-6.00	Avg	195.25	100.00	Horizontal Polarization

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Fundamental - High Channel - Unit #20**  
**Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
394.30	62.72	V	99.41	-36.69	Peak	146.25	270.86	X-Axis
394.30	53.83	V	79.41	-25.58	Avg	146.25	270.86	Vertical Polarization
394.30	69.84	V	99.41	-29.57	Peak	230.25	222.86	Y-Axis
394.30	60.95	V	79.41	-18.46	Avg	230.25	222.86	Vertical Polarization
394.30	63.41	V	99.41	-36.00	Peak	236.00	271.94	Z-Axis
394.30	54.52	V	79.41	-24.89	Avg	236.00	271.94	Vertical Polarization
394.30	74.41	H	99.41	-25.00	Peak	272.75	237.97	X-Axis
394.30	65.52	H	79.41	-13.89	Avg	272.75	237.97	Horizontal Polarization
394.30	65.66	H	99.41	-33.75	Peak	286.00	206.02	Y-Axis
394.30	56.77	H	79.41	-22.64	Avg	286.00	206.02	Horizontal Polarization
394.30	76.21	H	99.41	-23.20	Peak	350.50	100.00	Z-Axis
394.30	67.32	H	79.41	-12.09	Avg	350.50	100.00	Horizontal Polarization

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Low Channel  
 Unit #20  
 Transmit Mode - X-Axis  
 Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
739.00	53.18	V	78.39	-25.21	Peak	95.25	317.91	
739.00	44.29	V	58.39	-14.10	Avg	95.25	317.91	
1108.50	35.89	V	73.97	-38.08	Peak	255.00	159.34	
1108.50	27.00	V	53.97	-26.97	Avg	255.00	159.34	
1478.00	32.62	V	73.97	-41.35	Peak	60.00	223.22	
1478.00	23.73	V	53.97	-30.24	Avg	60.00	223.22	
1847.50	44.30	V	78.39	-34.09	Peak	132.75	130.68	
1847.50	35.41	V	58.39	-22.98	Avg	132.75	130.68	
2217.00	36.69	V	73.97	-37.28	Peak	322.50	175.10	
2217.00	27.80	V	53.97	-26.17	Avg	322.50	175.10	
2586.50	39.83	V	78.39	-38.56	Peak	152.25	142.50	
2586.50	30.94	V	58.39	-27.45	Avg	152.25	142.50	
2956.00	36.04	V	78.39	-42.35	Peak	90.25	125.97	
2956.00	27.15	V	58.39	-31.24	Avg	90.25	125.97	
3325.50	37.48	V	78.39	-40.91	Peak	321.00	159.34	
3325.50	28.59	V	58.39	-29.80	Avg	321.00	159.34	
3695.00	38.31	V	73.97	-35.66	Peak	151.75	159.28	
3695.00	29.42	V	53.97	-24.55	Avg	151.75	159.28	

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Low Channel  
 Unit #20  
 Transmit Mode - Y-Axis  
 Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
739.00	37.82	V	78.39	-40.57	Peak	110.00	191.04	
739.00	28.93	V	58.39	-29.46	Avg	110.00	191.04	
1108.50	33.38	V	73.97	-40.59	Peak	73.25	223.16	
1108.50	24.49	V	53.97	-29.48	Avg	73.25	223.16	
1478.00	32.25	V	73.97	-41.72	Peak	207.25	111.46	
1478.00	23.36	V	53.97	-30.61	Avg	207.25	111.46	
1847.50	46.35	V	78.39	-32.04	Peak	335.50	127.34	
1847.50	37.46	V	58.39	-20.93	Avg	335.50	127.34	
2217.00	37.33	V	73.97	-36.64	Peak	38.75	111.52	
2217.00	28.44	V	53.97	-25.53	Avg	38.75	111.52	
2586.50	38.89	V	78.39	-39.50	Peak	0.25	159.22	
2586.50	30.00	V	58.39	-28.39	Avg	0.25	159.22	
2956.00	36.93	V	78.39	-41.46	Peak	319.75	207.46	
2956.00	28.04	V	58.39	-30.35	Avg	319.75	207.46	
3325.50	38.05	V	78.39	-40.34	Peak	47.50	174.98	
3325.50	29.16	V	58.39	-29.23	Avg	47.50	174.98	
3695.00	38.08	V	73.97	-35.89	Peak	330.25	207.28	
3695.00	29.19	V	53.97	-24.78	Avg	330.25	207.28	

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Low Channel  
 Unit #20  
 Transmit Mode - Z-Axis  
 Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
739.00	36.95	V	78.39	-41.44	Peak	320.00	190.98	
739.00	28.06	V	58.39	-30.33	Avg	320.00	190.98	
1108.50	36.34	V	73.97	-37.63	Peak	303.25	143.34	
1108.50	27.45	V	53.97	-26.52	Avg	303.25	143.34	
1478.00	33.90	V	73.97	-40.07	Peak	325.25	225.01	
1478.00	25.01	V	53.97	-28.96	Avg	325.25	225.01	
1847.50	40.92	V	78.39	-37.47	Peak	51.00	143.40	
1847.50	32.03	V	58.39	-26.36	Avg	51.00	143.40	
2217.00	36.62	V	73.97	-37.35	Peak	335.00	111.52	
2217.00	27.73	V	53.97	-26.24	Avg	335.00	111.52	
2586.50	35.32	V	78.39	-43.07	Peak	343.00	127.34	
2586.50	26.43	V	58.39	-31.96	Avg	343.00	127.34	
2956.00	37.92	V	78.39	-40.47	Peak	341.50	175.40	
2956.00	29.03	V	58.39	-29.36	Avg	341.50	175.40	
3325.50	38.95	V	78.39	-39.44	Peak	8.75	207.34	
3325.50	30.06	V	58.39	-28.33	Avg	8.75	207.34	
3695.00	38.10	V	73.97	-35.87	Peak	329.50	159.28	
3695.00	29.21	V	53.97	-24.76	Avg	329.50	159.28	

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Low Channel**  
**Unit #20**  
**Transmit Mode - X-Axis**  
**Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
739.00	53.25	H	78.39	-25.14	Peak	323.75	397.19	
739.00	44.36	H	58.39	-14.03	Avg	323.75	397.19	
1108.50	35.53	H	73.97	-38.44	Peak	126.25	207.34	
1108.50	26.64	H	53.97	-27.33	Avg	126.25	207.34	
1478.00	34.64	H	73.97	-39.33	Peak	113.00	144.59	
1478.00	25.75	H	53.97	-28.22	Avg	113.00	144.59	
1847.50	45.53	H	78.39	-32.86	Peak	201.00	127.34	
1847.50	36.64	H	58.39	-21.75	Avg	201.00	127.34	
2217.00	36.69	H	73.97	-37.28	Peak	134.25	175.10	
2217.00	27.80	H	53.97	-26.17	Avg	134.25	175.10	
2586.50	38.13	H	78.39	-40.26	Peak	84.50	159.04	
2586.50	29.24	H	58.39	-29.15	Avg	84.50	159.04	
2956.00	36.19	H	78.39	-42.20	Peak	118.25	249.02	
2956.00	27.30	H	58.39	-31.09	Avg	188.25	249.02	
3325.50	38.45	H	78.39	-39.94	Peak	191.00	111.52	
3325.50	29.56	H	58.39	-28.83	Avg	191.00	111.52	
3695.00	37.72	H	73.97	-36.25	Peak	182.50	110.74	
3695.00	28.83	H	53.97	-25.14	Avg	182.50	110.74	



**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - Low Channel****Unit #20****Transmit Mode - Y-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
739.00	39.50	H	78.39	-38.89	Peak	253.75	174.98	
739.00	30.61	H	58.39	-27.78	Avg	253.75	174.98	
1108.50	36.58	H	73.97	-37.39	Peak	264.75	175.34	
1108.50	27.69	H	53.97	-26.28	Avg	264.75	175.34	
1478.00	32.30	H	73.97	-41.67	Peak	31.00	175.04	
1478.00	23.41	H	53.97	-30.56	Avg	31.00	175.04	
1847.50	43.26	H	78.39	-35.13	Peak	46.00	175.40	
1847.50	34.37	H	58.39	-24.02	Avg	46.00	175.40	
2217.00	35.75	H	73.97	-38.22	Peak	275.25	159.04	
2217.00	26.86	H	53.97	-27.11	Avg	275.25	159.04	
2586.50	38.08	H	78.39	-40.31	Peak	272.00	175.10	
2586.50	29.19	H	58.39	-29.20	Avg	272.00	175.10	
2956.00	38.61	H	78.39	-39.78	Peak	306.00	127.22	
2956.00	29.72	H	58.39	-28.67	Avg	306.00	127.22	
3325.50	37.28	H	78.39	-41.11	Peak	39.50	159.40	
3325.50	28.39	H	58.39	-30.00	Avg	39.50	159.40	
3695.00	38.97	H	73.97	-35.00	Peak	326.75	111.46	
3695.00	30.08	H	53.97	-23.89	Avg	326.75	111.46	

**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.22

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - Low Channel****Unit #20****Transmit Mode - Z-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
739.00	42.78	H	78.39	-35.61	Peak	358.50	111.34	
739.00	33.89	H	58.39	-24.50	Avg	358.50	111.34	
1108.50	35.36	H	73.97	-38.61	Peak	286.75	111.58	
1108.50	26.47	H	53.97	-27.50	Avg	286.75	111.58	
1478.00	32.74	H	73.97	-41.23	Peak	54.50	249.97	
1478.00	23.85	H	53.97	-30.12	Avg	54.50	249.97	
1847.50	34.68	H	78.39	-43.71	Peak	328.25	111.40	
1847.50	25.79	H	58.39	-32.60	Avg	328.25	111.40	
2217.00	41.06	H	73.97	-32.91	Peak	306.00	127.40	
2217.00	32.17	H	53.97	-21.80	Avg	306.00	127.40	
2586.50	40.06	H	78.39	-38.33	Peak	49.25	174.98	
2586.50	31.17	H	58.39	-27.22	Avg	49.25	174.98	
2956.00	36.82	H	78.39	-41.57	Peak	67.25	190.50	
2956.00	27.93	H	58.39	-30.46	Avg	67.25	190.50	
3325.50	40.96	H	78.39	-37.43	Peak	253.00	142.44	
3325.50	32.07	H	58.39	-26.32	Avg	253.00	142.44	
3695.00	37.69	H	73.97	-36.28	Peak	263.75	249.98	
3695.00	28.80	H	53.97	-25.17	Avg	263.75	249.98	

**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - Middle Channel****Unit #20****Transmit Mode - X-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
750.60	37.70	V	78.64	-40.94	Peak	233.50	301.85	
750.60	28.81	V	58.64	-29.83	Avg	233.50	301.85	
1125.90	36.53	V	73.97	-37.44	Peak	278.50	175.28	
1125.90	27.64	V	53.97	-26.33	Avg	278.50	175.28	
1501.20	32.60	V	73.97	-41.37	Peak	118.75	175.10	
1501.20	23.71	V	53.97	-30.26	Avg	118.75	175.10	
1876.50	44.17	V	78.64	-34.47	Peak	133.50	143.22	
1876.50	35.28	V	58.64	-23.36	Avg	133.50	143.22	
2251.80	36.43	V	73.97	-37.54	Peak	283.25	175.22	
2251.80	27.54	V	53.97	-26.43	Avg	283.25	175.22	
2627.10	37.59	V	78.64	-41.05	Peak	154.50	175.10	
2627.10	28.70	V	58.64	-29.94	Avg	154.50	175.10	
3002.40	36.06	V	78.64	-42.58	Peak	254.25	206.98	
3002.40	27.17	V	58.64	-31.47	Avg	254.25	206.98	
3377.70	38.44	V	78.64	-40.20	Peak	152.50	127.28	
3377.70	29.55	V	58.64	-29.09	Avg	152.50	127.28	
3753.00	38.50	V	73.97	-35.47	Peak	158.25	142.98	
3753.00	29.61	V	53.97	-24.36	Avg	158.25	142.98	

**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - Middle Channel****Unit #20****Transmit Mode - Y-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
750.60	38.09	V	78.64	-40.55	Peak	177.50	206.56	
750.60	29.20	V	58.64	-29.44	Avg	177.50	206.56	
1125.90	33.55	V	73.97	-40.42	Peak	309.50	249.98	
1125.90	24.66	V	53.97	-29.31	Avg	309.50	249.98	
1501.20	32.30	V	73.97	-41.67	Peak	31.25	174.92	
1501.20	23.41	V	53.97	-30.56	Avg	31.25	174.92	
1876.50	45.83	V	78.64	-32.81	Peak	340.25	143.34	
1876.50	36.94	V	58.64	-21.70	Avg	340.25	143.34	
2251.80	39.22	V	73.97	-34.75	Peak	342.00	175.10	
2251.80	30.33	V	53.97	-23.64	Avg	342.00	175.10	
2627.10	36.07	V	78.64	-42.57	Peak	65.25	127.16	
2627.10	27.18	V	58.64	-31.46	Avg	65.25	127.16	
3002.40	36.33	V	78.64	-42.31	Peak	316.75	175.40	
3002.40	27.44	V	58.64	-31.20	Avg	316.75	175.40	
3377.70	38.05	V	78.64	-40.59	Peak	70.50	126.98	
3377.70	29.16	V	58.64	-29.48	Avg	70.50	126.98	
3753.00	39.39	V	73.97	-34.58	Peak	61.00	190.92	
3753.00	30.50	V	53.97	-23.47	Avg	61.00	190.92	

**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - Middle Channel****Unit #20****Transmit Mode - Z-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
750.60	37.58	V	78.64	-41.06	Peak	316.00	303.10	
750.60	28.69	V	58.64	-29.95	Avg	316.00	303.10	
1125.90	37.26	V	73.97	-36.71	Peak	310.00	143.40	
1125.90	28.37	V	53.97	-25.60	Avg	310.00	143.40	
1501.20	33.21	V	73.97	-40.76	Peak	276.25	158.98	
1501.20	24.32	V	53.97	-29.65	Avg	276.25	158.98	
1876.50	41.75	V	78.64	-36.89	Peak	299.25	191.28	
1876.50	32.86	V	58.64	-25.78	Avg	299.25	191.28	
2251.80	36.40	V	73.97	-37.57	Peak	328.75	111.40	
2251.80	27.51	V	53.97	-26.46	Avg	328.75	111.40	
2627.10	37.13	V	78.64	-41.51	Peak	334.00	175.22	
2627.10	28.24	V	58.64	-30.40	Avg	334.00	175.22	
3002.40	39.33	V	78.64	-39.31	Peak	1.25	143.40	
3002.40	30.44	V	58.64	-28.20	Avg	1.25	143.40	
3377.70	39.63	V	78.64	-39.01	Peak	46.25	143.34	
3377.70	30.74	V	58.64	-27.90	Avg	46.25	143.34	
3753.00	38.32	V	73.97	-35.65	Peak	0.00	127.40	
3753.00	29.43	V	53.97	-24.54	Avg	0.00	127.40	

**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - Middle Channel****Unit #20****Transmit Mode - X-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
750.60	44.08	H	78.64	-34.56	Peak	105.25	108.59	
750.60	35.19	H	58.64	-23.45	Avg	105.25	108.59	
1125.90	31.16	H	73.97	-42.81	Peak	356.50	127.22	
1125.90	22.27	H	53.97	-31.70	Avg	356.50	127.22	
1501.20	32.53	H	73.97	-41.44	Peak	110.00	190.92	
1501.20	23.64	H	53.97	-30.33	Avg	110.00	190.92	
1876.50	39.43	H	78.64	-39.21	Peak	192.25	190.86	
1876.50	30.54	H	58.64	-28.10	Avg	192.25	190.86	
2251.80	36.58	H	73.97	-37.39	Peak	83.00	127.04	
2251.80	27.69	H	53.97	-26.28	Avg	83.00	127.04	
2627.10	38.49	H	78.64	-40.15	Peak	136.75	206.98	
2627.10	29.60	H	58.64	-29.04	Avg	136.75	206.98	
3002.40	35.98	H	78.64	-42.66	Peak	344.50	127.16	
3002.40	27.09	H	58.64	-31.55	Avg	344.50	127.16	
3377.70	37.59	H	78.64	-41.05	Peak	146.00	175.22	
3377.70	28.70	H	58.64	-29.94	Avg	146.00	175.22	
3753.00	39.10	H	73.97	-34.87	Peak	159.00	111.22	
3753.00	30.21	H	53.97	-23.76	Avg	159.00	111.22	

**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - Middle Channel****Unit #20****Transmit Mode - Y-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
750.60	37.92	H	78.64	-40.72	Peak	135.25	350.50	
750.60	29.03	H	58.64	-29.61	Avg	135.25	350.50	
1125.90	31.21	H	73.97	-42.76	Peak	263.25	175.22	
1125.90	22.32	H	53.97	-31.65	Avg	263.25	175.22	
1501.20	32.16	H	73.97	-41.81	Peak	86.50	190.86	
1501.20	23.27	H	53.97	-30.70	Avg	86.50	190.86	
1876.50	44.08	H	78.64	-34.56	Peak	54.00	159.10	
1876.50	35.19	H	58.64	-23.45	Avg	54.00	159.10	
2251.80	36.73	H	73.97	-37.24	Peak	311.25	159.16	
2251.80	27.84	H	53.97	-26.13	Avg	311.25	159.16	
2627.10	37.54	H	78.64	-41.10	Peak	283.25	159.34	
2627.10	28.65	H	58.64	-29.99	Avg	283.25	159.34	
3002.40	38.55	H	78.64	-40.09	Peak	297.75	159.04	
3002.40	29.66	H	58.64	-28.98	Avg	297.75	159.04	
3377.70	39.49	H	78.64	-39.15	Peak	64.25	111.34	
3377.70	30.60	H	58.64	-28.04	Avg	64.25	111.34	
3753.00	38.81	H	73.97	-35.16	Peak	321.00	143.40	
3753.00	29.92	H	53.97	-24.05	Avg	321.00	143.40	

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Middle Channel  
 Unit #20  
 Transmit Mode - Z-Axis  
 Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
750.60	41.48	H	78.64	-37.16	Peak	0.25	239.46	
750.60	32.59	H	58.64	-26.05	Avg	0.25	239.46	
1125.90	35.15	H	73.97	-38.82	Peak	294.75	175.10	
1125.90	26.26	H	53.97	-27.71	Avg	294.75	175.10	
1501.20	32.61	H	73.97	-41.36	Peak	298.50	222.90	
1501.20	23.72	H	53.97	-30.25	Avg	298.25	222.92	
1876.50	45.44	H	78.64	-33.20	Peak	48.25	143.04	
1876.50	36.55	H	58.64	-22.09	Avg	48.25	143.04	
2251.80	39.75	H	73.97	-34.22	Peak	305.25	158.98	
2251.80	30.86	H	53.97	-23.11	Avg	305.25	158.98	
2627.10	40.51	H	78.64	-38.13	Peak	54.75	190.08	
2627.10	31.62	H	58.64	-27.02	Avg	54.75	190.08	
3002.40	36.37	H	78.64	-42.27	Peak	294.25	143.22	
3002.40	27.48	H	58.64	-31.16	Avg	294.25	143.22	
3377.70	39.60	H	78.64	-39.04	Peak	13.00	238.86	
3377.70	30.71	H	58.64	-27.93	Avg	13.00	238.86	
3753.00	40.91	H	73.97	-33.06	Peak	67.25	175.22	
3753.00	32.02	H	53.97	-21.95	Avg	67.25	175.22	



**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - High Channel****Unit #20****Transmit Mode - X-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
788.60	38.22	V	79.41	-41.19	Peak	329.50	112.05	
788.60	29.33	V	59.41	-30.08	Avg	329.50	112.05	
1182.90	30.70	V	73.97	-43.27	Peak	45.75	207.28	
1182.90	21.81	V	53.97	-32.16	Avg	45.75	207.28	
1577.20	34.65	V	73.97	-39.32	Peak	49.50	158.68	
1577.20	25.76	V	53.97	-28.21	Avg	49.50	158.68	
1971.50	38.47	V	79.41	-40.94	Peak	155.75	126.56	
1971.50	29.58	V	59.41	-29.83	Avg	155.75	126.56	
2365.80	35.40	V	73.97	-38.57	Peak	338.25	206.74	
2365.80	26.51	V	53.97	-27.46	Avg	338.25	206.74	
2760.10	35.78	V	73.97	-38.19	Peak	175.25	190.86	
2760.10	26.89	V	53.97	-27.08	Avg	175.25	190.86	
3154.40	37.37	V	79.41	-42.04	Peak	357.25	142.86	
3154.40	28.48	V	59.41	-30.93	Avg	357.25	142.86	
3548.70	38.34	V	79.41	-41.07	Peak	170.25	126.80	
3548.70	29.45	V	59.41	-29.96	Avg	170.25	126.80	
3943.00	37.20	V	73.97	-36.77	Peak	64.00	159.16	
3943.00	28.31	V	53.97	-25.66	Avg	64.00	159.16	

**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - High Channel****Unit #20****Transmit Mode - Y-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
788.60	37.84	V	79.41	-41.57	Peak	102.00	318.02	
788.60	28.95	V	59.41	-30.46	Avg	102.00	318.02	
1182.90	30.37	V	73.97	-43.60	Peak	43.50	127.22	
1182.90	21.48	V	53.97	-32.49	Avg	43.50	127.22	
1577.20	32.46	V	73.97	-41.51	Peak	316.50	159.04	
1577.20	23.57	V	53.97	-30.40	Avg	316.50	159.04	
1971.50	39.42	V	79.41	-39.99	Peak	275.50	127.34	
1971.50	30.53	V	59.41	-28.88	Avg	275.50	127.34	
2365.80	40.28	V	73.97	-33.69	Peak	334.75	127.40	
2365.80	31.39	V	53.97	-22.58	Avg	334.75	127.40	
2760.10	36.61	V	73.97	-37.36	Peak	0.25	207.28	
2760.10	27.72	V	53.97	-26.25	Avg	0.25	207.28	
3154.40	37.19	V	79.41	-42.22	Peak	181.00	206.92	
3154.40	28.30	V	59.41	-31.11	Avg	181.00	206.92	
3548.70	36.59	V	79.41	-42.82	Peak	284.25	223.16	
3548.70	27.70	V	59.41	-31.71	Avg	284.25	223.16	
3943.00	37.94	V	73.97	-36.03	Peak	16.00	221.97	
3943.00	29.05	V	53.97	-24.92	Avg	16.00	221.97	

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - High Channel****Unit #20****Transmit Mode - Z-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
788.60	42.09	V	79.41	-37.32	Peak	0.00	142.92	
788.60	33.20	V	59.41	-26.21	Avg	0.00	142.92	
1182.90	34.40	V	73.97	-39.57	Peak	357.50	238.86	
1182.90	25.51	V	53.97	-28.46	Avg	357.50	238.86	
1577.20	34.98	V	73.97	-38.99	Peak	0.00	143.40	
1577.20	26.09	V	53.97	-27.88	Avg	0.00	143.40	
1971.50	38.01	V	79.41	-41.40	Peak	271.50	143.22	
1971.50	29.12	V	59.41	-30.29	Avg	271.50	143.22	
2365.80	37.94	V	73.97	-36.03	Peak	0.25	159.16	
2365.80	29.05	V	53.97	-24.92	Avg	0.25	159.16	
2760.10	36.50	V	73.97	-37.47	Peak	143.50	207.28	
2760.10	27.61	V	53.97	-26.36	Avg	143.50	207.28	
3154.40	37.04	V	79.41	-42.37	Peak	358.50	174.98	
3154.40	28.15	V	59.41	-31.26	Avg	358.50	174.98	
3548.70	36.89	V	79.41	-42.52	Peak	6.75	223.28	
3548.70	28.00	V	59.41	-31.41	Avg	6.75	223.28	
3943.00	39.77	V	73.97	-34.20	Peak	358.25	127.52	
3943.00	30.88	V	53.97	-23.09	Avg	358.20	127.52	

**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - High Channel****Unit #20****Transmit Mode - X-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
788.60	39.52	H	79.41	-39.89	Peak	128.50	399.13	
788.60	30.63	H	59.41	-28.78	Avg	128.50	399.13	
1182.90	34.26	H	73.97	-39.71	Peak	27.50	143.40	
1182.90	25.37	H	53.97	-28.60	Avg	27.50	143.40	
1577.20	34.54	H	73.97	-39.43	Peak	267.25	143.16	
1577.20	25.65	H	53.97	-28.32	Avg	267.25	143.16	
1971.50	39.57	H	79.41	-39.84	Peak	311.75	175.16	
1971.50	30.68	H	59.41	-28.73	Avg	311.75	175.16	
2365.80	36.84	H	73.97	-37.13	Peak	127.00	158.68	
2365.80	27.95	H	53.97	-26.02	Avg	127.00	158.68	
2760.10	37.76	H	73.97	-36.21	Peak	50.25	158.74	
2760.10	28.87	H	53.97	-25.10	Avg	50.25	158.74	
3154.40	39.20	H	79.41	-40.21	Peak	339.00	142.80	
3154.40	30.31	H	59.41	-29.10	Avg	339.00	142.80	
3548.70	38.88	H	79.41	-40.53	Peak	251.75	159.22	
3548.70	29.99	H	59.41	-29.42	Avg	251.75	159.22	
3943.00	41.59	H	73.97	-32.38	Peak	43.50	127.16	
3943.00	32.70	H	53.97	-21.27	Avg	43.50	127.16	

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - High Channel****Unit #20****Transmit Mode - Y-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
788.60	38.54	H	79.41	-40.87	Peak	4.50	208.35	
788.60	29.65	H	59.41	-29.76	Avg	4.50	208.35	
1182.90	38.26	H	73.97	-35.71	Peak	288.75	206.98	
1182.90	29.37	H	53.97	-24.60	Avg	288.75	206.98	
1577.20	34.88	H	73.97	-39.09	Peak	30.25	159.22	
1577.20	25.99	H	53.97	-27.98	Avg	30.25	159.22	
1971.50	38.03	H	79.41	-41.38	Peak	59.00	206.98	
1971.50	29.14	H	59.41	-30.27	Avg	59.00	206.98	
2365.80	39.79	H	73.97	-34.18	Peak	278.50	111.40	
2365.80	30.90	H	53.97	-23.07	Avg	278.50	111.40	
2760.10	37.35	H	73.97	-36.62	Peak	313.50	127.28	
2760.10	28.46	H	53.97	-25.51	Avg	313.50	127.28	
3154.40	40.73	H	79.41	-38.68	Peak	345.50	111.58	
3154.40	31.84	H	59.41	-27.57	Avg	345.50	111.58	
3548.70	40.82	H	79.41	-38.59	Peak	263.50	143.34	
3548.70	31.93	H	59.41	-27.48	Avg	263.50	143.34	
3943.00	42.29	H	73.97	-31.68	Peak	317.00	159.22	
3943.00	33.40	H	53.97	-20.57	Avg	317.00	159.22	

**FCC 15.231**

Universal Electronics, Inc.  
Dish 21.2 Remote IC Conversion 2022  
Model: Dish 21.2

Date: 10/13/2022  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - High Channel****Unit #20****Transmit Mode - Z-Axis****Duty Cycle: 35.90%**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
788.60	39.23	H	79.41	-40.18	Peak	338.25	177.01	
788.60	30.34	H	59.41	-29.07	Avg	338.25	177.01	
1182.90	34.18	H	73.97	-39.79	Peak	251.50	175.28	
1182.90	25.29	H	53.97	-28.68	Avg	251.50	175.28	
1577.20	35.67	H	73.97	-38.30	Peak	246.75	174.86	
1577.20	26.78	H	53.97	-27.19	Avg	246.75	174.86	
1971.50	42.84	H	79.41	-36.57	Peak	51.00	191.28	
1971.50	33.95	H	59.41	-25.46	Avg	51.00	191.28	
2365.80	40.70	H	73.97	-33.27	Peak	300.75	111.52	
2365.80	31.81	H	53.97	-22.16	Avg	300.75	111.52	
2760.10	40.06	H	73.97	-33.91	Peak	48.75	143.22	
2760.10	31.17	H	53.97	-22.80	Avg	48.75	143.22	
3154.40	37.29	H	79.41	-42.12	Peak	67.25	207.22	
3154.40	28.40	H	59.41	-31.01	Avg	67.25	207.22	
3548.70	38.21	H	79.41	-41.20	Peak	42.50	143.34	
3548.70	29.32	H	59.41	-30.09	Avg	42.50	143.34	
3943.00	38.33	H	73.97	-35.64	Peak	336.75	143.34	
3943.00	29.44	H	53.97	-24.53	Avg	336.75	143.34	

**FCC 15.231**

Universal Electronics, Inc.  
 Dish 21.2 Remote IC Conversion 2022  
 Model: Dish 21.2

Date: 10/13/2022  
 Lab: D  
 Tested By: Kyle Fujimoto

**Non Harmonic Emissions from the Tx and Digital Portion - 9 kHz to 30 MHz**  
**Non Harmonic Emissions from the Tx and Digital Portion - 1 GHz To 3943 MHz**


Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
								No Emissions Detected
								from 9 kHz to 30 MHz
								for the digital portion
								of the EUT
								No Emissions Detected
								from 1 GHz to 3943 MHz
								for the digital portion
								of the EUT
								No Emissions Detected
								from 9 kHz to 30 MHz
								for the Non-Harmonic Emissions
								of the Transmitter for the EUT
								No Emissions Detected
								from 1 GHz to 3943 MHz
								for the Non-Harmonic Emissions
								of the Transmitter for the EUT
								Investigated in the X-Axis,
								Y-Axis, and Z-Axis

Title: Pre-Scan - FCC Class B  
File: 1 - Pre-Scan - 369.5 MHz - FCC Class B - X-Axis - Worst Case - 10-19-2022.set  
Operator: Kyle Fujimoto  
EUT Type: Dish 21.2 Remote IC Conversion 2022  
EUT Condition: The EUT is continuously transmitting at 369.5 MHz  
Company: Universal Electronics, Inc.  
Model: Dish 21.2  
S/N: N/A  
X-Axis Worst Case  
Note The Frequencies at 369.5 MHz and 739 MHz are subject to the limits of FCC 15.231 instead.

10/19/2022 10:33:09 AM  
Sequence: Preliminary Scan

FCC Class B

Electric Field Strength (dBμV/m)

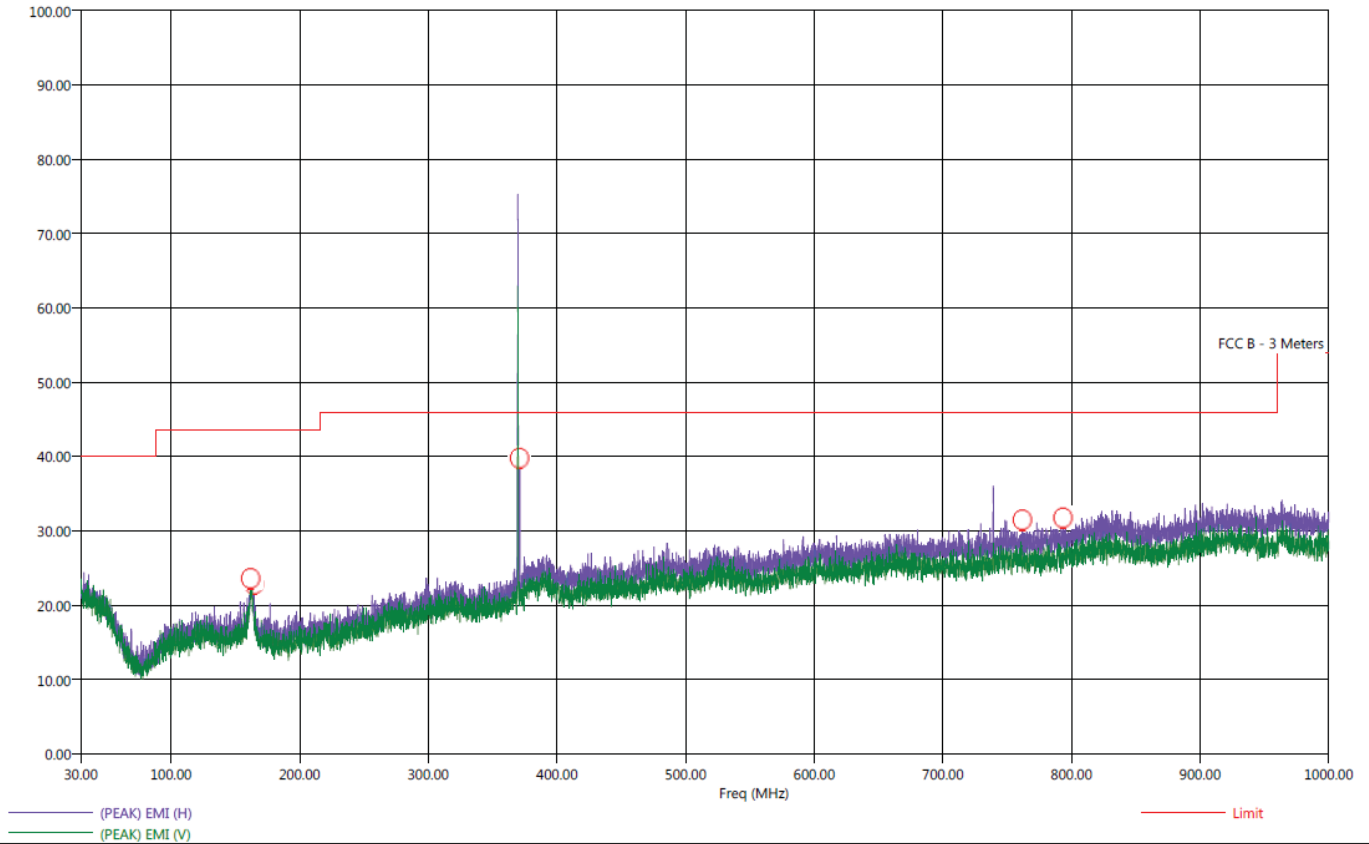





Title: Radiated Final - FCC Class B  
 File: 1 - Final Scan - 369.5 MHz - FCC Class B - X-Axis - Worst Case - 10-19-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: Dish 21.2 Remote IC Conversion 2022  
 EUT Condition: The EUT is continuously transmitting at 369.5 MHz  
 Company: Universal Electronics, Inc.  
 P/N: R32010AB00-00001  
 S/N: N/A  
 X-Axis Worst Case

10/19/2022 10:44:18 AM  
 Sequence: Final Measurements

FCC Class B


Freq (MHz)	Pol	(PEAK) EMI (dBµV/m)	(OP) EMI (dBµV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBµV/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (deq)	Twr Ht (cm)
161.90	V	25.80	20.52	-17.70	-22.98	43.50	22.51	0.93	219.00	174.44
162.70	H	25.77	20.40	-17.73	-23.10	43.50	22.44	0.94	57.25	254.74
164.50	H	21.82	16.72	-21.68	-26.78	43.50	18.76	0.94	221.75	400.05
371.00	H	35.91	20.77	-10.09	-25.23	46.00	21.70	1.49	97.50	127.34
761.80	H	31.55	26.14	-14.45	-19.86	46.00	26.20	2.34	272.50	127.28
793.40	H	31.73	26.47	-14.27	-19.53	46.00	26.40	2.44	240.00	175.10



Title: Pre-Scan - FCC Class B  
 File: 2 - Pre-Scan - 375.3 MHz - FCC Class B - X-Axis - Worst Case - 10-19-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: Dish 21.2 Remote IC Conversion 2022  
 EUT Condition: The EUT is continuously transmitting at 375.3 MHz  
 Company: Universal Electronics, Inc.  
 Model: Dish 21.2  
 S/N: N/A  
 X-Axis Worst Case  
 Note The Frequencies at 375.3 MHz and 750.6 MHz are subject to the limits of FCC 15.231 instead.

10/19/2022 11:05:01 AM  
 Sequence: Preliminary Scan

FCC Class B

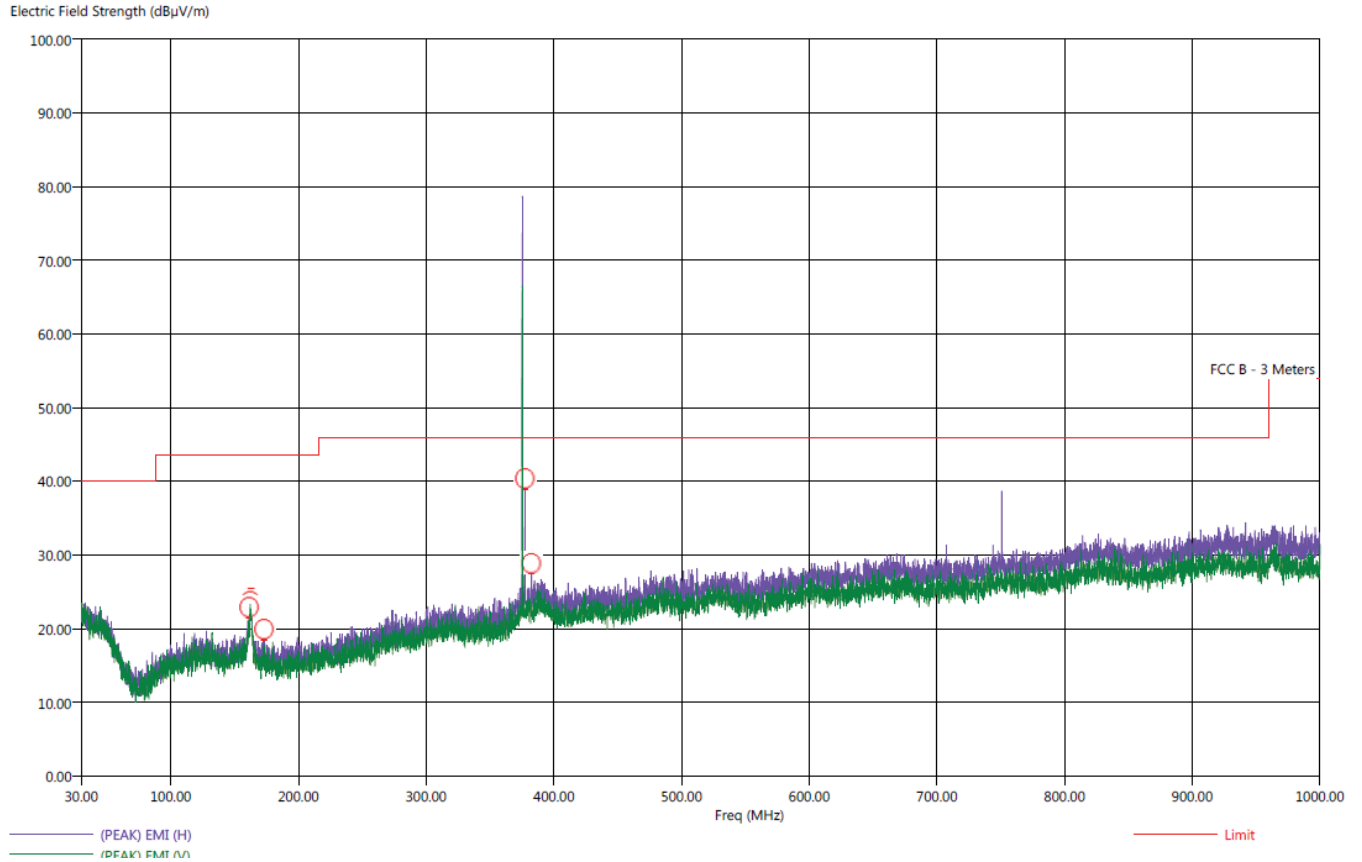



Title: Radiated Final - FCC Class B  
File: 2 - Final Scan - 375.3 MHz - FCC Class B - X-Axis - Worst Case - 10-19-2022.set  
Operator: Kyle Fujimoto  
EUT Type: Dish 21.2 Remote IC Conversion 2022  
EUT Condition: The EUT is continuously transmitting at 375.3 MHz  
Company: Universal Electronics, Inc.  
Model: Dish 21.2  
S/N: N/A  
X-Axis Worst Case

10/19/2022 11:16:46 AM  
Sequence: Final Measurements

FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dBµV/m)	(QP) EMI (dBµV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBµV/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (deca)	Twr Ht (cm)
161.40	H	24.67	19.50	-18.83	-24.00	43.50	21.57	0.93	160.25	174.98
162.20	H	26.04	20.80	-17.46	-22.70	43.50	22.91	0.94	101.00	190.98
163.00	H	25.25	20.36	-18.25	-23.14	43.50	22.44	0.94	276.25	334.50
173.10	H	19.02	13.96	-24.48	-29.54	43.50	15.91	0.97	211.25	334.50
377.30	H	39.23	21.86	-6.77	-24.14	46.00	22.61	1.51	271.00	238.86
382.40	H	27.19	21.71	-18.81	-24.29	46.00	22.86	1.52	222.50	206.80



**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044


**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



Title: Pre-Scan - FCC Class B  
File: 3 - Pre-Scan - 394.3 MHz - FCC Class B - X-Axis - Worst Case - 10-19-2022.set  
Operator: Kyle Fujimoto  
EUT Type: Dish 21.2 Remote IC Conversion 2022  
EUT Condition: The EUT is continuously transmitting at 394.3 MHz  
Company: Universal Electronics, Inc.  
Model: Dish 21.2  
S/N: N/A  
X-Axis Worst Case  
Note The Frequencies at 394.3 MHz and 788.6 MHz are subject to the limits of FCC 15.231 instead.

10/19/2022 11:45:00 AM  
Sequence: Preliminary Scan

FCC Class B

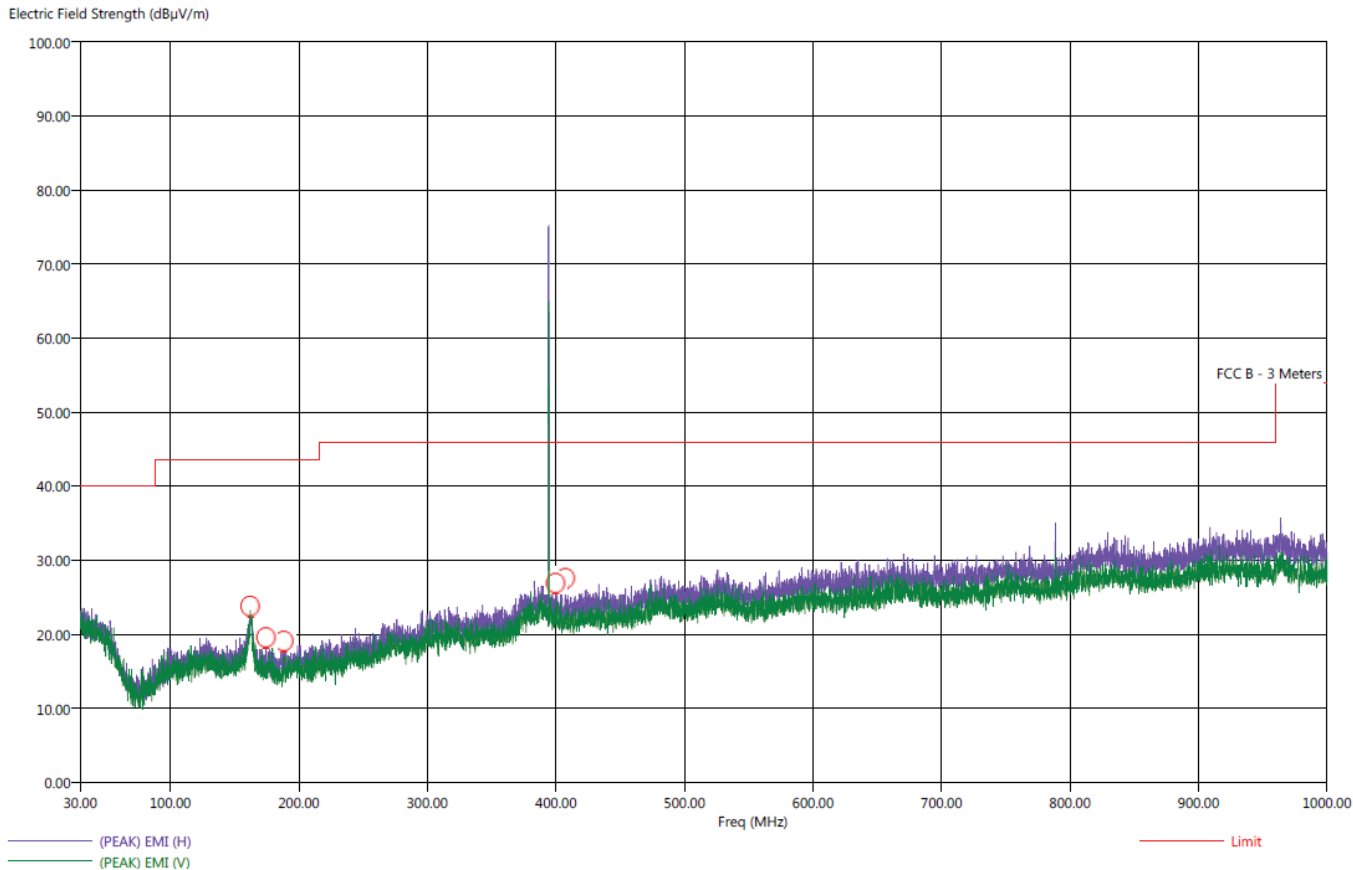

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



Title: Radiated Final - FCC Class B  
 File: 3 - Final Scan - 394.3 MHz - FCC Class B - X-Axis - Worst Case - 10-19-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: Dish 21.2 Remote IC Conversion 2022  
 EUT Condition: The EUT is continuously transmitting at 394.3 MHz  
 Company: Universal Electronics, Inc.  
 Model: Dish 21.2  
 S/N: N/A  
 X-Axis Worst Case  
 Note The Frequencies at 394.3 MHz and 788.6 MHz are subject to the limits of FCC 15.231 instead.

10/19/2022 12:02:02 PM  
 Sequence: Final Measurements

FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dBµV/m)	(OP) EMI (dBµV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBµV/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (deg)	Twr Ht (cm)
162.10	H	25.95	20.69	-17.55	-22.81	43.50	22.81	0.94	311.00	190.74
162.80	H	25.41	20.38	-18.09	-23.12	43.50	22.43	0.94	297.25	111.34
174.40	H	19.06	13.90	-24.44	-29.60	43.50	15.90	0.98	7.50	382.50
188.30	H	18.79	13.53	-24.71	-29.97	43.50	15.40	1.02	274.25	365.85
399.80	H	26.88	21.13	-19.12	-24.87	46.00	22.22	1.55	92.50	270.26
407.30	H	25.54	20.72	-20.46	-25.28	46.00	21.80	1.56	54.00	222.62




**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Newbury Park Division**  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400

***-20 dB BANDWIDTH PLOT  
DATA SHEET***

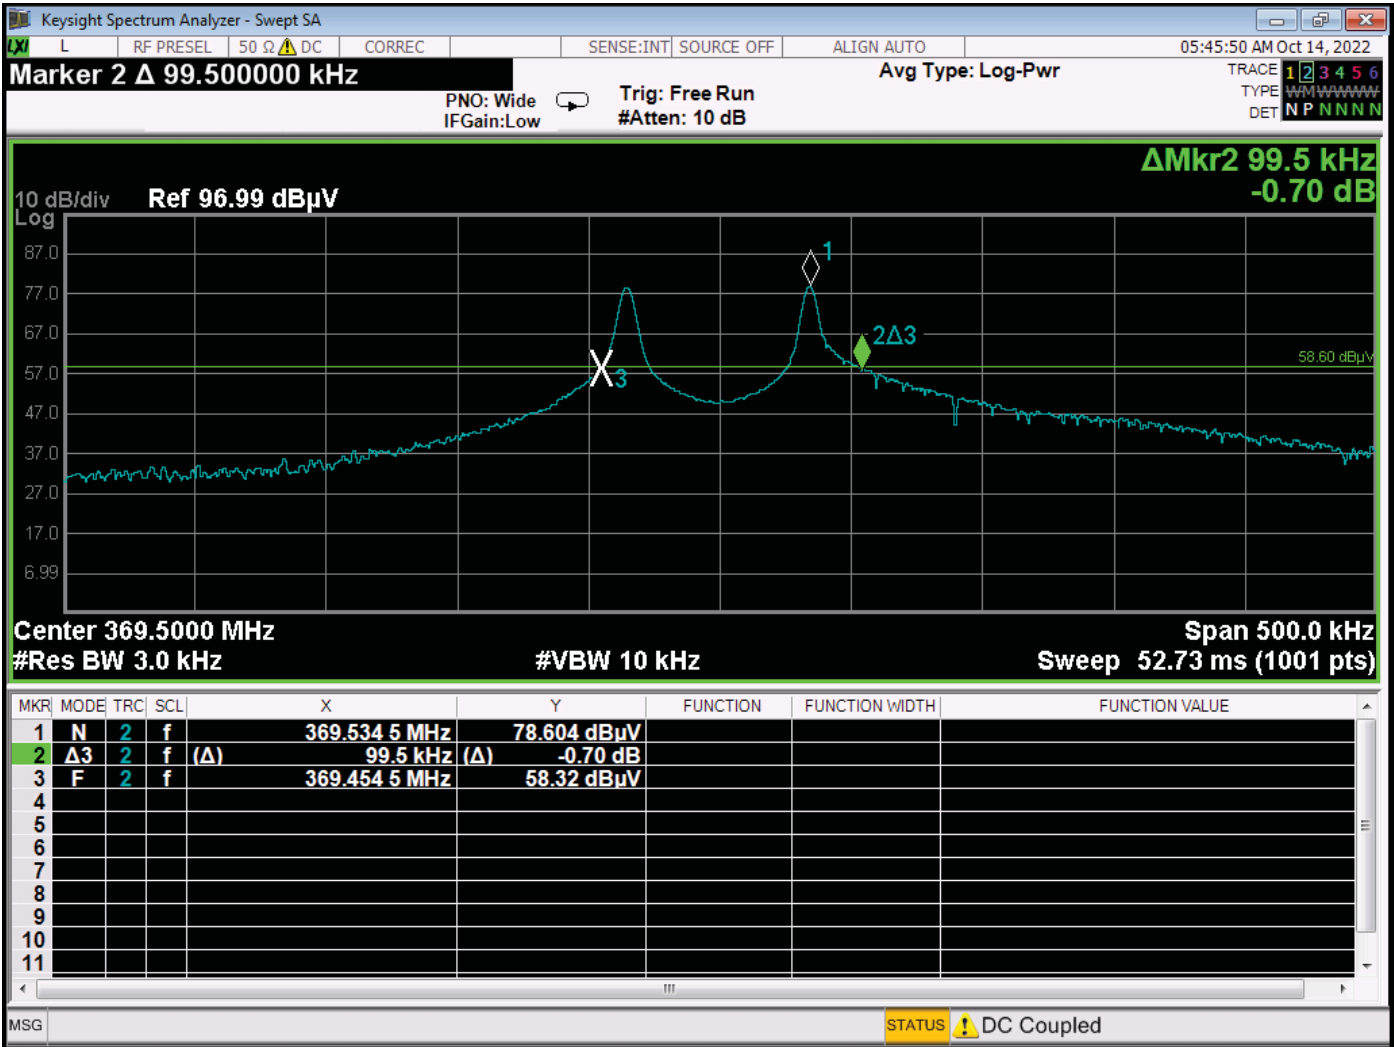


-20 dB Bandwidth Plot – Low Channel

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500


Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

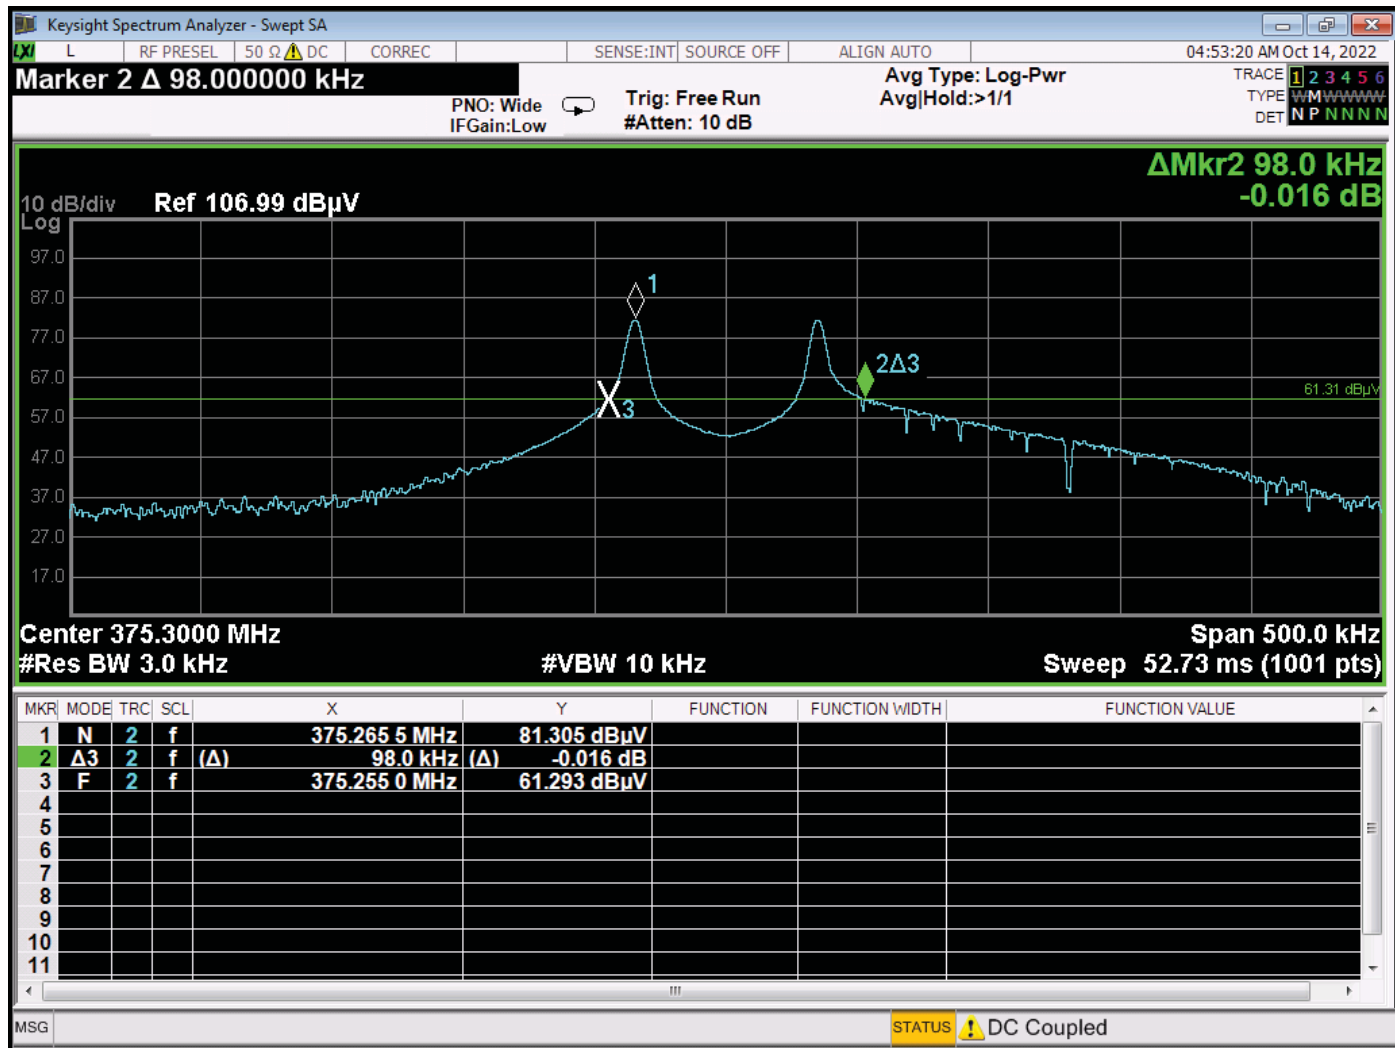



-20 dB Bandwidth Plot – Middle Channel



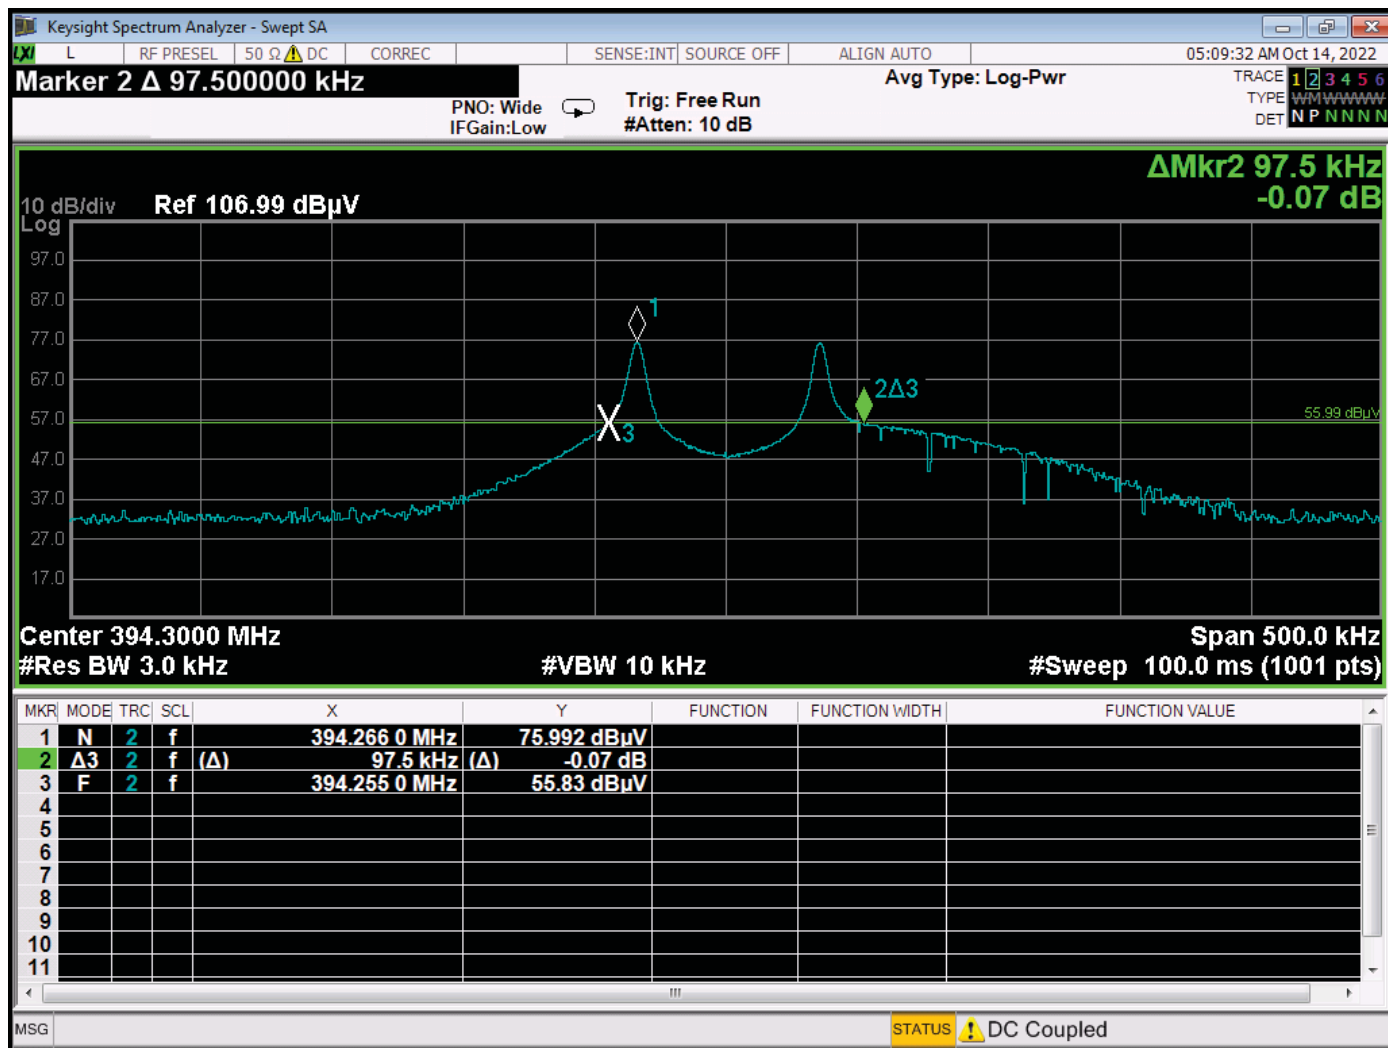

-20 dB Bandwidth Plot – High Channel

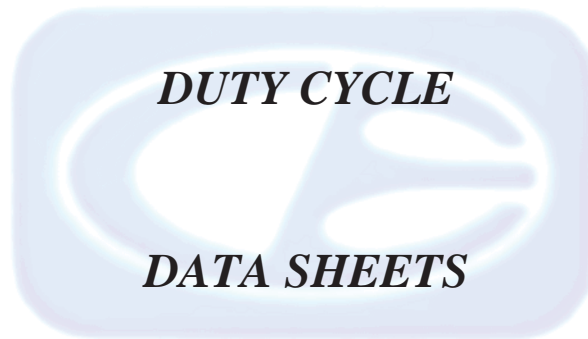

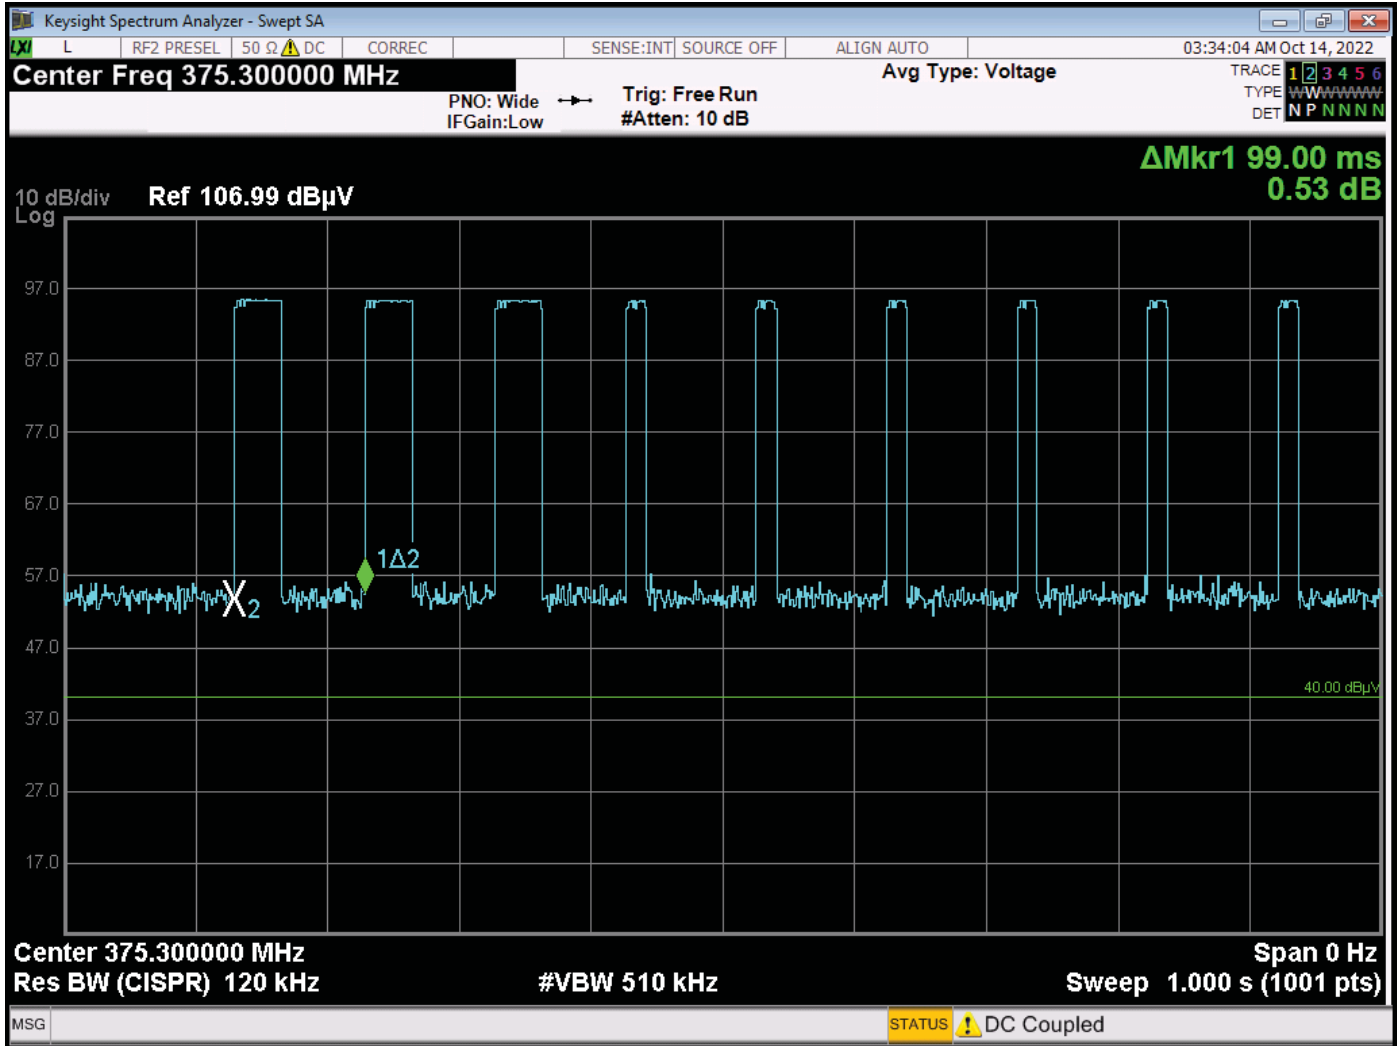


The pulse train repeats every 99 ms when the button is pressed down constantly (Worst Case)

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

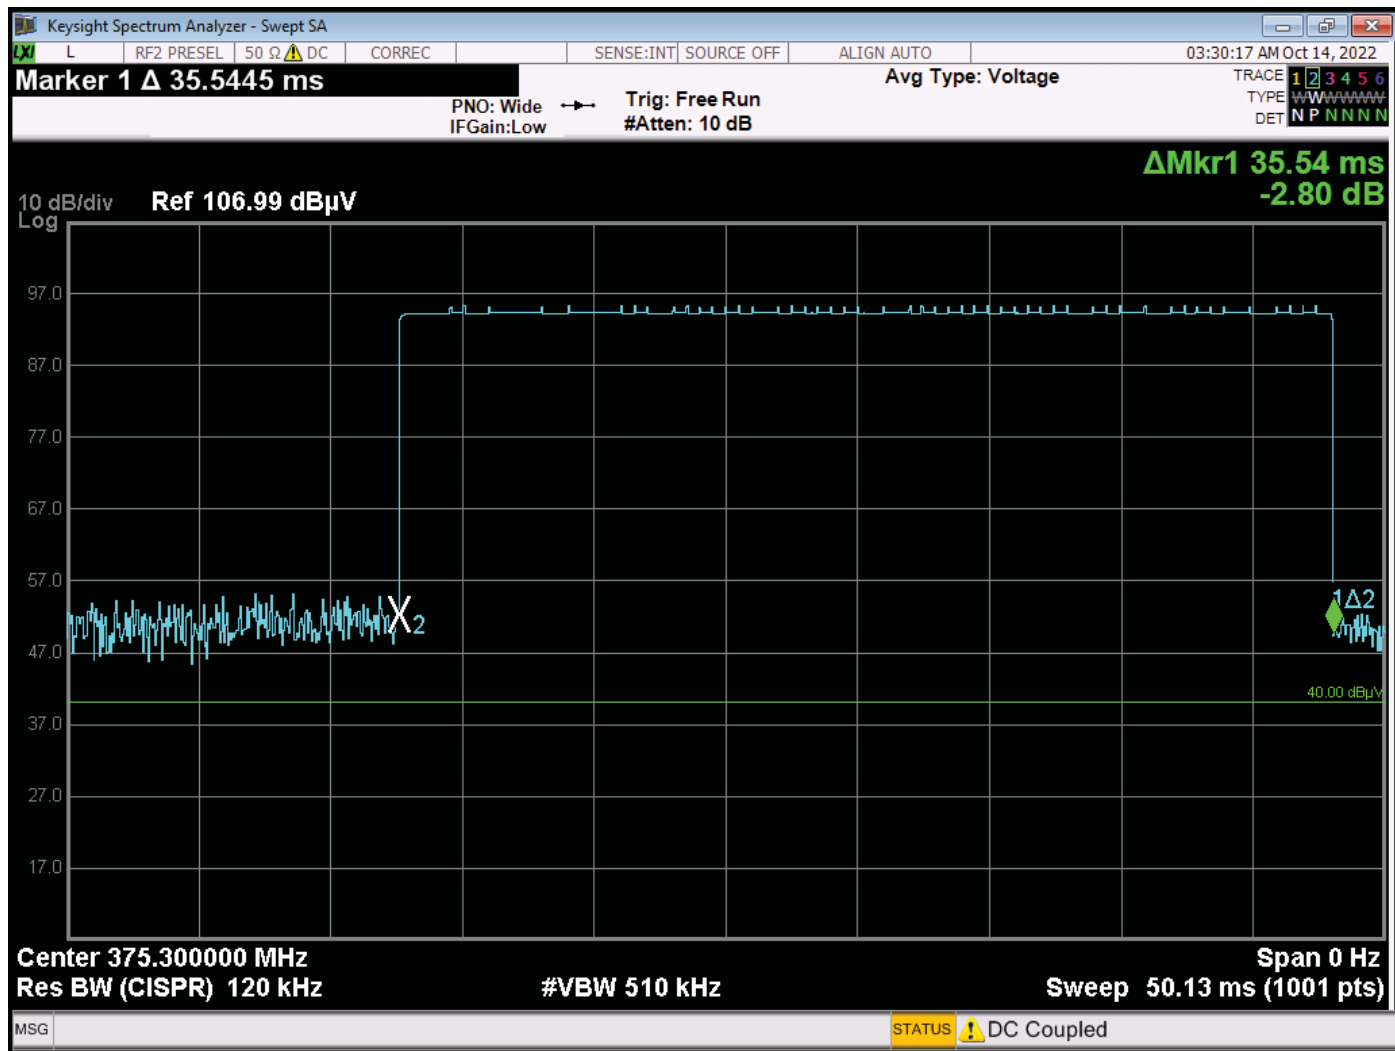

Time of Pulse = 35.54 ms

Total On Time = 35.54 ms

Duty Cycle = 35.54 ms / 99 ms = 35.90%

The peak to average ratio is -8.89 dB

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400