


*FCC PART 15, SUBPART B and C
TEST REPORT**for***JASCO LCD Z-WAVE REMOTE****MODEL: URC-8901BG0-X**

Prepared for

UNIVERSAL ELECTRONICS, INC.
6101 GATEWAY DRIVE
CYPRESS, CALIFORNIA 90630Prepared by: 

KYLE FUJIMOTO

Approved by: 

MICHAEL CHRISTENSEN

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: OCTOBER 25, 2007

	REPORT BODY	APPENDICES					TOTAL
		<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>	
PAGES	16	2	2	2	12	10	44

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	4
1. PURPOSE	5
2. ADMINISTRATIVE DATA	6
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
3. APPLICABLE DOCUMENTS	7
4. DESCRIPTION OF TEST CONFIGURATION	8
4.1 Description Of Test Configuration - EMI	8
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. TRANSMITTER DESCRIPTION	12
8. TEST PROCEDURES	13
8.1 RF Emissions	13
8.1.1 Conducted Emissions Test	13
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	14
8.1.3 Radiated Emissions (Spurious and Harmonics) Test (Continued)	15
9. CONCLUSIONS	16

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos <ul style="list-style-type: none">• Test Setup Diagrams• Radiated Emissions Photos• Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of 3 Meter Radiated Site

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested: Jasco LCD Z-Wave Remote
Model: URC-8901BG0-X
S/N: N/A

Product Description: See Expository Statement

Modifications: The EUT was not modified in order to meet the specifications.

Customer: Universal Electronics, Inc.
6101 Gateway Drive
Cypress, California 90630

Manufacturer: Computime Limited
7/F., How Ming Fty. Bldg.,
99 How Ming Street Kwun Tong, Kowloon, Hong Kong

Test Dates: August 23 and 24, 2007

Test Specifications: EMI requirements
CFR Title 47, Part 15 Subpart B; and Subpart C, Sections 15.205, 15.209 and 15.249

Test Procedure: ANSI C63.4


Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz – 30 MHz	This test was not performed because the EUT operates on battery power and cannot be plugged into the AC public mains.
2	Radiated RF Emissions, 10 kHz – 9300 MHz (Transmitter Portion)	Complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209, and 15.249.
3	Radiated RF Emissions, 10 kHz – 9300 MHz (Digital and Receiver Portion)	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B.

1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Jasco LCD Z-Wave Remote, Model: URC-8901BG0-X. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B for the digital and receiver portion; and the limits defined in Subpart C, sections 15.205, 15.209, and 15.249 for the transmitter portion.

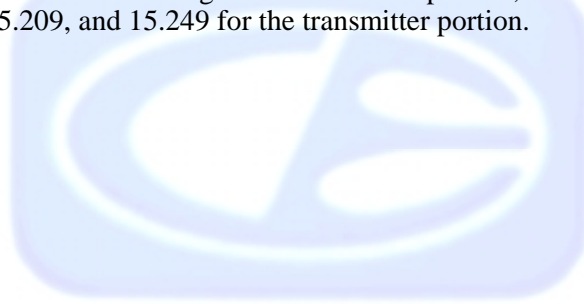

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Universal Electronics, Inc.

Jesse Mendez Senior Electrical Core Engineer

Compatible Electronics, Inc.

Kyle Fujimoto Test Engineer

Michael Christensen Lab Manager

2.4 Date Test Sample was Received

The test sample was received on August 23, 2007.

2.5 Disposition of the Test Sample

The sample was returned to Universal Electronics, Inc. on October 25, 2007.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description Of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

The Jasco LCD Z-Wave Remote, Model: URC-8901BG0-X (EUT) was tested as a stand alone unit and tested in three orthogonal axes. The EUT was transmitting and/or receiving on a continuous basis.

The final radiated data was taken in the mode above. Please see Appendix E for the data sheets.

4.1.1 Cable Construction and Termination

No external cables were connected to the EUT.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
JASCO LCD Z-WAVE REMOTE (EUT)	COMPUTIME LIMITED	URC-8901BG0-X	N/A	MG345601

5.2 EMI Test Equipment

EQUIPMENT TYPE	MANU- FACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
GENERAL TEST EQUIPMENT USED FOR ALL RF EMISSIONS TESTS					
Computer	Hewlett Packard	4530	US91912319	N/A	N/A
Spectrum Analyzer – Main Section	Hewlett Packard	8566B	3638A08784	June 4, 2007	June 4, 2008
Spectrum Analyzer – Display Section	Hewlett Packard	85662A	3701A22279	June 4, 2007	June 4, 2008
Quasi-Peak Adapter	Hewlett Packard	85650A	2430A00424	June 4, 2007	June 4, 2008
EMI Receiver	Rohde & Schwarz	ESIB40	100149	November 15, 2005	Nov. 15, 2007
Monitor	Hewlett Packard	D5258A	TW74500641	N/A	N/A
RF RADIATED EMISSIONS TEST EQUIPMENT					
Preamplifier	Com Power	PA-102	1017	January 16, 2007	Jan. 16, 2008
Biconical Antenna	Com Power	AB-900	15227	March 8, 2007	March 8, 2008
Log Periodic Antenna	Com Power	AL-100	16060	July 9, 2007	July 9, 2008
Loop Antenna	Com Power	AL-130	17089	September 21, 2005	Sept. 21, 2007
Horn Antenna	Antenna Research	DRG-118/A	1053	March 6, 2006	March 6, 2008
Microwave Preamplifier	Com Power	PA-122	181921	Feb. 27, 2007	Feb. 27, 2008
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A

6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

7. TRANSMITTER DESCRIPTION

The EUT uses Frequency Shift Keying (FSK). The emission designator is 1K80F1D. This is based on a 99% bandwidth of 1.80 kHz. The plot for the bandwidth has been uploaded as a separate exhibit.

8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

The spectrum analyzer was used as a measuring meter. The data was collected with the spectrum analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak was used only where indicated in the data sheets. A transient limiter was used for the protection of the spectrum analyzer input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the spectrum analyzer. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in EN 55022. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the Compatible Electronics software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave. The final qualification data is located in Appendix E.

Test Results:

This test was not performed because the EUT operates on battery power and cannot be plugged into the AC public mains.

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer and EMI Receiver were used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifier Model: PA-102 was used for frequencies from 30 MHz to 1 GHz, and the Com-Power Microwave Preamplifier Model: PA-122 was used for frequencies above 1 GHz. The spectrum analyzer and EMI Receiver were used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer or EMI Receiver records the highest measured reading over all the sweeps.

The frequencies above 1 GHz were averaged manually by narrowing the video filter down to 10 Hz and putting the sweep time on AUTO on the EMI Receiver to keep the amplitude reading calibrated.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 9.3 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results. The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.

8.1.3 Radiated Emissions (Spurious and Harmonics) Test (Continued)

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E.


Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.249.

9. CONCLUSIONS

The Jasco LCD Z-Wave Remote, Model: URC-8901BG0-X meets all of the **Class B** specification limits defined in CFR Title 47, Part 15, Subpart B for the digital and receiver portion; and the limits defined in Subpart C, sections 15.205, 15.209, and 15.249 for the transmitter portion.



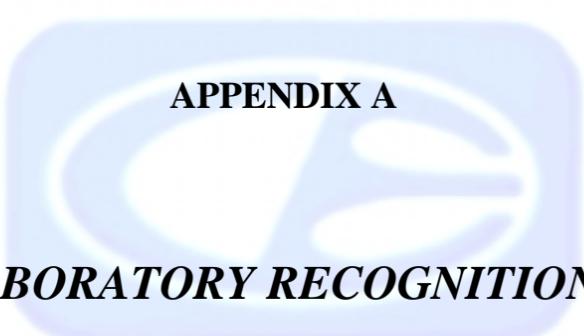

APPENDIX A

LABORATORY RECOGNITIONS

LABORATORY RECOGNITIONS

Compatible Electronics has the following agency accreditations:

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031


Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

Compatible Electronics is recognized or on file with the following agencies:

Federal Communications Commission

Industry Canada

Radio-Frequency Technologies (Competent Body)

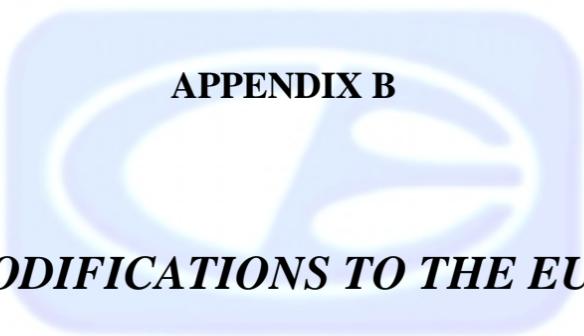

APPENDIX B


MODIFICATIONS TO THE EUT


MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.249 or FCC Class B specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT.

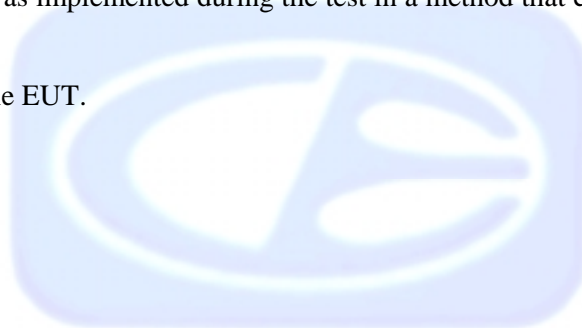

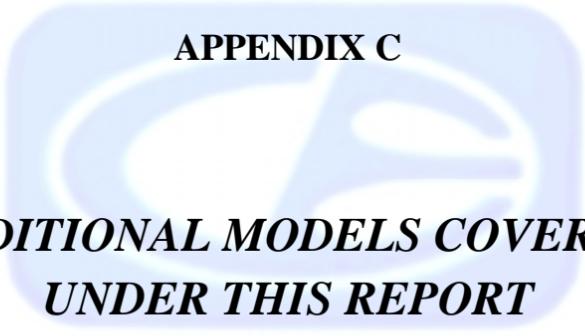

APPENDIX C

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***


ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Jasco LCD Z-Wave Remote
Model: URC-8901BG0-X
S/N: N/A

There were no additional models covered under this report.



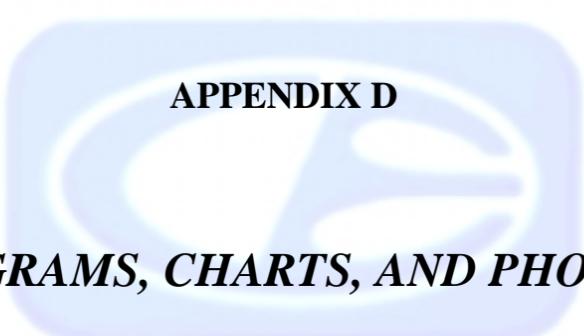


APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS



**FIGURE 1: PLOT MAP AND LAYOUT OF 3 METER
RADIATED SITE**

OPEN LAND > 15 METERS

OPEN LAND > 15 METERS

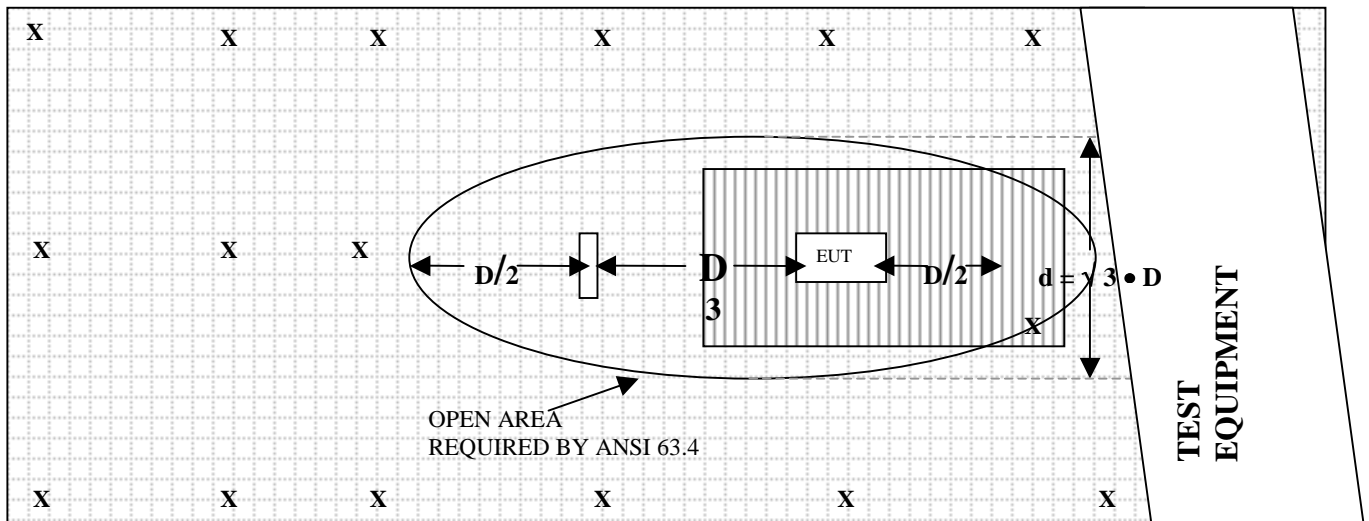

OPEN LAND > 15 METERS

X	= GROUND RODS		= GROUND SCREEN
D	= TEST DISTANCE (meters)		= WOOD COVER

COM-POWER AB-900

BICONICAL ANTENNA

S/N: 15227

CALIBRATION DATE: MARCH 8, 2007

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	12.6	100	12.3
35	10.0	120	14.7
40	9.5	140	13.0
45	9.2	160	13.7
50	9.4	180	16.4
60	7.4	200	17.2
70	6.5	250	14.6
80	7.0	275	19.0
90	8.0	300	22.3

COM-POWER AL-100

LOG PERIODIC ANTENNA

S/N: 16060

CALIBRATION DATE: JULY 9, 2007

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
300	13.5	700	20.5
400	15.8	800	21.6
500	17.0	900	21.3
600	19.2	1000	22.2

COM-POWER PA-102**PREAMPLIFIER**

S/N: 1017

CALIBRATION DATE: JANUARY 16, 2007

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	38.4	300	38.2
40	38.3	350	38.2
50	38.2	400	38.1
60	38.3	450	37.8
70	38.4	500	37.8
80	38.6	550	38.1
90	38.3	600	37.8
100	38.4	650	37.8
125	38.3	700	37.6
150	38.2	750	37.9
175	38.4	800	37.6
200	38.4	850	37.2
225	38.4	900	37.4
250	38.3	950	37.0
275	38.3	1000	37.2

COM-POWER PA-122**PREAMPLIFIER****S/N: 181921****CALIBRATION DATE: FEBRUARY 27, 2007**

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	36.2	10.0	35.1
1.5	35.4	10.5	34.8
2.0	34.7	11.0	33.5
2.5	34.8	11.5	33.9
3.0	34.8	12.0	34.0
3.5	34.6	12.5	34.4
4.0	34.2	13.0	34.4
4.5	34.1	13.5	34.7
5.0	34.1	14.0	36.0
5.5	34.7	14.5	35.7
6.0	35.6	15.0	36.1
6.5	36.8	15.5	35.6
7.0	36.7	16.0	35.4
7.5	34.9	16.5	35.3
8.0	33.3	17.0	34.9
8.5	33.6	17.5	33.7
9.0	34.6	18.0	33.3
9.5	35.9		

ANTENNA RESEARCH DRG-118/A**HORN ANTENNA**

S/N: 1053

CALIBRATION DATE: MARCH 6, 2006

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	24.46	10.0	39.55
1.5	25.05	10.5	39.86
2.0	28.42	11.0	38.49
2.5	29.91	11.5	40.71
3.0	31.46	12.0	40.59
3.5	31.91	12.5	40.17
4.0	31.55	13.0	39.70
4.5	31.94	13.5	40.84
5.0	32.90	14.0	41.58
5.5	34.07	14.5	45.14
6.0	35.69	15.0	42.20
6.5	33.11	15.5	39.42
7.0	36.51	16.0	38.80
7.5	37.27	16.5	41.08
8.0	37.21	17.0	44.11
8.5	37.16	17.5	46.29
9.0	38.27	18.0	41.61
9.5	39.73		

COM-POWER AL-130**LOOP ANTENNA**

S/N: 17089

CALIBRATION DATE: SEPTEMBER 21, 2005

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-42.84	8.66
0.01	-41.93	9.57
0.02	-41.29	10.21
0.05	-42.37	9.13
0.07	-41.8	9.7
0.1	-41.83	9.67
0.2	-44.13	7.37
0.3	-41.73	9.77
0.5	-41.8	9.7
0.7	-41.53	9.97
1	-41.46	10.04
2	-41.14	10.36
3	-41.26	10.24
4	-41.46	10.04
5	-41.10	10.40
10	-40.83	10.67
15	-41.47	10.03
20	-35.44	16.06
25	-42.37	9.13
30	-42.94	8.56



FRONT VIEW

UNIVERSAL ELECTRONICS, INC.
JASCO LCD Z-WAVE REMOTE
MODEL: URC-8901BG0-X
FCC SUBPART B AND C – RADIATED EMISSIONS – LAB B

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



REAR VIEW

UNIVERSAL ELECTRONICS, INC.
JASCO LCD Z-WAVE REMOTE
MODEL: URC-8901BG0-X
FCC SUBPART B AND C – RADIATED EMISSIONS – LAB B

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



FRONT VIEW

UNIVERSAL ELECTRONICS, INC.
JASCO LCD Z-WAVE REMOTE
MODEL: URC-8901BG0-X
FCC SUBPART B AND C – RADIATED EMISSIONS – LAB D

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



REAR VIEW

UNIVERSAL ELECTRONICS, INC.
JASCO LCD Z-WAVE REMOTE
MODEL: URC-8901BG0-X
FCC SUBPART B AND C – RADIATED EMISSIONS – LAB D


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

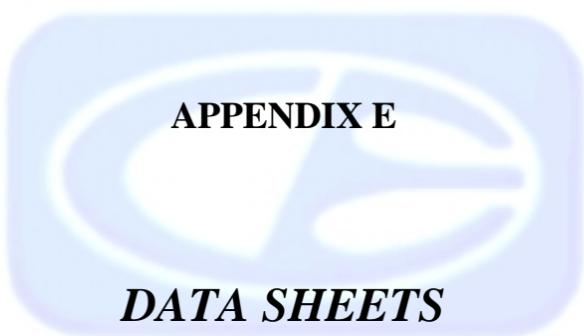

APPENDIX E

DATA SHEETS

RADIATED EMISSIONS

DATA SHEETS

FCC 15.249

Universal Electronics, Inc.
 Jasco LCD Z-Wave Remote
 Model: URC-8901BG0-X

Date: 08/23/07
 Labs: B and D
 Tested By: Kyle Fujimoto

X-Axis
Transmit Mode

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.4	75.15	V	94	-18.85	Peak	1	90	
1816.8	43.73	V	74	-30.27	Peak	3.11	135	
1816.8	33.87	V	54	-20.13	Avg	3.11	135	
2725.2	47.97	V	74	-26.03	Peak	3.15	125	
2725.2	41.93	V	54	-12.07	Avg	3.15	125	
3633.6	39.98	V	74	-34.02	Peak	2.72	135	
3633.6	27.75	V	54	-26.25	Avg	2.72	135	
4542	40.38	V	74	-33.62	Peak	2.73	135	
4542	27.49	V	54	-26.51	Avg	2.73	135	
5450.4		V	74		Peak			no emission found
5450.4		V	54		Avg			
6358.8		V	74		Peak			no emission found
6358.8		V	54		Avg			
7267.2		V	74		Peak			no emission found
7267.2		V	54		Avg			
8175.6		V	74		Peak			no emission found
8175.6		V	54		Avg			
9084		V	74		Peak			no emission found
9084		V	54		Avg			

FCC 15.249

Universal Electronics, Inc.
 Jasco LCD Z-Wave Remote
 Model: URC-8901BG0-X

Date: 08/23/07
 Labs: B and D
 Tested By: Kyle Fujimoto

X-Axis
Transmit Mode

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.4	87.05	H	94	-6.95	Peak	1.5	90	
1816.8	46.56	H	74	-27.44	Peak	2.39	135	
1816.8	41.85	H	54	-12.15	Avg	2.39	135	
2725.2	41.79	H	74	-32.21	Peak	3.28	135	
2725.2	30.95	H	54	-23.05	Avg	3.28	135	
3633.6	42.71	H	74	-31.29	Peak	2.75	135	
3633.6	27.95	H	54	-26.05	Avg	2.75	135	
4542	39.43	H	74	-34.57	Peak	2.67	125	
4542	27.47	H	54	-26.53	Avg	2.67	125	
5450.4		H	74		Peak			no emissions found
5450.4		H	54		Avg			
6358.8		H	74		Peak			no emissions found
6358.8		H	54		Avg			
7267.2		H	74		Peak			no emissions found
7267.2		H	54		Avg			
8175.6		H	74		Peak			no emissions found
8175.6		H	54		Avg			
9084		H	74		Peak			no emissions found
9084		H	54		Avg			

FCC 15.249

Universal Electronics, Inc.
 Jasco LCD Z-Wave Remote
 Model: URC-8901BG0-X

Date: 08/23/07
 Labs: B and D
 Tested By: Kyle Fujimoto

Y-Axis
Transmit Mode

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.4	86.58	V	94	-7.42	Peak	1	0	
1816.8	47.91	V	74	-26.09	Peak	2.62	180	
1816.8	44.44	V	54	-9.56	Avg	2.62	180	
2725.2	47.04	V	74	-26.96	Peak	2.93	135	
2725.2	42.29	V	54	-11.71	Avg	2.93	135	
3633.6	42.48	V	74	-31.52	Peak	3.24	0	
3633.6	29.01	V	54	-24.99	Avg	3.24	0	
4542		V	74		Peak			no emission found
4542		V	54		Avg			
5450.4		V	74		Peak			no emission found
5450.4		V	54		Avg			
6358.8		V	74		Peak			no emission found
6358.8		V	54		Avg			
7267.2		V	74		Peak			no emission found
7267.2		V	54		Avg			
8175.6		V	74		Peak			no emission found
8175.6		V	54		Avg			
9084		V	74		Peak			no emission found
9084		V	54		Avg			

FCC 15.249

Universal Electronics, Inc.
 Jasco LCD Z-Wave Remote
 Model: URC-8901BG0-X

Date: 08/23/07
 Labs: B and D
 Tested By: Kyle Fujimoto

Y-Axis
Transmit Mode

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.4	76.18	H	94	-17.82	Peak	1	135	
1816.8	45.71	H	74	-28.29	Peak	2.84	135	
1816.8	38.59	H	54	-15.41	Avg	2.84	135	
2725.2	45.27	H	74	-28.73	Peak	3.16	135	
2725.2	39.47	H	54	-14.53	Avg	3.16	135	
3633.6	41.01	H	74	-32.99	Peak	2.63	135	
3633.6	32.42	H	54	-21.58	Avg	2.63	135	
4542	40.99	H	74	-33.01	Peak	2.63	125	
4542	27.59	H	54	-26.41	Avg	2.63	125	
5450.4	42.88	H	74	-31.12	Peak	2.65	135	
5450.4	28.47	H	54	-25.53	Avg	2.65	135	
6358.8		H	74		Peak			no emissions found
6358.8		H	54		Avg			
7267.2		H	74		Peak			no emissions found
7267.2		H	54		Avg			
8175.6		H	74		Peak			no emissions found
8175.6		H	54		Avg			
9084		H	74		Peak			no emissions found
9084		H	54		Avg			

FCC 15.249

Universal Electronics, Inc.
 Jasco LCD Z-Wave Remote
 Model: URC-8901BG0-X

Date: 08/23/07
 Labs: B and D
 Tested By: Kyle Fujimoto

Z-Axis
Transmit Mode

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.4	80.25	V	94	-13.75	Peak	1.5	90	
1816.8	45.31	V	74	-28.69	Peak	3.19	135	
1816.8	39.88	V	54	-14.12	Avg	3.19	135	
2725.2	48.11	V	74	-25.89	Peak	2.35	135	
2725.2	44.94	V	54	-9.06	Avg	2.35	135	
3633.6	39.24	V	74	-34.76	Peak	2.27	135	
3633.6	28.76	V	54	-25.24	Avg	2.27	135	
4542	38.81	V	74	-35.19	Peak	2.29	125	
4542	26.61	V	54	-27.39	Avg	2.29	125	
5450.4		V	74		Peak			no emission found
5450.4		V	54		Avg			
6358.8		V	74		Peak			no emission found
6358.8		V	54		Avg			
7267.2		V	74		Peak			no emission found
7267.2		V	54		Avg			
8175.6		V	74		Peak			no emission found
8175.6		V	54		Avg			
9084		V	74		Peak			no emission found
9084		V	54		Avg			

FCC 15.249

Universal Electronics, Inc.
 Jasco LCD Z-Wave Remote
 Model: URC-8901BG0-X

Date: 08/23/07
 Labs: B and D
 Tested By: Kyle Fujimoto

Z-Axis
Transmit Mode

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.4	87.25	H	94	-6.75	Peak	1	0	
1816.8	46.61	H	74	-27.39	Peak	3.55	135	
1816.8	41.43	H	54	-12.57	Avg	3.55	135	
2725.2	46.74	H	74	-27.26	Peak	3.36	135	
2725.2	41.59	H	54	-12.41	Avg	3.36	135	
3633.6	40.44	H	74	-33.56	Peak	3.37	125	
3633.6	27.78	H	54	-26.22	Avg	3.37	125	
4542	40.24	H	74	-33.76	Peak	3.36	135	
4542	27.43	H	54	-26.57	Avg	3.36	135	
5450.4		H	74		Peak			no emissions found
5450.4		H	54		Avg			
6358.8		H	74		Peak			no emissions found
6358.8		H	54		Avg			
7267.2		H	74		Peak			no emissions found
7267.2		H	54		Avg			
8175.6		H	74		Peak			no emissions found
8175.6		H	54		Avg			
9084		H	74		Peak			no emission found
9084		H	54		Avg			

Universal Electronics, Inc.
Jasco LCD Z-Wave Remote
Model: URC-8901BG0-X

Date: 08/23/07
Labs: B and D
Tested By: Kyle Fujimoto

Digital Portion and Non Harmonic Emissions of the Transmitter

[illegible]

Universal Electronics, Inc.
Jasco LCD Z-Wave Remote
Model: URC-8901BG0-X

Date: 08/24/07
Labs: B and D
Tested By: Kyle Fujimoto

X-Axis (Worst Case)
Receive Mode

[illegible]