


**FCC PART 15 SUBPART B and C  
TEST REPORT***for***INSIGNIA CTV RF REMOTE 2010****Model: URC-8881BJ0-R**

Prepared for

UNIVERSAL ELECTRONICS, INC.  
6101 GATEWAY DRIVE  
CYPRESS, CALIFORNIA 90630-4841Prepared by: 

KYLE FUJIMOTO

Approved by: 

JAMES ROSS

COMPATIBLE ELECTRONICS INC.  
114 OLINDA DRIVE  
BREA, CALIFORNIA 92823  
(714) 579-0500

DATE: MAY 27, 2010

	REPORT	APPENDICES					TOTAL
	BODY	A	B	C	D	E	
PAGES	16	2	2	2	11	9	42

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

---

**TABLE OF CONTENTS**

<b>Section / Title</b>	<b>PAGE</b>
<b>GENERAL REPORT SUMMARY</b>	<b>4</b>
<b>SUMMARY OF TEST RESULTS</b>	<b>4</b>
<b>1. PURPOSE</b>	<b>5</b>
<b>2. ADMINISTRATIVE DATA</b>	<b>6</b>
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
<b>3. APPLICABLE DOCUMENTS</b>	<b>7</b>
<b>4. DESCRIPTION OF TEST CONFIGURATION</b>	<b>8</b>
4.1 Description of Test Configuration – EMI	8
4.1.1 Cable Construction and Termination	9
<b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b>	<b>10</b>
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
<b>6. TEST SITE DESCRIPTION</b>	<b>12</b>
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
6.3 Facility Environmental Characteristics	12
<b>7. TEST PROCEDURES</b>	<b>13</b>
7.1 RF Emissions	13
7.1.1 Conducted Emissions Test	13
7.1.2 Radiated Emissions (Spurious and Harmonics) Test	14
<b>8. CONCLUSIONS</b>	<b>16</b>

---

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>
A	Laboratory Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagram, Charts, and Photos <ul style="list-style-type: none"><li>• Test Setup Diagram</li><li>• Antenna and Amplifier Factors</li><li>• Radiated Emissions Photos</li></ul>
E	Data Sheets

**LIST OF FIGURES**

<b>FIGURE</b>	<b>TITLE</b>
1	Conducted Emissions Test Setup
2	Plot Map And Layout of Radiated Test Site – 3 Meters

## GENERAL REPORT SUMMARY

Compatible Electronics Inc. generates this electromagnetic emission test report, which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested:            Insignia cTV RF Remote 2010  
                                  Model: URC-8881BJ0-R  
                                  S/N: N/A

Product Description:    See Expository Statement

Modifications:            The EUT was not modified in order to meet the specifications.

Customer:                 Universal Electronics, Inc.  
                                  6101 Gateway Drive  
                                  Cypress, California 90630-4841

Test Date(s):             May 14 and 17, 2010

Test Specifications:      EMI requirements  
                                  CFR Title 47, Part 15, Subpart B

Test Procedure:          ANSI C63.4

Test Deviations:         The test procedure was not deviated from during the testing.


## SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions 150 kHz to 30 MHz	The EUT does not directly or indirectly connect to the AC mains, thus this test was not performed.
2	Radiated RF Emissions 10 kHz – 9300 MHz (Transmitter Portion)	Complies with the limits of CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.249.  Highest reading in relation to spec limit: 92.01 (QP) dBuV/m @ 908.42 MHz (*U = 4.22 dB)
3	Radiated RF Emissions 10 kHz – 9300 MHz (Digital Portion)	Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B.

\*U = Expanded Uncertainty with a coverage factor of k=2

**1. PURPOSE**

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Insignia cTV RF Remote 2010, Model: URC-8881BJ0-R. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B for the digital portion; and the limits defined in Subpart C, sections 15.205, 15.209, and 15.249 for the transmitter portion.

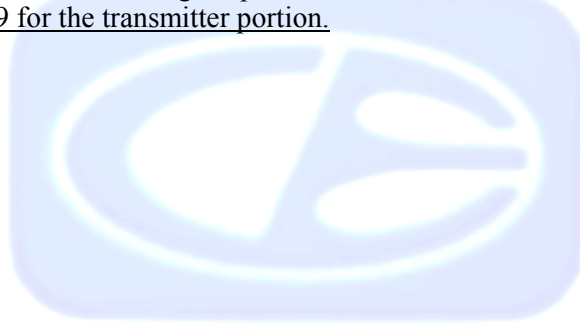

## 2. ADMINISTRATIVE DATA

### 2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California.

### 2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

### 2.3 Cognizant Personnel

Universal Electronics, Inc.

Jesse Mendez                      Senior Electrical Core Engineer

Compatible Electronics Inc.

Kyle Fujimoto                  Test Engineer

James Ross                      Test Engineer

### 2.4 Date Test Sample was Received

The test sample was received prior to the date of testing.

### 2.5 Disposition of the Test Sample

The test sample has not yet been returned as of the date of this report.

### 2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

FCC	Federal Communications Commission
RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
ITE	Information Technology Equipment
LISN	Line Impedance Stabilization Network
NVLAP	National Voluntary Laboratory Accreditation Program
CFR	Code of Federal Regulations
N/A	Not Applicable
Ltd.	Limited
Inc.	Incorporated
IR	Infrared

### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

<b>SPEC</b>	<b>TITLE</b>
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

---

#### 4. DESCRIPTION OF TEST CONFIGURATION

##### 4.1 Description of Test Configuration – EMI

The Insignia cTV RF Remote 2010, Model: URC-8881BJ0-R (EUT) was tested as a stand alone unit and tested in three orthogonal axis. The EUT was continuously transmitting or receiving.

The EUT's antenna is a PCB trace.

It was determined that the emissions were at their highest level when the EUT was operating in the above configuration. The final emissions data was taken in this mode of operation and any cables were maximized. All initial investigations were performed with the measurement receiver in manual mode scanning the frequency range continuously. Photographs of the test setup are in Appendix D of this report.



#### **4.1.1 Cable Construction and Termination**

There are no external cables connected to the EUT.



**5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT****5.1 EUT and Accessory List**

<b>EQUIPMENT</b>	<b>MANUFACTURER</b>	<b>MODEL NUMBER</b>	<b>SERIAL NUMBER</b>	<b>FCC ID</b>
INSIGNIA CTV RF REMOTE 2010 (EUT)	UNIVERSAL ELECTRONICS, INC.	URC-8881BJ0-R	N/A	MG38881-R

## 5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
<b>GENERAL TEST EQUIPMENT USED FOR ALL RF EMISSIONS TESTS</b>					
Computer	Hewlett Packard	4530	US91912319	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100194	September 17, 2008	Sept. 17, 2010
Spectrum Analyzer – Main Section	Hewlett Packard	8566B	3638A08784	May 29, 2009	May 29, 2010
Spectrum Analyzer – Display Section	Hewlett Packard	85662A	2648A14530	May 29, 2009	May 29, 2010
Quasi-Peak Adapter	Hewlett Packard	85650A	2430A00424	May 29, 2009	May 29, 2010
Monitor	Hewlett Packard	D5258A	TW74500641	N/A	N/A
<b>RF RADIATED EMISSIONS TEST EQUIPMENT</b>					
Biconical Antenna	Com Power	AB-900	15250	February 16, 2010	Feb. 16, 2011
Log Periodic Antenna	Com Power	AL-100	16060	June 15, 2009	June 15, 2010
Preamplifier	Com-Power	PA-102	1017	January 6, 2010	Jan. 6, 2011
Loop Antenna	Com-Power	AL-130	17089	September 29, 2008	Sept. 29, 2010
Horn Antenna	Com-Power	AH-118	071175	March 18, 2010	March 18, 2012
Microwave Preamplifier	Com-Power	PA-122	181921	March 10, 2010	March 10, 2011
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A

---

**6. TEST SITE DESCRIPTION****6.1 Test Facility Description**

Please refer to section 2.1 and 7.1.2 of this report for EMI test location.

**6.2 EUT Mounting, Bonding and Grounding**

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

**6.3 Facility Environmental Characteristics**

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.

## 7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 7.1 RF Emissions

#### 7.1.1 Conducted Emissions Test

The measurement receiver was used as a measuring meter. The data was collected with the measurement receiver in the peak detect mode with the "Max Hold" feature activated. The quasi-peak was used only where indicated in the data sheets. A transient limiter was used for the protection of the measurement receiver's input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the measurement receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the Compatible Electronics conducted emissions software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave. The final qualification data is located in Appendix E.

#### **Test Results:**

The EUT does not directly or indirectly connect to the AC mains, thus this test was not performed.

## 7.1.2 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer and EMI Receiver were used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifier Model: PA-102 was used for frequencies from 30 MHz to 1 GHz and the Com Power Microwave Preamplifier Model: PA-122 was used for frequencies above 1 GHz. The spectrum analyzer and EMI Receiver were used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps.

The quasi-peak adapter was used only for those readings which are marked accordingly on the data sheets.

The frequencies above 1 GHz were averaged manually by narrowing the video filter down to 10 Hz and putting the sweep time on AUTO on the EMI Receiver to keep the amplitude reading calibrated.

The measurement bandwidths and transducers used for the radiated emissions test were:

<b>FREQUENCY RANGE</b>	<b>EFFECTIVE MEASUREMENT BANDWIDTH</b>	<b>TRANSDUCER</b>
10 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 9.3 GHz	1 MHz	Horn Antenna


The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 2003. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT by the Radiated Emission Manual Test software. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results. The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.

**Radiated Emissions (Spurious and Harmonics) Test (continued)**

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3-meter test distance to obtain the final test data.

**Test Results:**

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Sections 15.209 and 15.249.

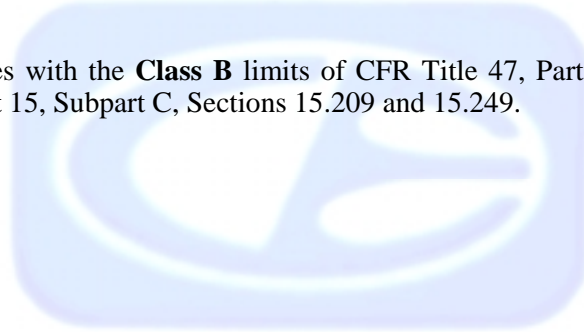

**8. CONCLUSIONS**

The Insignia cTV RF Remote 2010, Model: URC-8881BJ0-R, as tested, meets all of the **Class B** specification limits defined in CFR Title 47, Part 15, Subpart B for the digital portion; and the limits defined in Subpart C, sections 15.205, 15.209, and 15.249 for the transmitter portion.





**APPENDIX A**

***LABORATORY RECOGNITIONS***

## ***LABORATORY RECOGNITIONS***

**Compatible Electronics has the following agency accreditations:**

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031

Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

**Compatible Electronics is recognized or on file with the following agencies:**

Federal Communications Commission

Industry Canada



**APPENDIX B**

***MODIFICATIONS TO THE EUT***

## **MODIFICATIONS TO THE EUT**

The modifications listed below were made to the EUT to pass FCC 15.249 and/or FCC **Class B** specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modification were made to the EUT during the testing.



**APPENDIX C**

***ADDITIONAL MODELS COVERED  
UNDER THIS REPORT***

## **ADDITIONAL MODELS COVERED UNDER THIS REPORT**

USED FOR THE PRIMARY TEST

Insignia cTV RF Remote 2010  
Model: URC-8881BJ0-R  
S/N: N/A

ALSO APPROVED UNDER THIS REPORT:


There were no additional models covered under this report.



**APPENDIX D**

***DIAGRAMS, CHARTS, AND PHOTOS***


**FIGURE 1: CONDUCTED EMISSIONS TEST SETUP**

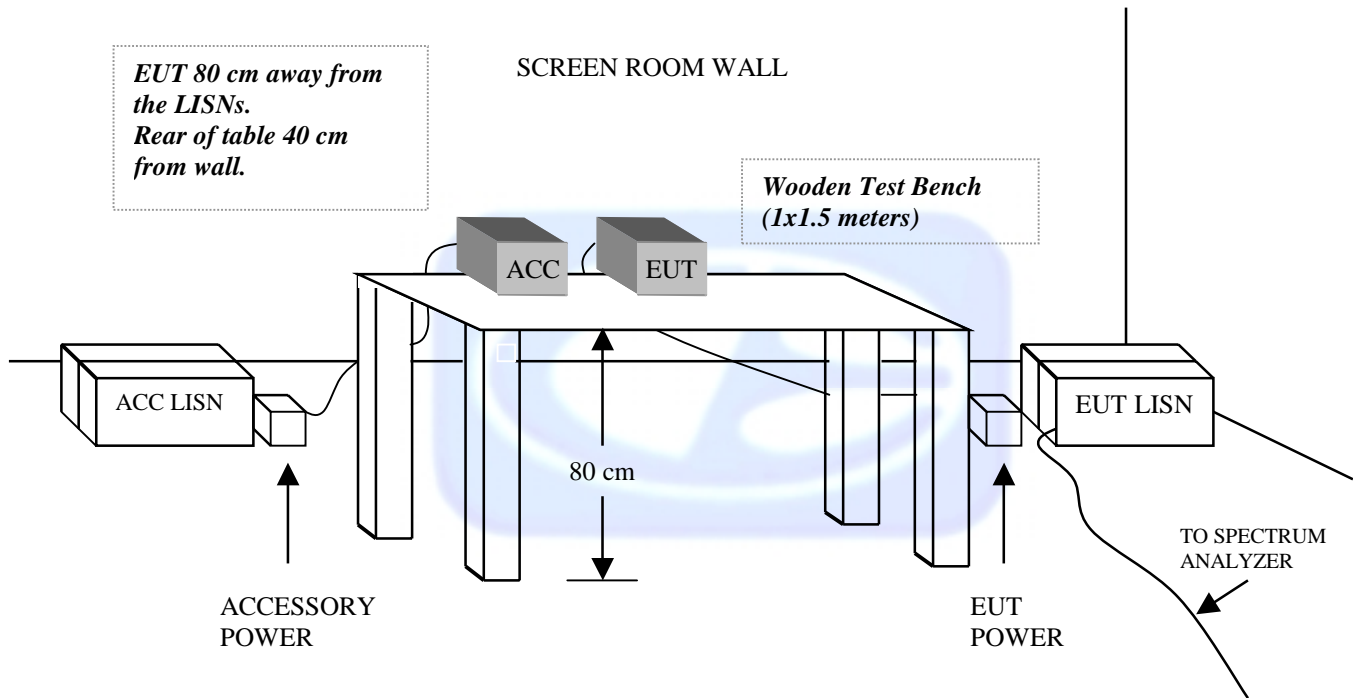



**FIGURE 2: PLOT MAP AND LAYOUT OF RADIATED SITE – 3 METERS**

**OPEN LAND > 15 METERS**

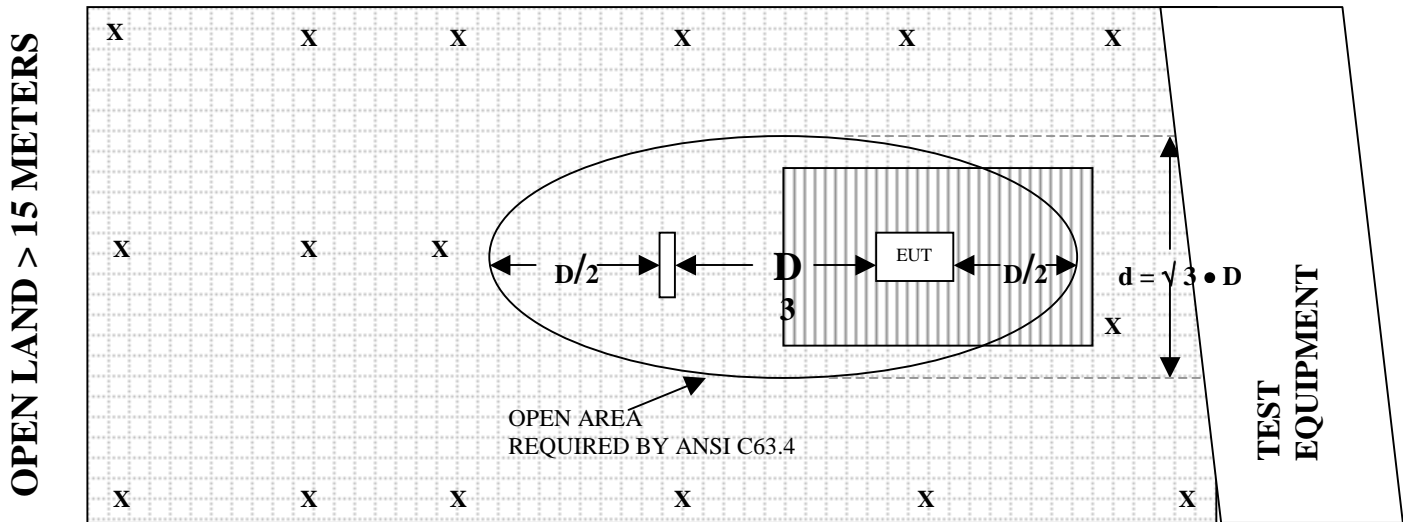

**OPEN LAND > 15 METERS**

- |          |                          |  |                 |
|----------|--------------------------|--|-----------------|
| <b>X</b> | = GROUND RODS            |  | = GROUND SCREEN |
| <b>D</b> | = TEST DISTANCE (meters) |  | = WOOD COVER    |

**COM-POWER AB-900****BICONICAL ANTENNA**

S/N: 15250

CALIBRATION DATE: FEBRUARY 16, 2010

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
30	13.5	100	11.1
35	10.4	120	13.1
40	10.3	140	12.2
45	9.8	160	13.6
50	10.6	180	15.9
60	9.5	200	16.4
70	8.4	250	15.1
80	5.5	275	17.7
90	7.3	300	19.5

**COM-POWER AL-100****LOG PERIODIC ANTENNA**

S/N: 16060

CALIBRATION DATE: JUNE 15, 2009

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
300	14.2	700	20.1
400	15.9	800	21.2
500	17.1	900	21.3
600	18.8	1000	22.3

**COM POWER AH-118****HORN ANTENNA**

S/N: 071175

CALIBRATION DATE: MARCH 18, 2010

<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>
1.0	22.2	10.0	39.8
1.5	24.2	10.5	40.2
2.0	27.2	11.0	39.7
2.5	27.8	11.5	39.9
3.0	30.5	12.0	41.7
3.5	30.9	12.5	42.7
4.0	31.9	13.0	42.3
4.5	33.2	13.5	40.3
5.0	33.6	14.0	42.6
5.5	36.2	14.5	43.4
6.0	35.8	15.0	41.9
6.5	36.1	15.5	40.8
7.0	37.9	16.0	41.0
7.5	37.4	16.5	41.5
8.0	38.0	17.0	44.5
8.5	38.8	17.5	47.6
9.0	38.0	18.0	50.8
9.5	39.2		

**COM-POWER PA-102****PREAMPLIFIER**

S/N: 1017

CALIBRATION DATE: JANUARY 6, 2010

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
20	38.0	300	38.2
30	38.3	350	38.1
40	38.4	400	38.5
50	38.2	450	38.0
60	38.2	500	37.9
70	38.3	550	38.2
80	38.1	600	38.2
90	38.2	650	37.7
100	38.3	700	38.3
125	38.2	750	38.3
150	38.3	800	37.4
175	38.3	850	37.5
200	38.1	900	37.6
225	38.2	950	37.4
250	38.3	1000	37.3
275	38.2		

**COM-POWER PA-122****PREAMPLIFIER**

S/N: 181921

CALIBRATION DATE: MARCH 10, 2010

<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>
1.0	35.53	10.0	34.78
1.5	34.92	10.5	34.36
2.0	34.63	11.0	33.14
2.5	34.42	11.5	34.42
3.0	34.40	12.0	34.24
3.5	34.36	12.5	34.95
4.0	34.11	13.0	34.62
4.5	33.61	13.5	35.24
5.0	33.83	14.0	35.40
5.5	34.53	14.5	36.66
6.0	35.09	15.0	35.98
6.5	35.58	15.5	35.94
7.0	36.50	16.0	35.80
7.5	34.83	16.5	34.98
8.0	34.08	17.0	35.00
8.5	33.57	17.5	34.25
9.0	34.68	18.0	33.51
9.5	35.84	18.5	32.88

**COM-POWER AL-130****LOOP ANTENNA**

S/N: 17089

CALIBRATION DATE: SEPTEMBER 29, 2008

<b>FREQUENCY (MHz)</b>	<b>MAGNETIC (dB/m)</b>	<b>ELECTRIC (dB/m)</b>
0.009	-41.57	9.93
0.01	-42.06	9.44
0.02	-42.43	9.07
0.05	-42.50	9.00
0.07	-42.10	9.40
0.1	-42.03	9.47
0.2	-44.50	7.00
0.3	-41.93	9.57
0.5	-41.90	9.60
0.7	-41.73	9.77
1	-41.23	10.27
2	-40.90	10.60
3	-41.20	10.30
4	-41.30	10.20
5	-40.70	10.80
10	-41.10	10.40
15	-42.17	9.33
20	-42.00	9.50
25	-42.20	9.30
30	-43.10	8.40



**FRONT VIEW**

UNIVERSAL ELECTRONICS, INC.  
INSIGNIA CTV RF REMOTE 2010  
MODEL: URC-8881BJ0-R  
FCC SUBPART B AND C – RADIATED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**






**REAR VIEW**

UNIVERSAL ELECTRONICS, INC.  
INSIGNIA CTV RF REMOTE 2010  
MODEL: URC-8881BJ0-R  
FCC SUBPART B AND C – RADIATED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

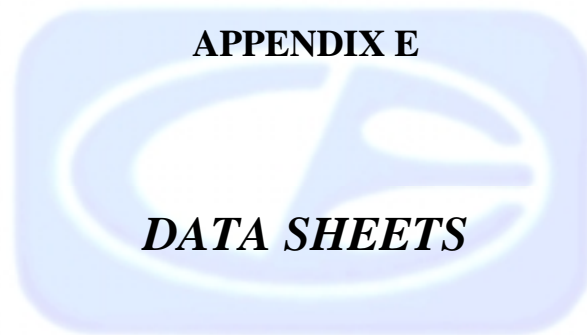

**FCC 15.249**

 Universal Electronics, Inc.  
 Insignia cTV RF Remote  
 Model: URC-8881BJ0-R

 Date: 05/14/2010  
 Labs: B and D  
 Tested By: Kyle Fujimoto

**X-Axis - Transmit Mode**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.42	82.76	V	94	-11.24	Peak	2	45	
1816.84	43.22	V	74	-30.78	Peak	1.35	155	
1816.84	33.79	V	54	-20.21	Avg	1.35	155	
2725.26	39.52	V	74	-34.48	Peak	1.25	135	
2725.26	27.48	V	54	-26.52	Avg	1.25	135	
3633.68	40.68	V	74	-33.32	Peak	1.35	155	
3633.68	28.22	V	54	-25.78	Avg	1.35	155	
4542.1	39.43	V	74	-34.57	Peak	1.25	175	
4542.1	27.37	V	54	-26.63	Avg	1.25	175	
5450.52	42.39	V	74	-31.61	Peak	1.35	185	
5450.52	28.89	V	54	-25.11	Avg	1.35	185	
6358.94								No Emission Detected
6358.94								
7267.36								No Emission Detected
7267.36								
8175.78								No Emission Detected
8175.78								
9084.2								No Emission Detected
9084.2								

**FCC 15.249**

Universal Electronics, Inc.  
 Insignia cTV RF Remote  
 Model: URC-8881BJ0-R

Date: 05/14/2010  
 Labs: B and D  
 Tested By: Kyle Fujimoto

**X-Axis - Transmit Mode**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.42	92.16	H	94	-1.84	Peak	1	90	
908.42	92.01	H	94	-1.99	QP	1	90	
1816.84	49.99	H	74	-24.01	Peak	1.25	135	
1816.84	47.37	H	54	-6.63	Avg	1.25	135	
2725.26	40.45	H	74	-33.55	Peak	1.35	165	
2725.26	27.33	H	54	-26.67	Avg	1.35	165	
3633.68	45.67	H	74	-28.33	Peak	1.25	135	
3633.68	38.87	H	54	-15.13	Avg	1.25	135	
4542.1	39.71	H	74	-34.29	Peak	1.35	145	
4542.1	27.32	H	54	-26.68	Avg	1.35	145	
5450.52	41.12	H	74	-32.88	Peak	1.45	155	
5450.52	28.84	H	54	-25.16	Avg	1.45	155	
6358.94								No Emission Detected
6358.94								
7267.36								No Emission Detected
7267.36								
8175.78								No Emission Detected
8175.78								
9084.2								No Emission Detected
9084.2								

**FCC 15.249**

Universal Electronics, Inc.  
 Insignia cTV RF Remote  
 Model: URC-8881BJ0-R

Date: 05/14/2010  
 Labs: B and D  
 Tested By: Kyle Fujimoto

**Y-Axis - Transmit Mode**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.42	89.76	V	94	-4.24	Peak	1	315	
1816.84	47.48	V	74	-26.52	Peak	1.25	90	
1816.84	41.05	V	54	-12.95	Avg	1.25	90	
2725.26	40.24	V	74	-33.76	Peak	1.35	135	
2725.26	27.47	V	54	-26.53	Avg	1.35	135	
3633.68	44.56	V	74	-29.44	Peak	1.25	135	
3633.68	36.76	V	54	-17.24	Avg	1.25	135	
4542.1	39.57	V	74	-34.43	Peak	1.35	155	
4542.1	27.38	V	54	-26.62	Avg	1.35	155	
5450.52	40.97	V	74	-33.03	Peak	1.25	165	
5450.52	28.88	V	54	-25.12	Avg	1.25	165	
6358.94								No Emission Detected
7267.36								No Emission Detected
8175.78								No Emission Detected
9084.2								No Emission Detected

**FCC 15.249**

 Universal Electronics, Inc.  
 Insignia cTV RF Remote  
 Model: URC-8881BJ0-R

 Date: 05/14/2010  
 Labs: B and D  
 Tested By: Kyle Fujimoto

**Y-Axis - Transmit Mode**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.42	83.06	H	94	-10.94	Peak	1	0	
1816.84	42.61	H	74	-31.39	Peak	1.25	155	
1816.84	34.07	H	54	-19.93	Avg	1.25	155	
2725.26	38.03	H	74	-35.97	Peak	1.35	165	
2725.26	26.32	H	54	-27.68	Avg	1.35	165	
3633.68	40.32	H	74	-33.68	Peak	1.25	165	
3633.68	27.35	H	54	-26.65	Avg	1.25	165	
4542.1	38.75	H	74	-35.25	Peak	1.25	175	
4542.1	26.49	H	54	-27.51	Avg	1.25	175	
5450.52	39.09	H	74	-34.91	Peak	1.35	185	
5450.52	27.25	H	54	-26.75	Avg	1.35	185	
6358.94								<b>No Emission Detected</b>
7267.36								<b>No Emission Detected</b>
8175.78								<b>No Emission Detected</b>
9084.2								<b>No Emission Detected</b>

**FCC 15.249**

Universal Electronics, Inc.  
 Insignia cTV RF Remote  
 Model: URC-8881BJ0-R

Date: 05/14/2010  
 Labs: B and D  
 Tested By: Kyle Fujimoto

**Z-Axis - Transmit Mode**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.42	87.56	V	94	-6.44	Peak	1	90	
1816.84	45.07	V	74	-28.93	Peak	1.25	135	
1816.84	38.64	V	54	-15.36	Avg	1.25	135	
2725.26	40.01	V	74	-33.99	Peak	1.35	165	
2725.26	27.35	V	54	-26.65	Avg	1.35	165	
3633.68	42.01	V	74	-31.99	Peak	1.35	165	
3633.68	30.81	V	54	-23.19	Avg	1.35	165	
4542.1	39.87	V	74	-34.13	Peak	1.45	175	
4542.1	27.35	V	54	-26.65	Avg	1.45	175	
5450.52	41.19	V	74	-32.81	Peak	1.35	185	
5450.52	28.84	V	54	-25.16	Avg	1.35	185	
6358.94								No Emission Detected
6358.94								
7267.36								No Emission Detected
7267.36								
8175.78								No Emission Detected
8175.78								
9084.2								No Emission Detected
9084.2								

**FCC 15.249**

 Universal Electronics, Inc.  
 Insignia cTV RF Remote  
 Model: URC-8881BJ0-R

 Date: 05/14/2010  
 Labs: B and D  
 Tested By: Kyle Fujimoto

**Z-Axis - Transmit Mode**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
908.42	88.06	H	94	-5.94	Peak	1	225	
1816.84	46.91	H	74	-27.09	Peak	1.25	135	
1816.84	41.71	H	54	-12.29	Avg	1.25	135	
2725.26	39.41	H	74	-34.59	Peak	1.35	165	
2725.26	27.31	H	54	-26.69	Avg	1.35	165	
3633.68	40.56	H	74	-33.44	Peak	1.25	175	
3633.68	27.82	H	54	-26.18	Avg	1.25	175	
4542.1	38.52	H	74	-35.48	Peak	1.35	185	
4542.1	26.42	H	54	-27.58	Avg	1.35	185	
5450.52	39.88	H	74	-34.12	Peak	1.45	125	
5450.52	27.27	H	54	-26.73	Avg	1.45	125	
6358.94								No Emission Detected
7267.36								No Emission Detected
8175.78								No Emission Detected
9084.2								No Emission Detected



**FCC Class B**

 Universal Electronics, Inc.  
 Insignia cTV RF Remote  
 Model: URC-8881BJ0-R

 Date: 05/14/2010  
 Labs: B and D  
 Tested By: Kyle Fujimoto

**Receiver Mode**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
								No Emissions
								Found for the EUT from
								10 kHz to 9.3 GHz for both
								Vertical and Horizontal
								Polarizations
								For the Receiver Mode
								Tested in the X, Y, and Z-Axis

**FCC 15.249 and FCC Class B**

Universal Electronics, Inc.  
 Insignia cTV RF Remote  
 Model: URC-8881BJ0-R

Date: 05/14/2010  
 Labs: B and D  
 Tested By: Kyle Fujimoto

**Non-Harmonic Emissions From the Transmitter  
 and Digital Portion in Transmit Mode**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
								No Non-Harmonic Emissions Found for the EUT from 10 kHz to 9.3 GHz for both Vertical and Horizontal Polarizations
								No Emissions Found for the EUT from 10 kHz to 9.3 GHz for both Vertical and Horizontal Polarizations
								For the Digital Portion in Transmit Mode
								Tested in the X, Y, and Z-Axis