



CERTIFICATION TEST REPORT

Report Number. : 12672854A Rev 1.1

Applicant : Vista Manufacturing Inc
53345 Columbia Dr
Elkhart, IN, 46514
US

Model : BTFT1

FCC ID : MGOBTFT1

IC : 24881-BTFT1

EUT Description : Flexible light strip consisting of Red-Green-Blue LEDs with an integrated Bluetooth controller.

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date Of Issue:

2019-06-14

Rev 1.1 Issue 2019-07-17

Prepared by:

UL LLC

333 Pfingsten Road
Northbrook, IL 60062 U.S.A.
TEL: (847) 272-8800



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
1.1	2019-07-17	Updated 6dB bandwidth data	BM

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. EUT DESCRIPTION	7
5.2. MAXIMUM OUTPUT POWER	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. SOFTWARE AND FIRMWARE	7
5.5. WORST-CASE CONFIGURATION AND MODE	7
5.6. DESCRIPTION OF TEST SETUP	8
6. MEASUREMENT METHOD	9
7. TEST AND MEASUREMENT EQUIPMENT	10
8. ANTENNA PORT TEST RESULTS	11
8.1. ON TIME AND DUTY CYCLE	11
8.2. 99% BANDWIDTH	14
8.2.1. BLE (1Mbps)	15
8.3. 6 dB BANDWIDTH	16
8.3.1. BLE (1Mbps)	16
8.4. OUTPUT POWER	17
8.4.1. BLE (1Mbps)	18
8.5. POWER SPECTRAL DENSITY	19
8.5.1. BLE (1Mbps)	20
8.6. CONDUCTED SPURIOUS EMISSIONS	21
8.6.1. BLE (1Mbps)	22
9. RADIATED TEST RESULTS	26
9.1. LIMITS AND PROCEDURE	26
9.2. Outdoor to 10m SAC Correlation Data	27
9.3. TRANSMITTER SPURIOUS 9kHz – 30MHz	28
9.3.1. WORST CASE EMISSIONS BELOW 30MHz	28
9.4. TRANSMITTER SPURIOUS 30MHz – 1GHz	30
9.4.1. SPURIOUS EMISSIONS	30
9.5. TRANSMITTER ABOVE 1 GHz	42
9.5.1. BANDEDGE	42
9.5.2. SPURIOUS EMISSIONS	50
10. AC POWER LINE CONDUCTED EMISSIONS	62
10.1.1. AC Power Line Host	63
11. SETUP PHOTOS	69

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Vista Manufacturing Inc
53345 Columbia Dr
Elkhart, IN, 46514, USA

EUT DESCRIPTION: Flexible light strip consisting of Red-Green-Blue LEDs with an integrated Bluetooth controller.

MODEL: BTFT1

SERIAL NUMBER: Sample #20 for Radiated and Line Conducted Emissions
Sample #22 for Antenna Port Measurements

DATE TESTED: 2019-05-29, 2019-05-30, 2019-07-17

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By: Jeff Moser



Operations Leader
Consumer Technology Division

Prepared By: Bart Mucha



Staff Engineer
Consumer Technology Division

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, RSS-GEN Issue 5, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 333 Pfingsten Road, Northbrook, Illinois, USA.

333 Pfingsten Road ISED Site Code: 2180A-1	
☒	Chamber 10m

UL NBK is accredited by NVLAP, Laboratory Code 100414-0

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
 $36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

Flexible light strip consisting of Red-Green-Blue LEDs with an integrated Bluetooth controller

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	-1.53	0.70

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PCB trace antenna, with a maximum gain of 2.1dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was "8266_12M_emi_test_internal_cap.bin"

The test utility software used during testing was "EMI_TEST_v1.4"

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 30MHz were conducted in single axis.

Radiated Emissions above 30MHz, including Band Edge were conducted in two axis, on low middle and high channels.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Power Supply	Cosmos	LFZVC90NS12E	1510	


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Power	1	wire	2-wire	1m	DC Power
2	I/O	1	wire	3-wire	1m	Programming port, used for testing only

TEST SETUP

The test software set the EUT's transceiver's mode, transmit power, modulation, and frequency as needed for each test. For radiated tests the test laptop was connected to the EUT before each test and removed during the test measurements. For antenna port test the test laptop was left connected to the EUT during the tests.

SETUP DIAGRAMS

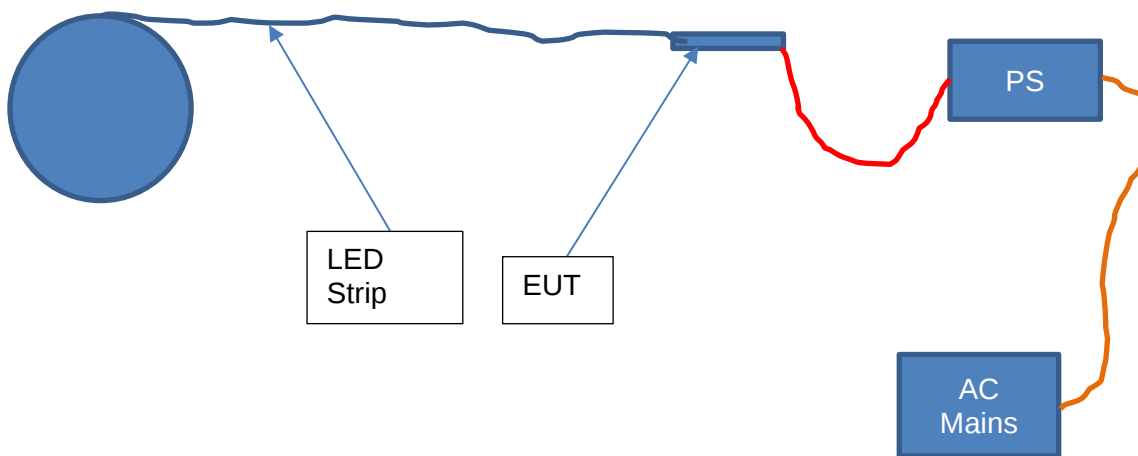

6. MEASUREMENT METHOD

6 dB BW: ANSI C63.10 Subclause -11.8.2 $RBW \leq DTS \text{ BW}$

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Subclause -11.9.1.1 $RBW \geq DTS \text{ bandwidth}$

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Subclause -11.11 and 6.10.4

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 and 6.10.5

Conducted emissions in restricted frequency bands: ANSI C63.10 Subclause -11.12.2

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Software List			
Description	Manufacturer	Model	Version
Radiated @ Conducted Software	UL	UL EMC	9.5

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC4328	2018-12-26	2019-12-31
Bicon Antenna	Chase	VBA6106A	EMC4078	2019-04-05	2020-04-30
Log-P Antenna	Chase	UPA6109	EMC4313	2019-04-05	2020-04-30
Loop Antenna	EMCO	6502/1	EMC4026	2019-01-07	2020-01-31
Antenna Array	UL	BOMS	EMC4276	2018-06-19	2019-06-30
EMI Test Receiver	Rohde & Schwarz	ESU	EMC4323	2018-12-13	2019-12-31
EMI Test Receiver	Rohde & Schwarz	ESR	EMC4377	2018-12-26	2019-12-31
Transient Limiter	Electro-Metrics	EM7600-2	EMC4224	N/A	N/A
High-Pass Filter	Solar Electronics	2803-150	EMC4327	N/A	N/A
Attenuator	HP	8494B	2831A00838	N/A	N/A
LISN - L1	Solar Electronics	8602-50-TS-50-N	EMC4066	2018-12-19	2019-12-31
LISN - L2	Solar Electronics	8602-50-TS-50-N	EMC4064	2018-12-19	2019-12-31

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS


Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
BLE	100.000	100.000	1.000	100.00%	0.00	0.010

DUTY CYCLE PLOTS

100mS Sweep

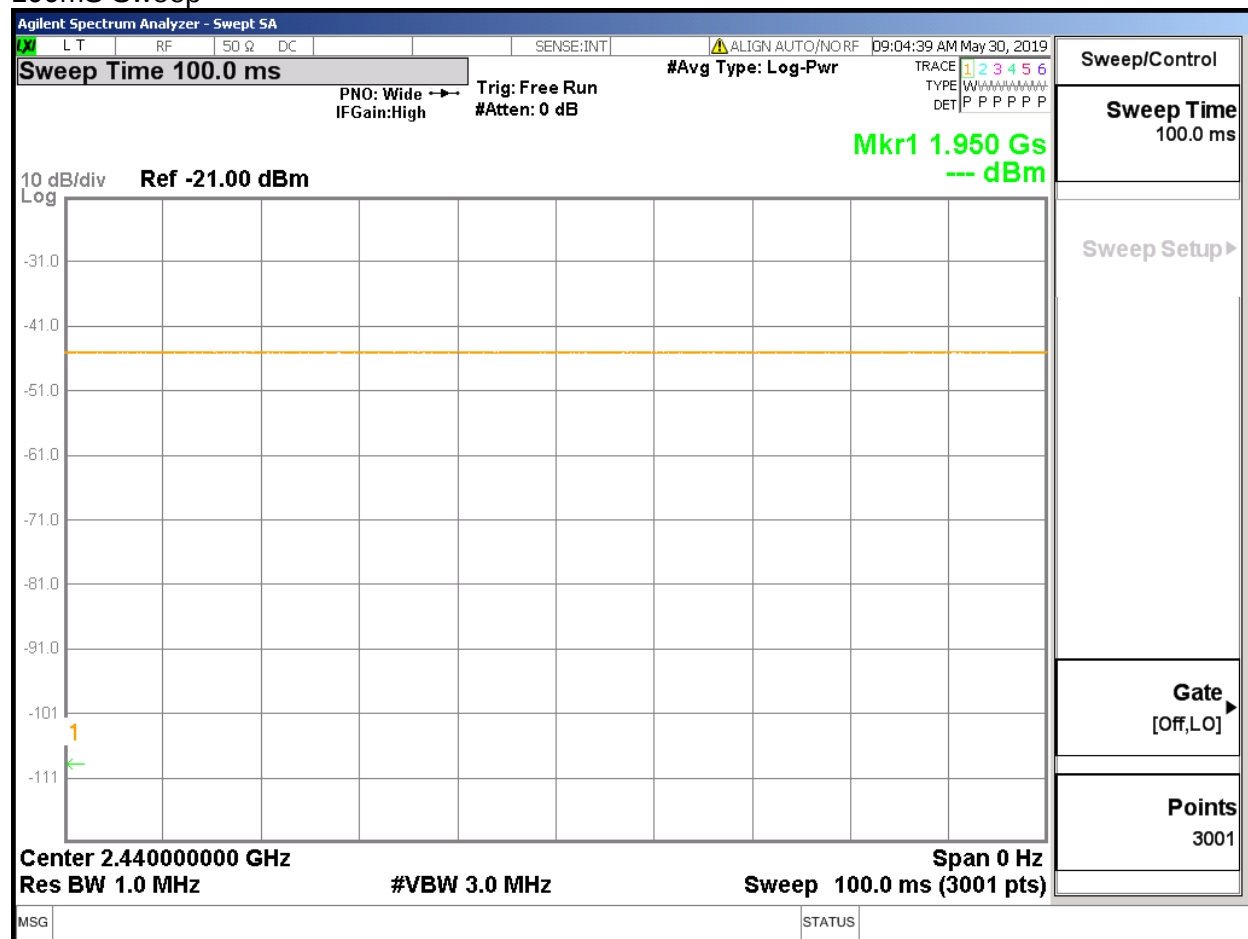

1000mS Sweep

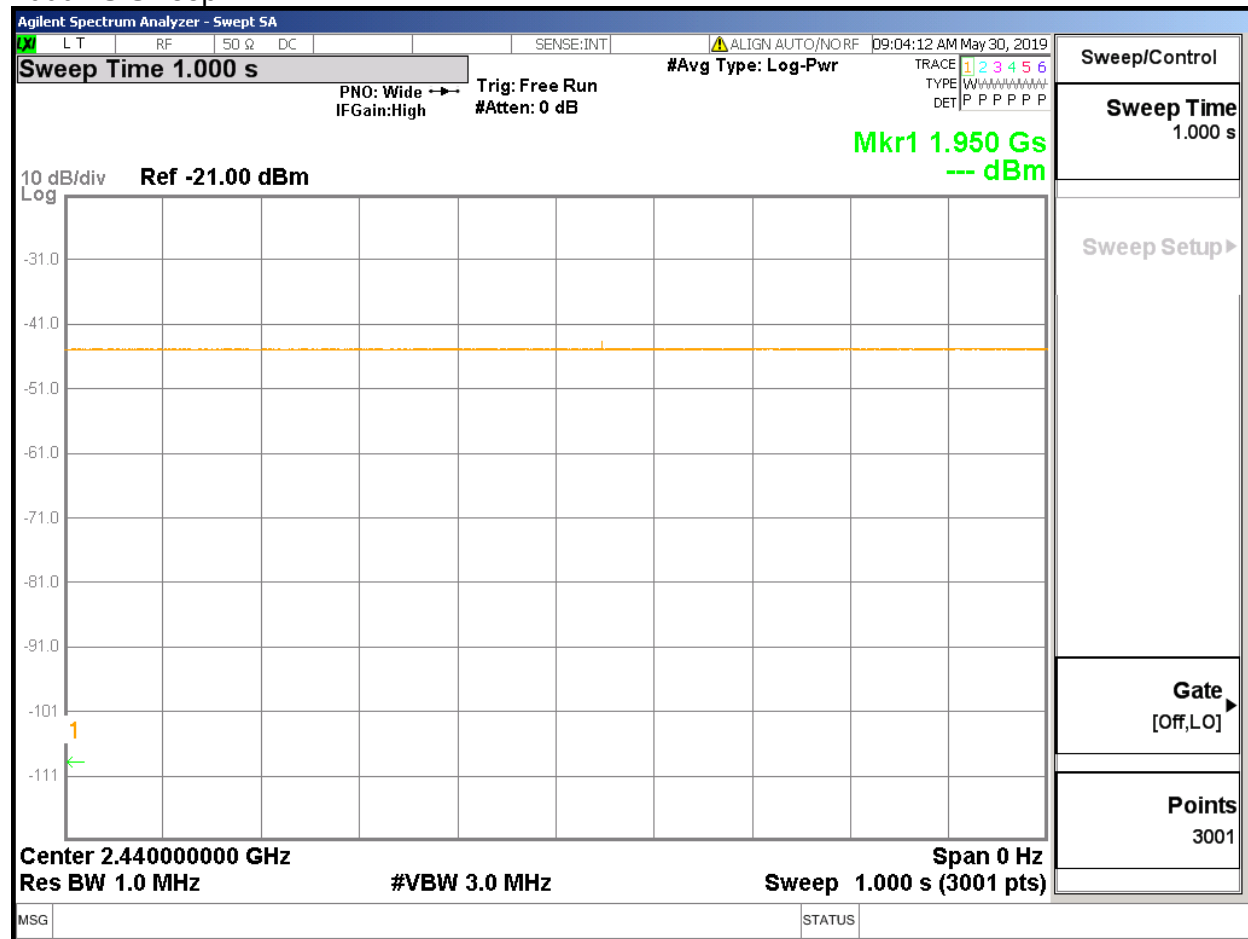

8.2. 99% BANDWIDTH




LIMITS

None; for reporting purposes only.

RESULTS

8.2.1. BLE (1Mbps)

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0342
Middle	2440	1.0400
High	2480	1.0343

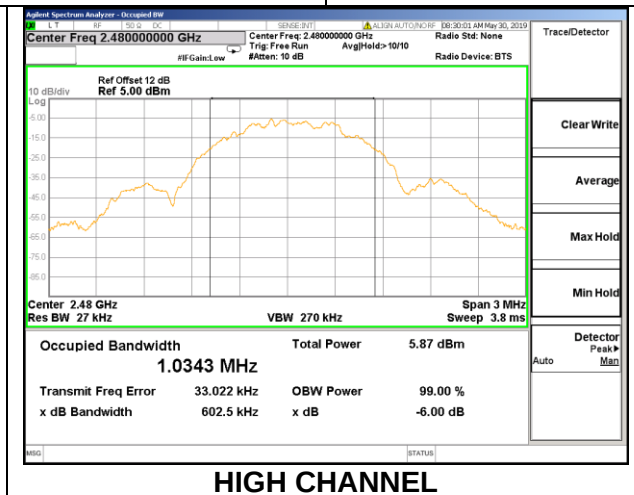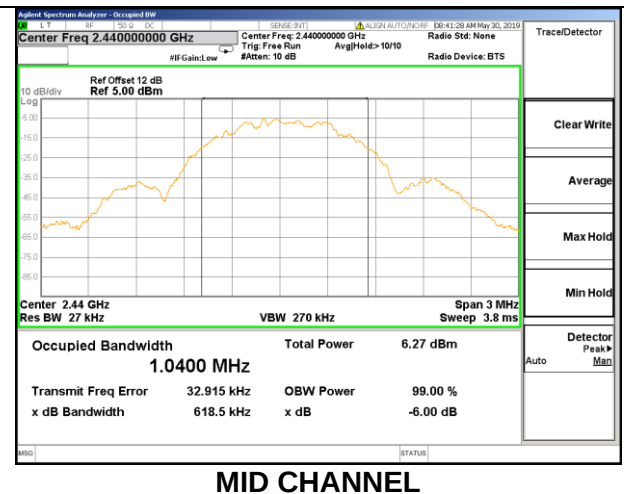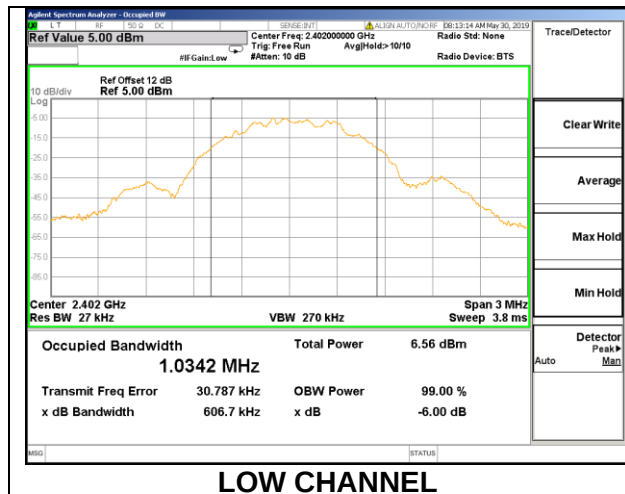

8.3. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

8.3.1. BLE (1Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.6846	0.5
Middle	2440	0.6889	0.5
High	2480	0.6778	0.5



8.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.


The cable assembly insertion loss of 12dB (including 10.5 dB pad with cable and 1.5dB for cable attached to EUT) was entered as an offset in the power meter to allow for a gated peak reading of power.

RESULTS


8.4.1. BLE (1Mbps)

Tested By:	BM06740
Date:	5/30/2019


Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-1.530	30	-31.530
Middle	2440	-1.664	30	-31.664
High	2480	-2.104	30	-32.104

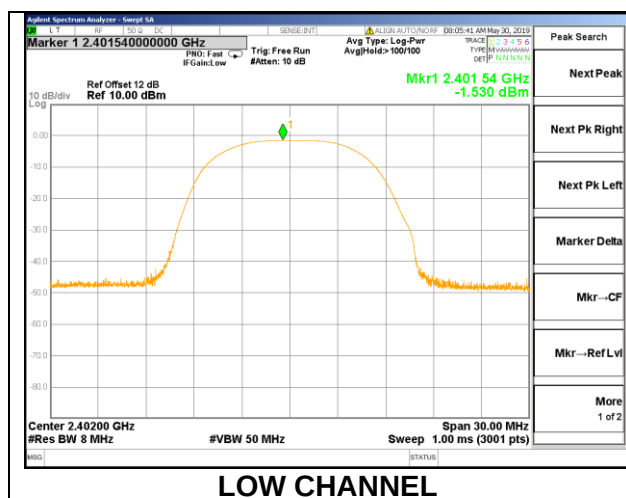

LOW CHANNEL

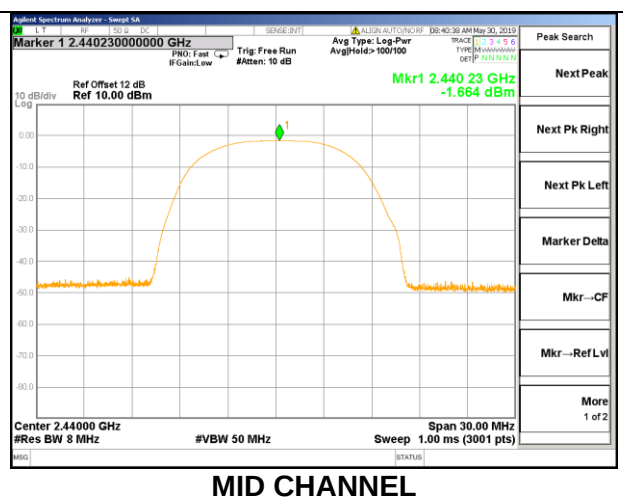

MID CHANNEL

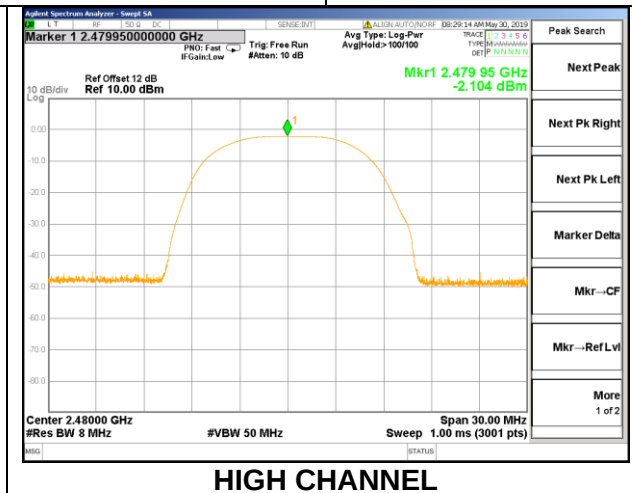

HIGH CHANNEL

8.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)




RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

8.5.1. BLE (1Mbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-13.120	8	-21.12
Middle	2440	-13.857	8	-21.86
High	2480	-13.818	8	-21.82

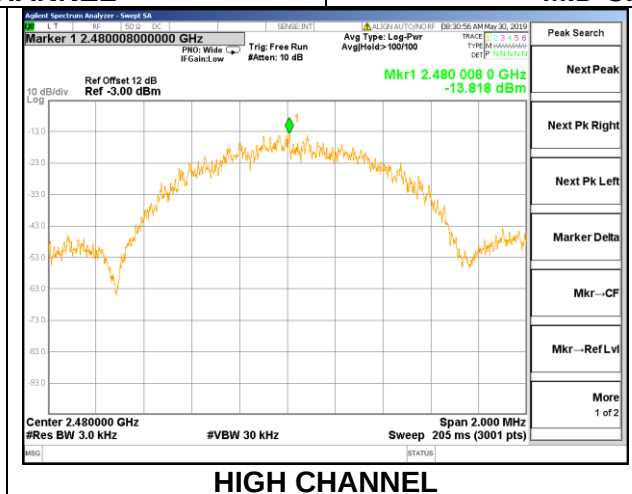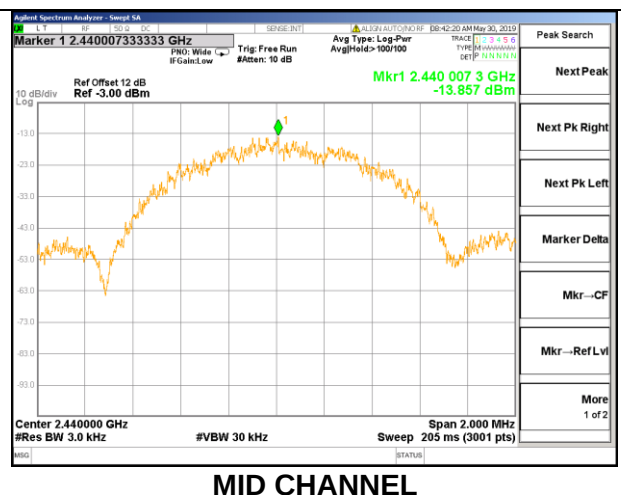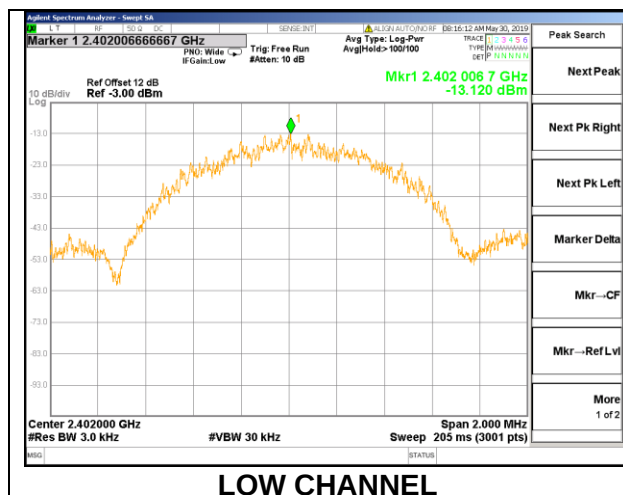

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)


RSS-247 5.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

RESULTS


8.6.1. BLE (1Mbps)

Conducted Bandedge Data

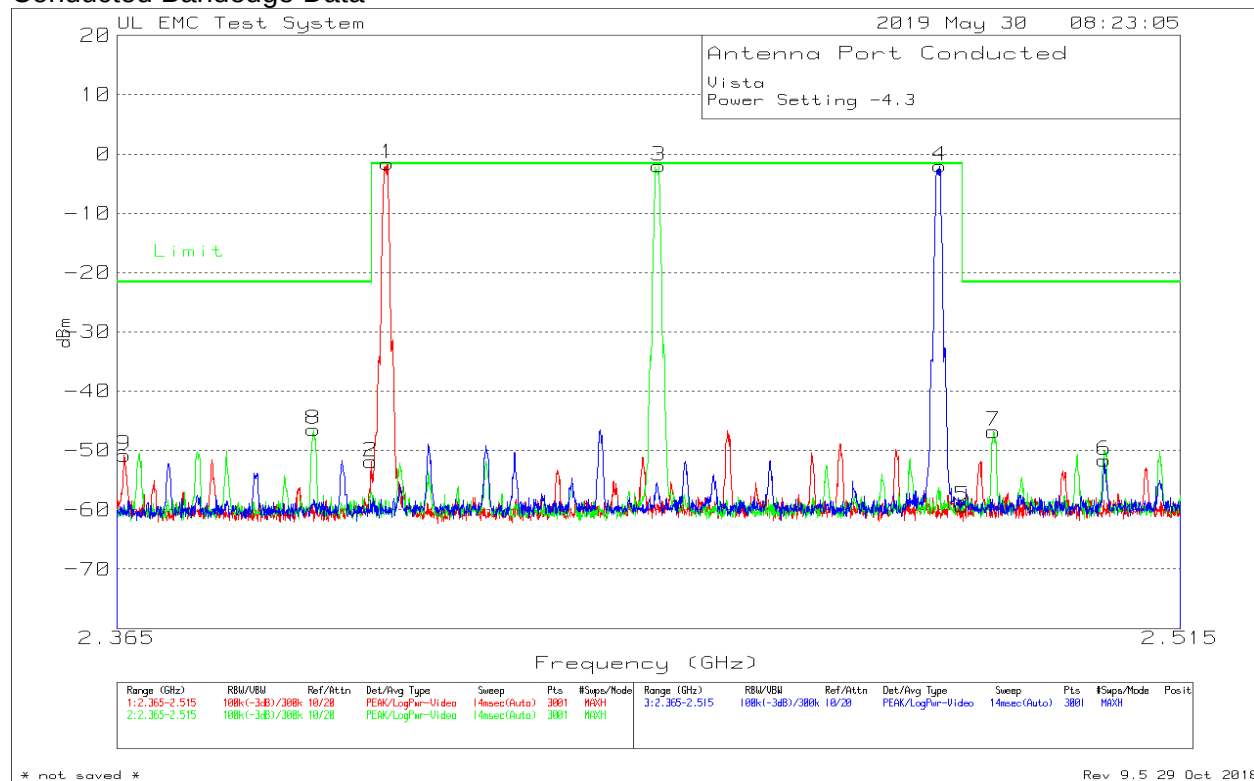


Vista								
Power Setting -4.3								
Trace MARKers								
Marker No.	Test Frequency (GHz)	Meter Reading (dBm)	Detector	Path Factor dB	Patch Cable dB	Level dBm	Limit dBm	Margin (dB)
Low Channel								
1	2.4023	-13.61	Pk	10.5	1.5	-1.61	-1.61	0
2	2.4	-63.86	Pk	10.5	1.5	-51.86	-21.61	-30.25
9	2.366	-62.78	Pk	10.5	1.5	-50.78	-21.61	-29.17
Middle Channel								
3	2.4403	-14	Pk	10.5	1.5	-2	-1.61	-0.39
7	2.488	-58.87	Pk	10.6	1.5	-46.77	-21.61	-25.16
8	2.3921	-58.46	Pk	10.5	1.5	-46.46	-21.61	-24.85
High Channel								
4	2.4803	-14.1	Pk	10.6	1.5	-2	-1.61	-0.39
5	2.4835	-71.46	Pk	10.6	1.5	-59.36	-21.61	-37.75
6	2.504	-63.73	Pk	10.6	1.5	-51.63	-21.61	-30.02
Pk - Peak detector								

Conducted Spurious Emissions Low Channel

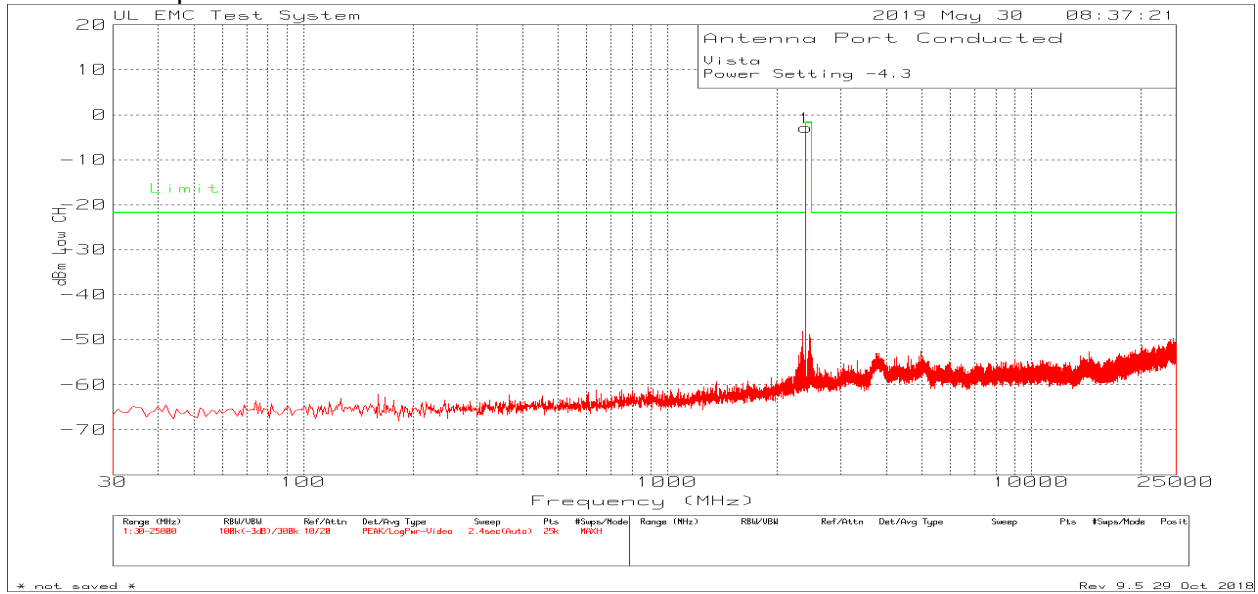


No spurious emissions detected

Conducted Spurious Emissions Middle Channel

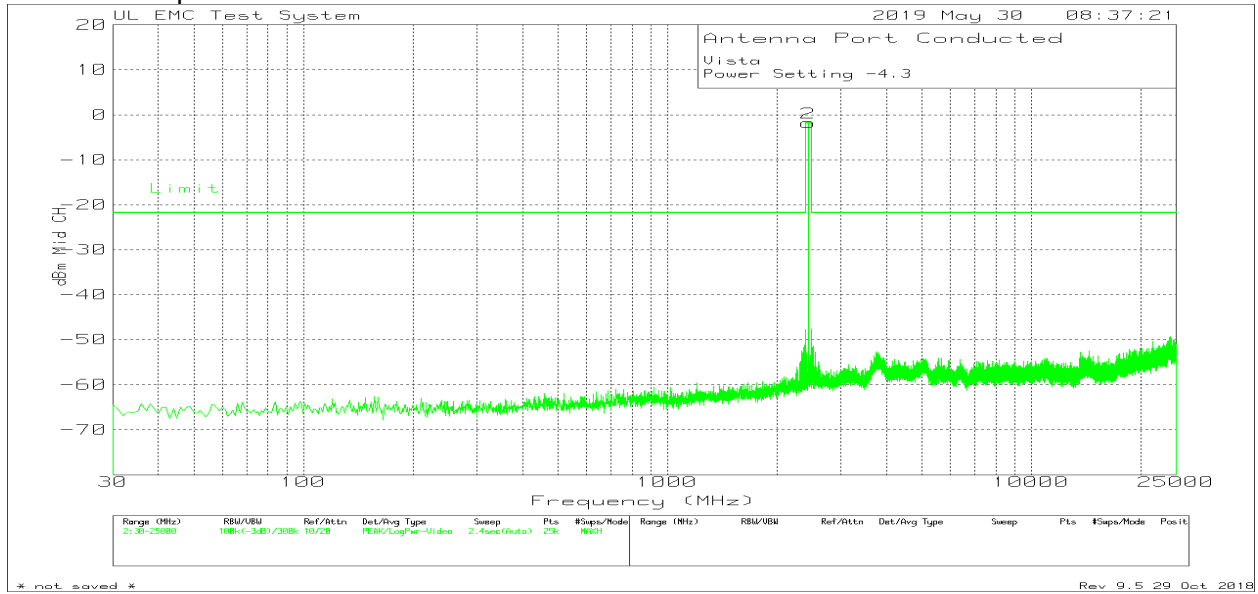

No Spurious Emissions Detected

Conducted Spurious Emissions High Channel

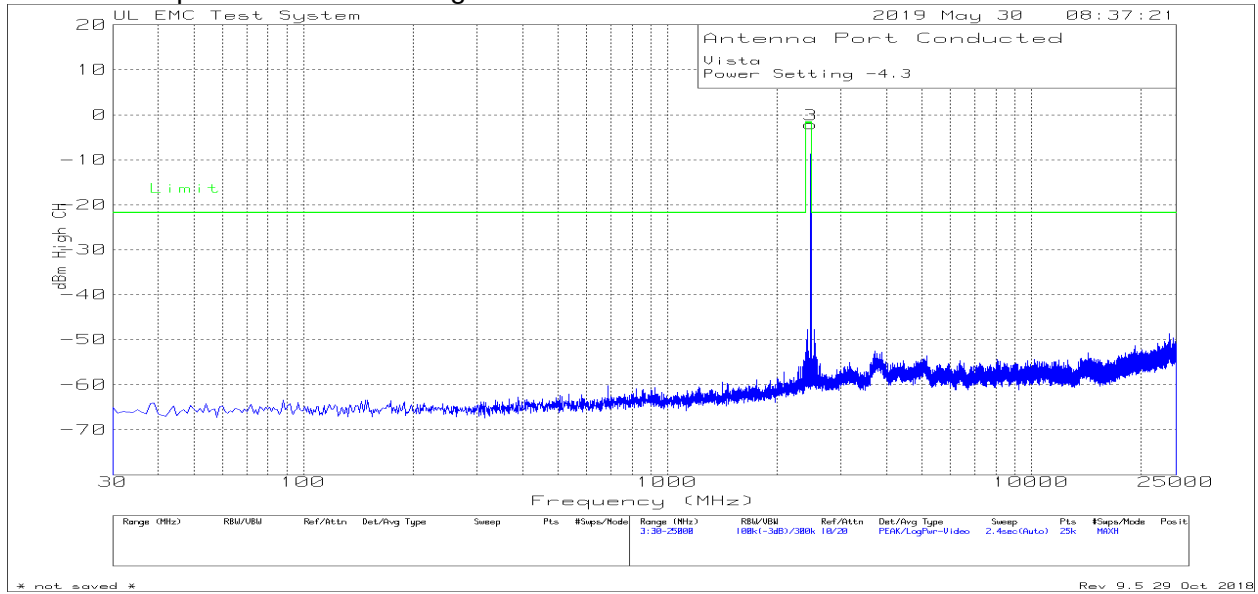

No Spurious Emissions Detected

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. Below 30MHz and above 1GHz the antenna to EUT distance is 3 meters. Between 30MHz-1GHz the antenna to EUT distance is 10 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements and 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 30 MHz the middle channel was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel).

9.2. Outdoor to 10m SAC Correlation Data

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.



Correlation Data for measurements 9kHz-30MHz between Outside and 10m semi-anechoic chamber at Underwriter Laboratories in Northbrook, IL.

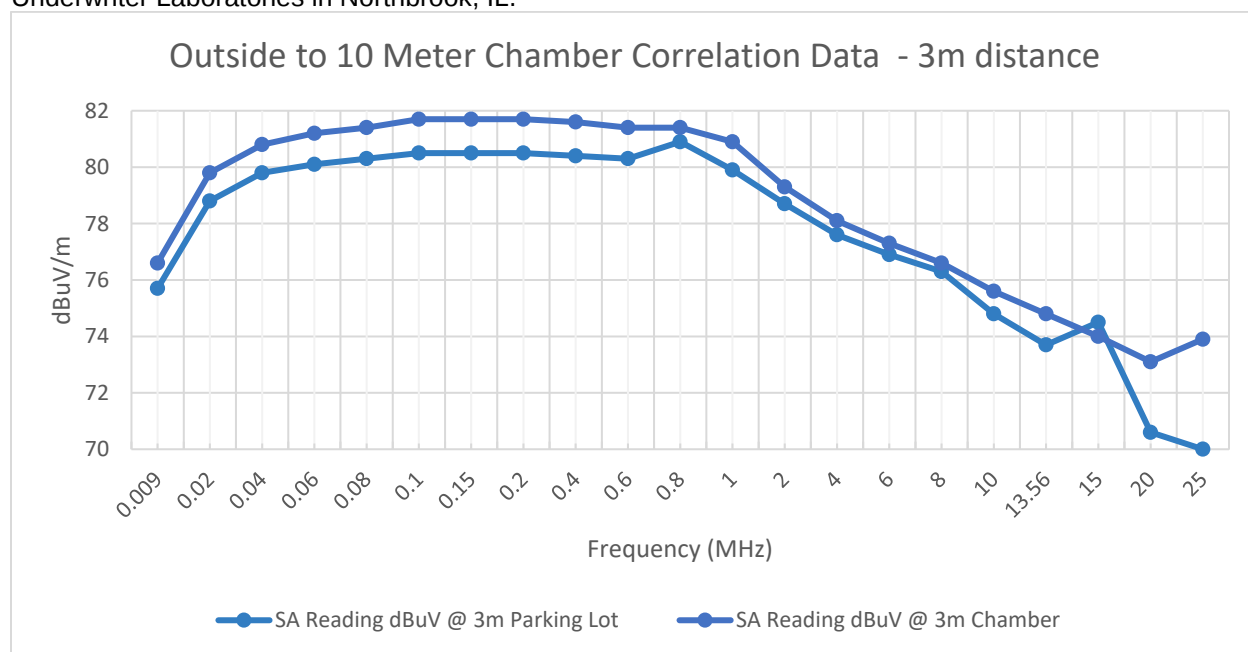


Correlation measurements were conducted using a signal source with an antenna outside in open area (parking lot). Immediately following the measurements the same setup was moved inside the 10 meter semi-anechoic chamber and the measurements were repeated. The above plot shows the difference in levels measured between outside and the 10 meter semi anechoic chamber. Measurements are required per KDB414788.

9.3. TRANSMITTER SPURIOUS 9kHz – 30MHz

9.3.1. WORST CASE EMISSIONS BELOW 30MHz

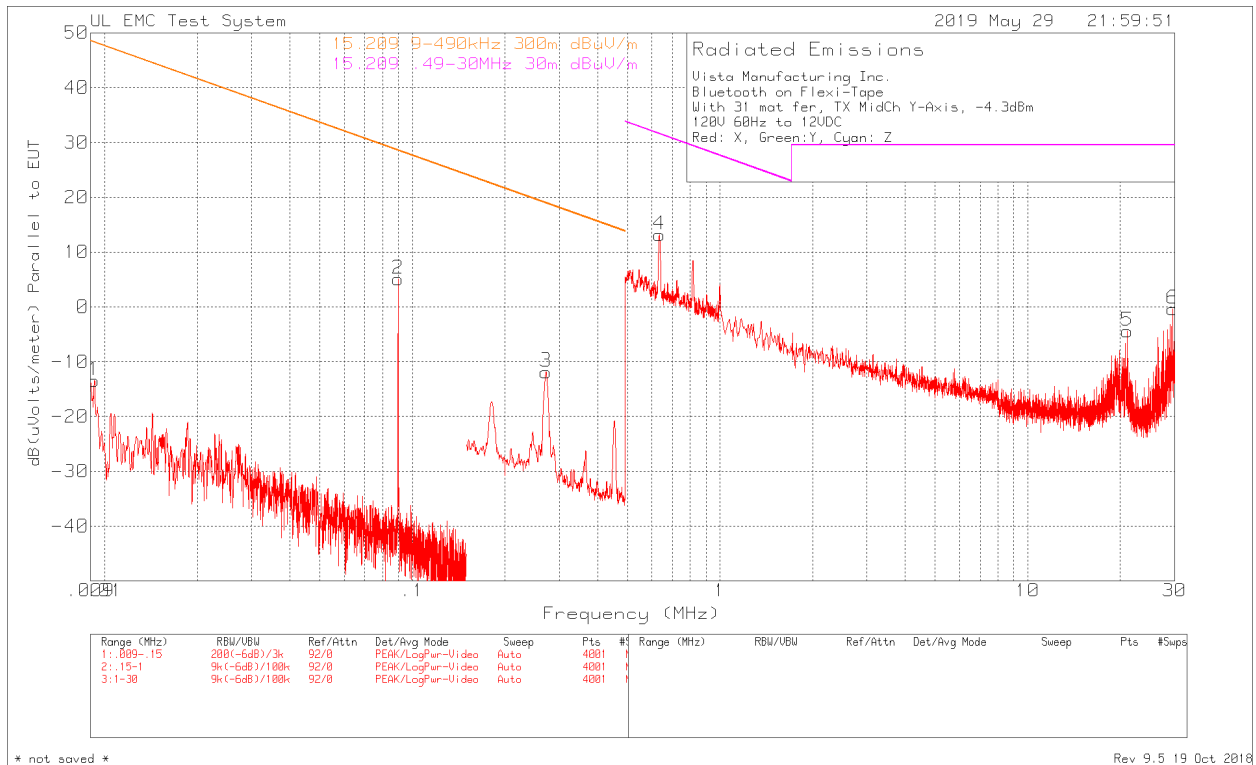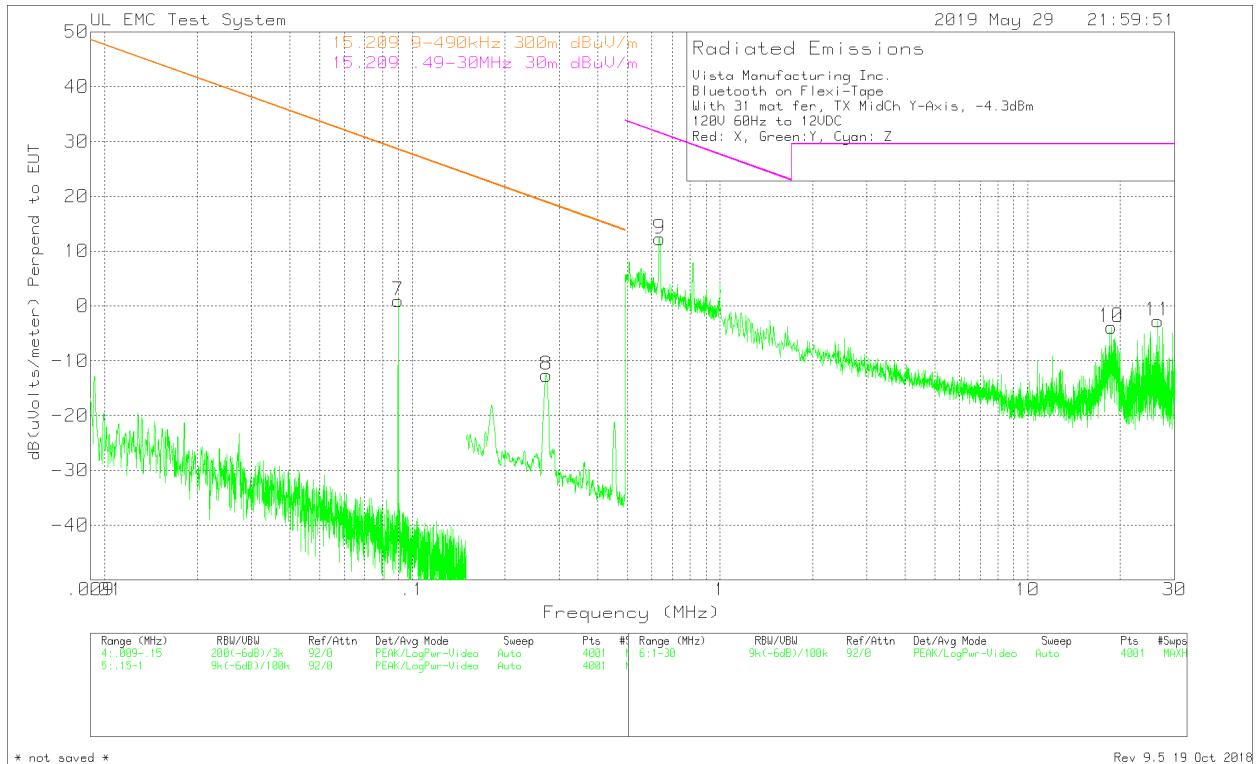

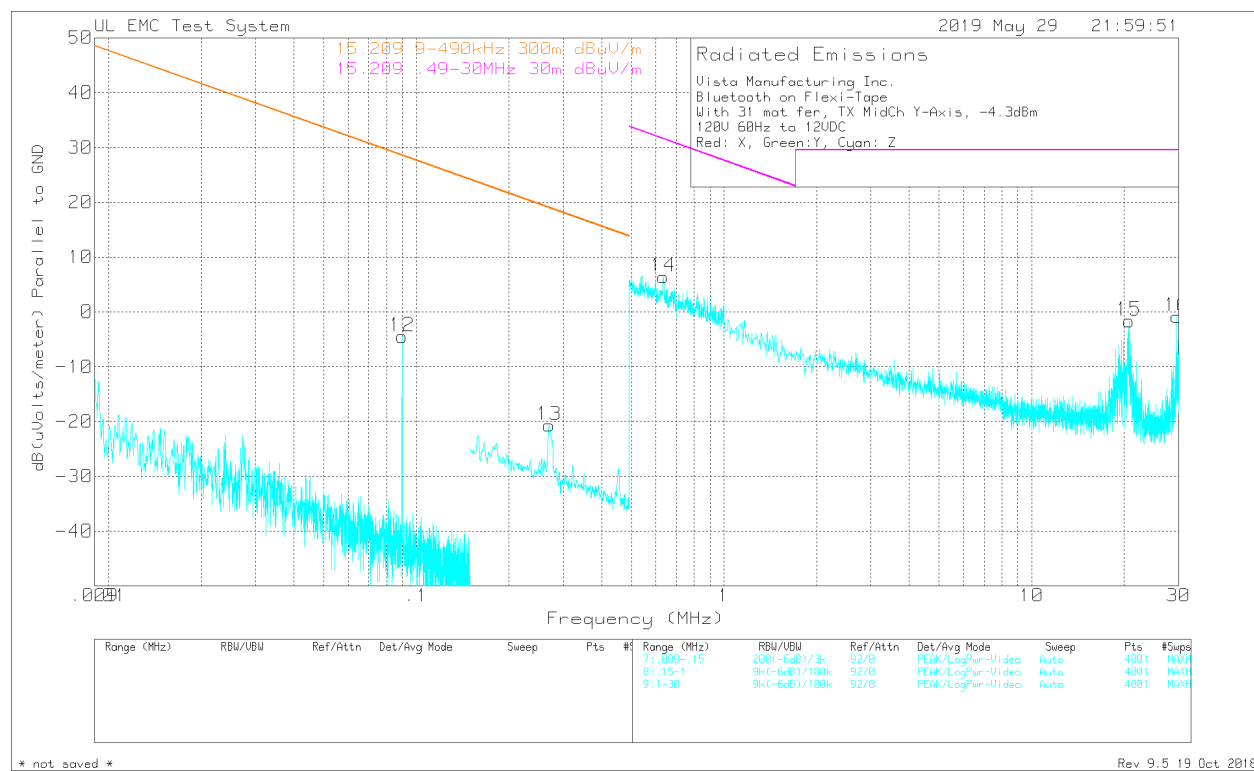


Trace Markers															
Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Loop EField Antenna Factor dB/m	3mPath Red Cable dB	300mTo3 m & 30mTo3m dB	Corrected Reading dB (uVolts/meter)	15.209 9-490kHz 300m dBuV/m	Margin (dB)	15.209 .49-30MHz 30m dBuV/m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity	
Parallel to EUT															
1	0.009245	42.89	Pk	23.7	0	-80	-13.41	48.28	-61.69	-	-	0-360	101	H	
2	0.08992	72.27	Pk	12.8	0	-80	5.07	28.52	-23.45	-	-	0-360	101	H	
3	0.27184	56.25	Pk	11.8	0.1	-80	-11.85	18.92	-30.77	-	-	0-360	101	H	
4	0.63543	41.08	Pk	12	0.1	-40	13.18	-	-	31.54	-18.36	0-360	101	H	
5	21.06075	24.7	Pk	10.4	0.5	-40	-4.4	-	-	29.54	-33.94	0-360	101	H	
6	29.63025	29.69	Pk	9.4	0.5	-40	-0.41	-	-	29.54	-29.95	0-360	101	H	
Perpendicular to EUT															
7	0.08992	68.12	Pk	12.8	0	-80	0.92	28.52	-27.6	-	-	0-360	101	H	
8	0.27269	55.46	Pk	11.8	0.1	-80	-12.64	18.89	-31.53	-	-	0-360	101	H	
9	0.63628	40.18	Pk	12	0.1	-40	12.28	-	-	31.53	-19.25	0-360	101	H	
10	18.69725	24.83	Pk	10.9	0.4	-40	-3.87	-	-	29.54	-33.41	0-360	101	H	
11	26.46925	27.07	Pk	9.7	0.5	-40	-2.73	-	-	29.54	-32.27	0-360	101	H	
Parallel to Ground															
12	0.08992	62.73	Pk	12.8	0	-80	-4.47	28.52	-32.99	-	-	0-360	101	H	
13	0.27013	47.39	Pk	11.8	0.1	-80	-20.71	18.97	-39.68	-	-	0-360	101	H	
14	0.63479	34.33	Pk	12	0.1	-40	6.43	-	-	31.55	-25.12	0-360	101	H	
15	20.7055	27.37	Pk	10.5	0.5	-40	-1.63	-	-	29.54	-31.17	0-360	101	H	
16	29.63025	29.27	Pk	9.4	0.5	-40	-0.83	-	-	29.54	-30.37	0-360	101	H	
Pk - Peak detector															

9.4. TRANSMITTER SPURIOUS 30MHz – 1GHz


9.4.1. SPURIOUS EMISSIONS

LOW CHANNEL RESULTS X-Axis

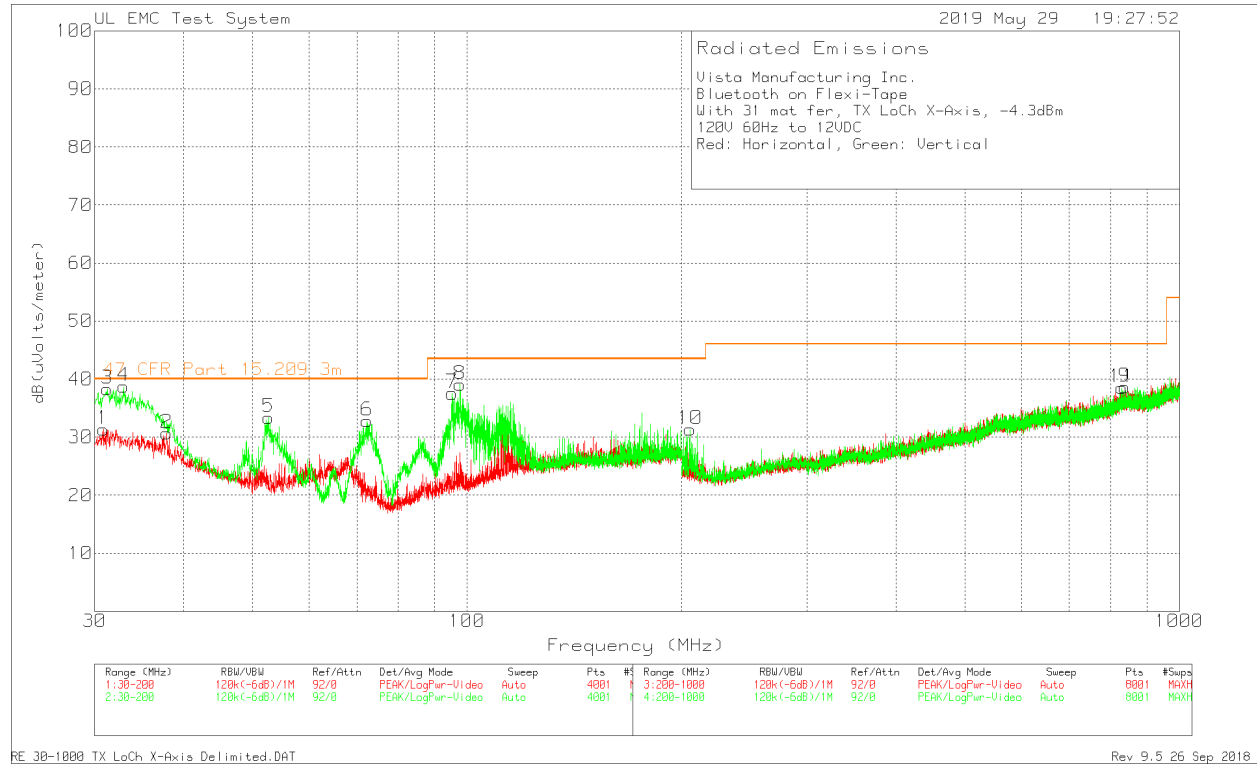


Vista Manufacturing Inc.												
Bluetooth on Flexi-Tape												
With 31 mat fer, TX LoCh X-Axis, -4.3dBm												
120V 60Hz to 12VDC												
Red: Horizontal, Green: Vertical												
Trace Markers												
Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	30.85	33.16	Pk	17.8	-30.1	10.5	31.36	40	-8.64	0-360	249	H
2	37.8625	35.18	Pk	15	-30	10.5	30.68	40	-9.32	0-360	399	H
3	31.2325	40.32	Pk	17.6	-30.1	10.5	38.32	40	-1.68	0-360	101	V
4	32.9325	41.45	Pk	16.9	-30.1	10.5	38.75	40	-1.25	0-360	101	V
5	52.61	43.69	Pk	9.2	-30	10.5	33.39	40	-6.61	0-360	101	V
6	72.3725	46.08	Pk	6.2	-30	10.5	32.78	40	-7.22	0-360	251	V
7	95.28	46.88	Pk	10	-29.8	10.5	37.58	43.52	-5.94	0-360	101	V
8	97.745	48.21	Pk	10.3	-29.9	10.5	39.11	43.52	-4.41	0-360	101	V
9	837.9	32.21	Pk	23.2	-27.3	10.5	38.61	46.02	-7.41	0-360	399	H
10	205.6	38.85	Pk	11.3	-29.3	10.5	31.35	43.52	-12.17	0-360	102	V
11	830.5	32.42	Pk	23.1	-27.5	10.5	38.52	46.02	-7.5	0-360	302	V
Radiated Emission Data												
	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
	31.2325	37.62	Qp	17.6	-30.1	10.5	35.62	40	-4.38	229	105	V
	32.9325	37.46	Qp	16.9	-30.1	10.5	34.76	40	-5.24	232	105	V
	97.745	38.49	Qp	10.3	-29.9	10.5	29.39	43.52	-14.13	0	101	V
Pk - Peak detector												
Qp - Quasi-Peak detector												

LOW CHANNEL RESULTS Y-Axis

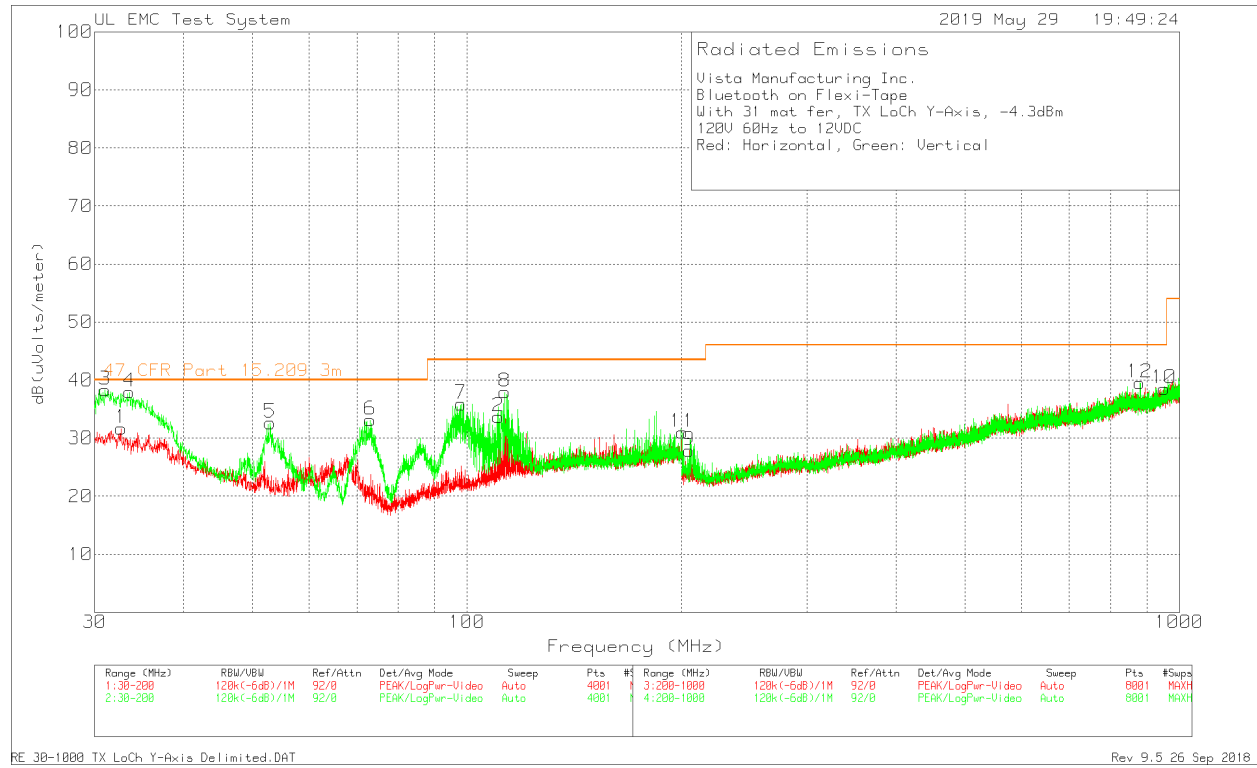


Vista Manufacturing Inc.												
Bluetooth on Flexi-Tape												
With 31 mat fer, TX LoCh Y-Axis, -4.3dBm												
120V 60Hz to 12VDC												
Red: Horizontal, Green: Vertical												
Trace Markers												
Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Degr]	Height [cm]	Polarity
1	32.6775	34.27	Pk	17	-30.1	10.5	31.67	40	-8.33	0-360	398	H
2	110.6225	40.67	Pk	12.3	-29.8	10.5	33.67	43.52	-9.85	0-360	398	H
3	31.02	40.22	Pk	17.7	-30.1	10.5	38.32	40	-1.68	0-360	101	V
4	33.57	40.86	Pk	16.7	-30.1	10.5	37.96	40	-2.04	0-360	101	V
5	52.9075	43.15	Pk	9	-30	10.5	32.65	40	-7.35	0-360	101	V
6	73.095	46.34	Pk	6.3	-30	10.5	33.14	40	-6.86	0-360	398	V
7	98	44.9	Pk	10.4	-29.9	10.5	35.9	43.52	-7.62	0-360	101	V
8	112.96	44.74	Pk	12.5	-29.8	10.5	37.94	43.52	-5.58	0-360	251	V
9	205	35.4	Pk	11.3	-29.3	10.5	27.9	43.52	-15.62	0-360	399	H
10	951.8	30.91	Pk	23.9	-26.8	10.5	38.51	46.02	-7.51	0-360	399	H
11	200.6	38.39	Pk	11.5	-29.4	10.5	30.99	43.52	-12.53	0-360	99	V
12	879.7	33.36	Pk	23	-27.3	10.5	39.56	46.02	-6.46	0-360	99	V
Radiated Emission Data												
	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Degr]	Height [cm]	Polarity
	31.6825	37.79	Qp	17.4	-30.1	10.5	35.59	40	-4.41	271	101	V
	32.9325	37.46	Qp	16.9	-30.1	10.5	34.76	40	-5.24	232	105	V
	97.745	38.49	Qp	10.3	-29.9	10.5	29.39	43.52	-14.13	0	101	V
Pk - Peak detector												
Qp - Quasi-Peak detector												

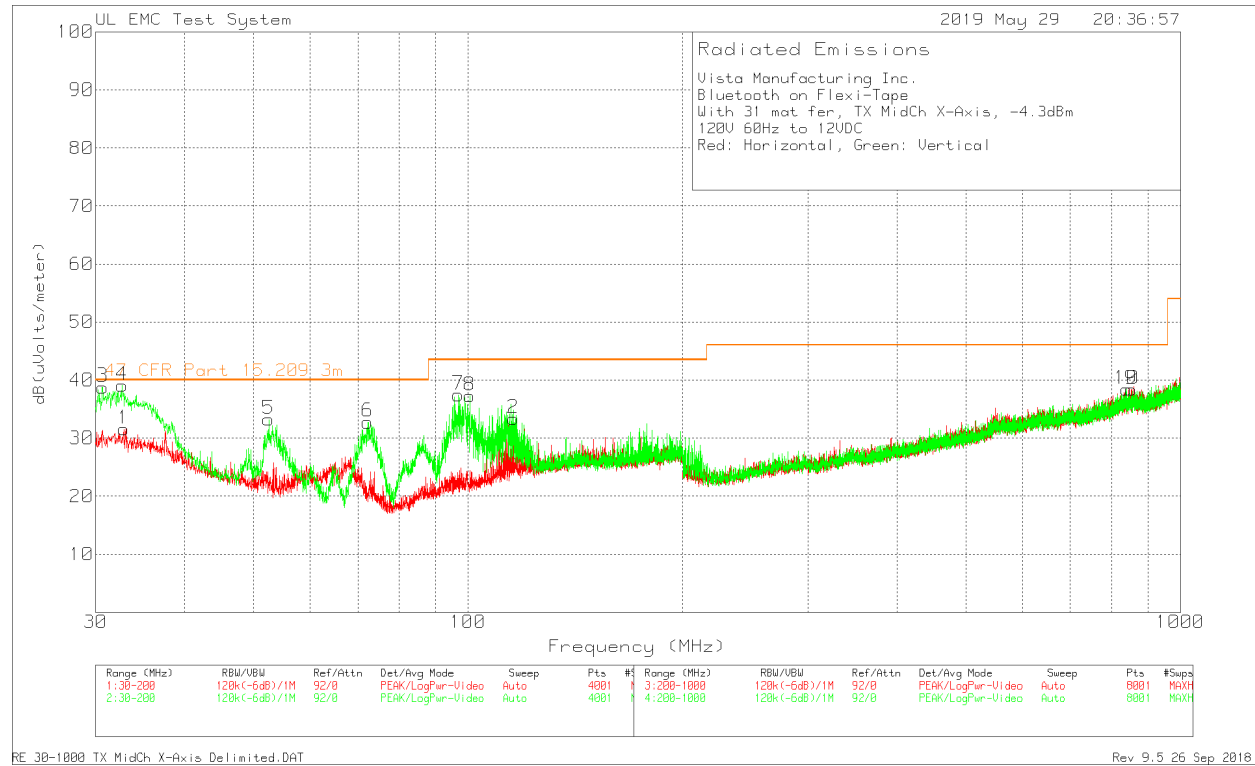


Vista Manufacturing Inc.												
Bluetooth on Flex-i-Tape												
With 31 mat fer, TX MidCh X-Axis, -4.3dBm												
120V 60Hz to 12VDC												
Red: Horizontal, Green: Vertical												
Trace Markers												
Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	32.8475	34.14	Pk	17	-30.1	10.5	31.54	40	-8.46	0-360	399	H
2	115.765	39.78	Pk	12.9	-29.8	10.5	33.38	43.52	-10.14	0-360	399	H
3	30.68	40.59	Pk	17.8	-30.1	10.5	38.79	40	-1.21	0-360	101	V
4	32.6775	41.71	Pk	17	-30.1	10.5	39.11	40	-0.89	0-360	101	V
5	52.4825	43.52	Pk	9.2	-30	10.5	33.22	40	-6.78	0-360	251	V
6	72.245	46.07	Pk	6.2	-30	10.5	32.77	40	-7.23	0-360	399	V
7	96.8525	46.66	Pk	10.2	-29.9	10.5	37.46	43.52	-6.06	0-360	101	V
8	100.55	45.9	Pk	10.8	-29.9	10.5	37.3	43.52	-6.22	0-360	101	V
9	852.7	31.91	Pk	23.2	-27.2	10.5	38.41	46.02	-7.61	0-360	199	H
10	840.1	32.14	Pk	23.2	-27.4	10.5	38.44	46.02	-7.58	0-360	202	V
Radiated Emission Data												
	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
	32.6775	36.96	Qp	17	-30.1	10.5	34.36	40	-5.64	251	101	V
	30.68	36.67	Qp	17.8	-30.1	10.5	34.87	40	-5.13	245	101	V
	97.745	38.49	Qp	10.3	-29.9	10.5	29.39	43.52	-14.13	0	101	V
Pk - Peak detector												
Qp - Quasi-Peak detector												

MIDDLE CHANNEL RESULTS Y-Axis

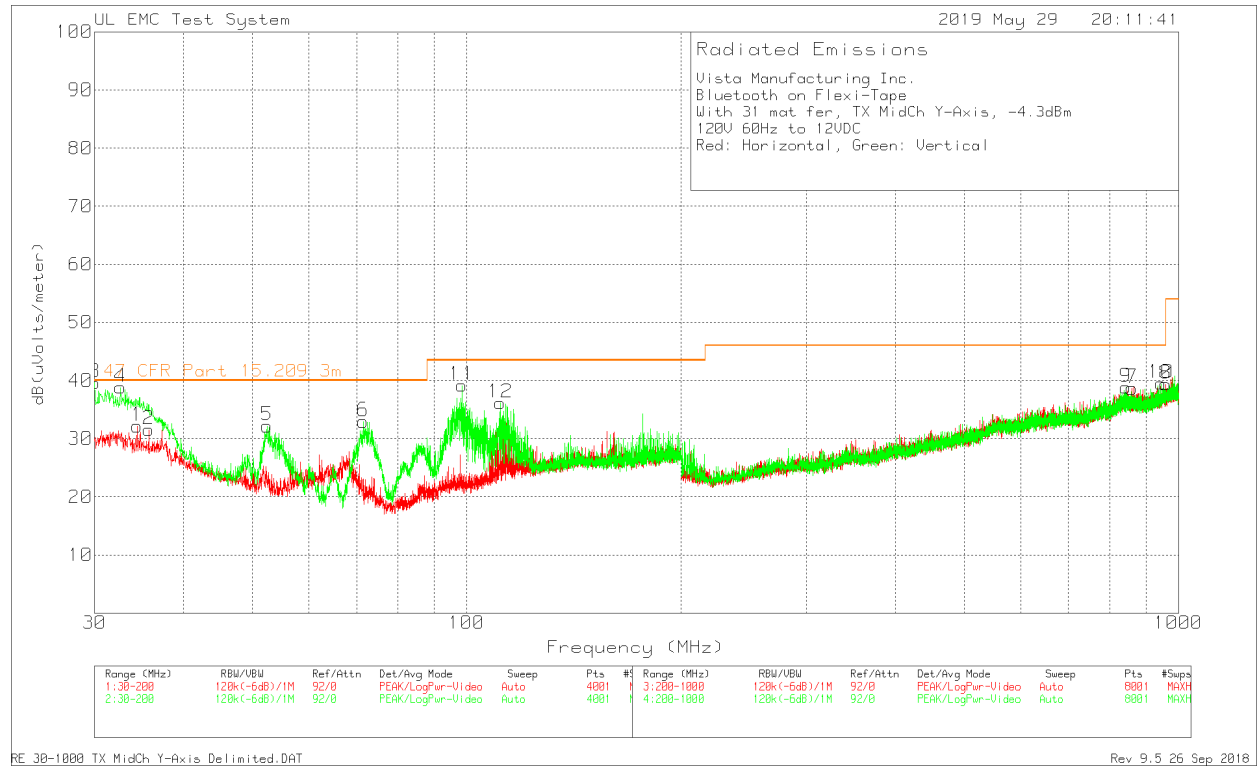


Vista Manufacturing Inc.												
Bluetooth on Flex-i-Tape												
With 31 mat fer, TX MidCh Y-Axis, -4.3dBm												
120V 60Hz to 12VDC												
Red: Horizontal, Green: Vertical												
Trace Markers												
Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Deps]	Height [cm]	Polarity
1	34.42	35.3	Pk	16.4	-30	10.5	32.2	40	-7.8	0-360	398	H
2	35.7375	35.17	Pk	15.9	-30	10.5	31.57	40	-8.43	0-360	398	H
3	30	41.16	Pk	18.1	-30.1	10.5	39.66	40	-0.34	0-360	101	V
4	32.635	41.43	Pk	17	-30.1	10.5	38.83	40	-1.17	0-360	101	V
5	52.3975	42.51	Pk	9.2	-30	10.5	32.21	40	-7.79	0-360	251	V
6	71.5225	46.27	Pk	6.2	-30	10.5	32.97	40	-7.03	0-360	398	V
11	98.425	48.09	Pk	10.5	-29.9	10.5	39.19	43.52	-4.33	0-360	101	V
12	111.4725	43.2	Pk	12.3	-29.8	10.5	36.2	43.52	-7.32	0-360	251	V
7	860.3	32.6	Pk	23.1	-27.5	10.5	38.7	46.02	-7.32	0-360	399	H
8	959.6	31.8	Pk	24.1	-27	10.5	39.4	46.02	-6.62	0-360	199	H
9	843.7	32.54	Pk	23.3	-27.5	10.5	38.84	46.02	-7.18	0-360	102	V
10	944.9	32.43	Pk	23.8	-27.2	10.5	39.53	46.02	-6.49	0-360	299	V
Radiated Emission Data												
	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Deps]	Height [cm]	Polarity
	30.12	36.06	Qp	18.1	-30.1	10.5	34.56	40	-5.44	235	101	V
	32.635	36.69	Qp	17	-30.1	10.5	34.09	40	-5.91	230	101	V
	97.745	38.49	Qp	10.3	-29.9	10.5	29.39	43.52	-14.13	0	101	V
Pk - Peak detector												
Qp - Quasi-Peak detector												

HIGH CHANNEL RESULTS X-Axis

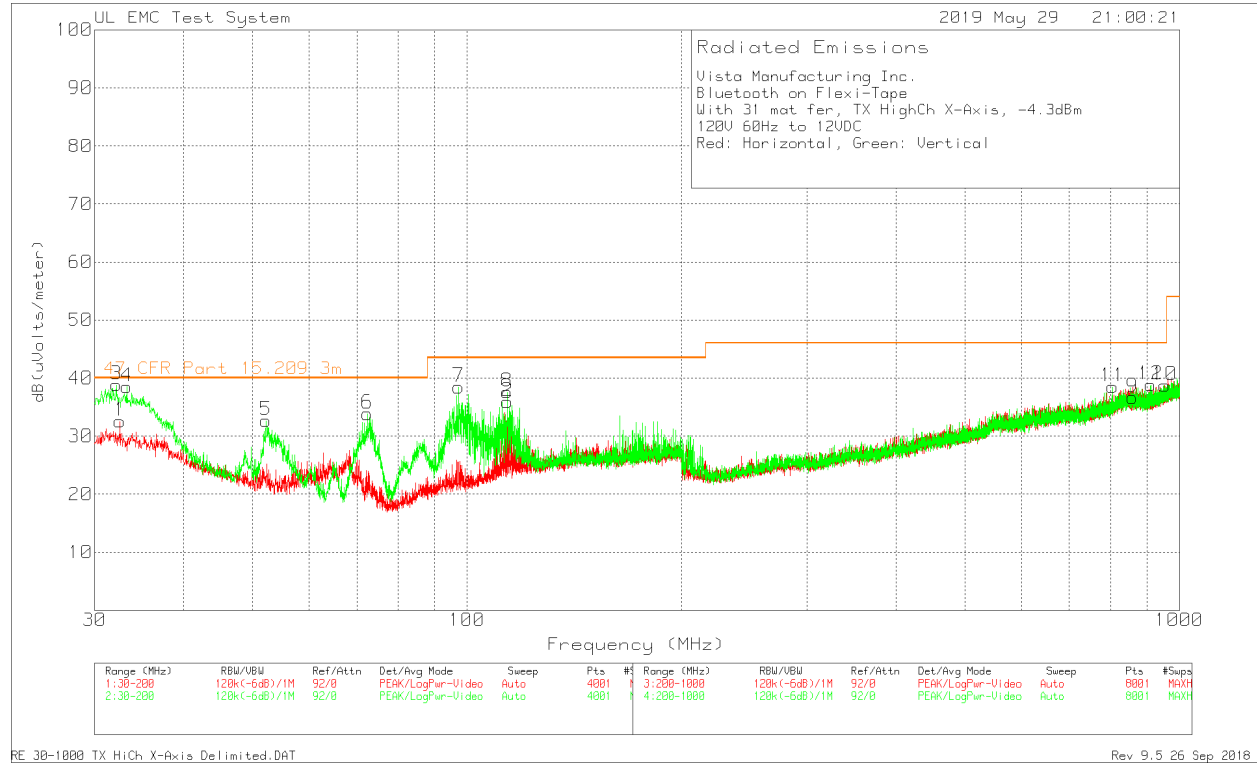

Vista Manufacturing Inc.												
Bluetooth on Flexi-Tape												
With 31 mat fer, TX HighCh X-Axis, -4.3dBm												
120V 60Hz to 12VDC												
Red: Horizontal, Green: Vertical												
Trace Markers												
Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	32.55	35.07	Pk	17.1	-30.1	10.5	32.57	40	-7.43	0-360	398	H
2	113.8525	42.63	Pk	12.6	-29.8	10.5	35.93	43.52	-7.59	0-360	398	H
3	32.1675	41.26	Pk	17.2	-30.1	10.5	38.86	40	-1.14	0-360	102	V
4	33.2725	41.35	Pk	16.8	-30.1	10.5	38.55	40	-1.45	0-360	102	V
5	52.185	42.88	Pk	9.3	-30	10.5	32.68	40	-7.32	0-360	102	V
6	72.4575	47.17	Pk	6.2	-30	10.5	33.87	40	-6.13	0-360	398	V
7	97.2775	47.58	Pk	10.3	-29.9	10.5	38.48	43.52	-5.04	0-360	102	V
8	113.7675	44.31	Pk	12.6	-29.8	10.5	37.61	43.52	-5.91	0-360	102	V
9	859.6	30.67	Pk	23.1	-27.6	10.5	36.67	46.02	-9.35	0-360	399	H
10	954	31.06	Pk	24	-26.8	10.5	38.76	46.02	-7.26	0-360	99	H
11	805.9	33.01	Pk	22.2	-27.2	10.5	38.51	46.02	-7.51	0-360	299	V
12	911.1	32.34	Pk	23.1	-27.1	10.5	38.84	46.02	-7.18	0-360	202	V
Radiated Emission Data												
	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
	32.6775	36.96	Qp	17	-30.1	10.5	34.36	40	-5.64	251	101	V
	30.68	36.67	Qp	17.8	-30.1	10.5	34.87	40	-5.13	245	101	V
	97.745	38.49	Qp	10.3	-29.9	10.5	29.39	43.52	-14.13	0	101	V
Pk - Peak detector												
Qp - Quasi-Peak detector												

HIGH CHANNEL RESULTS Y-Axis

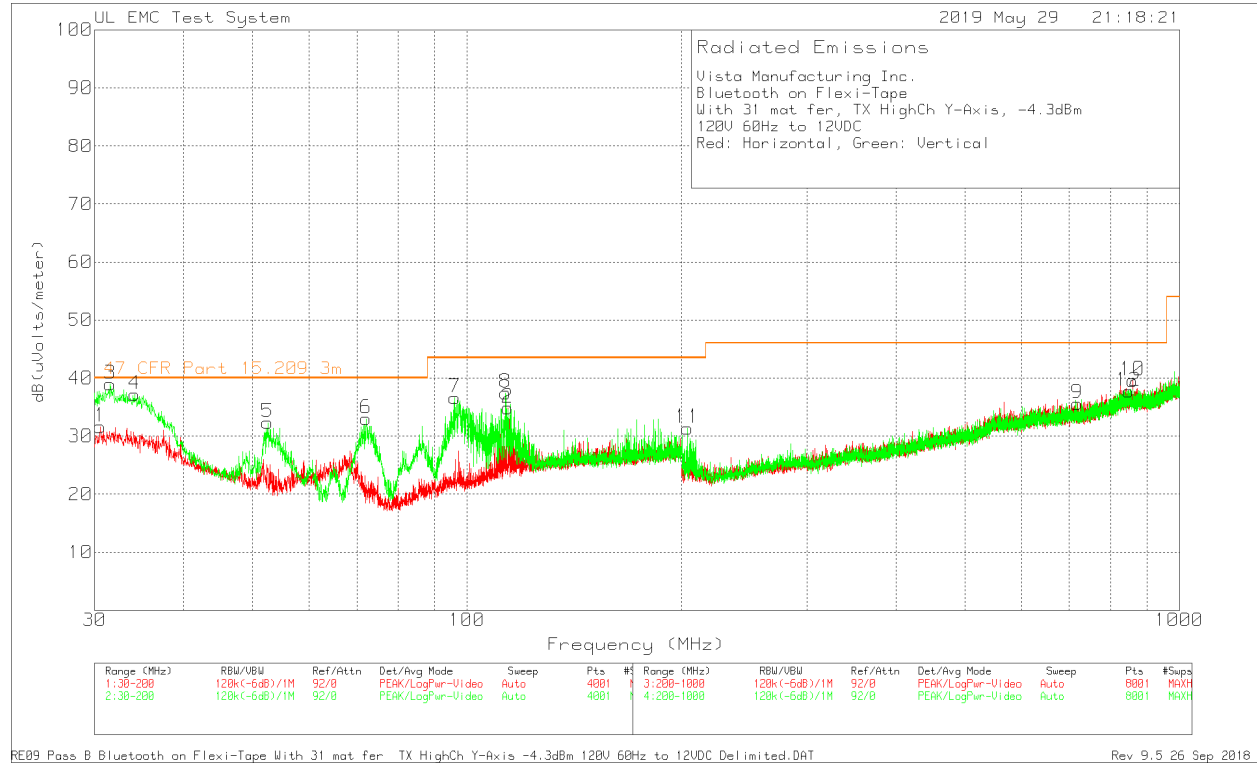


Vista Manufacturing Inc.												
Bluetooth on Flexi-Tape												
With 31 mat fer, TX HighCh Y-Axis, -4.3dBm												
120V 60Hz to 12VDC												
Red: Horizontal, Green: Vertical												
Trace Markers												
Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	30.5525	33.34	Pk	17.9	-30.1	10.5	31.64	40	-8.36	0-360	398	H
2	114.0225	41.59	Pk	12.6	-29.8	10.5	34.89	43.52	-8.63	0-360	398	H
3	31.53	41.08	Pk	17.5	-30.1	10.5	38.98	40	-1.02	0-360	101	V
4	34.1225	40.3	Pk	16.5	-30.1	10.5	37.2	40	-2.8	0-360	101	V
5	52.4825	42.65	Pk	9.2	-30	10.5	32.35	40	-7.65	0-360	101	V
6	72.1175	46.3	Pk	6.2	-30	10.5	33	40	-7	0-360	398	V
7	96.0875	45.84	Pk	10.1	-29.8	10.5	36.64	43.52	-6.88	0-360	101	V
8	113.215	44.27	Pk	12.5	-29.8	10.5	37.47	43.52	-6.05	0-360	101	V
9	718.9	31.24	Pk	20.9	-27	10.5	35.64	46.02	-10.38	0-360	399	H
10	859.1	33.49	Pk	23.2	-27.6	10.5	39.59	46.02	-6.43	0-360	299	H
11	203.9	38.79	Pk	11.4	-29.3	10.5	31.39	43.52	-12.13	0-360	102	V
12	848.5	31.37	Pk	23.2	-27.3	10.5	37.77	46.02	-8.25	0-360	399	V
Radiated Emission Data												
	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	10m to 3m Factor dB	Corrected Reading dB(uV/m)	47 CFR Part 15.209 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
	32.6775	36.96	Qp	17	-30.1	10.5	34.36	40	-5.64	251	101	V
	30.68	36.67	Qp	17.8	-30.1	10.5	34.87	40	-5.13	245	101	V
	97.745	38.49	Qp	10.3	-29.9	10.5	29.39	43.52	-14.13	0	101	V
Pk - Peak detector												
Qp - Quasi-Peak detector												

9.5. TRANSMITTER ABOVE 1 GHz

9.5.1. BANDEDGE

BANDEDGE (LOW CHANNEL X Axis Horizontal)

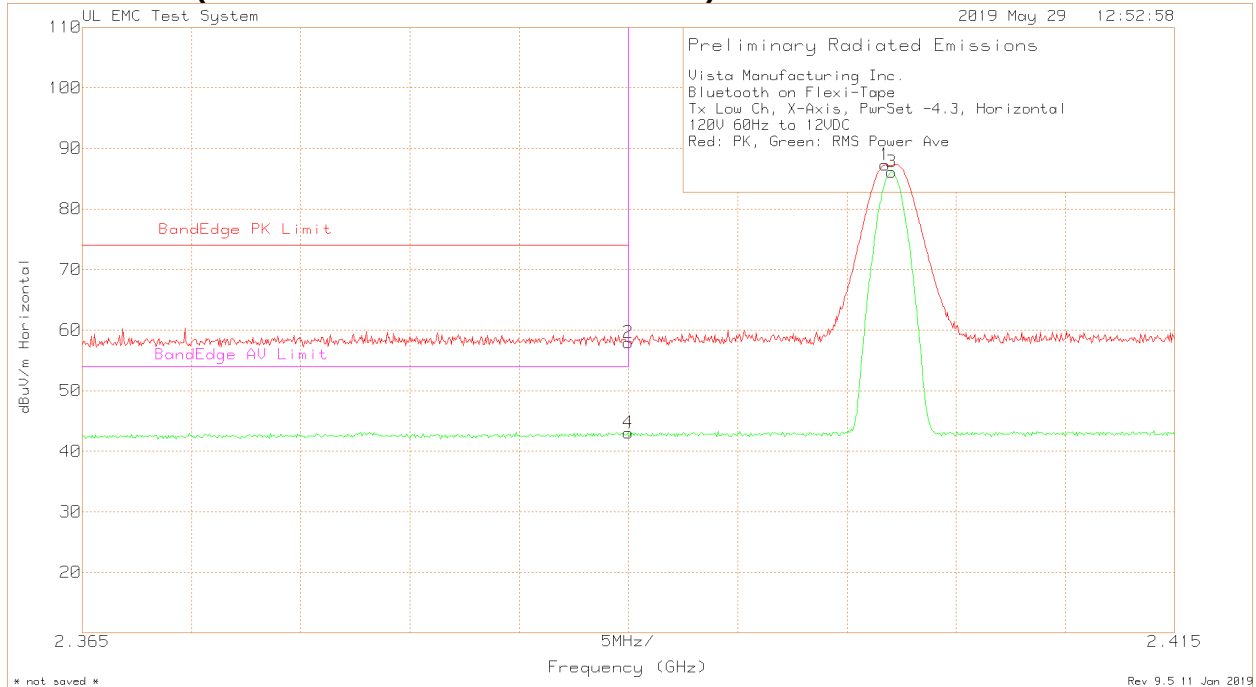

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
Tx Low Ch, X-Axis, PwrSet -4.3, Horizontal
120V 60Hz to 12VDC
Red: PK, Green: RMS Power Ave


Trace Markers

Test No.	Frequency (GHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1	2
1	2.40175	60.76dBuV Pk	21.8	4.75	87.31	-	-
		Azimuth:102	Height:140	Horz	Margin (dB)	-	-
2	2.39	31.37dBuV Pk	21.8	4.76	57.93	74	-
		Azimuth:102	Height:140	Horz	Margin (dB)	-16.07	-
3	2.40205	59.57dBuV Av	21.8	4.75	86.12	-	-
		Azimuth:102	Height:140	Horz	Margin (dB)	-	-
4	2.39	16.5dBuV Av	21.8	4.76	43.06	74	54
		Azimuth:102	Height:140	Horz	Margin (dB)	-30.94	-10.94

LIMIT 1: BandEdge PK Limit
LIMIT 2: BandEdge AV Limit

Pk - Peak detector
Av - PWR RMS Av

BANDEDGE (LOW CHANNEL Y Axis Horizontal)

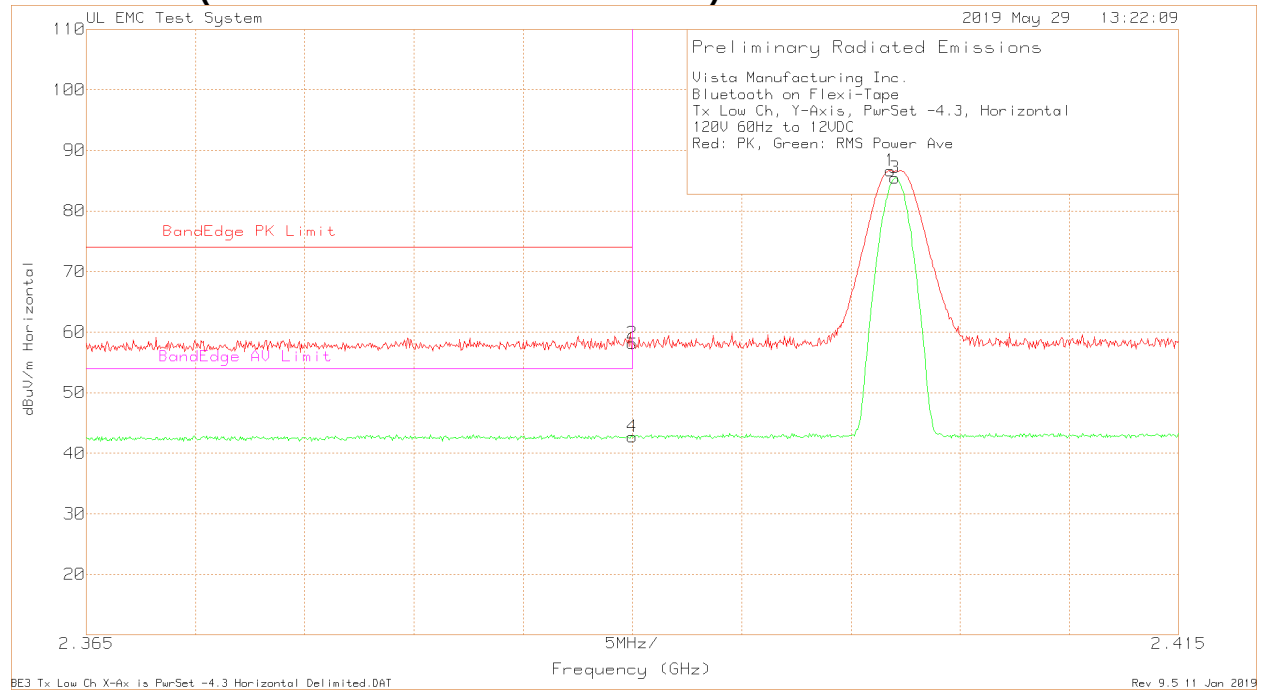

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
Tx Low Ch, Y-Axis, PwrSet -4.3, Horizontal
120V 60Hz to 12VDC
Red: PK, Green: RMS Power Ave


Trace Markers

Test No.	Frequency (GHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1	2
dBuV/m							
1	2.4018	60.1dBuV Pk	21.8	4.75	86.65	-	-
		Azimuth:108	Height:139	Horz	Margin (dB)	-	-
2	2.39	31.59dBuV Pk	21.8	4.76	58.15	74	-
		Azimuth:108	Height:139	Horz	Margin (dB)	-15.85	-
3	2.402025	58.88dBuV Av	21.8	4.75	85.43	-	-
		Azimuth:108	Height:139	Horz	Margin (dB)	-	-
4	2.39	16.18dBuV Av	21.8	4.76	42.74	74	54
		Azimuth:108	Height:139	Horz	Margin (dB)	-31.26	-11.26

LIMIT 1: BandEdge PK Limit
LIMIT 2: BandEdge AV Limit

Pk - Peak detector
Av - PWR RMS Average

BANDEDGE (LOW CHANNEL X Axis Vertical)

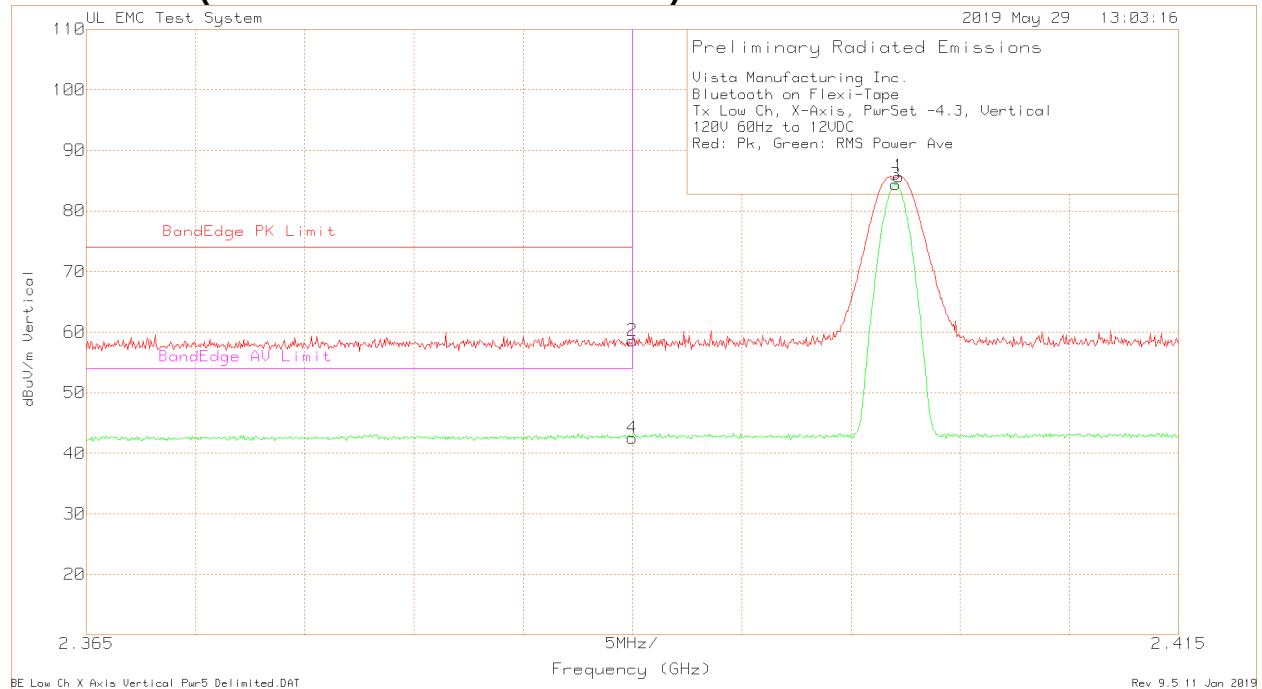

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
Tx Low Ch, X-Axis, PwrSet -4.3, Vertical
120V 60Hz to 12VDC
Red: Pk, Green: RMS Power Ave


Trace Markers

Test No.	Frequency (GHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1	2
1	2.4022	59.18dBuV Pk	21.8	4.75	85.73	-	-
		Azimuth:211	Height:139	Vert	Margin (dB)	-	-
2	2.39	32dBuV Pk	21.8	4.76	58.56	74	-
		Azimuth:211	Height:139	Vert	Margin (dB)	-15.44	-
3	2.40205	57.85dBuV Av	21.8	4.75	84.4	-	-
		Azimuth:211	Height:139	Vert	Margin (dB)	-	-
4	2.39	15.95dBuV Av	21.8	4.76	42.51	74	54
		Azimuth:211	Height:139	Vert	Margin (dB)	-31.49	-11.49

LIMIT 1: BandEdge PK Limit
LIMIT 2: BandEdge AV Limit

Pk - Peak detector
AV - PWR RMS Average

BANDEDGE (LOW CHANNEL Y Axis Vertical)

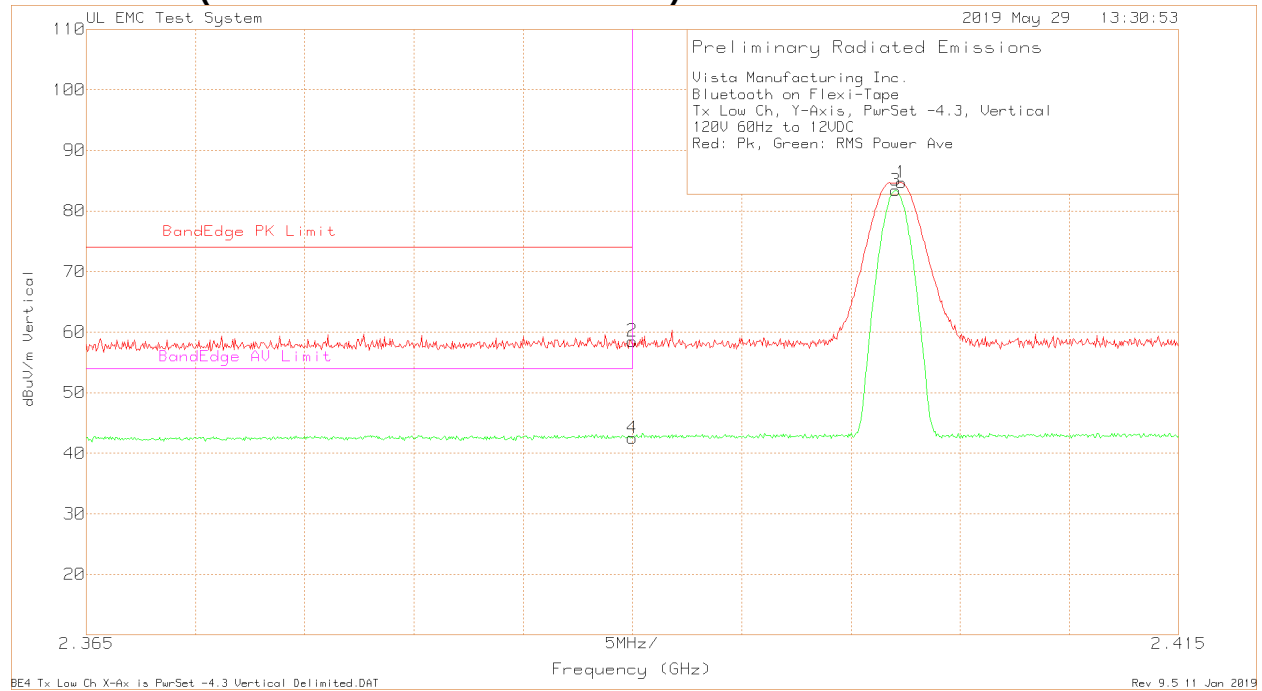

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
Tx Low Ch, Y-Axis, PwrSet -4.3, Vertical
120V 60Hz to 12VDC
Red: Pk, Green: RMS Power Ave


Trace Markers

Test No.	Frequency (GHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1	2
dBuV/m							
1	2.4023	58.16dBuV Pk	21.8	4.75	84.71	-	-
		Azimuth:205	Height:140	Vert	Margin (dB)	-	-
2	2.39	31.96dBuV Pk	21.8	4.76	58.52	74	-
		Azimuth:205	Height:140	Vert	Margin (dB)	-15.48	-
3	2.40205	56.86dBuV Av	21.8	4.75	83.41	-	-
		Azimuth:205	Height:140	Vert	Margin (dB)	-	-
4	2.39	15.97dBuV Av	21.8	4.76	42.53	74	54
		Azimuth:205	Height:140	Vert	Margin (dB)	-31.47	-11.47

LIMIT 1: BandEdge PK Limit
LIMIT 2: BandEdge AV Limit

Pk - Peak detector
Av - PWR RMS Average

BANDEDGE (HIGH CHANNEL X Axis Horizontal)

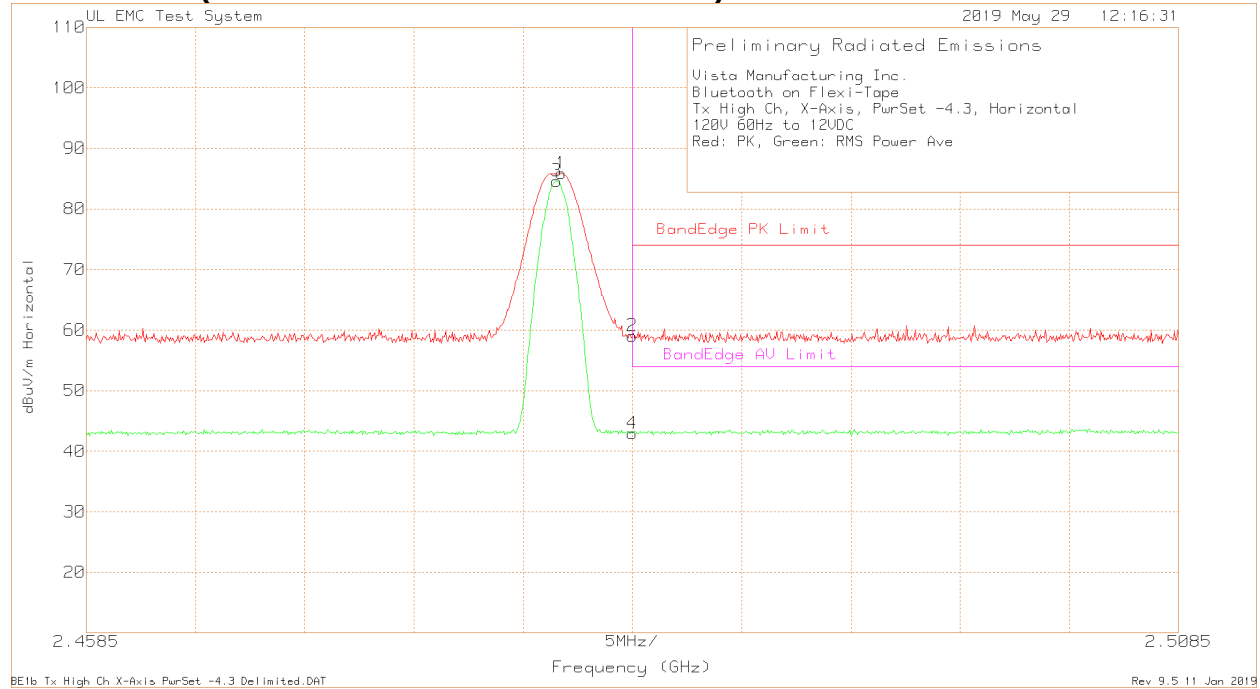

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
Tx High Ch, X-Axis, PwrSet -4.3, Horizontal
120V 60Hz to 12VDC
Red: PK, Green: RMS Power Ave


Trace Markers

Test No.	Frequency (GHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1	2
dBuV/m							
1	2.48025	59.34dBuV Pk	22	4.52	85.86	-	-
		Azimuth:164	Height:217	Horz	Margin (dB)	-	-
2	2.4835	32.42dBuV Pk	22.1	4.53	59.05	74	-
		Azimuth:164	Height:217	Horz	Margin (dB)	-14.95	-
3	2.480025	58.11dBuV Av	22	4.52	84.63	-	-
		Azimuth:164	Height:217	Horz	Margin (dB)	-	-
4	2.4835	16.29dBuV Av	22.1	4.53	42.92	74	54
		Azimuth:164	Height:217	Horz	Margin (dB)	-31.08	-11.08

LIMIT 1: BandEdge PK Limit
LIMIT 2: BandEdge AV Limit

Pk - Peak detector
Av - PWR RMS Average

BANDEDGE (HIGH CHANNEL Y Axis Horizontal)

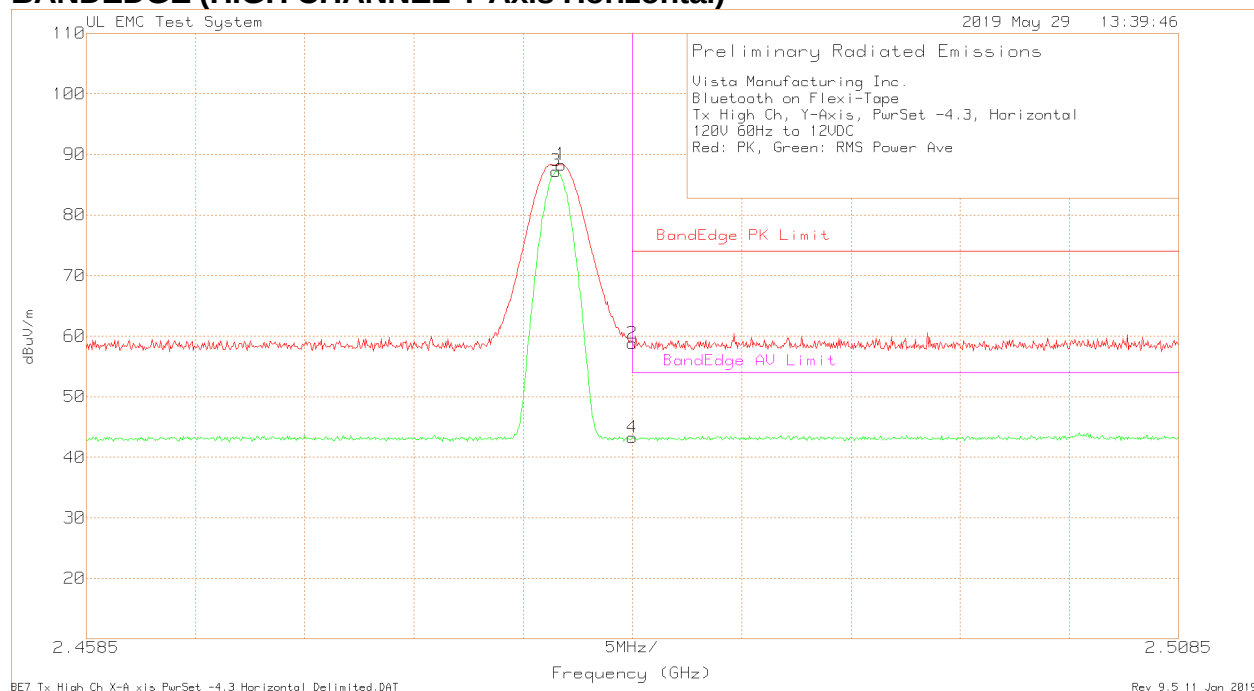

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
Tx High Ch, Y-Axis, PwrSet -4.3, Horizontal
120V 60Hz to 12VDC
Red: PK, Green: RMS Power Ave


Trace Markers

Test No.	Frequency (GHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1	2
1	2.48025	61.79dBuV Pk	22	4.52	88.31	-	-
		Azimuth:120	Height:140	Horz	Margin (dB)	-	-
2	2.4835	32.17dBuV Pk	22.1	4.53	58.8	74	-
		Azimuth:120	Height:140	Horz	Margin (dB)	-15.2	-
3	2.48	60.72dBuV Av	22	4.52	87.24	-	-
		Azimuth:120	Height:140	Horz	Margin (dB)	-	-
4	2.4835	16.61dBuV Av	22.1	4.53	43.24	74	54
		Azimuth:120	Height:140	Horz	Margin (dB)	-30.76	-10.76

LIMIT 1: BandEdge PK Limit
LIMIT 2: BandEdge AV Limit

Pk - Peak detector
Av - PWR RMS Average

BANDEDGE (HIGH CHANNEL X Axis Vertical)

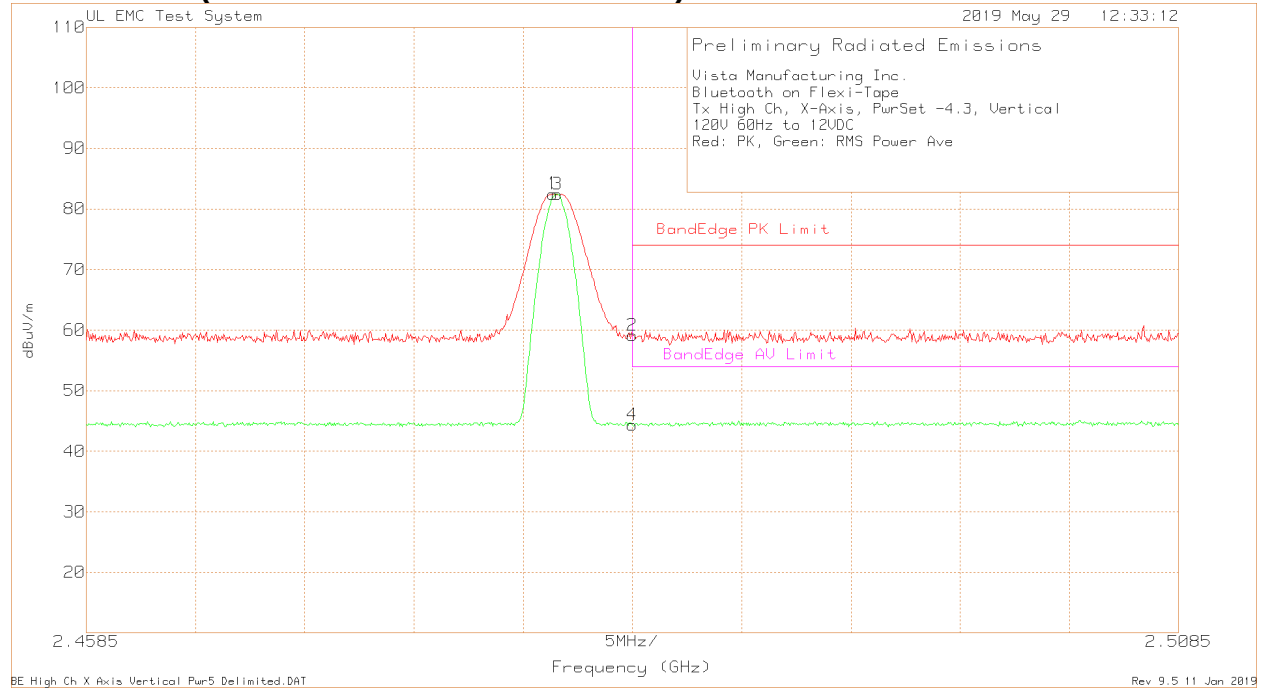

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
Tx High Ch, X-Axis, PwrSet -4.3, Vertical
120V 60Hz to 12VDC
Red: PK, Green: RMS Power Ave


Trace Markers

Test No.	Frequency (GHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1	2
1	2.47985	55.95dBuV Pk	22	4.52	82.47	-	-
		Azimuth:307	Height:251	Vert	Margin (dB)	-	-
2	2.4835	32.47dBuV Pk	22.1	4.53	59.1	74	-
		Azimuth:307	Height:251	Vert	Margin (dB)	-14.9	-
3	2.48005	54.53dBuV Av	22	5.92	82.45	-	-
		Azimuth:307	Height:251	Vert	Margin (dB)	-	-
4	2.4835	16.28dBuV Av	22.1	5.93	44.31	74	54
		Azimuth:307	Height:251	Vert	Margin (dB)	-29.69	-9.69

LIMIT 1: BandEdge PK Limit
LIMIT 2: BandEdge AV Limit

Pk - Peak detector
Av - PWR RMS Average

BANDEDGE (HIGH CHANNEL Y Axis Vertical)

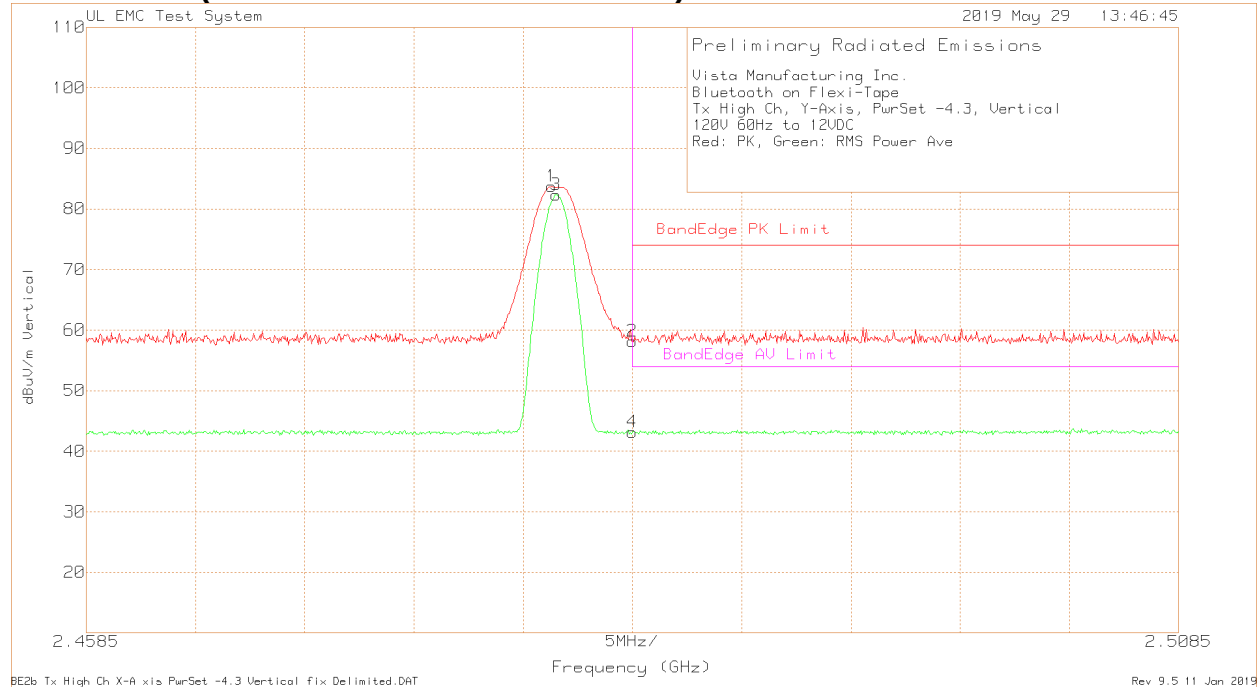

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
Tx High Ch, Y-Axis, PwrSet -4.3, Vertical
120V 60Hz to 12VDC
Red: PK, Green: RMS Power Ave

Trace Markers



Test No.	Frequency (GHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1	2
1	2.4798	57.18dBuV Pk	22	4.52	83.7	-	-
		Azimuth:220	Height:107	Vert	Margin (dB)	-	-
2	2.4835	31.5dBuV Pk	22.1	4.53	58.13	74	-
		Azimuth:220	Height:107	Vert	Margin (dB)	-15.87	-
3	2.48	55.82dBuV Av	22	4.52	82.34	-	-
		Azimuth:220	Height:107	Vert	Margin (dB)	-	-
4	2.4835	16.54dBuV Av	22.1	4.53	43.17	74	54
		Azimuth:220	Height:107	Vert	Margin (dB)	-30.83	-10.83

LIMIT 1: BandEdge PK Limit
LIMIT 2: BandEdge AV Limit

Pk - Peak detector
Av - PWR RMS Average



9.5.2. SPURIOUS EMISSIONS

LOW CHANNEL RESULTS X-Axis

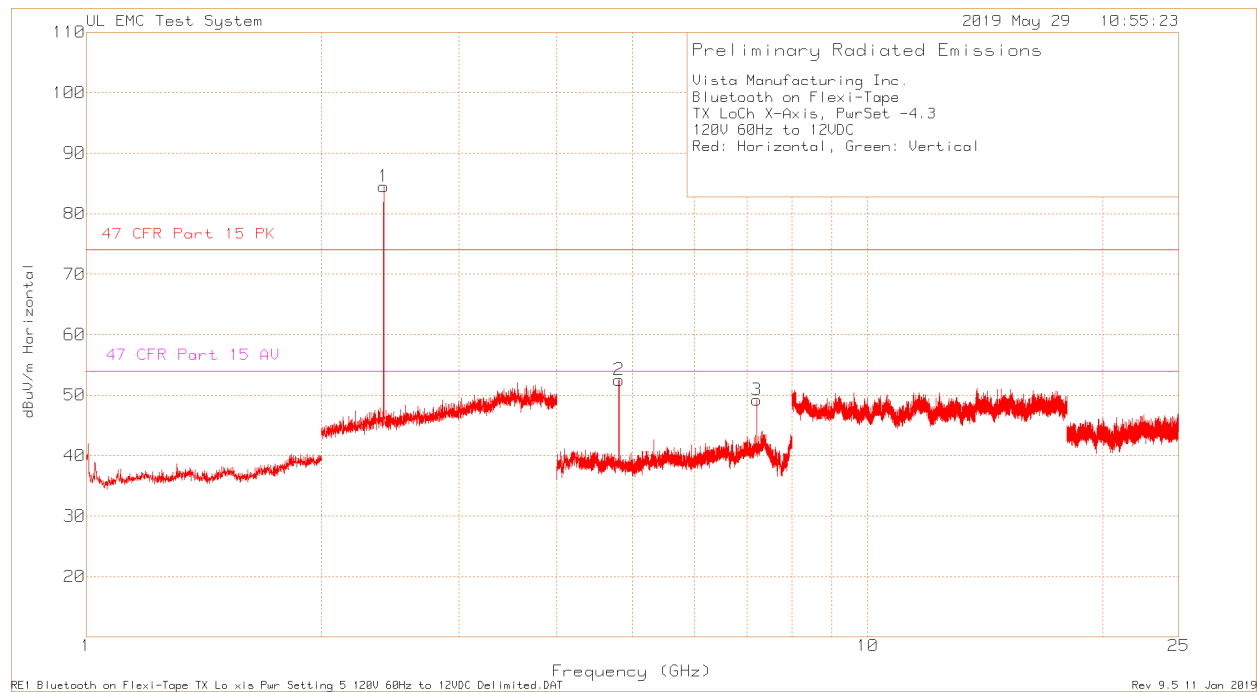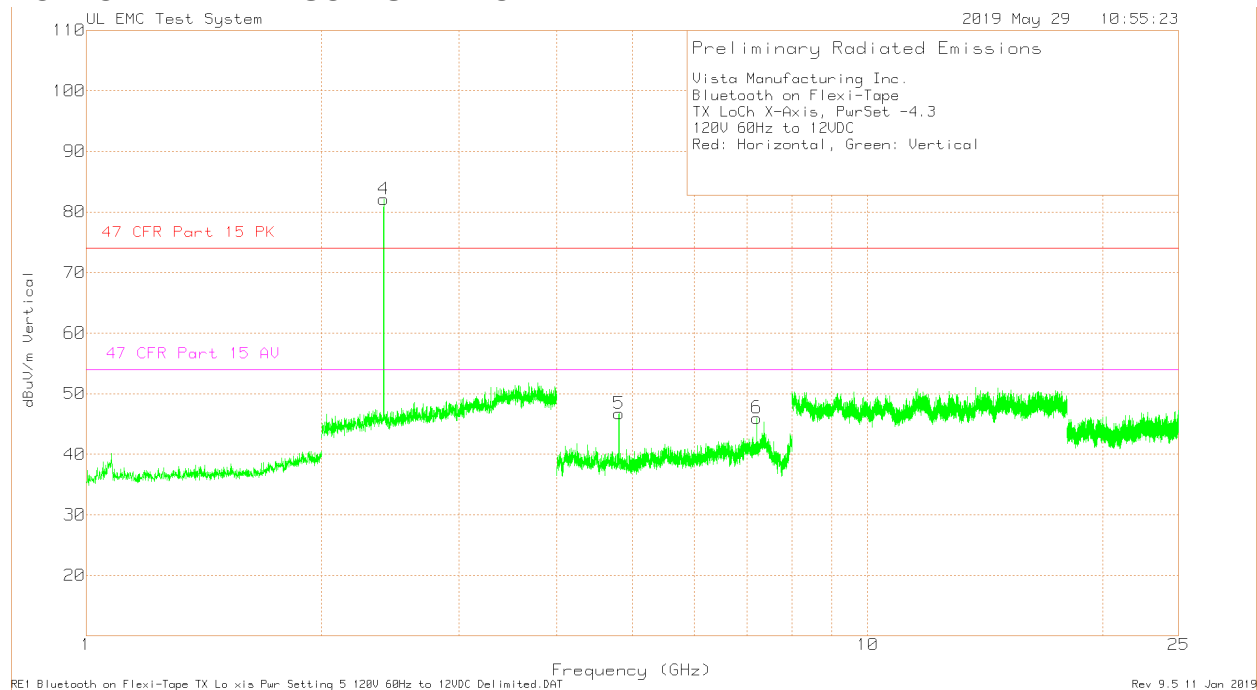



Vista Manufacturing Inc.													
Bluetooth on Flexi-Tape													
TX LoCh X-Axis, PwrSet -4.3													
120V 60Hz to 12VDC													
Red: Horizontal, Green: Vertical													
Trace Markers													
Marker No.	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	2.402	57.95	Pk	21.8	4.75	-	-	-	-	30.5	0-360	150	H
2	4.805	75.62	Pk	27.7	-50.82	52.5	74	-21.5	54	-1.5	0-360	150	H
3	7.206	64.76	Pk	29.7	-45.28	49.18	74	-24.82	54	-4.82	0-360	150	H
4	2.402	55.57	Pk	21.8	4.75	-	-	-	-	28.12	0-360	150	V
5	4.805	69.84	Pk	27.7	-50.82	46.72	74	-27.28	54	-7.28	0-360	150	V
6	7.206	61.58	Pk	29.7	-45.28	46	74	-28	54	-8	0-360	150	V
Pk - Peak detector													
Radiated Emission Data													
	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
	4.8037	73.46	Av	27.7	-51.06	50.1	74	-23.9	54	-3.9	68	119	H
Pk - Peak detector													
Av - PWR RMS Average													

LOW CHANNEL RESULTS Y-Axis

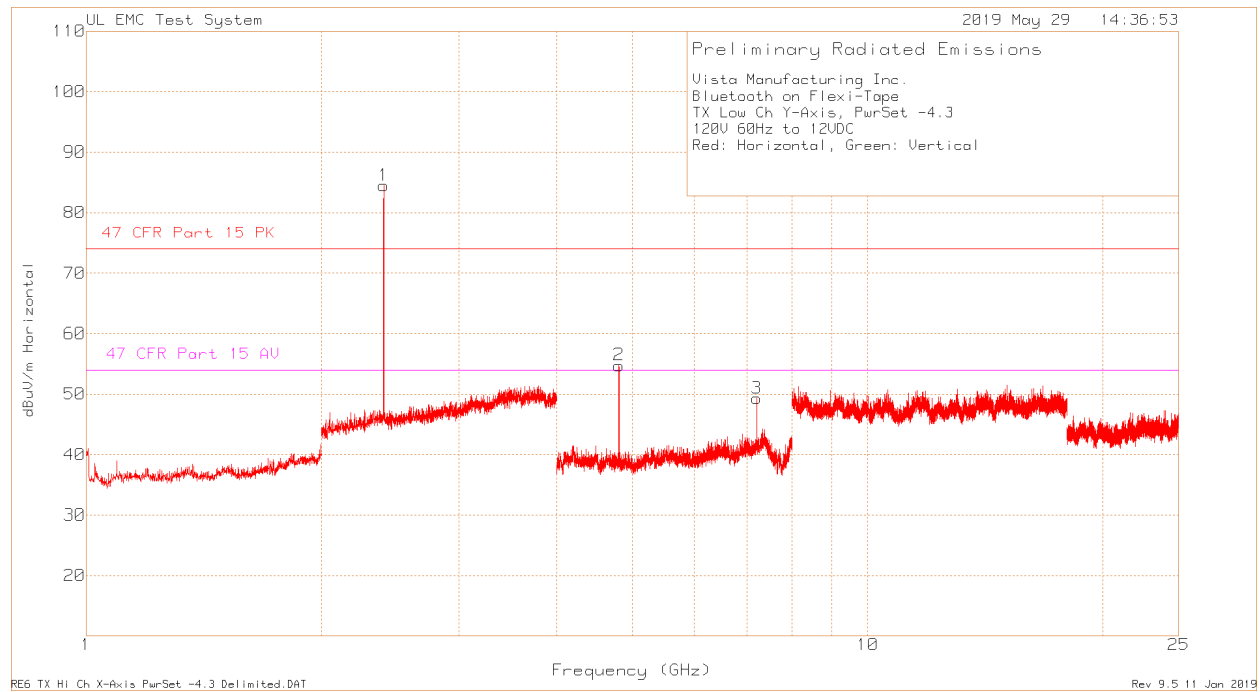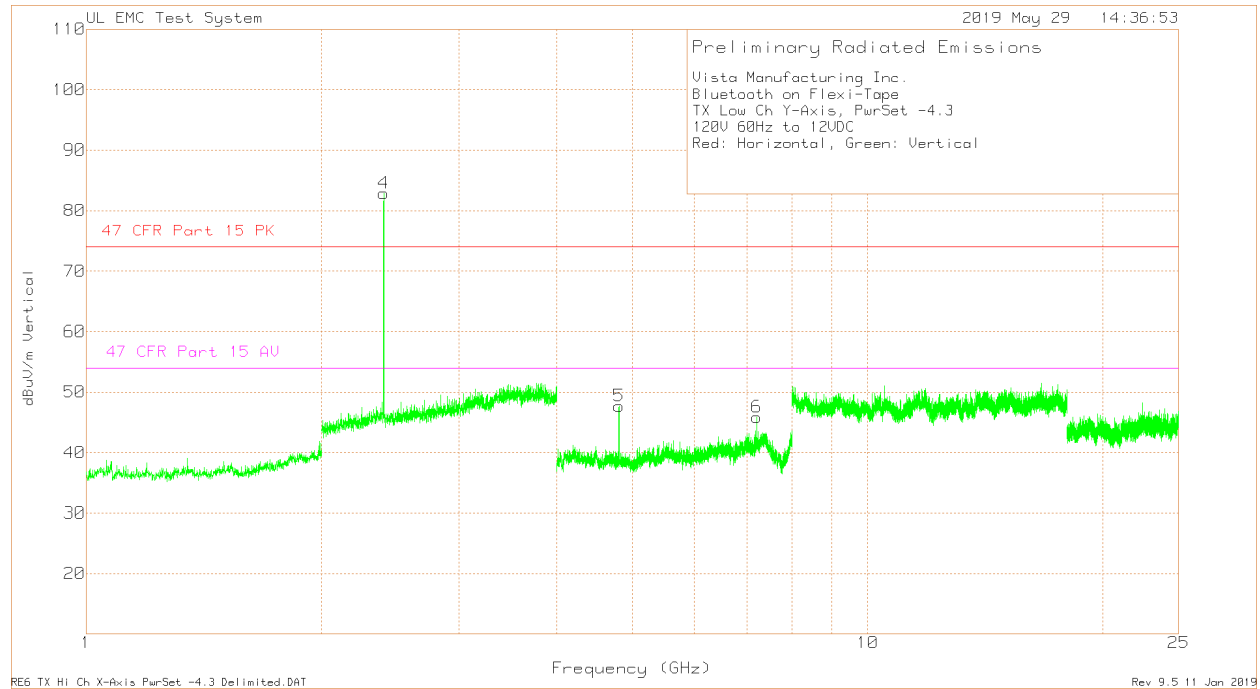



Vista Manufacturing Inc.													
Bluetooth on Flexi-Tape													
TX Low Ch Y-Axis, PwrSet -4.3													
120V 60Hz to 12VDC													
Red: Horizontal, Green: Vertical													
Trace Markers													
Marker No.	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	2.402	57.95	Pk	21.8	4.75	84.5	-	-	-	-	0-360	150	H
2	4.804	78.14	Pk	27.7	-51.09	54.75	74	-19.25	54	0.75	0-360	150	H
3	7.207	64.97	Pk	29.8	-45.46	49.31	74	-24.69	54	-4.69	0-360	150	H
4	2.402	56.3	Pk	21.8	4.75	82.85	-	-	-	-	0-360	150	V
5	4.805	70.77	Pk	27.7	-50.82	47.65	74	-26.35	54	-6.35	0-360	150	V
6	7.207	61.49	Pk	29.8	-45.46	45.83	74	-28.17	54	-8.17	0-360	150	V
Radiated Emission Data													
	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
	4.8039	75.52	Av	27.7	-51.07	52.15	74	-21.85	54	-1.85	139	101	H
Pk - Peak detector													
Av - PWR RMS Average													

MIDDLE CHANNEL RESULTS X-Axis

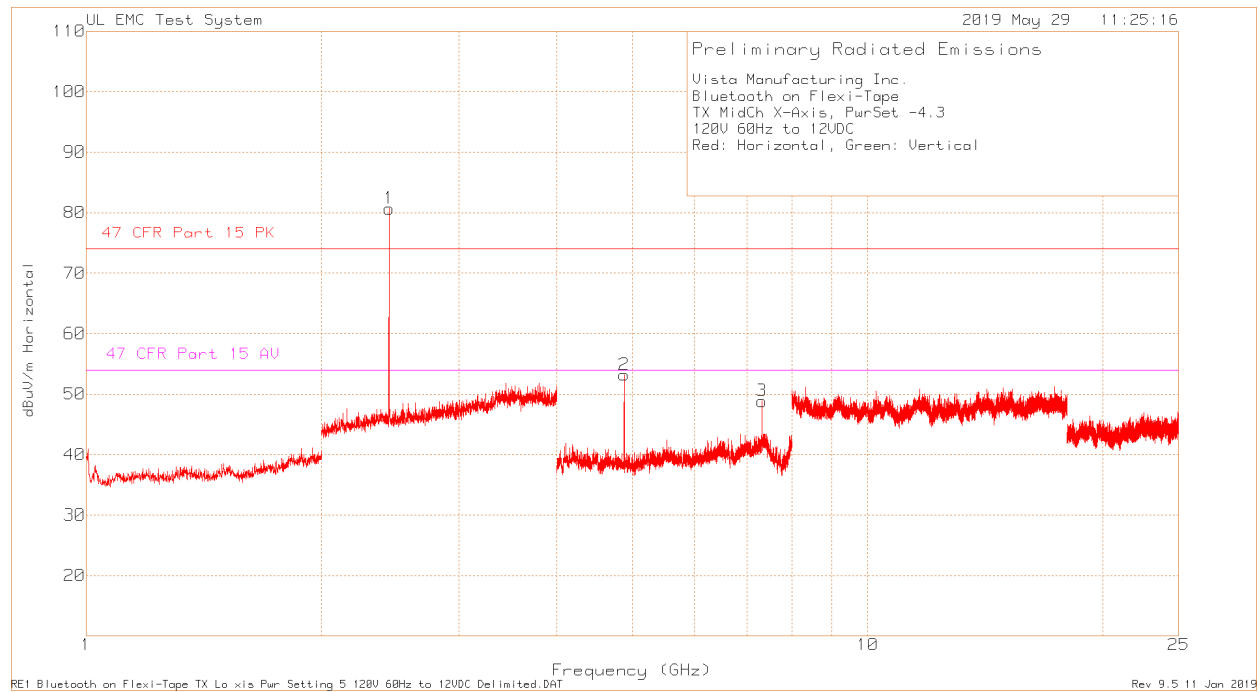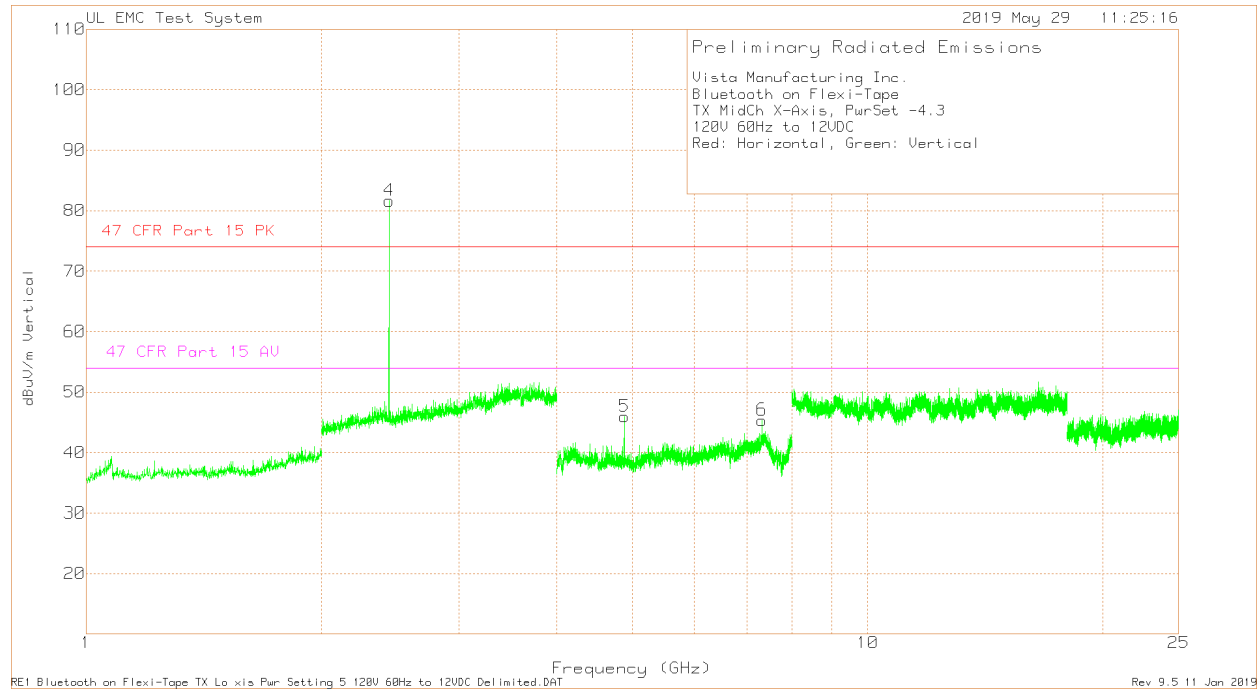



Vista Manufacturing Inc.													
Bluetooth on Flexi-Tape													
TX MidCh X-Axis, PwrSet -4.3													
120V 60Hz to 12VDC													
Red: Horizontal, Green: Vertical													
Trace Markers													
Marker No.	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	2.44	54.16	Pk	21.9	4.61	80.67	-	-	-	-	0-360	150	H
2	4.879	75.65	Pk	27.7	-50.17	53.18	74	-20.82	54	-0.82	0-360	150	H
3	7.32	63.29	Pk	30.6	-45.06	48.83	74	-25.17	54	-5.17	0-360	150	H
4	2.44	55.13	Pk	21.9	4.61	81.64	-	-	-	-	0-360	150	V
5	4.88	68.47	Pk	27.7	-50.22	45.95	74	-28.05	54	-8.05	0-360	150	V
6	7.32	59.81	Pk	30.6	-45.06	45.35	74	-28.65	54	-8.65	0-360	150	V
Radiated Emission Data													
	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
	4.8799	73.24	Av	27.7	-50.21	50.73	74	-23.27	54	-3.27	104	113	H
Pk - Peak detector													
Av - PWR RMS Average													

MIDDLE CHANNEL RESULTS Y-Axis

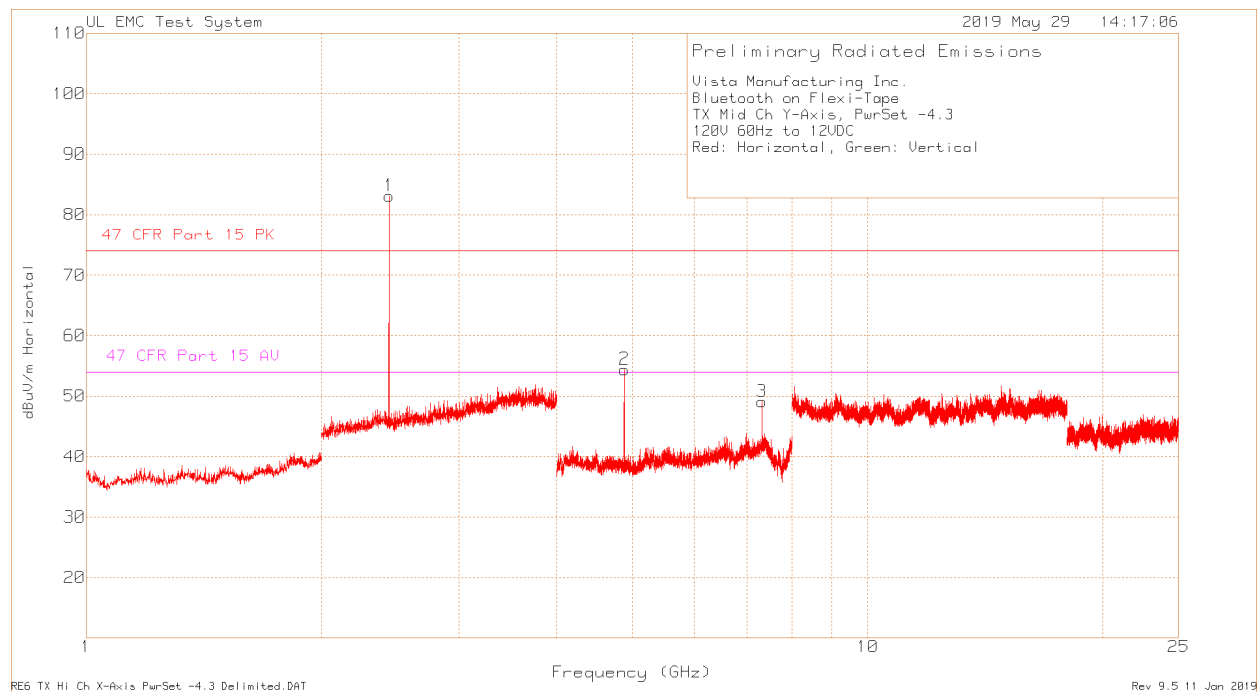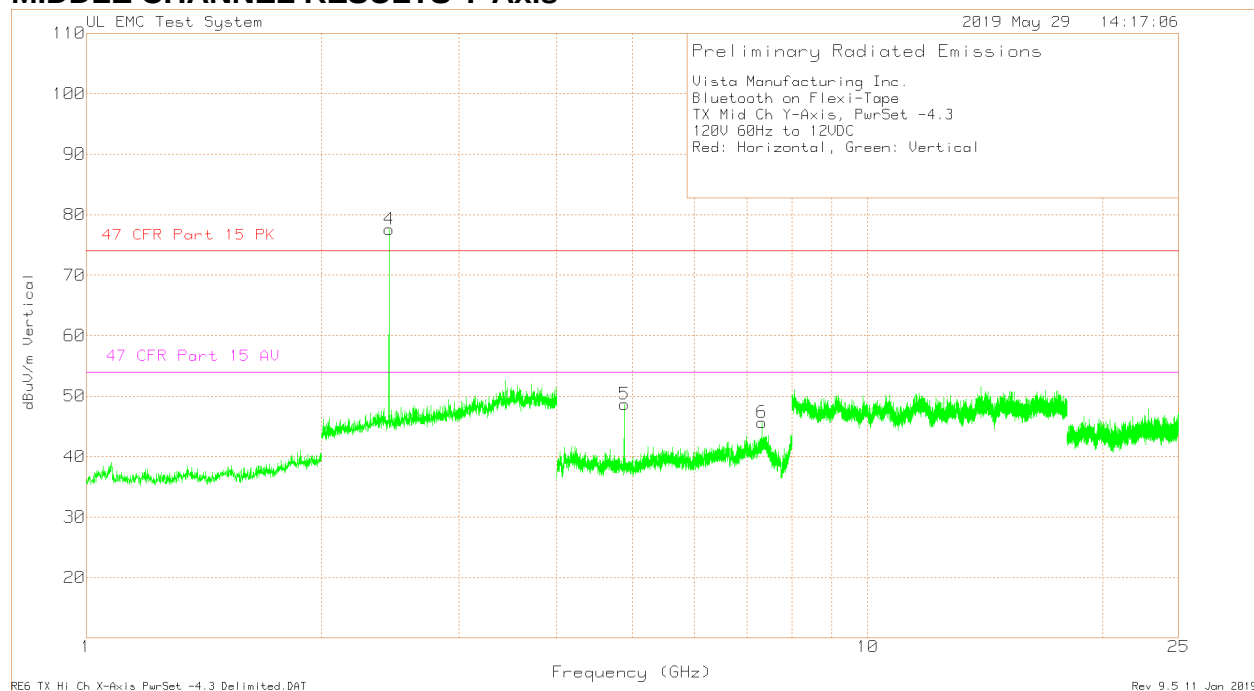



Vista Manufacturing Inc.													
Bluetooth on Flexi-Tape													
TX Mid Ch Y-Axis, PwrSet -4.3													
120V 60Hz to 12VDC													
Red: Horizontal, Green: Vertical													
Trace Markers													
Marker No.	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Deps]	Height [cm]	Polarity
1	2.44	56.6	Pk	21.9	4.61	83.11	-	-	-	-	0-360	150	H
2	4.88	76.94	Pk	27.7	-50.22	54.42	74	-19.58	54	0.42	0-360	150	H
3	7.322	63.53	Pk	30.6	-45.03	49.1	74	-24.9	54	-4.9	0-360	150	H
4	2.44	51.07	Pk	21.9	4.61	77.58	-	-	-	-	0-360	150	V
5	4.88	71.16	Pk	27.7	-50.22	48.64	74	-25.36	54	-5.36	0-360	150	V
6	7.32	60.09	Pk	30.6	-45.06	45.63	74	-28.37	54	-8.37	0-360	150	V
Radiated Emission Data													
	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Deps]	Height [cm]	Polarity
	4.8798	75.33	Av	27.7	-50.21	52.82	74	-21.18	54	-1.18	138	118	H
Pk - Peak detector													
Av - PWR RMS Average													

HIGH CHANNEL RESULTS X-Axis

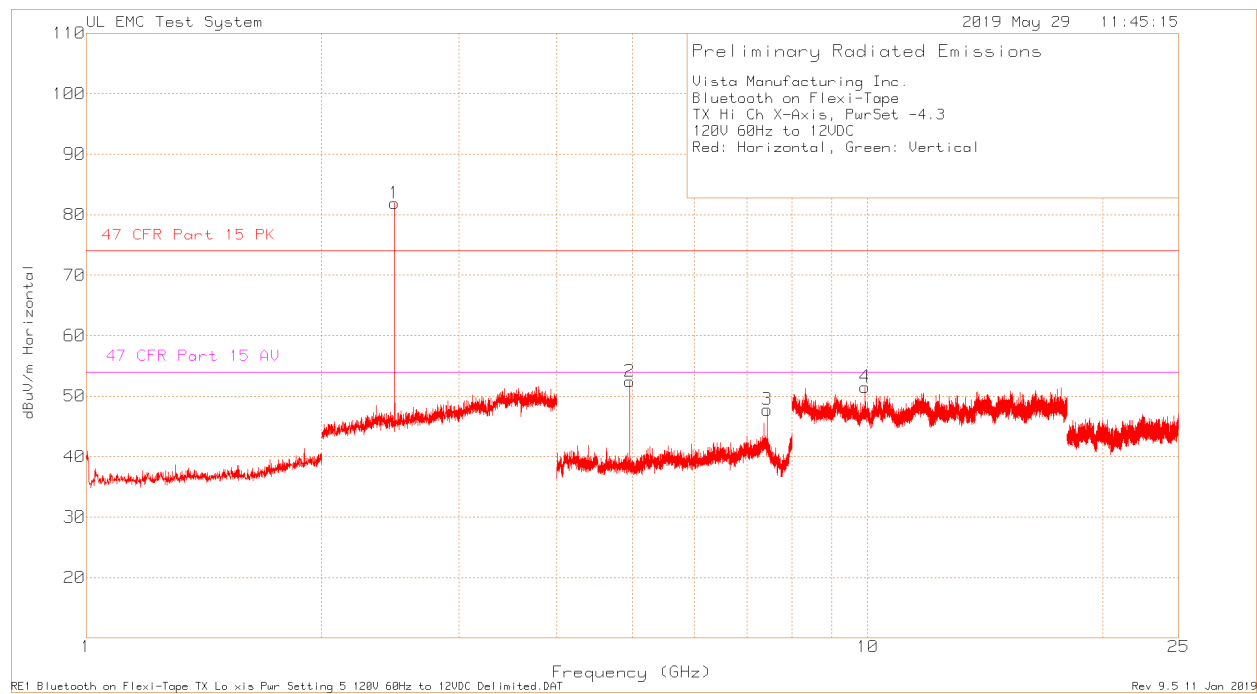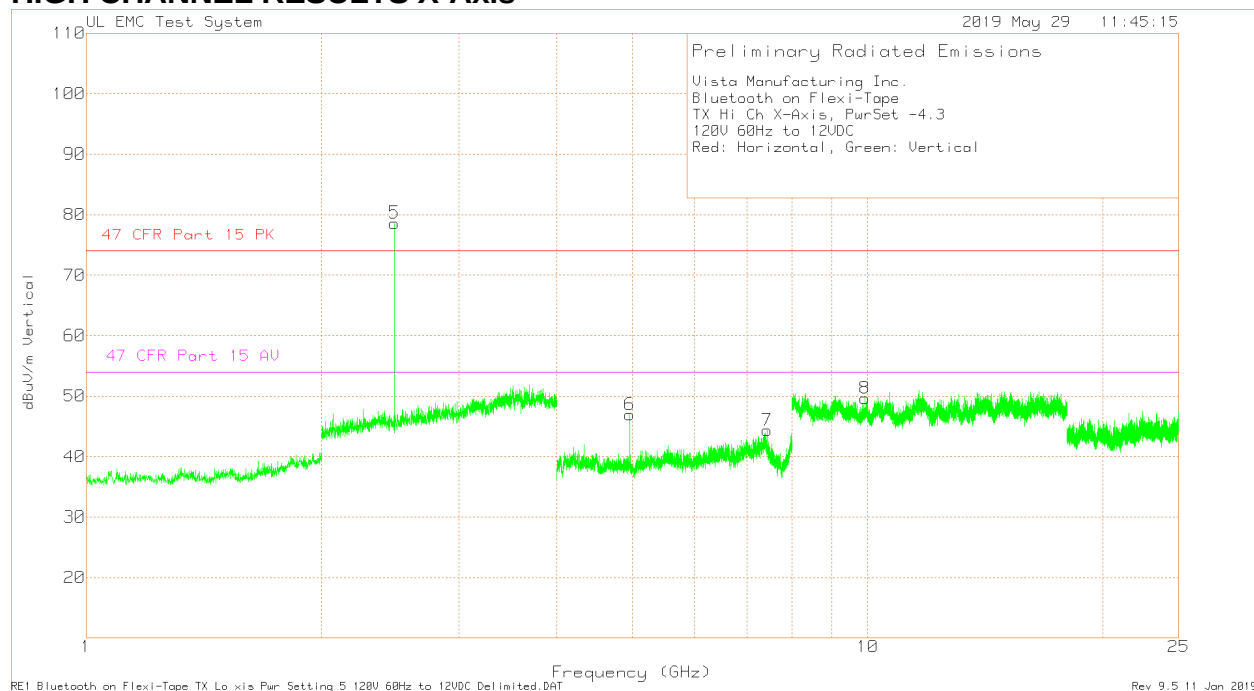

Vista Manufacturing Inc.													
Bluetooth on Flex-i-Tape													
TX Hi Ch X-Axis, PwrSet -4.3													
120V 60Hz to 12VDC													
Red: Horizontal, Green: Vertical													
Trace Markers													
Marker No.	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	2.48	55.36	Pk	22	4.52	81.88	-	-	-	-	0-360	150	H
2	4.959	73.99	Pk	27.8	-49.39	52.4	74	-21.6	54	-1.6	0-360	150	H
3	7.442	63.72	Pk	30.5	-46.47	47.75	74	-26.25	54	-6.25	0-360	150	H
4	9.92	63.3	Pk	36.4	-48.21	51.49	74	-22.51	54	-2.51	0-360	150	H
5	2.48	52.07	Pk	22	4.52	78.59	-	-	-	-	0-360	150	V
6	4.96	68.7	Pk	27.8	-49.57	46.93	74	-27.07	54	-7.07	0-360	150	V
7	7.441	60.43	Pk	30.5	-46.59	44.34	74	-29.66	54	-9.66	0-360	150	V
8	9.92	61.46	Pk	36.4	-48.21	49.65	74	-24.35	54	-4.35	0-360	150	V
Radiated Emission Data													
	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
	4.9598	71.79	Av	27.8	-49.54	50.05	74	-23.95	54	-3.95	105	100	H
Pk - Peak detector													
Av - PWR RMS Average													

HIGH CHANNEL RESULTS Y-Axis

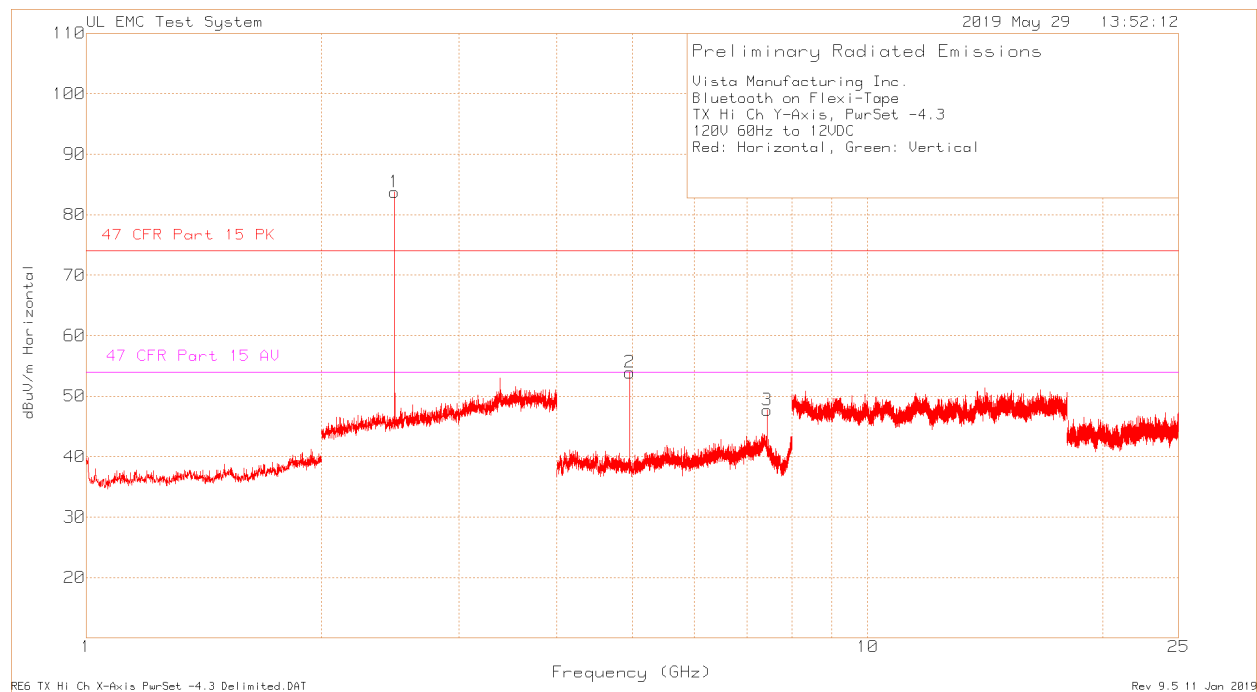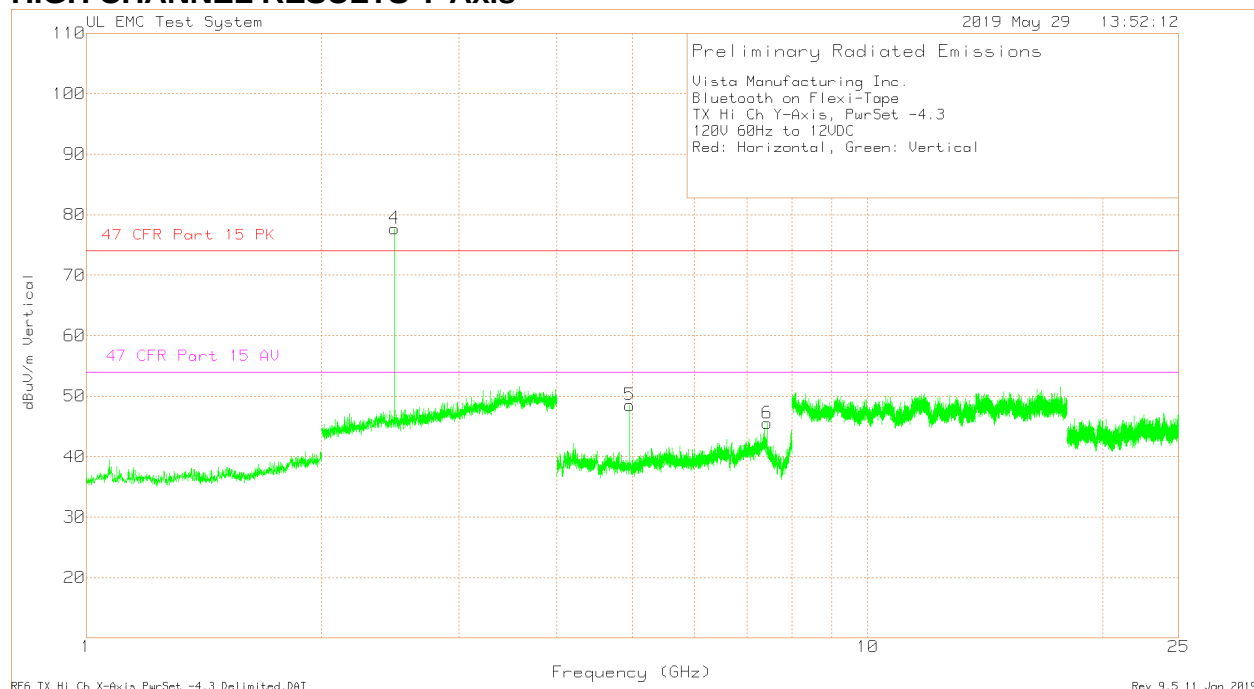

Vista Manufacturing Inc.													
Bluetooth on Flexi-Tape													
TX Hi Ch Y-Axis, PwrSet -4.3													
120V 60Hz to 12VDC													
Red: Horizontal, Green: Vertical													
Trace Markers													
Marker No.	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	2.48	57.18	Pk	22	4.52	83.7	-	-	-	-	0-360	150	H
2	4.961	75.44	Pk	27.8	-49.34	53.9	74	-20.1	54	-0.1	0-360	150	H
3	7.441	63.75	Pk	30.5	-46.59	47.66	74	-26.34	54	-6.34	0-360	150	H
4	2.48	51.21	Pk	22	4.52	77.73	-	-	-	-	0-360	150	V
5	4.961	70.04	Pk	27.8	-49.34	48.5	74	-25.5	54	-5.5	0-360	150	V
6	7.44	61.49	Pk	30.6	-46.58	45.51	74	-28.49	54	-8.49	0-360	150	V
Radiated Emission Data													
	Test Frequency (GHz)	Meter Reading (dBuV)	Detector	Antenna Factor dB/m	Path Factor dB	Level dBuV/m	Limit 47 CFR Part 15.209 PK	Margin (dB)	Limit 47 CFR Part 15.209 AV	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
	4.9597	74.05	Av	27.8	-49.52	52.33	74	-21.67	54	-1.67	141	114	H
Pk - Peak detector													
Av - PWR RMS Average													

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8


Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

RESULTS

10.1.1. AC Power Line Host

RESULTS LOW CHANNEL

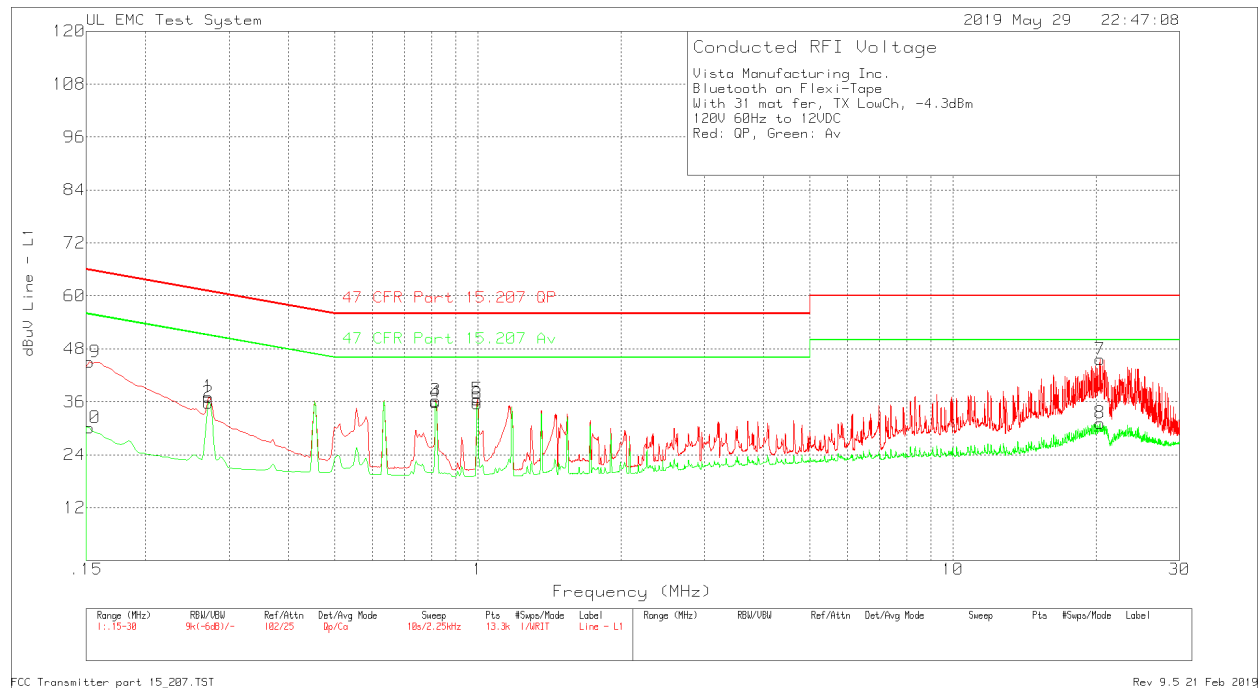

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
With 31 mat fer, TX LowCh, -4.3dBm
120V 60Hz to 12VDC
Red: QP, Green: Av


Trace Markers

Test No.	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1	2
=====							
Line							
1	.2715	26.1dBuV Qp	0	11	37.1	61.07	51.07
					Margin (dB)	-23.97	-13.97
2	.2715	24.81dBuV Ca	0	11	35.81	61.07	51.07
					Margin (dB)	-25.26	-15.26
3	.816	25.76dBuV Qp	0	10.5	36.26	56	46
					Margin (dB)	-19.74	-9.74
4	.816	25.36dBuV Ca	0	10.5	35.86	56	46
					Margin (dB)	-20.14	-10.14
5	.99825	26.04dBuV Qp	0	10.5	36.54	56	46
					Margin (dB)	-19.46	-9.46
6	.99825	25.03dBuV Ca	0	10.5	35.53	56	46
					Margin (dB)	-20.47	-10.47
7	20.38875	33.31dBuV Qp	.1	12.2	45.61	60	50
					Margin (dB)	-14.39	-4.39
8	20.3865	18.9dBuV Ca	.1	12.2	31.2	60	50
					Margin (dB)	-28.8	-18.8
19	.15225	30.19dBuV Qp	.1	14.7	44.99	65.88	55.88
					Margin (dB)	-20.89	-10.89
20	.15225	15.33dBuV Ca	.1	14.7	30.13	65.88	55.88
					Margin (dB)	-35.75	-25.75
Neutral							
9	.2715	27.77dBuV Qp	0	11	38.77	61.07	51.07
					Margin (dB)	-22.3	-12.3
10	.2715	25.55dBuV Ca	0	11	36.55	61.07	51.07
					Margin (dB)	-24.52	-14.52
11	.816	25.83dBuV Qp	0	10.5	36.33	56	46
					Margin (dB)	-19.67	-9.67
12	.816	25.33dBuV Ca	0	10.5	35.83	56	46
					Margin (dB)	-20.17	-10.17
13	.99825	27.68dBuV Qp	0	10.5	38.18	56	46
					Margin (dB)	-17.82	-7.82
14	.99825	25.27dBuV Ca	0	10.5	35.77	56	46
					Margin (dB)	-20.23	-10.23
15	20.3955	33.77dBuV Qp	0	12.1	45.87	60	50
					Margin (dB)	-14.13	-4.13
16	20.39325	19.26dBuV Ca	0	12.1	31.36	60	50
					Margin (dB)	-28.64	-18.64
17	.15225	30.79dBuV Qp	.1	14.7	45.59	65.88	55.88
					Margin (dB)	-20.29	-10.29
18	.15225	12.84dBuV Ca	.1	14.7	27.64	65.88	55.88
					Margin (dB)	-38.24	-28.24

LIMIT 1: 47 CFR Part 15.207 QP
LIMIT 2: 47 CFR Part 15.207 Av

Qp - Quasi-Peak detector
Ca - CISPR Average detection

RESULTS MIDDLE CHANNEL

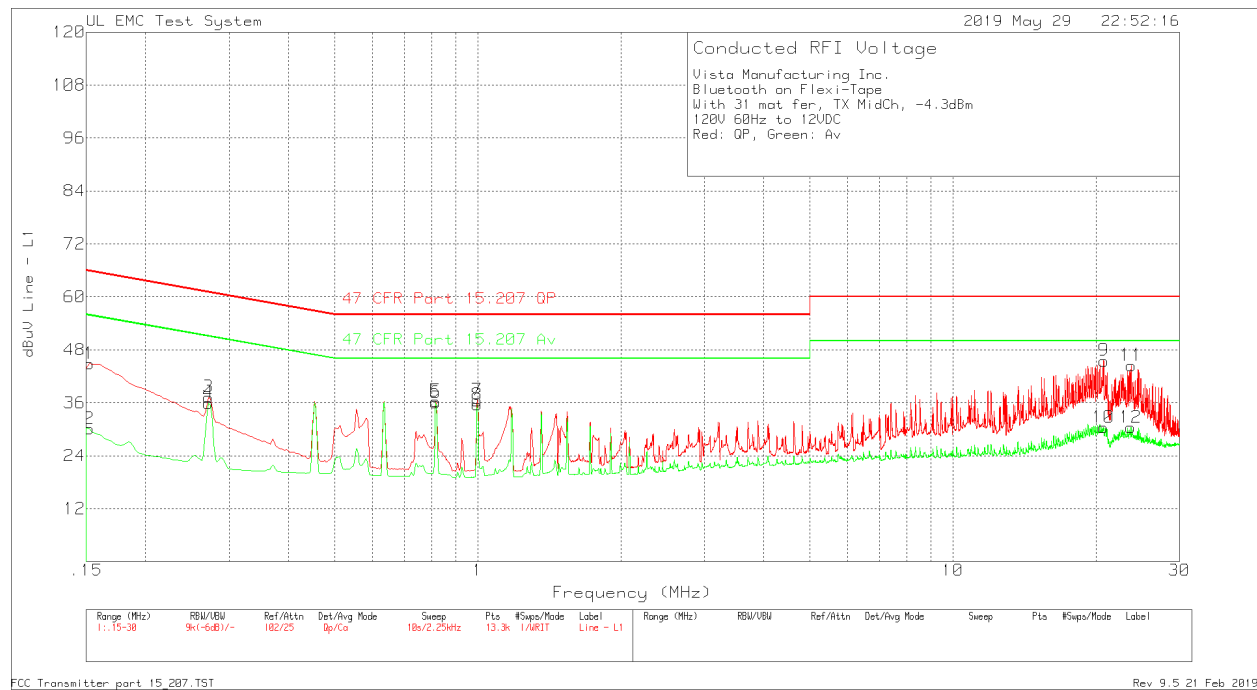

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
With 31 mat fer, TX MidCh, -4.3dBm
120V 60Hz to 12VDC
Red: QP, Green: Av



Trace Markers

Test No.	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1 dBuV	2
=====							
Line							
1	.15225	30.1dBuV Qp	.1	14.7	44.9	65.88	55.88
					Margin (dB)	-20.98	-10.98
2	.15225	15.35dBuV Ca	.1	14.7	30.15	65.88	55.88
					Margin (dB)	-35.73	-25.73
3	.2715	26.27dBuV Qp	0	11	37.27	61.07	51.07
					Margin (dB)	-23.8	-13.8
4	.2715	24.95dBuV Ca	0	11	35.95	61.07	51.07
					Margin (dB)	-25.12	-15.12
5	.816	25.85dBuV Qp	0	10.5	36.35	56	46
					Margin (dB)	-19.65	-9.65
6	.816	25.49dBuV Ca	0	10.5	35.99	56	46
					Margin (dB)	-20.01	-10.01
7	.99825	26.05dBuV Qp	0	10.5	36.55	56	46
					Margin (dB)	-19.45	-9.45
8	.99825	25.06dBuV Ca	0	10.5	35.56	56	46
					Margin (dB)	-20.44	-10.44
9	20.8095	33.23dBuV Qp	.1	12.2	45.53	60	50
					Margin (dB)	-14.47	-4.47
10	20.7285	18.08dBuV Ca	.1	12.2	30.38	60	50
					Margin (dB)	-29.62	-19.62
11	23.739	31.76dBuV Qp	.1	12.6	44.46	60	50
					Margin (dB)	-15.54	-5.54
12	23.685	17.71dBuV Ca	.1	12.6	30.41	60	50
					Margin (dB)	-29.59	-19.59
Neutral							
13	.15675	31.11dBuV Qp	.1	14.3	45.51	65.63	55.63
					Margin (dB)	-20.12	-10.12
14	.15225	12.86dBuV Ca	.1	14.7	27.66	65.88	55.88
					Margin (dB)	-38.22	-28.22
15	.2715	27.86dBuV Qp	0	11	38.86	61.07	51.07
					Margin (dB)	-22.21	-12.21
16	.2715	25.67dBuV Ca	0	11	36.67	61.07	51.07
					Margin (dB)	-24.4	-14.4
17	.816	25.9dBuV Qp	0	10.5	36.4	56	46
					Margin (dB)	-19.6	-9.6
18	.816	25.45dBuV Ca	0	10.5	35.95	56	46
					Margin (dB)	-20.05	-10.05
19	.99825	27.57dBuV Qp	0	10.5	38.07	56	46
					Margin (dB)	-17.93	-7.93
20	.99825	25.27dBuV Ca	0	10.5	35.77	56	46
					Margin (dB)	-20.23	-10.23
21	20.8005	34.03dBuV Qp	0	12.2	46.23	60	50
					Margin (dB)	-13.77	-3.77
22	20.7195	18.81dBuV Ca	0	12.2	31.01	60	50
					Margin (dB)	-28.99	-18.99
23	23.68275	33.93dBuV Qp	0	12.5	46.43	60	50
					Margin (dB)	-13.57	-3.57
24	23.676	19.06dBuV Ca	0	12.5	31.56	60	50
					Margin (dB)	-28.44	-18.44

LIMIT 1: 47 CFR Part 15.207 QP
LIMIT 2: 47 CFR Part 15.207 Av

Qp - Quasi-Peak detector
Ca - CISPR Average detection

RESULTS HIGH CHANNEL

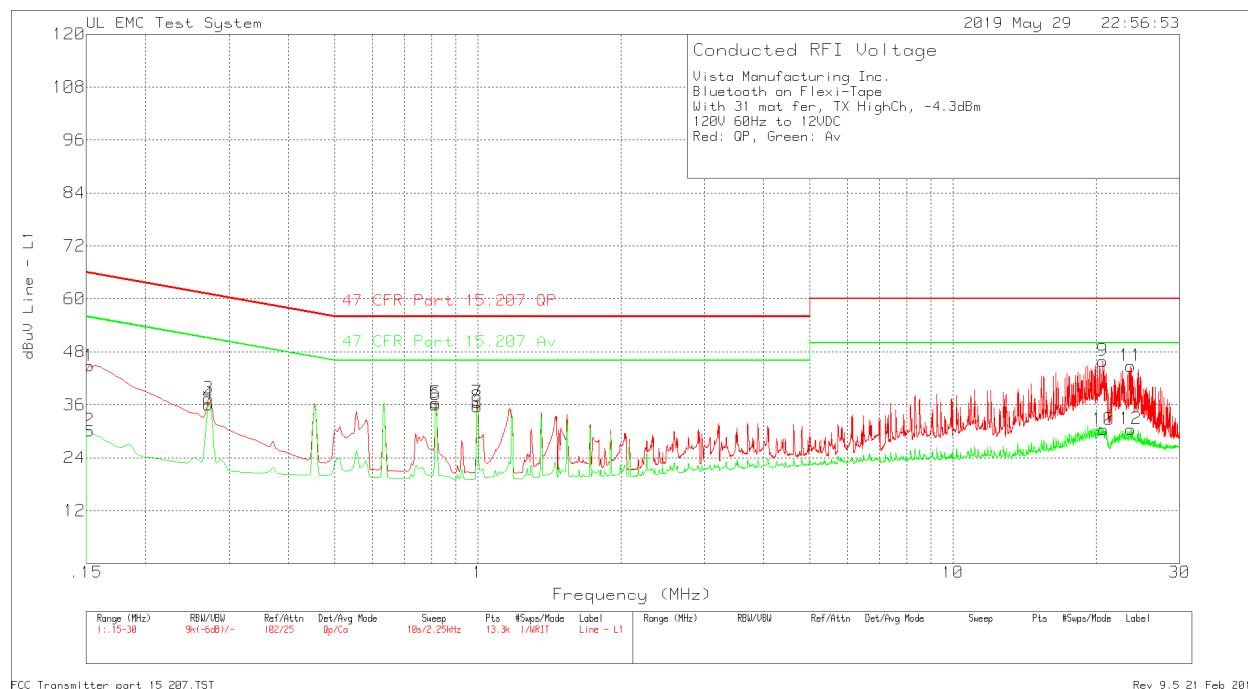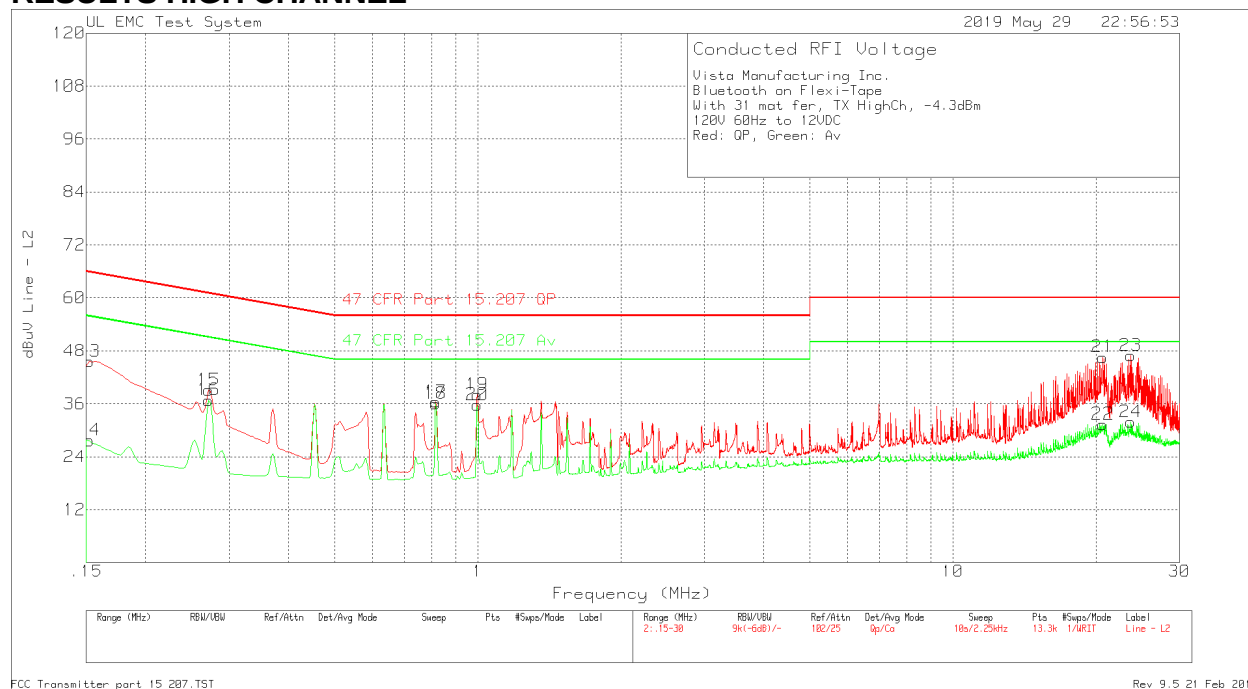

Vista Manufacturing Inc.
Bluetooth on Flexi-Tape
With 31 mat fer, TX HighCh, -4.3dBm
120V 60Hz to 12VDC
Red: QP, Green: Av

Trace Markers


Test No.	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1 dBuV	2
=====							
Line							
1	.15225	30.07dBuV Qp	.1	14.7	44.87	65.88	55.88
					Margin (dB)	-21.01	-11.01
2	.15225	15.38dBuV Ca	.1	14.7	30.18	65.88	55.88
					Margin (dB)	-35.7	-25.7
3	.2715	26.43dBuV Qp	0	11	37.43	61.07	51.07
					Margin (dB)	-23.64	-13.64
4	.2715	25.11dBuV Ca	0	11	36.11	61.07	51.07
					Margin (dB)	-24.96	-14.96
5	.816	25.94dBuV Qp	0	10.5	36.44	56	46
					Margin (dB)	-19.56	-9.56
6	.816	25.55dBuV Ca	0	10.5	36.05	56	46
					Margin (dB)	-19.95	-9.95
7	.99825	26.09dBuV Qp	0	10.5	36.59	56	46
					Margin (dB)	-19.41	-9.41
8	.99825	25.07dBuV Ca	0	10.5	35.57	56	46
					Margin (dB)	-20.43	-10.43
9	20.69475	33.67dBuV Qp	.1	12.2	45.97	60	50
					Margin (dB)	-14.03	-4.03
10	20.71275	18.13dBuV Ca	.1	12.2	30.43	60	50
					Margin (dB)	-29.57	-19.57
11	23.6715	32.1dBuV Qp	.1	12.6	44.8	60	50
					Margin (dB)	-15.2	-5.2
12	23.6715	17.79dBuV Ca	.1	12.6	30.49	60	50
					Margin (dB)	-29.51	-19.51
Neutral							
13	.15225	30.78dBuV Qp	.1	14.7	45.58	65.88	55.88
					Margin (dB)	-20.3	-10.3
14	.15225	12.89dBuV Ca	.1	14.7	27.69	65.88	55.88
					Margin (dB)	-38.19	-28.19
15	.2715	28.09dBuV Qp	0	11	39.09	61.07	51.07
					Margin (dB)	-21.98	-11.98
16	.2715	25.83dBuV Ca	0	11	36.83	61.07	51.07
					Margin (dB)	-24.24	-14.24
17	.816	25.97dBuV Qp	0	10.5	36.47	56	46
					Margin (dB)	-19.53	-9.53
18	.816	25.51dBuV Ca	0	10.5	36.01	56	46
					Margin (dB)	-19.99	-9.99
19	.99825	27.58dBuV Qp	0	10.5	38.08	56	46
					Margin (dB)	-17.92	-7.92
20	.99825	25.28dBuV Ca	0	10.5	35.78	56	46
					Margin (dB)	-20.22	-10.22
21	20.68125	34.36dBuV Qp	0	12.2	46.56	60	50
					Margin (dB)	-13.44	-3.44
22	20.6925	19.15dBuV Ca	0	12.2	31.35	60	50
					Margin (dB)	-28.65	-18.65
23	23.65575	34.41dBuV Qp	0	12.5	46.91	60	50
					Margin (dB)	-13.09	-3.09
24	23.6535	19.38dBuV Ca	0	12.5	31.88	60	50
					Margin (dB)	-28.12	-18.12

LIMIT 1: 47 CFR Part 15.207 QP
LIMIT 2: 47 CFR Part 15.207 Av


Qp - Quasi-Peak detector
Ca - CISPR Average detection

11. SETUP PHOTOS


Antenna Port Conducted Emissions

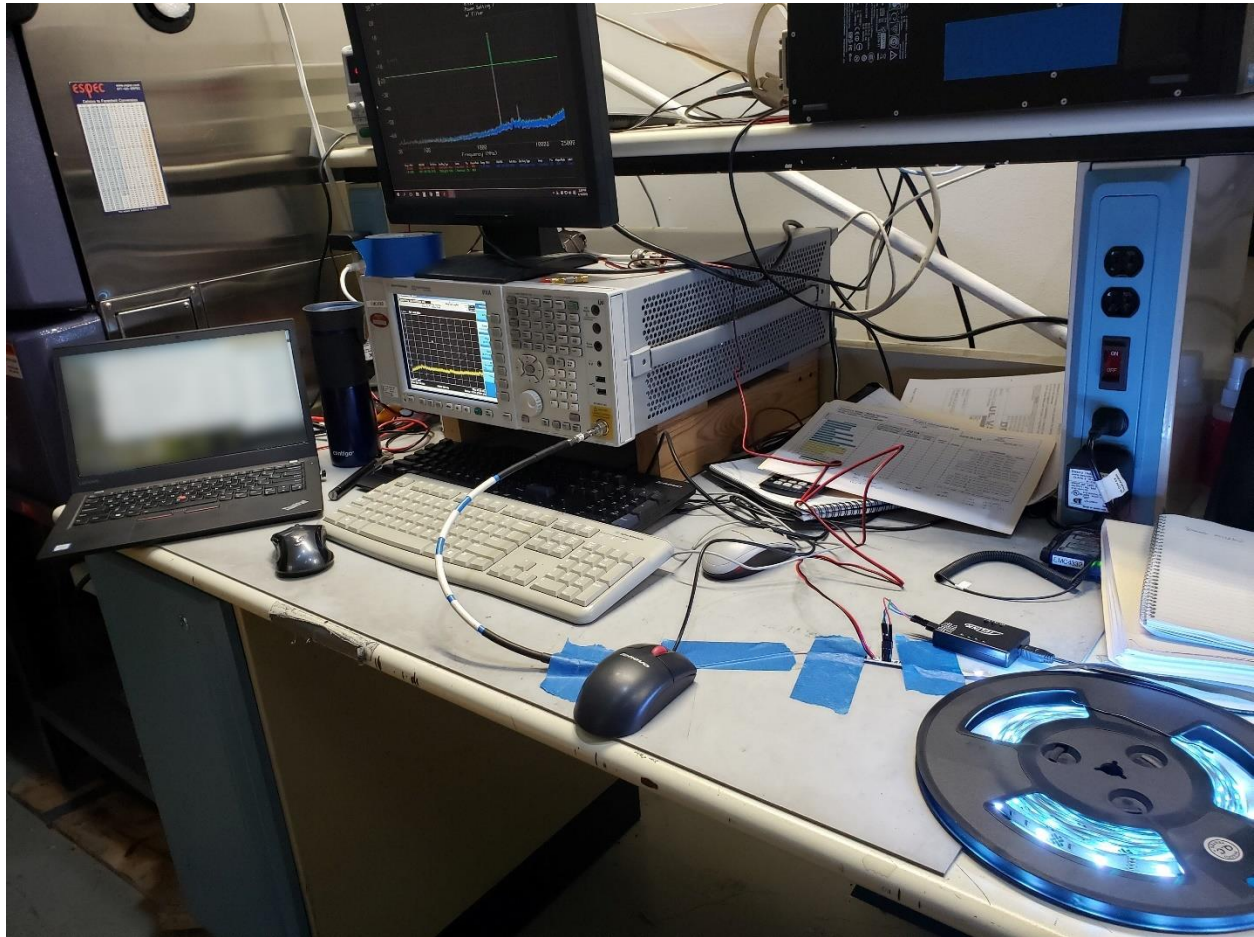


Radiated Emissions 9kHz-30MHz

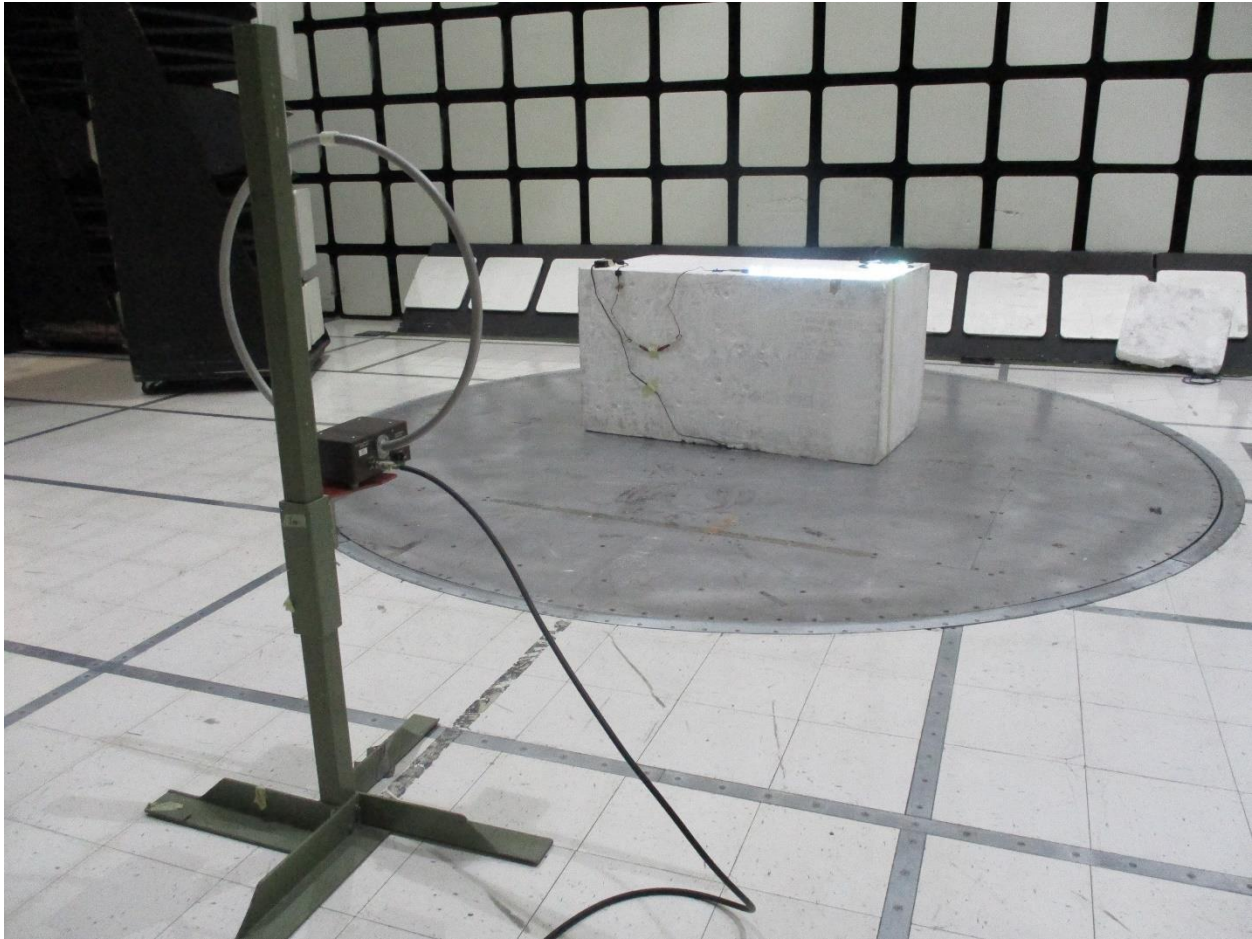


Radiated Emissions 30MHz-1GHz

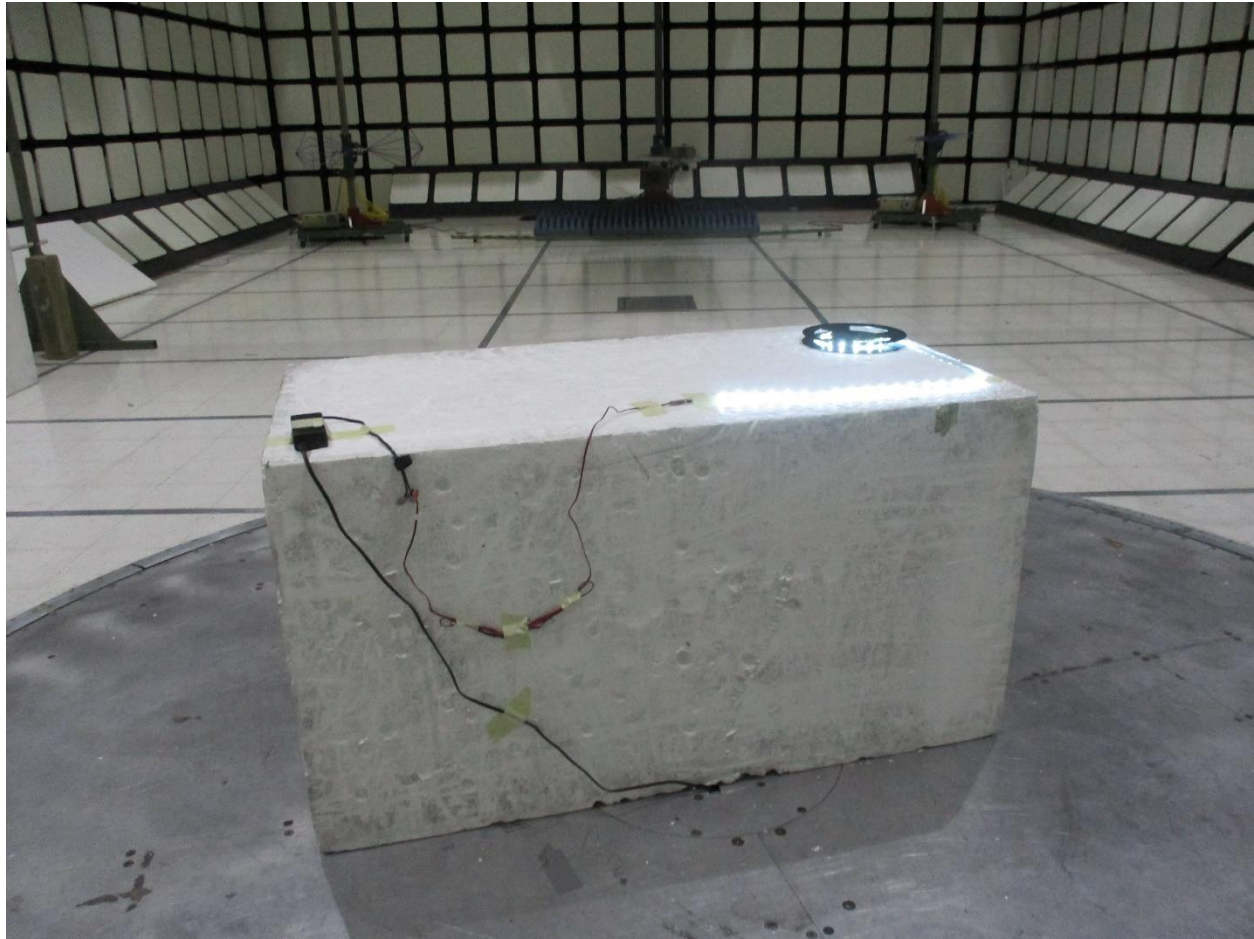

Radiated Emissions 1GHz-25GHz

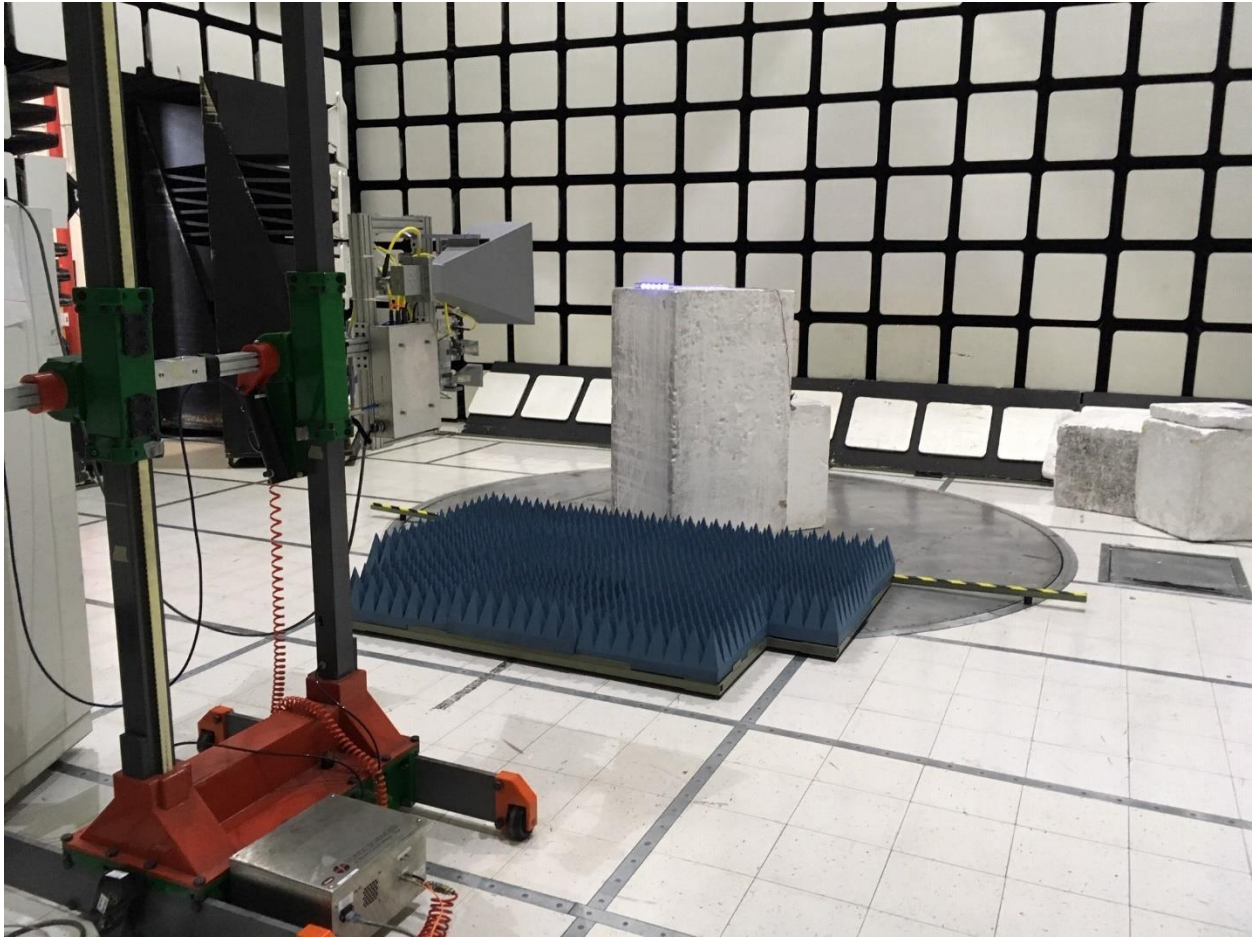

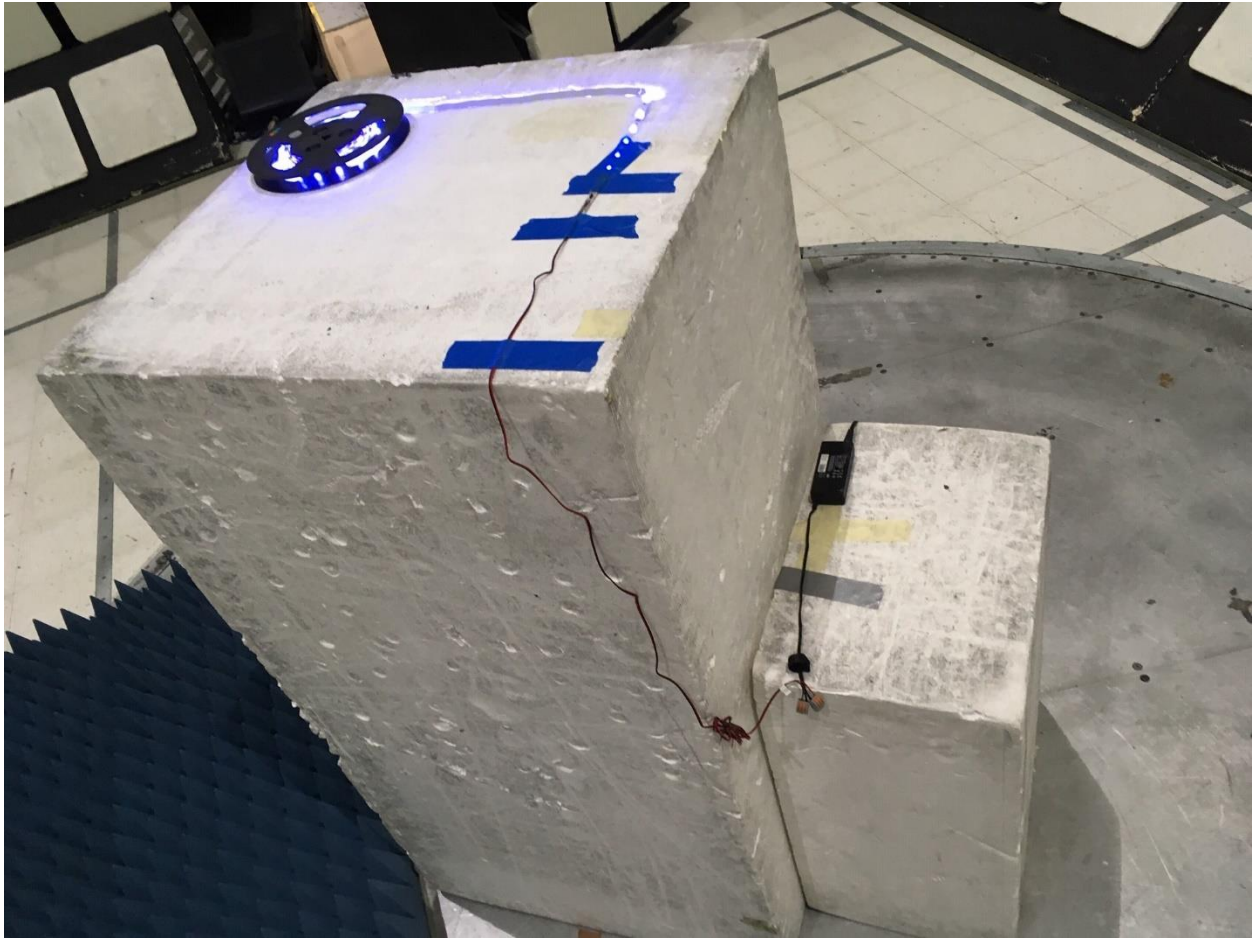

Line Conducted Emissions



END OF TEST REPORT