



Elliott Laboratories Inc.
www.elliottlabs.com

684 West Maude Avenue
Sunnyvale, CA 94086-3518

408-245-7800 Phone
408-245-3499 Fax

August 2, 2001

Chief, Equipment Authorization Branch,
Authorization and Evaluation Division,
Office of Engineering and Technology
FEDERAL COMMUNICATIONS COMMISSION
P.O. Box 358315
Pittsburgh, PA 15251-5315

Subject: FCC Part 15, Subpart E Specifications, CAWCB500

Gentlemen:

The enclosed documents constitute a formal submittal and application for a Grant of Equipment Authorization pursuant to Subpart E of Part 15 of FCC Rules (CFR 47) regarding intentional radiators. Data within this report demonstrates that the equipment tested complies with the FCC limits for intentional radiators.

Elliott Laboratories, as duly authorized agent prepared this submittal. A copy of the letter of our appointment as agent is enclosed.

If there are any questions or if further information is needed, please contact Elliott Laboratories for assistance.

Sincerely,

A handwritten signature in blue ink that reads "Mark Briggs".

Mark Briggs
Director of Engineering

MB/ pjp

Enclosures: Agent Authorization Letter
Emissions Test Report with Exhibits

***Electromagnetic Emissions Test Report
and
Application for Grant of Equipment Authorization
pursuant to
FCC Part 15, Subpart E Specifications for
Unlicensed National Information Infrastructure Devices
on the CardAccess
Model: CAWCB500***

FCC ID: MHI-CAWCB500


GRANTEE: CardAccess
837 South 500 West, Suite 200
Bountiful, UT 84010

TEST SITE: Elliott Laboratories, Inc.
684 W. Maude Avenue
Sunnyvale, CA 94086

REPORT DATE: July 26, 2001

FINAL TEST DATE: July 23, 2001

AUTHORIZED SIGNATORY:



Mark Briggs
Director of Engineering

This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

TABLE OF CONTENTS

COVER PAGE	1
TABLE OF CONTENTS	2
SCOPE	4
OBJECTIVE	4
STATEMENT OF COMPLIANCE	4
EMISSION TEST RESULTS	5
CONDUCTED INTERFERENCE VOLTAGE – AC POWER PORTS	5
OUTPUT POWER AND POWER SPECTRAL DENSITY - 15.407 (A).....	5
PEAK EXCURSION RATIO - 15.407 (A) (6).....	5
UNDESIRABLE EMISSIONS (SPURIOUS EMISSIONS) - 15.407 (B).....	6
AUTOMATIC DISCONTINUATION - 15.407 (C).....	6
ANTENNA REQUIREMENTS.....	6
INTERFERENCE TO CO-CHANNEL MSS OPERATIONS – 15.407(E).....	7
RADIO FREQUENCY RADIATION EXPOSURE REQUIREMENTS – 15.407(F).....	7
FREQUENCY STABILITY – 15.407(G).....	7
MEASUREMENT UNCERTAINTIES.....	7
EQUIPMENT UNDER TEST (EUT) DETAILS	8
GENERAL.....	8
ENCLOSURE.....	8
MODIFICATIONS.....	8
SUPPORT EQUIPMENT.....	8
EUT INTERFACE PORTS.....	9
EUT OPERATION.....	9
TEST SITE	10
GENERAL INFORMATION.....	10
CONDUCTED EMISSIONS CONSIDERATIONS.....	10
RADIATED EMISSIONS CONSIDERATIONS.....	10
MEASUREMENT INSTRUMENTATION	11
RECEIVER SYSTEM.....	11
INSTRUMENT CONTROL COMPUTER.....	11
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	11
POWER METER.....	12
FILTERS/ATTENUATORS.....	12
ANTENNAS.....	12
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	12
INSTRUMENT CALIBRATION.....	12
TEST PROCEDURES	13
EUT AND CABLE PLACEMENT.....	13
CONDUCTED EMISSIONS.....	13
RADIATED EMISSIONS.....	13
CONDUCTED EMISSIONS FROM ANTENNA PORT.....	14
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	15
OUTPUT POWER LIMITS, SECTION 15.407 (A).....	15
SPURIOUS RADIATED EMISSIONS LIMITS, SECTION 15.209.....	16
SPURIOUS EMISSIONS SPECIFICATION LIMITS, SECTION 15.407 (B).....	16
AC POWER PORT CONDUCTED EMISSIONS LIMITS, SECTION 15.207.....	17
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS.....	17

TABLE OF CONTENTS (Continued)

SAMPLE CALCULATIONS - RADIATED EMISSIONS18

EXHIBIT 1: Test Equipment Calibration Data..... 1

EXHIBIT 2: Test Data Log Sheets 2

EXHIBIT 3: Emissions Test Configuration Photographs 3

EXHIBIT 4: Proposed FCC ID Label & Label Location 4

EXHIBIT 5: Detailed Construction Photographs..... 5

EXHIBIT 6: Operator's Manual..... 6

EXHIBIT 7: Block Diagram..... 7

EXHIBIT 8: Schematic Diagrams..... 8

EXHIBIT 9: Theory of Operation..... 9

EXHIBIT 10: SAR Report..... 10

SCOPE

An electromagnetic emissions test has been performed on the CardAccess model CAWCB500 pursuant to Subpart E of Part 15 of FCC Rules for Unlicensed National Information Infrastructure Devices. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-1992 as outlined in Elliott Laboratories test procedures.

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the CardAccess model CAWCB500 and therefore apply only to the tested sample. The sample was selected and prepared by Quinn Kunz of CardAccess

OBJECTIVE

The primary objective of the manufacturer is compliance with Subpart E of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units subsequently manufactured.

STATEMENT OF COMPLIANCE

The tested sample of CardAccess model CAWCB500 complied with the requirements of Subpart E of Part 15 of the FCC Rules for Unlicensed National Information Infrastructure Devices. Maintenance of FCC compliance is the responsibility of the manufacturer. Any modification of the product may result in increased emissions and should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

EMISSION TEST RESULTS

The following emissions tests were performed on the CardAccess model CAWCB500. The actual test results are contained in an exhibit of this report.

CONDUCTED INTERFERENCE VOLTAGE - AC POWER PORTS

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.207.

The following measurement was extracted from the data recorded and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an exhibit of this report.

0.45 – 30 MHz						
Frequency MHz	Level dBuV	Power Lead	FCC 15.209 Limit	Margin	Detector Function	Comments
5.351	37.2	Neutral	48.0	-10.8	QP	

OUTPUT POWER AND POWER SPECTRAL DENSITY - 15.407 (a)

The EUT tested complied with the output power limits detailed in FCC Rules Part 15 Section 15.407 (a) (1) for intentional signals generated in the 5.15 – 5.25 GHz band. Given a minimum signal bandwidth of 27 MHz and a maximum antenna gain of 1.45 dBi the maximum permitted output power is 17 dBm (50 mW) and the maximum permitted power spectral density is 4dBm/MHz. The measured output power was 13.6 dBm (22.9 mW) and the measured power spectral density was -3.3dBm/MHz.

The EUT tested complied with the output power limits detailed in FCC Rules Part 15 Section 15.407 (a) (2) for intentional signals generated in the 5.25 – 5.35 GHz band. Given a minimum signal bandwidth of 27 MHz and a maximum antenna gain of 1.45 dBi the maximum permitted output power is 24 dBm (250 mW) and the maximum permitted power spectral density is 11dBm/MHz. The actual power measured was 12.5 dBm (17.8 mW) and the measured power spectral density was -3.4dBm/MHz.

PEAK EXCURSION RATIO - 15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope to the peak transmit power did not exceed the 13dB limit detailed in 15.407 (a) (6). The actual ratio measured was 9.8 dB.

UNDESIRABLE EMISSIONS (SPURIOUS EMISSIONS) - 15.407 (b)

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.407 (b) (1). For spurious emissions falling outside of restricted bands the eirp limit detailed and 15.407 (b) (1) was used. For emissions falling within the restricted bands defined in 15.205 the field strength limit of 15.209 was used.

Spurious emissions were initially measured directly via the antenna port. For signals close to the band edges of allocated UNII bands which fell into restricted bands the field strength was calculated by measuring the band edge signal levels relative to the fundamental signal level and then applying a correction factor to the measured peak and average values for the fundamental signal.

The following measurement was extracted from the data recorded and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an exhibit of this report.

Radiated Emissions 1 – 40 GHz

Frequency MHz	Level dBuV/m	Pol v/h	FCC Subpart E		Detector	Azimuth degrees	Height meters	Comments
			Limit	Margin				
10480.0	65.2	v	68.3	-3.1	Note 3	241	1.4	Not in restricted band

Spurious emissions in the 30MHz to 1GHz were measured while testing the digital device radiated emissions against the FCC Class B limits. The Digital device has been approved using the FCC's declaration of conformity procedure. The following measurement was extracted from the data recorded and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an exhibit of this report.

Radiated Emissions 30 – 1000 MHz

Frequency MHz	Level dBuV/m	Pol v/h	FCC Class B		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
959.995	41.9	v	46.0	-4.1	QP	50	4.7	Signal Sub

AUTOMATIC DISCONTINUATION - 15.407 (c)

Refer to the Theory of Operations for details as to how the device meets the requirements of 15.407(c) regarding automatically discontinuing transmission in case of either absence of information to transmit or operational failure.

ANTENNA REQUIREMENTS

As the device is intended to operate in the 15.15 – 15.35 GHz band an integral antenna as detailed in 15.407 (d) is required. The antenna for the device is an integral antenna that the end user cannot access. Further, the device is restricted to indoor-use only as detailed in the User's Manual and Theory of Operations, which are included with this application.

INTERFERENCE TO CO-CHANNEL MSS OPERATIONS – 15.407(e)

As the device is intended to operate in the 15.15 – 15.25 GHz band the requirements of 15.407(e) do not apply.

RADIO FREQUENCY RADIATION EXPOSURE REQUIREMENTS – 15.407(f)

Compliance with the rf exposure requirements have been demonstrated via an SAR evaluation. The SAR evaluation report has been included with this application.

FREQUENCY STABILITY – 15.407(g)

The Theory of Operations details the frequency stability and how it ensures that the intentional signals are maintained within the band of operation under all conditions of normal operation as specified in the users manual.

MEASUREMENT UNCERTAINTIES

ISO Guide 25 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.2

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The CardAccess model CAWCB500 is a PC Card bus standard UNII Radio designed to operate from 5.18 GHz to 5.32 GHz. The system is intended for indoor use only. Normally, the EUT would be placed in a laptop PC during normal use. The EUT was, therefore, placed in a laptop PC and treated as table-top equipment during testing to simulate the end user environment.

The sample was received and tested on July 23, 2001. The EUT consisted of the following component(s):

Manufacturer	Model	Description	Serial Number	FCC ID
Card Access	CAWCB500	PCMCIA Card	N/A	MHI-CAWCB500

ENCLOSURE

The EUT enclosure is primarily constructed of fabricated sheet steel. It measures approximately 7 cm wide by .5 cm deep by 10 cm high.

MODIFICATIONS

The EUT did not require modifications during testing in order to comply with the specifications.

SUPPORT EQUIPMENT

The following equipment was used as local support equipment for emissions testing:

Manufacturer	Model	Description	Serial Number	FCC ID
Dell	PP01L	Laptop PC	TW-0791UH-12800-OB4-3546	DoC
Hewlett Packard	2225C ThinkJet	Parallel Printer	2636S40326	DS16XU2225C
USRobotics	Pilot 5000	Palm Computing Platform	604719G68390	MQ90001

The PDA and printer were only used during the digital device emissions tests. To reduce absorption of the intentional signal from the system these were removed for measurements of the intentional signal and spurious signals above 1GHz..

EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length (m)
Laptop Serial	Palm Pilot	Serial	Shielded	2.0
Laptop Parallel	Printer	Parallel	Shielded	3.0

EUT OPERATION

During digital device emissions tests the EUT was transmitting at full power on the center channel (channel 12, 5240 MHz). The laptop was displaying a scrolling H pattern on its video screen and sending data to the printer.

During the spurious emissions measurements the EUT was transmitting at its highest output power on channel 6, 12 or 20 as detailed in the test data.

TEST SITE

GENERAL INFORMATION

Final test measurements were taken on July 23, 2001 at the Elliott Laboratories Open Area Test Site #4 and #1 located at 684 West Maude Avenue, Sunnyvale, California. The test sites contain separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4-1992. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

MEASUREMENT INSTRUMENTATION**RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde and Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

POWER METER

A power meter and thermister mount are used for all direct output power measurements from transmitters as they provide a broadband indication of the power output.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors programmed into the test receivers.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table-mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES**EUT AND CABLE PLACEMENT**

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

RADIATED EMISSIONS

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth results in the highest emission maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions which have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements are performed with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

Measurement bandwidths (video and resolution) are set in accordance with FCC procedures for the type of radio being tested.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions from the AC power port are given in units of microvolts, the limits for radiated electric field emissions are given in units of microvolts per meter at a specified test distance and the output power limits are given in terms of Watts, milliwatts or dBm. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp) the following formula is used to determine the field strength limit in terms of microvolts per meter at a distance of 3m from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{3} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For reference, converting the voltage and electric field strength specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. Conversion of power specification limits from linear units (in milliwatts) to decibel form (in dBm) is accomplished by taking the base ten logarithm, then multiplying by 10.

OUTPUT POWER LIMITS, SECTION 15.407 (a)

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 - 5250	200mW (17 dBm)	4 dBm/MHz
5250 - 5350	250 mW (24 dBm)	11 dBm/MHz
5725 - 5825	1 Watts (30 dBm)	17 dBm/MHz

For system using antennas with gains exceeding 6dBi, the output power and power spectral density limits are reduced by 1dB for every dB the antenna gain exceeds 6dBi.

Fixed point-to-point applications using the 5725 - 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

SPURIOUS RADIATED EMISSIONS LIMITS, SECTION 15.209

The table below shows the limits for unwanted (spurious) emissions falling in the restricted bands detailed in Part 15.205.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
0.009-0.490	$2400/F_{\text{KHz}} @ 300\text{m}$	$67.6-20*\log_{10}(F_{\text{KHz}}) @ 300\text{m}$
0.490-1.705	$24000/F_{\text{KHz}} @ 30\text{m}$	$87.6-20*\log_{10}(F_{\text{KHz}}) @ 30\text{m}$
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

SPURIOUS EMISSIONS SPECIFICATION LIMITS, SECTION 15.407 (b)

The table below shows the limits for unwanted (spurious) emissions outside of the allocated bands that do not fall in the restricted bands of 15.205.

Operating Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength At 3m (dBuV/m)
5150 - 5250	-27 dBm	68.3 dBuV/m
5250 - 5350	-27 dBm	68.3 dBuV/m
5725 - 5825	-27 dBm (note 1) -17 dBm (note 2)	68.3 dBuV/m 78.3 dBuV/m

Note 1: Applies to spurious signals separated by more than 10 MHz from the allocated band.

Note 2: Applies to spurious signals within 10 MHz of the allocated band.

AC POWER PORT CONDUCTED EMISSIONS LIMITS, SECTION 15.207

Frequency Range (MHz)	Limit (uV)	Limit (dBuV)
0.450 to 30.000	250	48

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - B = C$$

and

$$C - S = M$$

where:

R_r = Receiver Reading in dBuV

B = Broadband Correction Factor*

C = Corrected Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

- * Broadband Level - Per ANSI C63.4, 13 dB may be subtracted from the quasi-peak level if it is determined that the emission is broadband in nature. If the signal level in the average mode is six dB or more below the signal level in the peak mode, the emission is classified as broadband.

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

EXHIBIT 1: Test Equipment Calibration Data

Radio conducted antenna measurements, 23-Jul-01 05:28 PM**Engineer: Mark**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Hewlett Packard	Microwave EMI test system (SA40, 30Hz - 40GHz)	84125C	1149	12	2/5/2001	2/5/2002

Conducted and Radiated Emissions, 24-Jul-01 01:26 AM**Engineer: Vishal**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Elliott Laboratories	Biconical Antenna, 30-300 MHz	EL30.300	773	12	2/15/2001	2/15/2002
Elliott Laboratories	FCC / CISPR LISN	LISN-3, OATS	304	12	6/12/2000	6/12/2001
Elliott Laboratories	Log Periodic Antenna 300-1000 MHz	EL300.1000	297	12	1/2/2001	1/2/2002
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	372	12	6/13/2000	6/13/2001
Rohde & Schwarz	Test Receiver, 20-1300MHz	ESVP	213	12	11/10/2000	11/10/2001
Solar Electronics Co	LISN	8028-50-TS-24-BNC	904	12	5/18/2001	5/18/2002

Radiated Emissions, 1 - 40 GHz, 25-Jul-01 08:28 AM**Engineer: jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Hewlett Packard	Microwave EMI test system (SA40, 30Hz - 40GHz)	84125C	1149	12	2/5/2001	2/5/2002
Hewlett Packard	Preamplifier, 1-26.5 GHz	8449B	TY,84299	12	4/1/2001	4/1/2002
Hewlett Packard	Spectrum Analyzer, 9KHz - 22GHz	8593EM	1319	12	5/31/2001	5/31/2002
Emco	Horn Antenna, D. Ridge 1-18 GHz	3115	1242	12	9/28/2000	9/28/2001

EXHIBIT 2: Test Data Log Sheets

ELECTROMAGNETIC EMISSIONS

TEST LOG SHEETS

AND

MEASUREMENT DATA

T44187 34 Pages



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
		Proj Eng:	Mark Briggs
Contact:	Quinn		
Emissions Spec:	FCC Part 15 Subparts B and E	Class:	B
Immunity Spec:	N/A	Environment:	-

EMC Test Data

For The

CardAccess

Model

CAWCB500



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Emissions Spec:	FCC Part 15 Subparts B and E	Class:	B
Immunity Spec:	N/A	Environment:	-

EUT INFORMATION

General Description

The EUT is a PC Card bus standard UNII Radio which is designed to operate from 5.18 GHz to 5.32 GHz. The system is intended for indoor use only. Normally, the EUT would be placed in a laptop PC during normal use. The EUT was, therefore, placed in a laptop PC and treated as table-top equipment during testing to simulate the end user environment.

Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Card Access	CAWCB500	CardBus UNII Radio	N/A	MHI-CAWCB500

EUT Enclosure

The EUT enclosure is primarily constructed of fabricated sheet steel. It measures approximately 7 cm wide by .5 cm deep by 10 cm high.

Modification History

Mod. #	Test	Date	Modification
1			



EMC Test Data

Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
Contact: Quinn	Proj Eng: Mark Briggs
Emissions Spec: FCC Part 15 Subparts B and E	Class: B
Immunity Spec: N/A	Environment: -

Test Configuration #1

Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
Dell	PP01L	Laptop PC	TW-0791UH-12800-OB4 3546	DoC
Hewlett Packard	2225C ThinkJet	Parallel Printer -ac	2636S40326	DS16XU2225C
USRobotics	Pilot 5000	Palm Computing Platform	604719G68390	MQ90001

Note: The printer and Palm pilot were not used during the emissions tests for the radio. They were only used for the digital device radiated emissions and for conducted emissions.

Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None				

Interface Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Laptop Serial	Palm Pilot	Serial	Shielded	2
Laptop Parallel	Printer	Parallel	Shielded	3

EUT Operation During Emissions (Digital Device)

The EUT was transmitting at full power on the center channel (channel 12, 5240 MHz). The laptop was displaying a scrolling H pattern on its video screen and sending data to the printer.

EUT Operation During Emissions (Radio)

The radio was transmitting at full power on the specified channel with a duty cycle of 99% (maximum allowed).



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
		Proj Eng:	Mark Briggs
Contact:	Quinn		
Spec:	FCC Part 15 Subparts B and E	Class:	B

FCC Part 15 Subpart E Tests

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test:	7/23/2001 & 7/24/2001
Test Engineer:	Mark Briggs & Jmartinez
Test Location:	Chamber #2 & SVOATS# 4

Config. Used: #1
 Config Change: Printer and PDA disconnected
 Host Unit Voltage 120V/60Hz

General Test Configuration

The EUT was located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT unless stated otherwise.

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators and cables used.

Ambient Conditions: Temperature: 17°C
 Rel. Humidity: 72%

Summary of Results

Run #	Test Performed	Limit	Result	Comments
1	Output Power	15.407(a) (1), (2)	Pass	3.4dB below maximum permitted output power
2	Power Spectral Density (PSD)	15.407(a) (1), (2)	Pass	7.3db below the maximum permitted
3	26dB Bandwidth	15.407	Pass	
4	Peak Excursion Envelope	15.407(a) (6)	Pass	3.2dB below maximum permitted excursion of 13dB.
5	Antenna Conducted - Out of Band Spurious	15.407(b)	Pass	-
6	RE, 1000 - 40000 MHz - Spurious Emissions	15.407(b)(6)	Pass	-



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Run #1: Output Power

The radio utilizes an integral antenna with a gain of approximately 1.45 dBi.

Maximum Antenna Gain: 1.45 dBi

Channel	Frequency (MHz)	99.7% Signal BW	Output Power	FCC Limit (dBm) (note 2)	Comments
Low	5180	36.8 MHz	13.0	17.0	Note 2
Low	5180	36.8 MHz	13.6	17.0	Note 1
Center	5240	27.8 MHz	12.5	17.0	Note 2
Center	5240	27.8 MHz	11.3	17.0	Note 1
High	5320	27.2 MHz	12.5	24.0	Note 2
High	5320	27.2 MHz	11.2	24.0	Note 1

Note 1: Measured using spectrum analyzer's power measurement function (RBW = 1MHz, VBW = 30kHz)

Note 2: Measured using a Boonton Power Meter with an average (thermal/diode) sensor

Note 2: RSS 210 limit is 23dBm in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit.

Run #2: Power Spectral Density



Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	FCC Limit (dBm)	Graph Reference	
Low	5180	-3.8	4.0	T44187/001	See note
Center	5240	-3.3	4.0	T44187/002	See note
High	5320	-3.4	11.0	T44187/003	See note

Note: The above measurements were made using RBW = 1MHz, VBW = 3MHz, video averaging on. To demonstrate compliance with RSS 210, the peak PSD was also measured using RBW= VBW=1MHz, video averaging off during the peak excursion measurements (run #4). The peak PSD of 6.7dBm did not exceed the maximum permitted average PSD of 10dBm (5.15 to 5.25 GHz band) or 11dBm (5.25-5.35GHz band) so no restriction is placed on the output power or average PSD with respect to RSS 210.



EMC Test Data


Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
Contact: Quinn	Proj Eng: Mark Briggs
Spec: FCC Part 15 Subparts B and E	Class: B

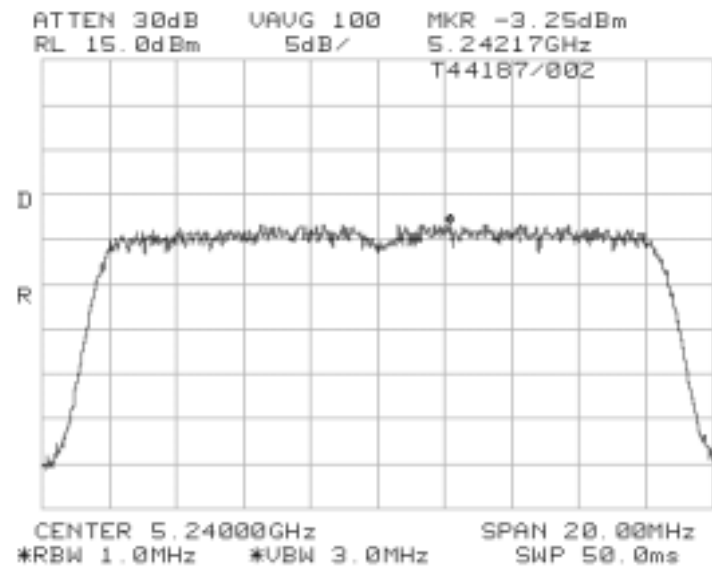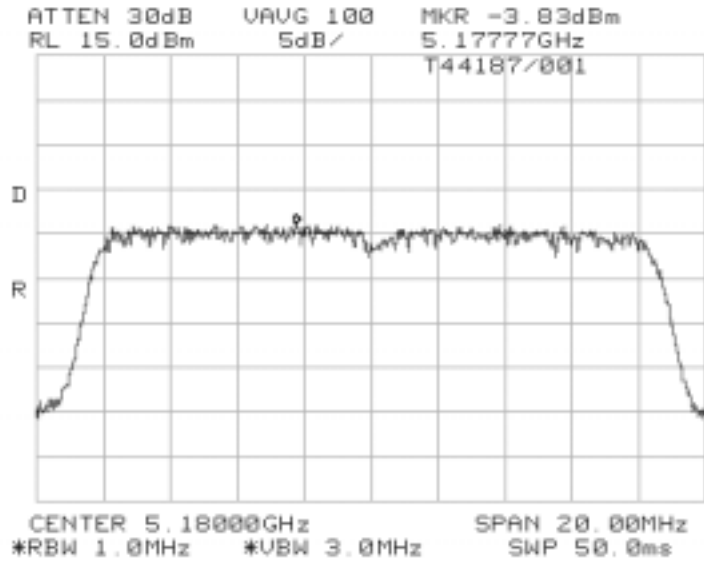



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

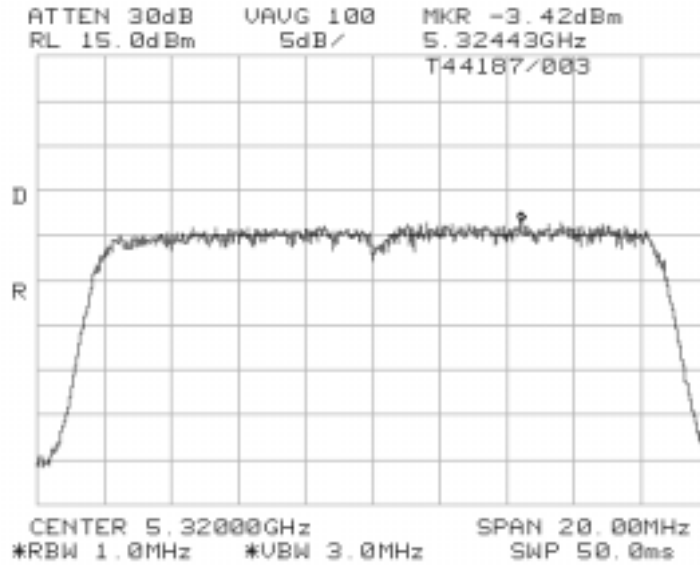



Run #3: Signal Bandwidth

Channel	Frequency (MHz)	Resolution Bandwidth	26dB Signal Bandwidth	Graph reference #
6	5180	300 kHz	36.8 MHz	See below
12	5240	300 kHz	27.8 MHz	See below
20	5320	300 kHz	27.2 MHz	See below



EMC Test Data


Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
Contact: Quinn	Proj Eng: Mark Briggs
Spec: FCC Part 15 Subparts B and E	Class: B

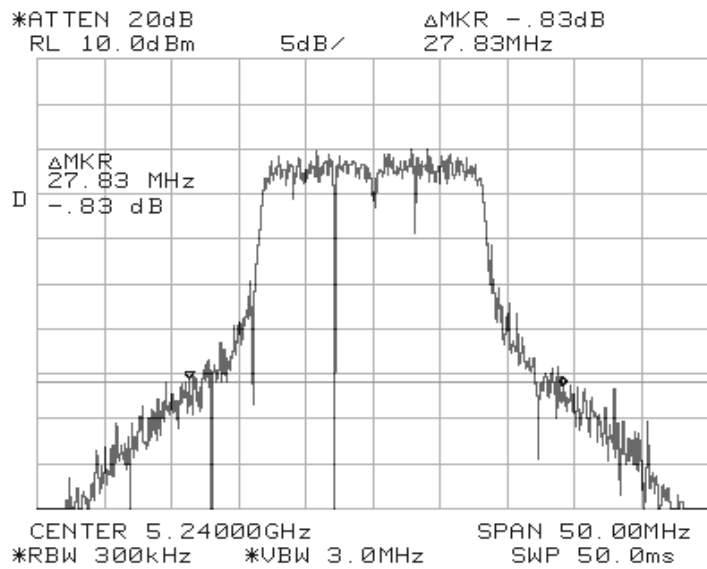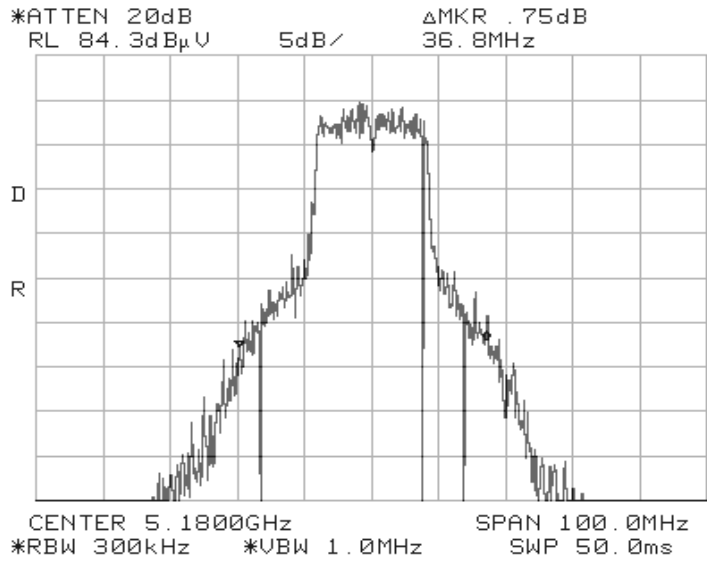



EMC Test Data

Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
Contact: Quinn	Proj Eng: Mark Briggs
Spec: FCC Part 15 Subparts B and E	Class: B

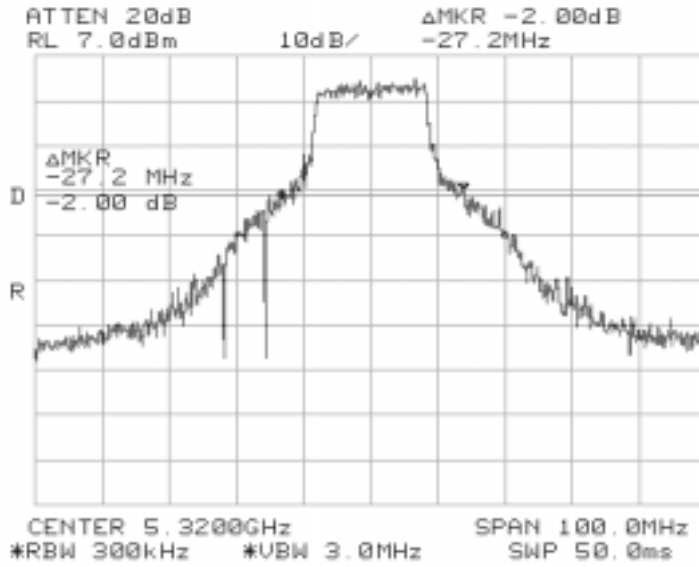




EMC Test Data

Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
Contact: Quinn	Proj Eng: Mark Briggs
Spec: FCC Part 15 Subparts B and E	Class: B


Run #4: Peak Excursion Measurement

The plots below show that the peak excursion was less than 13dB on all three channels tested.

Peak Excursion = 9.8 dB.

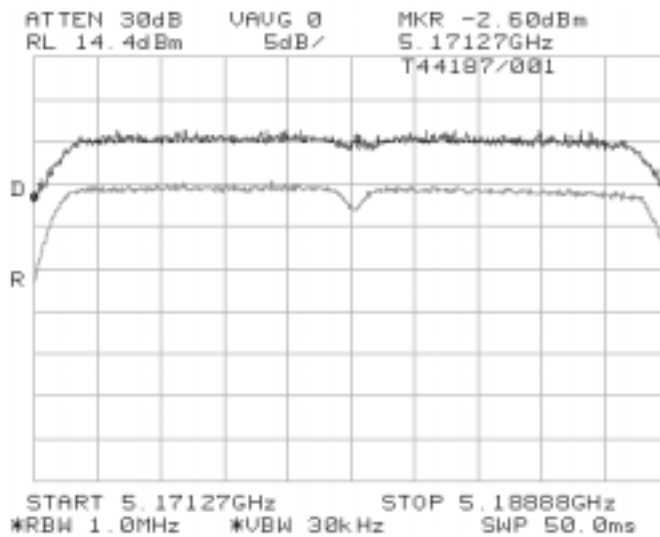

Peak Excursion = 8.8 dB.

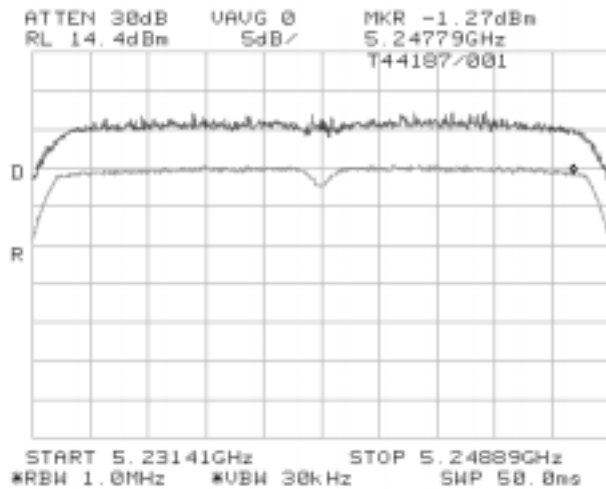




EMC Test Data

Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
	Proj Eng: Mark Briggs
Contact: Quinn	
Spec: FCC Part 15 Subparts B and E	Class: B

Peak Excursion = 9.0 dB.

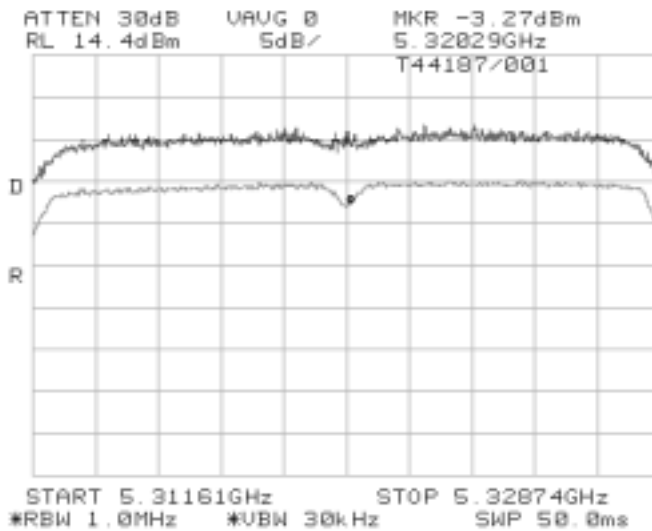



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

Run #5: Out Of Band Spurious Emissions - Antenna Conducted


The antenna gain of the radios integral antenna is 1.45dBi. The EIRP limit is -27dBm/MHz for all out of band signals that do not fall in restricted bands. A limit of -28.5 dBm was, therefore, used for signals not in restricted bands and close to the intentional band with the assumption that the antenna gain was equal to 1.45 within 100 MHz of the upper and lower band edges. For signals removed from the band edge by more than 100MHz, radiated measurements were made (refer to run #6) if the signal amplitude exceeded -37dBm.

Channel	Frequency (MHz)	Frequency Range	Highest Spurious Signal	Graph reference #
6	5180	1 to 5.2 GHz	-51.5dBm @ 4143 MHz (Note 1)	T44187/501
		5.3 to 10 GHz	-46.8dBm @ 6216 MHz (Note 2)	T44187/502
		10 GHz to 20 GHz	-42 dBm @ 10.36 GHz (Note 3)	T44187/503
		20 GHz to 40 GHz	No significant signals observed	T44187/504
		30 MHz to 1 GHz	Note 4	T44187/505
20	5320	1 to 5.2 GHz	-45.2 dBm @ 4255 MHz (Note 1)	T44187/506
		5.3 to 10 GHz	-55.7 dBm @ 6381 MHz (Note 2)	T44187/507
		10 GHz to 20 GHz	-56.2dBm @ 10.6GHz; 66dBm @15.9GHz (Note 2)	T44187/508
		20 GHz to 40 GHz	-67.2dBm @ 21.2GHz (Note 2)	T44187/509
		30 MHz to 1 GHz	Note 4	T44187/510
12	5240	1 to 5.2 GHz	-46.8 dBm @ 4.19GHz (Note 1)	T44187/511
		5.3 to 10 GHz	-49.8dBm @ 6.29GHz (Note 2)	T44187/512
		10 GHz to 20 GHz	-38.3dBm @ 10.5GHz (Note 2); -65dBm @15.7GHz (Note 1)	T44187/513
		20 GHz to 40 GHz	-66.8dBm @ 20.9GHz (Note 1)	T44187/514
		30 MHz to 1 GHz	Note 4	T44187/515



EMC Test Data



Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B
Note 1:	Signal is in a restricted band. Refer to run #6 for field strength measurements.		
Note 2:	Signal is not in restricted band. Limit is -27dBm eirp. As the signal strength is significantly lower than -27dBm no field strength measurements required.		
Note 3:	Signal is not in restricted band. Limit is -27dBm eirp (approx 68dBuV/m). Refer to run #5 for field strength measurement.		
Note 4:	Signals in this frequency band measured during digital device radiated emissions test.		

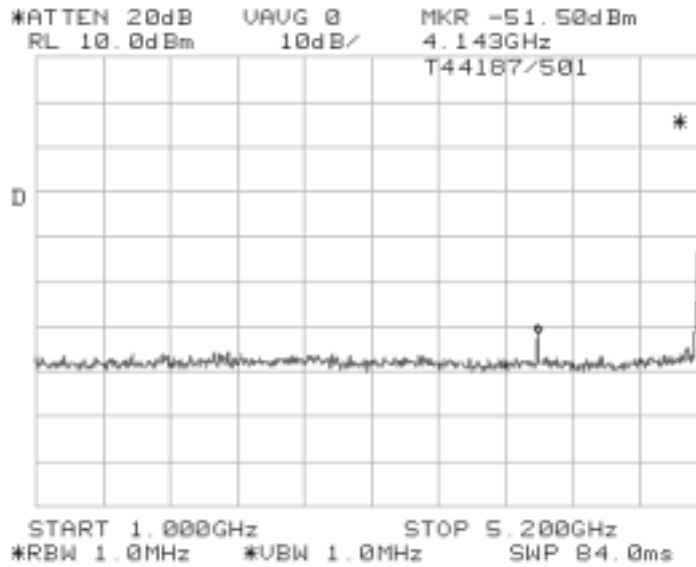



EMC Test Data



Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

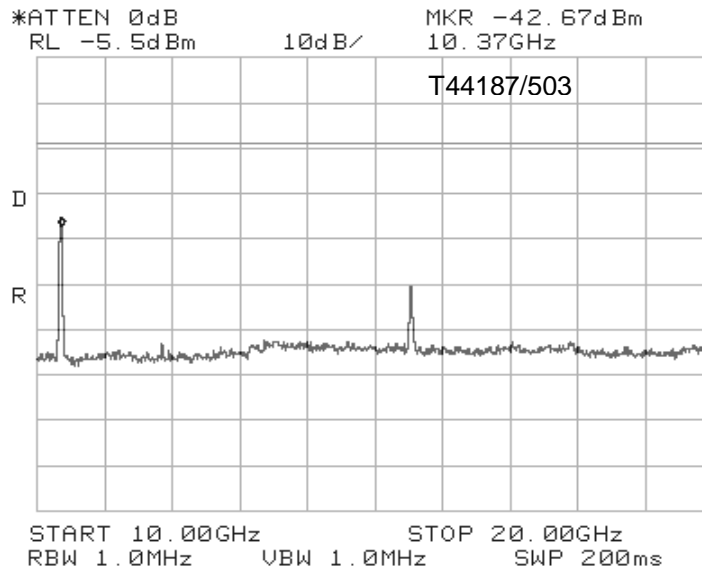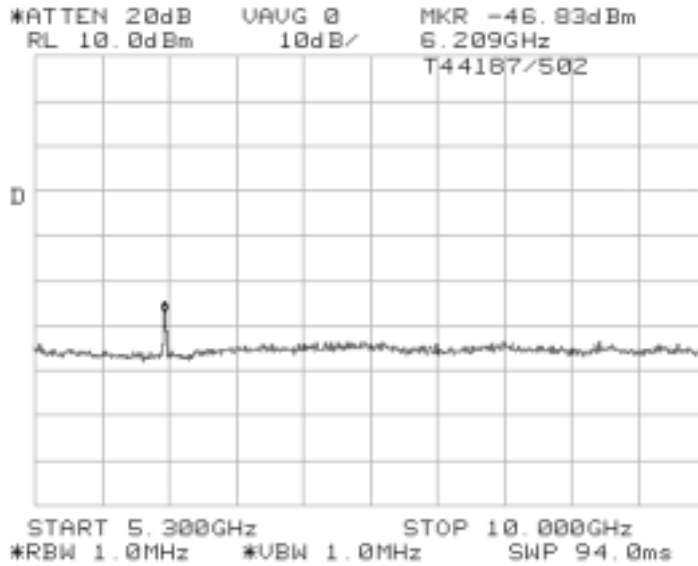



EMC Test Data



Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
Contact: Quinn	Proj Eng: Mark Briggs
Spec: FCC Part 15 Subparts B and E	Class: B

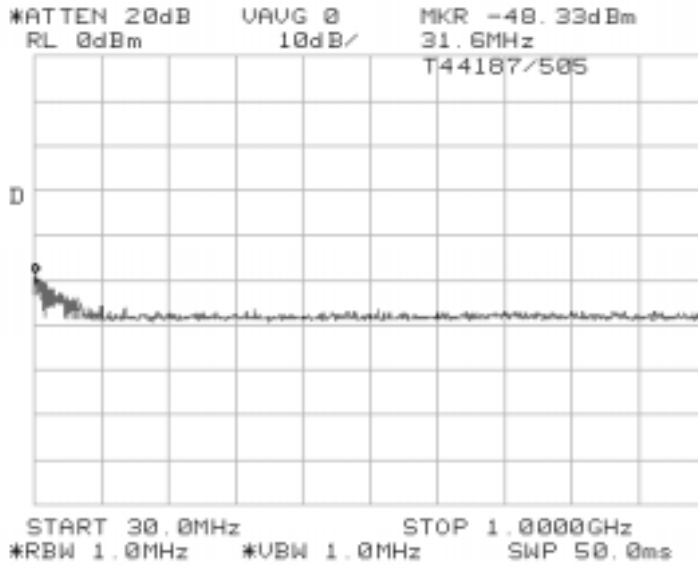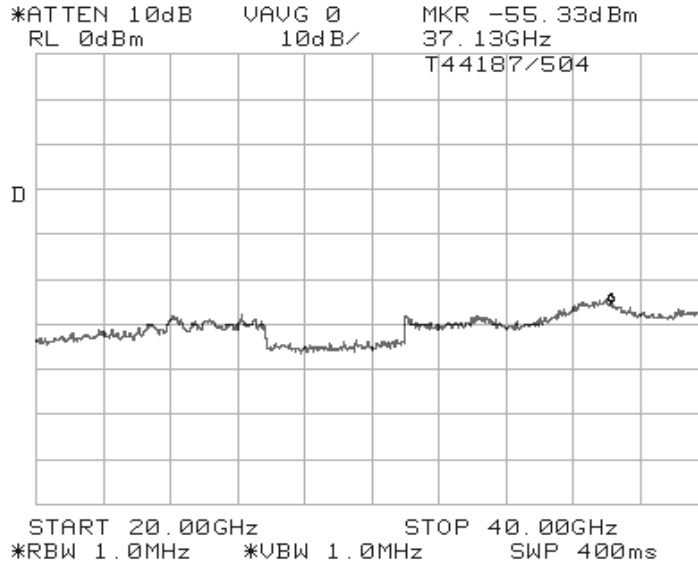



EMC Test Data



Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
Contact: Quinn	Proj Eng: Mark Briggs
Spec: FCC Part 15 Subparts B and E	Class: B

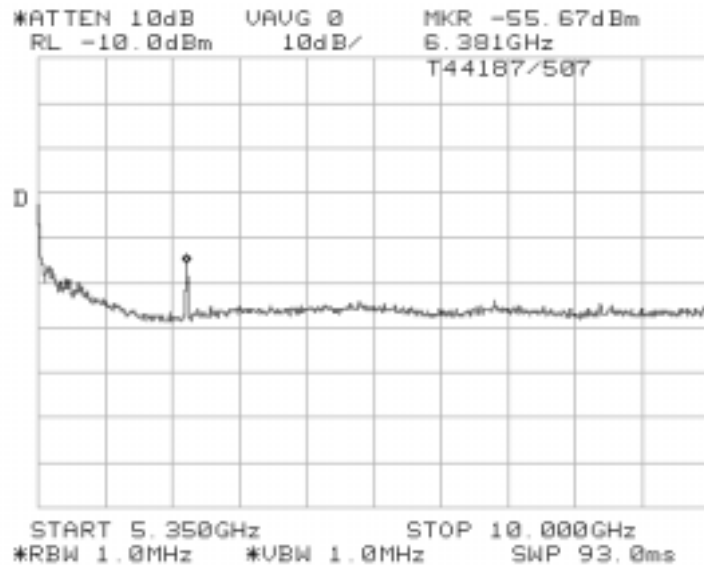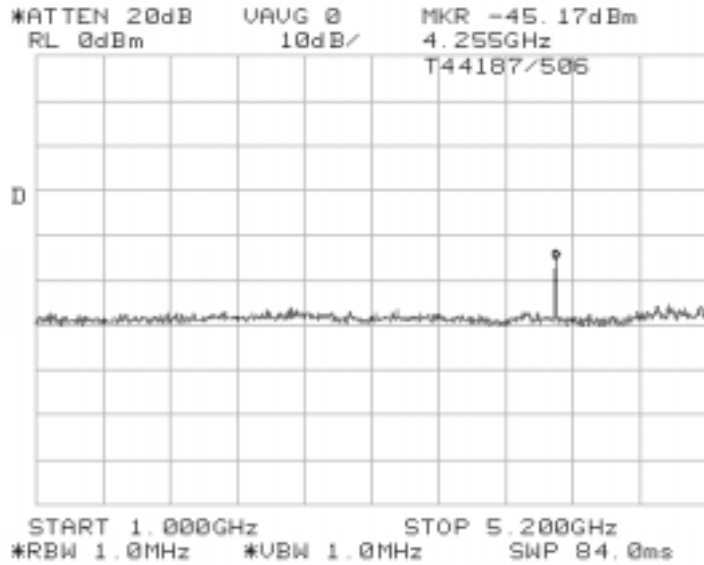



EMC Test Data



Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
	Proj Eng: Mark Briggs
Contact: Quinn	
Spec: FCC Part 15 Subparts B and E	Class: B

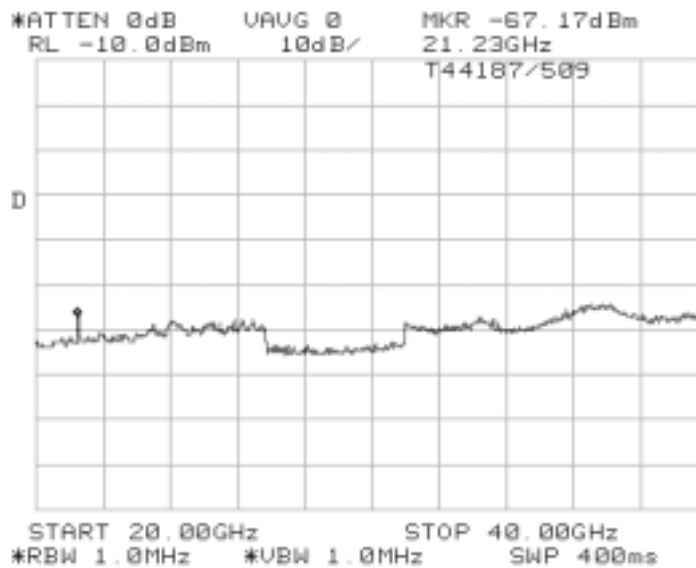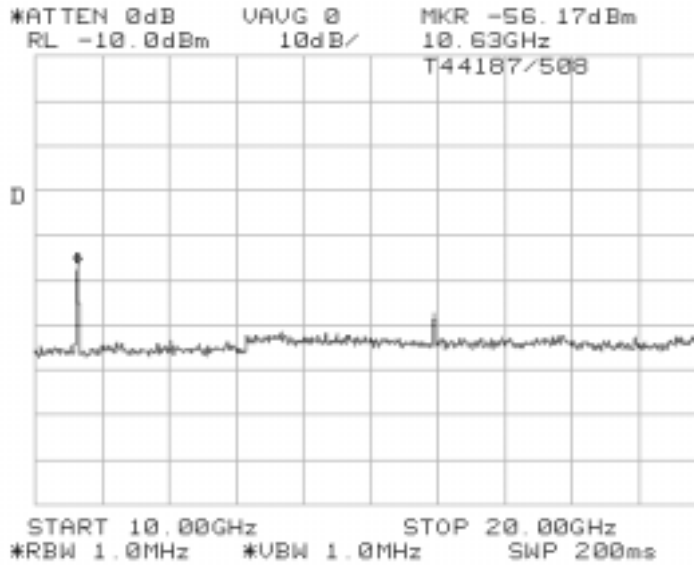



EMC Test Data



Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
	Proj Eng: Mark Briggs
Contact: Quinn	
Spec: FCC Part 15 Subparts B and E	Class: B

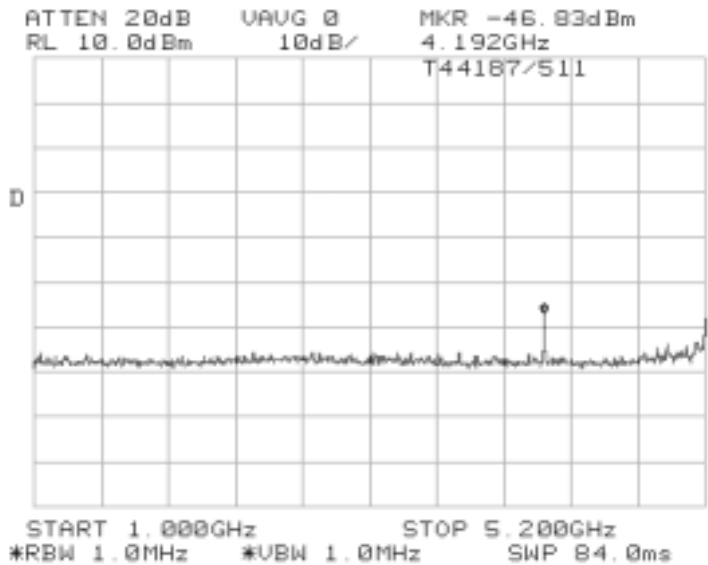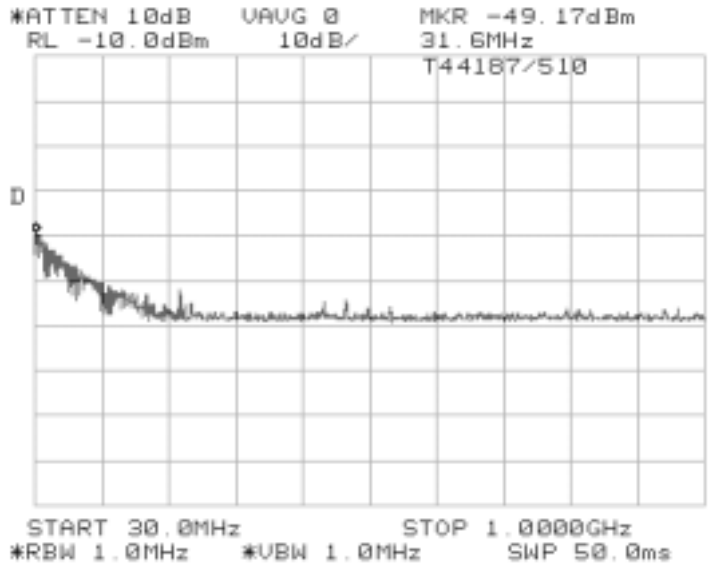



EMC Test Data



Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
Contact: Quinn	Proj Eng: Mark Briggs
Spec: FCC Part 15 Subparts B and E	Class: B

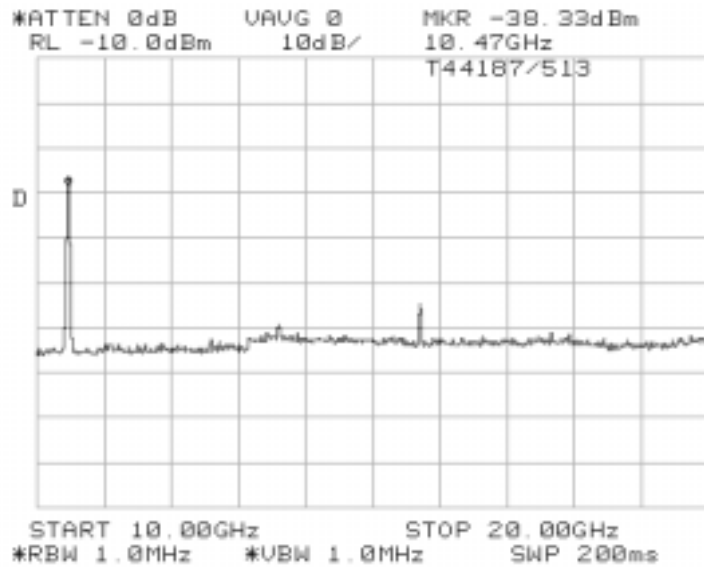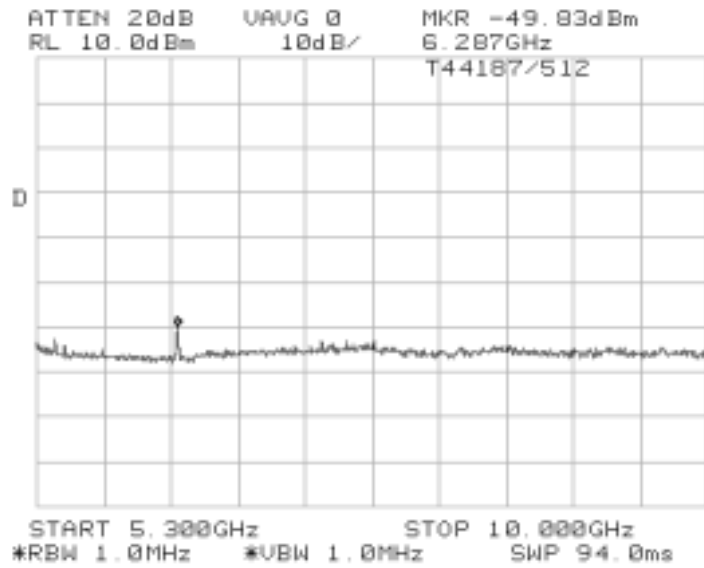



EMC Test Data

Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
Contact: Quinn	Proj Eng: Mark Briggs
Spec: FCC Part 15 Subparts B and E	Class: B

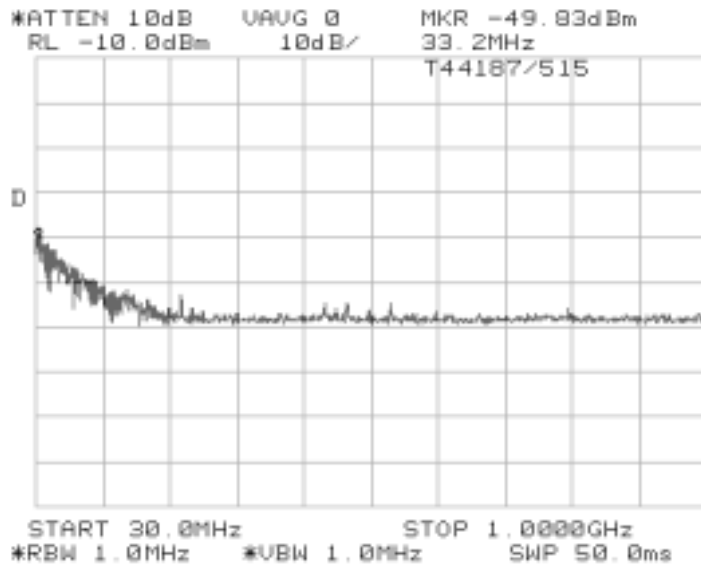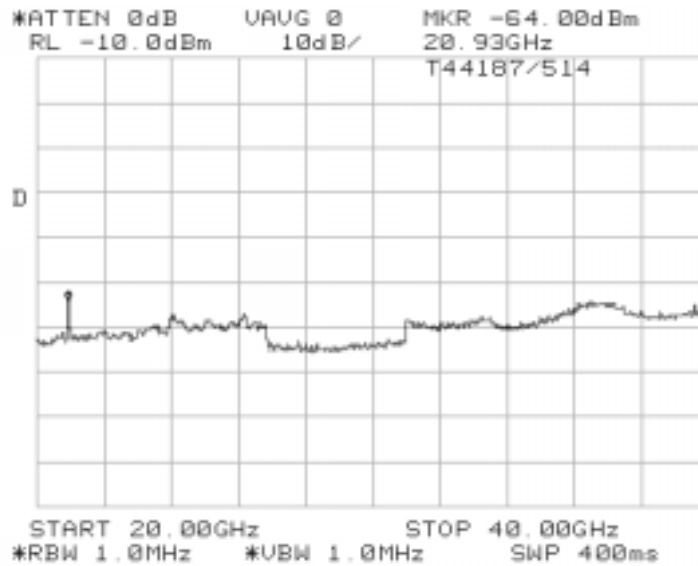



EMC Test Data



Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

Band Edge Measurements:

For signals in the restricted bands immediately above and below the 5.15 to 5.35 GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was then applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

5.15 GHz band edge EUT operating on channel 6 (lowest channel):

The highest signal in the 4.5 to 5.15 GHz band was -36dBc (Peak) / -46.3dBc (Average)

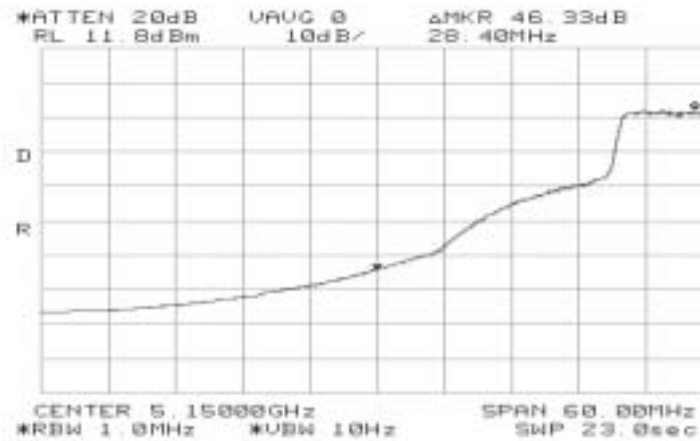
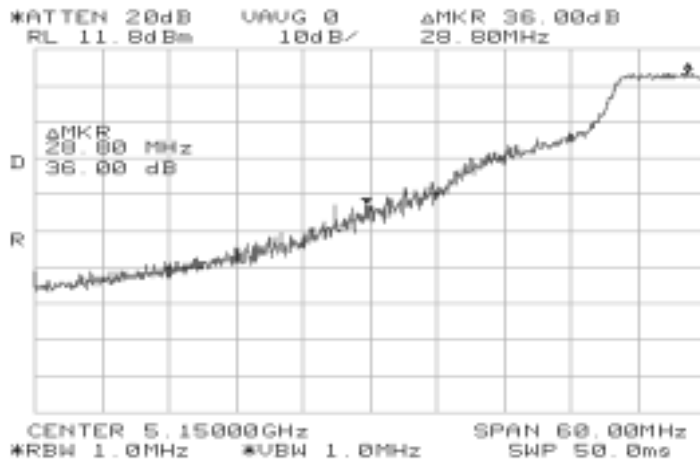




EMC Test Data

Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
	Proj Eng: Mark Briggs
Contact: Quinn	
Spec: FCC Part 15 Subparts B and E	Class: B

5.35 GHz band edge EUT operating on channel 20 (highest channel):
The highest signal in the 5.35 to 5.46 GHz band was -42.7dBc (Peak) / - 51.5dBc (Average)

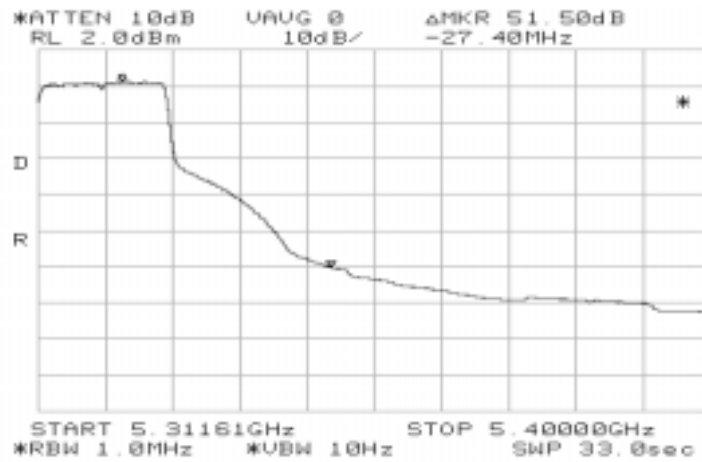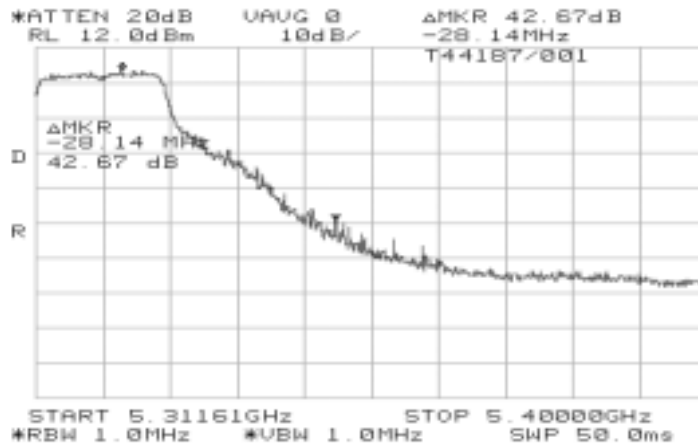



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

Run #6: Radiated Spurious Emissions, 1000 - 40000 MHz

Spurious emissions from 30 - 1000 MHz were measured while performing emissions measurements of the digital device. The emissions were below the FCC Class B limit.

Limit for emissions in restricted bands:	54dBuV/m (Average)	74dBuV/m (Peak)
Limit for emissions outside of restricted bands:	EIRP < -27dBm/MHz	

Fundamental signal measurements (to calculate the band edge field strengths):

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5180.0	106.4	v	-	-	Pk	208	2.0	RBW = VBW = 1 MHz
5180.0	96.3	v	-	-	Avg	208	2.0	RBW = 1MHz, VBW = 10Hz
5180.0	100.9	h	-	-	Pk	143	1.7	RBW = VBW = 1 MHz
5180.0	90.0	h	-	-	Avg	143	1.7	RBW = 1MHz, VBW = 10Hz
5320.0	105.8	v	-	-	Pk	224	1.4	RBW = VBW = 1 MHz
5320.0	94.3	v	-	-	Avg	224	1.4	RBW = 1MHz, VBW = 10Hz
5320.0	100.5	h	-	-	Pk	168	1.6	RBW = VBW = 1 MHz
5320.0	89.5	h	-	-	Avg	168	1.6	RBW = 1MHz, VBW = 10Hz

Band Edge Field Strength Calculations: measurements (to calculate the band edge field strengths):

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5150.0	70.4	v	74.0	-3.6	Pk	208	2.0	Note 1
5150.0	50.0	v	54.0	-4.0	Avg	208	2.0	Note 1
5150.0	64.9	h	74.0	-9.1	Pk	143	1.7	Note 1
5150.0	43.7	h	54.0	-10.3	Avg	143	1.7	Note 1
5350.0	63.1	v	74.0	-10.9	Pk	224	1.4	Note 2
5350.0	42.8	v	54.0	-11.2	Avg	224	1.4	Note 2
5350.0	57.8	h	74.0	-16.3	Pk	168	1.6	Note 2
5350.0	38.0	h	54.0	-16.1	Avg	168	1.6	Note 2

Note 1: EUT operating on channel 6 (lowest channel). Signal level calculated using the relative measurements in run #5 (-36dBc for peak and -46.3dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.

Note 2: EUT operating on channel 20 (highest channel). Signal level calculated using the relative measurements in run #5 (-42.7dBc for peak and -51.5dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

Other Spurious Emissions: EUT On Channel 6 (5.18 GHz)

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.407		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
15540.0	50.0	v	54.0	-4.0	Avg	186	1.5	Note 2, Analyzer Noise floor
15540.0	49.8	h	54.0	-4.2	Avg	185	1.6	Note 2, Analyzer Noise floor
10360.0	64.0	v	68.3	-4.3	Note 3	156	1.4	Not in restricted band
4144.0	42.7	v	54.0	-11.3	Avg	142	1.5	Note 2
15540.0	62.6	h	74.0	-11.4	Pk	185	1.6	Note 2, Analyzer Noise floor
15540.0	62.2	v	74.0	-11.8	Pk	186	1.5	Note 2, Analyzer Noise floor
10360.0	55.9	h	68.3	-12.4	Note 3	185	1.3	Not in restricted band
4144.0	40.5	h	54.0	-13.5	Avg	162	1.6	Note 2
4144.0	50.2	v	74.0	-23.8	Pk	142	1.5	Note 2
4144.0	49.3	h	74.0	-24.7	Pk	162	1.6	Note 2

Other Spurious Emissions: EUT On Channel 12 (5.24 GHz)

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.407		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
10480.0	65.2	v	68.3	-3.1	Note 3	241	1.4	Not in restricted band
10480.0	64.8	h	68.3	-3.5	Note 3	209	1.5	Not in restricted band
15720.0	49.6	h	54.0	-4.4	Avg	247	1.5	Note 2
15720.0	49.3	v	54.0	-4.7	Avg	200	1.2	Note 2
20960.0	45.6	v	54.0	-8.4	Avg	190	1.2	Note 2
4192.0	43.5	v	54.0	-10.5	Avg	185	2.0	Note 2
4192.0	43.1	h	54.0	-10.9	Avg	227	2.0	Note 2
20960.0	42.7	h	54.0	-11.3	Avg	259	1.1	Note 2
15720.0	61.9	v	74.0	-12.1	Pk	200	1.2	Note 2
15720.0	61.5	h	74.0	-12.5	Pk	247	1.5	Note 2
20960.0	59.7	v	74.0	-14.3	Pk	190	1.2	Note 2
20960.0	56.0	h	74.0	-18.0	Pk	259	1.1	Note 2
4192.0	52.1	v	74.0	-21.9	Pk	185	2.0	Note 2
4192.0	49.8	h	74.0	-24.2	Pk	227	2.0	Note 2

Note 1:	For emissions falling in the restricted bands detailed in 15.205 the general limits of 15.209 apply. For all other emissions the limit is EIRP < -27dBm (equivalent to a field strength at 3m of 68dBuV/m)
Note 2:	Signal is in a restricted band
Note 3:	Restricted Band Peak Measurements: Resolution and Video BW: 1 MHz, Restricted Band Average Measurements: Resolution Bw: 1MHz and Video Bw: 10 Hz. All other measurements, RBW = 1MHz and VBW = 3MHz, video averaging on (100 samples).



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

Other Spurious Emissions: EUT On Channel 20 (5.32 GHz)

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
15960.0	49.7	v	54.0	-4.3	Avg	203	1.5	Note 2, Analyzer Noise floor
15960.0	49.1	h	54.0	-4.9	Avg	283	1.4	Note 2, Analyzer Noise floor
4256.0	49.0	v	54.0	-5.0	Avg	340	1.3	Note 2
4256.0	48.4	h	54.0	-5.6	Avg	178	2.0	Note 2
10640.0	46.2	v	54.0	-7.8	Avg	190	1.4	Note 2
21280.0	45.3	v	54.0	-8.7	Avg	230	1.2	Note 2
10640.0	44.0	h	54.0	-10.0	Avg	223	1.5	Note 2
21280.0	43.2	h	54.0	-10.8	Avg	252	1.1	Note 2
15960.0	62.7	v	74.0	-11.3	Pk	203	1.5	Note 2, Analyzer Noise floor
10640.0	62.3	v	74.0	-11.7	Pk	190	1.4	Note 2
15960.0	62.1	h	74.0	-11.9	Pk	283	1.4	Note 2, Analyzer Noise floor
21280.0	58.9	v	74.0	-15.1	Pk	230	1.2	Note 2
21280.0	58.2	h	74.0	-15.8	Pk	252	1.1	Note 2
10640.0	57.0	h	74.0	-17.0	Pk	223	1.5	Note 2
4256.0	53.3	v	74.0	-20.7	Pk	340	1.3	Note 2
4256.0	52.8	h	74.0	-21.2	Pk	178	2.0	Note 2

Note 1:	For emissions falling in the restricted bands detailed in 15.205 the general limits of 15.209 apply. For all other emissions the limit is EIRP < -27dBm (equivalent to a field strength at 3m of 68dBuV/m)
Note 2:	Signal is in a restricted band
Note 3:	Restricted Band Peak Measurements: Resolution and Video BW: 1 MHz, Restricted Band Average Measurements: Resolution Bw: 1MHz and Video Bw: 10 Hz. All other measurements, RBW = 1MHz and VBW = 3MHz, video averaging on (100 samples).



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
		Proj Eng:	Mark Briggs
Contact:	Quinn		
Spec:	FCC Part 15 Subparts B and E	Class:	B

Conducted Emissions - Power Ports

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 7/23/2001	Config. Used: 1
Test Engineer: Vishal	Config Change: None
Test Location: SVOATS #1	EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT host system was located on a wooden table, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment.

Ambient Conditions: Temperature: 17°C
 Rel. Humidity: 72%

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power 120V/60Hz	FCC B	Pass	-10.8dB @ 5.351MHz

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz


Frequency	Level	Power	FCC-B	FCC-B	Detector	Comments
MHz	dBuV	Lead	Limit	Margin	Function	
5.351	37.2	Neutral	48.0	-10.8	QP	
5.963	36.9	Neutral	48.0	-11.1	QP	
5.511	36.3	Line 1	48.0	-11.7	QP	
2.671	35.8	Line 1	48.0	-12.2	QP	
2.916	35.7	Neutral	48.0	-12.3	QP	
6.326	35.6	Line 1	48.0	-12.4	QP	
2.719	35.5	Line 1	48.0	-12.5	QP	
3.215	35.3	Neutral	48.0	-12.7	QP	
3.144	35.1	Line 1	48.0	-12.9	QP	
0.469	32.8	Neutral	48.0	-15.2	QP	
0.471	32.7	Line 1	48.0	-15.3	QP	
0.472	31.2	Neutral	48.0	-16.8	QP	

Note: The graphical plots are offset by +10dB.



T44187

Mains Lead
Neutral

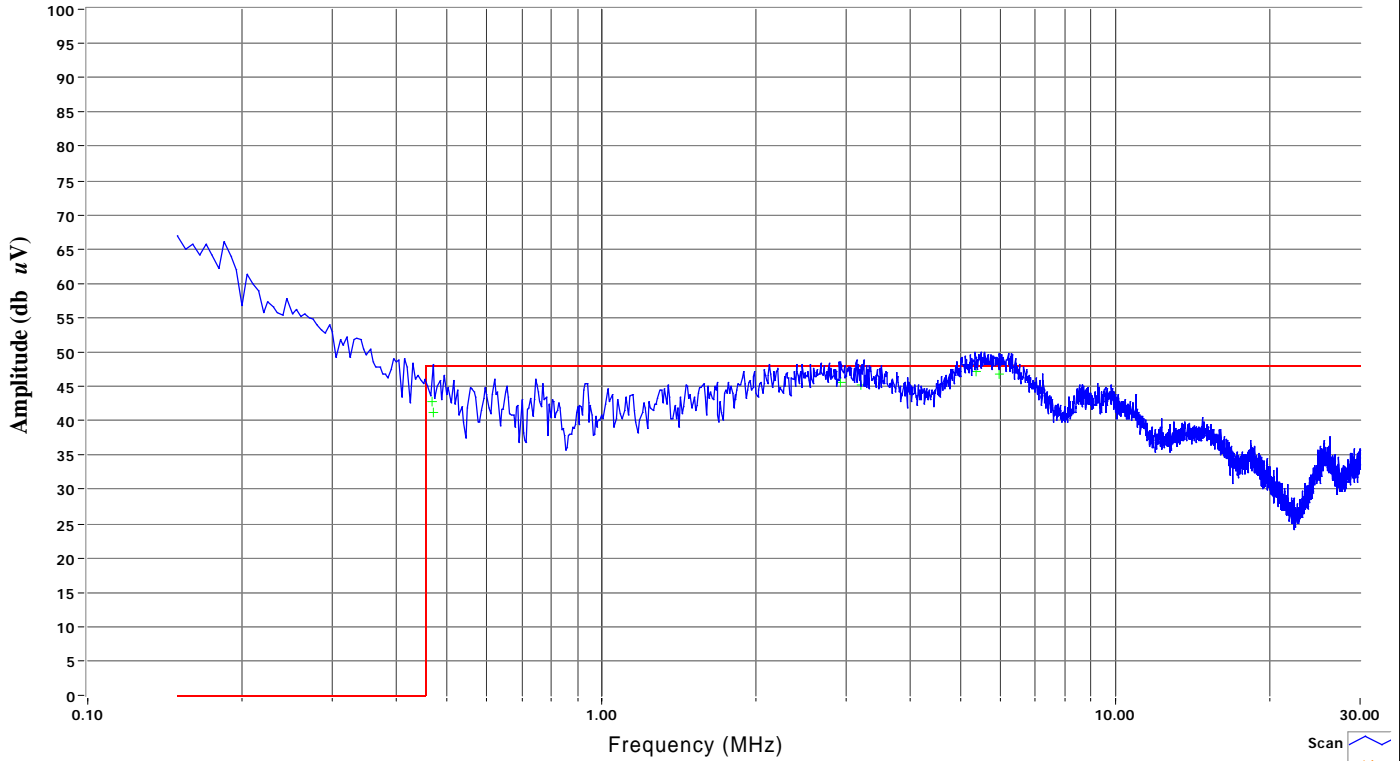


Run #1 120V Line (Data is offset by +10dB)

- Scan
 - Peak
 - Quasi-peak
 - Average
 - QuasiPeak Limit
 - QuasiPeak Limit
- 7/26/2007
Vishal Narayan



T44187

Mains Lead
Neutral

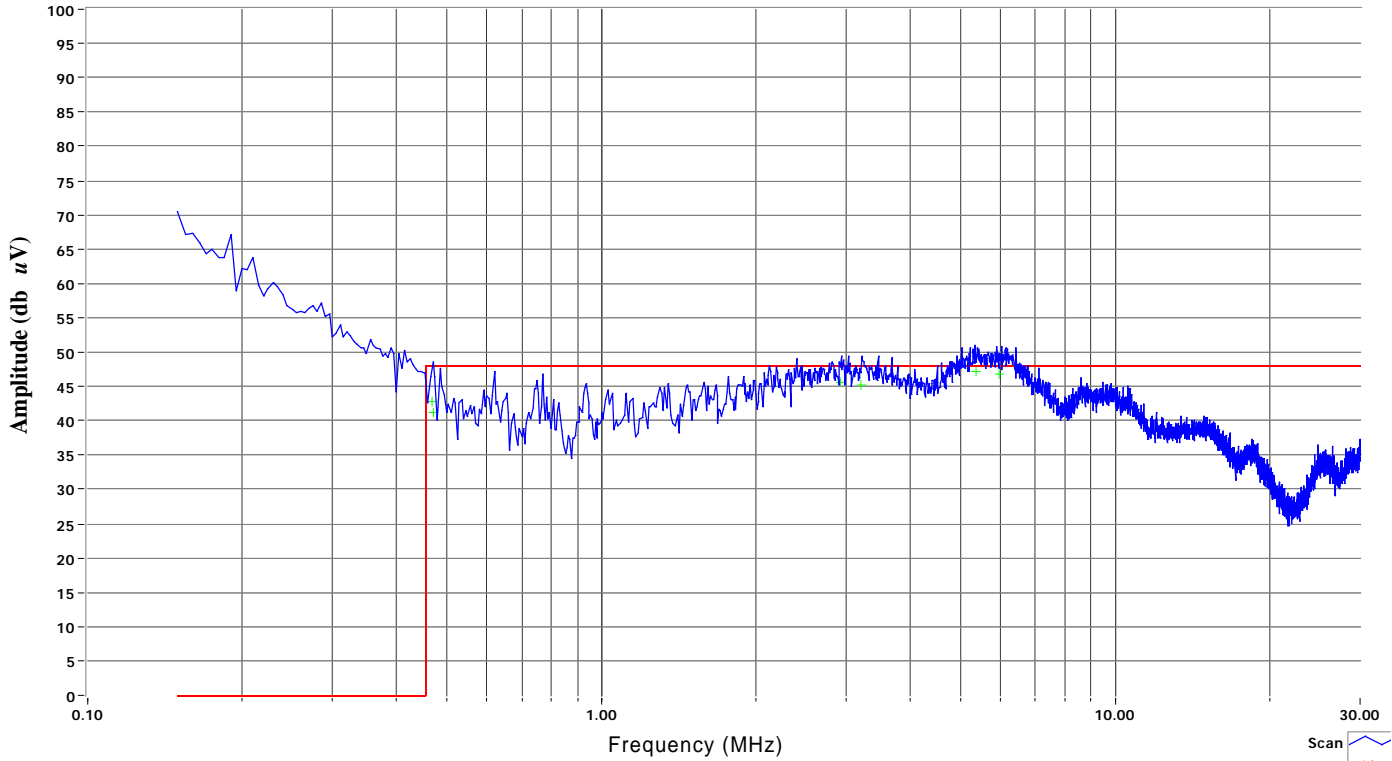

Run #1 120V Neutral (Data is offset by +10dB with respect to the limit)

Scan

Peak

Quasi-peak

Average

QuasiPeak Limit

QuasiPeak Limit

7/26/2007

Vishal Narayan

Client: CardAccess	Job Number: J44185
Model: CAWCB500	T-Log Number: T44187
	Proj Eng: Mark Briggs
Contact: Quinn	
Spec: FCC Part 15 Subparts B and E	Class: B

Radiated Emissions

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 7/23/2001	Config. Used: #1
Test Engineer: Mark Briggs & Vishal Narayan	Config Change: None
Test Location: Chamber #2 & SVOATS #1	Host Unit Voltage 120V/60Hz

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated emissions testing.

On the OATS, the measurement antenna was located 3 meters from the EUT for the measurement range 30 - 1000 MHz. Preliminary measurements in the anechoic chamber were made at a test distance of 4m and the data was extrapolated to 3m.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions: Temperature: 17°C
 Rel. Humidity: 72%

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	RE, Preliminary Scan 30 - 1000 MHz (Chamber)	FCC Class B	Eval	Refer to individual runs
2	RE, Preliminary Scan 30 - 1000 MHz (OATS)	FCC Class B	Pass	-4.1dB @ 959.995MHz
3	RE, 30 - 1000MHz - Maximized Emissions	FCC Class B	Pass	-4.1dB @ 959.995MHz

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

Run #1g: Preliminary Radiated Emissions, 30-1000 MHz (Anechoic Chamber)

Dell Laptop, Card 1087 with EchoSorb (two pieces on top and one piece on bottom)

Frequency MHz	Level dB μ V/m	Pol v/h	FCC B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
735.990	43.5	-	46.0	-2.5	Pk	0-360	1.7	
959.995	41.2	-	46.0	-4.8	Pk	0-360	1.7	
675.235	41.1	-	46.0	-4.9	Pk	0-360	1.7	
671.995	41.1	-	46.0	-4.9	Pk	0-360	1.7	
799.995	40.1	-	46.0	-5.9	Pk	0-360	1.7	
911.110	39.3	-	46.0	-6.7	Pk	0-360	1.7	B/B
880.190	38.8	-	46.0	-7.2	Pk	0-360	1.7	
479.990	38.5	-	46.0	-7.5	Pk	0-360	1.7	
603.235	38.3	-	46.0	-7.7	Pk	0-360	1.7	
200.130	35.5	V/H	43.5	-8.0	Pk	0-360	1.7	Spread Spectrum Clock
768.000	37.7	-	46.0	-8.3	Pk	0-360	1.7	
832.100	37.7	-	46.0	-8.3	Pk	0-360	1.7	
559.985	37.5	-	46.0	-8.5	Pk	0-360	1.7	
499.460	37.3	-	46.0	-8.7	Pk	0-360	1.7	B/B
522.215	37.3	-	46.0	-8.7	Pk	0-360	1.7	
704.005	37.3	-	46.0	-8.7	Pk	0-360	1.7	
30.000	31.3	V/H	40.0	-8.7	Pk	0-360	1.7	B/B
37.010	30.7	V/H	40.0	-9.3	Pk	0-360	1.7	
74.690	28.3	V/H	40.0	-11.7	Pk	0-360	1.7	B/B
122.890	30.5	V/H	43.5	-13.0	Pk	0-360	1.7	B/B
242.970	32.2	V/H	46.0	-13.8	Pk	0-360	1.7	B/B
267.750	32.0	V/H	46.0	-14.0	Pk	0-360	1.7	B/B

Run #2: Preliminary Radiated Emissions, 30-1000 MHz (OATS Final Data)

Frequencies selected based on the results of run #1.

Frequency MHz	Level dB μ V/m	Pol v/h	FCC B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
959.995	41.9	v	46.0	-4.1	QP	50	4.7	Signal Sub
799.995	40.4	v	46.0	-5.6	QP	50	1.0	
559.985	40.0	v	46.0	-6.0	QP	70	1.0	
832.100	39.0	v	46.0	-7.0	QP	50	1.0	
880.005	38.9	v	46.0	-7.1	QP	90	1.0	
736.005	38.8	v	46.0	-7.2	QP	20	1.4	



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
Contact:	Quinn	Proj Eng:	Mark Briggs
Spec:	FCC Part 15 Subparts B and E	Class:	B

Continuation of Run #2								
959.995	38.0	h	46.0	-8.0	QP	2	3.0	Signal Plus Ambient
479.990	38.0	h	46.0	-8.0	QP	140	1.5	
911.110	37.0	v	46.0	-9.0	QP	100	1.5	BB
768.000	36.5	v	46.0	-9.5	QP	80	1.0	
200.130	34.0	h	43.5	-9.5	QP	250	1.5	Signal Plus Ambient
704.005	36.0	v	46.0	-10.0	QP	80	1.3	
735.990	36.0	h	46.0	-10.0	QP	170	1.6	
671.995	35.2	v	46.0	-10.8	QP	60	1.0	Signal Plus Ambient
243.014	33.0	v	46.0	-13.0	QP	110	1.0	
37.010	26.0	v	40.0	-14.0	QP	50	1.0	
559.985	32.0	h	46.0	-14.0	QP	70	1.1	Signal Plus Ambient
122.890	29.0	v	43.5	-14.5	QP	0	1.0	
122.890	29.0	h	43.5	-14.5	QP	150	1.3	
480.000	31.1	v	46.0	-14.9	QP	100	1.6	Signal Sub
30.000	25.0	v	40.0	-15.0	QP	360	1.0	
267.750	31.0	h	46.0	-15.0	QP	120	1.5	
768.000	30.0	h	46.0	-16.0	QP	90	1.6	
832.100	30.0	h	46.0	-16.0	QP	130	1.6	
704.005	30.0	h	46.0	-16.0	QP	160	1.0	Signal Plus Ambient
522.215	29.2	v	46.0	-16.8	QP	90	1.0	
74.690	23.0	v	40.0	-17.0	QP	360	1.0	BB
267.750	29.0	v	46.0	-17.0	QP	110	1.0	
499.460	28.5	v	46.0	-17.5	QP	60	1.0	
911.110	28.5	h	46.0	-17.5	QP	100	1.3	
242.970	28.0	h	46.0	-18.0	QP	40	1.3	
37.010	21.5	h	40.0	-18.5	QP	80	1.3	
30.000	21.0	h	40.0	-19.0	QP	70	1.3	
74.690	20.0	h	40.0	-20.0	QP	30	1.4	
200.130	23.0	v	43.5	-20.5	QP	0	1.3	
671.995	25.3	h	46.0	-20.7	QP	60	1.3	Signal Plus Ambient
499.460	24.0	h	46.0	-22.0	QP	60	1.2	
522.215	23.5	h	46.0	-22.5	QP	340	1.0	



EMC Test Data

Client:	CardAccess	Job Number:	J44185
Model:	CAWCB500	T-Log Number:	T44187
		Proj Eng:	Mark Briggs
Contact:	Quinn		
Spec:	FCC Part 15 Subparts B and E	Class:	B

Run #3: Maximized Readings From Run #2


Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
959.995	41.9	v	46.0	-4.1	QP	50	4.7	Signal Sub
799.995	40.4	v	46.0	-5.6	QP	50	1.0	
559.985	40.0	v	46.0	-6.0	QP	70	1.0	
832.100	39.0	v	46.0	-7.0	QP	50	1.0	
880.005	38.9	v	46.0	-7.1	QP	90	1.0	
736.005	38.8	v	46.0	-7.2	QP	20	1.4	

PLOTS OF TEST SESSION 7/23/01

16:05:06 JUL 23, 2001

Run 1g: Ecosorb top (2 pieces) and bottom

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 199.7 MHz
 35.52 dB μ V/m

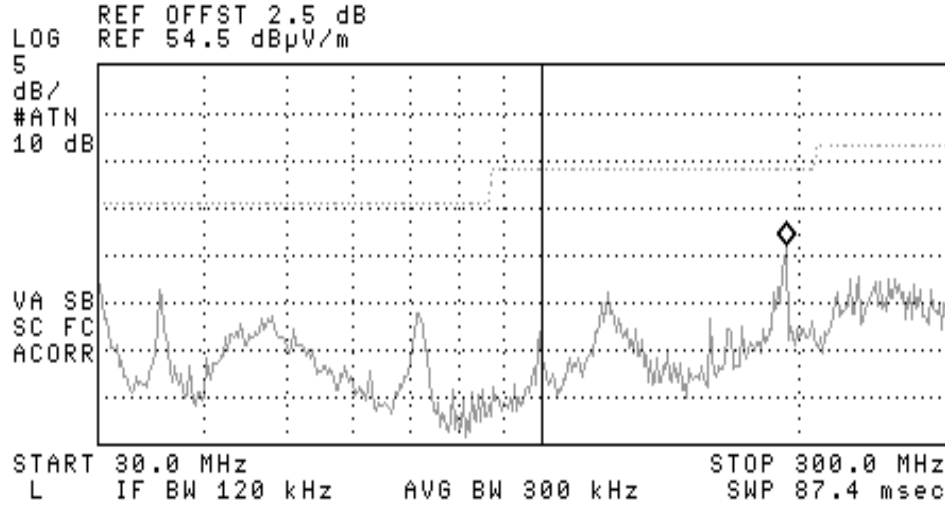

15:49:42 JUL 23, 2001

Run 1g: Ecosorb top (2 pieces) and bottom

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 736.8 MHz
 43.46 dB μ V/m

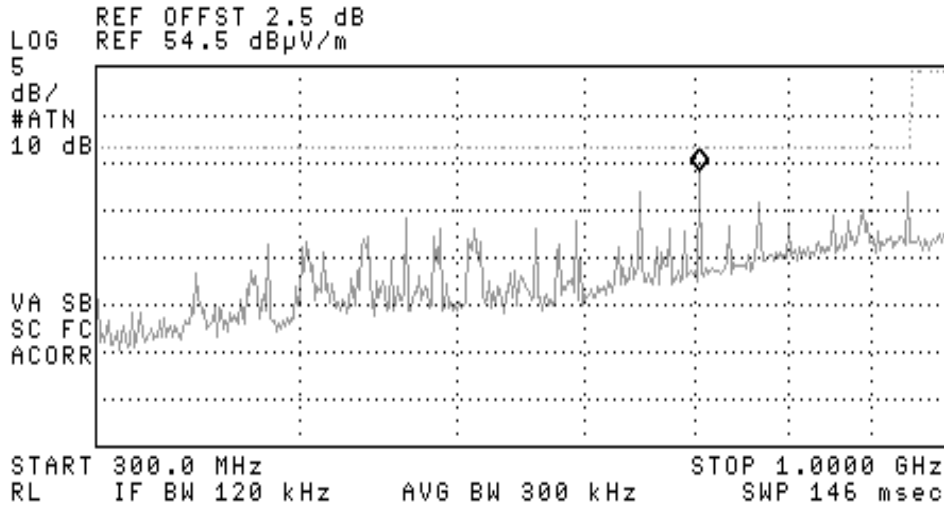


EXHIBIT 3: Emissions Test Configuration Photographs

Uploaded as separate attachments

EXHIBIT 4: Proposed FCC ID Label & Label Location

Uploaded as separate attachments

***EXHIBIT 5: Detailed Construction Photographs
CardAccess Model CAWCB500 5.8 GHz UNII Band***

Uploaded as separate attachments

**EXHIBIT 6: Operator's Manual
CardAccess Model CAWCB500 5.8 GHz UNII Band**

Uploaded as separate attachments

EXHIBIT 7: Block Diagram
CardAccess Model CAWCB500 5.8 GHz UNII Band

Uploaded as separate attachments

EXHIBIT 8: Schematic Diagrams
CardAccess Model CAWCB500 5.8 GHz UNII Band

Uploaded as separate attachments

EXHIBIT 9: Theory of Operation
CardAccess Model CAWCB500 5.8 GHz UNII Band

Uploaded as separate attachments

EXHIBIT 10: SAR Report
CardAccess Model CAWCB500 5.8 GHz UNII Band

Uploaded as separate attachments