

**Nemko Test Report:** 1L0435RUS2

**Applicant:** Enfora, Inc.  
661 East 18<sup>th</sup> Street  
Plano, TX 75074-5601

**Equipment Under Test:  
(E.U.T.)** Enabler-A

**FCC ID:** MIVCDP10EAM

**In Accordance With:** **FCC Part 22, Subpart H**  
800 MHz Cellular Subscriber Units

**Tested By:** Nemko Dallas Inc.  
802 N. Kealy  
Lewisville, TX  
75057-3136

**Authorized By:**



Tom Tidwell, EMC/Wireless Manager

**Date:** 9/10/01

**Total Number of Pages:** 43

**Table of Contents**

Section 1. Summary of Test Results ..... 3

Section 2. General Equipment Specification..... 5

Section 3. RF Power Output..... 8

Section 4. Occupied Bandwidth..... 9

Section 5. Spurious Emissions at Antenna Terminals ..... 14

Section 6. Field Strength of Spurious..... 24

Section 7. Frequency Stability ..... 27

Section 8. Test Equipment List..... 29

ANNEX A - TEST DETAILS ..... 30

ANNEX B - TEST DIAGRAMS ..... 40

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

**Section 1. Summary of Test Results**

Manufacturer: Enfora

Model No.: Enabler-A

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 22, Subpart H.

- |                                     |                            |                                     |                     |
|-------------------------------------|----------------------------|-------------------------------------|---------------------|
| <input checked="" type="checkbox"/> | New Submission             | <input type="checkbox"/>            | Production Unit     |
| <input type="checkbox"/>            | Class II Permissive Change | <input checked="" type="checkbox"/> | Pre-Production Unit |

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



**NVLAP LAB CODE: 100426-0**

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

**Summary Of Test Data**

NAME OF TEST	PARA. NO.	SPEC.	RESULT
RF Power Output	2.1046	7W ERP	Complies
Audio Frequency Response	2.1047	6dB/Octave	N/A
Audio Low Pass Filter Response	2.1047	Graph	N/A
Modulation Limiting	2.1047	Graph	N/A
Occupied Bandwidth (Voice & SAT)	2.1049	Mask	N/A
Occupies Bandwidth (WB Data & SAT)	2.1049	Mask	N/A
Occupied Bandwidth (ST)	2.1049	Mask	Complies
Occupied Bandwidth (SAT)	2.1049	Mask	N/A
Occupied Bandwidth (SAT)	2.1049	Not Specified	N/A
Spurious Emissions at Antenna Terminals	2.1051	-13 dBm	Complies
Field Strength of Spurious Emissions	2.1053	82.3 dB $\mu$ V/m	Complies
Frequency Stability	2.1055	2.5 ppm	Complies

This transmitter does not support analogue voice modulation.

**Section 2. General Equipment Specification**

<b>Frequency Range:</b>	824.04 MHz to 848.97 MHz
<b>Tunable Bands:</b>	824.04 MHz to 848.97 MHz
<b>Necessary Bandwidth:</b>	30 kHz
<b>Type of Modulation and Designator:</b>	DXW
<b>Output Impedance:</b>	50 ohms
<b>RF Power Output (rated):</b>	700 mW
<b>Number of Channels:</b>	832
<b>Duty Cycle:</b>	Continuous
<b>Channel Spacing:</b>	30 kHz
<b>Operator Selection of Frequency:</b>	Software Controlled
<b>Power Output Adjustment Capability:</b>	Software Controlled

**Description of Modifications For Class II Permissive Change**

**Not Applicable**


**Modifications Made During Testing**

**Not Applicable**

### Operational Description

The Enabler\_A CDPD modem is a full duplex wireless modem for embedded applications. The host supplies DC power and the antenna. The modem provides wide area access using the AMPS frequency band. The modulation used is a 0.5 GMSK format.

### System Diagram

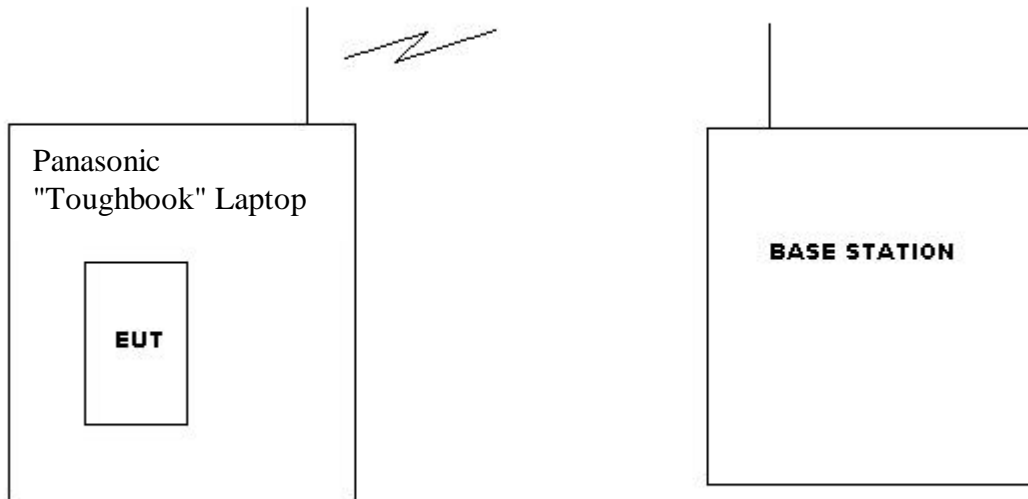

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

**Section 3. RF Power Output**

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
TESTED BY: David Light	DATE: 8/9/2001

**Test Results:** Complies.

**Measurement Data:**

Channel	Power at Antenna Terminal (dBm)	Antenna Gain (dBi)	Output Power (EIRP) (dBm)
991	28.5	0	28.5
367	28.0	0	28.0
799	27.6	0	27.6

Note – The device was tested at Nominal voltage (115 Vac), 98 Vac and 132 Vac (+/- 15%) with no change in output power. The AC adapter supplied with the host operates from 100-240 Vac.

**Equipment Used:** 1029-1030-1474-1082

**Measurement Uncertainty:** +/- 0.6 dB

**Temperature:** 22 °C

**Relative Humidity:** 50 %



*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

---

**Section 4. Occupied Bandwidth**

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.1047
TESTED BY: David Light	DATE: 8/9/2001

**Test Results:** Complies.

**Measurement Data:** See attached graph.

**Measurement Uncertainty:** +/- 1.7 dB  
1x10<sup>-7</sup> ppm

**Nemko Dallas**

FCC PART 22, SUBPART H  
800 MHz CELLULAR SUBSCRIBER  
UNITS

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

---

**Test Data – Occupied Bandwidth – Wideband Data**

EQUIPMENT: Enabler-A  
FCC ID: MIVCDP10EAM


PROJECT NO.: 1L0435RUS2



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy  
Lewisville, TX 75057  
Tel: (972) 436-9600  
Fax: (972) 436-2667

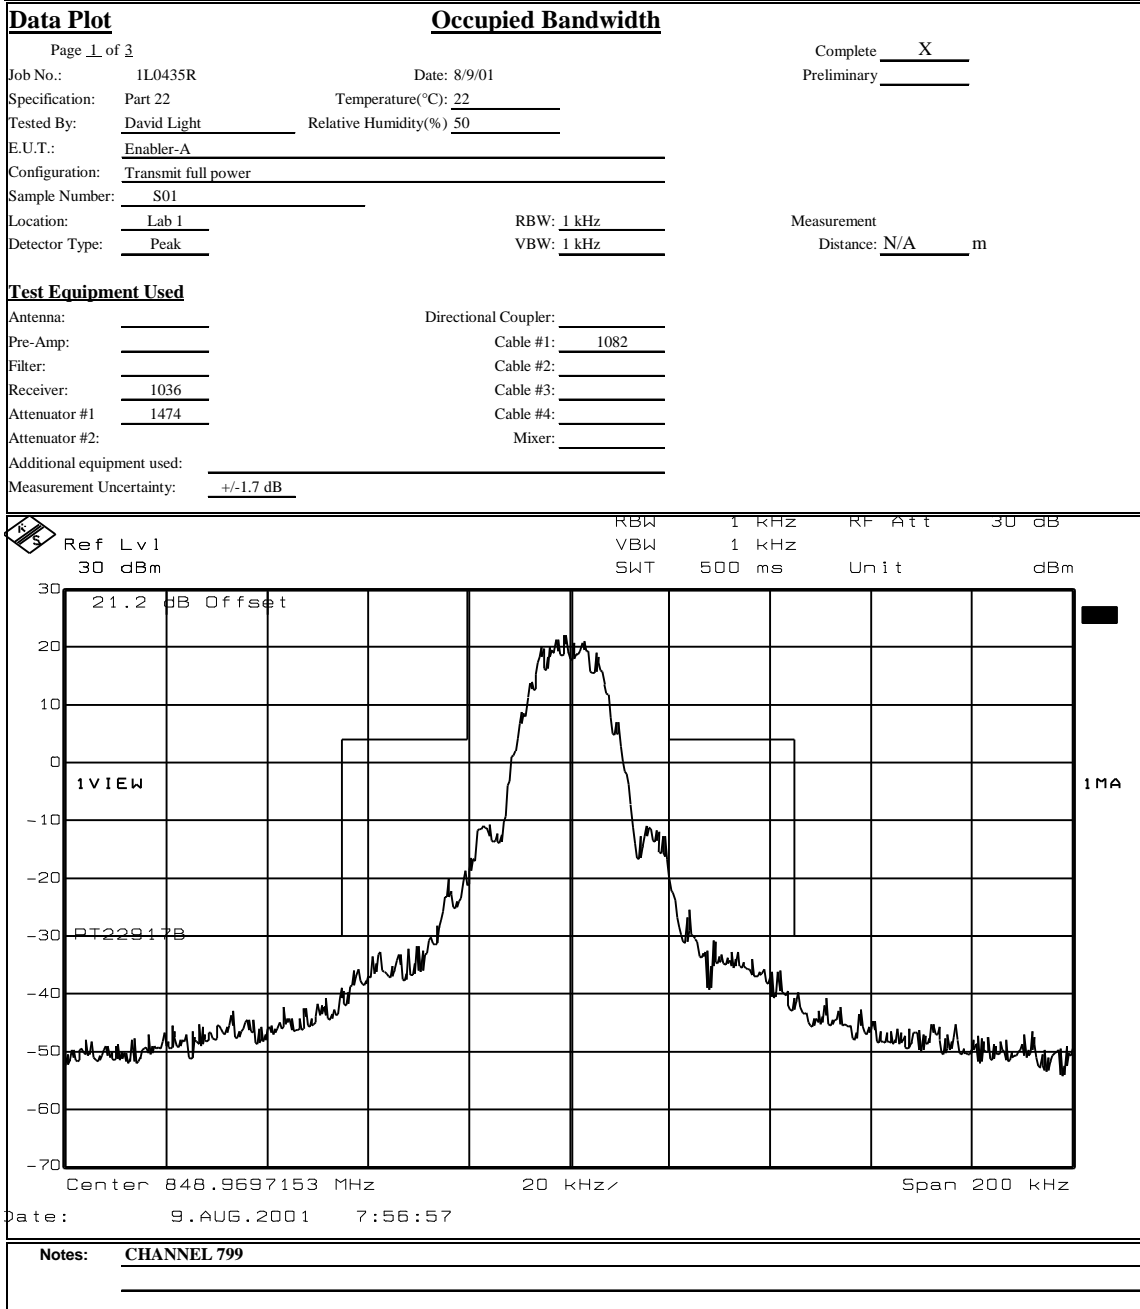

EQUIPMENT: Enabler-A  
FCC ID: MIVCDP10EAM


PROJECT NO.: 1L0435RUS2

Test Data – Occupied Bandwidth – Wideband Data



Dallas Headquarters:  
802 N. Kealy  
Lewisville, TX 75057  
Tel: (972) 436-9600  
Fax: (972) 436-2667

Nemko Dallas, Inc.

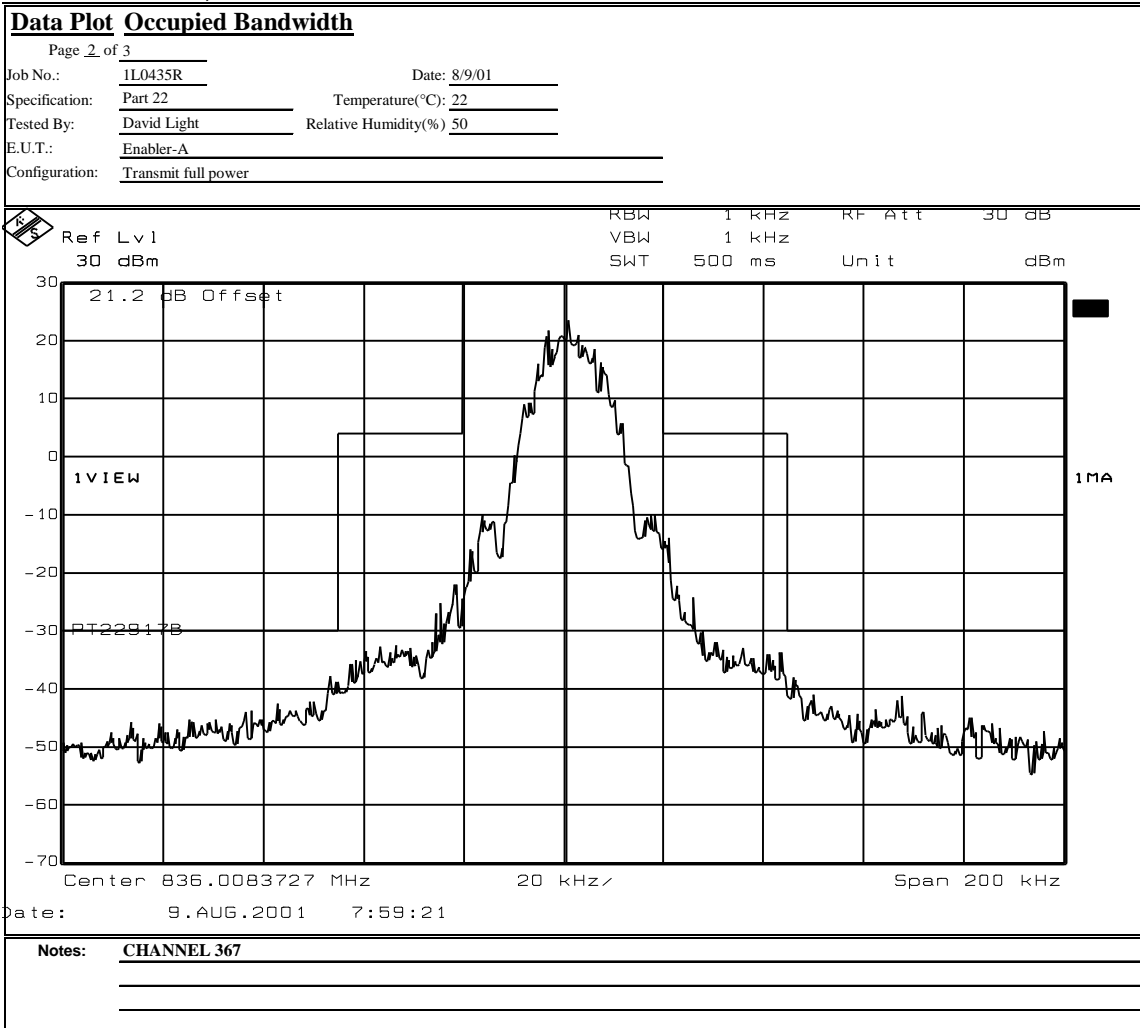

EQUIPMENT: *Enabler-A*  
FCC ID: *MIVCDP10EAM*


PROJECT NO.: 1L0435RUS2

**Test Data – Occupied Bandwidth – Wideband Data**



Nemko Dallas, Inc.

Dallas Headquarters:  
802 N. Kealy  
Lewisville, TX 75057  
Tel: (972) 436-9600  
Fax: (972) 436-2667

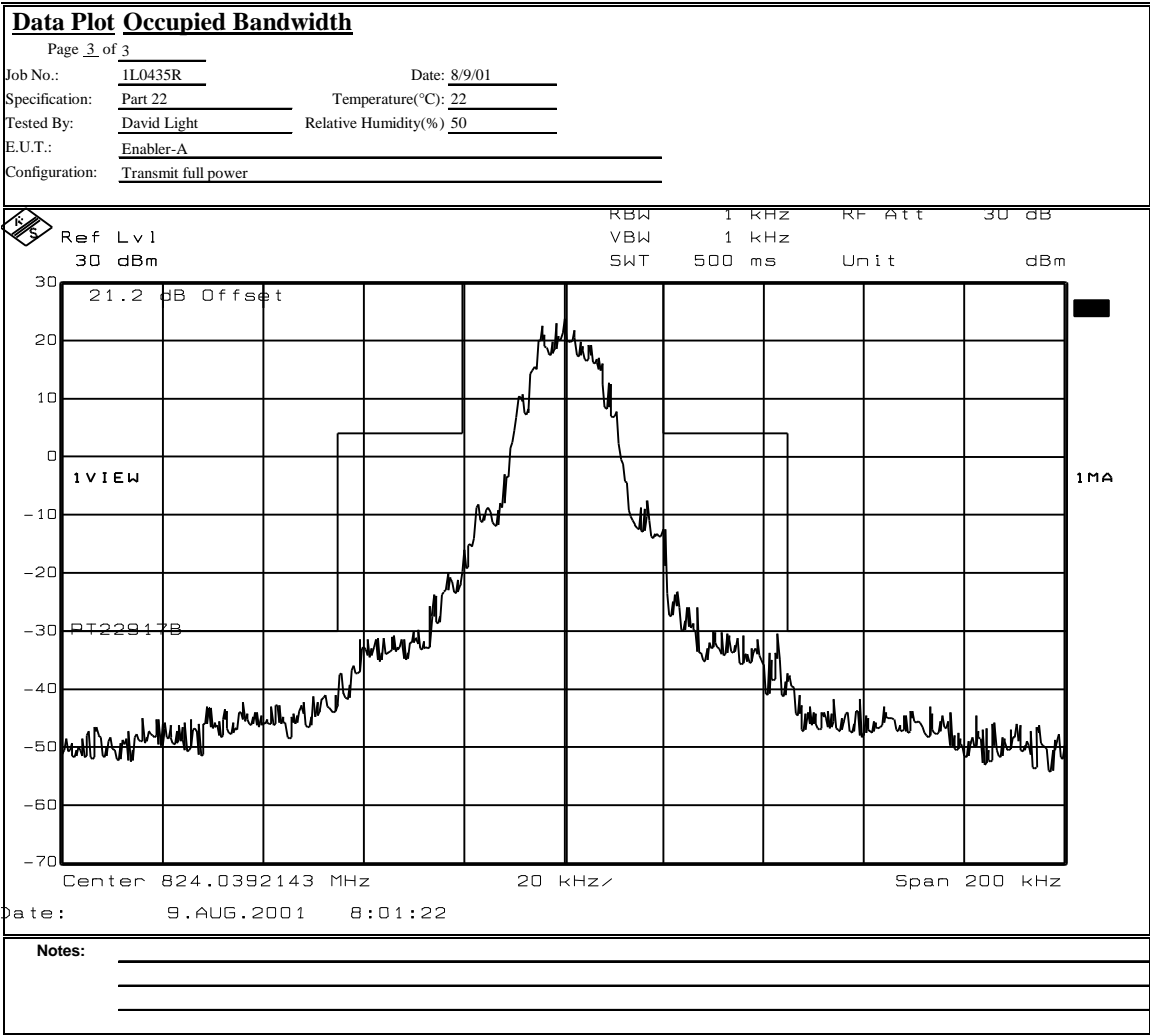

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

---

**Section 5. Spurious Emissions at Antenna Terminals**

NAME OF TEST: Spurious Emissions At Antenna Terminals	PARA. NO.: 2.1051
TESTED BY: David Light	DATE: 8/9/2001

**Test Results:** Complies.

**Measurement Data:** See attached graph.

**Measurement Uncertainty:** +/- 1.7 dB

**Nemko Dallas**

FCC PART 22, SUBPART H  
800 MHz CELLULAR SUBSCRIBER  
UNITS

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

---

**Test Data – Spurious Emissions at Antenna Terminals**

EQUIPMENT: *Enabler-A*  
FCC ID: *MIVCDP10EAM*


PROJECT NO.: 1L0435RUS2



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy  
Lewisville, TX 75057  
Tel: (972) 436-9600  
Fax: (972) 436-2667

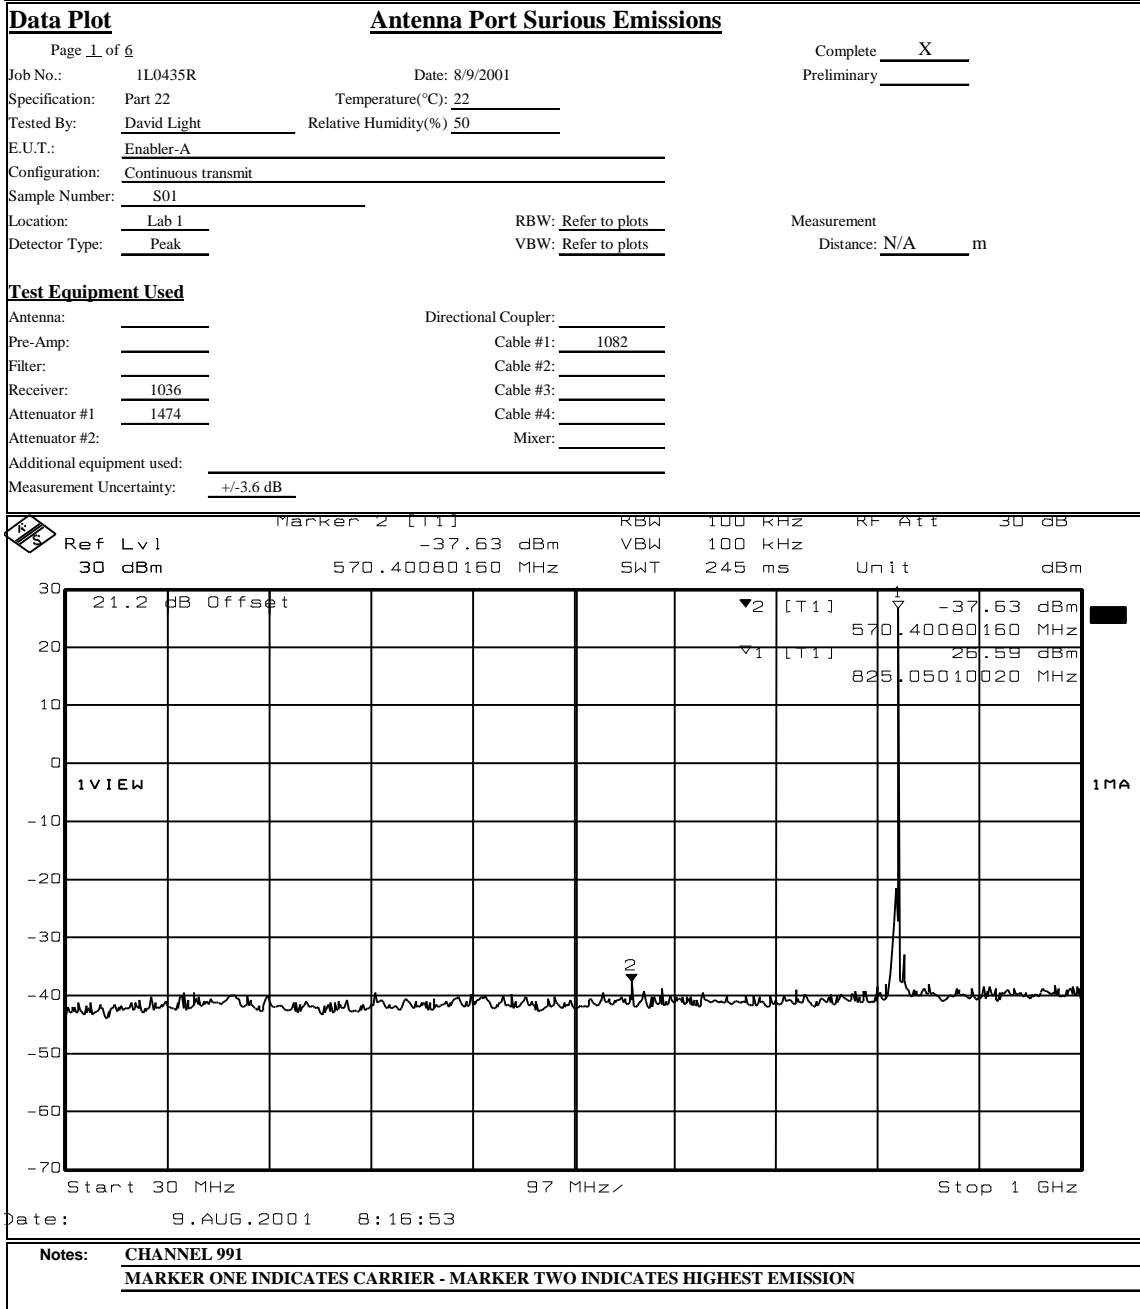




Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:  
802 N. Kealy  
Lewisville, TX 75057  
Tel: (972) 436-9600  
Fax: (972) 436-2667

Nemko Dallas, Inc.

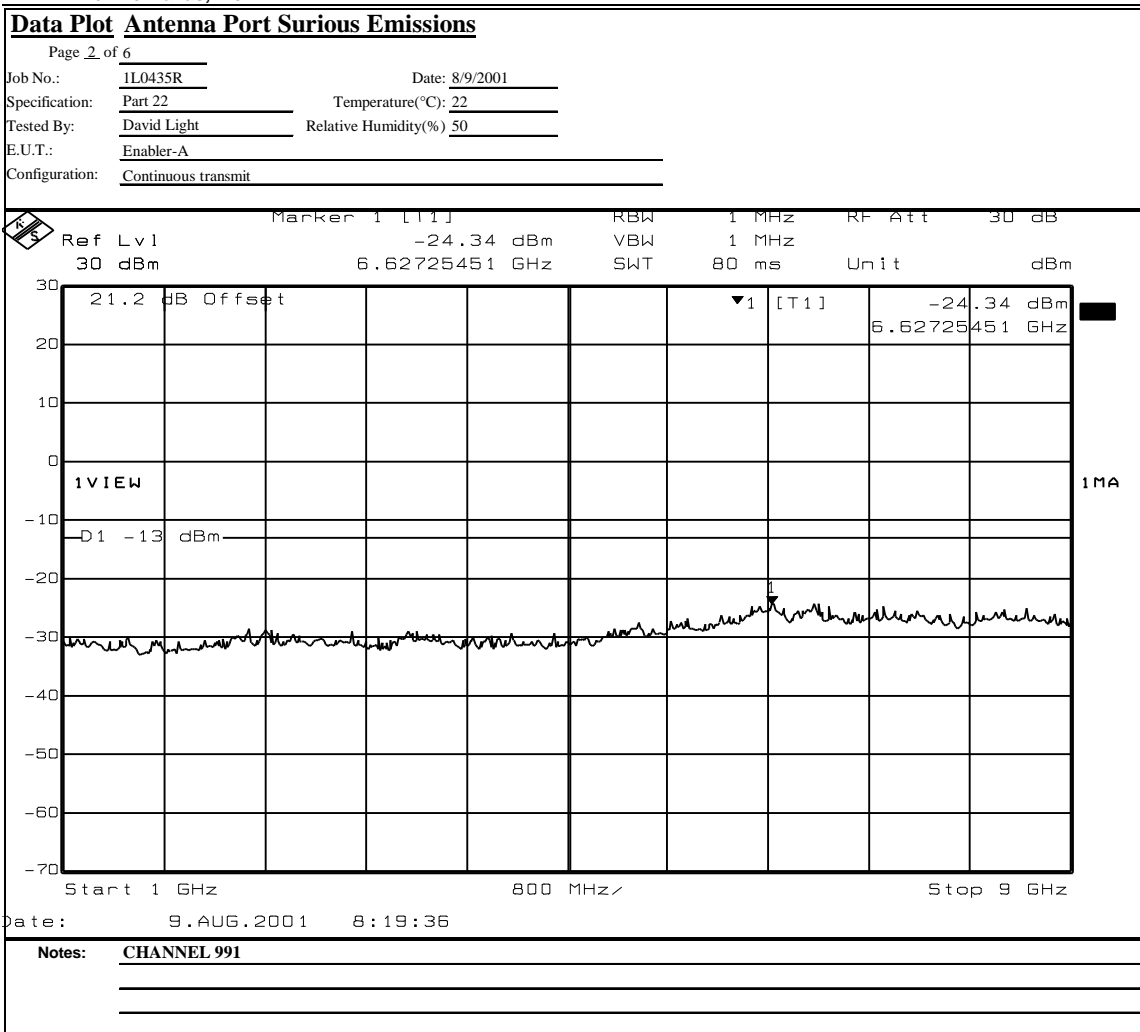

EQUIPMENT: Enabler-A  
FCC ID: MIVCDP10EAM

PROJECT NO.: 1L0435RUS2

Test Data – Spurious Emissions at Antenna Terminals




Dallas Headquarters:  
802 N. Kealy  
Lewisville, TX 75057  
Tel: (972) 436-9600  
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot Antenna Port Surious Emissions

Page 3 of 6

Job No.: 1L0435R Date: 8/9/2001  
Specification: Part 22 Temperature(°C): 22  
Tested By: David Light Relative Humidity(%) 50  
E.U.T.: Enabler-A  
Configuration: Continuous transmit

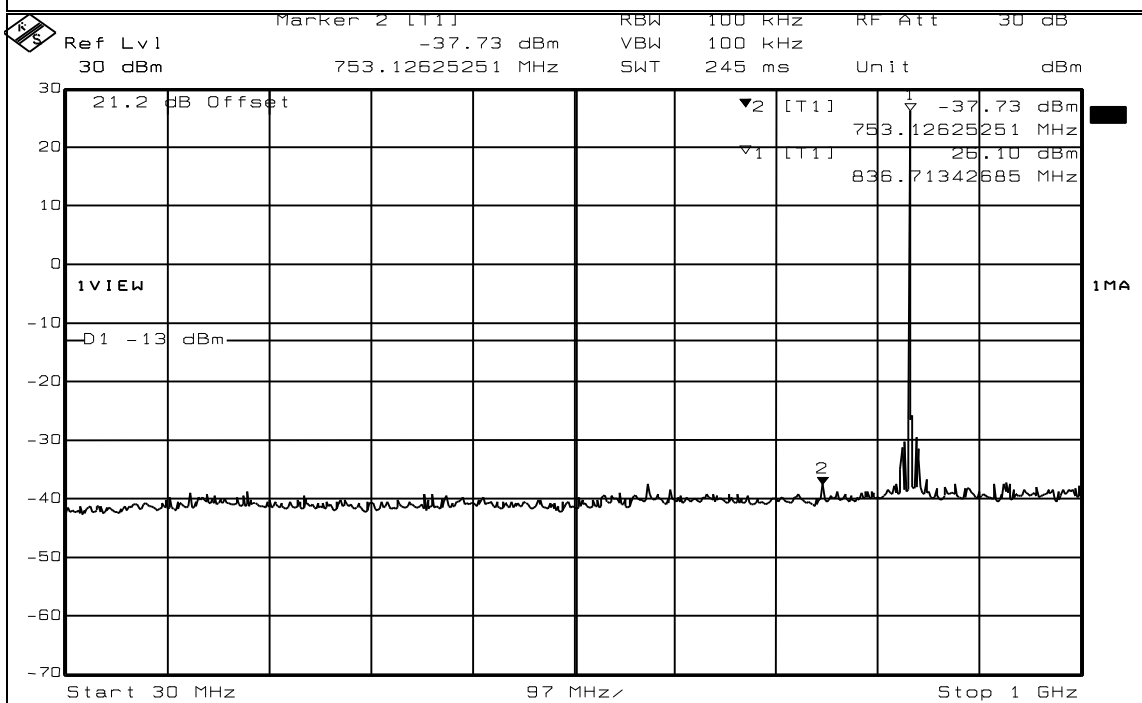

Date: 9.AUG.2001 8:26:07

Notes: CHANNEL 367  
MARKER ONE INDICATES CARRIER - MARKER TWO INDICATES HIGHEST EMISSION

EQUIPMENT: Enabler-A  
FCC ID: MIVCDP10EAM


PROJECT NO.: 1L0435RUS2

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:  
802 N. Kealy  
Lewisville, TX 75057  
Tel: (972) 436-9600  
Fax: (972) 436-2667

Nemko Dallas, Inc.

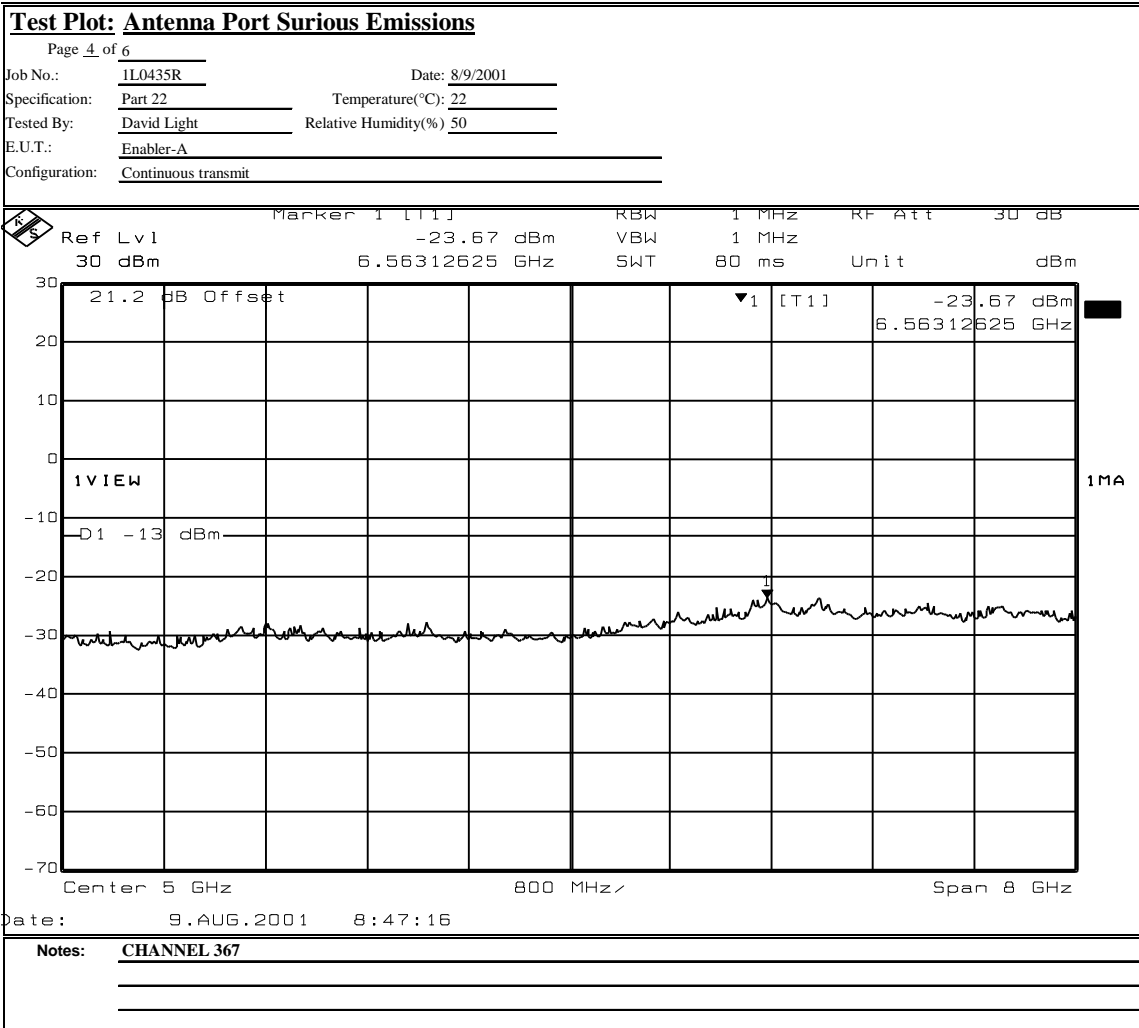

EQUIPMENT: Enabler-A  
FCC ID: MIVCDP10EAM


PROJECT NO.: 1L0435RUS2

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:  
802 N. Kealy  
Lewisville, TX 75057  
Tel: (972) 436-9600  
Fax: (972) 436-2667

Nemko Dallas, Inc.

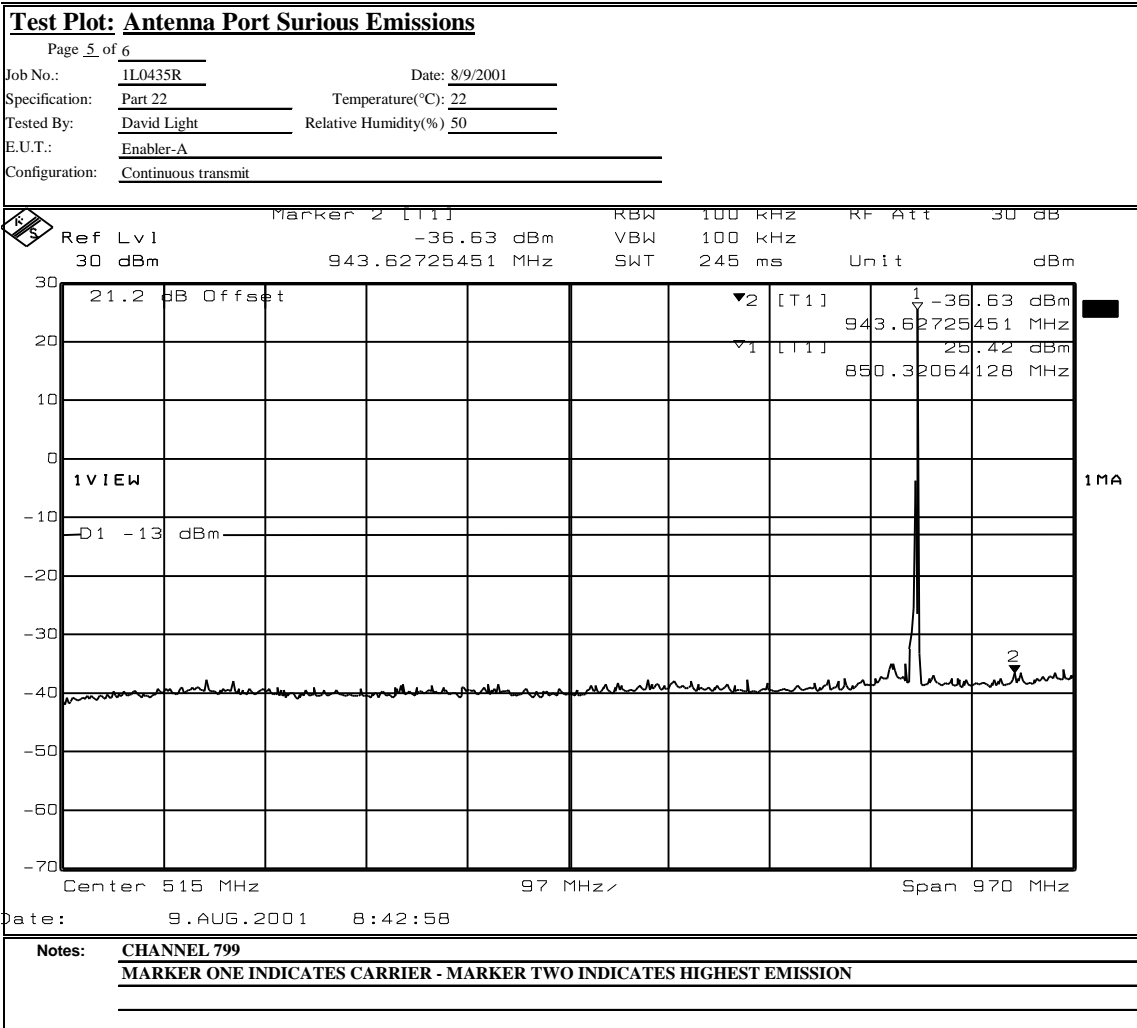

EQUIPMENT: Enabler-A  
FCC ID: MIVCDP10EAM


PROJECT NO.: 1L0435RUS2

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:  
802 N. Kealy  
Lewisville, TX 75057  
Tel: (972) 436-9600  
Fax: (972) 436-2667

Nemko Dallas, Inc.

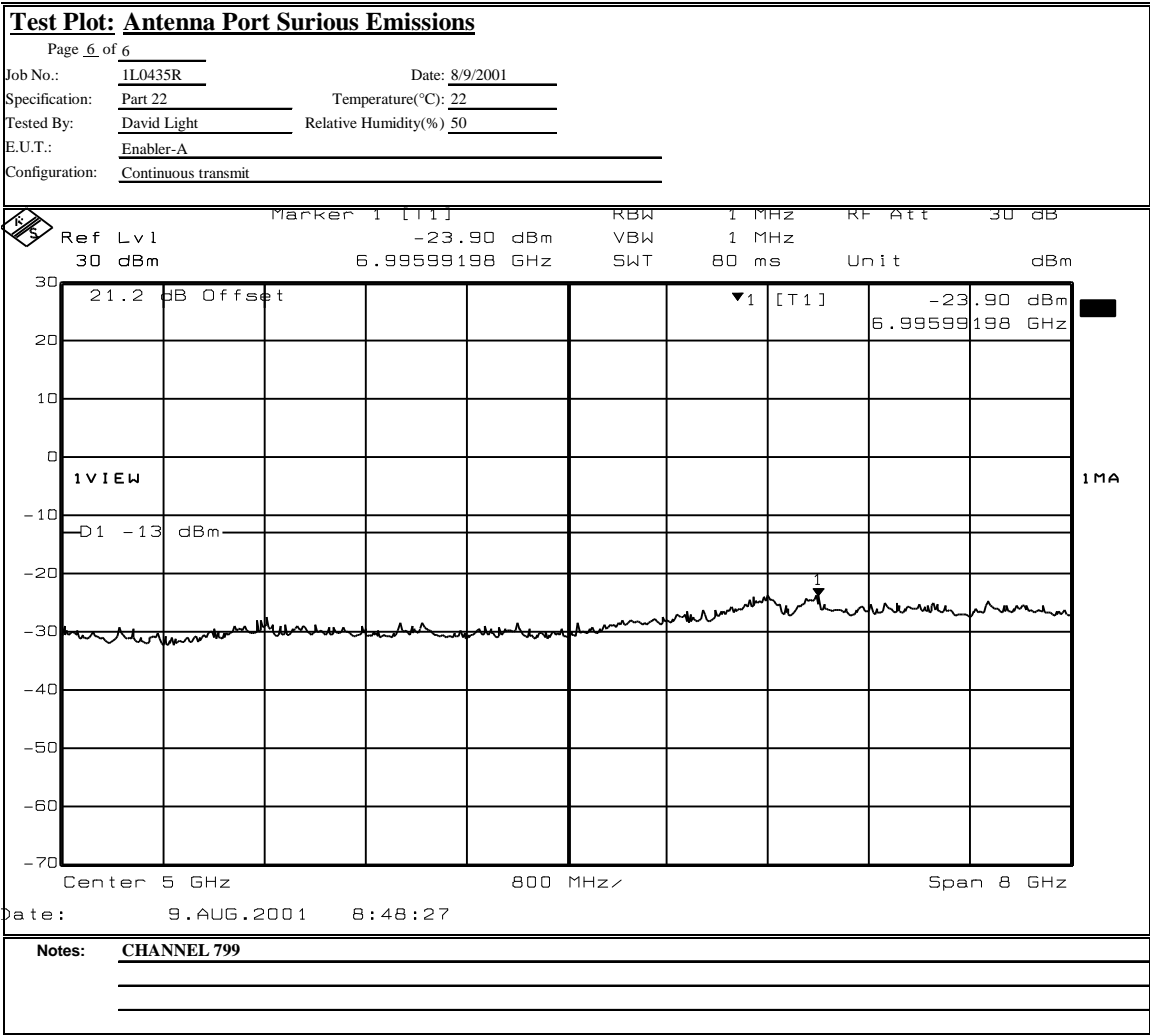

**Nemko Dallas**

FCC PART 22, SUBPART H  
800 MHz CELLULAR SUBSCRIBER  
UNITS

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

---

**Test Data – Spurious Emissions at Antenna Terminals**



*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

---

**Section 6. Field Strength of Spurious**

NAME OF TEST: Field Strength of Spurious	PARA. NO.: 2.1053
TESTED BY: Lance Walker	DATE: 10/18/2001

**Test Results:** Complies.

**Measurement Data:** See attached table.

**Measurement Uncertainty:** +/- 3.6 dB





*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2


---

**Photographs of Test Setup**

FRONT VIEW



REAR VIEW

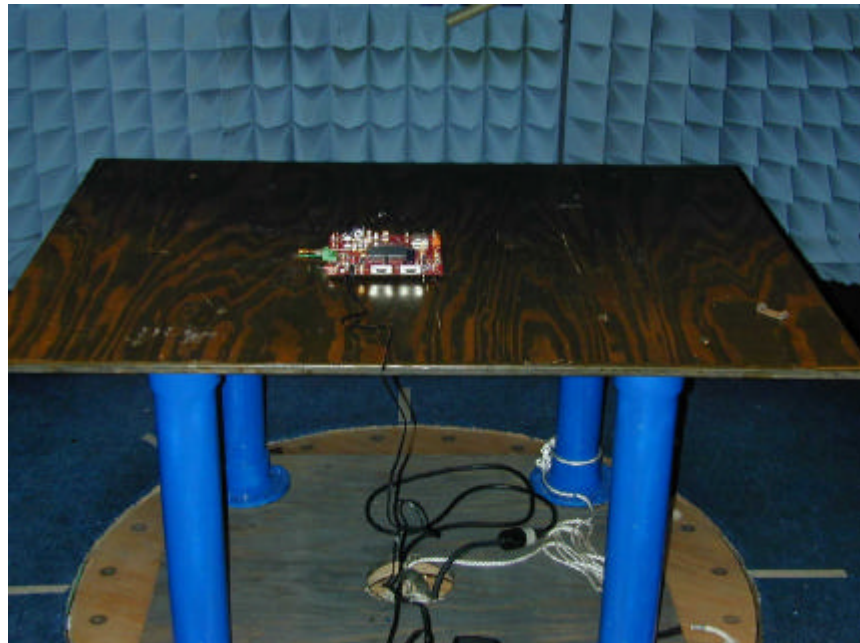

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

---

**Section 7. Frequency Stability**

NAME OF TEST: Frequency Stability	PARA. NO.: 2.1055
TESTED BY: David Light	DATE: 8/9/2001

**Test Results:** Complies.

**Measurement Data:** See attached table.

Standard Test Frequency: 836.01 MHz  
Standard Test Voltage: 115 Vac

**Equipment Used:**

**Measurement Uncertainty:**  $1 \times 10^{-12}$  ppm

**Temperature:** 22 °C

**Relative Humidity:** 50 %

EQUIPMENT: *Enabler-A*  
FCC ID: *MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

Test Data – Frequency Stability



Dallas Headquarters:  
802 N. Kealy  
Lewisville, TX 75057  
Tel: (972) 436-9600  
Fax: (972) 436-2667

Frequency Stability

Client: Enfora W.O.# 1L0435R  
EUT: Enabler-A S/N: None  
Date: 8/9/2001 Tech: Light

Test Equipment used: 1026-283

Temperature	Voltage	Frequency Error
20 °C	115 VAC	-180 Hz
20 °C	98 VAC	-180 Hz
20 °C	132 VAC	-180 Hz
10 °C	115 Vac	+74 Hz
0 °C	115 Vac	+203 Hz
-10 °C	115 Vac	+84 Hz
-20 °C	115 Vac	-84 Hz
-30 °C	115 Vac	-95 Hz
30 °C	115 Vac	-177 Hz
40 °C	115 Vac	-166 Hz
50 °C	115 Vac	-175 Hz

EQUIPMENT: Enabler-A  
FCC ID: MIVCDP10EAM

PROJECT NO.: 1L0435RUS2

**Section 8. Test Equipment List**

ASSET	Description	Manufacturer Model Number	Serial Number	Cal. Date	Cal. Due
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	01/02/01	01/02/02
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	06/01/01	06/01/02
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	06/01/01	06/01/02
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	05/30/01	05/30/02
1029	PEAK POWER METER	HP 8900D	3303U0012	03/12/01	03/12/02
1030	PEAK POWER SENSOR	HP 84811A	2539A03573	03/12/01	03/12/02
1474	20db Attenuator DC 18 Ghz	MCL Inc. BW-S20W2	NONE	CBU	N/A
1082	CABLE 2m	Astrolab 32027-2-29094-72TC	N/A	06/01/01	06/01/02
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	09/17/01	09/18/03
1474	20db Attenuator DC 18 Ghz	MCL Inc. BW-S20W2	NONE	CBU	N/A
1026	FREQUENCY COUNTER	HEWLETT PACKARD 5350B	8232A01493	08/17/01	08/17/02
283	ENVIROMENTAL CHAMBER	ENVIROTRONICS SH27	129010083	05/02/01	05/02/02

**Nemko Dallas**

FCC PART 22, SUBPART H  
800 MHz CELLULAR SUBSCRIBER  
UNITS

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

---

## **ANNEX A - TEST DETAILS**

<b>NAME OF TEST: RF Power Output</b>	<b>PARA. NO.: 1.1046</b>
--------------------------------------	--------------------------

**Minimum Standard:** Para. No. 22.913(a). The E.R.P. of mobile transmitter and auxiliary test transmitter must not exceed 7 watts.

EIA is 19B Para. No. 3.2.1.3. The transmitter shall be compiled of 8 distinct power levels.

The output power shown above shall be maintained within the range of +2 dB, -4 dB of nominal dBW value

PL	I	II	III
0	+6	+2	-2
1	+2	+2	-2
2	-2	-2	-2
3	-6	-6	-6
4	-10	-10	-10
5	-14	-14	-14
6	-18	-18	-18
7	-22	-22	-22

**Method Of Measurement:**

Detachable Antenna:

The power at antenna terminals is measured using an in-line power meter.

Integral Antenna:

If the antenna is not detachable from the circuit then the Power Output is derived from the radiated field strength of the fundamental emission by using the plane wave relation  $GP/4\pi R^2 = E^2/120\pi$  and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent radiated power in watts

E = the maximum measured field strength in V/m

R = the measurement range (3 meters)

G = the numeric gain of the transmit antenna in relation to a halfwave dipole antenna

<b>NAME OF TEST: Audio Frequency Response</b>	<b>PARA. NO.: 2.1047</b>
---	--------------------------

**Minimum Standard:** Para. No. 15-19-B. From 300 to 3000 Hz the audio frequency response shall not vary more than +1 to -3 dB from a true 6dB octave pre-emphasis characteristic as referred to 1000 Hz level (with the exception of a permissible 6dB per octave roll-off from 2500 to 3000 Hz).

**Method Of Measurement:**

Operate the transmitter with the compressor disabled, and monitor the output with a frequency deviation meter or standard test receiver without standard 750-microsecond de-emphasis, with expander disabled, and without C-message weighted filter (see 6.6.2). Apply a sine wave audio input to the transmitter external audio input port, vary the modulating frequency from 300 to 3000 Hz and observe the input levels necessary to maintain a constant  $\pm 2.9$  kHz system deviation.



*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

<b>NAME OF TEST: Audio Low Pass Filter Response</b>	<b>PARA. NO.: 2.1047</b>
---	--------------------------

**Minimum Standard:** Para. No. 22.915 (d). For mobile stations, signals must be attenuated as a function of frequency as follows:

- i. In the frequency ranges 3.0 to 5.9 Hz and 6.1 to 15 kHz, 40 log (f/3) dB.
- ii. In the frequency range 5.9 to 6.1 kHz, 35 dB
- iii. In the frequency range above 15 kHz, 28 dB.

**Method Of Measurement:**

Adjust the audio input frequency to 1000 Hz and adjust the input level to 20 dB greater than that required to produce  $\pm 8$  kHz deviation. Note the output level on the frequency deviation meter or standard test receiver. Using the output level as reference (0dB), vary the modulating frequency from 3000 Hz to 30,000 Hz and observe the change in output while maintaining a constant audio input level.

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

<b>NAME OF TEST: Modulation Limiting</b>	<b>PARA. NO.: 2.1047</b>
--	--------------------------

**Minimum Standard:** Para. No. 22.915(b)

The levels of the modulating signals must be set to the values specified below and must be maintained within  $\pm 10\%$  of these values.

- Voice:  $\pm 12$  kHz
- SAT:  $\pm 2$  kHz
- Wideband Data:  $\pm 8$  kHz
- ST:  $\pm 8$  kHz

**Method Of Measurement:**

Voice: A 1 kHz audio tone is injected at levels between -45 and +20 dBVrms. The peak deviation is noted. This is repeated with a 300 Hz tone and a 3 kHz tone.

SAT: A SAT tone is generated by the mobile station and the peak deviation is measured.

Wideband Data: Wideband data is generated by the mobile station and the peak deviation is measured.

ST: ST data is generated by the mobile station and the peak deviation is measured.

<b>NAME OF TEST: Occupied Bandwidth (Voice &amp; SAT)</b>	<b>PARA. NO.: 2.1049</b>
---	--------------------------

**Minimum Standard:** 22.917(b) The mean power of any emission removed from the carrier frequency by a displacement frequency ( $f_d$  in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

- (i) On any frequency removed from the carrier frequency by more than 20 kHz but not more than 45 kHz: at least 26 dB
- (ii) On any frequency removed from the carrier frequency by more than 45 kHz, up to the first multiple of the carrier frequency:

at least 60 dB or  $43 + 10 \log (P)$  dB, whichever is the lesser attenuation.

**Method Of Measurement:**

Spectrum Analyzer Settings:

RBW: 300 Hz  
VBW:  $\geq$  RBW  
Span: 100 kHz  
Sweep: Auto  
Mask: CELLF3E

Input Signal Characteristics (F3E/F3D):

AF1 frequency: 2.5 kHz  
AF1 level: 16 dB above the level sufficient to produce  $\pm 6$  kHz deviation with a 1 kHz tone.  
SAT: 6000 Hz SAT  
SAT level: sufficient to produce  $\pm 2$  kHz deviation.

**NAME OF TEST: Occupied Bandwidth (WBD & SAT)      PARA. NO.: 2.1049**

**Minimum Standard:**      22.917(d) The mean power of any emission removed from the carrier frequency by a displacement frequency ( $f_d$  in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

(1) On any frequency removed from the carrier frequency by more than 20 kHz but not more than 45 kHz:

at least 26 dB

(2) On any frequency removed from the carrier frequency by more than 45 kHz but not more than 90 kHz:

at least 45 dB

(3) On any frequency removed from the carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency:

at least 60 dB or  $43 + 10 \log (P)$  dB, whichever is the lesser attenuation.

**Method Of Measurement:**

Spectrum Analyzer Settings:

RBW: 300 Hz  
VBW:  $\geq$  RBW  
Span: 200 kHz  
Sweep: Auto  
Mask: CELLF1D

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer  
10 kbps WBD + DAT  
ST

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

---

<b>NAME OF TEST: Spurious Emission at Antenna Terminals</b>	<b>PARA. NO.: 2.1051</b>
---	--------------------------

**Minimum Standard:** Para. No. 22.917(b). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least  $43 + 10 \log P$ . This is equivalent to -13 dBm absolute power.

**Method Of Measurement:**

Spectrum Analyzer Settings:

RBW: 30 kHz (AMPS). As required for digital modulations.

VBW:  $\geq$  RBW

Start Frequency: 0 MHz

Stop Frequency: 10 GHz

Sweep: Auto

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*

PROJECT NO.: 1L0435RUS2

---

<b>NAME OF TEST: Field Strength of Spurious Radiation</b>	<b>PARA. NO.: 2.1053</b>
---	--------------------------

**Minimum Standard:** Para. No. 22.917(b). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least  $43 + 10 \log P$ . This is equivalent to -13 dBm absolute power.

**Test Method:** TIA/EIA-603-1992, Section 2.2.12

The antenna substitution method was used to determine the equivalent radiated power at spurious frequencies. The spurious emissions were measured at a distance of 3 meters. The EUT was then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna was fed with a signal at the spurious frequency. The level of the signal was adjusted to repeat the previously measured level. The resulting erp is the signal level fed to the reference antenna corrected for gain referenced to a dipole.

*The spectrum is searched to 10 GHz.*

**NAME OF TEST: Frequency Stability** **PARA. NO.: 2.1055**

**Minimum Standard:** Para. No. 22.355. The transmitter carrier frequency shall remain within the tolerances given in Table C-1.

Freq. Range (MHz)	Mobile > 3 W	Mobile ≤ 3 W
821 to 896	2.5	2.5

Table C-1

**Method Of Measurement:**

Frequency Stability With Voltage Variation:

The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. The frequency counter and signal generator are phase locked with the same 10 MHz reference frequency by connecting the 10 MHz ref. out of the counter to the 10 MHz ref, in of the signal generator. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation:

The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.

**Nemko Dallas**

FCC PART 22, SUBPART H  
800 MHz CELLULAR SUBSCRIBER  
UNITS

*EQUIPMENT: Enabler-A*  
*FCC ID: MIVCDP10EAM*


PROJECT NO.: 1L0435RUS2

---


## **ANNEX B - TEST DIAGRAMS**



**Para. No. 2.1046 - R.F. Power Output**

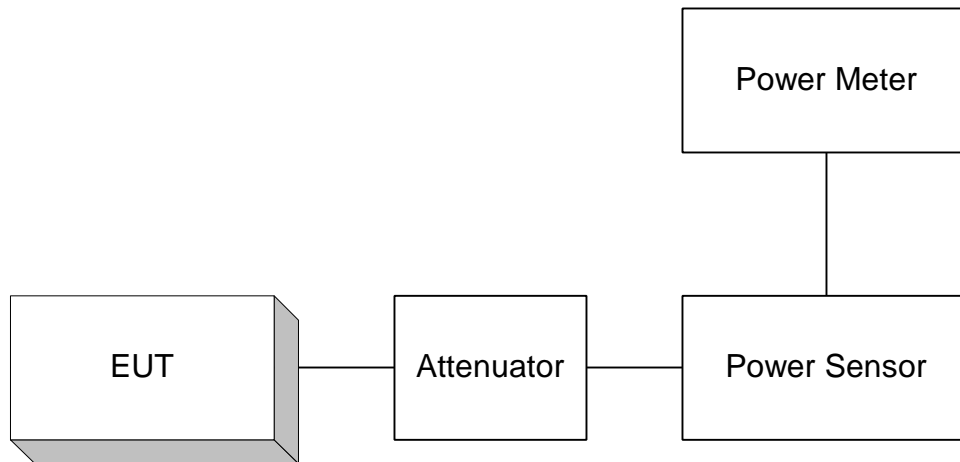


**Para. No. 2.1049 - Occupied Bandwidth**

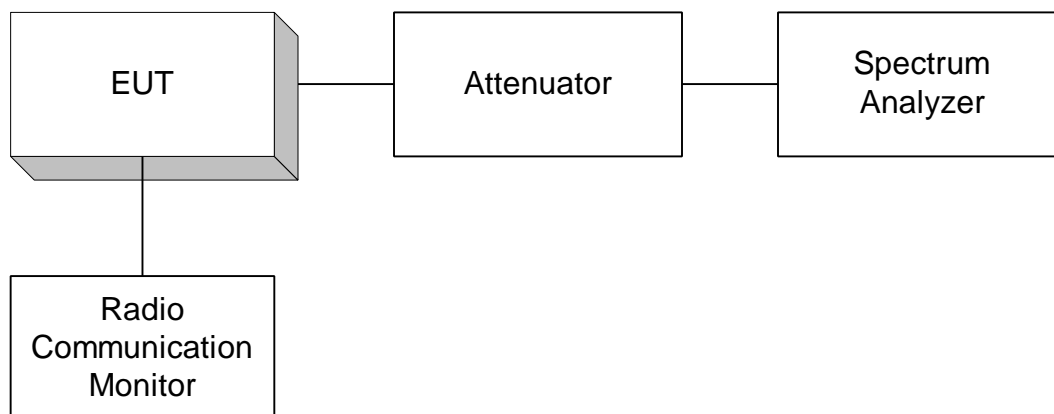


*The Radio Communication Monitor is used only to provide modulation input for external modulation.*

**Para. No. 2.1051 Spurious Emissions at Antenna Terminals**

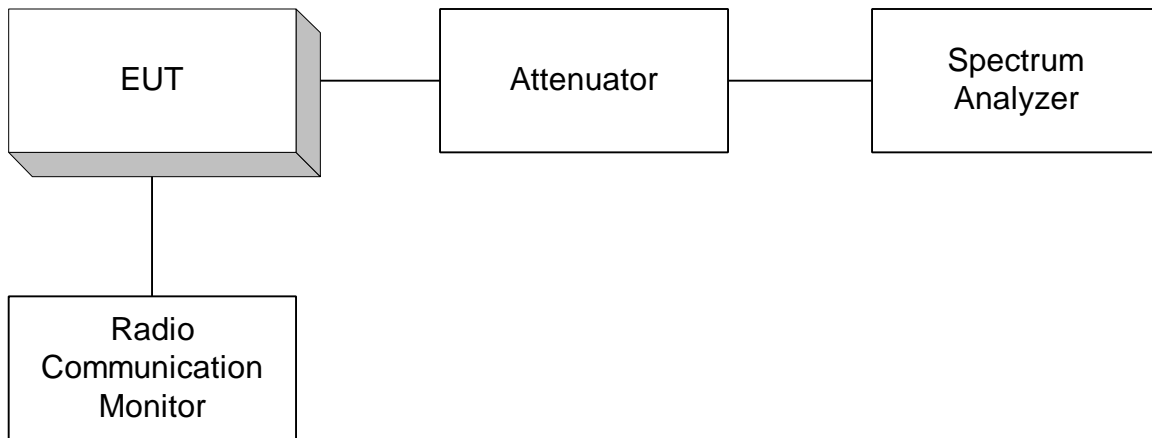


*The Radio Communication Monitor is used only to provide modulation input for external modulation.*

**Para. No. 2.1053 - Field Strength of Spurious Radiation**

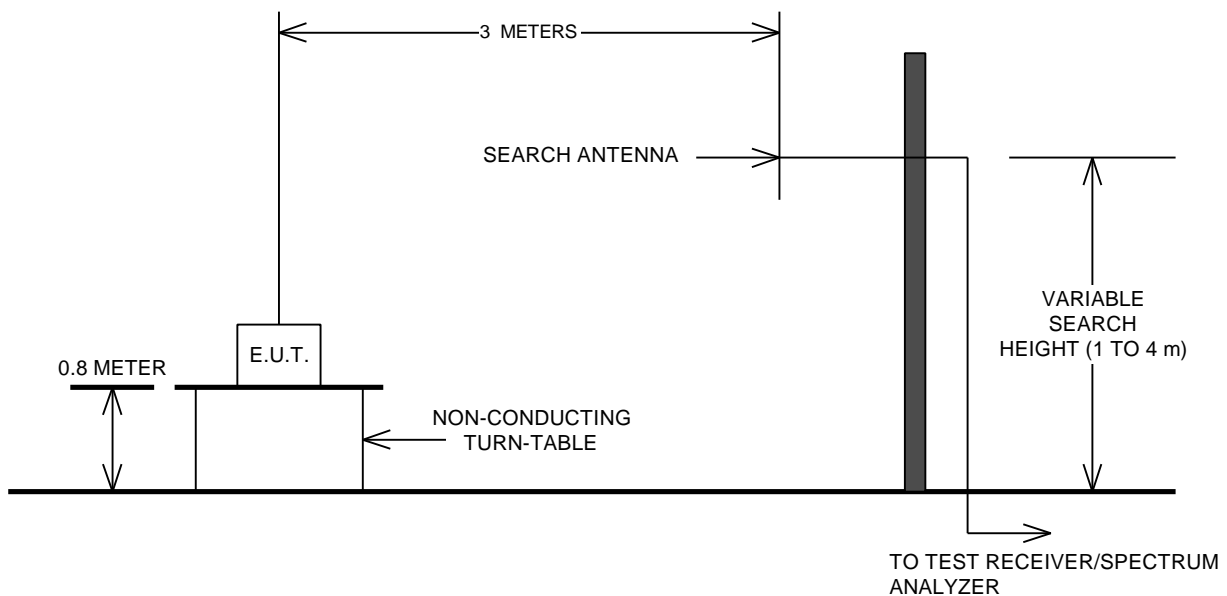

**Para. No. 2.1055 - Frequency Stability**

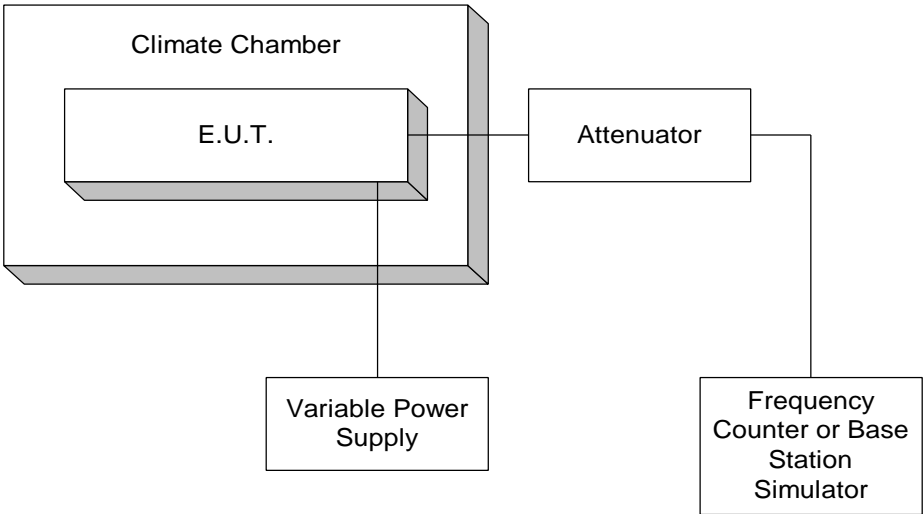

**Para. No. 2.1045 – Audio Frequency Response, Audio Low Pass Filter Response And Modulation Limiting**

