

EMISSION -- TEST REPORT

Testreport file no. : T 19663-1-00 MN Date : Nov. 06, 2000
of issue

Model : Transmitter for detecting leaks in water
distribution systems.

Type : Permalog Logger II

Applicant : Palmer environmental Ltd.

Manufacturer : Palmer environmental Ltd.

Licence holder : Palmer environmental Ltd.

Address : TY COCH HOUSE, CWMBRAN

GWENT, NP44 3AW, UK

Test result accr. to the regulation(s) at page 3 :

POSITIV

This testreport with appendix consists of **51** pages.
The testresult only responds to the tested sample. It is not allowed to copy
this report even partly without the allowance of the testlaboratory.

D I R E C T O R Y

	<u>Page</u>
A) Documentation	
Directory	2
Testregulations	3
General information	4-5
Discovery of worst case condition	6
Equipment under Test	20
Summary	21
B) Testdata	
Conducted emissions 10/150 kHz - 30 MHz	7
Spurious emissions (magnetic field) 10 kHz - 30 MHz	8-9
Spurious emissions (electric field) 30 MHz - 1000 MHz	10-11
Spurious emissions (electric field) 1 GHz - 18 GHz	12-13
Radiated power of the fundamental wave	14
Conducted power of the fundamental wave	15
Frequency error	16-17
Keeping the requirements of the emission mask	18-19
Attachment	
A) Testdata	A1-A18
B) List of Test Equipment	B1
C) Photos of the test setup	C1-C2
D) Technical description of the test sample (e.g.CDF, Declaration)	D1-D3
E) Photos of the EuT	E1-E6
F) Measurement Protocol for FCC, VCCI and AUSTEL	--

TEST REGULATIONS

The tests were performed according to following regulations :

- - EN 50081-1 / 2.1991
- - EN 50081-2 / 7.1993

- - EN 55011 / 3.1991
- - EN 55014 / 4.1993
- - EN 55014 / A2:1990
- - EN 55104 / 5.1995
- - EN 55015 / A1:1990
- - EN 55015 / 12.1993
- - EN 55022 / 5.1995
- - prEN 55103-1 / 3.1995
- - prEN 50121-3-2 / 3.1995
- - EN 60601-1-2 / 4.1994
- - VCCI
- - Part 90 Subpart I (90.217)

○ - Group 1	○ - Group 2
○ - class A	○ - class B
○ - Household appliances and similar	
○ - tools	
○ - Semiconductor devices	
Category:	
○ - class A	○ - class B
○ - class 1	○ - class 2

ADDRESS OF THE TEST LABORATORY

- - MIKES BABT PRODUCT SERVICE GmbH
Ohmstrasse 2-4
D - 94342 Strasskirchen
- - _____

ENVIRONMENTAL CONDITIONS

Temperature: 15-35 ° C
Humidity 45-60 %
Atmospheric pressure 860-1060 mbar

POWER SUPPLY SYSTEM UTILIZED

Power supply system : Battery Unom = 3.6 V DC

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error of ± 4 dB. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)

Transmitter for detecting leaks in water distribution systems.
The EuT transmits to the receiver 1 KHz to indicates no leak and 2 KHz to indicates Leak.

Number of received/tested samples: 1 / 1

DEFINITIONS FOR SYMBOLS USED IN THIS TEST REPORT

- - Black box indicates that the listed condition, standard or equipment is applicable for this Report.
- - Blank box indicates that the listed condition, standard or equipment was not applicable for this Report.

M E A S U R E M E N T P R O T O C O L F O R F C C , V C C I A N D A U S T E L

Test Methodology

Conducted and radiated emission testing is performed according to the procedures in International Special Committee on Radio Interference (CISPR) Publication 22 (1993), European Standard EN 55022 and Australian Standard AS 3548 (which are based on CISPR 22).

The Japanese standard, "Voluntary Control Council for Interference (VCCI) by Data Processing Equipment and Electronic Office Machines, Technical Requirements" is technically equivalent to CISPR 22 (1993). For official compliance, a conformance report must be sent to and accepted by the VCCI.

In compliance with FCC Docket 92-152, "Harmonization of Rules for Digital Devices Incorporate International Standards", testing for FCC compliance may be done following the ANSI C63.4-1992 procedures and using the FCC limits or the CISPR 22 Limits.

Measurement Error

The test system for conducted emissions is defined as the LISN, tuned receiver and coaxial cable. The test system for spurious emissions is defined as the antenna, the pre-amplifier, the tuned receiver and the coaxial cable. These test systems have an expected error of ± 3 dB. The equipment comprising the test systems are calibrated on an annual basis.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

General Standard Information

The test methods used comply with CISPR Publication 22 (1993), EN 55022 (1987) and AS 3548 (1992) - "Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment" and with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

For detailed description of each measurement please refer to section testresults.

DISCOVERY OF WORST CASE MEASUREMENT CONDITION:

The Permalog Logger is designed for the operation on the fixed transmitter frequency of approx. 463.9 MHz.

To find out the worst case conditions for the complete measurement the following tests have been performed:

- Measurement of the radiated fieldstrength of the operating frequency measured in unmodulated transmission mode in the specified channel. This measurement have been performed in order to find out the maximum transmitted fieldstrength of the EuT.
- Measurement of the radiated spurious emissions and frequency error measured in unmodulated transmission mode in the specified channel. This measurement have been performed in order to find out the maximum spurious emissions of the Eut.
- Measurement of the bandwidth under extreme conditions measured in modulated transmission mode in the specified channel.

Based on this testresults, the measurements have been performed completely on the specified channel. This testresults are documented in the following sections of the testreport.

TEST RESULT

CONDUCTED EMISSIONS - 10/150 kHz - 30 MHz

■ - Test not applicable

Testlocation :

- - Shielded room no. 1
- - Shielded room no. 2
- - Shielded room no. 3
- - Shielded room no. 4
- - Shielded room no. 5
- - Shielded room no. 6
- - Shielded room no. 7
- - Anechoic chamber
- - Full compact chamber

For TEST EQUIPMENT USED please refer to ATTACHMENT B: _____

Description of Measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit, which is equivalent to the Australian AS 3548 limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasipeak detection, and a Line Impedance Stabilization Network (LISN), with 50Ω / $50 \mu\text{H}$ (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasipeak and average detection and recorded on the data sheets.

Testresult

The requirements are

O - MET

O - NOT MET

Min. limit margin _____ dB at _____ MHz

Max. limit exceeding _____ dB at _____ MHz

Remarks: The EUT is battery powered.

SPURIOUS EMISSION

Spurious emissions from the EUT are measured in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 3, 10 or 30 meters horizontally from the EUT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 10 times the highest used frequency using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasipeak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection, remeasurement of results which may be critical will be repeated in average mode. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees.

SPURIOUS EMISSION (MAGNETIC FIELD) 10 kHz - 30 MHz

■ - Test not applicable

- o - in a shielded room
- o - at a non - reflecting open-site and
- o - in a testdistance of 3 meters.
- o - in a testdistance of 30 meters.

For TEST EQUIPMENT USED please refer to ATTACHMENT B: _____

Description of Measurement

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the EMI receiver (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	Limit (dB μ V/m)	=	Delta (dB)
1.705	5	+	20	=	25	30	=	5

Testresult in detail:

Frequency MHz	L: QP dB μ V	L: AV dB μ V	Correct.	L: QP dB μ V/m	L: AV dB μ V/m	Limit dB μ V/m

The requirements are

- MET

- NOT MET

Min. limit margin

_____ dB

_____ MHz

Max. limit margin

_____ dB

_____ MHz

Remarks: NOT APPLICABLE

SPURIOUS EMISSIONS (electric field) 30 MHz - 1000 MHz

- - Test not applicable

- - Open-site 1
- - Open-site 2
- - 3 meters
- - 10 meters
- - 30 meters

For TEST EQUIPMENT USED please refer to ATTACHMENT B: A5

Description of Measurement

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page 24 - 25. The CISPR 22 limit is equivalent to the Australian AS 3548 limit.

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	Limit (dB μ V/m)	=	Delta (dB)
719	75	+	32.6	=	107.6	110	=	-2.4

Testresult in detail:

Frequency MHz	L: Peak dB μ V	L: QP dB μ V	L: AV dB μ V	Correct	L: Peak dB μ V	L: QP dB μ V/m	L: AV dB μ V/m	Limit dB μ V/m
927.8	25.4	11.1	0.3	33.3	58.7	44.4	33.6	88.2

Testresult

The requirements are

- MET - NOT MET

Min. limit margin

43.8 dB at 927.8 MHz

Max. limit exceeding

_____ dB at _____ MHz

Remarks: The limits are met.

SPURIOUS EMISSION 1 GHz - 18 GHz

- Test not applicable

Testlocation :

- Open-site 1
- Open-site 2
- Anechoic chamber
- Full compact chamber

- 1 meters
- 3 meters
- 10 meters

For TEST EQUIPMENT USED please refer to ATTACHMENT B: SER3

Description of Measurement

The final level, expressed in dB μ V/m, is arrived by taking the reading from the Spectrumanalyzer in dB μ V and adding the correction factors of the test setup incl. cables.

Example of the correction value at 1.8 GHz

Level reading at 1.8 GHz	Correction EMCO 3115	correction Amplifier AWT 4534 + cable	Correction factor (summarized)	corrected level
56 dB μ V	+27.3 dB	-41.2 dB	-15.8 dB	42.1 dB μ V/m

Testresult

The requirements are

- MET

- NOT MET

Min. limit margin

36.2 dB at 1.882 GHz

Max. limit exceeding

 dB at GHz

Remarks: The limits are met. The measurement has been performed in Peak-mode for 1 GHz to 4.7 GHz. For critical results, the measurement would be repeated in average mode.

Testresult in detail:

Frequency GHz	L: Peak dB μ V	L: AV dB μ V	Correct.	L: Peak dB μ V/m	L: AV dB μ V/m	Limit dB μ V/m
1.392	66.7	43.6	-15.4	51.3	28.2	88.2
1.882	65.1	42.8	-13.1	52.0	29.7	88.2
2.319	57.0	42.6	-11.1	45.9	31.5	88.2

FIELD STRENGTH OF THE FUNDAMENTAL WAVE

- Test not applicable

- Open-site 1
- Open-site 2
- 3 meters
- 10 meters
- 30 meters

For TEST EQUIPMENT USED please refer to ATTACHMENT B: CPR2

Description of Measurement

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page 24 - 25. The CISPR 22 limit is equivalent to the Australian AS 3548 limit.

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	-	Limit (dB μ V/m)	=	Delta (dB)
315	45	+	22.5	=	67.5	-	74.3	=	-6.8

Testresult in detail:

Frequency GHz	L: Peak dB μ V	L: QP dB μ V	L: AV dB μ V	Correct	L: Peak dB μ V/m	L: QP dB μ V	L: AV dB μ V/m	Limit dB μ V/m
463.9	54.6	41.9	29.1	24.8	79.4	66.7	53.9	118.2

Testresult

The requirements are

- MET

- NOT MET

Min. limit margin 51.5 dB at 463.9 MHz

Max. limit exceeding dB at MHz

Remarks: The limits are met.

CONDUCTED POWER OF THE FUNDAMENTAL WAVE MEASURED

ON THE ANTENNA TERMINALS

- Test not applicable

Testlocation :

- o - Shielded room no. 1
- o - Shielded room no. 2
- o - Shielded room no. 3
- o - Shielded room no. 4
- o - Shielded room no. 5
- o - Shielded room no. 6
- o - Shielded room no. 7
- o - Anechoic chamber
- o - Full compact chamber
- o - Climatic test chamber VLK

For TEST EQUIPMENT USED please refer to ATTACHMENT B: _____

Description of Measurement

The conducted power of the fundamental wave measured on the antenna terminals in a climatic test chamber. The antenna jack was connected to the input of a communication test receiver. The internal batteries have been removed also and a variable DC power supply was used instead. The measurements have been made with the EUT unmodulated. During the test the supply voltage and the temperature were varied and applied simultaneously. The lower supply voltage was given by the manufacturer. In case the equipment was switching off before, the switch off voltage was used instead.

Testresult

The requirements are

O - MET

O - NOT MET

Frequency range of equipment		Power/dBm	Power/dBm	Power/dBm	Power/dBm	Power/dBm	Power/dBm
Tempera-ture/°C	DC supply voltage/V						
-30							
-20							
-10							
0							
+10							
+20							
+30							
+40							
+50							

Remarks: NOT APPLICABLE

FREQUENCY ERROR

- **Test not applicable**

Testlocation :

- Shielded room no. 1
- Shielded room no. 2
- Shielded room no. 3
- Shielded room no. 4
- Shielded room no. 5
- Shielded room no. 6
- Shielded room no. 7
- Anechoic chamber
- Full compact chamber
- Climatic test chamber VLK

For TEST EQUIPMENT USED please refer to ATTACHMENT B: FE _____

Description of Measurement

The frequency error was measured with antenna jack in a climatic test chamber. The antenna jack was connected to the input of a communication test receiver. The internal batteries have been removed also and a variable DC power supply was used instead. The measurements have been made with the EUT unmodulated. During the test the supply voltage and the temperature were varied and applied simultaneously. The lower supply voltage was given by the manufacturer. In case the equipment was switching off before, the switch off voltage was used instead. The frequency error is defined as the deviation of the transmitting frequency from the nominal frequency.

Testresult:

The requirements are

■ - MET**O - NOT MET**

Frequency range of equipment								
Tempera- ture/°C	DC supply voltage/V	Frequency error/kHz						
-30	3.6	0.32						
	3.0	0.32						
-20	3.6	0.06						
	3.0	0.05						
-10	3.6	-0.11						
	3.0	-0.09						
0	3.6	-0.18						
	3.0	-0.16						
+10	3.6	-0.16						
	3.0	-0.15						
+20	3.6	-0.10						
	3.0	-0.08						
+30	3.6	0.00						
	3.0	-0.03						
+40	3.6	0.04						
	3.0	0.04						
+50	3.6	0.09						
	3.0	0.09						

Remarks: The most strict limit for this frequency range is: 23.2 kHz(0.005% of 463.9 MHz)

KEEPING THE REQUIREMENTS OF THE EMISSION MASK

- - Test not applicable

Testlocation :

- - Shielded room no. 1
- - Shielded room no. 2
- - Shielded room no. 3
- - Shielded room no. 4
- - Shielded room no. 5
- - Shielded room no. 6
- - Shielded room no. 7
- - Anechoic chamber
- - Full compact chamber
- - Climatic test chamber VLK

For TEST EQUIPMENT USED please refer to ATTACHMENT B: EM

Description of Measurement

The keeping of the requirements of the emission mask was measured with an antenna jack in Climatic test chamber. The antenna jack was connected to the input of a spectrum analyzer. The spectrum analyzer was set up as following:

- video and resolution bandwidth: 10 kHz
- attenuation: automatic, low noise
- center frequency: nominal transmit frequency
- frequency span: 100 kHz

The reference level was set to the maximum value of the unmodulated carrier. The internal batteries have been removed also and a variable DC power supply was used instead. The measurements have been made with a modulation frequency and voltage accdg. to the specification of the manufacturer. During the test the supply voltage and the temperature were varied and applied simultaneously. The lower supply voltage was given by the manufacturer. In case the equipment was switching off before, the switch off voltage was used instead.

Testresult

The requirements are

■ - MET

○ - NOT MET

The **requirements** are as following:

Attenuation on any frequencies removed from the transmit frequency between 50 and 100 % of the authorized bandwidth: at least 25 dB
between 100 and 250 % of the authorized bandwidth: at least 35 dB
more than 250 % of the authorized bandwidth: see spurious emissions

The following table is showing the minimal margin to the required attenuations:

Temperatur /°C	DC supply voltage /V	±50-100% [dB]	±100-250% [dB]	±50-100% [dB]	±100-250% [dB]	±50-100% [dB]	±100-250% [dB]
-30	3.6	> 5	> 10				
	3.0	> 5	> 10				
-20	3.6	> 5	> 10				
	3.0	> 5	> 10				
-10	3.6	> 5	> 10				
	3.0	> 5	> 10				
0	3.6	> 5	> 10				
	3.0	> 5	> 10				
10	3.6	> 5	> 10				
	3.0	> 5	> 10				
20	3.6	> 5	> 10				
	3.0	> 5	> 10				
30	3.6	> 5	> 10				
	3.0	> 5	> 10				
40	3.6	> 5	> 10				
	3.0	> 5	> 10				
50	3.6	> 5	> 10				
	3.0	> 5	> 10				

Remarks: The limit is kept. The attenuation is related to the un-modulated carrier. For plot see page A1-A18.

EQUIPMENT UNDER TEST

Operation - mode of the EUT.:

The equipment under test was operated during the measurement under following conditions:

- Standby
- Testprogram (H - Pattern)
- Testprogram (color bar)
- Testprogram (customer specific)
- Transmit (unmodulated) (for radiated measurements and frequency error)
- Transmit (modulated) (for bandwidth under extreme conditions
measurements)

Configuration of the equipment under test: see appendix

Following periphery devices and interface cables were connected during the measurement:

- _____ Type : _____
- _____
- unshielded power cable
- unshielded cables
- shielded cables MPS.No. : _____
- customer specific cables (wireless microphone)
- no cables
- _____

S U M M A R Y

GENERAL REMARKS:

FINAL JUDGEMENT:

The requirements according to the technical regulations and tested operation modes are

- - met.
- - **not** met.

The equipment under test

- - **Fulfills** the general approval requirements cited on page 3.
- - **Does not** fulfill the general approval requirements cited on page 3.

Date of receipt of test sample : accdg. to storage record

Testing Start Date : August 23, 2000

Testing End Date : Oktober 24, 2000


- MIKES BABT PRODUCT SERVICE GmbH -

i.V. Günter Mikes
Günter Mikes
Dipl.-Ing. (FH)

Test-engineer


Mahmoud Nouri
Dipl.-Ing.

Attachment A1
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

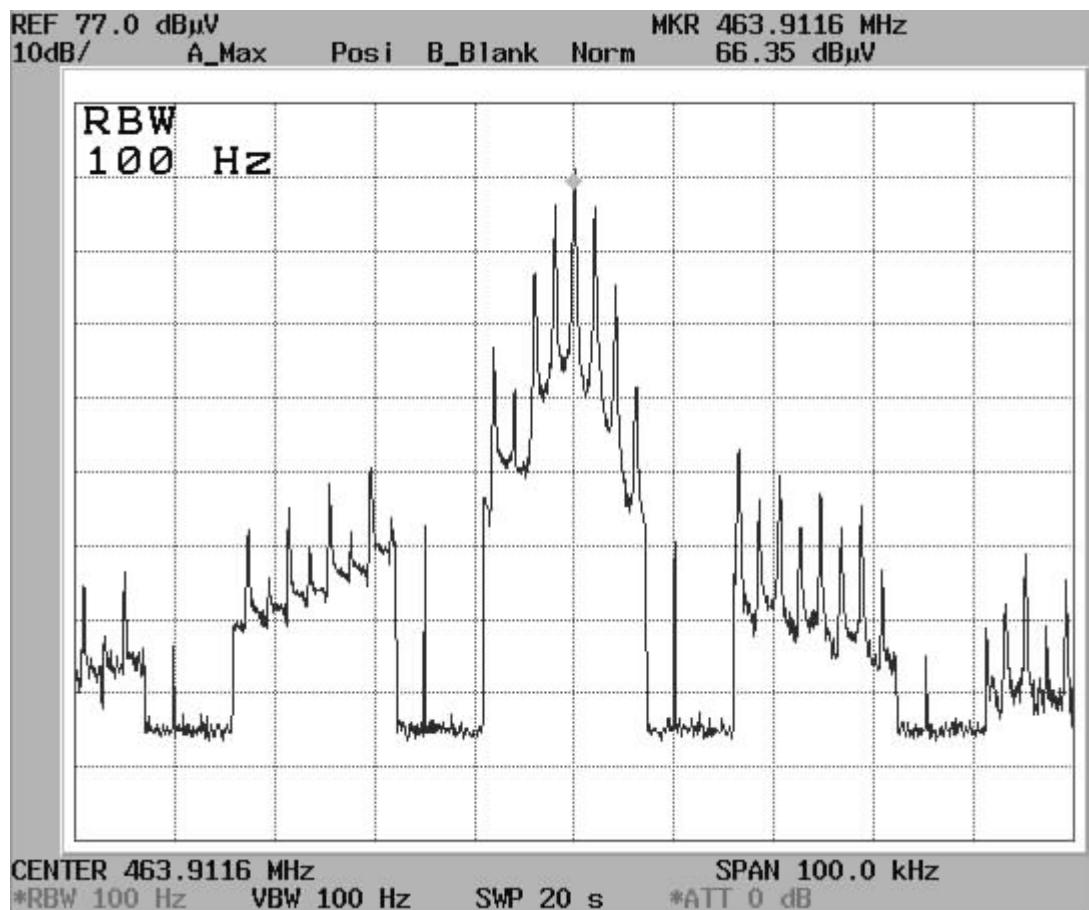


EuT: **Permalog LoggerII**

Temperatuue: **50** °C

Testvoltage: **3.6** V/ DC

Attachment A2
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

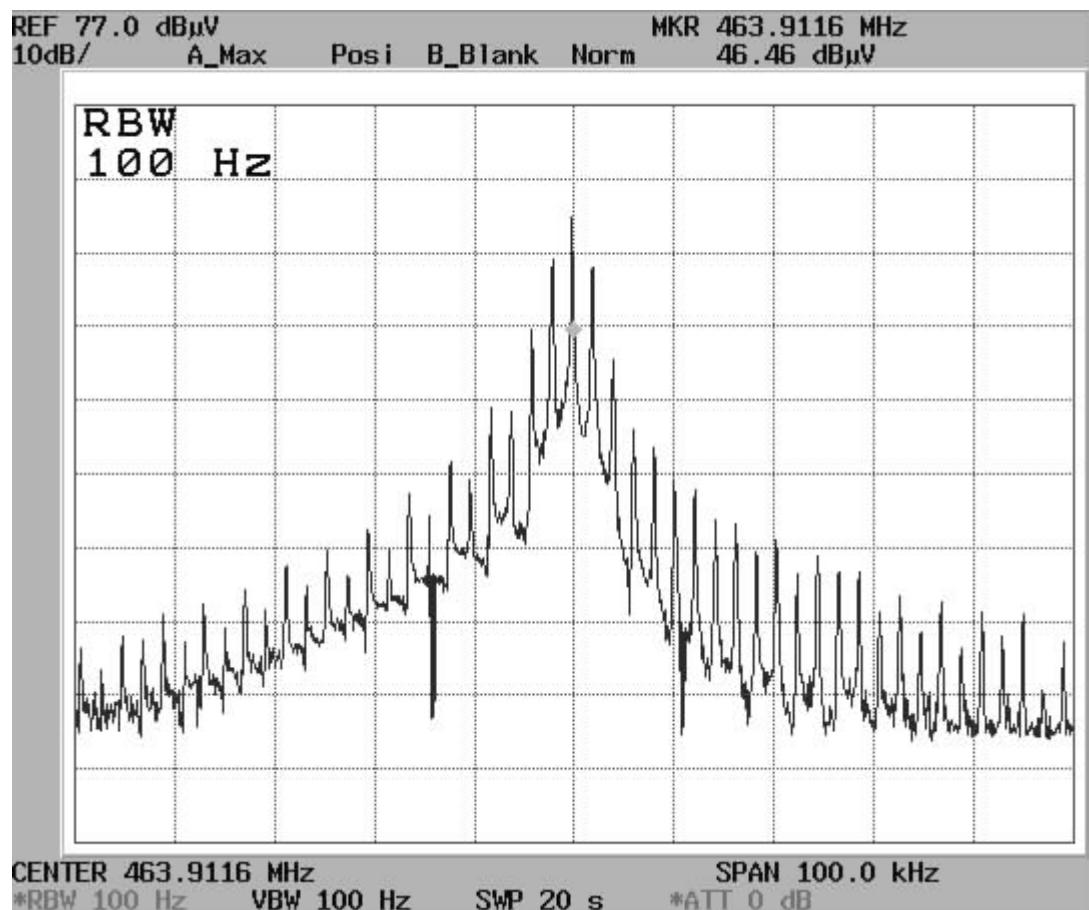


EuT: Permalog LoggerII

Temperatuue: 50 °C

Testvoltage: 3.0 V/ DC

Attachment A3
FCC ID MJCPERMALOGII
File-No. T 19663-00 MN

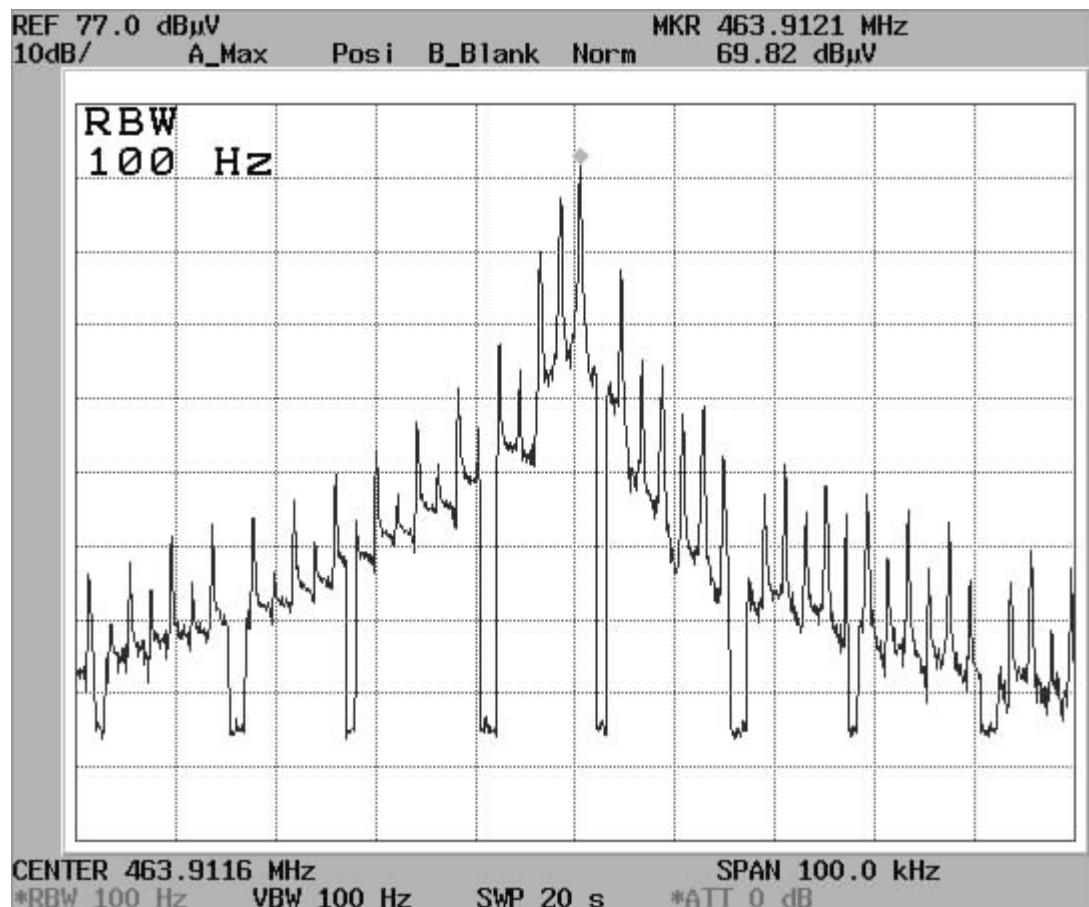


EuT: **Permalog LoggerII**

Temperatuue: **40** $^{\circ}$ **C**

Testvoltage: **3.6** **V/ DC**

Attachment A4
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

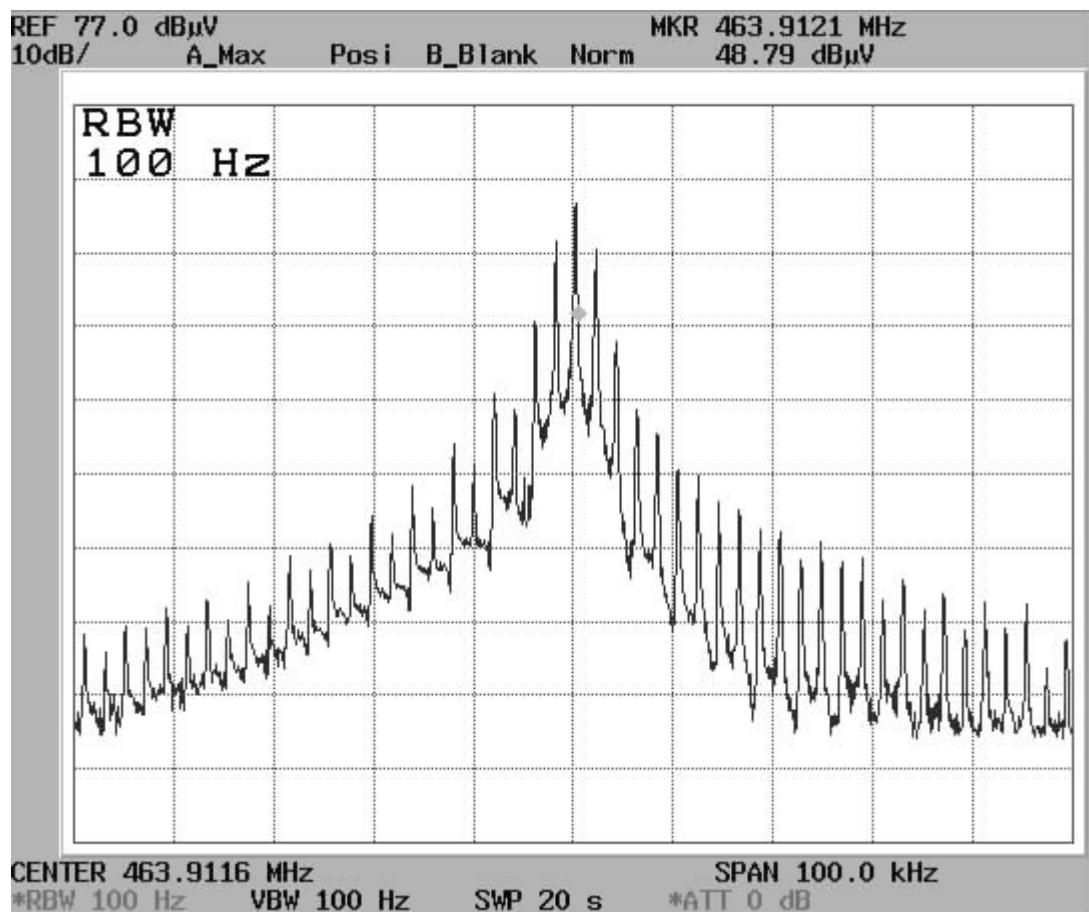


EuT: **Permalog LoggerII**

Temperatuue: **40** °C

Testvoltage: **3.0** V/ DC

Attachment A5
FCC ID MJCPERMALOGII
File-No. T 19663-00 MN

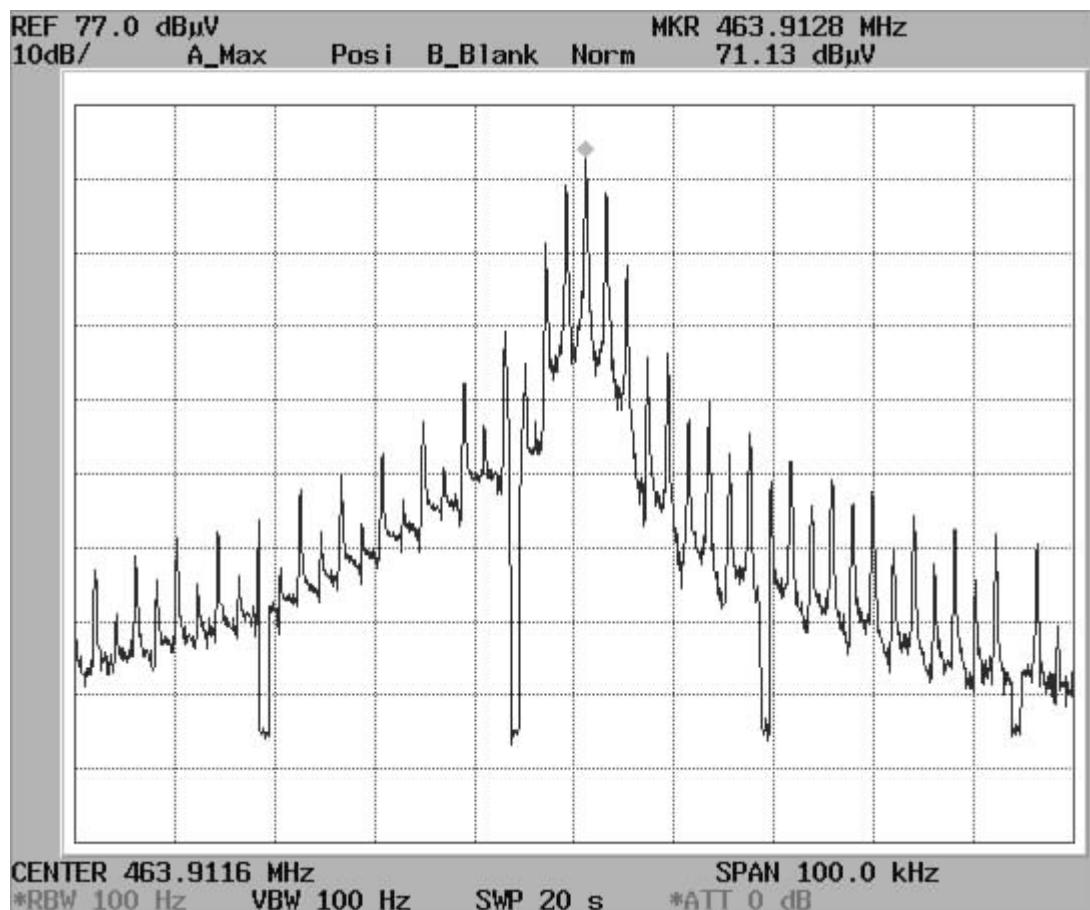


EuT: **Permalog LoggerII**

Temperatuue: **30 °C**

Testvoltage: **3.6 V/ DC**

Attachment A6
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

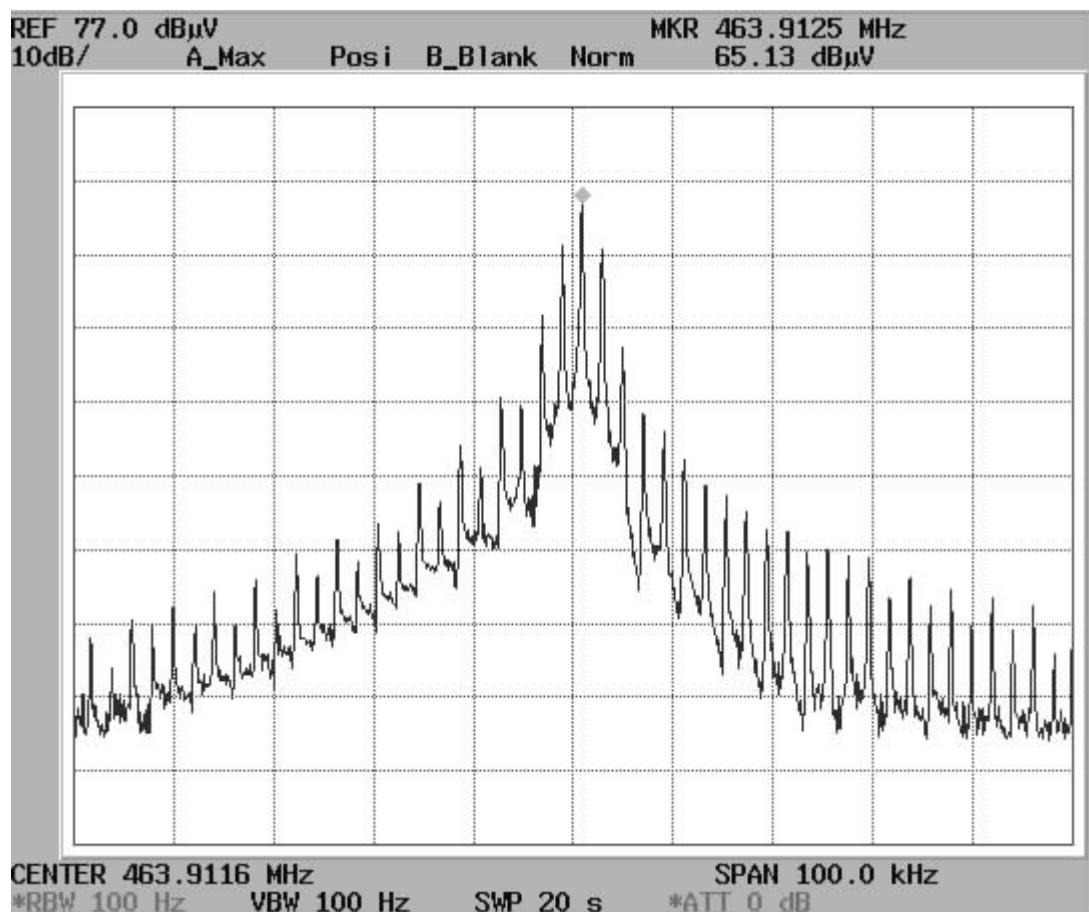


EuT: **Permalog LoggerII**

Temperatuue: **30 °C**

Testvoltage: **3.0 V/ DC**

Attachment A7
FCC ID MJCPERMALOGII
File-No. T 19663-00 MN

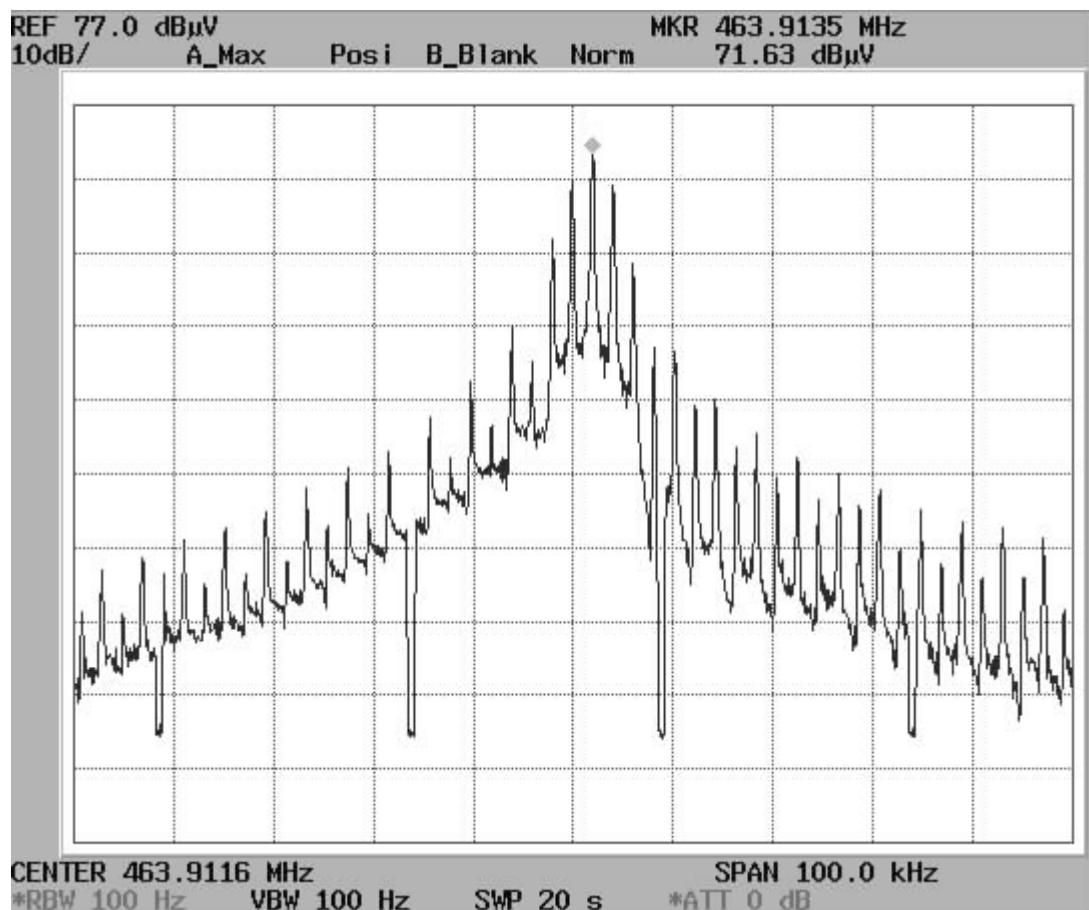


EuT: **Permalog LoggerII**

Temperatuue: **20** °C

Testvoltage: **3.6** V/ DC

Attachment A8
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

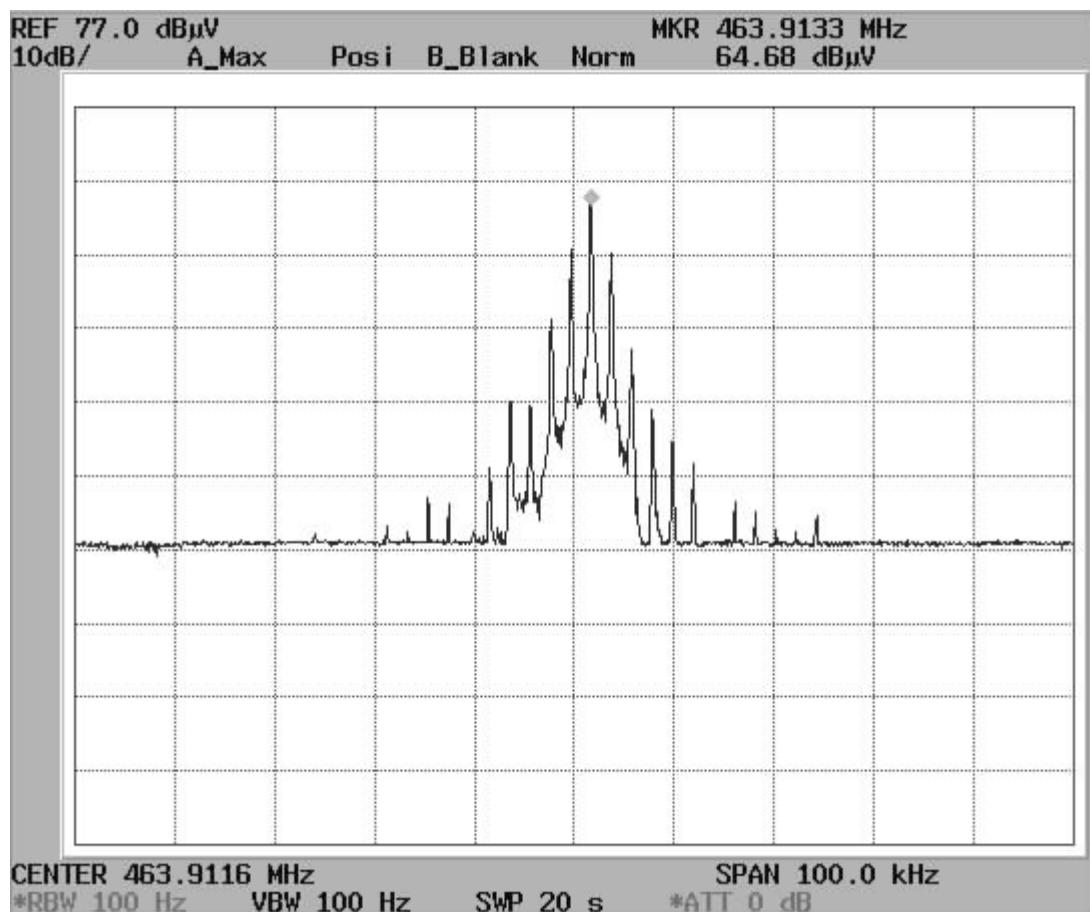


EuT: **Permalog LoggerII**

Temperatuue: **20** °C

Testvoltage: **3.0** V/ DC

Attachment A9
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

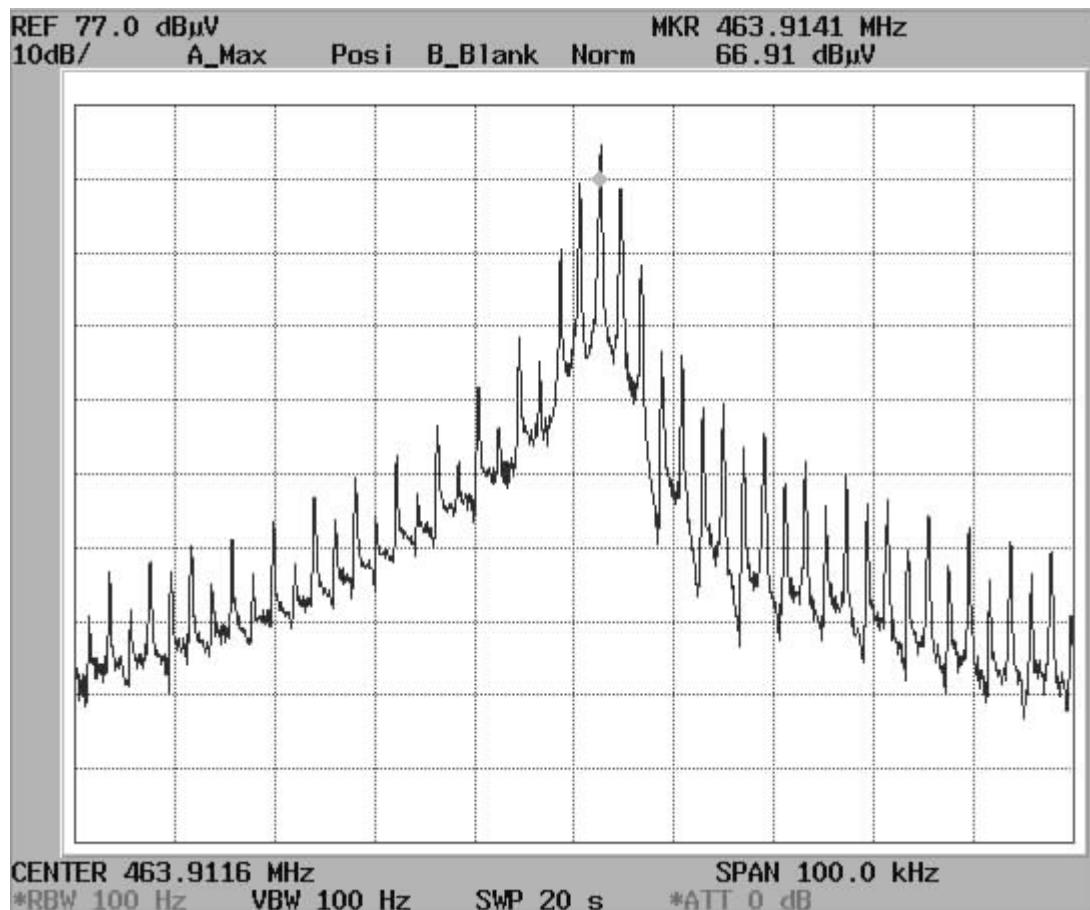


EuT: Permalog LoggerII

Temperatuue: 10 °C

Testvoltage: 3.6 V/ DC

Attachment A10
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

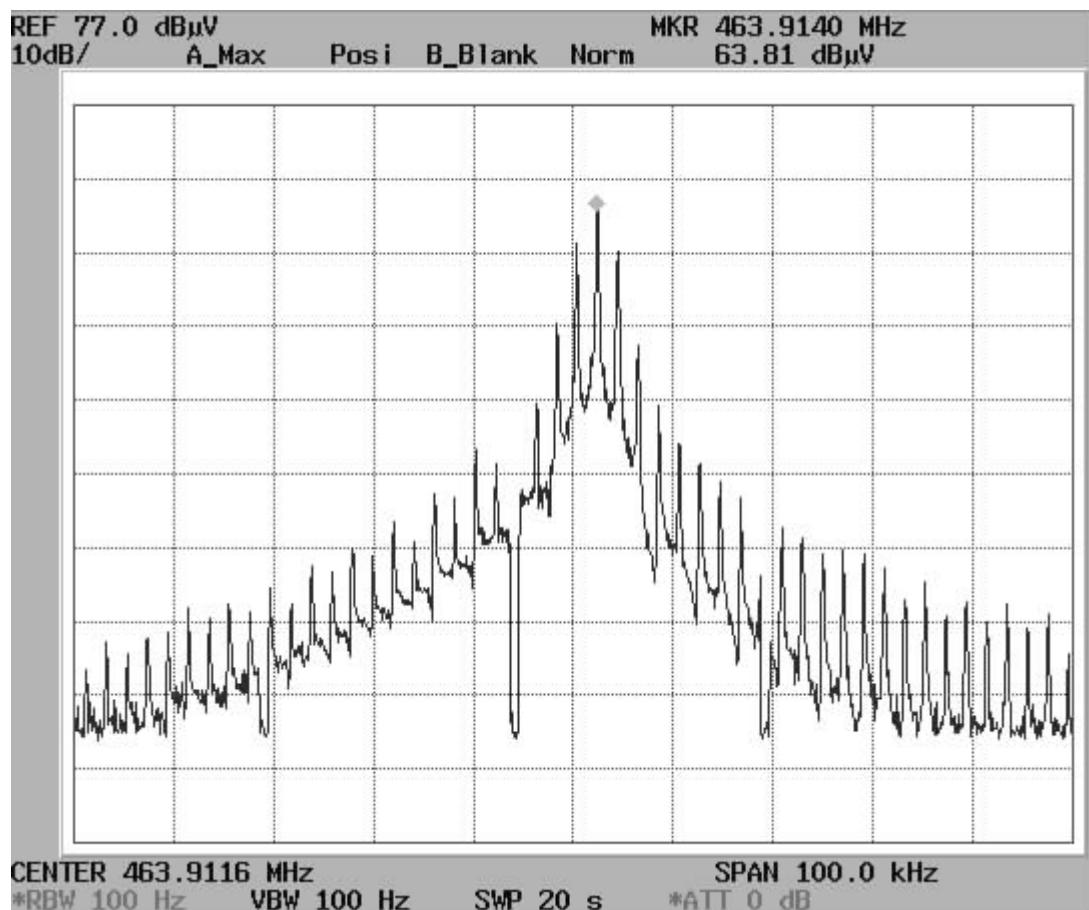


EuT: **Permalog LoggerII**

Temperatuue: **10** °C

Testvoltage: **3.0** V/ DC

Attachment A11
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

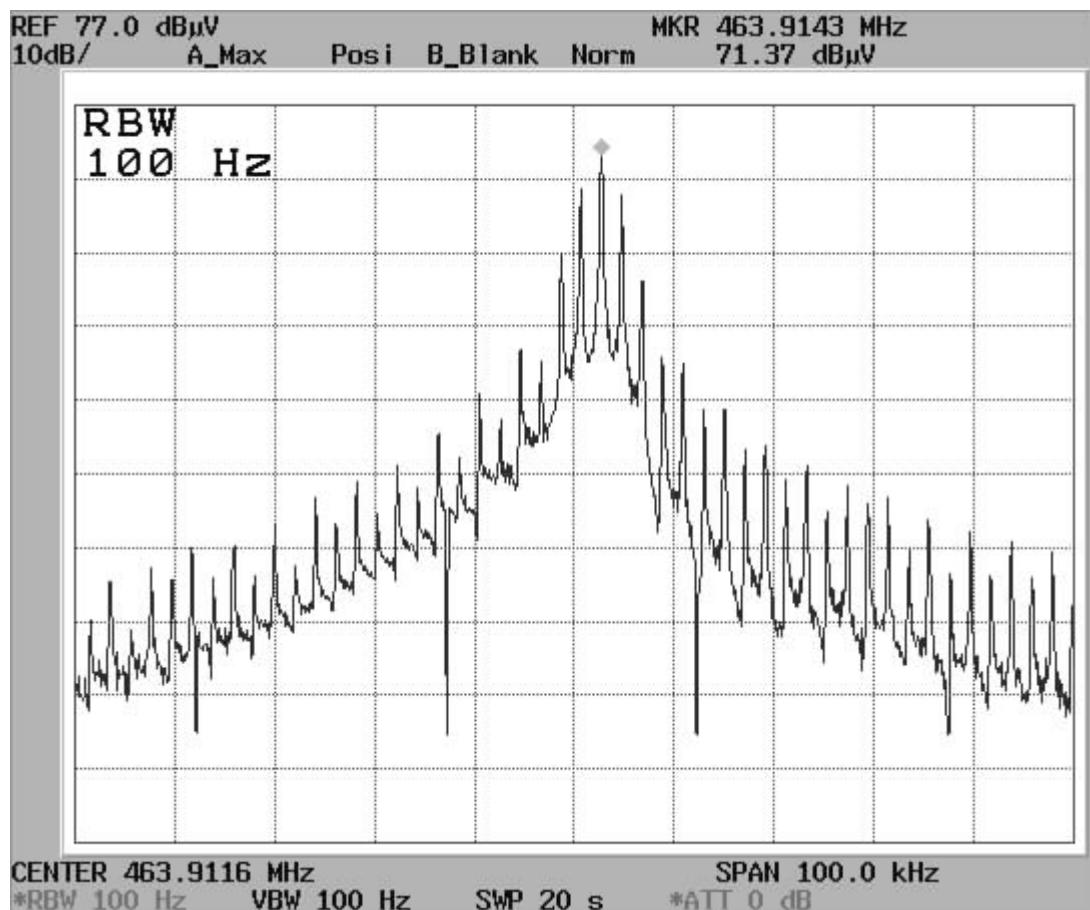


EuT: Permalog LoggerII

Temperatuue: 0 °C

Testvoltage: 3.6 V/ DC

Attachment A12
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

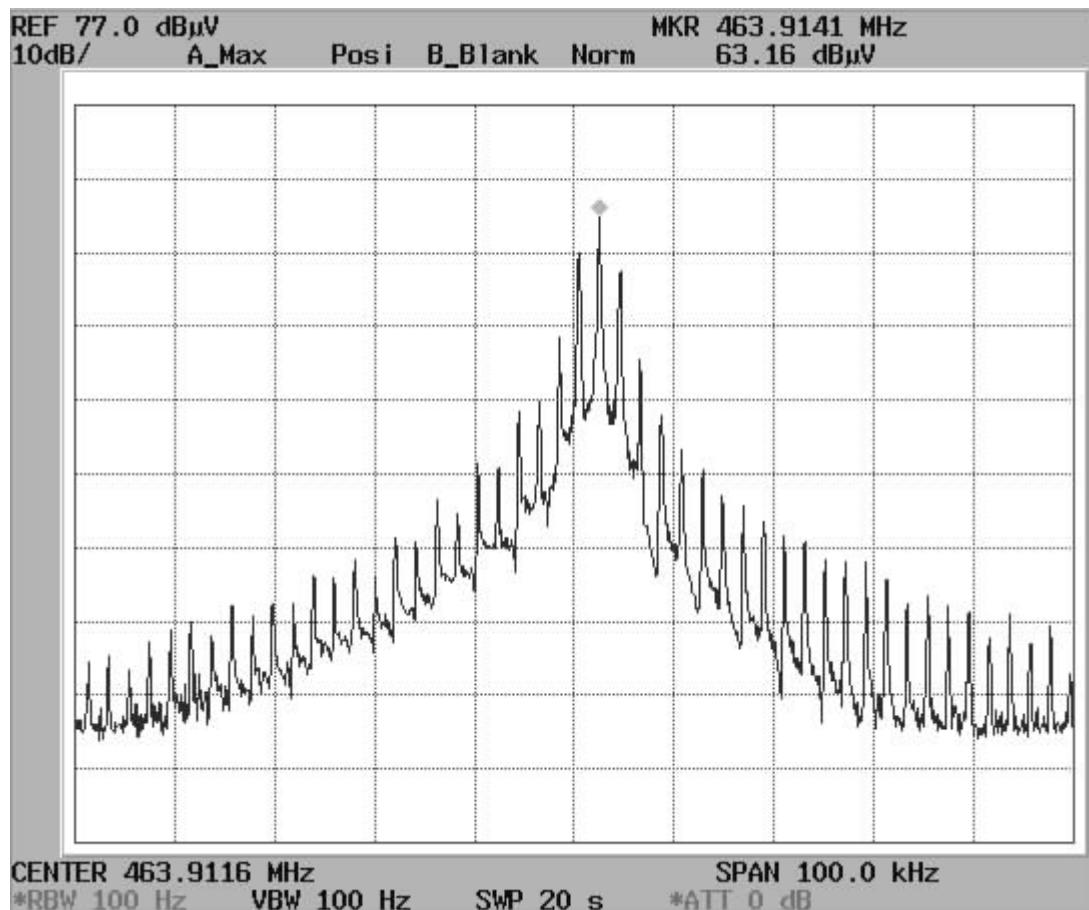


EuT: Permalog LoggerII

Temperatuue: 0 °C

Testvoltage: 3.0 V/ DC

Attachment A13
FCC ID MJCPERMALOGII
File-No. T 19663-00 MN

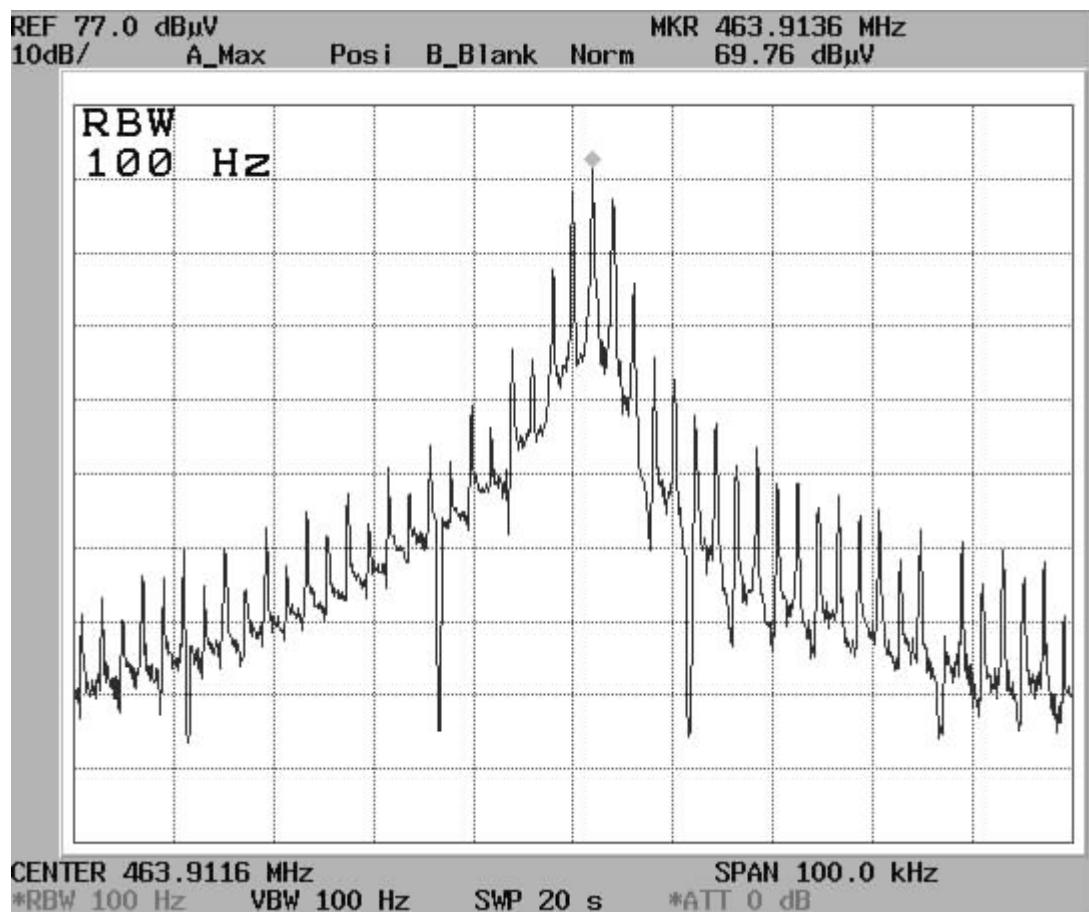


EuT: Permalog LoggerII

Temperatuue: -10 °C

Testvoltage: 3.6 V/ DC

Attachment A14
FCC ID MJCPERMALOGII
File-No. T 19663-00 MN

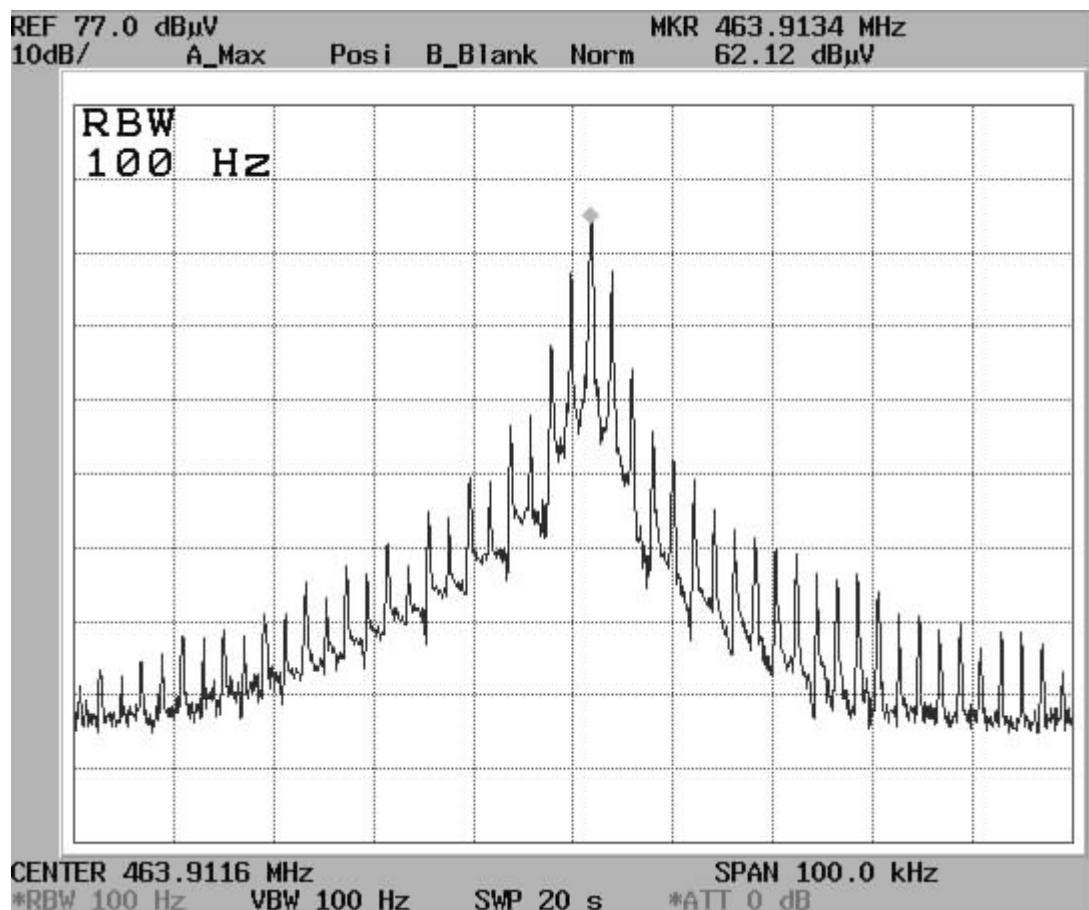


EuT: **Permalog LoggerII**

Temperatuue: **-10 °C**

Testvoltage: **3.0 V/ DC**

Attachment A15
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

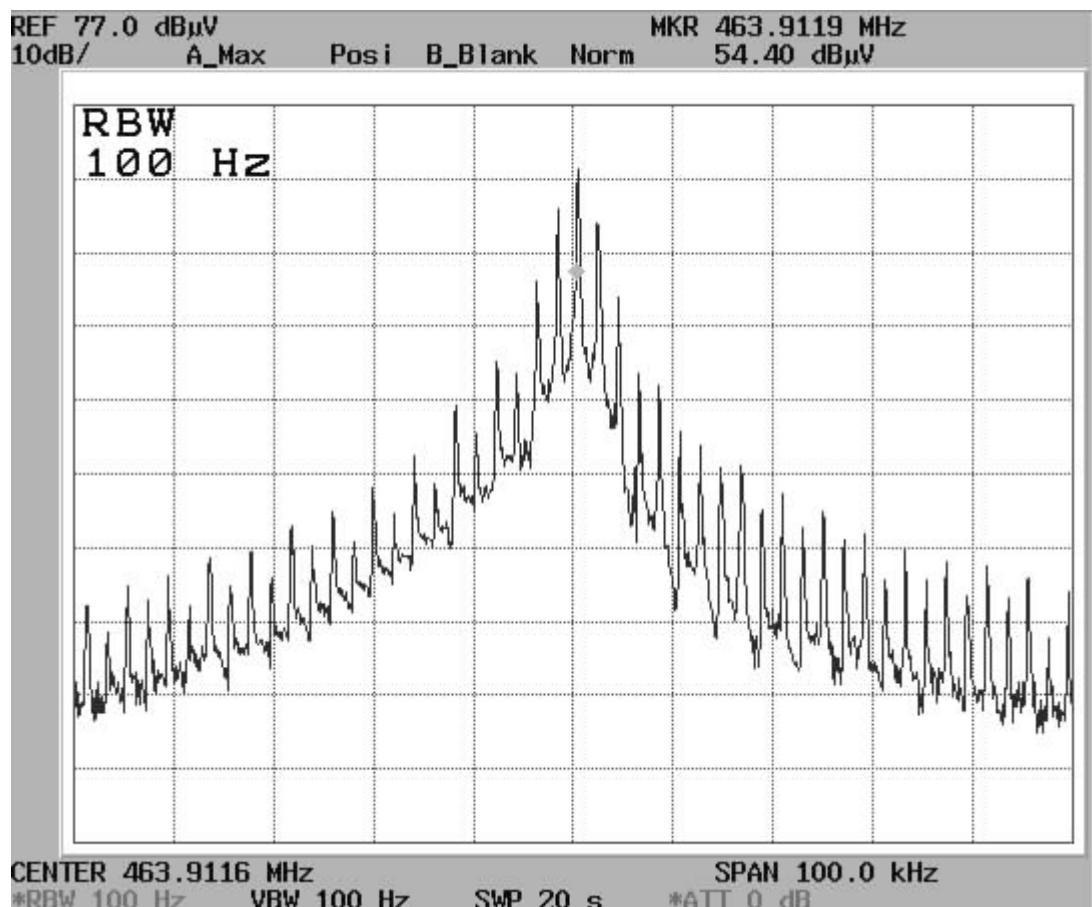


EuT: **Permalog LoggerII**

Temperatuue: **-20 °C**

Testvoltage: **3.6 V/ DC**

Attachment A16
FCC ID MJCPERMALOGII
File-No. T 19663-00 MN

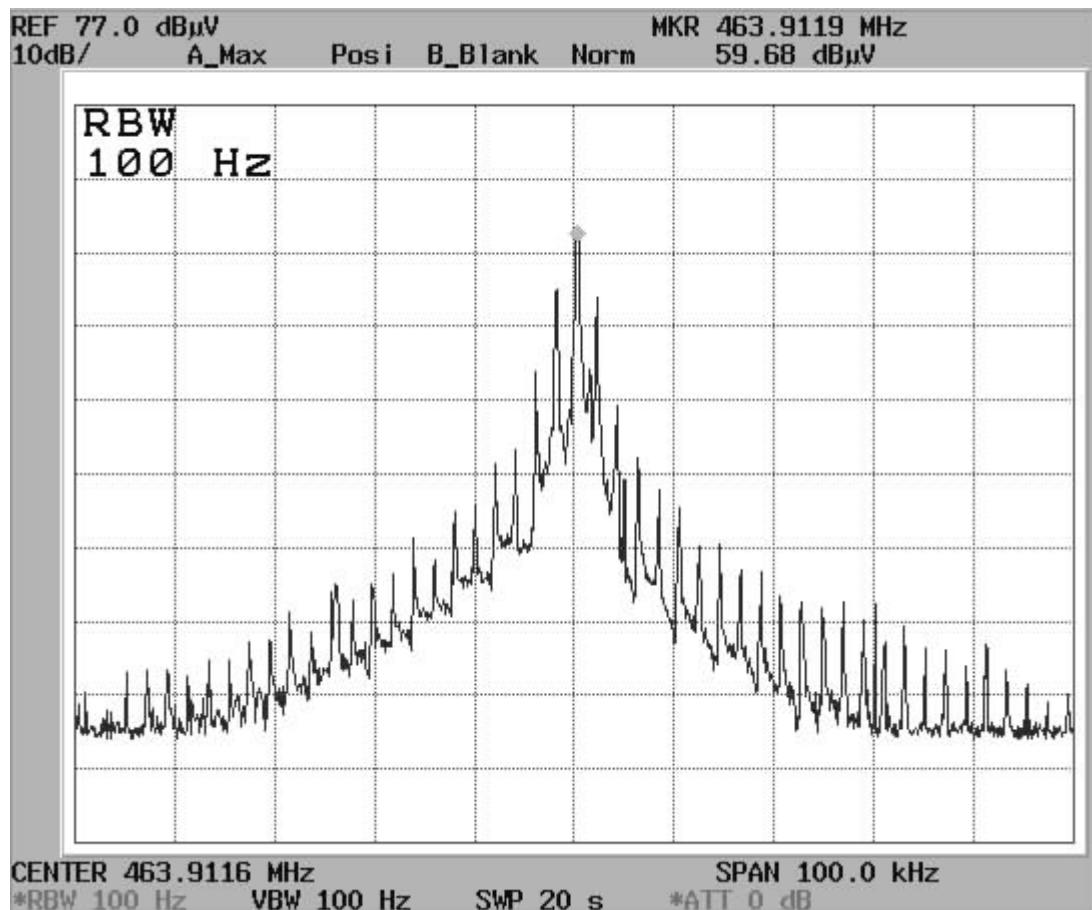


EuT: Permalog LoggerII

Temperatuue: -20 °C

Testvoltage: 3.0 V/ DC

Attachment A17
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

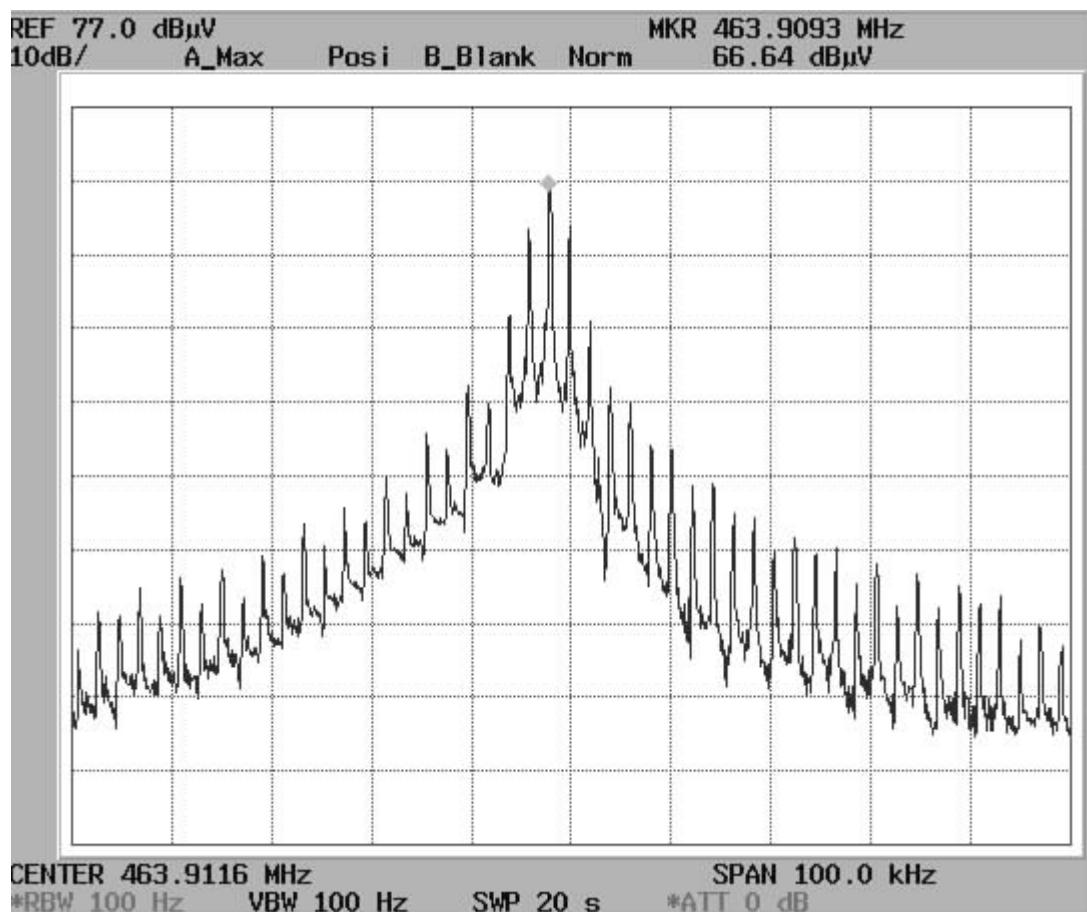


EuT: Permalog LoggerII

Temperatuue: -30 °C

Testvoltage: 3.6 V/ DC

Attachment A18
FCC ID MJC PERMALOGII
File-No. T 19663-00 MN

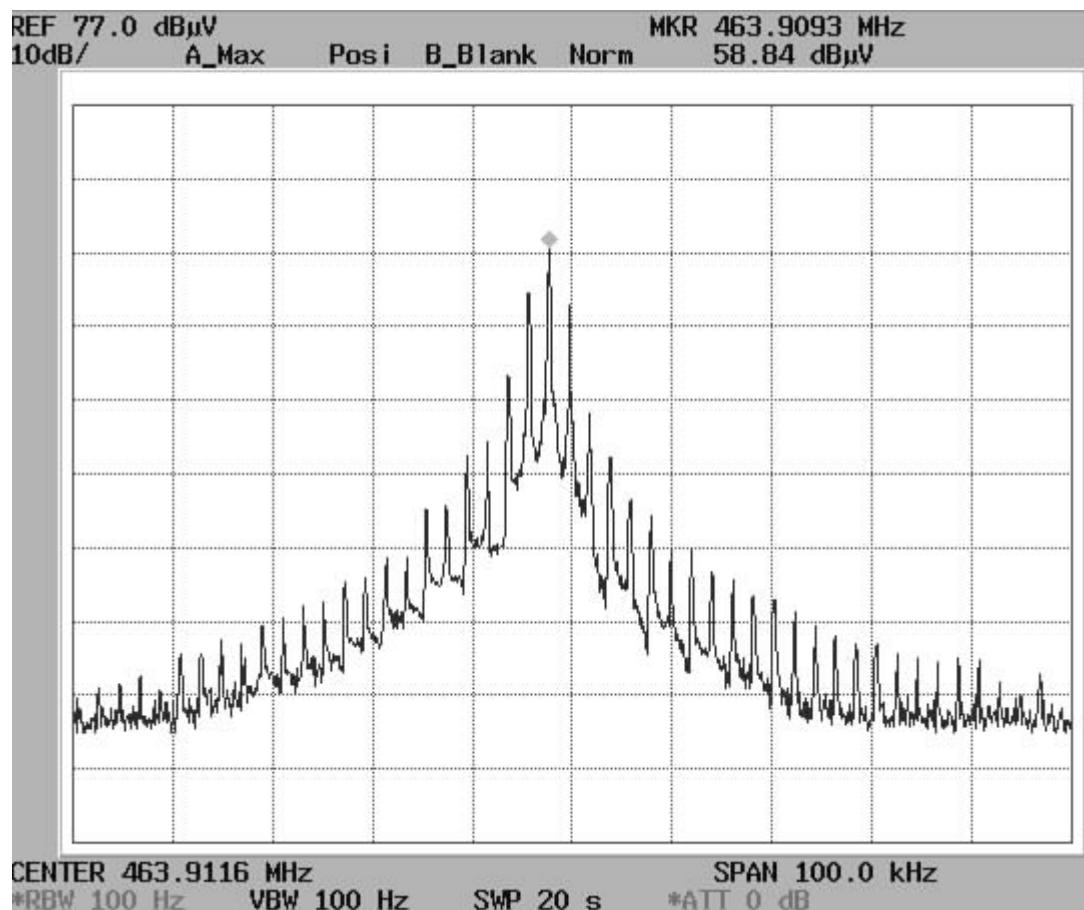

EuT: **Permalog LoggerII**

Temperatuue: **-30 °C**

Testvoltage: **3.0 V/ DC**

Attachment : B

List of Test Equipment

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

Test Report No: T 19663-1-00 MN

Beginning of Testing 23-August-2000

Test ID	Model Type	Kind of Equipment	Manufacturer	Equipment No.
A5	HCC	Controller Ant.-Mast	Rohde & Schwarz	04-07/59-97-001
	RG 214 U	Antenna cable 2 m	Huber+Suhner	04-07/60-89-463
	HF 7/8 inch	Antenna cable 13 m	Huber+Suhner	04-07/60-99-001
	HF 7/8 inch	Antenna cable 20 m	Huber+Suhner	04-07/60-99-002
	HF 7/8 inch	Antenna cable 40 m	Huber+Suhner	04-07/60-99-003
	KR - 200	Coax Antenna Switch	Rosenberger HF-Technik	04-07/60-99-004
	VULB - 9165	Super-Broadband-Anten	Schwarzbeck G.	04-07/62-00-001
	ESVP	Test Receiver	Rohde & Schwarz	04-07/63-89-008
	ESVP-EZM	Spectrum Monitor	Rohde & Schwarz	04-07/74-86-016
	Antennenmast	Antenna mast	Rohde & Schwarz	04-07/92-97-001
CPR2	HCC	Controller Ant.-Mast	Rohde & Schwarz	04-07/59-97-001
	RG 214 U	Antenna cable 2 m	Huber+Suhner	04-07/60-89-463
	HF 7/8 inch	Antenna cable 13 m	Huber+Suhner	04-07/60-99-001
	HF 7/8 inch	Antenna cable 20 m	Huber+Suhner	04-07/60-99-002
	HF 7/8 inch	Antenna cable 40 m	Huber+Suhner	04-07/60-99-003
	KR - 200	Coax Antenna Switch	Rosenberger HF-Technik	04-07/60-99-004
	VULB - 9165	Super-Broadband-Anten	Schwarzbeck G.	04-07/62-00-001
	ESVP	Test Receiver	Rohde & Schwarz	04-07/63-89-008
	ESVP-EZM	Spectrum Monitor	Rohde & Schwarz	04-07/74-86-016
	Antennenmast	Antenna mast	Rohde & Schwarz	04-07/92-97-001
EM	R 3162	Spectrum Analyzer	Advantest	04-07/74-00-001
FE	CMS-54	Com. Receiver	Rohde & Schwarz	04-07/63-94-052
	FSEM 30	Spectrum Analyser	Rohde & Schwarz	04-07/74-97-001
	VLK 04/300	Climatic chamber	Heraeus -Vötsch GmbH	04-10/90-89-001
SER3	Sucoflex 104	RF-cable 2 m	Huber+Suhner	04-07/60-90-231
	Sucoflex 104, SMA	RF-cable 2 m	Huber+Suhner	04-07/60-97-485
	Model 3115	Hornantenna	EMCO Elektronik GmbH	04-07/62-96-458
	AWT-4534	Microwave-Amplifier	TransTech Hochfrequenztechn	04-07/66-90-217

CONSTRUCTIONAL DATAFORM FOR TESTING OF RADIO EQUIPMENT

Licence holder:	PALMER ENVIRONMENTAL Ltd.		
Address:	TY COCH HOUSE, CWMBRAN, GWENT, NP44 3AW, UK		
Manufacturer:	PALMER ENVIRONMENTAL Ltd.		
Address:	TY COCH HOUSE, CWMBRAN, GWENT, NP44 3AW, UK		
Type:	PERMALOG		
Model:	Permalog Logger II (Transmitter) and Permalog Patroller (Receiver)		
Serial-No.:	N/A	Protection class:	Transmitter: Water resistant Receiver: None

Additional informations to the above named model:

Antenna: transmitter:	Type: Helical
receiver:	Length/size: 68mm long and 14mm diameter
	Type: Whip
	Length/size: 290mm long
Power supply of the transmitter: Type:	nominal voltage: 3.6 V
	lowest voltage: V
	highest voltage: V
Power supply of the receiver: Type:	nominal voltage: 7.2 V

Ancillary equipment:

Description: PSU To Charge Patroller	Type: Power Supply	Serial-no.:	N/A
Description:	Type:	Serial-no.:	
Description:	Type:	Serial-no.:	

Extreme temperature range in which the approval test should be performed:

- Category I: General (-20°C to +55°C)
- Category II: Portable (-10°C to +55°C)
- Category III: Equipment for normal indoor use (0°C to +55°C)

Connectable cables:

Name of the cable	Digital	Length/m	shielded
Comm Lead	<input checked="" type="radio"/> yes <input type="radio"/> no	1.5M	<input checked="" type="radio"/> yes <input type="radio"/> no
	<input type="radio"/> yes <input checked="" type="radio"/> no		<input type="radio"/> yes <input checked="" type="radio"/> no

O If applicable, if necessary complete overleaf**Page D1**

Applicant: _____ Model-name: _____

Type designation: Permalog							
Name and type designation of individual units comprising the radio equipment:							
Transmitter: Permalog Logger which contains FM463T-P transmitter module Receiver: Permalog Patroller which contains FM463.912RX receiver module							
Type of equipment:							
<input type="checkbox"/> Radiotelephone equipment <input type="checkbox"/> One-way radiotelephone equipment <input type="checkbox"/> Personal paging system <input type="checkbox"/> Satellite earth station <input checked="" type="checkbox"/> Data transmission equipment		<input type="checkbox"/> Remote-control equipment <input type="checkbox"/> Inductive loop system <input type="checkbox"/> Radio-relay system <input type="checkbox"/> CB radiotelephone equipment <input type="checkbox"/> Movement detector		<input type="checkbox"/> Radiomaritime equipment <input type="checkbox"/> Inland waterways equipment <input type="checkbox"/> Radionavigation equipm. <input type="checkbox"/> Antenna		<input type="checkbox"/> LPD <input type="checkbox"/> RLAN <input type="checkbox"/>	
Technical characteristics:							
Frequency range	Transmitter-receiver		Transmitter	Receiver			
450.0 to 470.0 MHz							
Maximum no. of channels	1						
Channel spacing	12.5kHz						
Class of emission (type of modulation)	6k80F1DEN						
Maximum RF output power	10mW						
Maximum effective radiated power (ERP)	2mW						
Output power variable	N/A						
Channel switching frequency range	N/A						
Method of frequency generation	<input type="checkbox"/> Synthesizer		<input checked="" type="checkbox"/> Crystal	<input type="checkbox"/> Other			
Frequency generation TX	Crystal 7 th Overtone						
Frequency generation RX	Crystal 7 th Overtone						
IF	1st IF 453.21220MHz	2nd IF 10.245MHz	3rd IF 455kHz				
Integral selective calling	N/A						
Audio-frequency interface level at external data socket	N/A						
Modes of operation	<input type="checkbox"/> Duplex mode		<input type="checkbox"/> Semi-duplex mode	<input checked="" type="checkbox"/> Simplex mode			
Power source	<input type="checkbox"/> Mains		<input type="checkbox"/> Vehicle-regulated	<input checked="" type="checkbox"/> Integral			
Antenna socket	<input checked="" type="checkbox"/> BNC <input type="checkbox"/> M <input type="checkbox"/> None		<input type="checkbox"/> TNC <input type="checkbox"/> UHF <input type="checkbox"/>	<input type="checkbox"/> N <input type="checkbox"/> Adapter <input type="checkbox"/>			
Test specifications:	FCC Part 90						

O If applicable, if necessary complete overleaf

Page D 2

Applicant: _____ Model-name: _____

Declarations:

- We declare that the above information are correct and the named model was supplied with the maximum configuration to the accredited test laboratory.

PALMER ENVIRONMENTAL , date 27/07/2000
place of issue

Simon Harris
Seal and signature of applicant

O If applicable, if necessary complete overleaf

Page D 3