No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057 Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Email: sgs_internet_operations@sgs.com

Report No.: SZEMO11020049801 Page : 1 of 26

FCC REPORT

Application No. :	SZEMO110200498RF(SGS HK NO.:2026164EL)
Applicant:	Educational Insights
Product Name:	CLASSROOM JEOPARDY!
Operation Frequency:	2405MHz to 2477MHz
FCC ID:	MJO-EI-8800
Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.249: 2009
Date of Receipt	2011-02-10
Date of Test	2011-02-10 to 2011-03-04
Date of Issue	2011-03-15
Test Result :	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.

Report No.: SZEMO11020049801 Page : 2 of 26

2 Contents

			Page
1	COVE	R PAGE	1
2	CONT	ENTS	2
3	TEST	SUMMARY	
4	GENE	RAL INFORMATION	4
	4.1 CLIE	NT INFORMATION	4
		ERAL DESCRIPTION OF E.U.T.	
	4.3 E.U.	T OPERATION MODE	
	4.4 Dese	CRIPTION OF SUPPORT UNITS	
		Г Facility	
		TLOCATION	
	4.7 Отн	ER INFORMATION REQUESTED BY THE CUSTOMER	
		INSTRUMENTS LIST:	
5	TEST	RESULTS AND MEASUREMENT DATA	
	5.1 ANT	ENNA REQUIREMENT:	
	5.2 Con	ducted Emissions	9
	5.3 RAD	IATED EMISSION	
	5.3.1	Field Strength Of The Fundamental Signal	
	5.3.2	Spurious Emissions	
	5.3.3	Band edge (Radiated Emission)	
	5.4 20DI	BANDWIDTH	

Report No.: SZEMO11020049801 Page : 3 of 26

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a)/15.209	Pass
Band edge (Radiated Emission)	15.249(a)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.

Report No.: SZEMO11020049801 Page : 4 of 26

4 General Information

4.1 Client Information

Applicant:	Educational Insights	
Address of Applicant:	152 Walnut Street, Suite 201, Gardena CA 90248	

4.2 General Description of E.U.T.

Product Name:	CLASSROOM JEOPARDY!
Model No.:	EI-8800
Request Age Grading:	5+
Country of Origin:	Hong Kong
Country of Destination:	US
Operation Frequency:	2405MHz to 2477MHz
Channel numbers:	16
Modulation type:	FSK
Antenna Type:	PCB antenna
Antenna gain:	-2dBi
Power supply:	MODEL:TL02-090100U
	INPUT:120-240V~50/60Hz 0.32A MAX
	OUTPUT:9VDC === 1000mA

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEMO11020049801 Page : 5 of 26

	Operation Frequency@Channel List							
Channel	29	4	67	32	7	65	36	10
Frequency	2430	2405	2468	2433	2408	2466	2437	2411
Channel	62	38	8	59	45	12	76	40
Frequency	2463	2439	2409	2460	2446	2413	2477	2441

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2439MHz
The Highest channel	2477MHz

4.3 E.U.T Operation mode

Operating Environment:

Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1008 mbar
Test mode:	
Transmitting mode:	Keep the EL

Keep the EUT in Transmitting mode at low channel, middle channel and high channel.

Report No.: SZEMO11020049801 Page : 6 of 26

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Samsung Television	Samsung	2232MW
Extra scoreboard	Educational Insights	N/A

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, June 27, 2008.

• Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.7 Other Information Requested by the Customer

None.

Report No.: SZEMO11020049801 Page : 7 of 26

4.8 Test Instruments list:

RE i	RE in Chamber					
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2010-06-17	2011-06-17
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2010-11-05	2011-11-05
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2010-11-09	2011-11-09
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2010-11-09	2011-11-09
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2010-11-09	2011-11-09
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2010-06-02	2011-06-02
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2010-10-27	2011-10-27
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	SEL0080	2010-06-04	2011-06-04
11	Band filter	Amindeon	82346	SEL0094	2010-06-02	2011-06-02

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	N/A	N/A
2	LISN	ETS-LINDGREN	3816/2	SEL0021	2010-06-02	2011-06-02
3	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2011-01-17	2012-01-17
4	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2011-01-17	2012-01-17
5	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2011-01-17	2012-01-17
6	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2010-06-02	2011-06-02
7	Coaxial Cable	SGS	N/A	SEL0024	2008-06-18	2011-06-18

Report No.: SZEMO11020049801

Page : 8 of 26

5 Test results and Measurement Data

5.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203		
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.			
E.U.T Antenna:	Antenna gain: -2dBi		
	Antenna		
	0.5 mm 1 2 3 4 5 6 7		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEMO11020049801

Page : 9 of 26

0.2	Conducted Emissions						
	Test Requirement:	FCC Part15 C Section 15.207					
	Test Method:	ANSI C63.10: 2009					
	Test Frequency Range:	150KHz to 30MHz					
	Class / Severity:	Class B					
	Receiver setup:	RBW=9KHz, VBW=30KHz					
	Limit:	Frequency range (MHz)	Limit (c	lBuV)			
			Quasi-peak	Average			
		0.15-0.5	66 to 56*	56 to 46*			
		0.5-5	56	46			
		5-30	60	50			
	To a constant	* Decreases with the logarithm	1 of the frequency.				
	Test mode:	Transmitting					
		impedance stabilization network(L.I.S.N.). The provide a 500hm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 500hm/50uH coupling impedance with 500hm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.					
	Test setup:	Refere	nce Plane				
		LISN 40cm 40cm Equipment E.U Test table/Insulation pla Remarkc E.U.T: Equipment Under Test LISN: Line Impedence Stabilizatio Test table height=0.8m		er — AC power			
	Test Instruments:	Refer to section 4.7 for details					
	Test results:	Pass					


5.2 Conducted Emissions

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Report No.: SZEMO11020049801 Page : 10 of 26

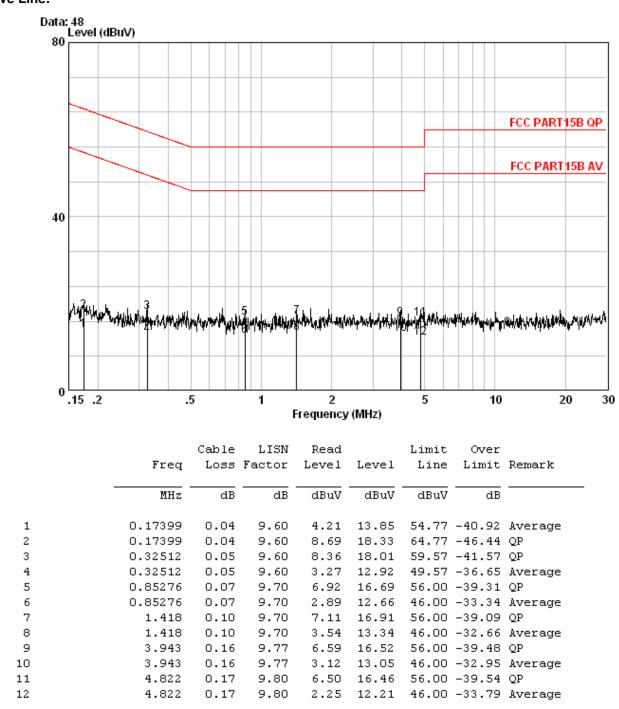


Live Line:

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

Report No.: SZEMO11020049801 Page : 11 of 26

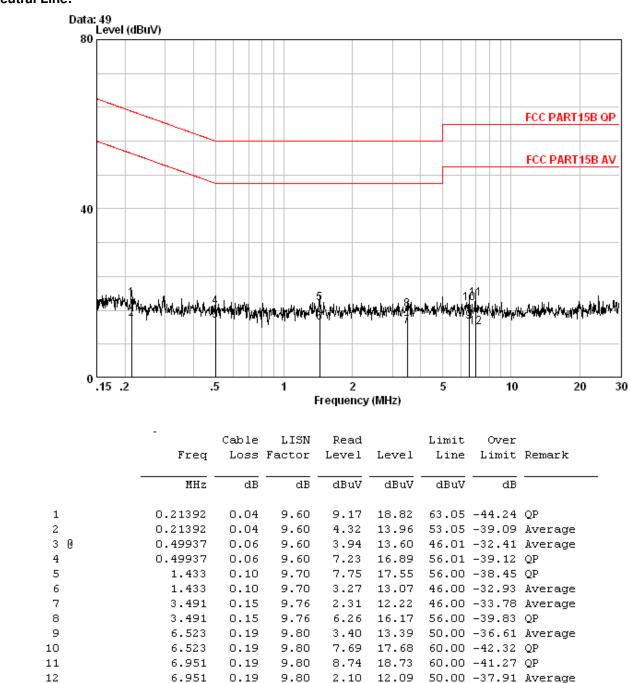

Neutral Line:

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

Report No.: SZEMO11020049801


Page : 12 of 26

5.3 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.249 and 15.209					
Test Method:	ANSI C63.10: 2	ANSI C63.10: 2009				
Test Frequency Range:	30MHz to 25000MHz					
Test site:	Measurement D	istance: 3m (Semi-Anecho	ic Chambei	r)	
Receiver setup:		-				
·	Frequency	Detector	RBW	VBW	Remark	
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value	
Limit:		Peak	1MHz	10Hz	Average Value	
Limit:	Freque	ency	Limit (dBuV	/m @3m)	Remark	
(Field strength of the fundamental signal)			94.0	- /	Average Value	
fundamental signal)	2400MHz-24	183.5MHZ	114.	0	Peak Value	
Limit:						
(Spurious Emissions)	Freque		Limit (dBuV		Remark	
	30MHz-8		40.0	-	Quasi-peak Value	
	88MHz-2 ⁻ 216MHz-9		43.5		Quasi-peak Value	
	960MHz-		<u>46.0</u> 54.0		Quasi-peak Value Quasi-peak Value	
			54.0		Average Value	
	Above 1	GHz -	74.0		Peak Value	
(band edge)	fundamental or whichever is the	to the general e lesser attenu	radiated emi ation.	ssion limits	ow the level of the in Section 15.209,	
Test Procedure:	 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported 					

Report No.: SZEMO11020049801

Page : 13 of 26

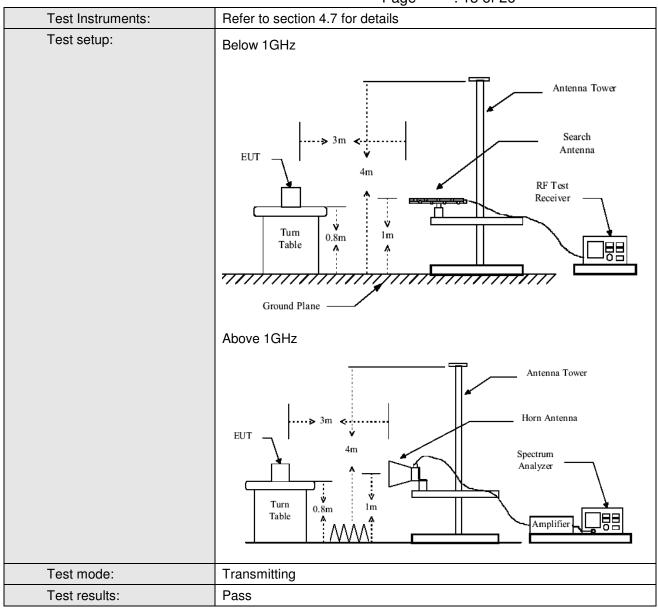

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

Report No.: SZEMO11020049801 Page : 14 of 26

Measurement Data

5.3.1 Field Strength Of The Fundamental Signal

Peak value:

I call value.								
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Over Limit (dB)	polarization
2405	2.99	32.54	39.86	97.80	93.47	114.00	-20.53	Horizontal
2405	2.99	32.54	39.86	100.99	96.66	114.00	-17.34	Vertical
2439	3.00	32.61	39.89	96.68	92.40	114.00	-21.60	Horizontal
2439	3.00	32.61	39.89	99.53	95.25	114.00	-18.75	Vertical
2477	3.03	32.67	39.92	95.40	91.18	114.00	-22.82	Horizontal
2477	3.03	32.67	39.92	96.33	92.11	114.00	-21.89	Vertical

Note: Peak Level (Final Level)= Reading Level + Antenna Factor + Cable Loss - Preamp Factor

Average value:

Frequency (MHz)	Peak Level (dBuV/m)	PDCF (dB)	Average Level (dBuV/m)	Average Limit (dBuV/m)	Over Limit (dB)	polarization
2405	93.47	-23.87	69.60	94.00	-24.40	Horizontal
2405	96.66	-23.87	72.79	94.00	-21.21	Vertical
2439	92.40	-23.87	68.53	94.00	-25.47	Horizontal
2439	95.25	-23.87	71.38	94.00	-22.62	Vertical
2477	91.18	-23.87	67.31	94.00	-26.69	Horizontal
2477	92.11	-23.87	68.24	94.00	-25.76	Vertical

PDCF Calculate Formula:

Average value=Peak value + PDCF(pulse desensitization correction factor)

PDCF=20 log(Duty cycle)= -23.87dB


Duty cycle= T on time / T period = 0.064

Ton time = 140µs

T period = 2185µs

Report No.: SZEMO11020049801 Page : 15 of 26

Test plot as follows:

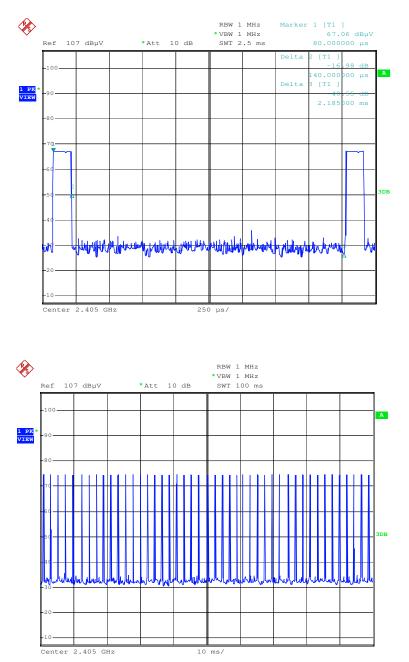


Report No.: SZEMO11020049801

Page : 16 of 26

5.3.2 Spurious Emissions


30MHz~1GHz

Horizontal:

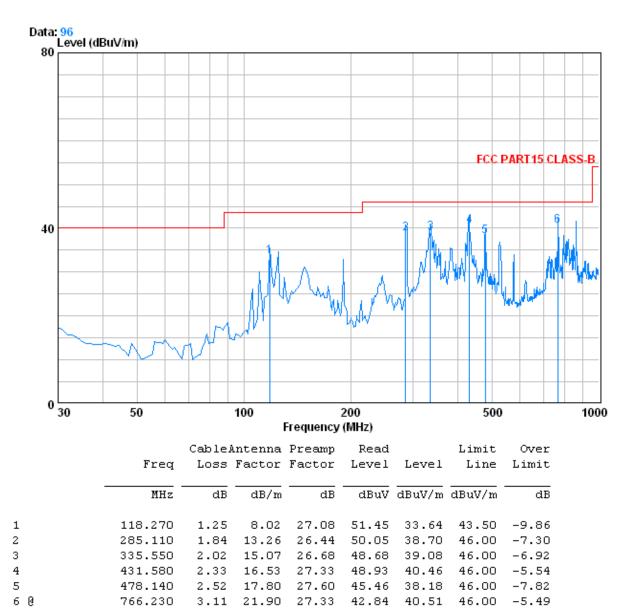

Report No.: SZEMO11020049801 Page : 17 of 26

Vertical:

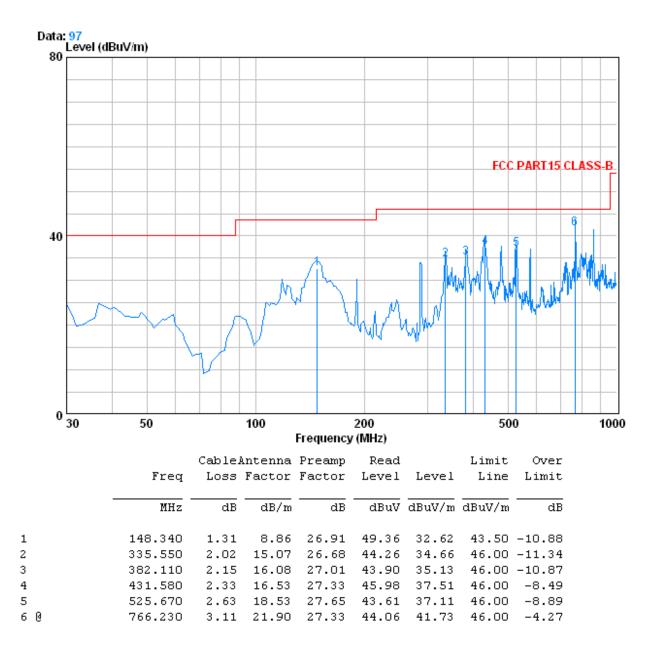

Report No.: SZEMO11020049801

Page : 18 of 26

Above 1G	Above 1GHz							
Test mode:	Tran	smitting	Test char	nnel: Lo	owest	Remark:	Pea	ak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1483.727	2.50	28.07	39.34	59.39	50.62	74.00	-23.38	Vertical
2875.986	3.25	33.21	40.21	50.50	46.75	74.00	-27.25	Vertical
4582.422	4.55	35.06	41.47	49.00	47.14	74.00	-26.86	Vertical
5674.896	5.01	35.18	41.20	50.53	49.52	74.00	-24.48	Vertical
7566.249	6.19	36.00	39.56	48.49	51.12	74.00	-22.88	Vertical
8703.294	6.17	36.36	38.59	47.58	51.52	74.00	-22.48	Vertical
1913.838	2.78	31.18	39.53	54.11	48.54	74.00	-25.46	Horizontal
2875.986	3.25	33.21	40.21	50.37	46.62	74.00	-27.38	Horizontal
4399.537	4.42	34.92	41.33	49.14	47.15	74.00	-26.85	Horizontal
5791.646	5.06	35.37	41.10	49.70	49.03	74.00	-24.97	Horizontal
7245.810	5.83	35.90	39.84	49.71	51.60	74.00	-22.40	Horizontal
10560.940	6.11	38.32	37.68	45.34	52.09	74.00	-21.91	Horizontal

Test mode:	Tran	smitting	Test char	nnel: N	liddle	Remark:	Pe	ak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1483.727	2.50	28.07	39.34	56.19	47.42	74.00	-26.58	Vertical
2875.986	3.25	33.21	40.21	50.63	46.88	74.00	-27.12	Vertical
3824.757	4.01	33.59	40.91	48.41	45.10	74.00	-28.90	Vertical
5338.579	4.90	34.73	41.50	49.18	47.31	74.00	-26.69	Vertical
7547.013	6.17	36.00	39.57	48.63	51.23	74.00	-22.77	Vertical
10269.320	6.04	38.02	37.56	44.72	51.22	74.00	-22.78	Vertical
1913.838	2.78	31.18	39.53	53.92	48.35	74.00	-25.65	Horizontal
3120.061	3.41	33.35	40.40	47.27	43.63	74.00	-30.37	Horizontal
4594.102	4.55	35.06	41.47	48.29	46.43	74.00	-27.57	Horizontal
5747.586	5.04	35.29	41.14	49.88	49.07	74.00	-24.93	Horizontal
8703.294	6.17	36.36	38.59	47.00	50.94	74.00	-23.06	Horizontal
12334.980	6.55	39.24	38.42	46.09	53.46	74.00	-20.54	Horizontal

Report No.: SZEMO11020049801


					Page	: 19 of 2	26	
Test mode:	Tran	smitting	Test char	nnel:	Highest	Remark:	Pe	ak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2201.447	2.91	32.17	39.71	53.01	48.38	74.00	-25.62	Vertical
3700.260	3.91	33.45	40.81	48.47	45.02	74.00	-28.98	Vertical
4594.102	4.55	35.06	41.47	48.07	46.21	74.00	-27.79	Vertical
6032.401	5.13	35.74	40.89	49.23	49.21	74.00	-24.79	Vertical
7566.249	6.19	36.00	39.56	47.98	50.61	74.00	-23.39	Vertical
9465.979	6.02	37.16	37.91	44.87	50.14	74.00	-23.86	Vertical
1913.838	2.78	31.18	39.53	51.44	45.87	74.00	-28.13	Horizontal
2875.986	3.25	33.21	40.21	50.43	46.68	74.00	-27.32	Horizontal
4570.772	4.54	35.09	41.46	48.48	46.65	74.00	-27.35	Horizontal
7547.013	6.17	36.00	39.57	48.56	51.16	74.00	-22.84	Horizontal
10348.050	6.06	38.12	37.59	44.17	50.76	74.00	-23.24	Horizontal
12334.980	6.55	39.24	38.42	46.44	53.81	74.00	-20.19	Horizontal

Remark:

As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Report No.: SZEMO11020049801

Page : 20 of 26

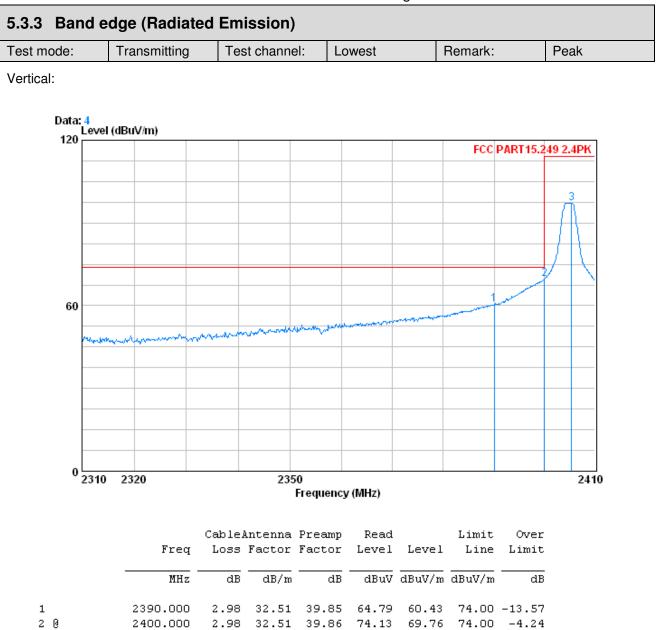

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's company's client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

32.54 39.86 101.59 97.26 114.00 -16.74


2405.400

3

2.99

Report No.: SZEMO11020049801 Page : 21 of 26

Horizontal:

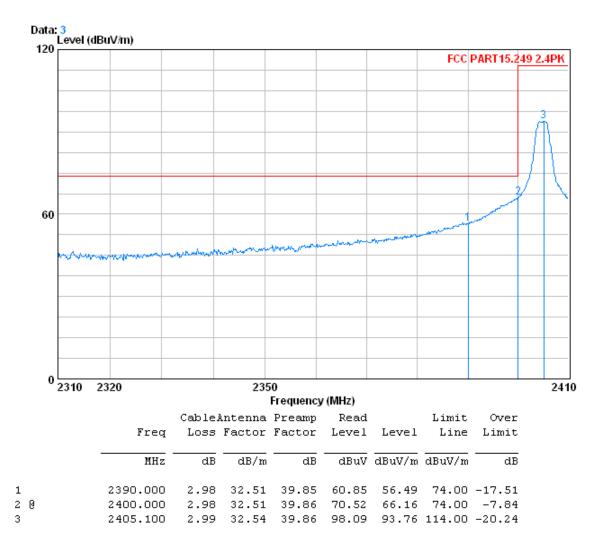


Report No.: SZEMO11020049801 Page : 22 of 26

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak
Vertical:					
Data: 20	l (dBuV/m)				
120					
	1				
		\mathbf{X}			
				FCC PART15.	249 2.4PK
60					
0					
0 2470) 2475	Fre	quency (MHz)		2500
	(Freq	CableAntenna Pr Loss Factor Fa	eamp Read	Limit Over el Line Limit	
					_
	MHz	dB dB/m	dB dBuV dBuV	/m dBuV/m dl	В
1	2476.210			06 114.00 -21.94	
20	2483.500	3.03 32.67 3	9.92 65.47 61.3	25 74.00 -12.7	5

Report No.: SZEMO11020049801 Page : 23 of 26

Horizontal:

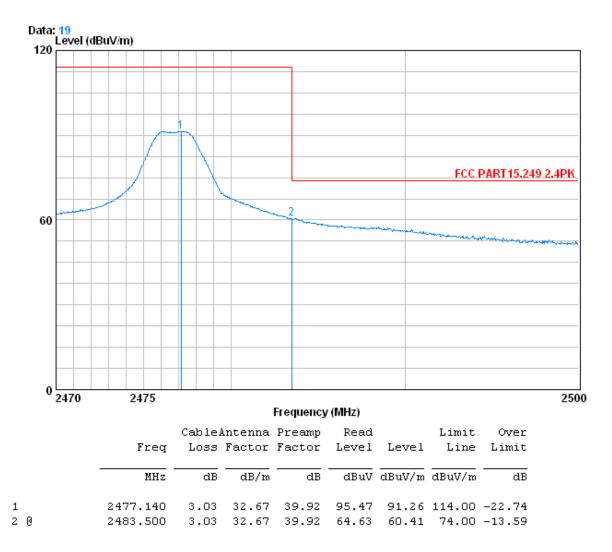

Remark:

For the pulse emissions measurement, Average value =Peak value+PDCF and Average limit=Peak limit-20dB. Since the device is pulse emission, PDCF=-23.87dB<-20dB and Peak value has met Peak limit.

Base on the above state, average value should meet average limit. So, only the peak measurements were shown in the report.

Report No.: SZEMO11020049801

Page : 24 of 26


Test Requirement:	FCC Part15 C Section 15.249/15.215			
Test Method:	ANSI C63.10:2009			
Receiver setup:	RBW=100KHz, VBW=300KHz, detector: Peak			
Limit:	Operation Frequency range 2400MHz-2483.5MHz			
Test Procedure:	1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.			
	2. Set the EUT to proper test channel.			
	3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points.			
	4. Read 20dB bandwidth.			
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Test Instruments:	Refer to section 4.7 for details			
Test mode:	Transmitting			
Test results:	Pass			

5.4 20dB Bandwidth

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	2.000	Pass
Middle	2.040	Pass
Highest	2.340	Pass

Report No.: SZEMO11020049801 Page : 25 of 26

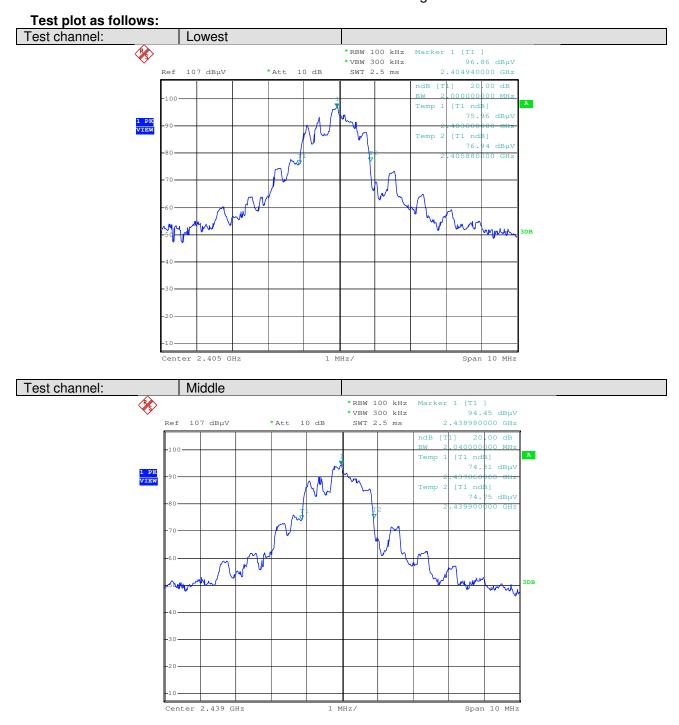

Report No.: SZEMO11020049801

Page : 26 of 26

