



FCC CFR47 PART 15 CERTIFICATION

TEST REPORT

FOR

2.4 GHz TRANSCEIVER RADIO with RS232 INTERFACE

**MODEL: WiSER, WiSER2000, WiSER2100,
WiSER2200, WiSER2300, AND WiSER2400**

BRAND NAME: OTC

FCC ID: MKZ0207232XG

REPORT NUMBER: 02U1319-1

ISSUE DATE: JULY 10, 2002

Prepared for
**OTC WIRELESS, INC.
48507 MILMONT DRIVE
FREMONT, CA 94538
USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561 F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

TABLE OF CONTENT

1. TEST RESULT CERTIFICATION 3

2. EUT DESCRIPTION 4

3. TEST METHODOLOGY 4

4. TEST FACILITY 4

5. ACCREDITATION AND LISTING 4

5.1. LABORATORY ACCREDITATIONS AND LISTINGS 5

6. CALIBRATION AND UNCERTAINTY 6

6.1. MEASURING INSTRUMENT CALIBRATION..... 6

6.2. MEASUREMENT UNCERTAINTY 6

6.3. TEST AND MEASUREMENT EQUIPMENT 7

7. SUPPORT EQUIPMENT / EUT SETUP..... 7

8. APPLICABLE RULES AND BRIEF TEST RESULT 10

9. TEST SETUP, PROCEDURE AND RESULT 15

9.1. PEAK POWER OUTPUT 15

9.2. 6 dB BANDWIDTH MEASUREMENT 15

9.3. CONDUCTED SPURIOUS EMISSION 20

9.4. PEAK POWER SPECTRAL DENSITY..... 24

9.5. RESTRICTED BAND EDGE MEASUREMENT..... 28

9.6. RADIATED EMISSION..... 31

9.6.1. RADIATED EMISSION AND RESTRICTED BANDS..... 31

9.7. POWER LINE CONDUCTED EMISSION..... 42

9.8. SETUP PHOTOS 44

1. TEST RESULT CERTIFICATION

COMPANY NAME: OTC WIRELESS, INC.
48507 MILMONT DRIVE
FREMONT, CA 94538 USA

CONTACT PERSON: YAN ZHENG / PRODUCTION ENGINEER

TELEPHONE NO: (510) 490-8288 extension 215

EUT DESCRIPTION: TRANSCEIVER RADIO WITH RS232 INTERFACE

MODEL NUMBER: WiSER, WiSER2000, WiSER2100, WiSER2200, WiSER2300,
AND WiSER2400

DATE TESTED: MAY 28, 2002-JUNE 28, 2002

TYPE OF EQUIPMENT	INTENTIONAL RADIATOR
EQUIPMENT TYPE	2.4GHz TRANSCEIVER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992, TIA/EIA 603
PROCEDURE	CERTIFICATION
FCC RULE	CFR 47 PART 15 Subpart C

Compliance Certification Services, Inc. tested the above equipment for compliance with the requirement set forth in CFR 47, PART 15 Subpart C. The equipment in the configuration described in this report, shows the measured emission levels emanating from the equipment do not exceed the specified limit.


Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:



STEVE CHENG
EMC ENGINEERING MANAGER
COMPLIANCE CERTIFICATION SERVICES

Tested By:

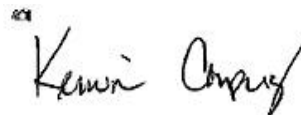

KERWIN CORPUZ
ASSOCIATE EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The Models: WiSER, WiSER2000, WiSER2100, WiSER2200, WiSER2300, and WiSER2400 are a time-division-duplex wireless 802.11b Direct Sequence Spread Spectrum Transceiver that operates at 2.4GHz for a computer data communication applications. The device functions both as a transmitter and a receiver. The transmitting and the receiving operations are time-domain duplexed. This unit provides a power output of 13.63dBm (23.1mW) and an Omni Directional Antenna with a 2dBi gain.

3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

4. TEST FACILITY

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5. ACCREDITATION AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT (1300F2))

5.1. Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	FCC Part 15, CISPR 22, AS/NZS 3548, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11, CNS 13438	 200065-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 1300
Japan	VCCI	CISPR 22 Two OATS and one conducted Site	 R-1014, R-619, C-640
Norway	NEMKO	EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1	 ELA 117
Norway	NEMKO	EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC	 ELA-171
Taiwan	BSMI	CNS 13438	 SL2-IN-E-1012
Canada	Industry Canada	RSS210 Low Power Transmitter and Receiver	 IC2324 A,B,C, and F

*No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government

6. CALIBRATION AND UNCERTAINTY

6.1. Measuring Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission	
30MHz – 200 MHz	+/- 3.3dB
200MHz – 1000MHz	+4.5/-2.9dB
1000MHz – 2000MHz	+4.6/-2.2dB
Power Line Conducted Emission	
150kHz – 30MHz	+/-2.9

Any results falling within the above values are deemed to be marginal.

6.3. Test and Measurement Equipment

The following test and measurement equipment was utilized for the tests documented in this report:

TEST AND MEASUREMENT EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due Date
Spectrum Analyzer	HP	8566B	2140A01296	5/23/03
Spectrum Display	HP	85662A	3026A19146	5/23/03
Quasi-Peak Detector	HP	85650A	2811A01335	5/23/03
Preamplifier	HP	8447D	2944A06833	8/21/02
Bicon Antenna	EATON	94455-1	1197	3/30/03
LP Antenna	EMCO	3146	9107-3163	3/30/03
Line Filter	Lindgren	LMF-3489	497	N.C.R.
LISN	Fisher Custom Communication	LISN-50/250-25-2	2023	8/2/02
EMI Test Receiver	Rohde & Schwarz	ESHS 20	827129/006	4/17/03
Preamplifier (1 - 26.5GHz)	MITEQ	NSP2600-44	646456	4/26/03
Horn Antenna (1 - 18GHz)	EMCO	3115	6739	1/31/03
Horn Antenna (18 - 26GHz)	Antenna Research Associates	MWH 1826/B	1013	7/26/02
Harmonic Mixer (18-26.5GHz)	HP	11970K	3003A03109	9/23/02
Microwave Amplifier	HP	11975A	2517A01067	8/23/02
Power Meter	Agilent	E4416A	GB41050340	12/19/02
Power Sensor	Agilent	E9323A	US40410117	12/19/02
High Pass Filter (4.57GHz)	FSY Microwave	FM-4570-9SS	003	N.C.R.


7. SUPPORT EQUIPMENT / EUT SETUP

The following peripheral support equipment was utilized to operate the equipment under test:


* Was use for ITE devices minimum cofiguration requirement:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
PC Laptop	Personal Computer Inc	N340S8	PB344S811902382	DoC
* Mouse	Logitech	M-S34	LZC9303079	DZL211029
* Printer	JCM Gold	GP965	20001149	DoC
EUT's AC/DC	AK II Power Supply	A10D1-05MP	A984606445	N/A

The following setup was used to operate the equipment under test:

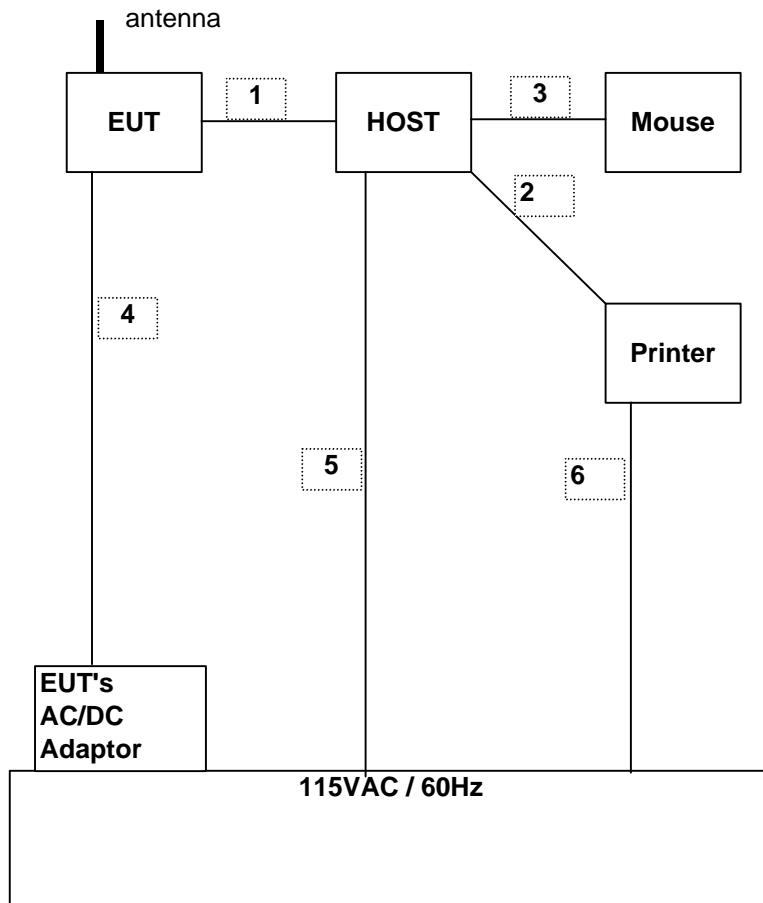

SETUP BELOW 1 GHz TEST

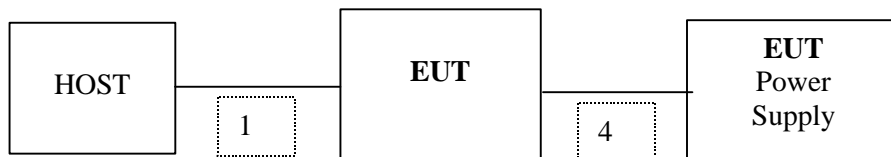

SETUP ABOVE 1 GHz TEST

I/O CABLES

TEST I / O CABLES								
Cable No	I/O Port	# of I/O Port	Connector Type	Type of Cable	Cable Length	Data Traffic	Bundled	Remark
1	Data	1	DB9/RJ45	Un-Shielded	1m	Yes	No	N/A
2	Parallel	1	DB25	Shielded	2m	No	Yes	N/A
3	Mouse	1	PS/2	Drain-Wire	1.8m	Yes	No	N/A
4	AC/DC	1	USA	Un-Shielded	1.8m	No	Yes	Bundled during Line Conducted test
5	AC/DC	1	USA	Un-Shielded	2m	No	No	N/A
6	AC	1	USA	Un-Shielded	1.8m	No	No	N/A

8. APPLICABLE RULES AND BRIEF TEST RESULT

§15.247 (a) (2) - BANDWIDTH LIMITATION

(a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

Spec limit: > 500 kHz.

Test result: No non-compliance noted.

<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Bandwidth (MHz)</i>
<i>LOW</i>	<i>2412</i>	<i>8.96</i>
<i>MID</i>	<i>2442</i>	<i>9.04</i>
<i>HIGH</i>	<i>2468</i>	<i>9.16</i>

§15.247 (b) (1) - POWER OUTPUT

(b) The maximum peak output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz or 5725-5850 MHz band, and all direct sequence systems: 1 watt.

Spec limit: As specified above, 1W maximum.

Test result: Measured by Peak Power Meter. No non-compliance noted.

<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Output Power (watts)</i>
<i>LOW</i>	<i>2412</i>	<i>0.0231 (13.63 dBm)</i>
<i>MID</i>	<i>2442</i>	<i>0.0171 (12.32 dBm)</i>
<i>HIGH</i>	<i>2468</i>	<i>0.0173 (12.40 dBm)</i>

§15.247 (c) – SPURIOUS EMISSION

(c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test result: No non-compliance noted. See section 10.3.

§15.247 (d) - PEAK POWER SPECTRAL DENSITY

(d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Spec limit: < 8dBm.

Test result: No non-compliance noted.

<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Results (dBm)</i>
<i>LOW</i>	<i>2412</i>	<i>-12.90</i>
<i>MID</i>	<i>2442</i>	<i>-13.30</i>
<i>HIGH</i>	<i>2468</i>	<i>-14.10</i>

§15.205- RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Spec limit: As specified above,.

Test result: No non-compliance noted. See section 10.6 Radiated Emission.

§15.207- CONDUCTED LIMITS

(a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 450 kHz to 30 MHz shall not exceed 250 microvolts. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

FCC 15.207

FREQUENCY RANGE	FIELD STRENGTH (Microvolts)	FIELD STRENGTH (dBuV)/QP
450kHz-30MHz	250	48

Spec limit: As specified above.

Test result: No non-compliance noted.

§15.209- RADIATED EMISSION LIMITS; GENERAL REQUIREMENTS

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

FCC PART 15.209

MEASURING DISTANCE OF 3 METER		
FREQUENCY RANGE (MHz)	FIELD STRENGTH (Microvolts/m)	FIELD STRENGTH (dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


Spec limit: As specified above.

Test result: No non-compliance noted.

9. TEST SETUP, PROCEDURE AND RESULT

9.1. PEAK POWER OUTPUT

TEST SETUP



TEST PROCEDURE

The EUT is configured on a test bench as shown above in a continuously transmitting mode. While the transmitter is on, the Peak Power Meter captures the emission displaying the value on screen. Recorded the value on a template below.

Channel	Frequency (MHz)	Output Power (watts)
LOW	2412	0.0231 (13.63 dBm)
MID	2442	0.0171 (12.32 dBm)
HIGH	2468	0.0173 (12.40 dBm)

MAXIMUM PEAK POWER OUTPUT




9.2. 6 dB BANDWIDTH MEASUREMENT

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 100 kHz	<input checked="" type="checkbox"/> 100 kHz




TEST PROCEDURE

The EUT transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW.


RESULT

No non-compliance noted. See plots below.


LOW CHANNEL

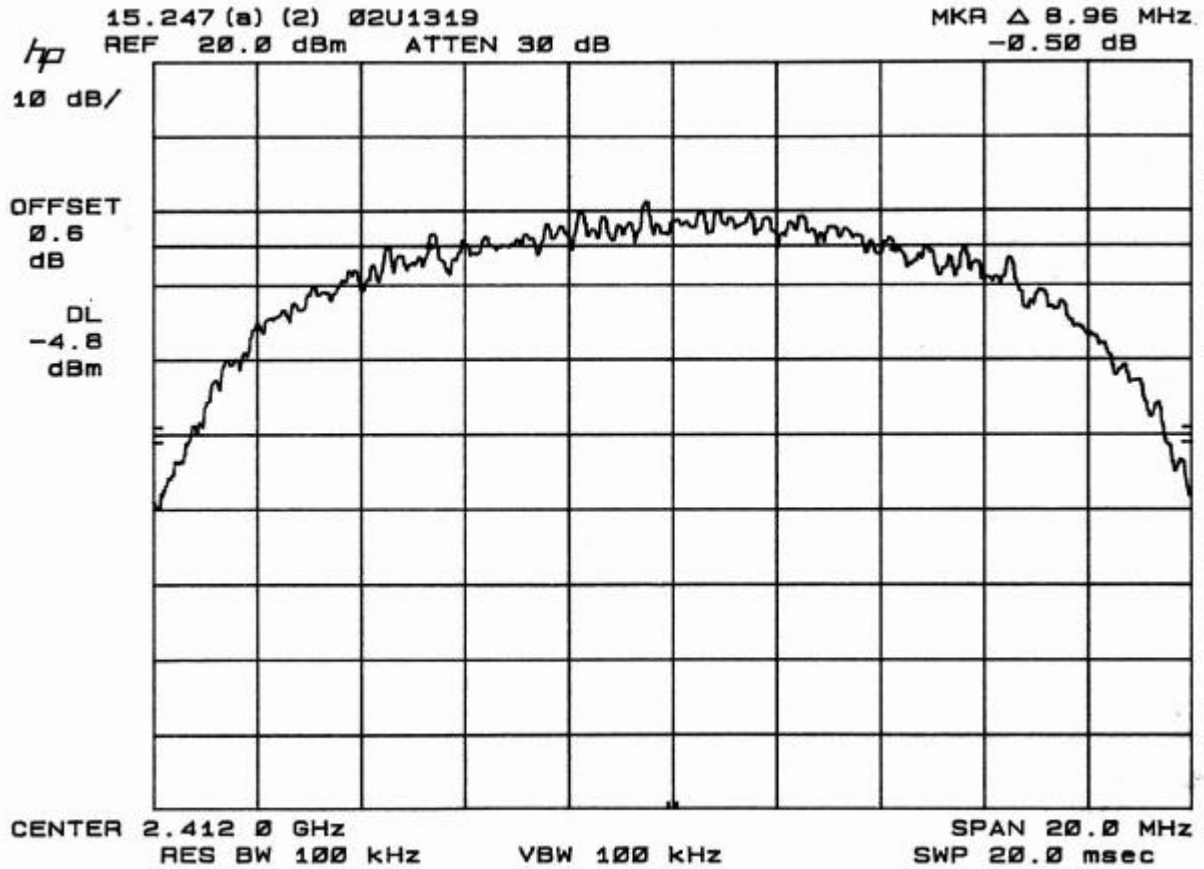

MID CHANNEL

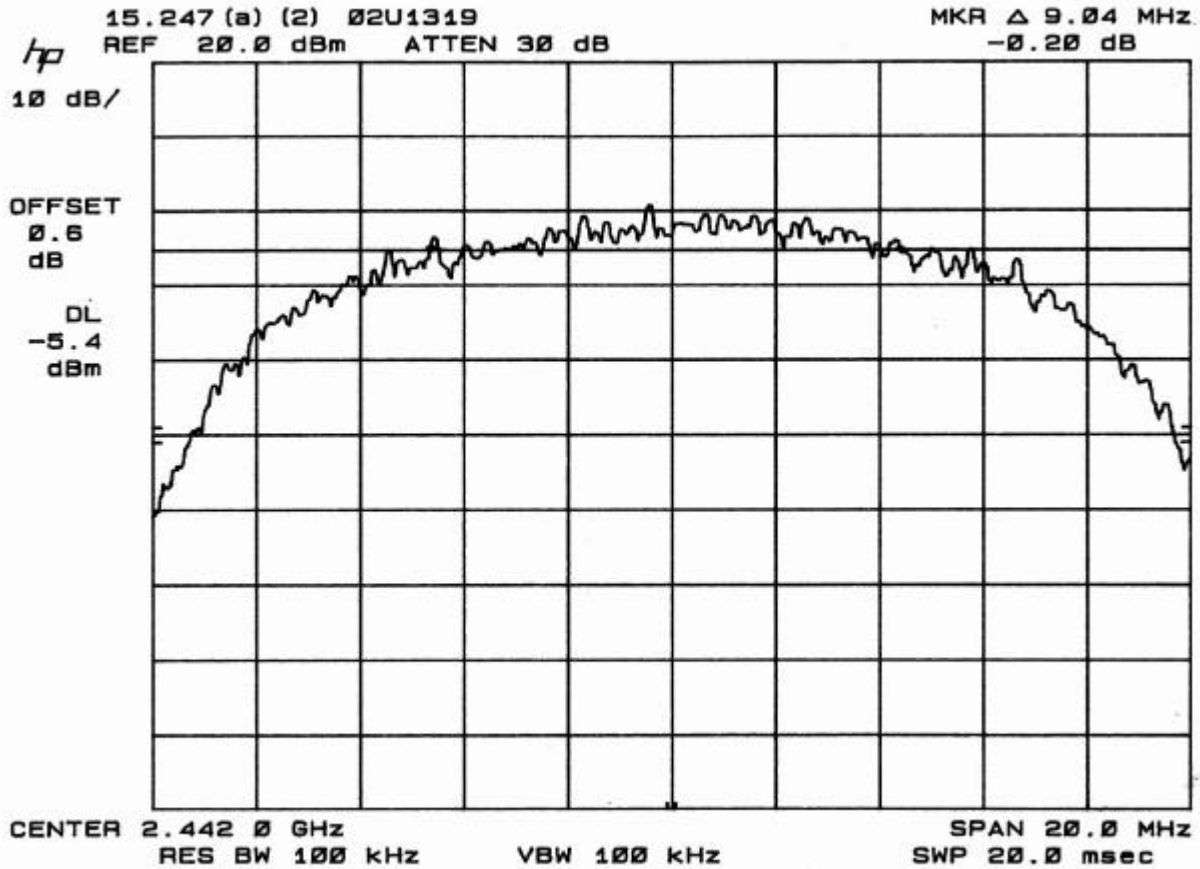

HIGH CHANNEL

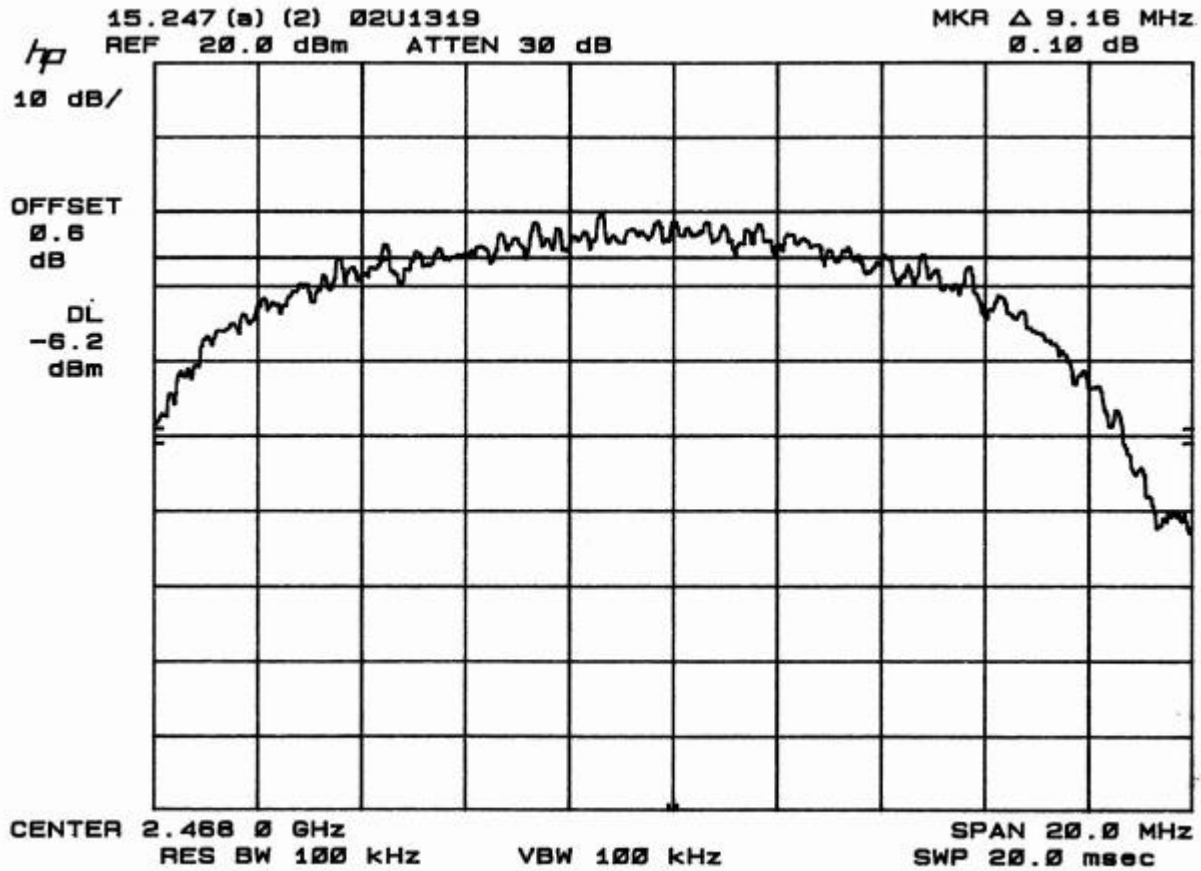


9.3. CONDUCTED SPURIOUS EMISSION

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
30 - 24000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 100 kHz	<input checked="" type="checkbox"/> 100 kHz





TEST PROCEDURE

Connect the Eut's antenna port to the Spectrum Analyzer's input port.
Investigate the entire frequency of the carrier frequency, up to the tenth harmonic.



RESULT

No non-compliance noted. See below plots for LOW, MID, HIGH channels.



LOW CHANNEL

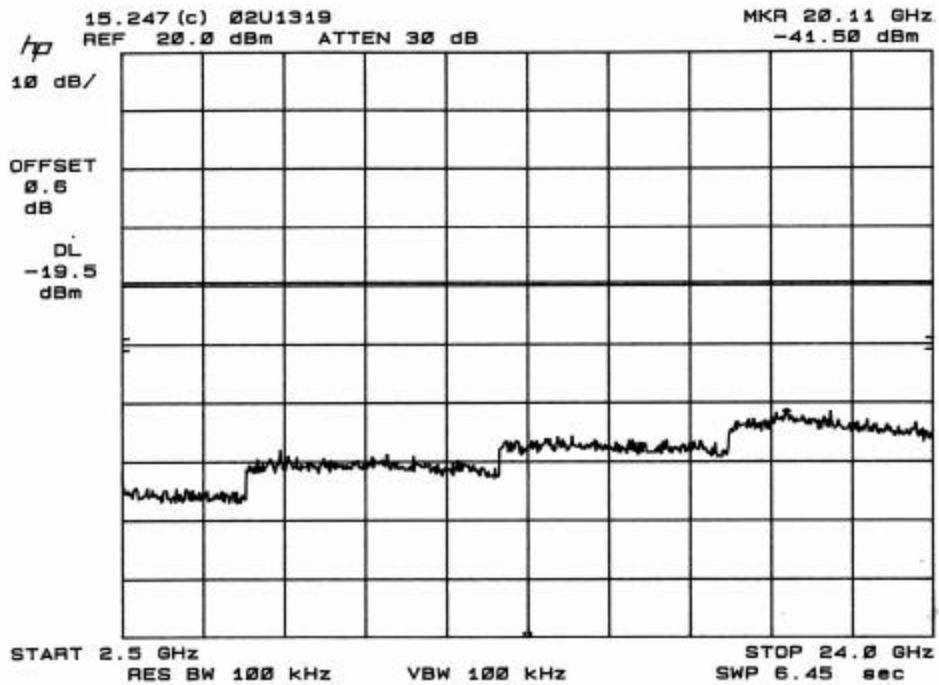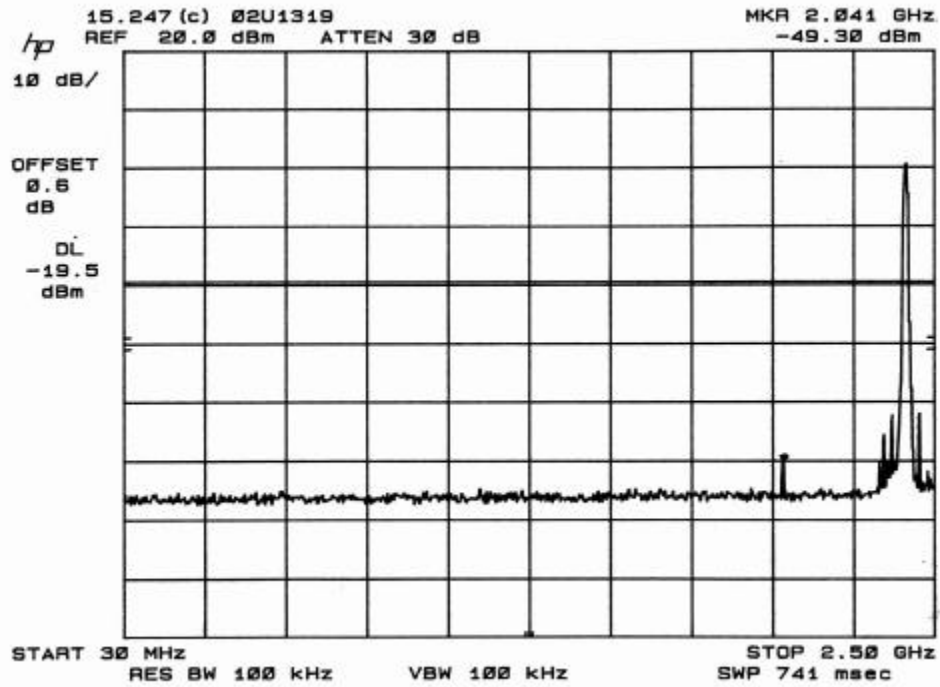

MID CHANNEL

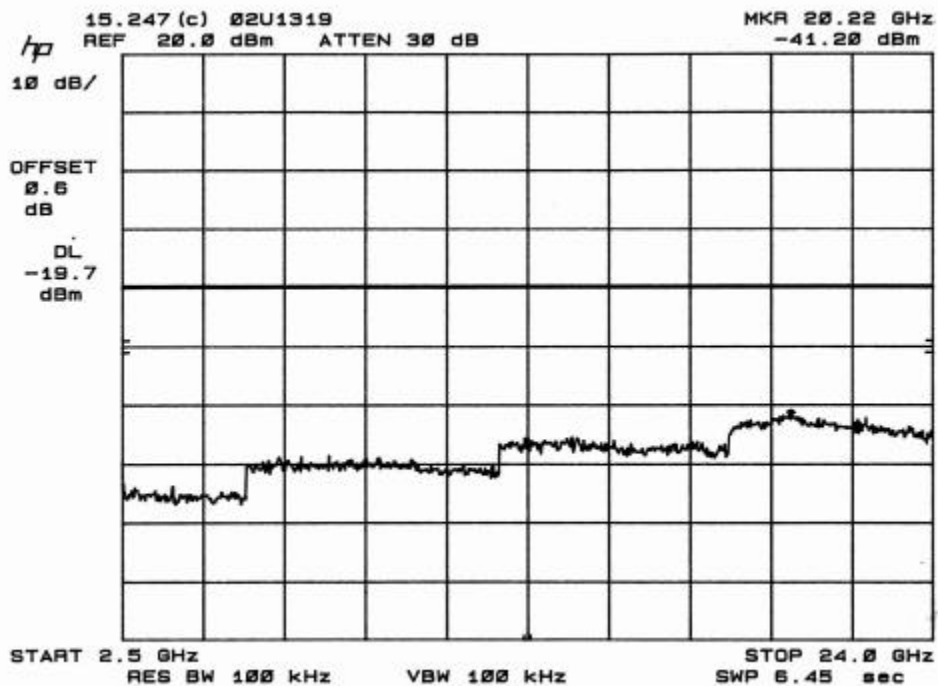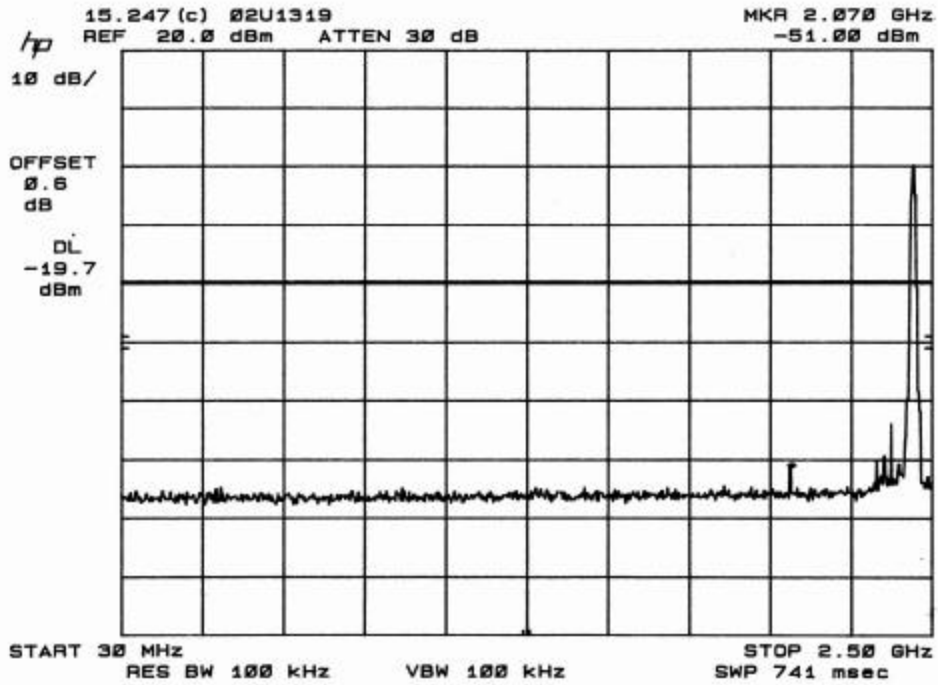

HIGH CHANNEL

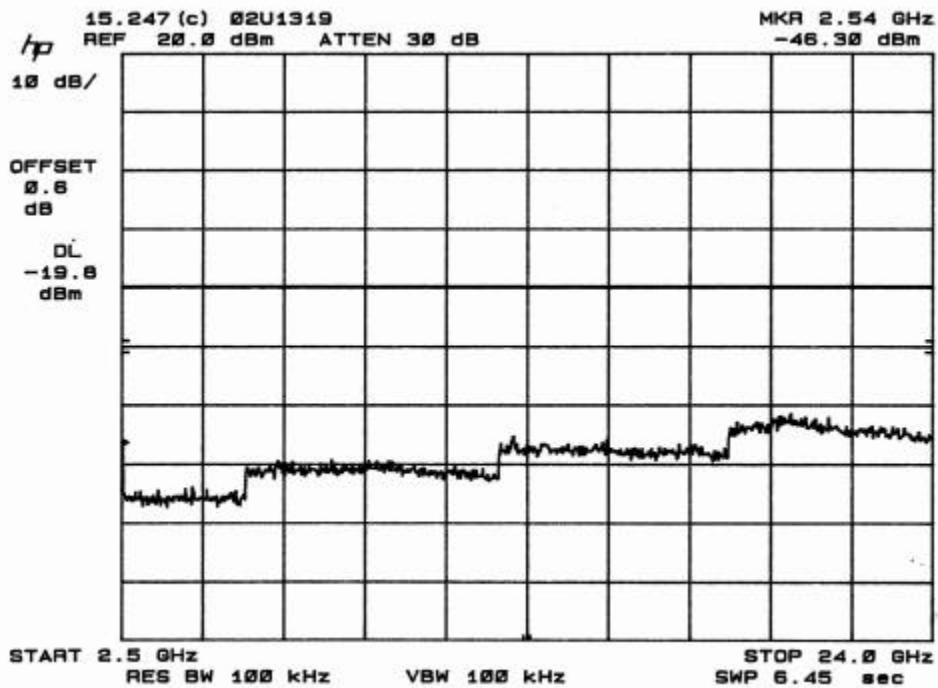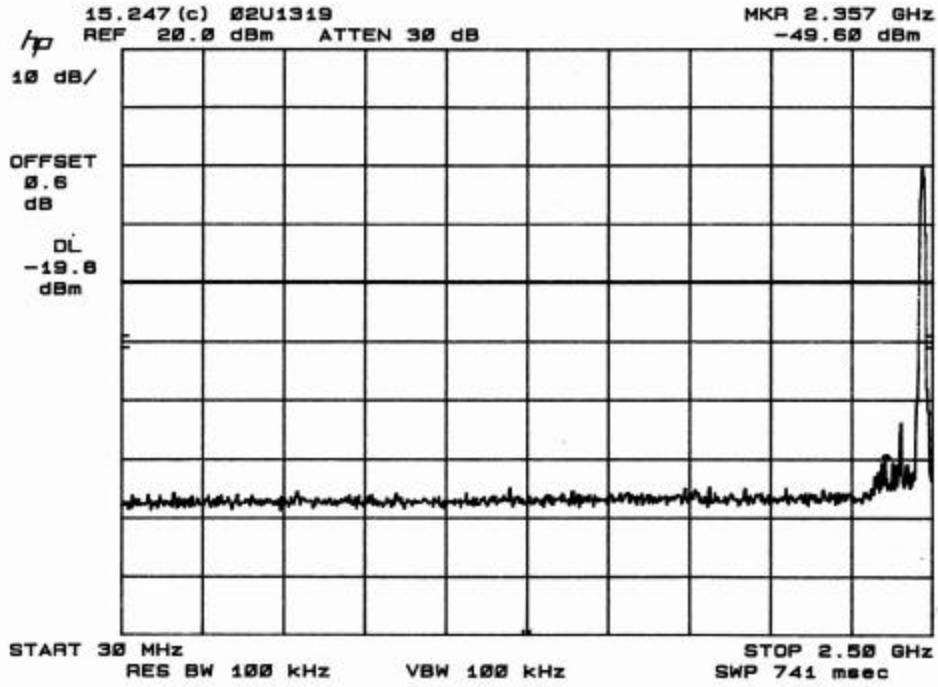


9.4. PEAK POWER SPECTRAL DENSITY

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 3 kHz	<input checked="" type="checkbox"/> 3 kHz




TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 3 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.


Result:

No non-compliance noted. See below plots for LOW, MID, HIGH channels


LOW CHANNEL

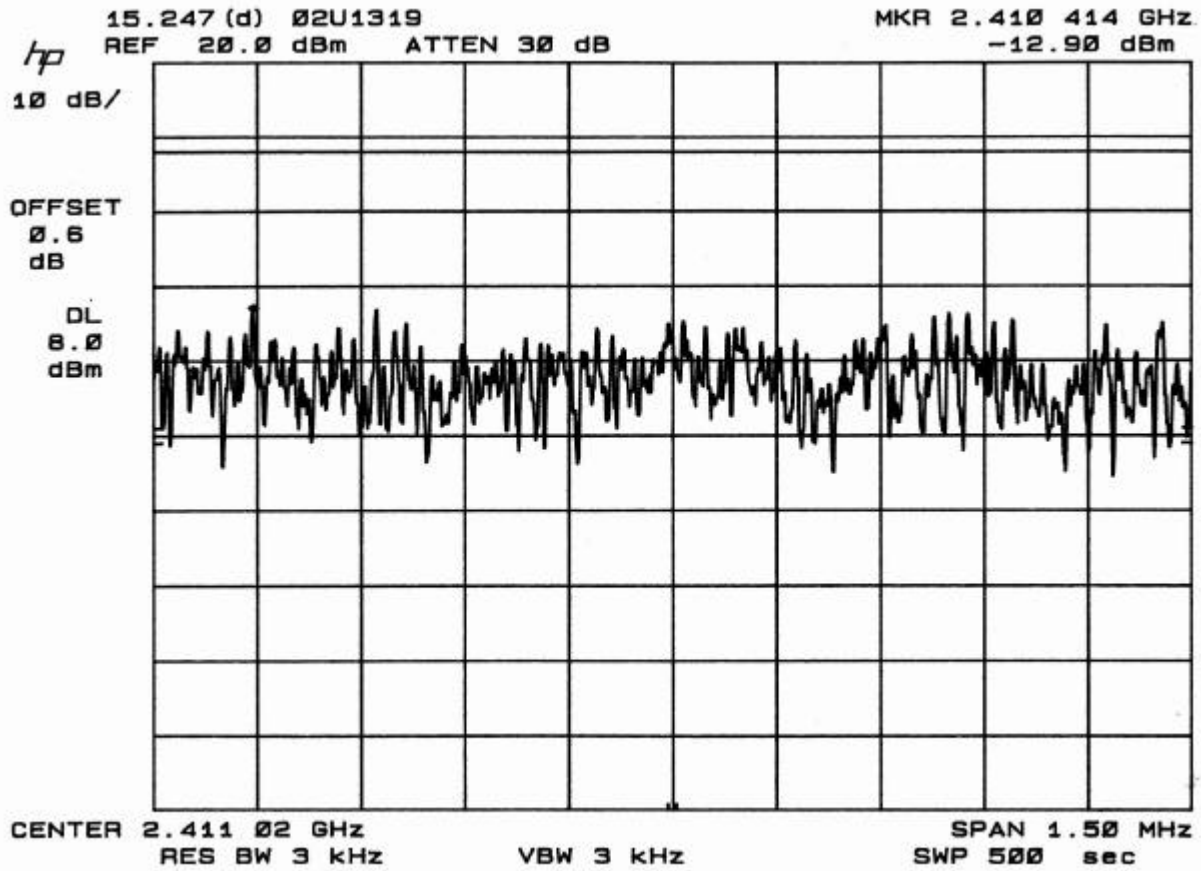

MID CHANNEL

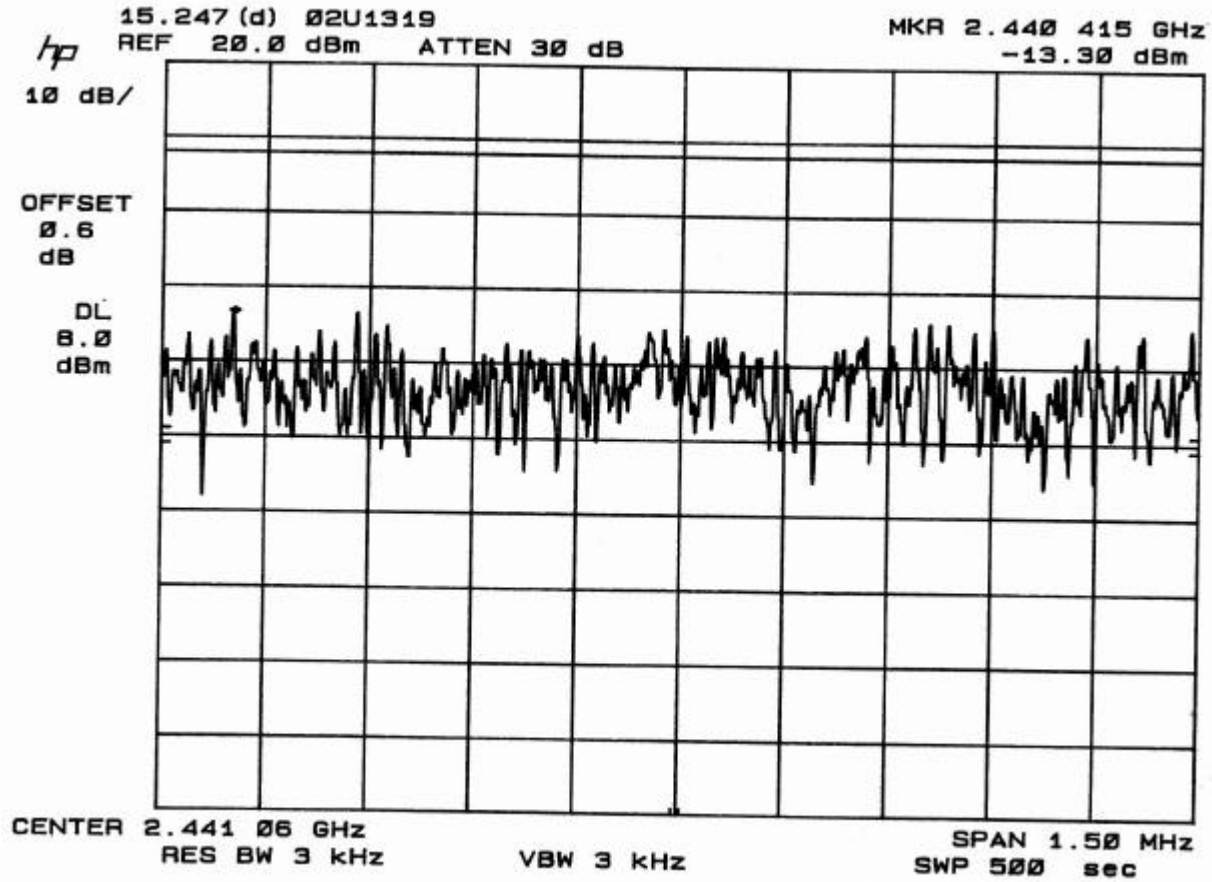

HIGH CHANNEL

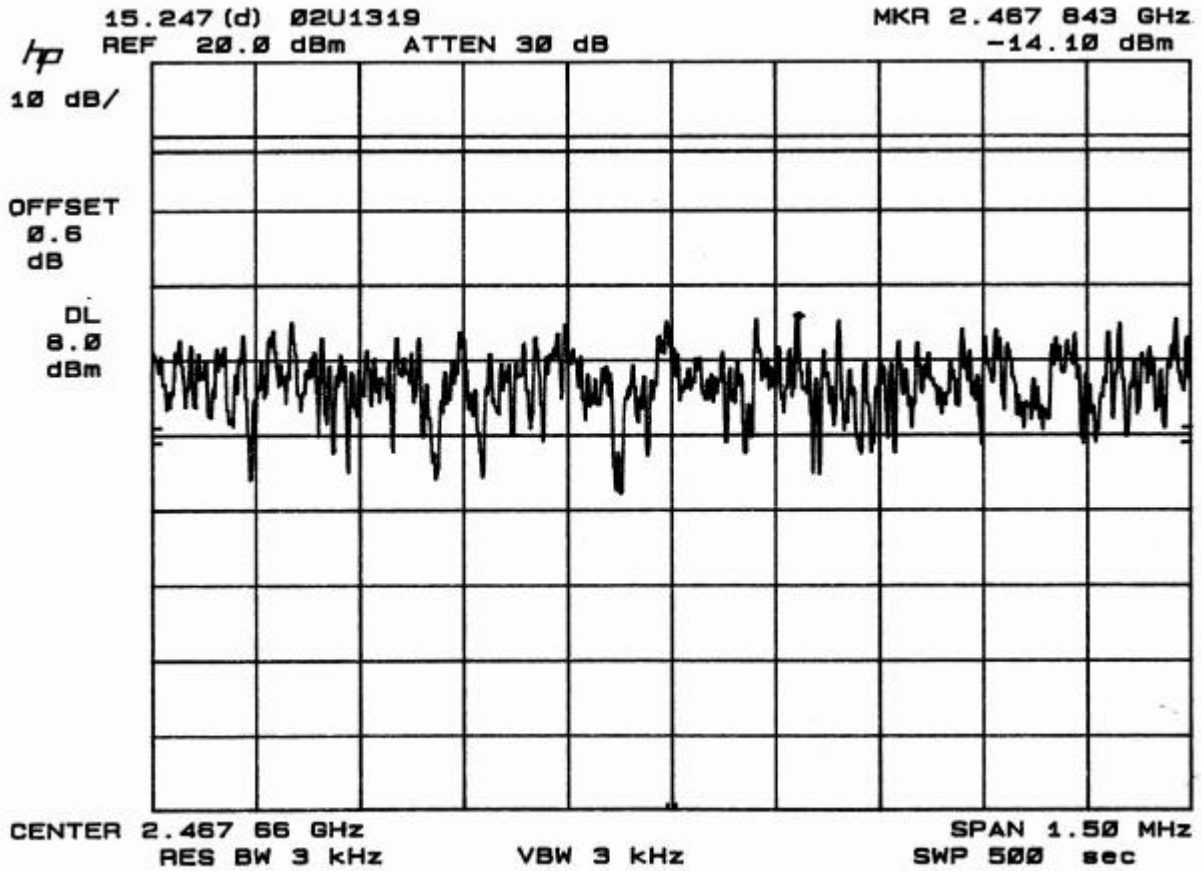


9.5. RESTRICTED BAND EDGE MEASUREMENT

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	<input checked="" type="checkbox"/> Peak <input type="checkbox"/> Average	<input checked="" type="checkbox"/> 100 KHz <input type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 100 KHz <input type="checkbox"/> 10 Hz



TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator; the lower and upper band edge of the EUT is investigated.

The resolutions and video bandwidth were set to 100kHz.


RESULT

No non-compliance noted. See below plots for LOW and HIGH channels

BANDEDGE @ LOW CHANNEL

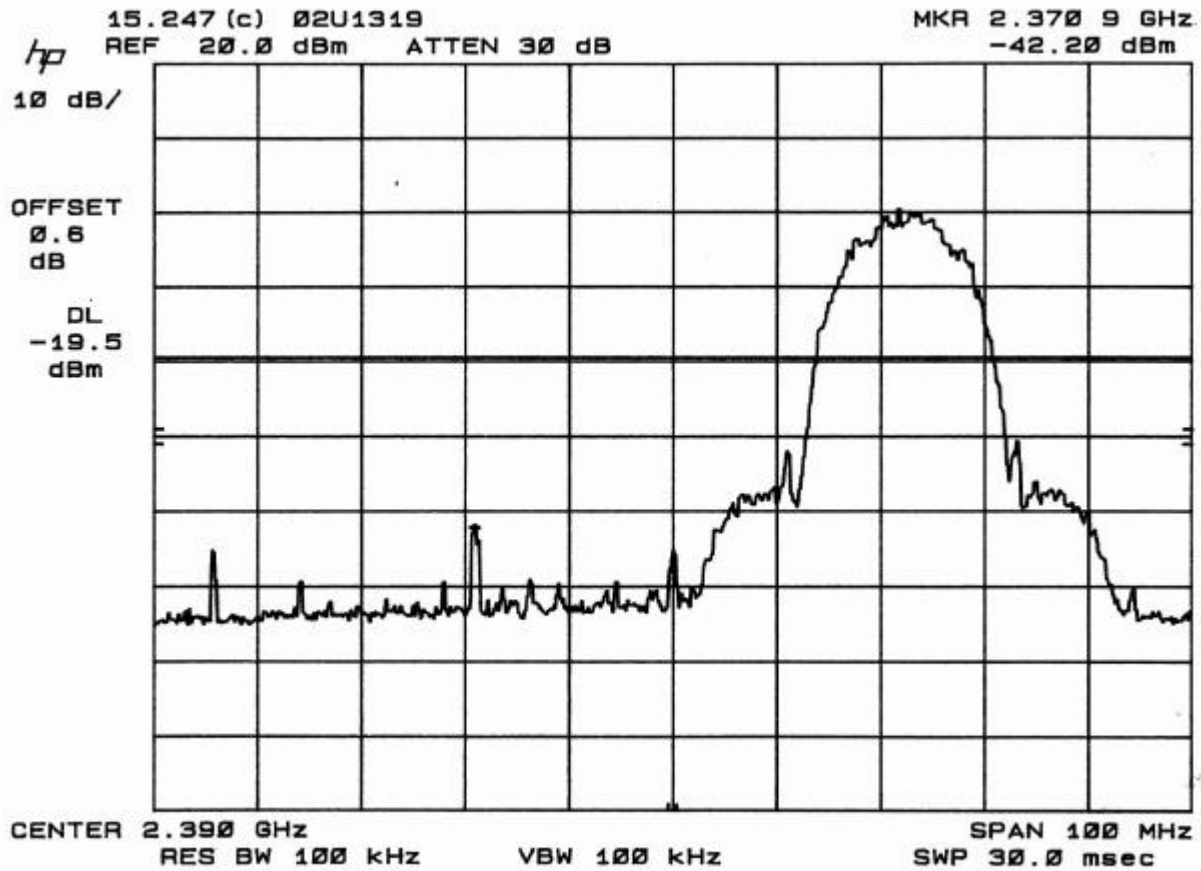

BANDEDGE @ HIGH CHANNEL

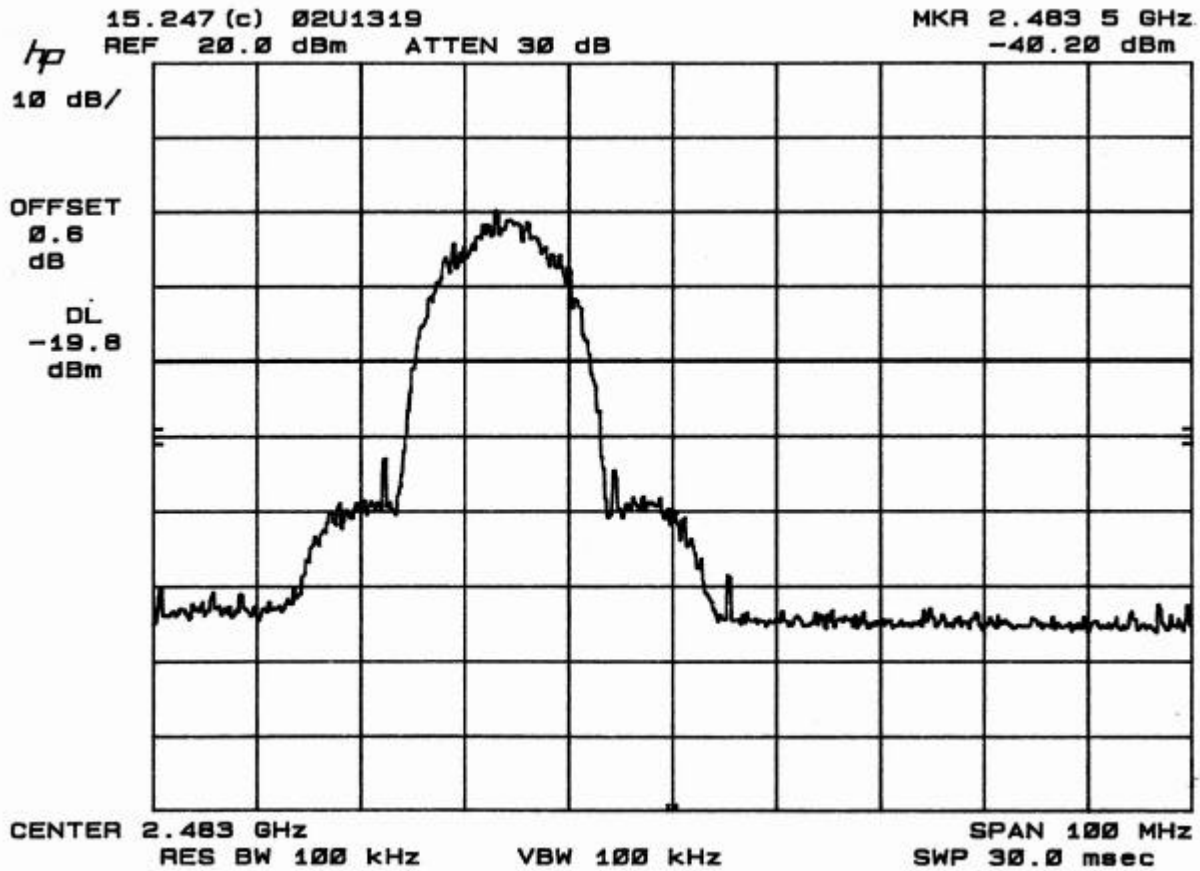

9.6. RADIATED EMISSION

9.6.1. RADIATED EMISSION AND RESTRICTED BANDS

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 100 KHz	<input checked="" type="checkbox"/> 100 KHz
	<input checked="" type="checkbox"/> Quasi Peak	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 1 MHz
Above 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 1 MHz
	<input checked="" type="checkbox"/> Average	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 10 Hz

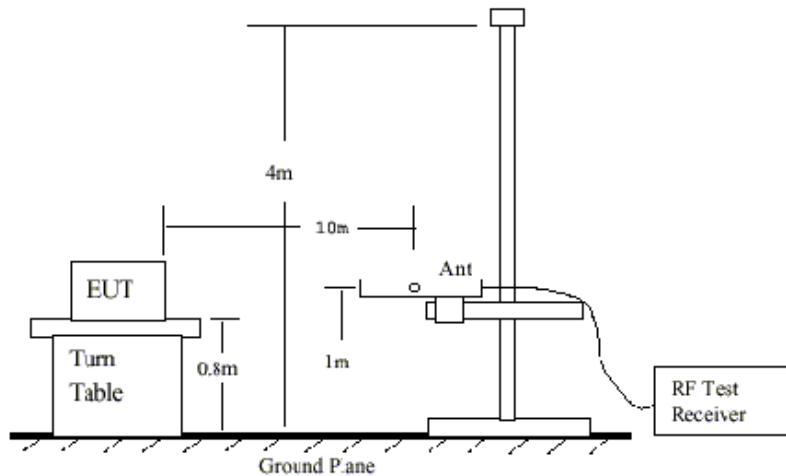


Fig 1: Radiated Emission Measurement 30 to 1000 MHz

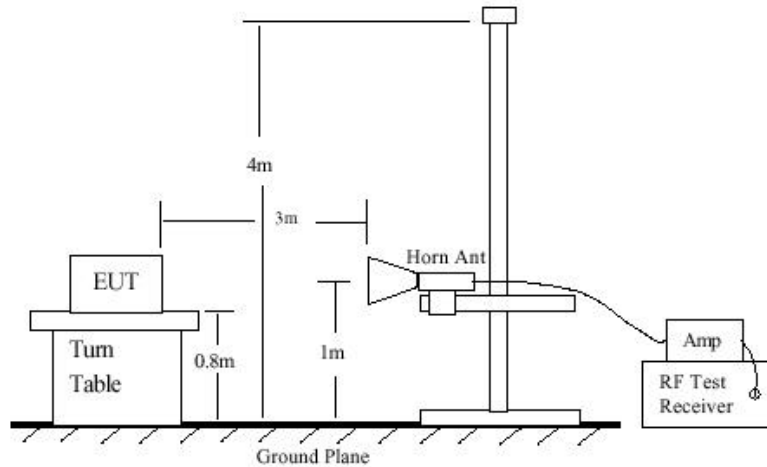


Fig 2: Radiated Emission Above 1000 MHz

TEST PROCEDURE

1. The EUT was placed on the turntable 0.8 meter above ground in 3 meter open area test site.
2. Set the resolution bandwidth to 100KHz in the test receiver and select Peak function to scan the frequency below 1 GHz.
3. Shift the interference-receiving antenna located in antenna tower upwards and downwards between 1 and 4 meters above ground and find out the local peak emission on frequency domain.
4. Locate the interference-receiving antenna at the position where the local peak reach the maximum emission.
5. Rotate the turntable and stop at the angle where the measurement device has maximum reading.
6. Shift the interference-receiving antenna again to detect the maximum emission of the local peak.
7. If the reading of the local peak under Peak function is lower than limit by 6dB, then Quasi Peak detection is not needed and this reading should be recorded. And if it is higher than Peak limit, then the test is fail. Others, switch the receiver to Quasi Peak function, set the resolution bandwidth to 100kHz and repeat the procedures (3)~(6). If


the reading is lower than limit, this reading should be recorded, otherwise, the test is fail.

8. Set the resolution and video bandwidth of the spectrum analyzer to 1MHz and repeat procedures (3)~(6) for frequency band from 1 GHz to 10 times carrier frequency.

9. If the reading for the local peak is lower than the Average limit, no further testing is needed in this local peak and this reading should be recorded. If it is higher than Average limit but lower than Peak limit, then set the resolution bandwidth to 1MHz and video bandwidth to 10Hz. Repeat procedures (3)~(6). If the maximum reading is lower than Average limit, then this reading should be recorded. If it is higher, then the test is fail.

RESULT

No non-compliance noted. See data below.

		Project #: 02U1319-1 Report #: 020628C01 Date & Time: 06/28/02 10:16 AM Test Engr: Frank Ibrahim									
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888											
Company: OTC Wireless, Inc. EUT Description: 2.4 GHz Transceiver Radio w/ RS232 Interface (AirEZY2411RS232) Test Configuration : EUT, Laptop, Mouse, Printer Type of Test: FCC CLASS B Mode of Operation: Normal Mode (Middle Channel, CH6)											
<< Main Sheet											
Freq.	Reading	AF	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height	Mark
(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
308.00	55.00	14.73	2.61	26.70	45.64	46.00	-0.36	3mH	0.00	1.00	QP
308.00	52.30	14.73	2.61	26.70	42.94	46.00	-3.06	3mV	0.00	1.00	QP
836.00	43.00	21.74	4.70	27.73	41.71	46.00	-4.29	3mH	0.00	1.00	P
484.00	48.00	17.63	3.38	27.86	41.15	46.00	-4.85	3mH	0.00	1.00	P
748.00	43.30	21.33	4.40	27.93	41.10	46.00	-4.90	3mV	0.00	1.00	P
924.00	40.30	23.02	5.00	27.44	40.87	46.00	-5.13	3mH	0.00	1.00	QP
6 Worst Data											

COMPLIANCE CERTIFICATION SERVICES, INC.Radiated Emissions
FCC 15.20505/29/02
Kerwin Corpuz
A-site (1.0 Meter)

OTC Wireless, Inc.

2.4 GHz Transceiver Radio with RS232 Interface (M/N: AirEZY2411RS232)

fo = 2412 MHz (low channel)**TX mode**

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4824*	43.1	33.2	33.4	4	36.1	9.54	1	35.86	25.96	74	54	-38.1	-28
7236*	46.4	35.9	37	5	36.4	9.54	1	43.46	32.96	74	54	-30.5	-21
9648*	46.9	36.2	38.4	5.9	35.5	9.54	1	47.16	36.46	74	54	-26.8	-17.5
12060*	46	35	39.3	6.5	36.3	9.54	1	46.96	35.96	74	54	-27	-18
14472*	49.8	38.9	41.2	7.5	38	9.54	1	51.96	41.06	74	54	-22	-12.9
16884*	49.2	39	41.5	8.5	38.9	9.54	1	51.76	41.56	74	54	-22.2	-12.4
19296*	52.8	43.4	31.9	9.4	39.3	12	1	43.8	34.4	74	54	-30.2	-19.6
21708*	52.5	42.4	32.5	10.2	38.1	12	1	46.1	36	74	54	-27.9	-18

fo = 2442 MHz (mid channel)**TX mode**

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4884*	43.1	33.2	33.4	4	36.1	9.54	1	35.86	25.96	74	54	-38.1	-28
7326*	46.4	35.9	37	5	36.4	9.54	1	43.46	32.96	74	54	-30.5	-21
9768*	46.9	36.2	38.4	5.9	35.5	9.54	1	47.16	36.46	74	54	-26.8	-17.5
12210*	46	35	39.3	6.5	36.3	9.54	1	46.96	35.96	74	54	-27	-18
14652*	49.8	38.9	41.2	7.5	38	9.54	1	51.96	41.06	74	54	-22	-12.9
17094*	49.2	39	41.5	8.5	38.9	9.54	1	51.76	41.56	74	54	-22.2	-12.4
19536*	52.8	43.4	31.9	9.4	39.3	12	1	43.8	34.4	74	54	-30.2	-19.6
21978*	52.5	42.4	32.5	10.2	38.1	12	1	46.1	36	74	54	-27.9	-18

fo = 2468 MHz (high channel) TX mode

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4936*	43.1	33.2	33.4	4	36.1	9.54	1	35.86	25.96	74	54	-38.1	-28
7404*	46.4	35.9	37	5	36.4	9.54	1	43.46	32.96	74	54	-30.5	-21
9872*	46.9	36.2	38.4	5.9	35.5	9.54	1	47.16	36.46	74	54	-26.8	-17.5
12340*	46	35	39.3	6.5	36.3	9.54	1	46.96	35.96	74	54	-27	-18
14808*	49.8	38.9	41.2	7.5	38	9.54	1	51.96	41.06	74	54	-22	-12.9
17276*	49.2	39	41.5	8.5	38.9	9.54	1	51.76	41.56	74	54	-22.2	-12.4
19744*	52.8	43.4	31.9	9.4	39.3	12	1	43.8	34.4	74	54	-30.2	-19.6
22212*	52.5	42.4	32.5	10.2	38.1	12	1	46.1	36	74	54	-27.9	-18

NOTE: * Measured noise floor (worse case vertical), horizontal (H) and vertical (V)

DIST: extrapolate reading from 3m specification distance to 1m measurement distance = **-9.54dB**

extrapolate reading from 3m specification distance to 0.75m measurement distance = **-12dB**

AF: Antenna Factor

AMP: Pre-amp gain

CL: SMA cable loss (13ft)

HPF: FSY High pass filter insertion loss (4.57GHz; S/N:003)


ANALYZER SETTINGS


RES BW AVG BW


Peak(Pk): **1MHz 1MHz**
 Average(Avg): **1MHz 10Hz**


RESTRICTED BANDEDGE: 2310 – 2390 MHz and 2483.5 – 2500 MHz

BOTTOM BANDEDGE @ LOW CHANNEL

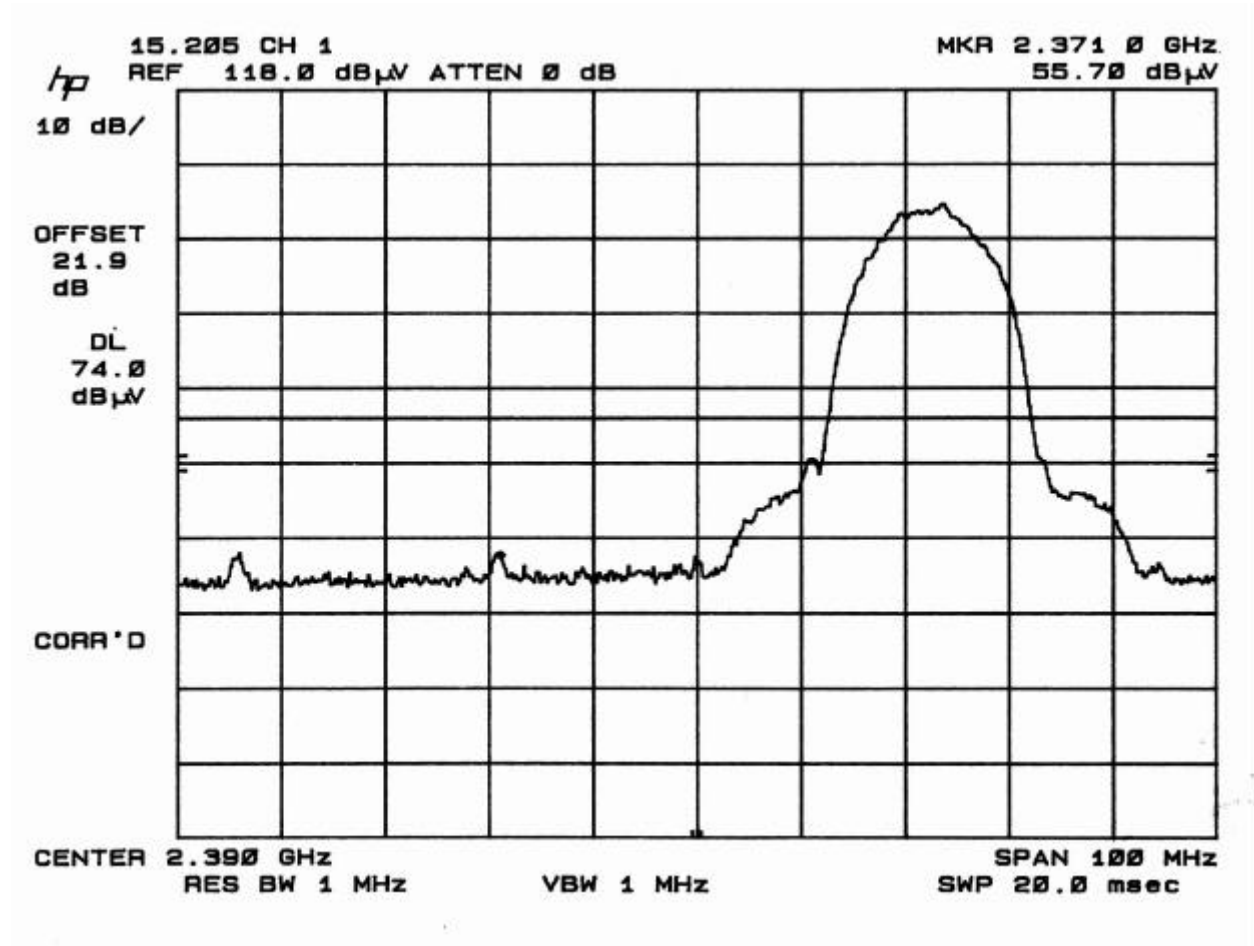


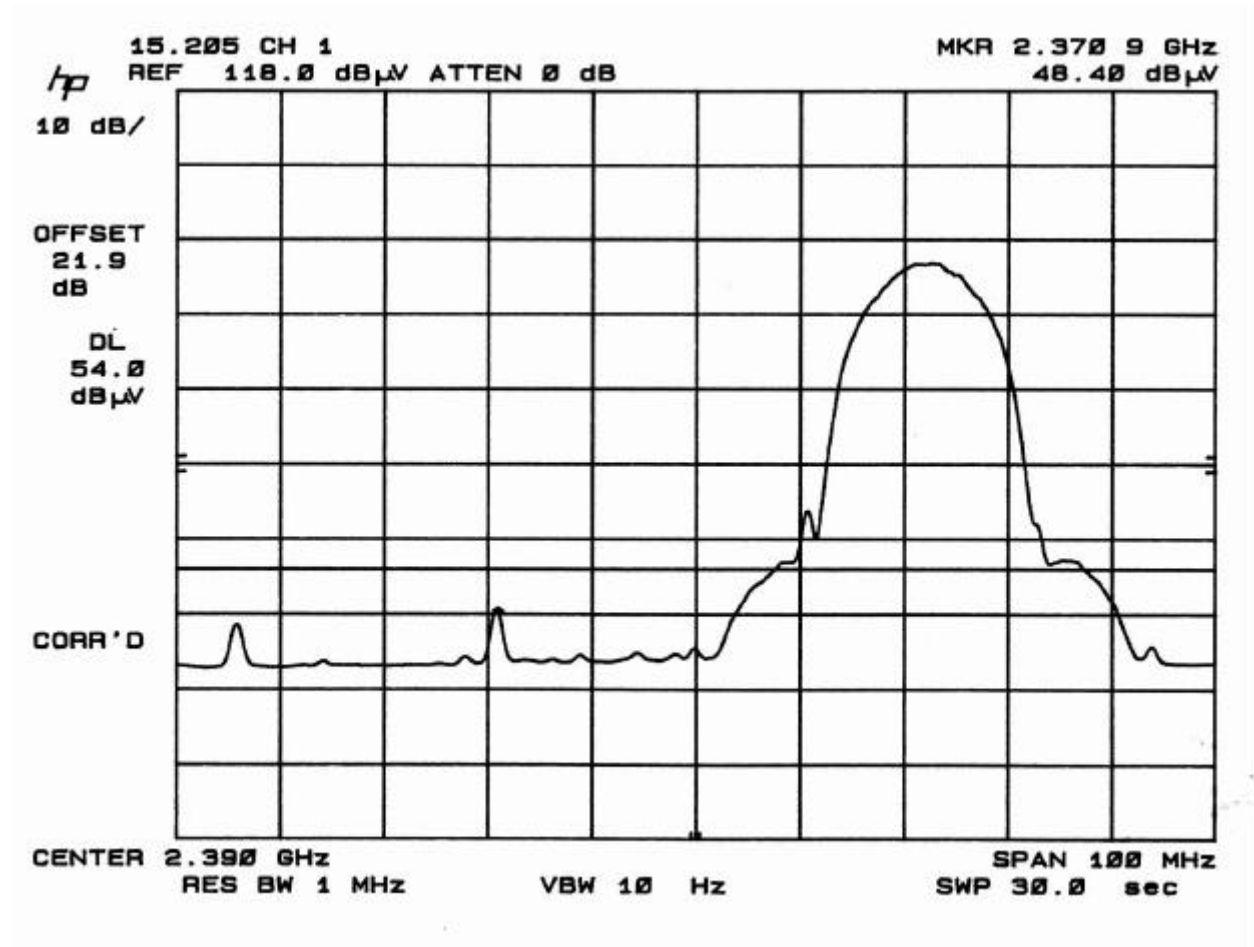


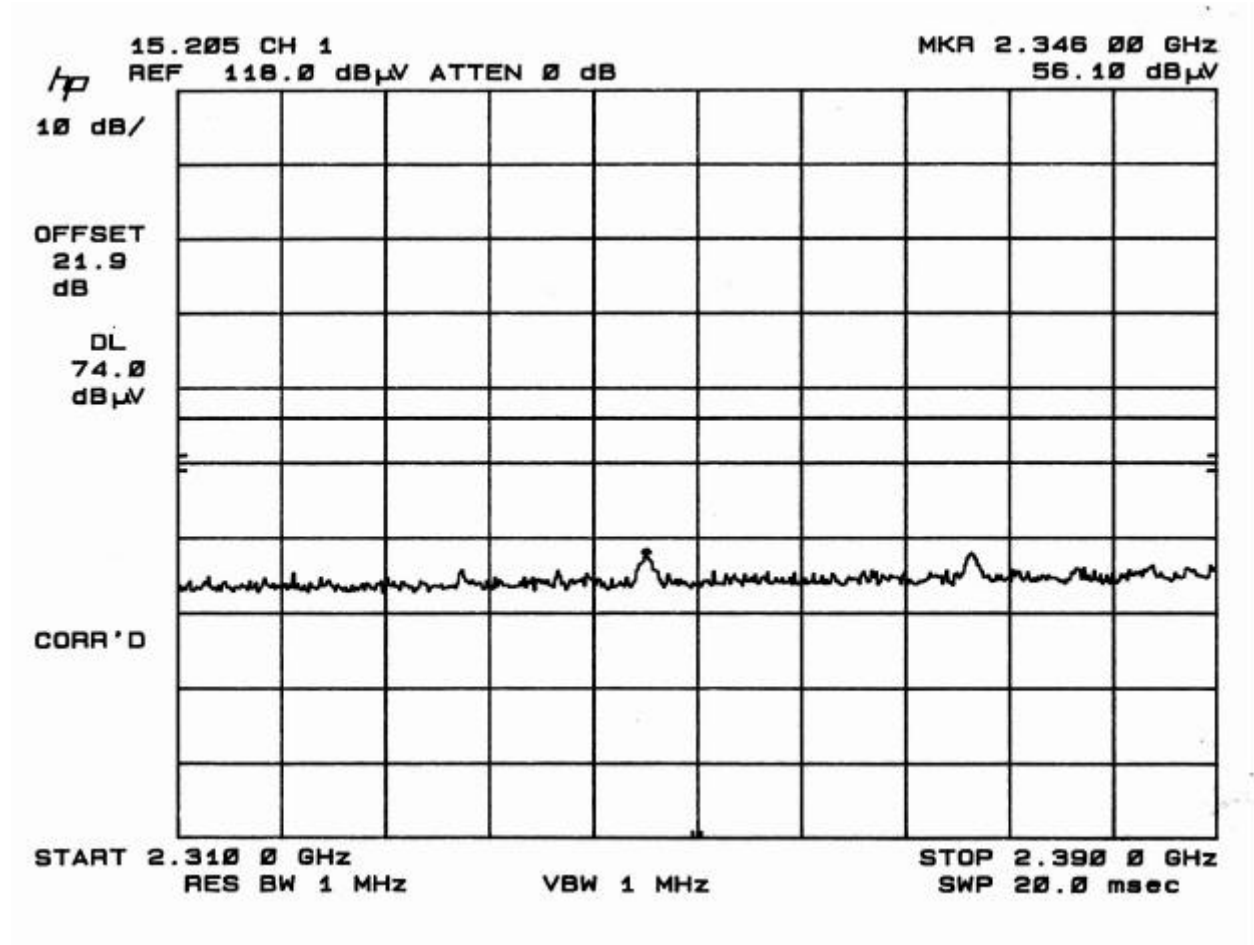

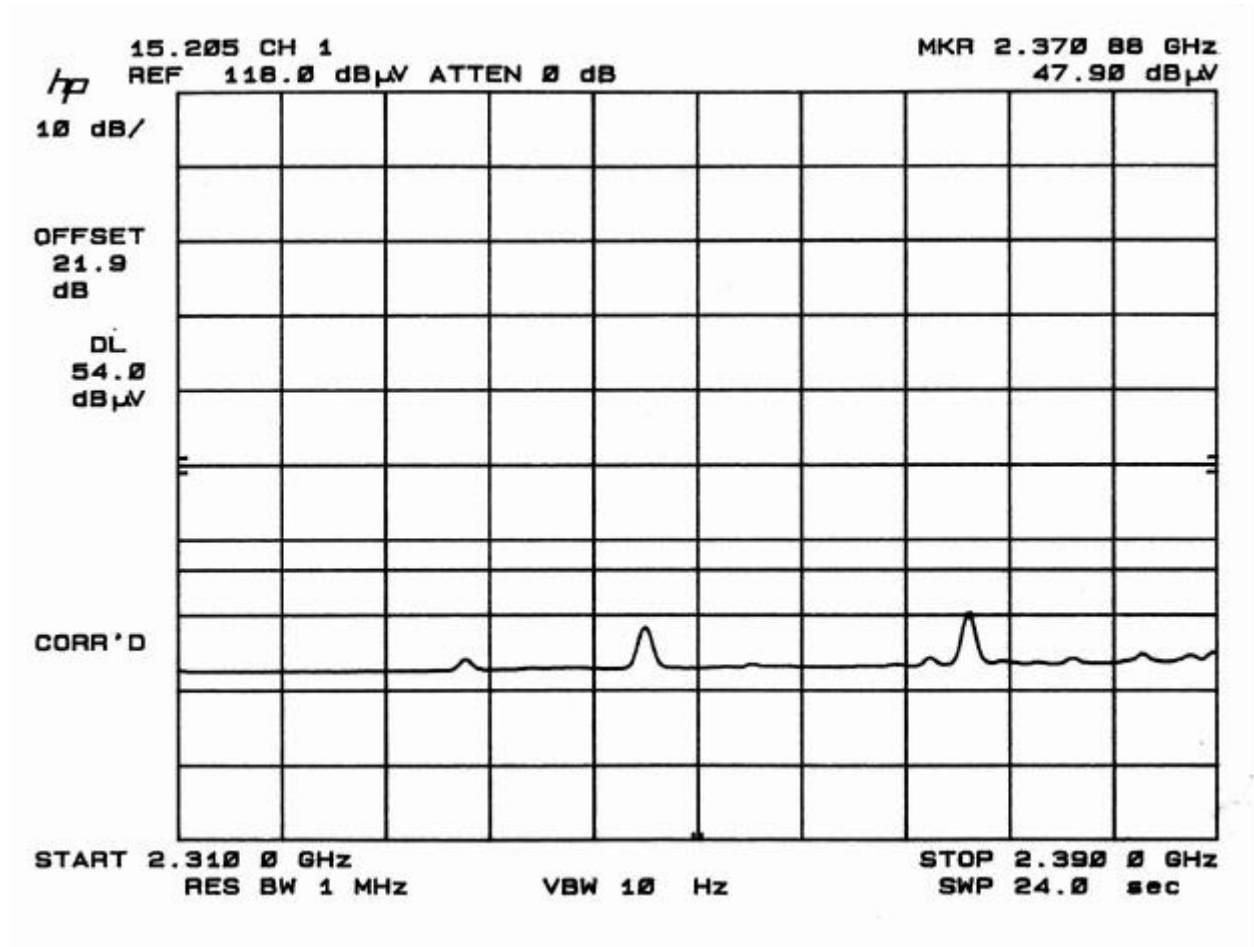

TOP BANDEDGE @ HIGH CHANNEL

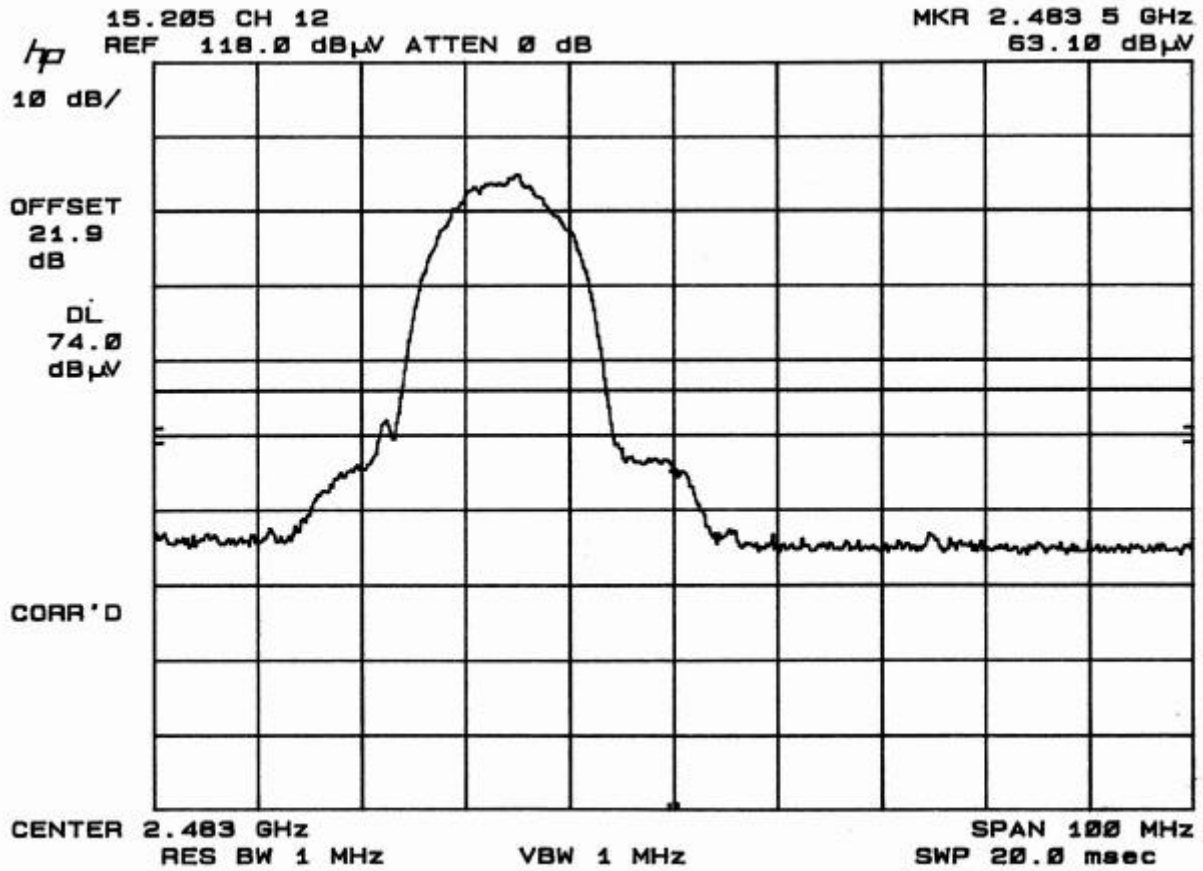

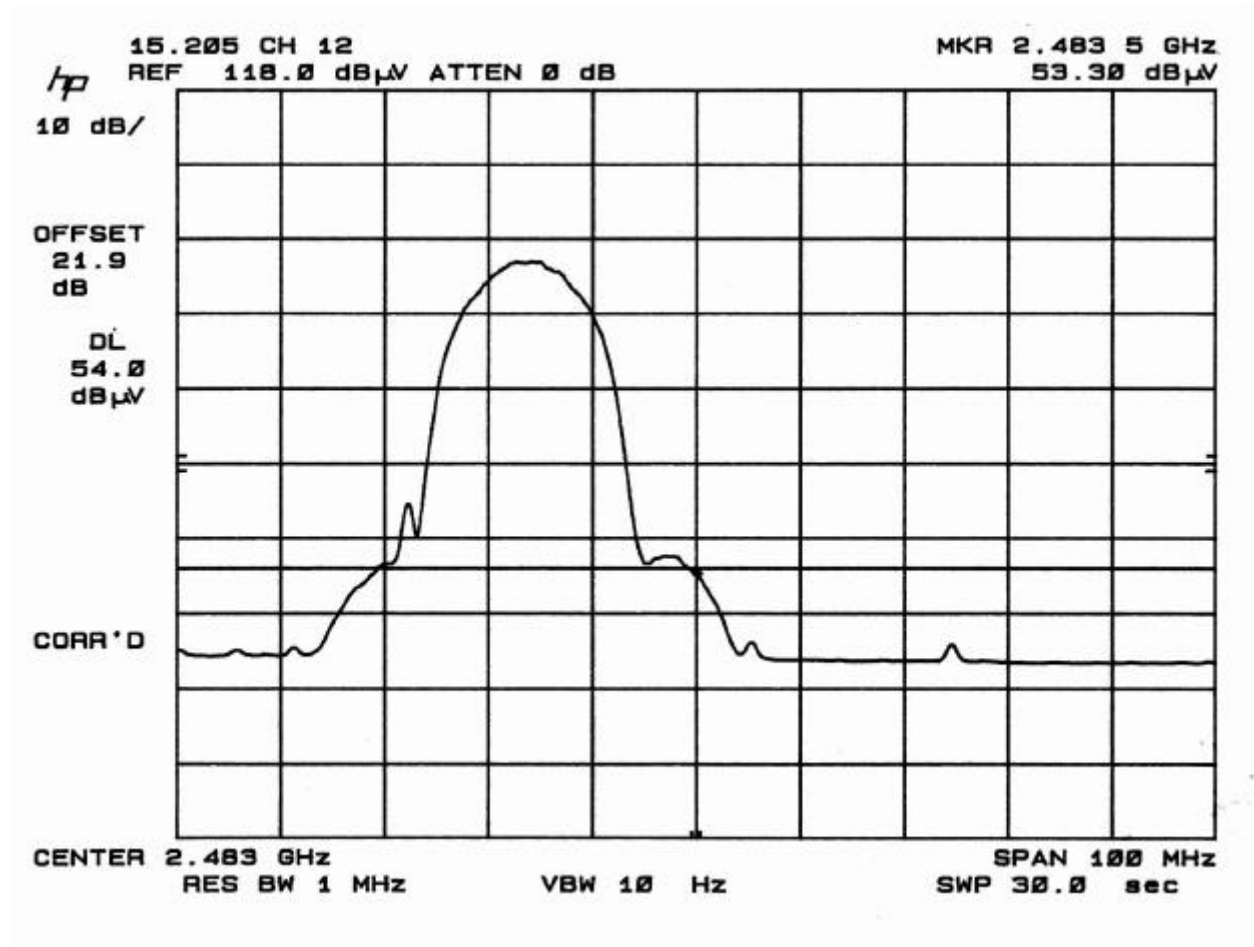


9.7. POWER LINE CONDUCTED EMISSION

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
450 KHz to 30 MHz	<input type="checkbox"/> Peak <input checked="" type="checkbox"/> Quasi Peak	<input checked="" type="checkbox"/> 10 KHz	<input checked="" type="checkbox"/> 10 KHz

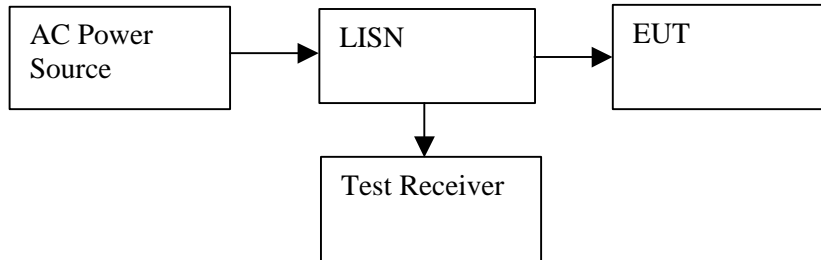

TEST PROCEDURE

1. The EUT was placed on a wooden table 80 cm above the horizontal ground plane and 40 cm away from the vertical ground plane. The EUT was set to transmit / receive in a continuous mode.
2. Conducted disturbance was measured between the phase lead and the ground, and between the neutral lead and the ground. The frequency 0.450 - 30 MHz was investigated.

RESULT


No non-compliance noted. See Line Conduction plot

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Class (dB)	Limit QP	FCC_B		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)			AV	QP (dB)	AV (dB)		
0.45	34.83	--	--	0.00	48.00	--	-13.17	--	L1	
0.70	33.30	--	--	0.00	48.00	--	-14.70	--	L1	
0.92	30.95	--	--	0.00	48.00	--	-17.05	--	L1	
0.45	33.94	--	--	0.00	48.00	--	-14.06	--	L2	
0.69	32.51	--	--	0.00	48.00	--	-15.49	--	L2	
0.93	31.49	--	--	0.00	48.00	--	-16.51	--	L2	
6 Worst Data										



561F Monterey Road,
San Jose, CA 95037 USA
Tel: (408) 463-0885
Fax: (408) 463-0888


Data#: 7 File#: LC1319.EMI Date: 05-28-2002 Time: 17:03:39
Level (dBuV) Compliance Certification Service

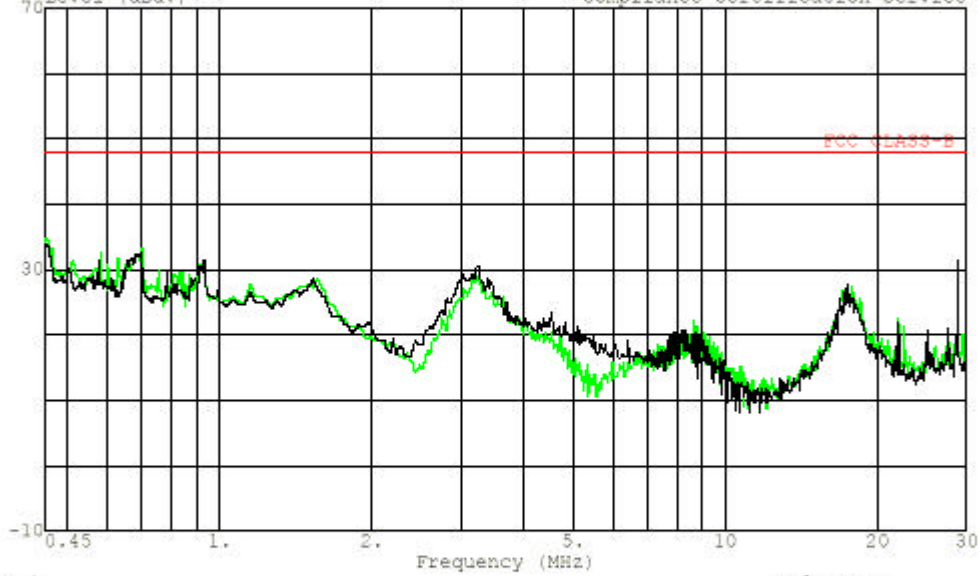


Trace: 3
Project # : 02U1319-1
Test Engineer: Kerwin Corpuz
Company : OTC Wireless, Inc.
EUT : 2.4 GHz Transceiver Radio with
: RS232 Interface
: Model: AirEZY2411RS232
Test Config : EUT/PC/Mouse/Printer
Type of Test : FCC CLASS B
Mode of Op. : Rx
: PEAK: L1(green), L2(black)
: 115Vac, 60Hz

9.8. SETUP PHOTOS

Radiated Emission below 1 GHz measurement

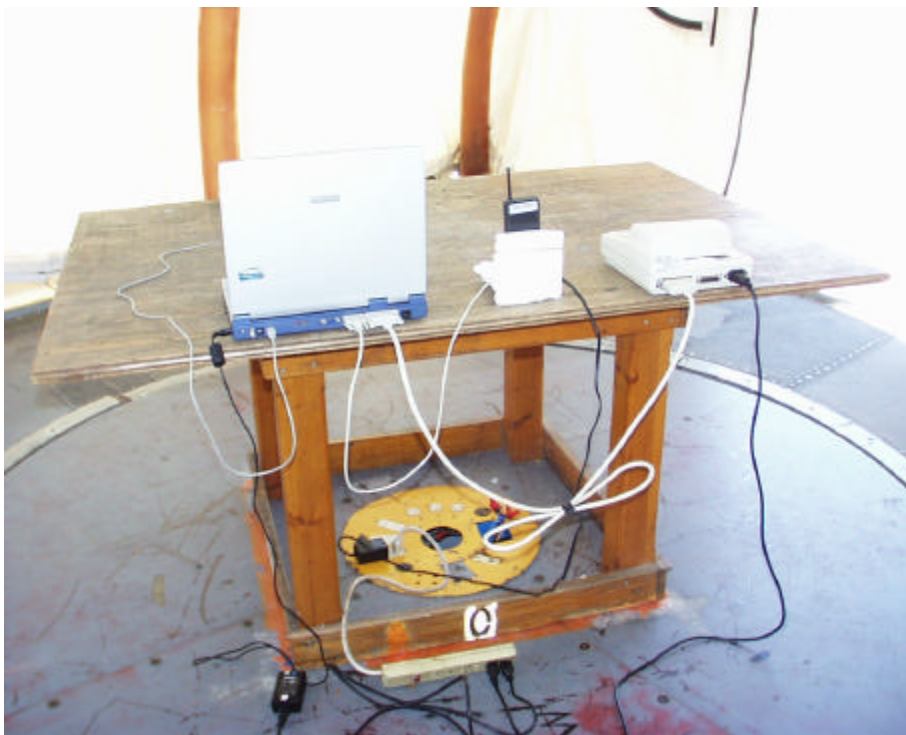


Conducted Emission measurement

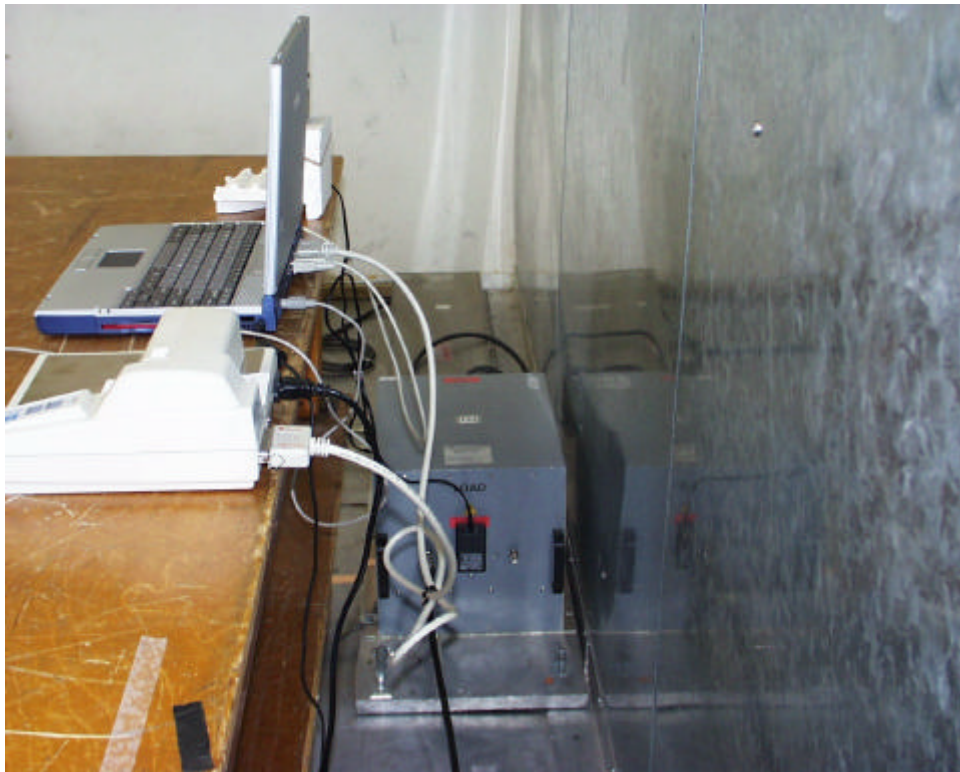


Radiated Emission above 1 GHz measurement



Radiated Emission above 18 GHz measurement

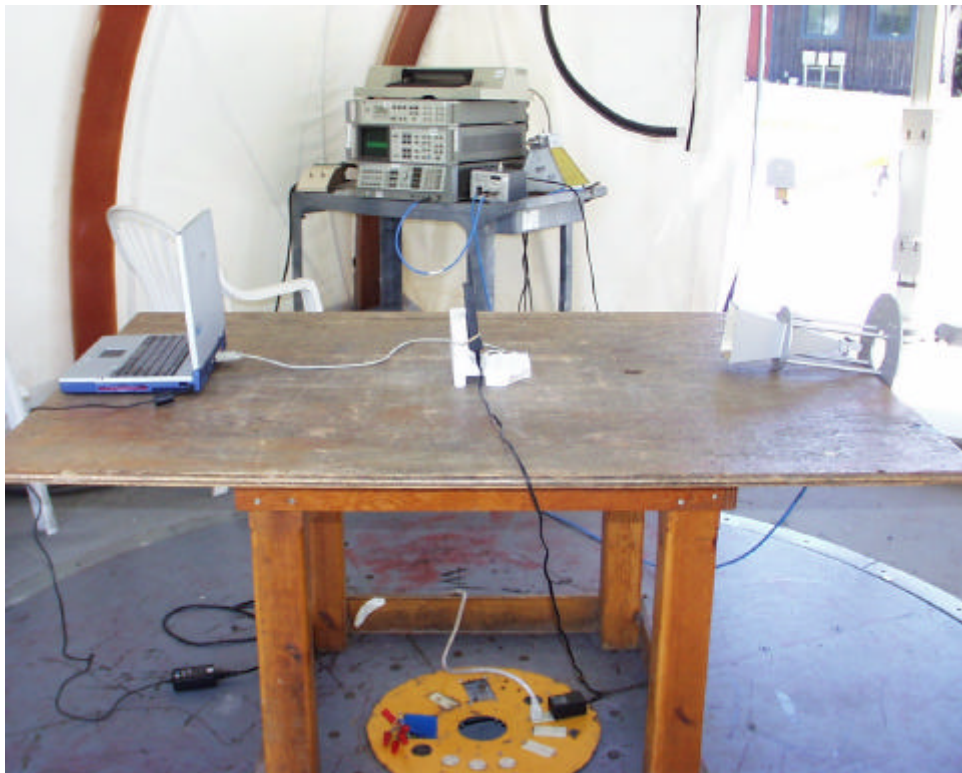

Antenna Port Terminal measurement

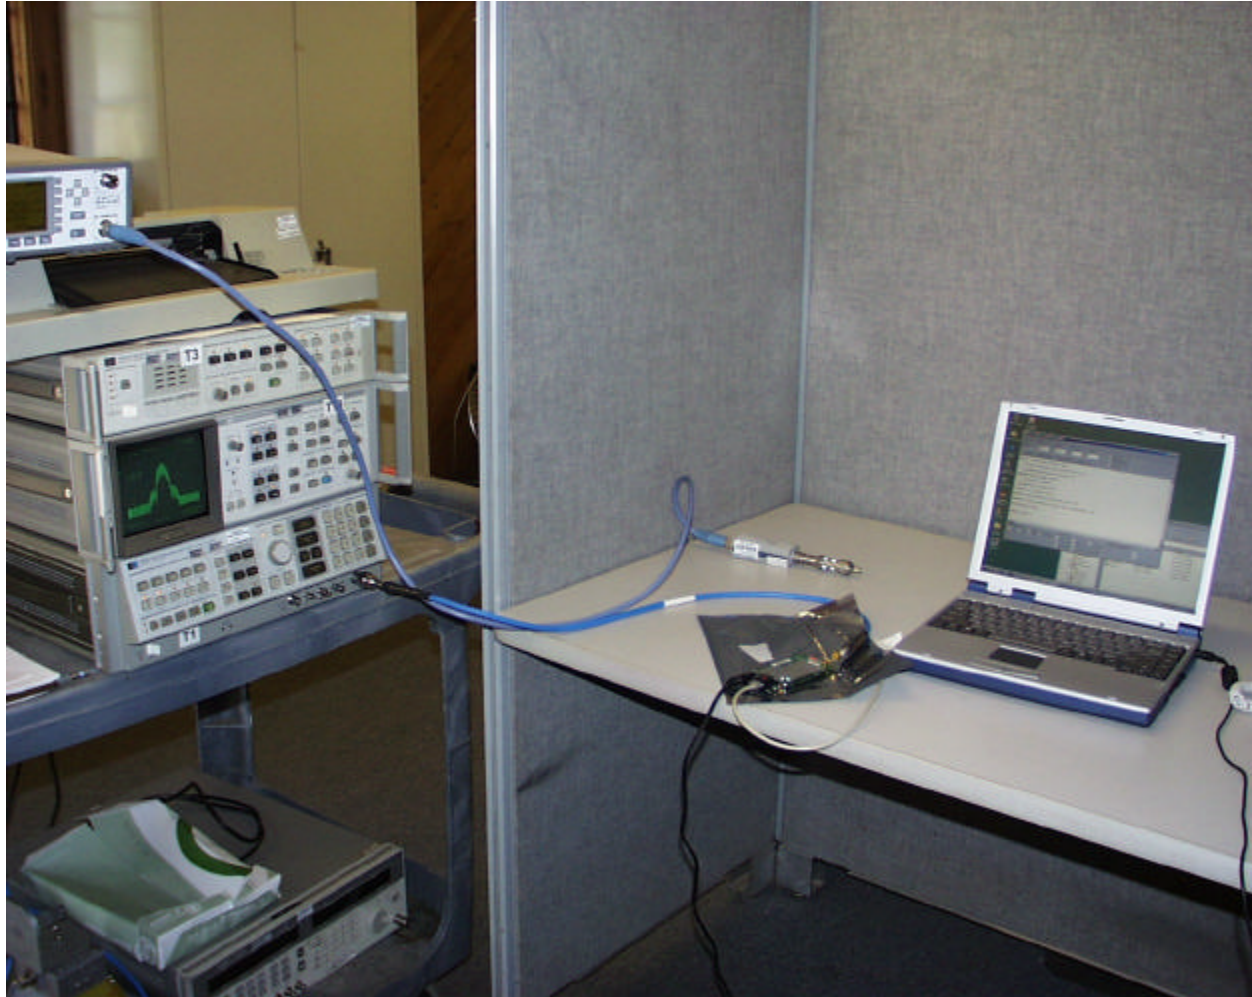

END OF REPORT