

FCC Part 15C

Measurement and Test Report

For

Orbit Irrigation Product Inc.

845N. Overland Rd., North Salt Lake Utah, United States, 84054

FCC ID: ML6-25010-11N

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>B-Hyve AG Router</u>
Tested Model:	<u>25010-11N</u>
Report No.:	<u>SEM18088141</u>
Sample Receipt Date:	<u>2018-08-06</u>
Tested Date:	<u>2018-08-06 to 2018-08-16</u>
Issued Date:	<u>2018-08-17</u>
Tested By:	<u>Jason Su / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	<p style="text-align: center;">Shenzhen SEM Test Technology Co., Ltd. 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn</p>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. RF EXPOSURE	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE.....	10
4.2 EVALUATION INFORMATION	10
5. POWER SPECTRAL DENSITY	11
5.1 STANDARD APPLICABLE.....	11
5.2 TEST PROCEDURE.....	11
5.4 SUMMARY OF TEST RESULTS/PLOTS	11
6. 6DB BANDWIDTH	16
6.1 STANDARD APPLICABLE.....	16
6.2 TEST PROCEDURE.....	16
6.3 ENVIRONMENTAL CONDITIONS	16
6.4 SUMMARY OF TEST RESULTS/PLOTS	16
7. RF OUTPUT POWER	21
7.1 STANDARD APPLICABLE.....	21
7.2 TEST PROCEDURE.....	21
7.3 SUMMARY OF TEST RESULTS/PLOTS	21
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	27
8.1 STANDARD APPLICABLE.....	27
8.2 TEST PROCEDURE.....	27
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	28
8.5 SUMMARY OF TEST RESULTS/PLOTS	28
9. OUT OF BAND EMISSIONS.....	36
9.1 STANDARD APPLICABLE.....	36
9.2 TEST PROCEDURE.....	36
9.3 SUMMARY OF TEST RESULTS/PLOTS	37
10. CONDUCTED EMISSIONS	57
10.1 TEST PROCEDURE.....	57
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	57
10.3 TEST RECEIVER SETUP	57
10.4 SUMMARY OF TEST RESULTS/PLOTS	57

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Orbit Irrigation Product Inc.
Address of applicant: 845N. Overland Rd., North Salt Lake Utah,
United States, 84054

Manufacturer: Shenzhen Guanglianzhitong Tech Co., Ltd.
Address of manufacturer: Room 305 - 306, Skyworth Digital Building,
Shiyan Street, Baoan District, Shenzhen, China

General Description of EUT	
Product Name:	B-Hyve AG Router
Trade Name:	Orbit
Model No.:	25010-11N
Adding Model(s):	/
Rated Voltage:	DC 5V from USB
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n-HT20 2422-2452MHz for 802.11n-HT40
RF Output Power:	17.39dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n-HT20 7 for 802.11n-HT40
Channel Separation:	5MHz
Type of Antenna:	External
Antenna Gain:	9.0dBi
Lowest Internal Frequency of EUT:	25MHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 DTS Meas Guidance v04: GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highestpossible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25°C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	0.8	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	KEYU	KA25-0501000US	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	± 0.42dB
Occupied Bandwidth	Conducted	± 1.5%
Power Spectral Density	Conducted	± 1.8dB
Conducted Spurious Emission	Conducted	± 2.17dB
Conducted Emissions	Conducted	9-150kHz ± 3.74dB
		0.15-30MHz ± 3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ± 4.52dB
		0.2-1GHz ± 5.56dB
		1-6GHz ± 3.84dB
		6-18GHz ± 3.92dB

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-05-22	2019-05-21
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-05-22	2019-05-21
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RFExposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a removable external antenna that has a RP/SMA (reverse polarity SMA) connector, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure


According to the KDB 558074 D01 v04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).


5.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-6.198	8-1=7
	2437	-5.719	8-1=7
	2462	-4.061	8-1=7
802.11g	2412	-13.940	8-1=7
	2437	-14.380	8-1=7
	2462	-13.470	8-1=7
802.11n-HT20	2412	-10.780	8-1=7
	2437	-9.893	8-1=7
	2462	-10.060	8-1=7
802.11n-HT40	2422	-14.700	8-1=7
	2437	-14.520	8-1=7
	2452	-14.220	8-1=7

Please refer to the following test plots:

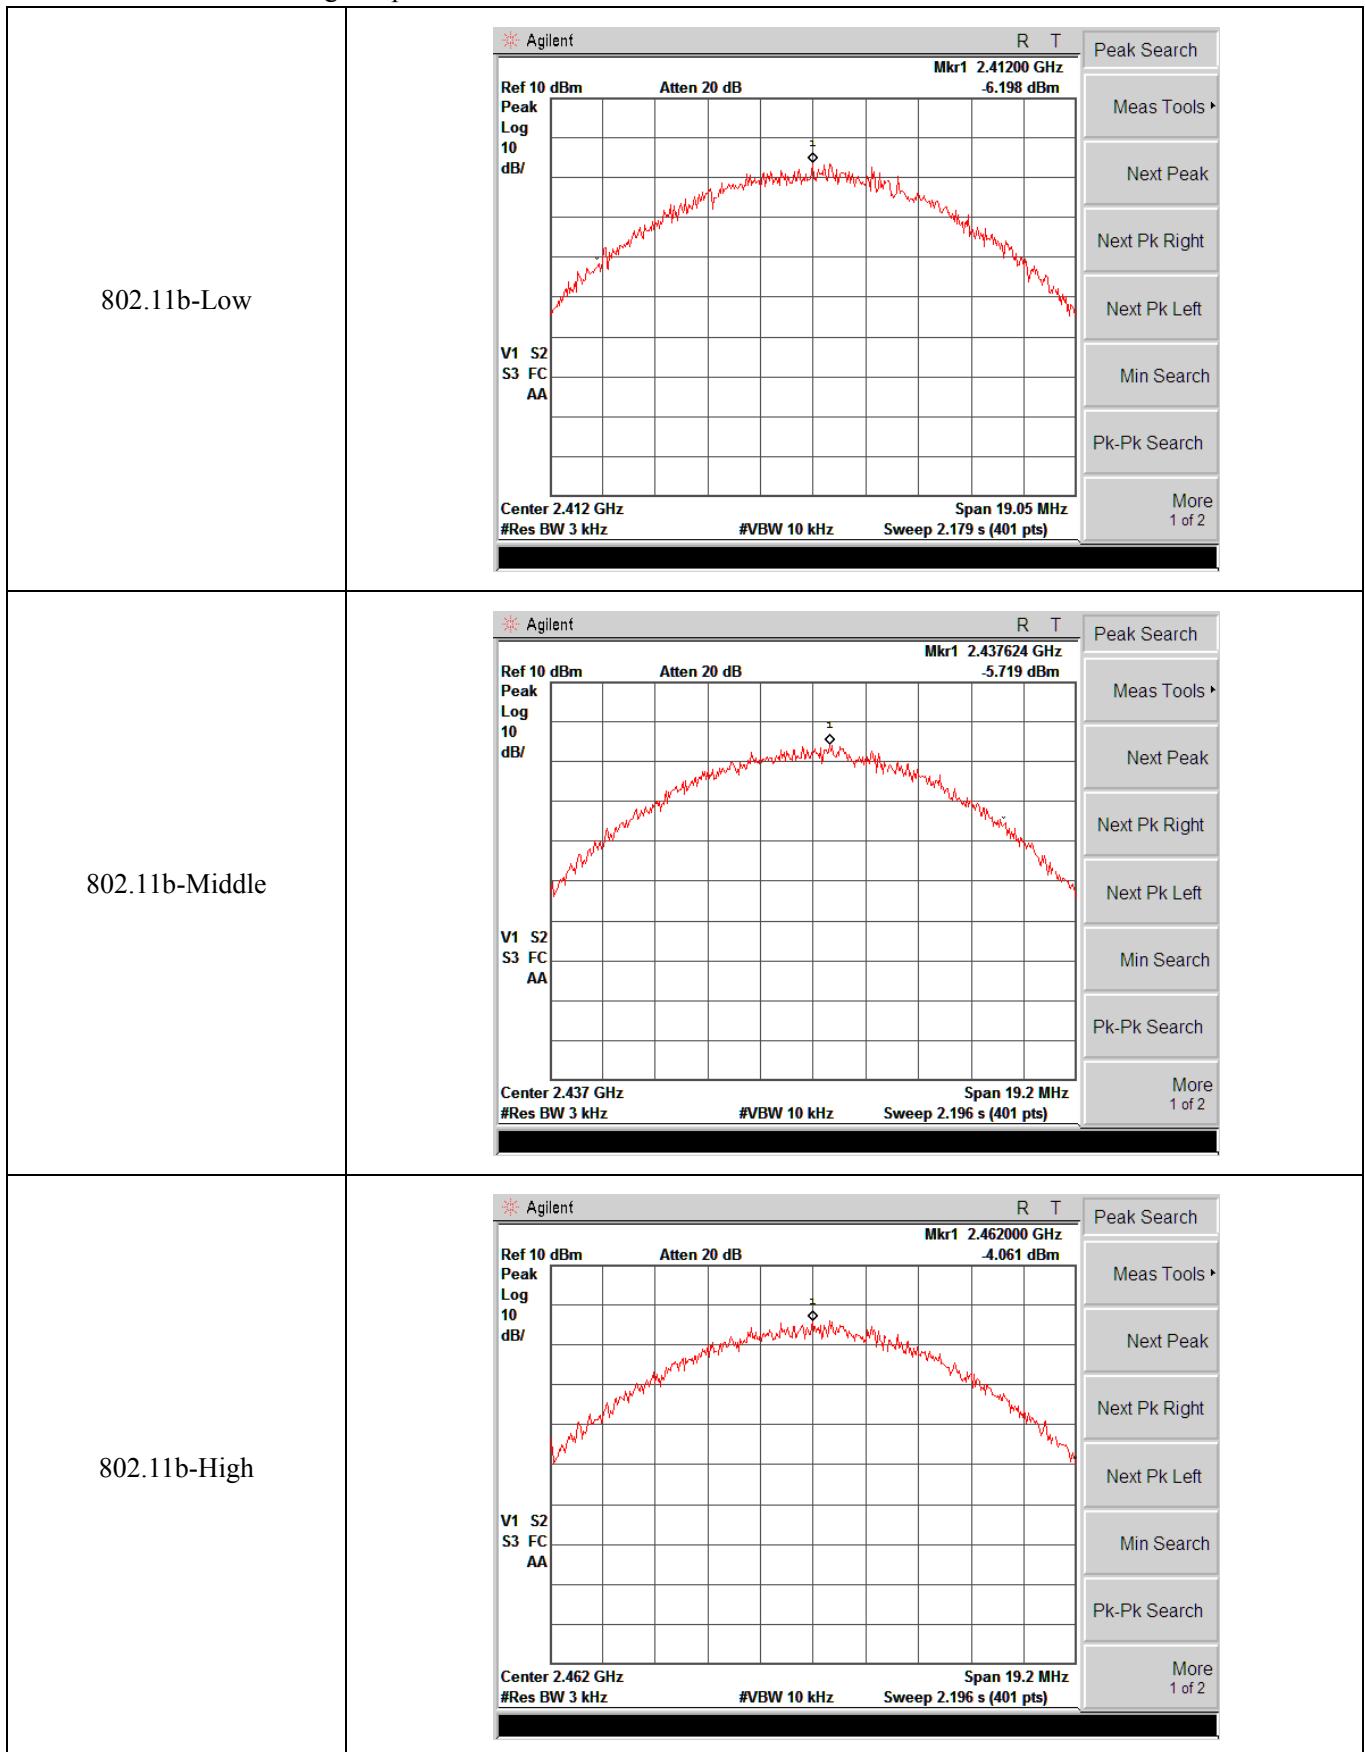

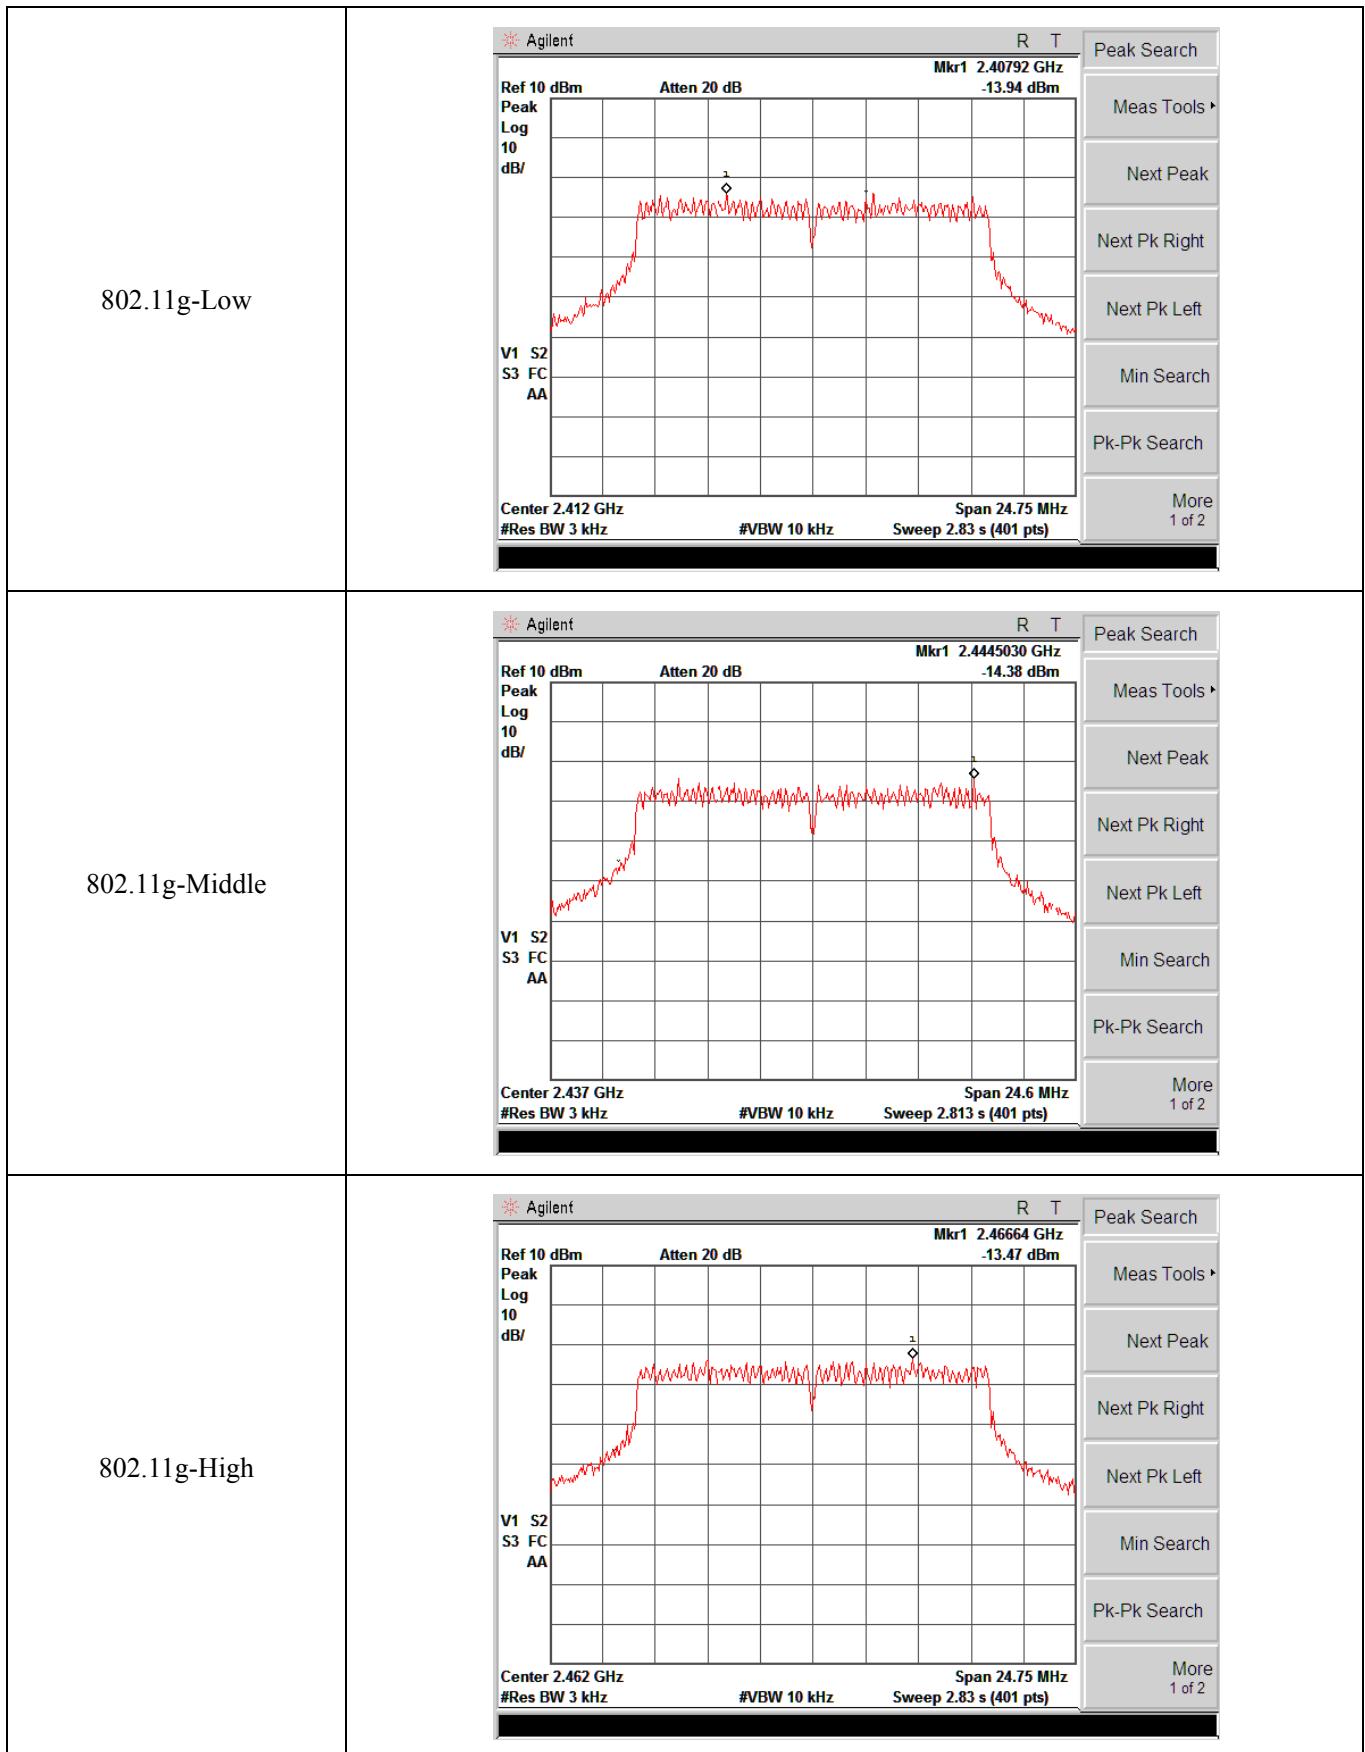

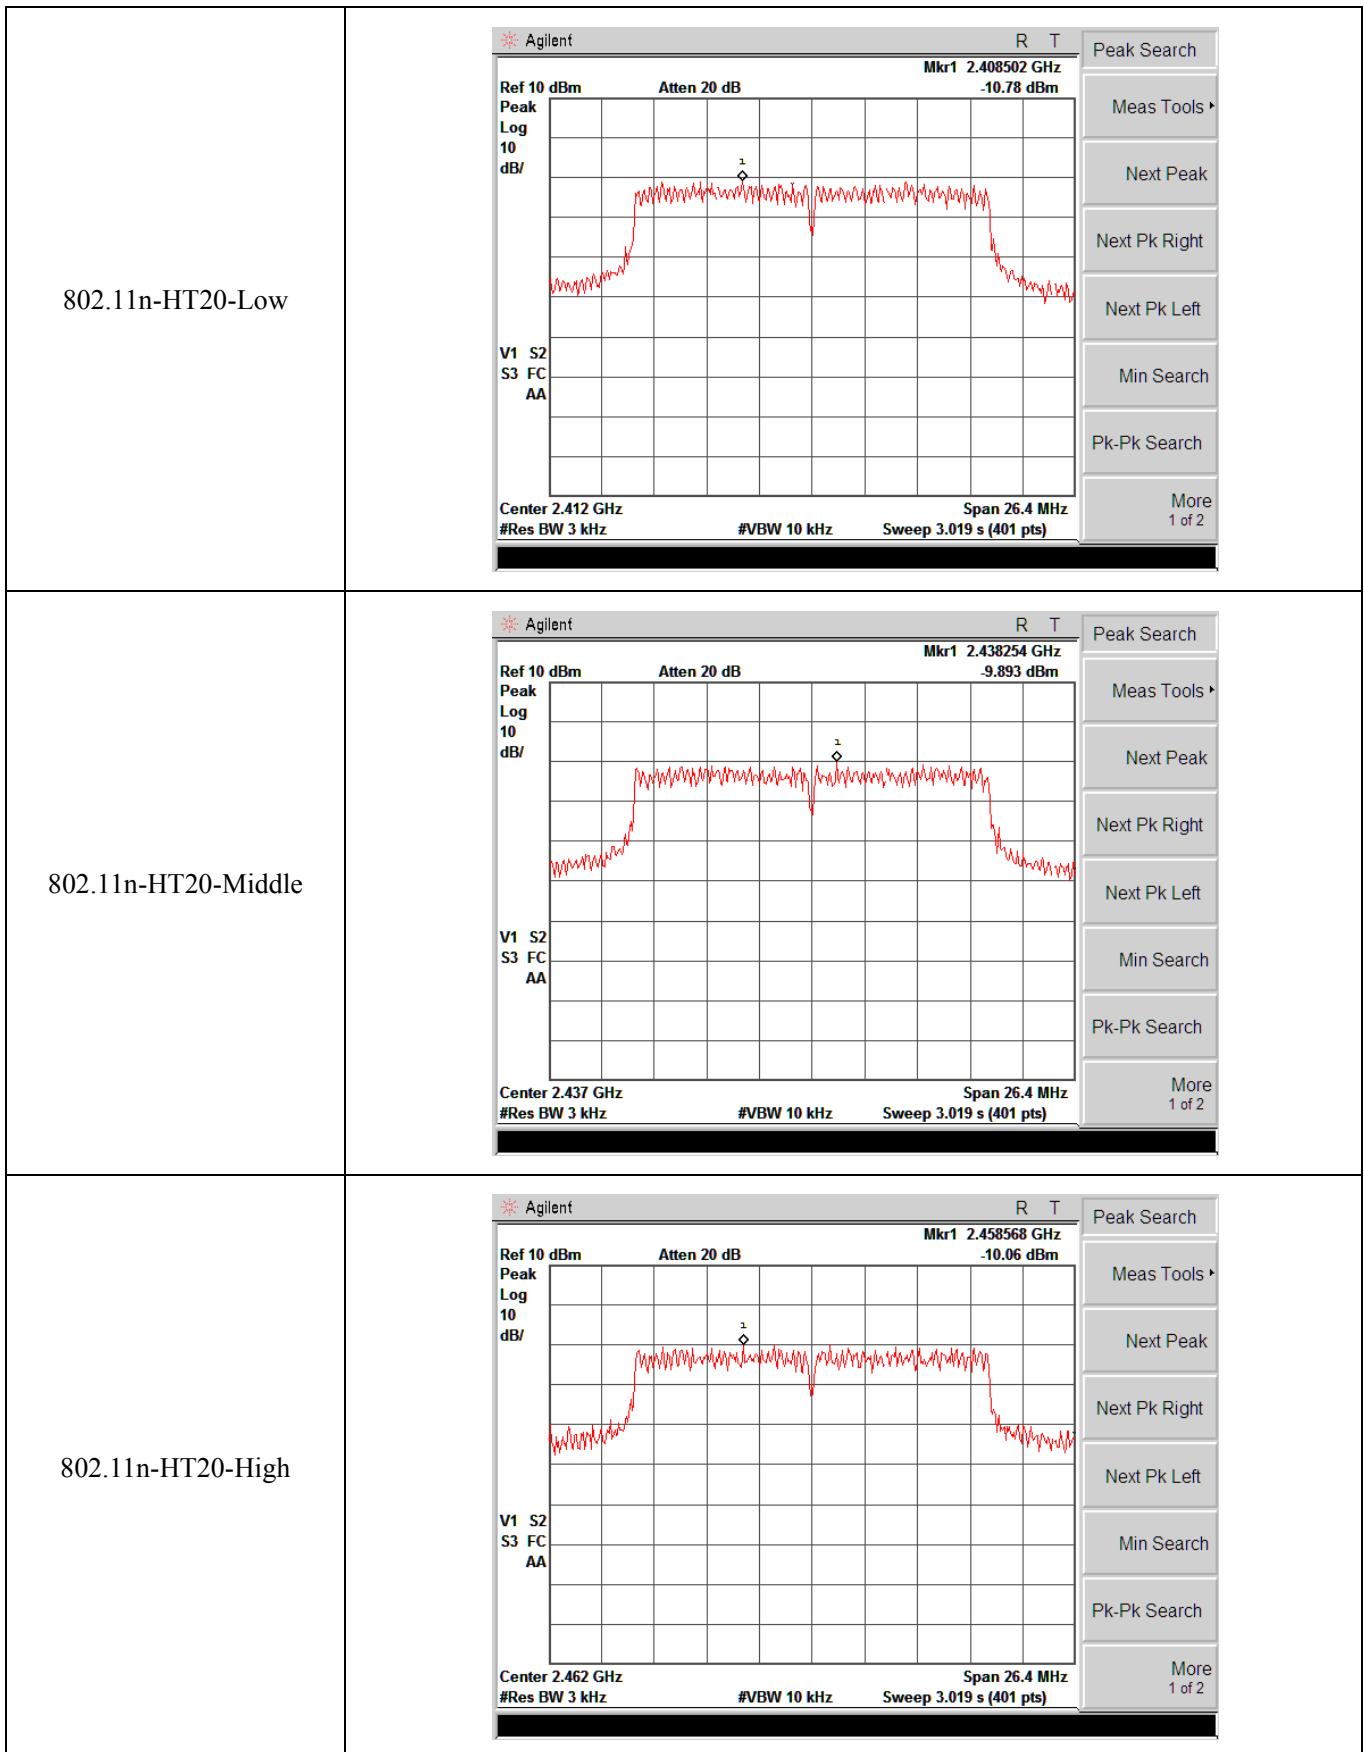

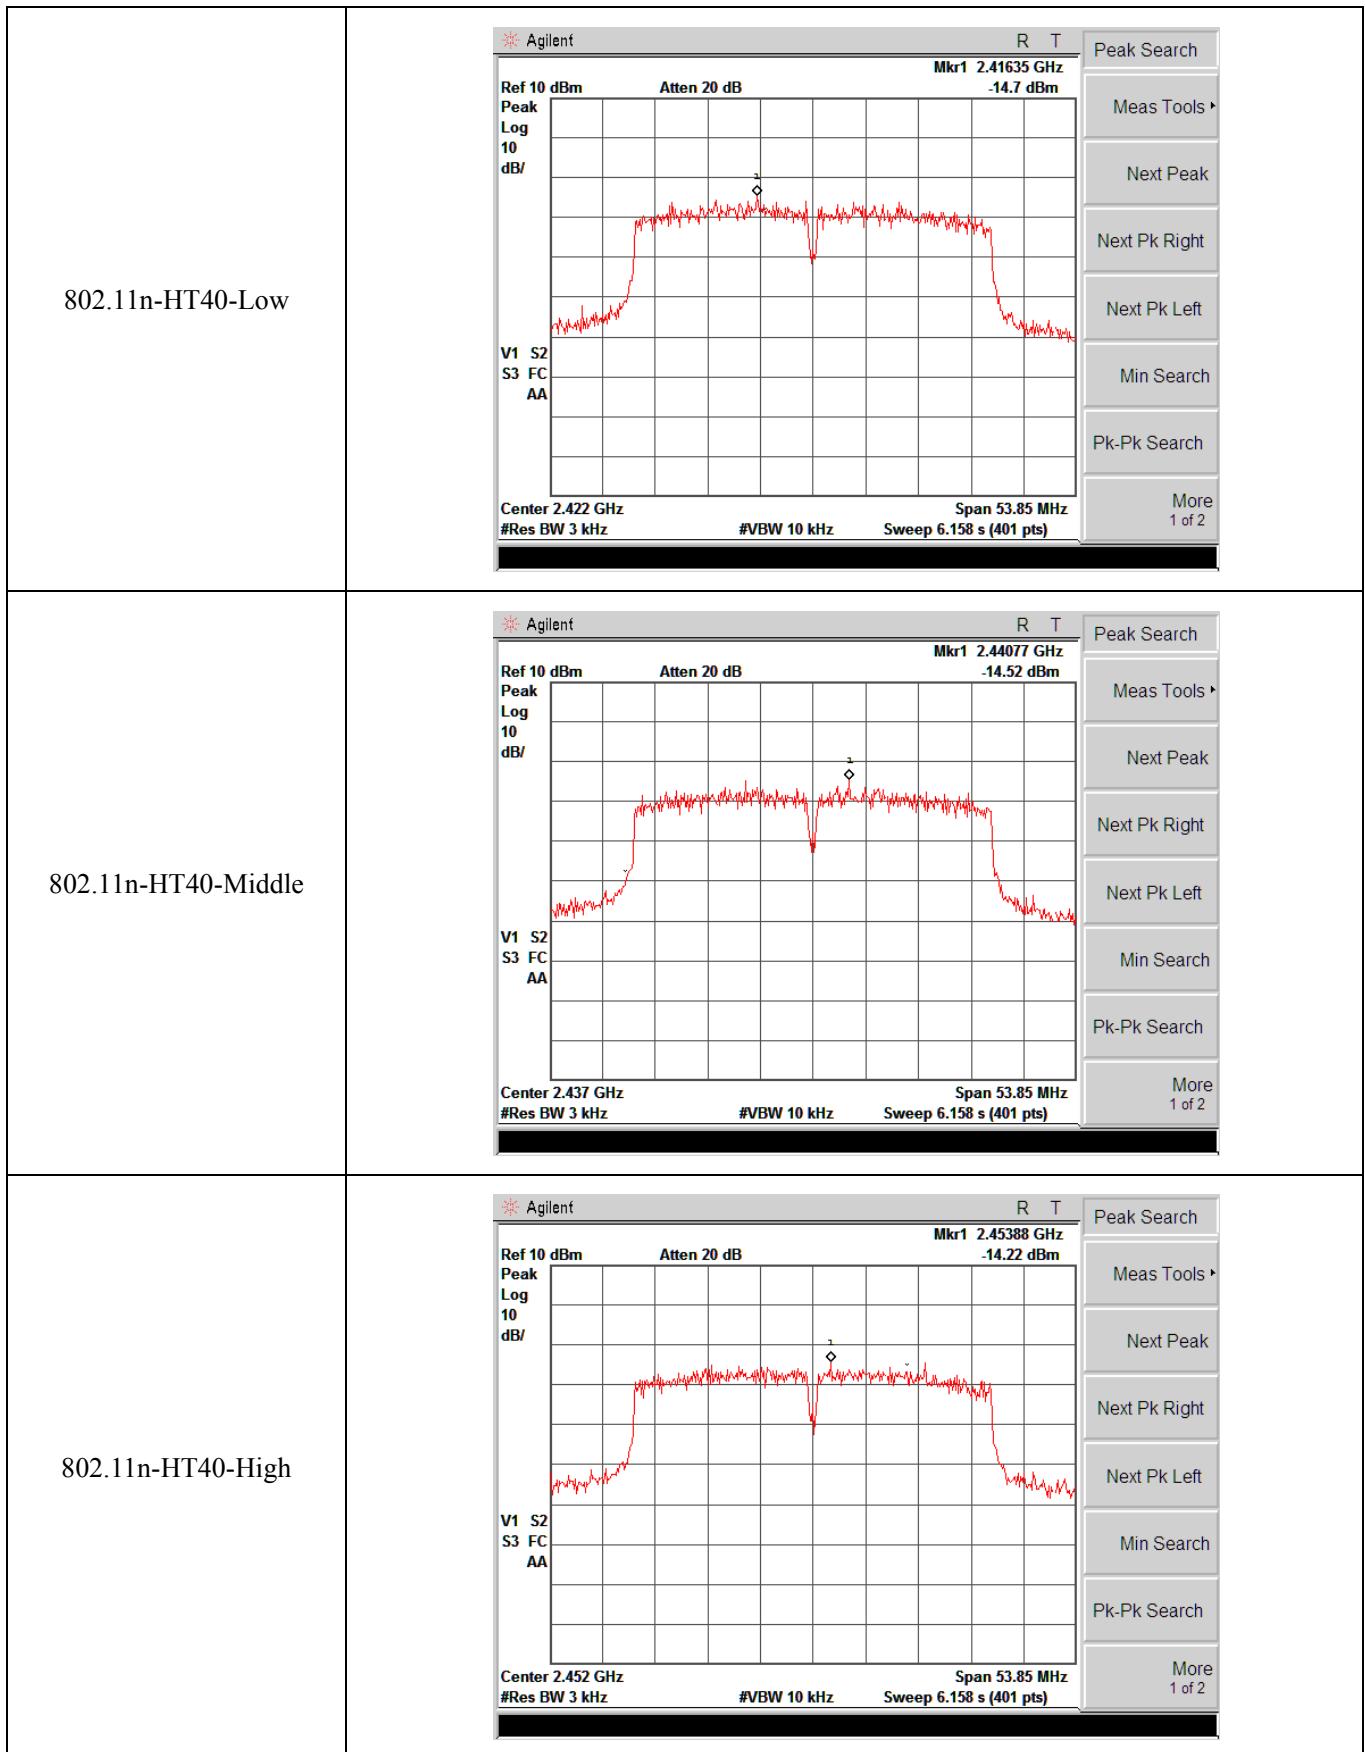

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


6.3 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar


6.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b	2412	7.590	≥ 500
	2437	7.404	≥ 500
	2462	7.806	≥ 500
802.11g	2412	16.465	≥ 500
	2437	16.486	≥ 500
	2462	16.492	≥ 500
802.11n-HT20	2412	17.729	≥ 500
	2437	16.860	≥ 500
	2462	17.627	≥ 500
802.11n-HT40	2422	32.805	≥ 500
	2437	32.738	≥ 500
	2452	35.451	≥ 500

Please refer to the following test plots:

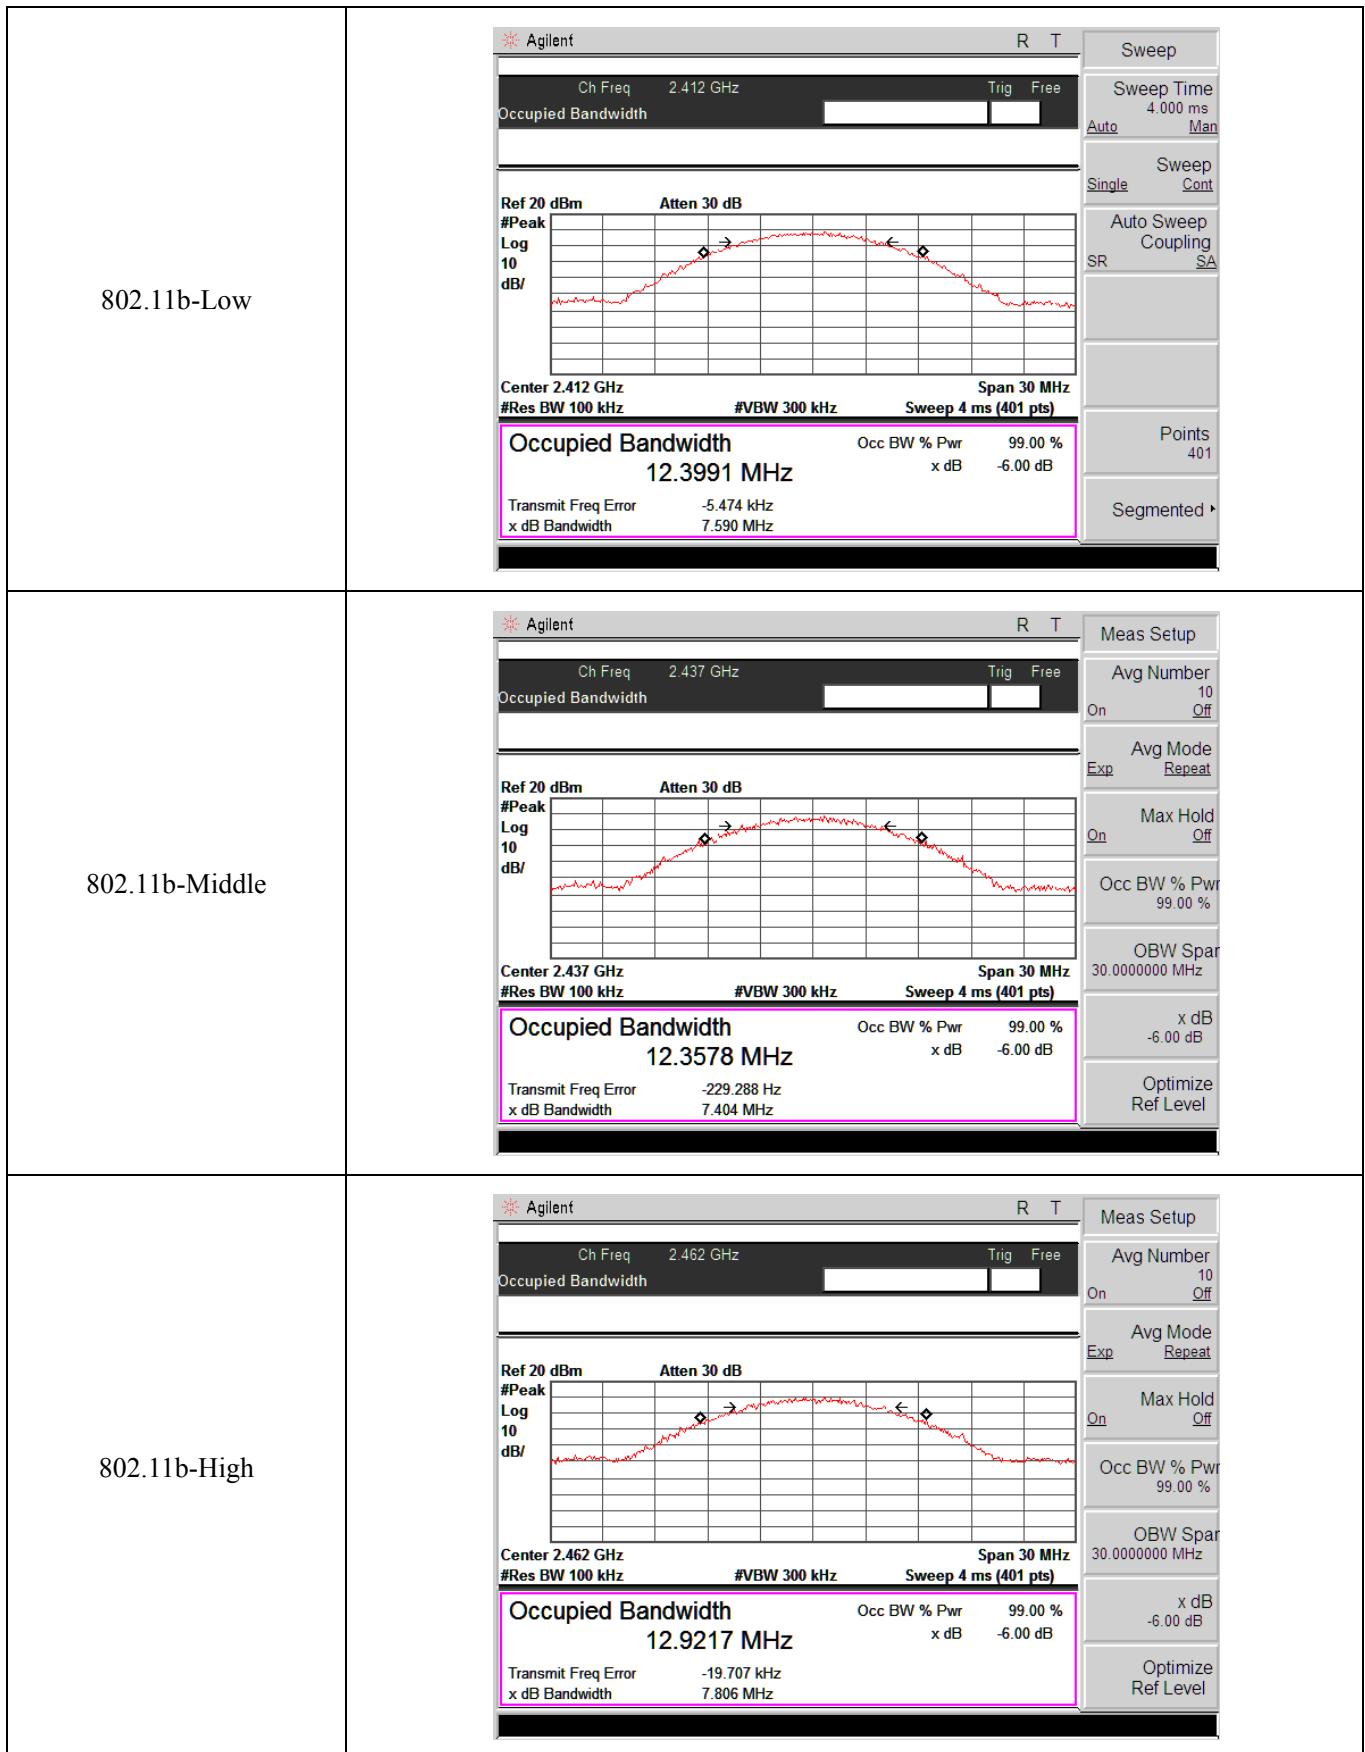

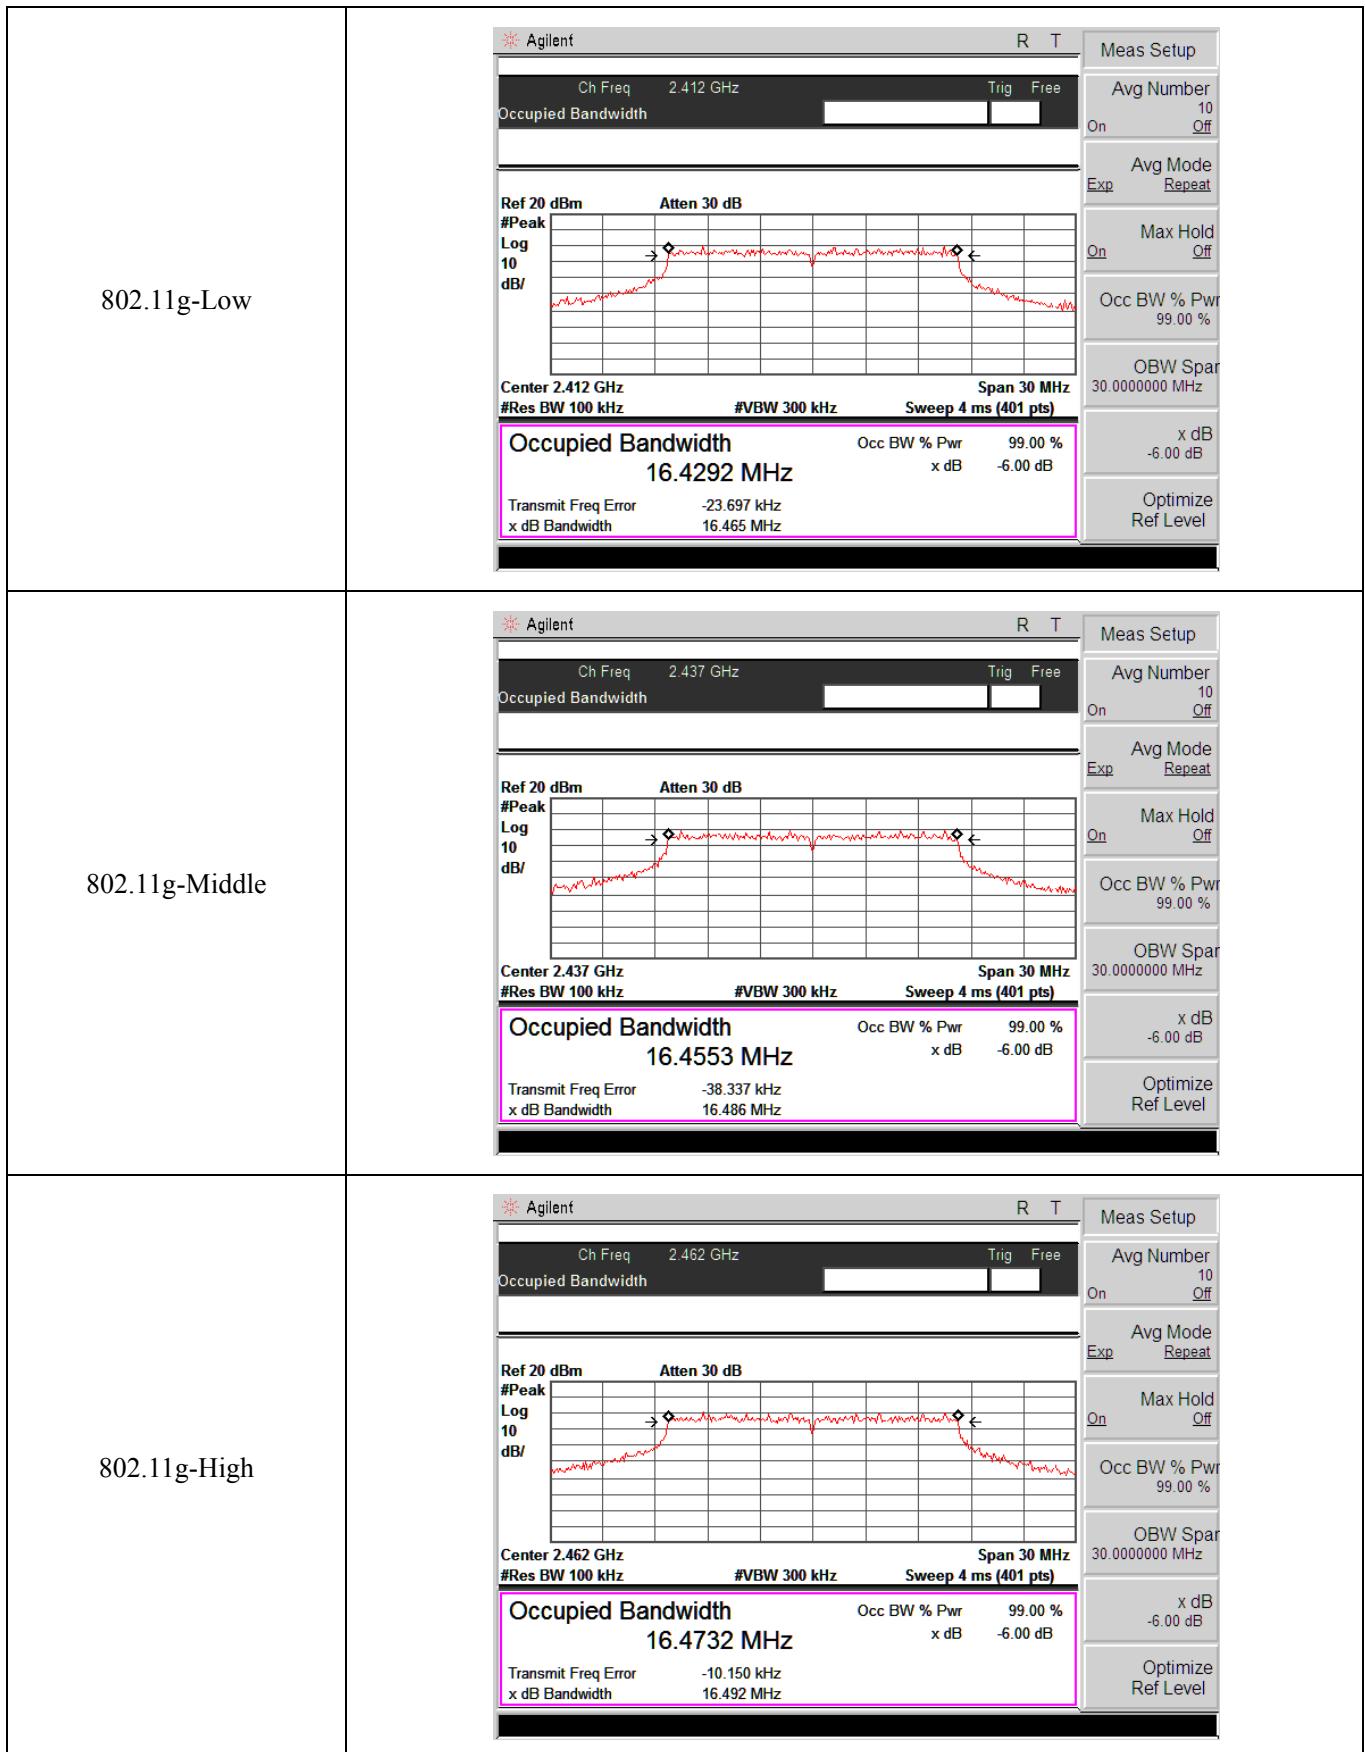

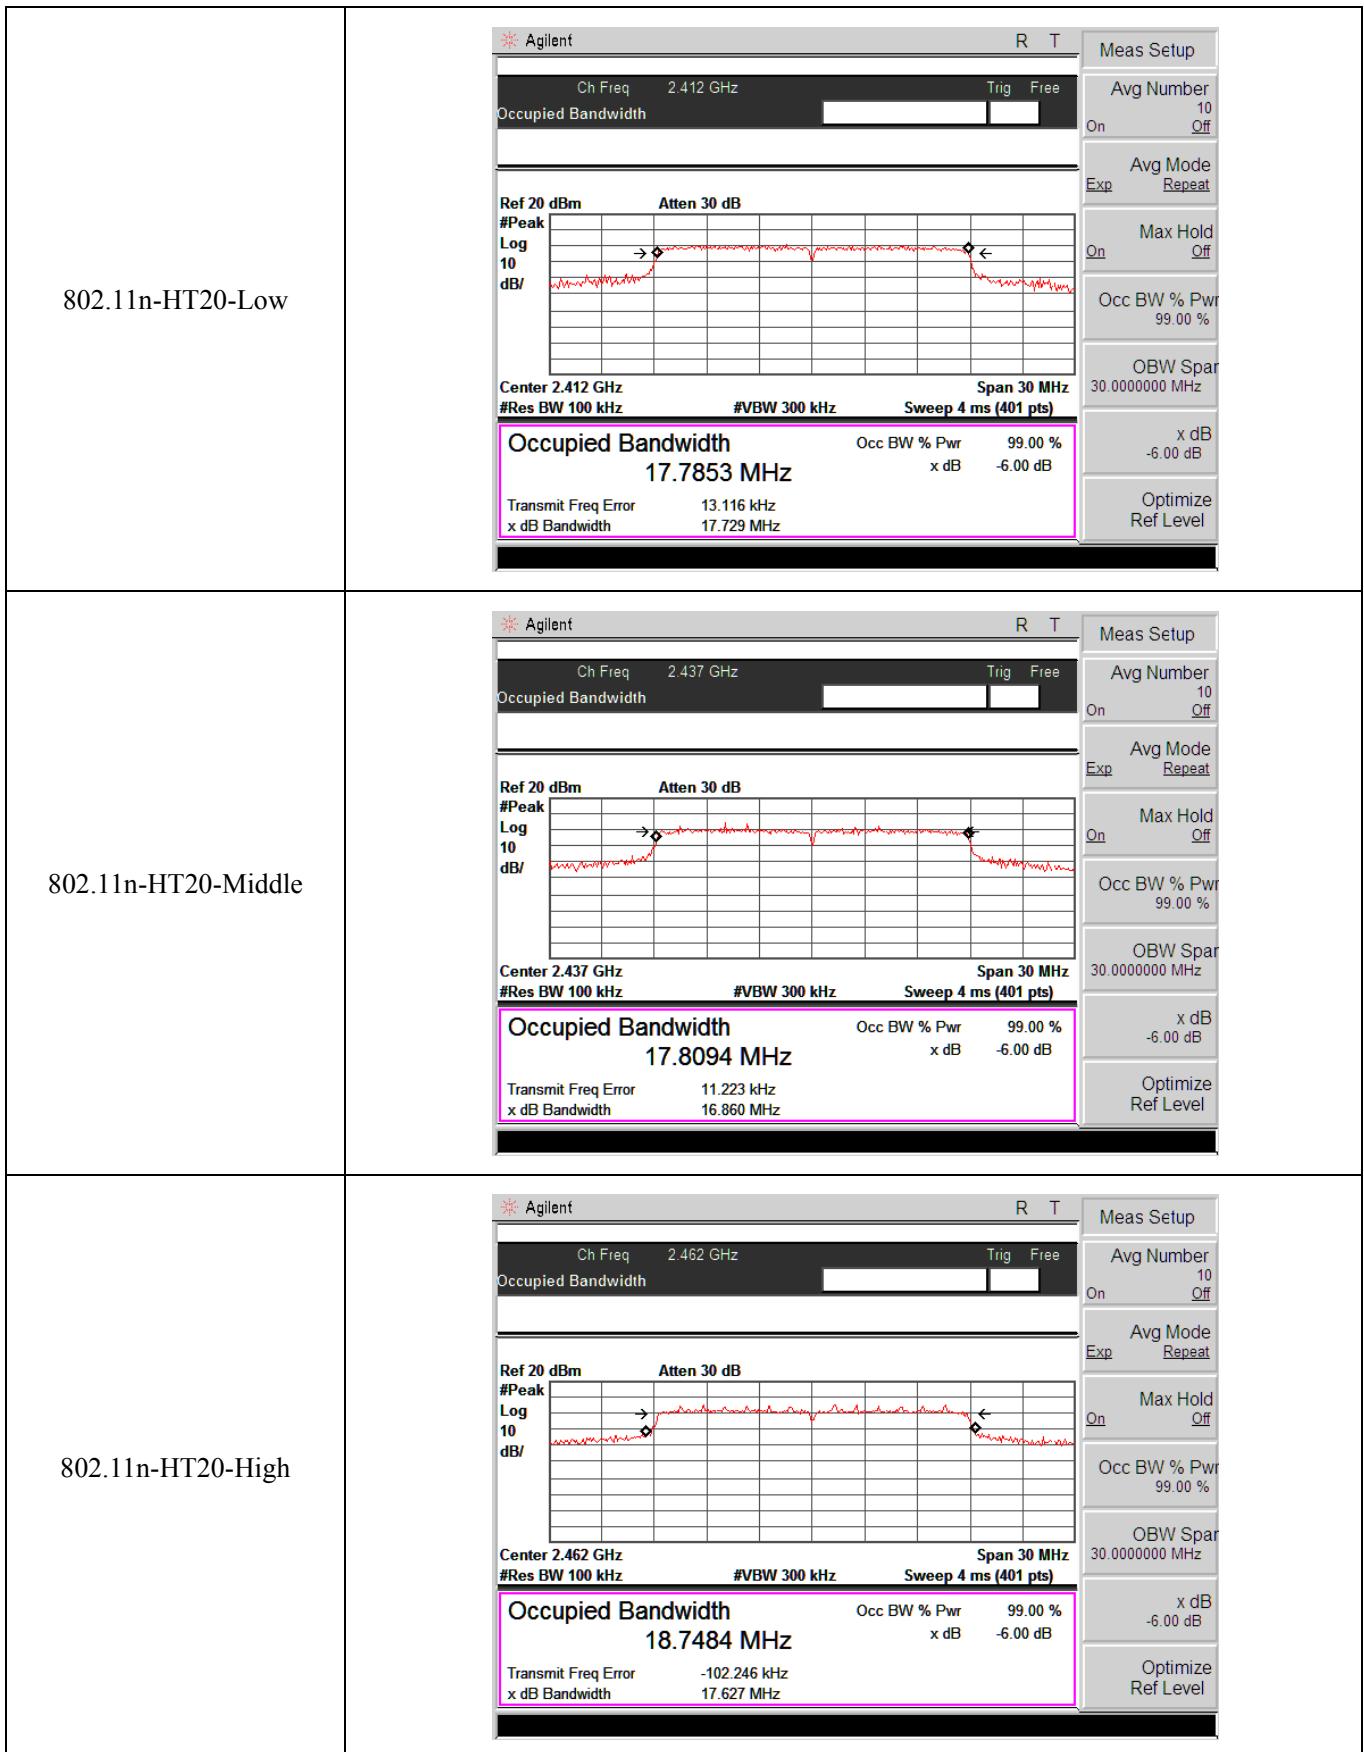

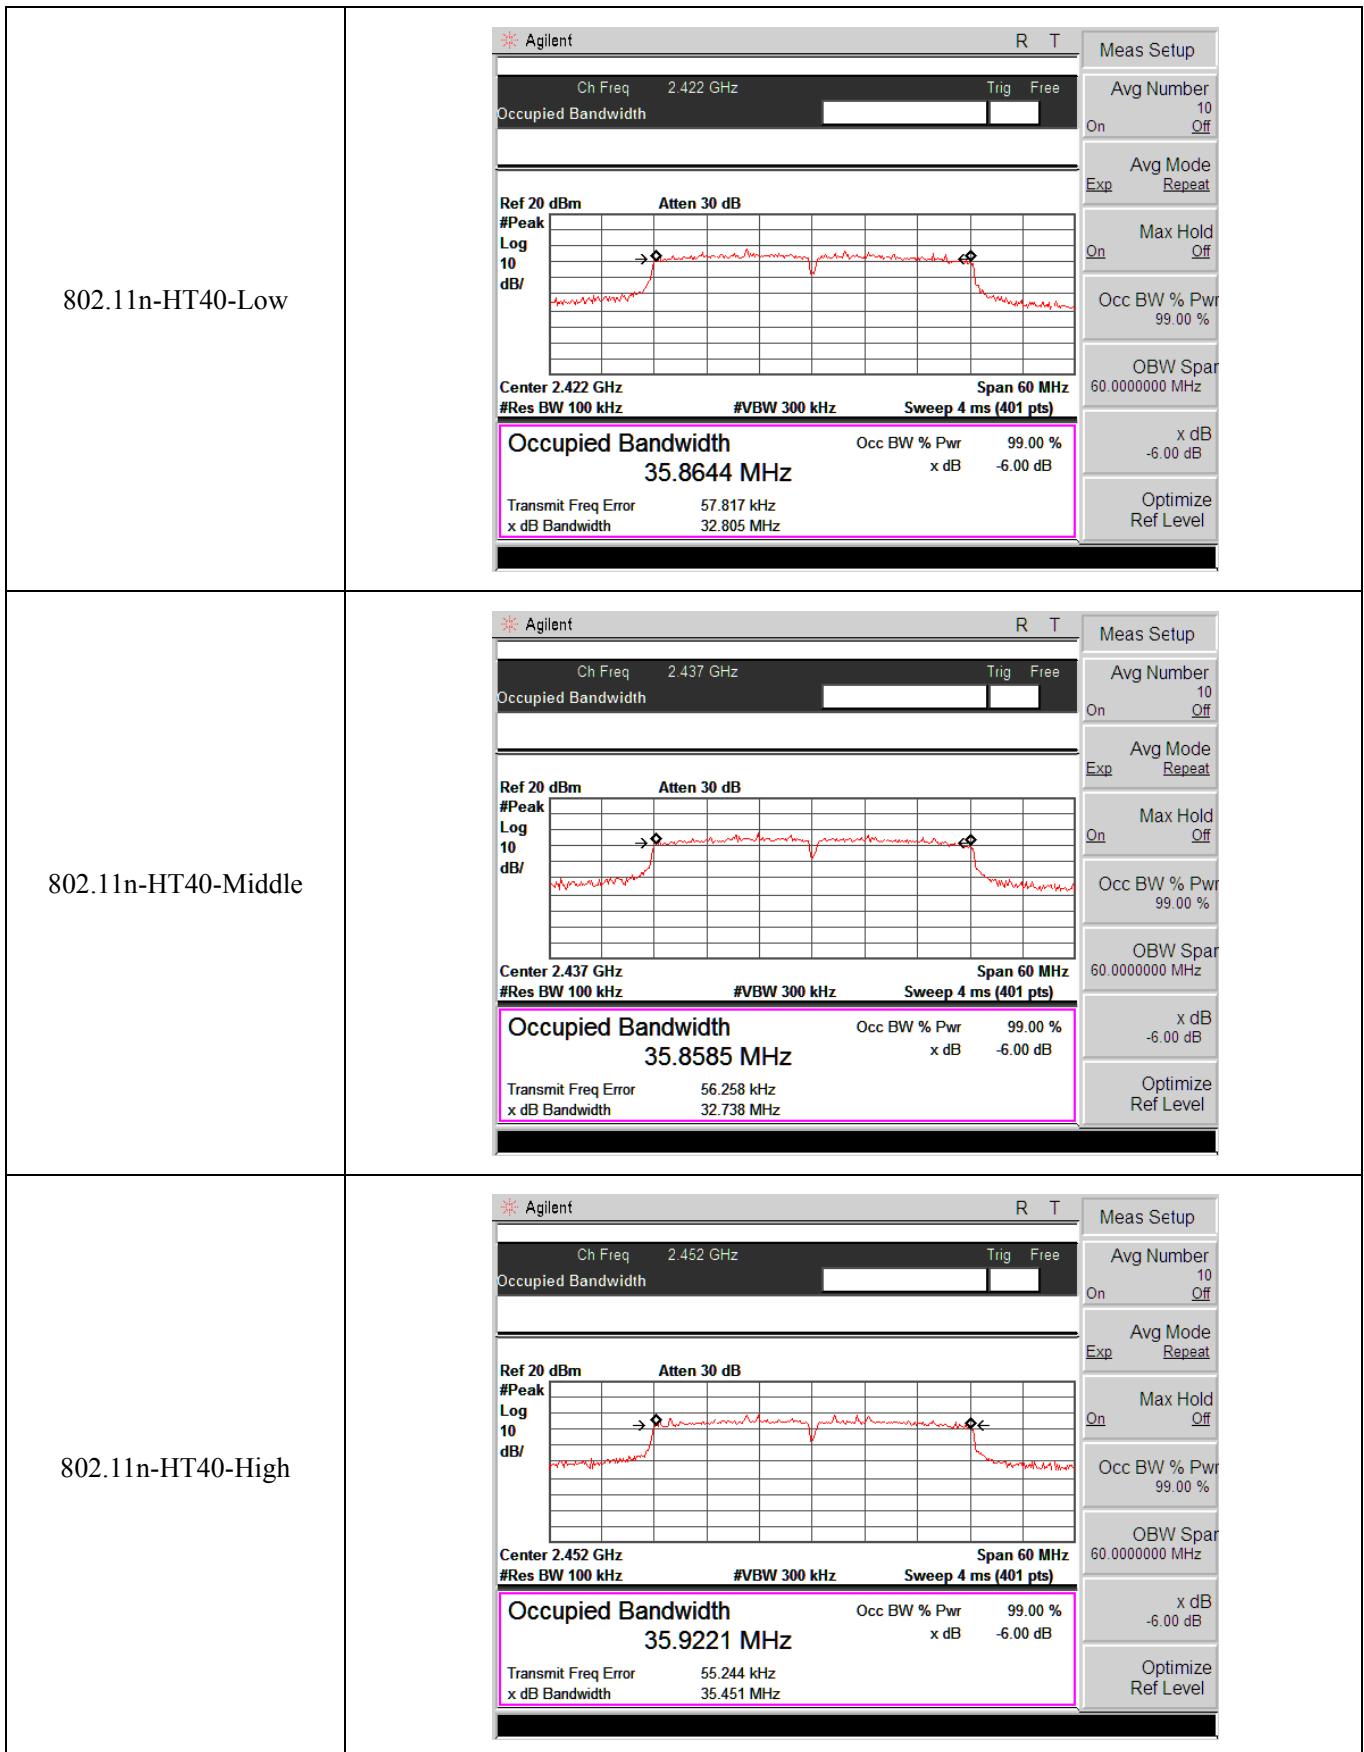

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure


According to the KDB-558074 D01 v04, 9.2.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth


- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98 \%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.


7.3 Summary of Test Results/Plots




Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	16.53	45.0	794.3
	2437	16.02	40.0	794.3
	2462	17.39	54.8	794.3
802.11g_54Mbps	2412	9.72	9.4	794.3
	2437	9.90	9.8	794.3
	2462	11.50	14.1	794.3
802.11n HT20_MCS7	2412	14.52	28.3	794.3
	2437	14.87	30.7	794.3
	2462	15.97	39.5	794.3
802.11n HT40_MCS7	2422	12.35	17.2	794.3
	2437	12.93	19.6	794.3
	2452	13.79	23.9	794.3

Please refer to the following test plots:

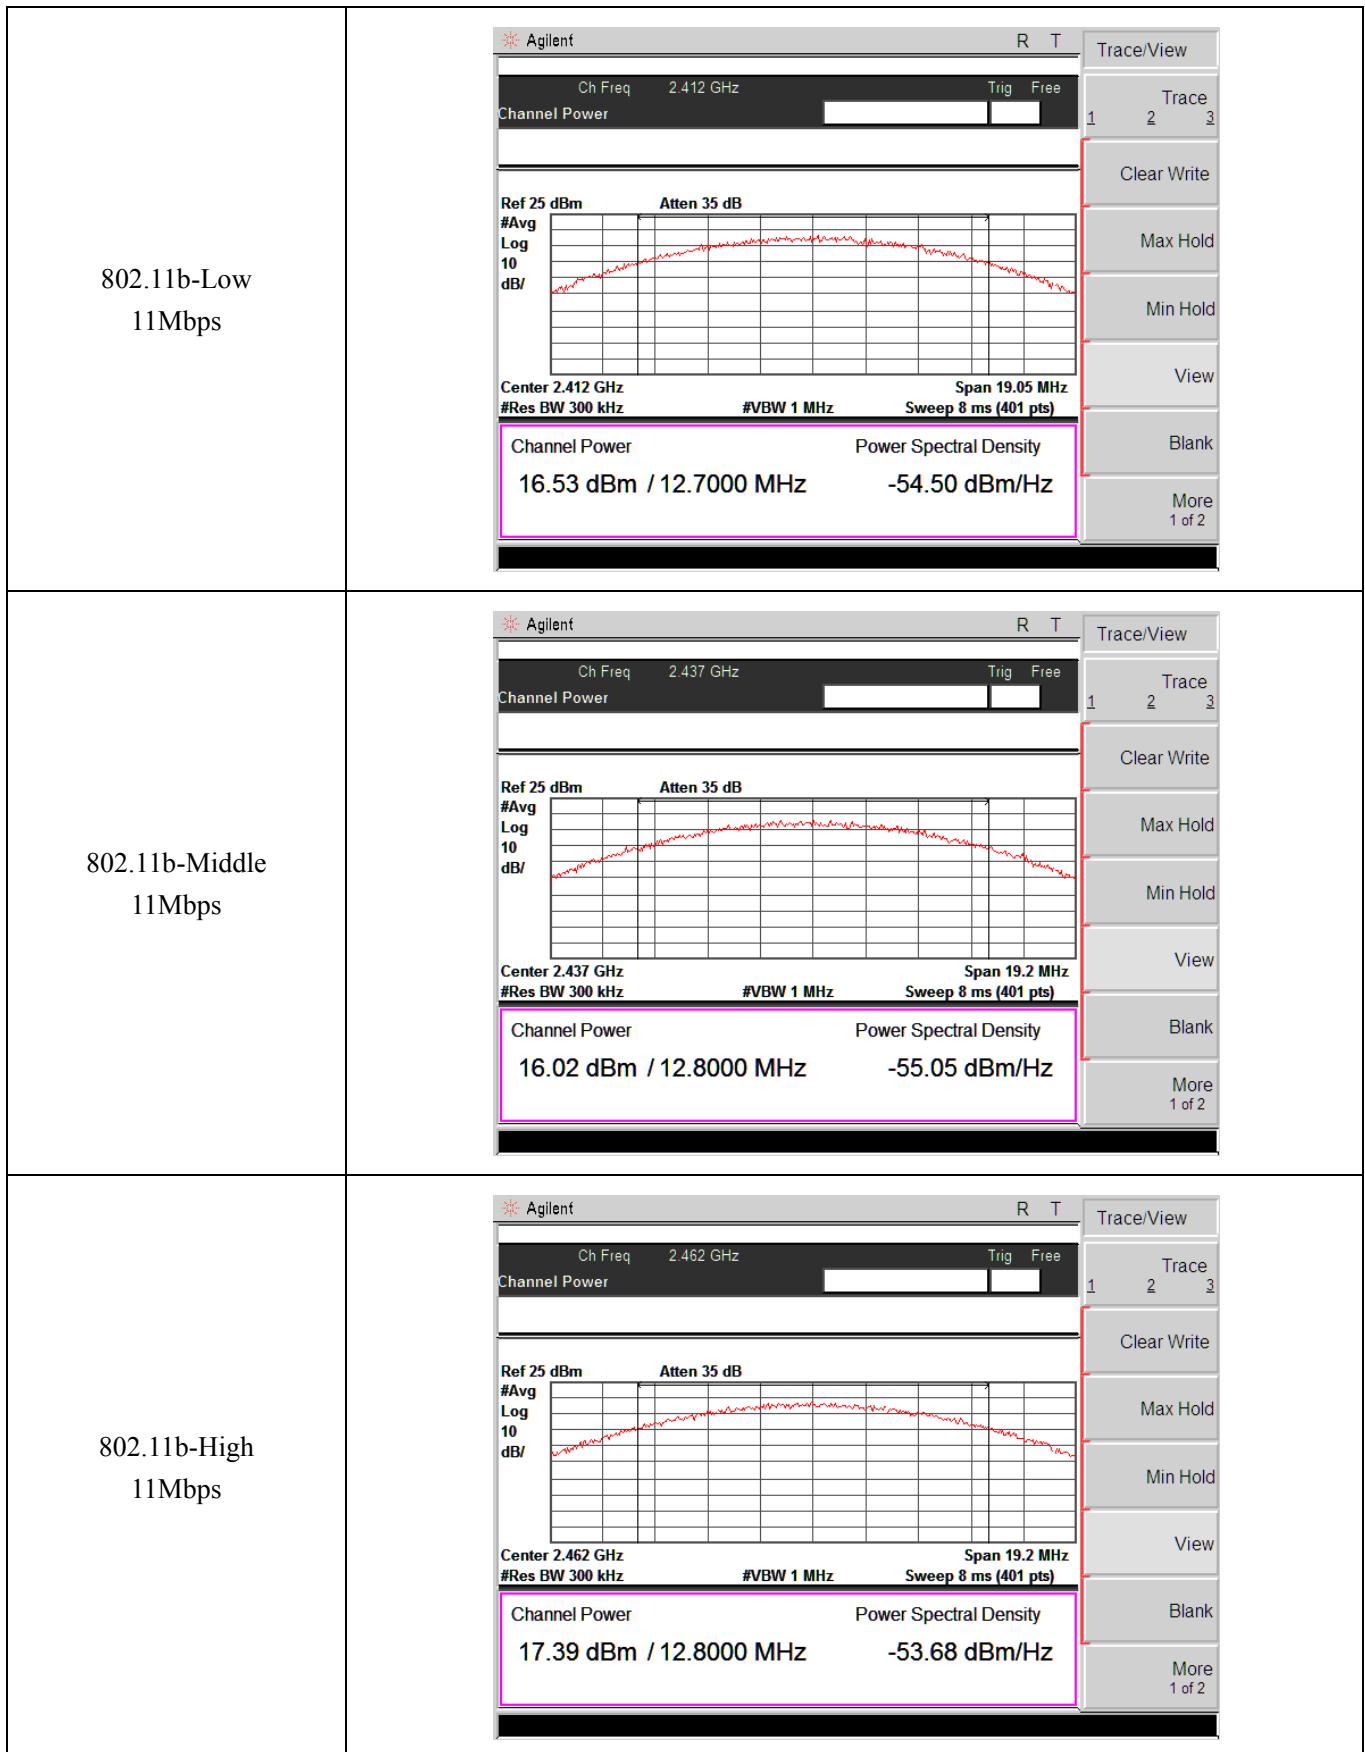

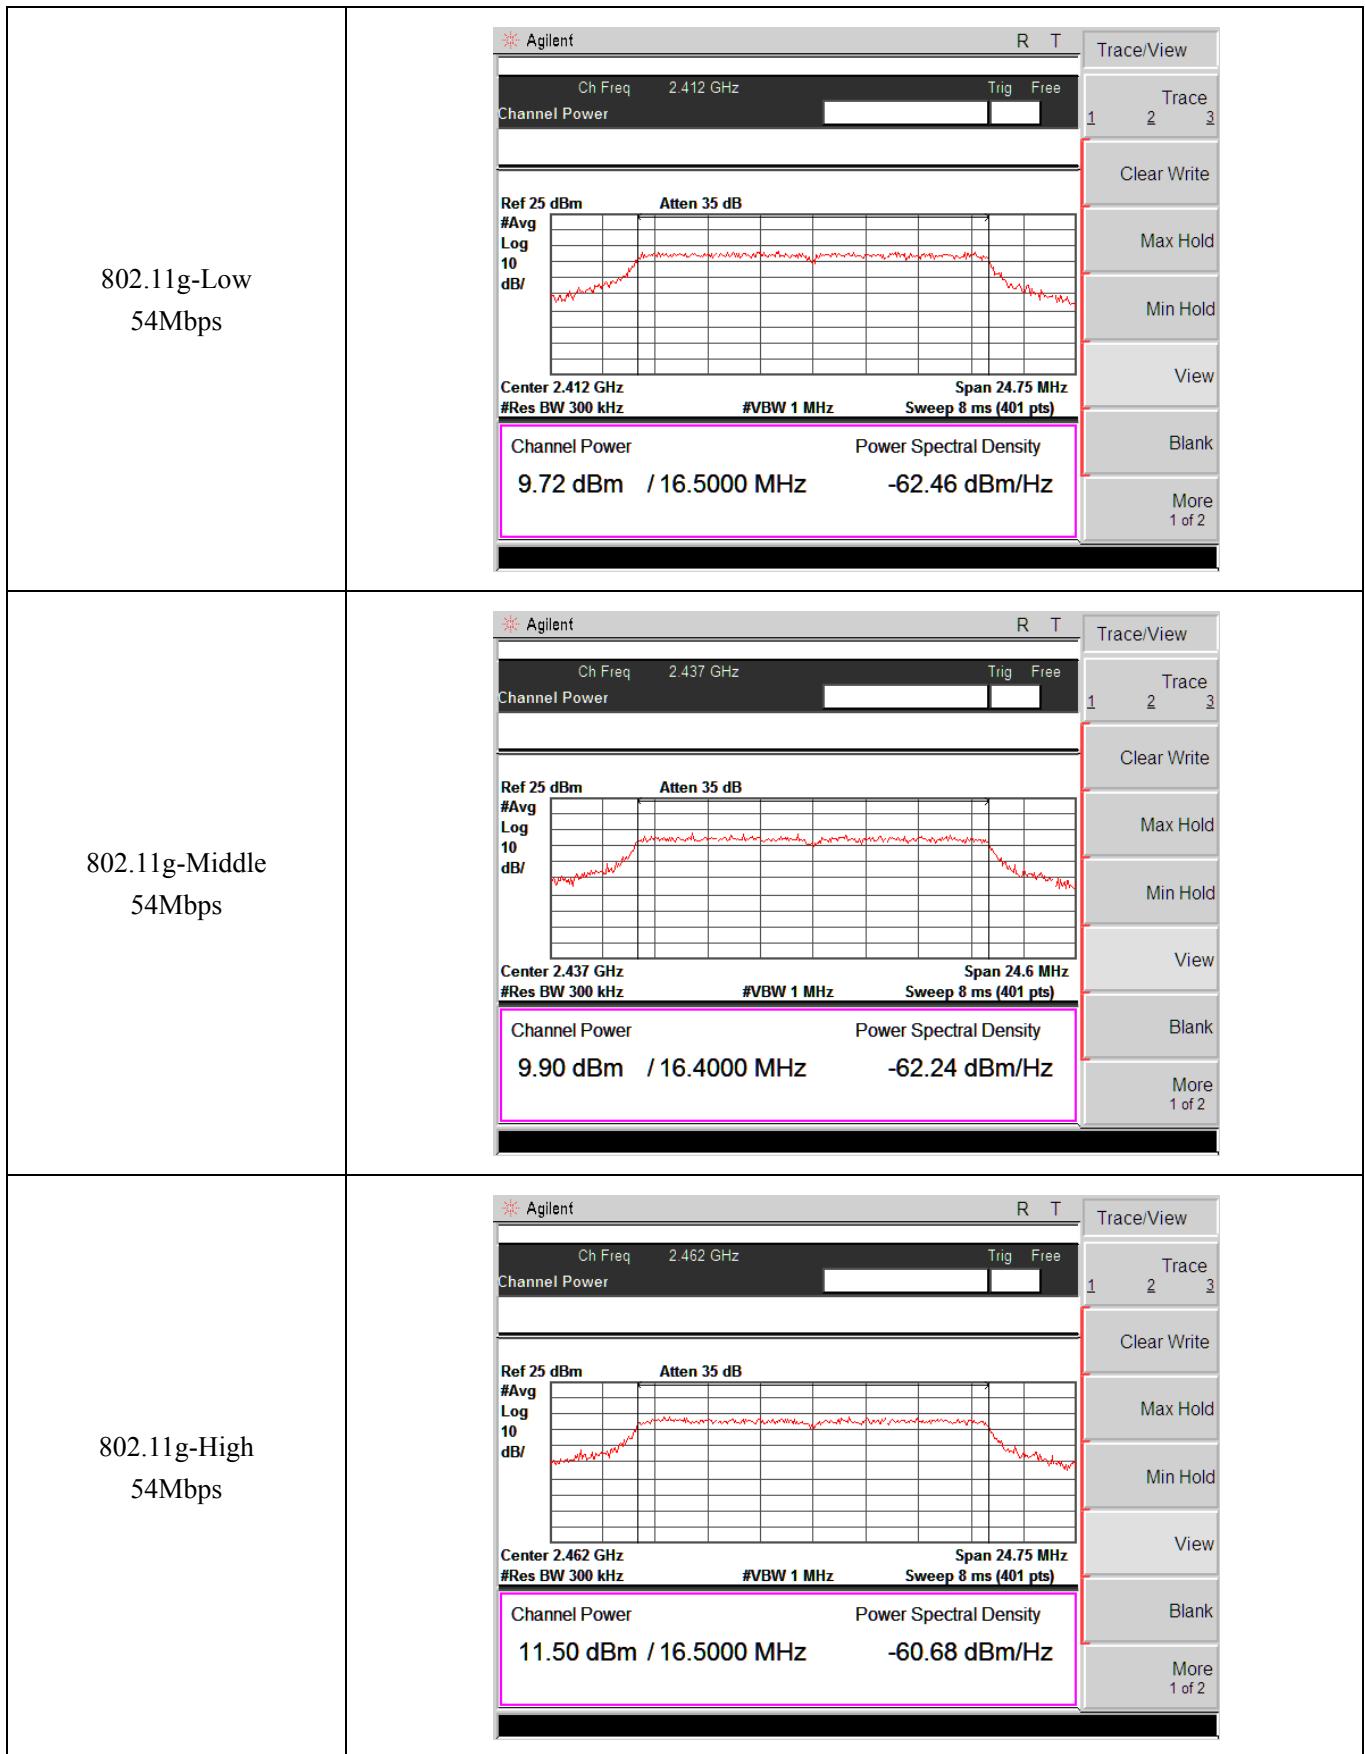

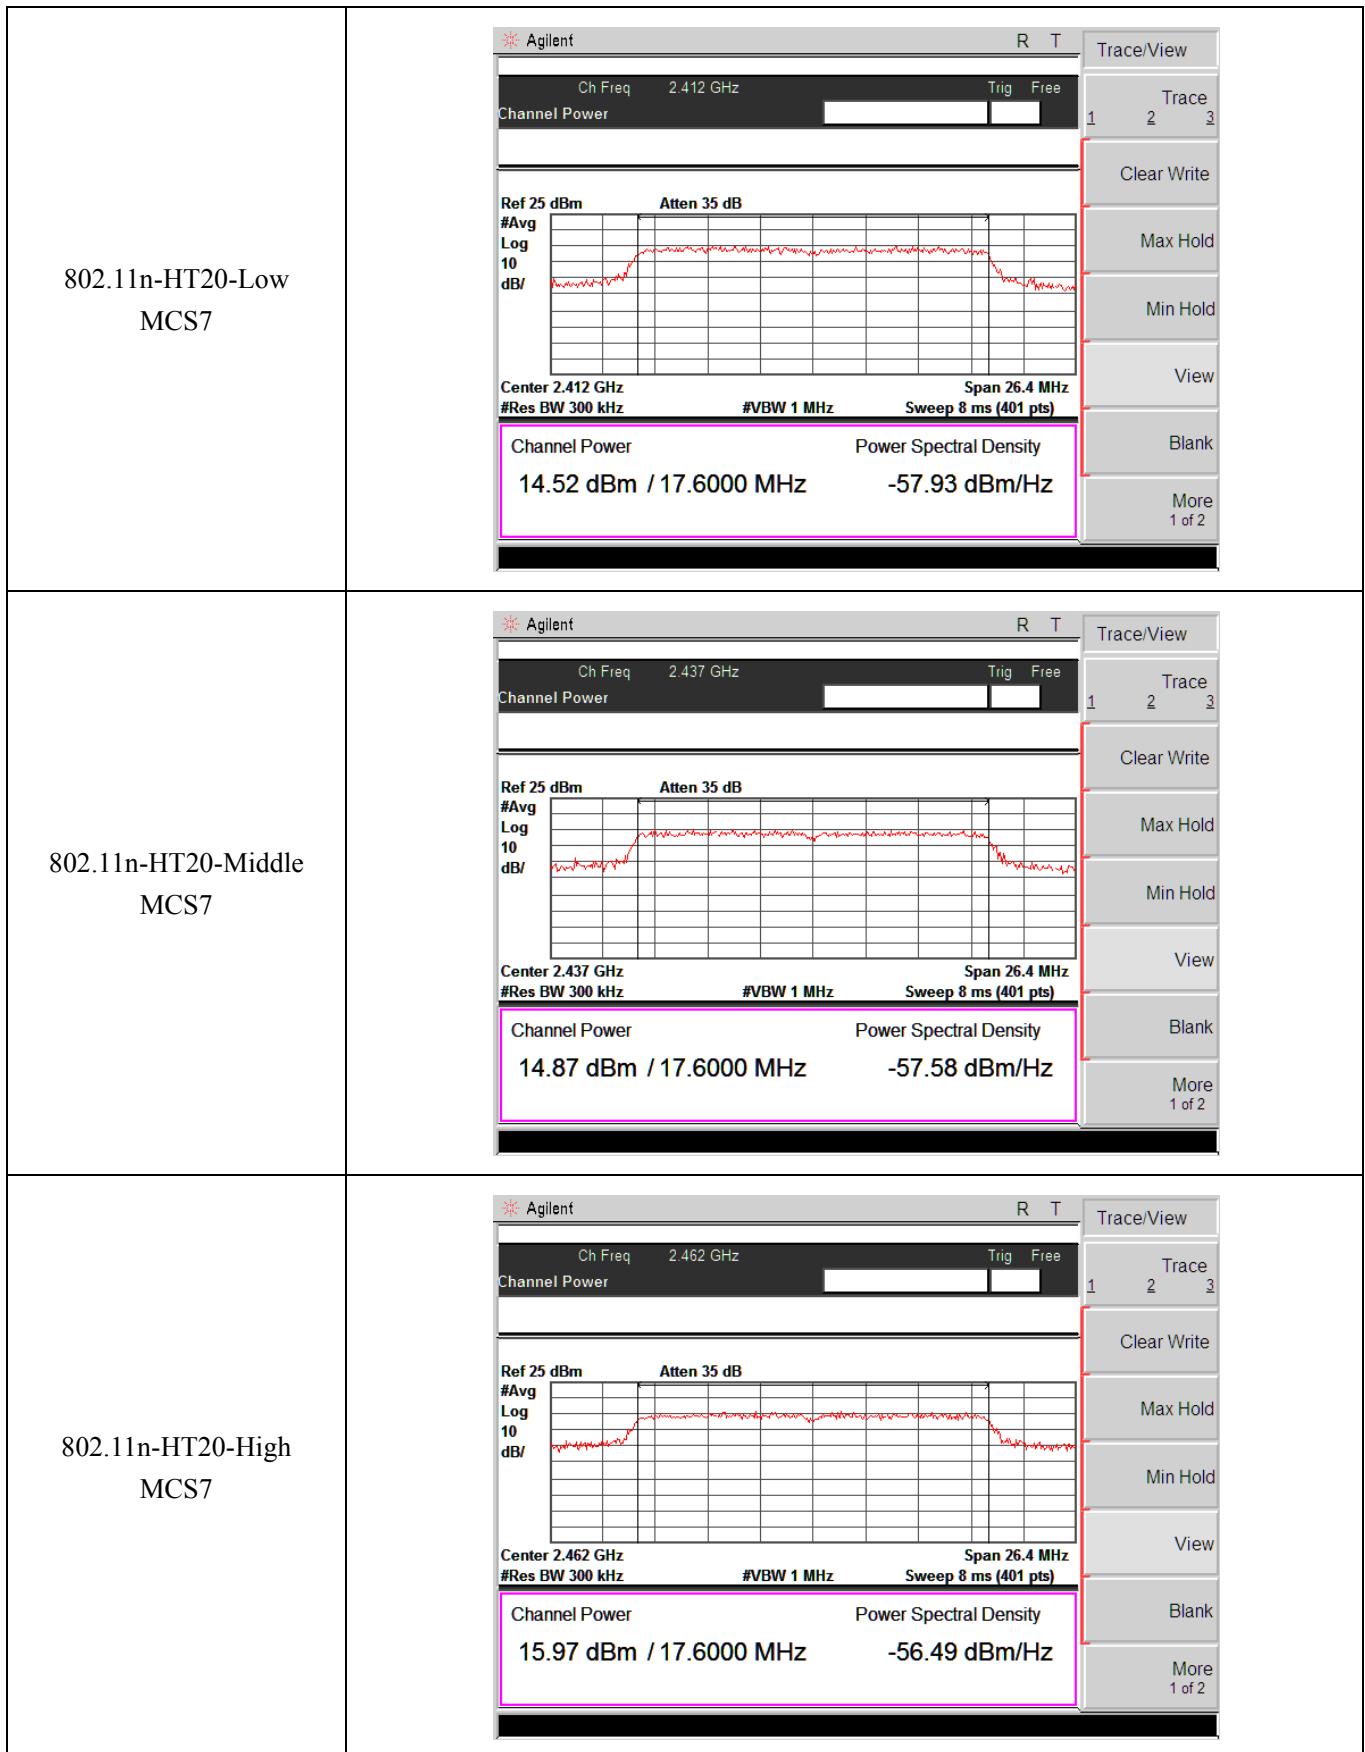

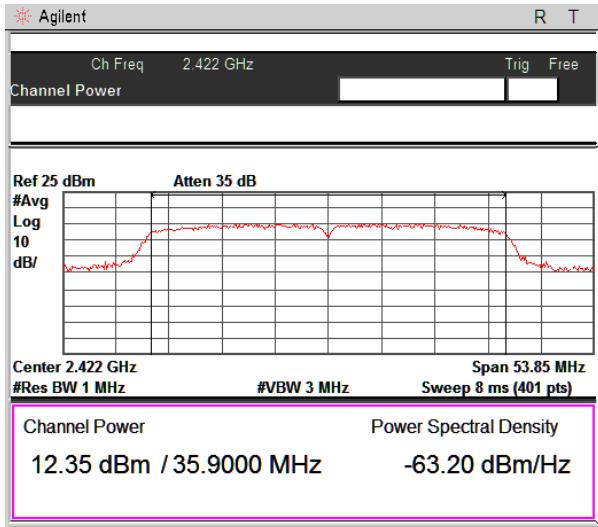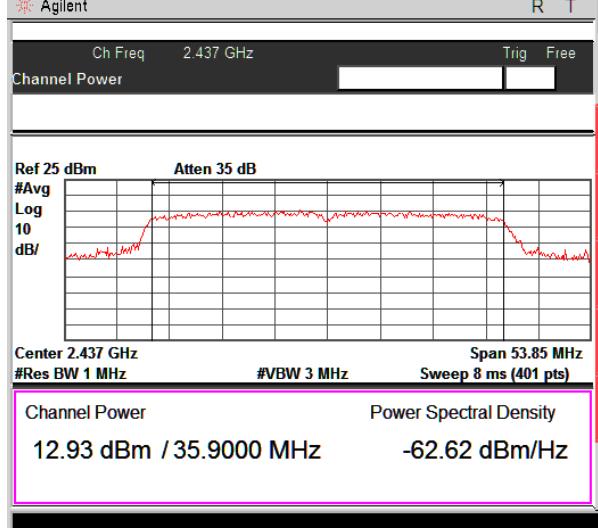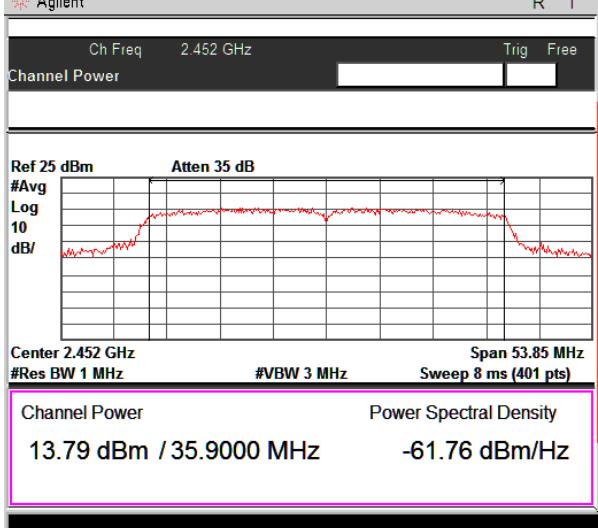802.11n-HT40-Low MCS7	 <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Avg Log 10 dB/</p> <p>Center 2.422 GHz Span 53.85 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>12.35 dBm / 35.9000 MHz</td> <td>-63.20 dBm/Hz</td> </tr> </table>	Channel Power	Power Spectral Density	12.35 dBm / 35.9000 MHz	-63.20 dBm/Hz
Channel Power	Power Spectral Density				
12.35 dBm / 35.9000 MHz	-63.20 dBm/Hz				
802.11n-HT40-Middle MCS7	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Avg Log 10 dB/</p> <p>Center 2.437 GHz Span 53.85 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>12.93 dBm / 35.9000 MHz</td> <td>-62.62 dBm/Hz</td> </tr> </table>	Channel Power	Power Spectral Density	12.93 dBm / 35.9000 MHz	-62.62 dBm/Hz
Channel Power	Power Spectral Density				
12.93 dBm / 35.9000 MHz	-62.62 dBm/Hz				
802.11n-HT40-High MCS7	 <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Avg Log 10 dB/</p> <p>Center 2.452 GHz Span 53.85 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>13.79 dBm / 35.9000 MHz</td> <td>-61.76 dBm/Hz</td> </tr> </table>	Channel Power	Power Spectral Density	13.79 dBm / 35.9000 MHz	-61.76 dBm/Hz
Channel Power	Power Spectral Density				
13.79 dBm / 35.9000 MHz	-61.76 dBm/Hz				

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

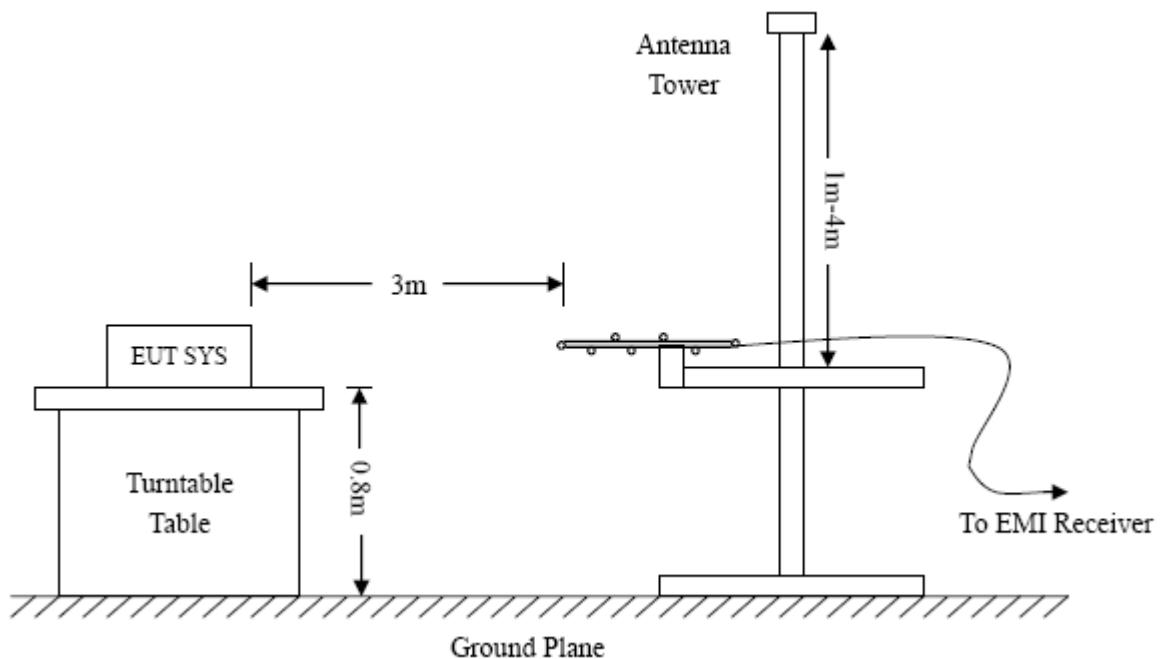

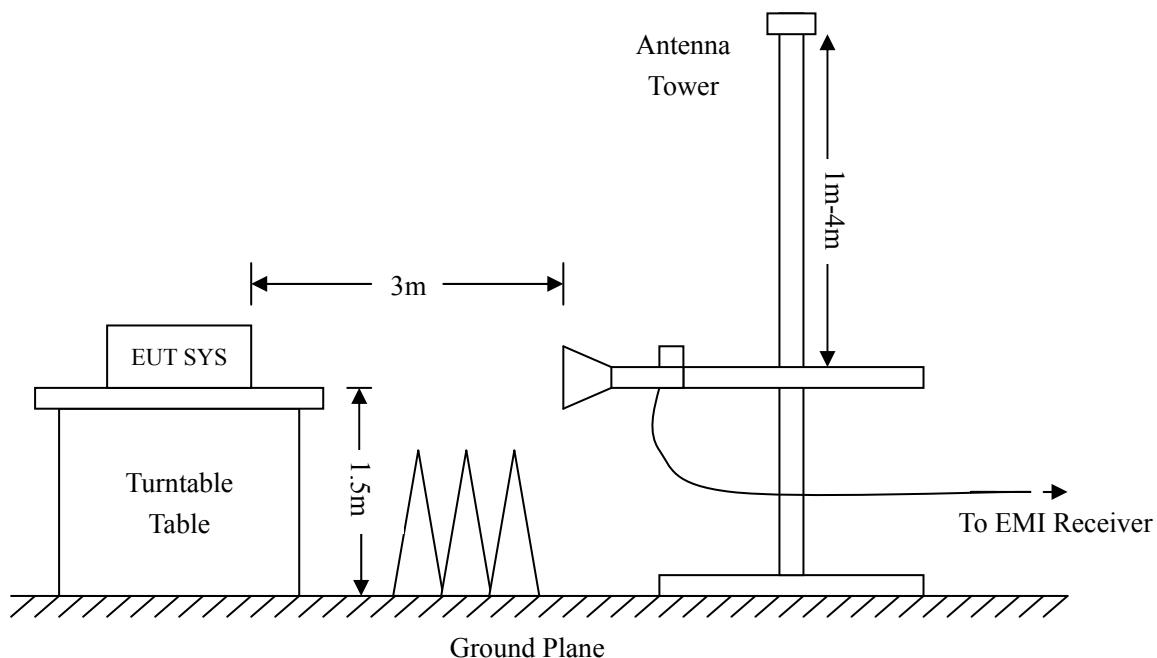

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=360KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCCPart15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

➤ Spurious Emissions Below 1GHz

802.11b			
Test Channel	Low	Polarity:	Horizontal

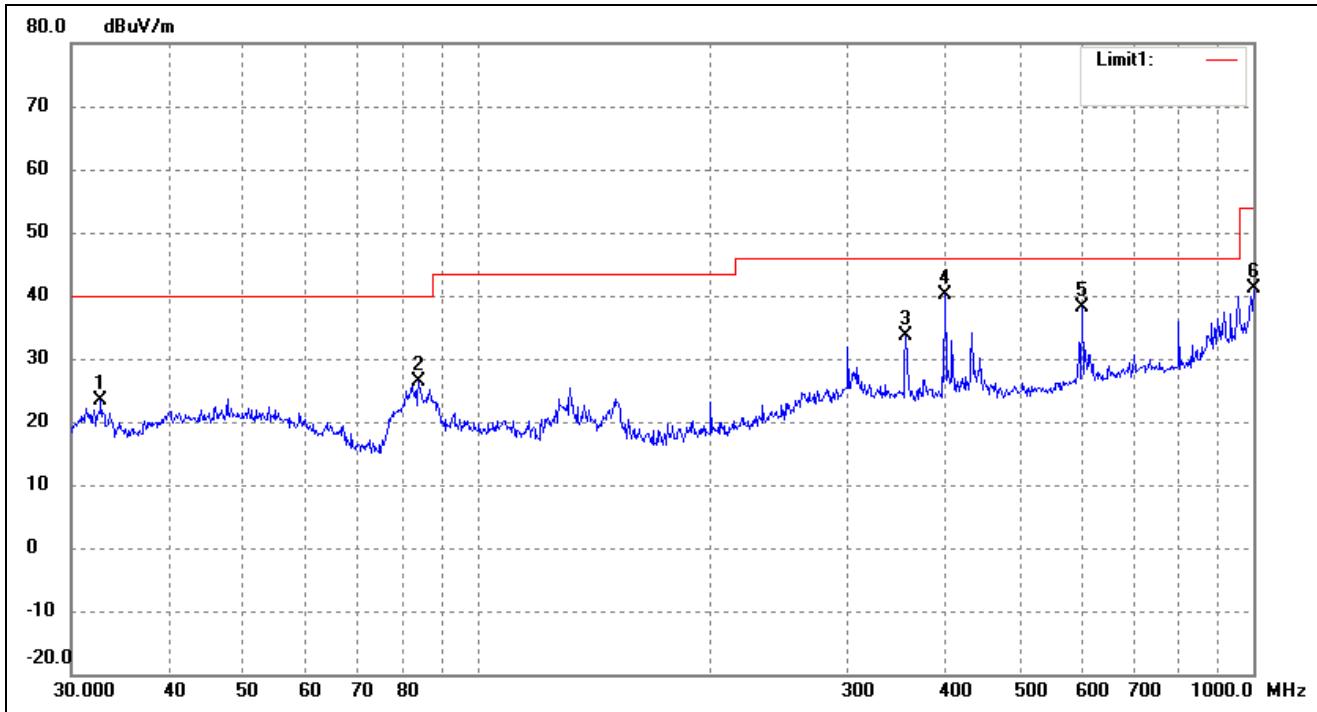

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.7486	39.51	-16.01	23.50	40.00	-16.50	314	100	peak
2	84.1100	44.63	-18.36	26.27	40.00	-13.73	90	100	peak
3	356.6758	40.38	-6.69	33.69	46.00	-12.31	233	100	peak
4	400.4319	46.48	-6.45	40.03	46.00	-5.97	314	100	peak
5	601.4265	42.21	-3.98	38.23	46.00	-7.77	259	100	peak
6	1000.0000	37.18	4.04	41.22	54.00	-12.78	186	100	peak


802.11b

Test Channel

Low

Polarity:

Vertical

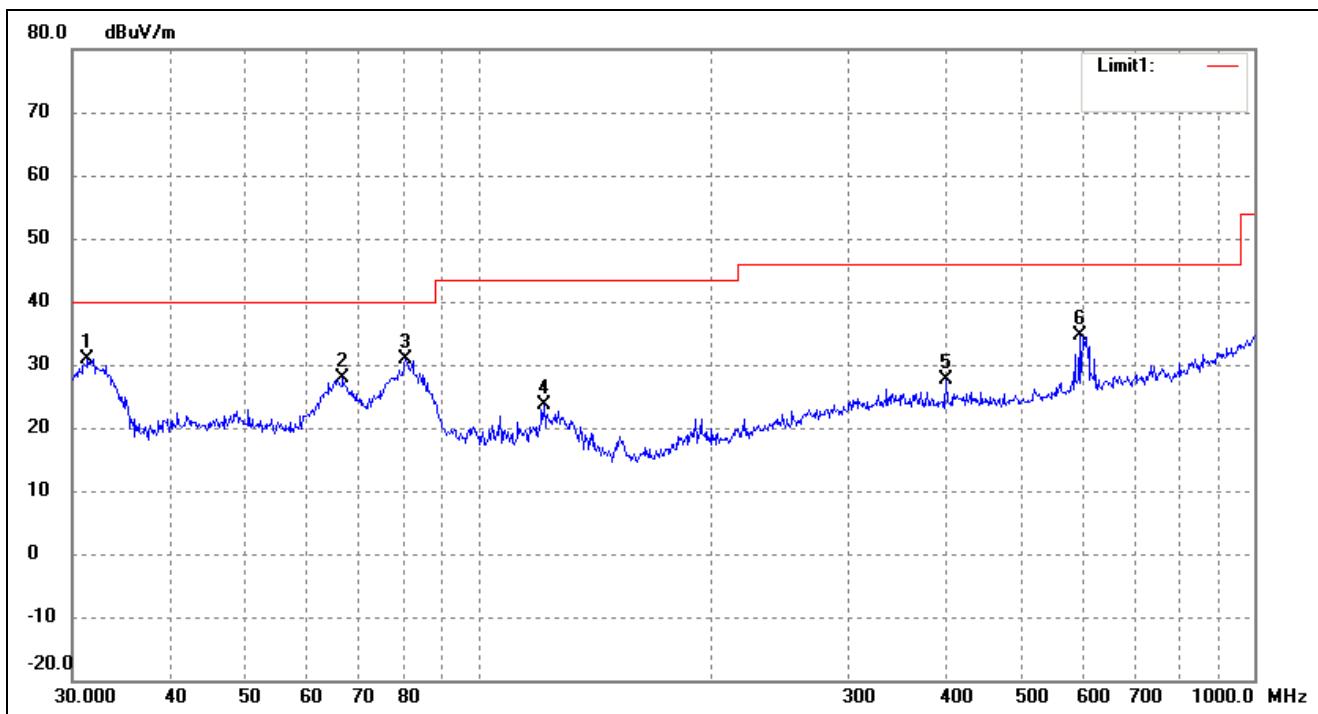

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.3992	46.86	-16.02	30.84	40.00	-9.16	265	100	peak
2	66.9669	43.78	-15.99	27.79	40.00	-12.21	94	100	peak
3	80.6442	49.59	-18.73	30.86	40.00	-9.14	176	100	peak
4	121.5486	39.47	-15.77	23.70	43.50	-19.80	93	100	peak
5	400.4319	34.04	-6.45	27.59	46.00	-18.41	325	100	peak
6	595.1329	38.55	-3.99	34.56	46.00	-11.44	106	100	peak


802.11b

Test Channel

Middle

Polarity:

Horizontal

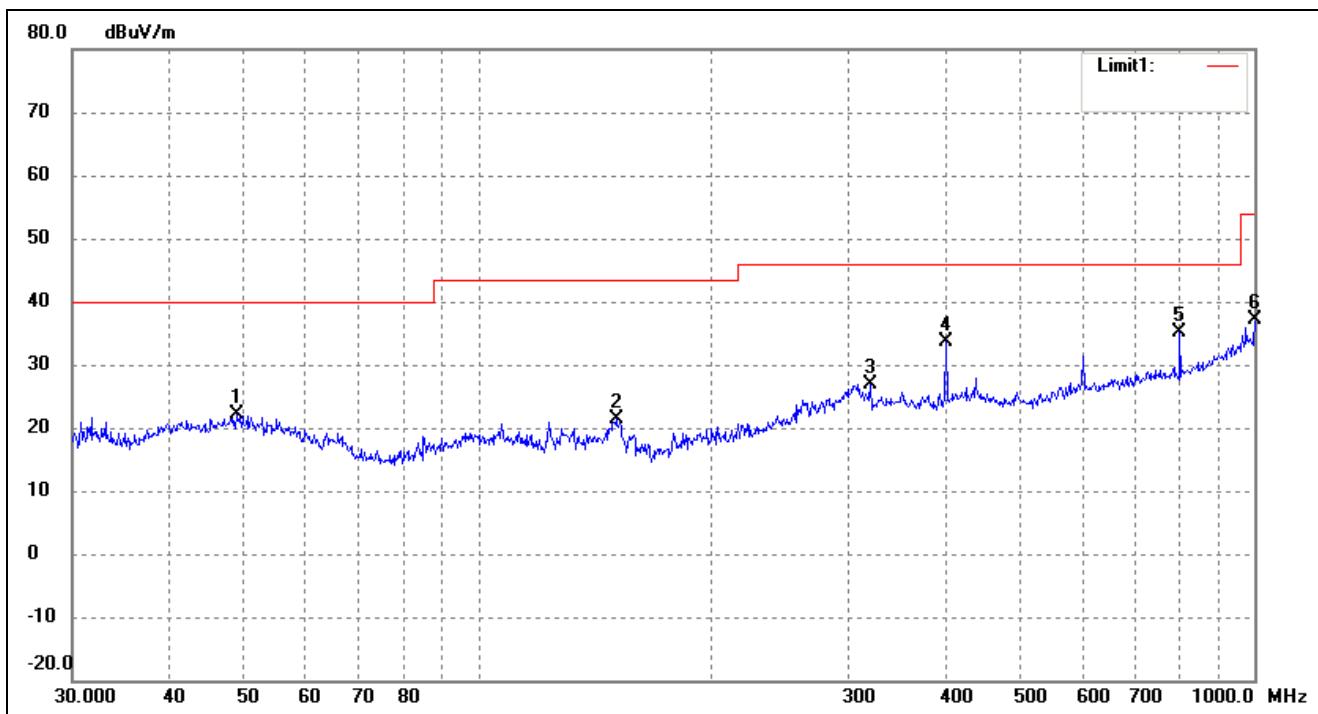

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	48.8429	35.07	-12.83	22.24	40.00	-17.76	294	100	peak
2	150.5378	38.14	-16.73	21.41	43.50	-22.09	110	100	peak
3	319.9370	34.01	-7.13	26.88	46.00	-19.12	100	100	peak
4	400.4319	40.08	-6.45	33.63	46.00	-12.37	211	100	peak
5	801.7863	36.59	-1.57	35.02	46.00	-10.98	56	100	peak
6	1000.0000	33.10	4.04	37.14	54.00	-16.86	174	100	peak


802.11b

Test Channel

Middle

Polarity:


Vertical

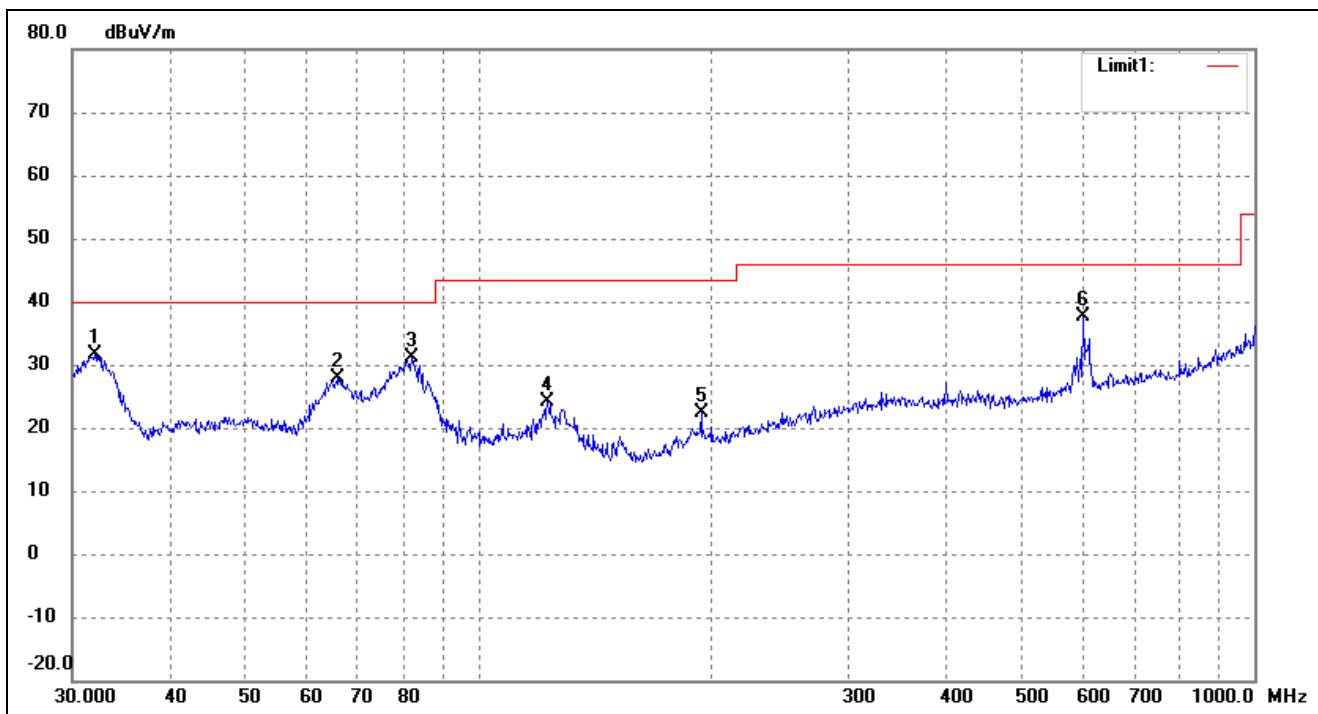

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.0668	47.76	-16.06	31.70	40.00	-8.30	100	100	peak
2	66.0342	43.41	-15.63	27.78	40.00	-12.22	332	100	peak
3	82.0706	49.80	-18.57	31.23	40.00	-8.77	83	100	peak
4	122.8340	40.03	-16.02	24.01	43.50	-19.49	339	100	peak
5	193.7728	35.10	-12.84	22.26	43.50	-21.24	175	100	peak
6	601.4265	41.49	-3.98	37.51	46.00	-8.49	243	100	peak

802.11b


Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

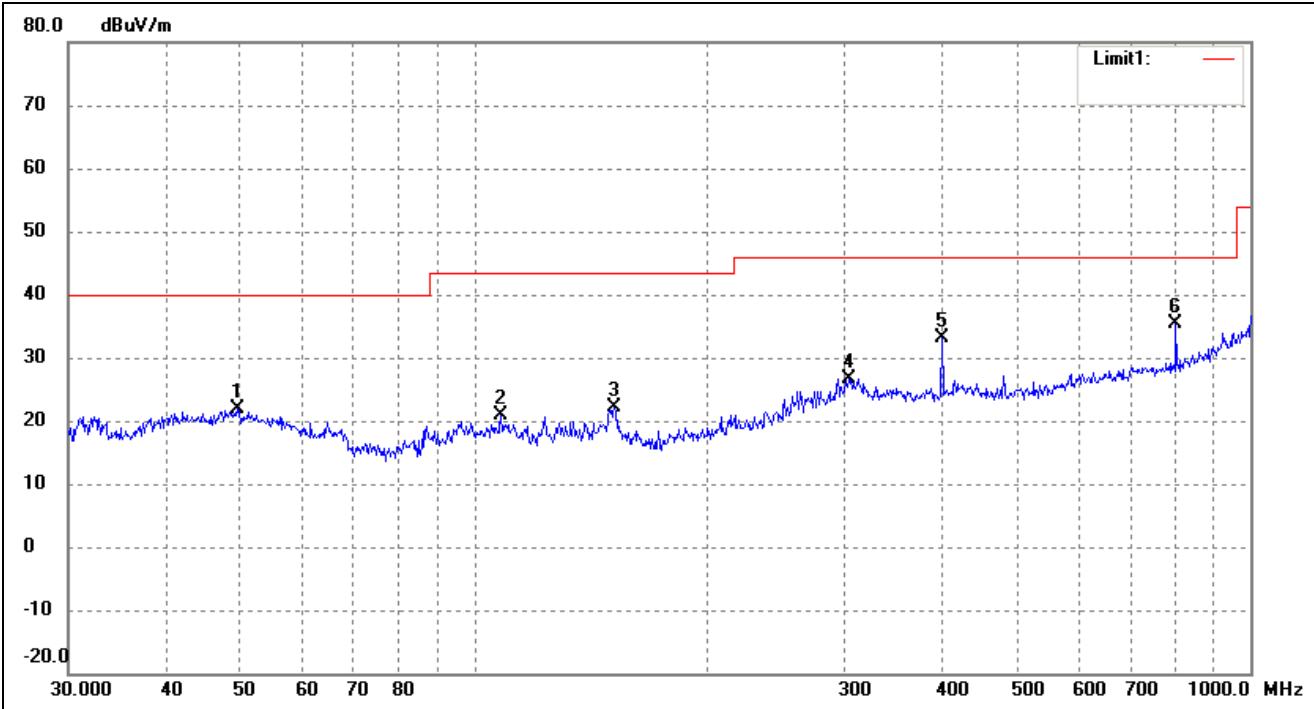

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	49.5328	34.71	-12.89	21.82	40.00	-18.18	190	100	peak
2	108.2667	34.73	-13.96	20.77	43.50	-22.73	124	100	peak
3	151.5972	38.72	-16.66	22.06	43.50	-21.44	73	100	peak
4	304.6100	34.04	-7.33	26.71	46.00	-19.29	90	100	peak
5	400.4319	39.61	-6.45	33.16	46.00	-12.84	165	100	peak
6	801.7863	36.86	-1.57	35.29	46.00	-10.71	295	100	peak

802.11b

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

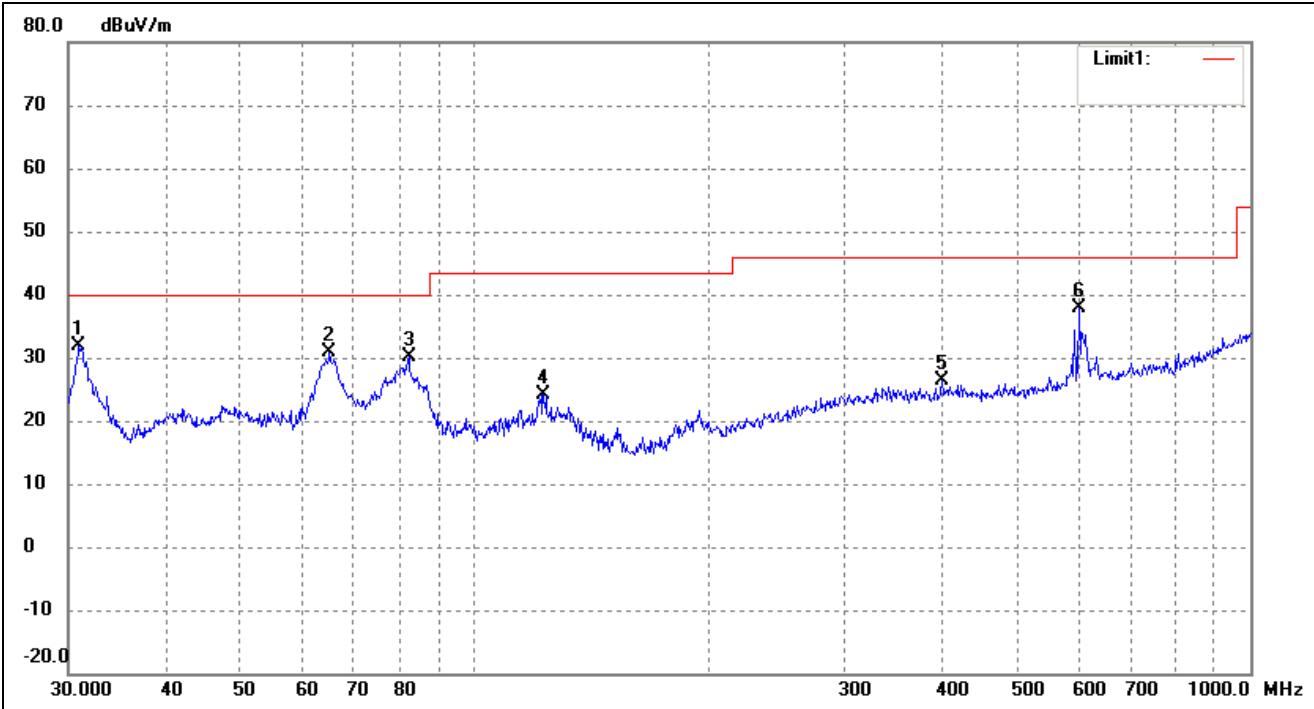

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.9619	47.97	-15.99	31.98	40.00	-8.02	83	100	peak
2	65.1145	46.24	-15.28	30.96	40.00	-9.04	190	100	peak
3	82.3589	48.61	-18.55	30.06	40.00	-9.94	128	100	peak
4	122.8340	40.17	-16.02	24.15	43.50	-19.35	115	100	peak
5	400.4319	32.80	-6.45	26.35	46.00	-19.65	231	100	peak
6	601.4265	41.77	-3.98	37.79	46.00	-8.21	350	100	peak

➤ Spurious Emissions Below 1GHz

➤ *Test Mode: 802.11b (worst case)*

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar	Detector
Low Channel-2412MHz							
4824.000	61.41	-3.87	57.54	74	-16.46	H	PK
4824.000	43.75	-3.87	39.88	54	-14.12	H	AV
7236.000	54.59	1.14	55.73	74	-18.27	H	PK
7236.000	41.32	1.19	42.51	54	-11.49	H	AV
4824.000	59.16	-3.86	55.30	74	-18.70	V	PK
4824.000	40.69	-3.86	36.83	54	-17.17	V	AV
7236.000	52.03	1.10	53.13	74	-20.87	V	PK
7236.000	40.09	1.10	41.19	54	-12.81	V	AV
Middle Channel-2437MHz							
4874.000	59.46	-3.74	55.72	74	-18.28	H	PK
4874.000	43.36	-3.74	39.62	54	-14.38	H	AV
7311.000	53.26	1.47	54.73	74	-19.27	H	PK
7311.000	40.79	1.47	42.26	54	-11.74	H	AV
4874.000	59.21	-3.74	55.47	74	-18.53	V	PK
4874.000	41.68	-3.74	37.94	54	-16.06	V	AV
7311.000	52.79	1.47	54.26	74	-19.74	V	PK
7311.000	40.00	1.47	41.47	54	-12.53	V	AV
High Channel-2462MHz							
4924.000	61.05	-3.59	57.46	74	-16.54	H	PK
4924.000	42.28	-3.59	38.69	54	-15.31	H	AV
7386.000	52.41	1.79	54.20	74	-19.80	H	PK
7386.000	41.02	1.79	42.81	54	-11.19	H	AV
4924.000	61.23	-3.59	57.64	74	-16.36	V	PK
4924.000	42.08	-3.59	38.49	54	-15.51	V	AV
7386.000	55.09	1.79	56.88	74	-17.12	V	PK
7386.000	38.59	1.79	40.38	54	-13.62	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listedin the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:


1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3Summary of Test Results/Plots

- Radiated test

802.11b			
Test Channel	Low	Polarity:	Vertical(worst case)

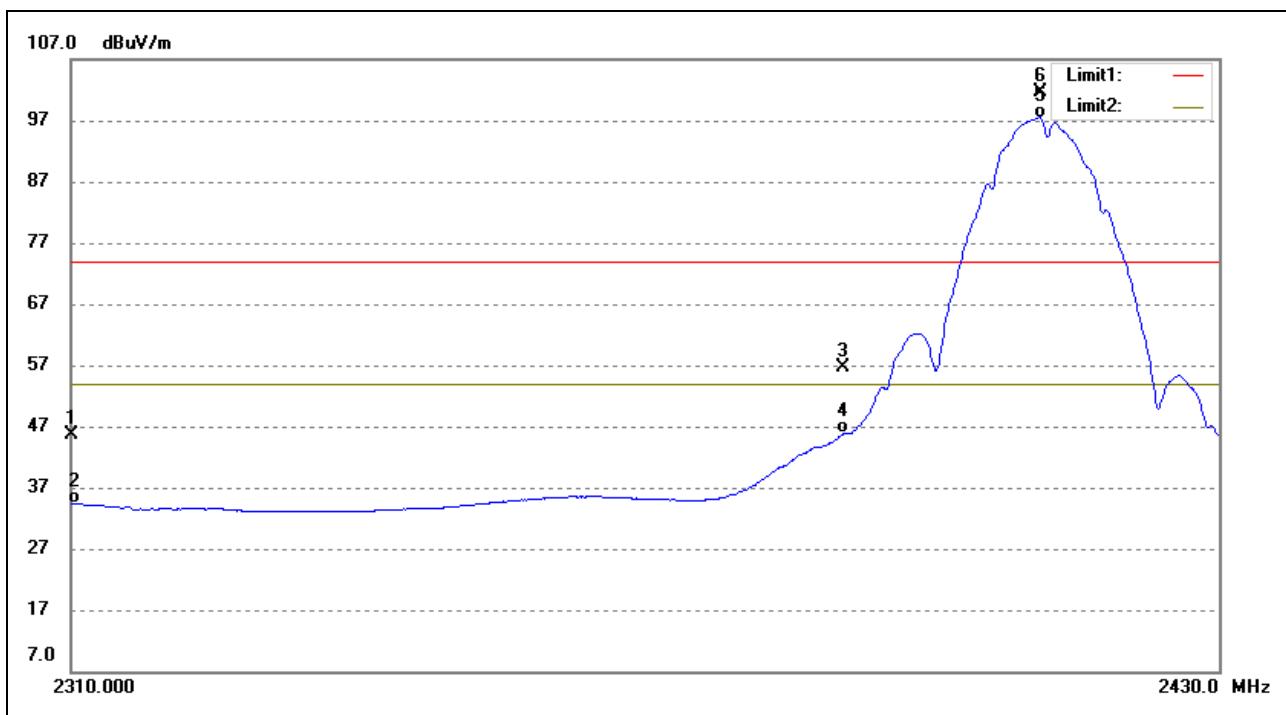

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	53.29	-7.78	45.51	74.00	-28.49	peak
2	2310.000	42.07	-7.78	34.29	54.00	-19.71	AVG
3	2390.000	63.94	-7.32	56.62	74.00	-17.38	peak
4	2390.000	53.15	-7.32	45.83	54.00	-8.17	AVG
5	2410.878	104.69	-7.19	97.50	/	/	AVG
6	2411.040	108.73	-7.19	101.54	/	/	peak


802.11b

Test Channel

High


Polarity:

Vertical(worst case)

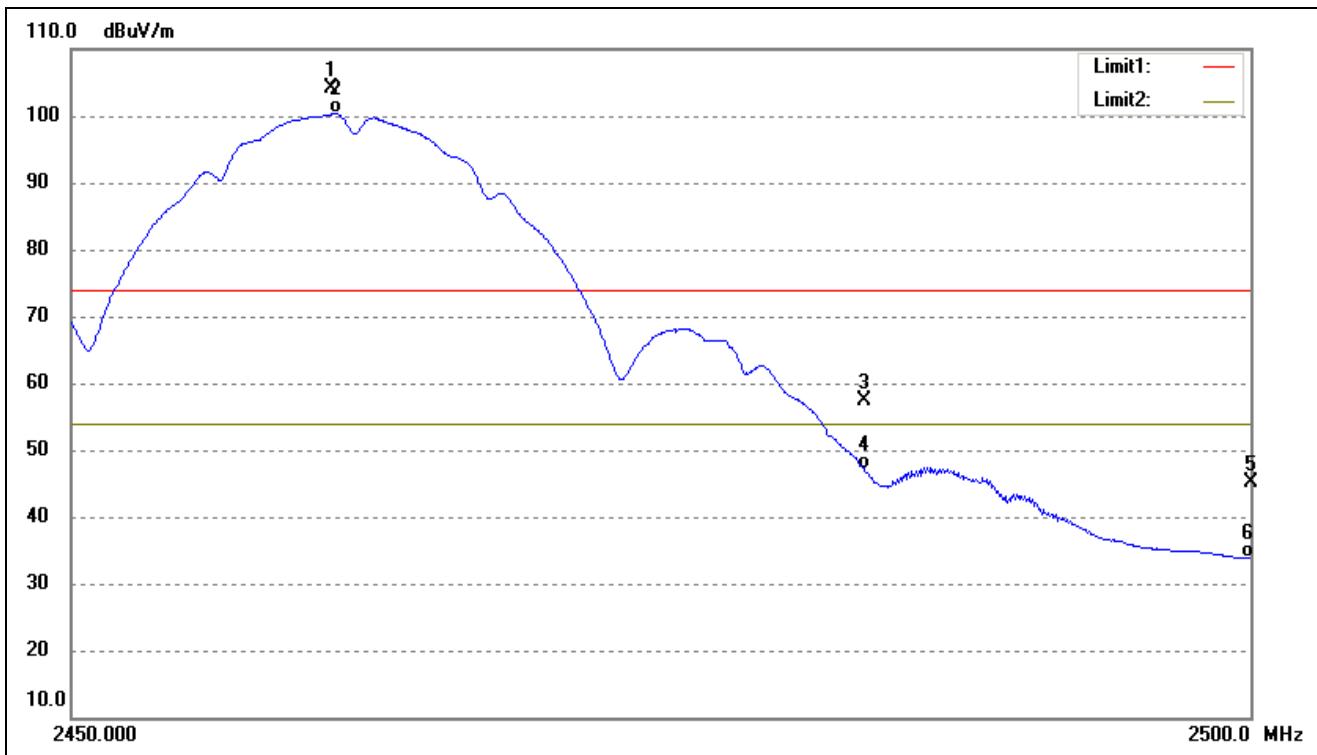

No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct Factor(dB)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2460.950	110.98	-6.90	104.08	/	/	peak
2	2461.112	107.26	-6.90	100.36	/	/	AVG
3	2483.500	64.13	-6.77	57.36	74.00	-16.64	peak
4	2483.500	53.97	-6.77	47.20	54.00	-6.80	AVG
5	2500.000	51.92	-6.67	45.25	74.00	-28.75	peak
6	2500.000	40.47	-6.67	33.80	54.00	-20.20	AVG

802.11g			
Test Channel	Low	Polarity:	Vertical(worst case)

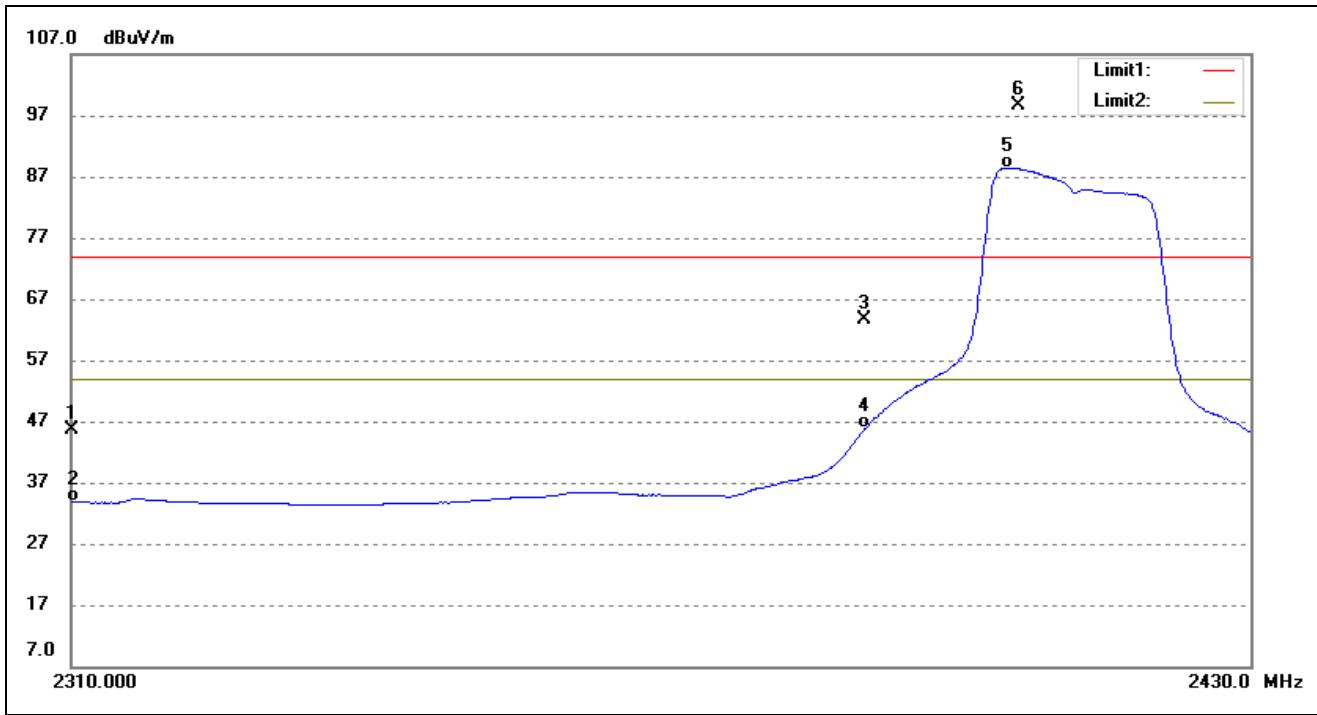

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	53.45	-7.78	45.67	74.00	-28.33	peak
2	2310.000	41.69	-7.78	33.91	54.00	-20.09	AVG
3	2390.000	71.01	-7.32	63.69	74.00	-10.31	peak
4	2390.000	53.08	-7.32	45.76	54.00	-8.24	AVG
5	2404.780	95.70	-7.23	88.47	/	/	AVG
6	2405.760	105.92	-7.22	98.70	/	/	peak


802.11g

Test Channel

High

Polarity:

Vertical(worst case)

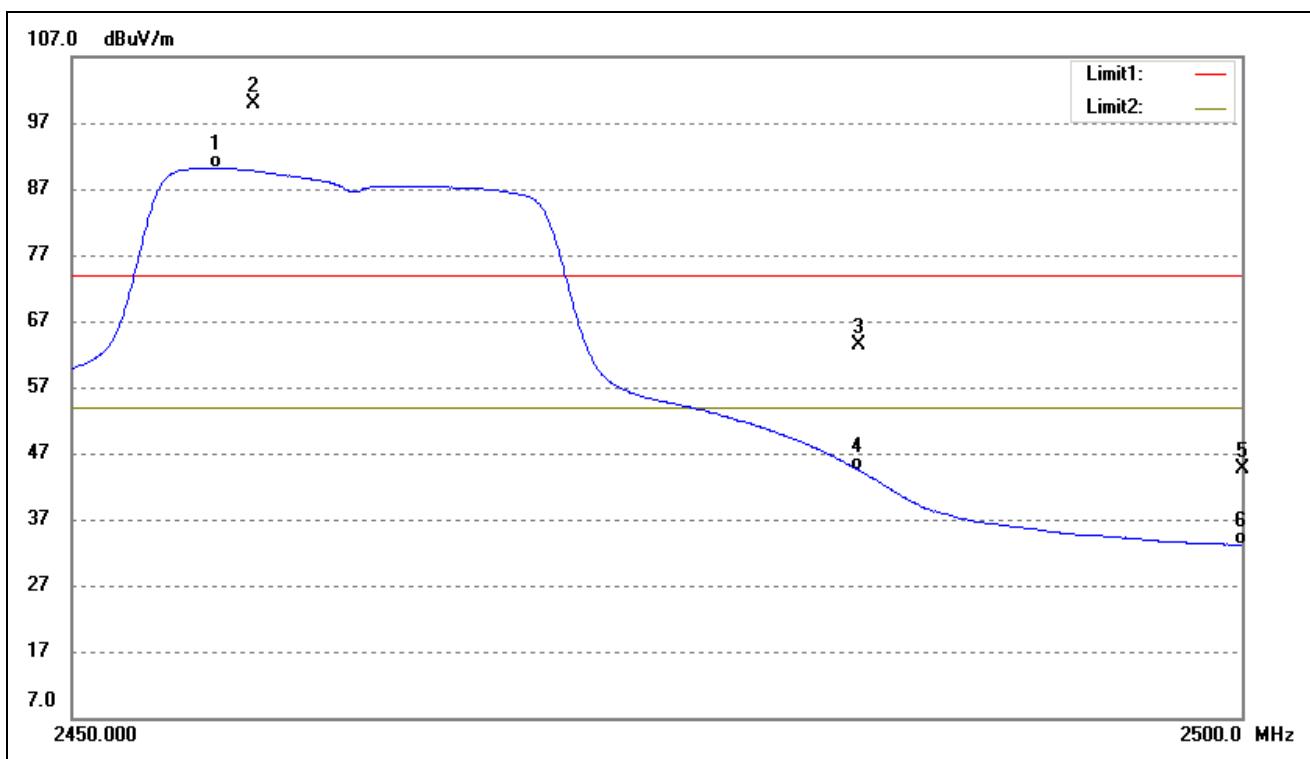

No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2456.096	97.09	-6.92	90.17	/	/	AVG
2	2457.650	106.91	-6.92	99.99	/	/	peak
3	2483.500	70.22	-6.77	63.45	74.00	-10.55	peak
4	2483.500	51.22	-6.77	44.45	54.00	-9.55	AVG
5	2500.000	51.24	-6.67	44.57	74.00	-29.43	peak
6	2500.000	39.82	-6.67	33.15	54.00	-20.85	AVG


802.11n-HT20

Test Channel

Low

Polarity:


Vertical(worst case)

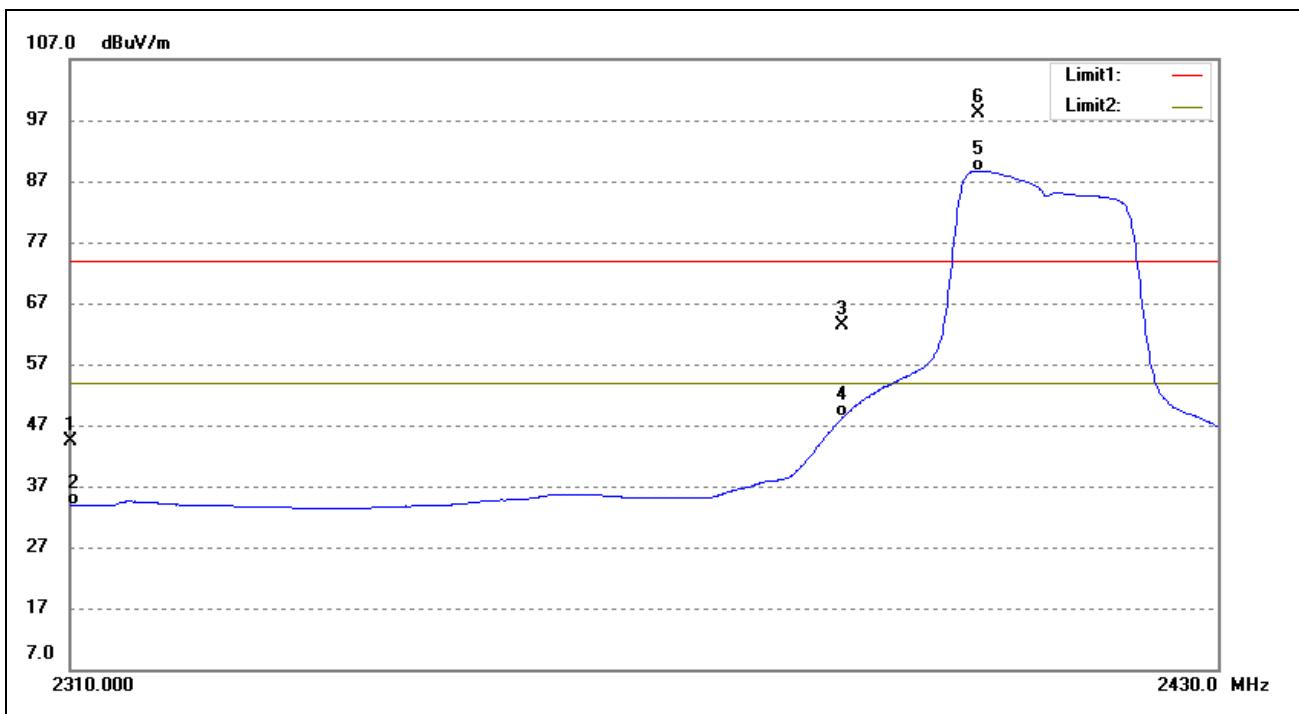

No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2310.000	52.27	-7.78	44.49	74.00	-29.51	peak
2	2310.000	41.73	-7.78	33.95	54.00	-20.05	AVG
3	2390.000	70.64	-7.32	63.32	74.00	-10.68	peak
4	2390.000	55.64	-7.32	48.32	54.00	-5.68	AVG
5	2404.415	95.94	-7.23	88.71	/	/	AVG
6	2404.440	105.32	-7.23	98.09	/	/	peak

802.11n-HT20


Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

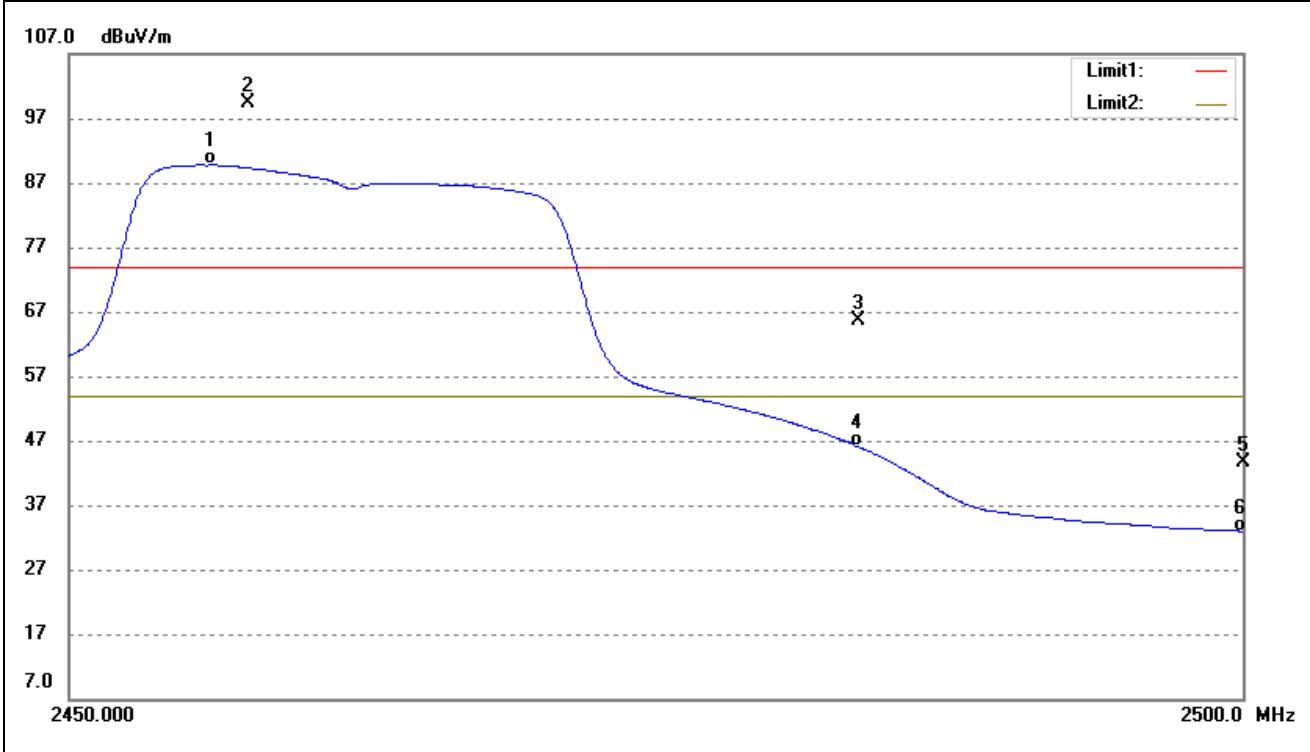

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2455.947	96.71	-6.92	89.79	/	/	AVG
2	2457.600	106.28	-6.92	99.36	/	/	peak
3	2483.500	72.50	-6.77	65.73	74.00	-8.27	peak
4	2483.500	52.81	-6.77	46.04	54.00	-7.96	AVG
5	2500.000	50.23	-6.67	43.56	74.00	-30.44	peak
6	2500.000	39.66	-6.67	32.99	54.00	-21.01	AVG

802.11n-HT40


Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

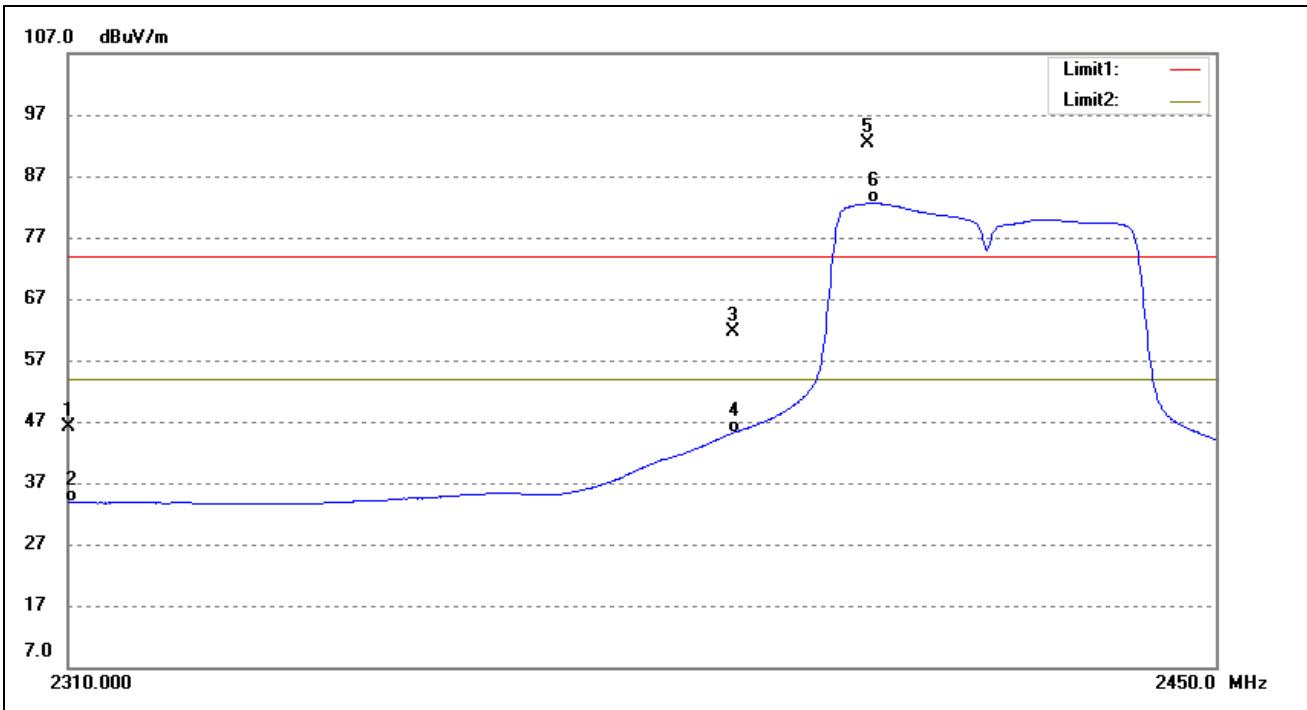

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	53.85	-7.78	46.07	74.00	-27.93	peak
2	2310.000	41.63	-7.78	33.85	54.00	-20.15	AVG
3	2390.000	68.99	-7.32	61.67	74.00	-12.33	peak
4	2390.000	52.48	-7.32	45.16	54.00	-8.84	AVG
5	2406.600	99.60	-7.21	92.39	/	/	peak
6	2407.415	89.79	-7.21	82.58	/	/	AVG

802.11n-HT40


Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

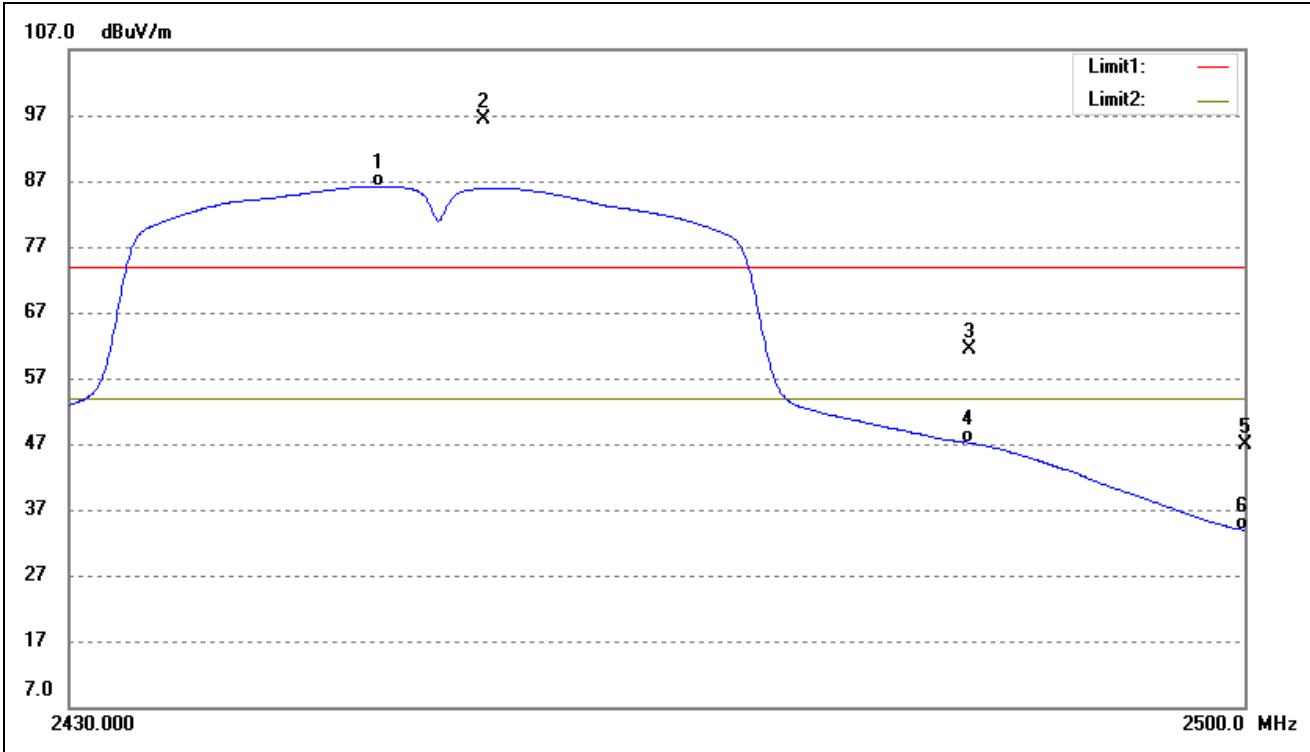


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2448.218	93.15	-6.97	86.18	/	/	AVG
2	2454.430	103.43	-6.94	96.49	/	/	peak
3	2483.500	68.03	-6.77	61.26	74.00	-12.74	peak
4	2483.500	53.89	-6.77	47.12	54.00	-6.88	AVG
5	2500.000	53.61	-6.67	46.94	74.00	-27.06	peak
6	2500.000	40.56	-6.67	33.89	54.00	-20.11	AVG

➤ Conducted test


802.11b

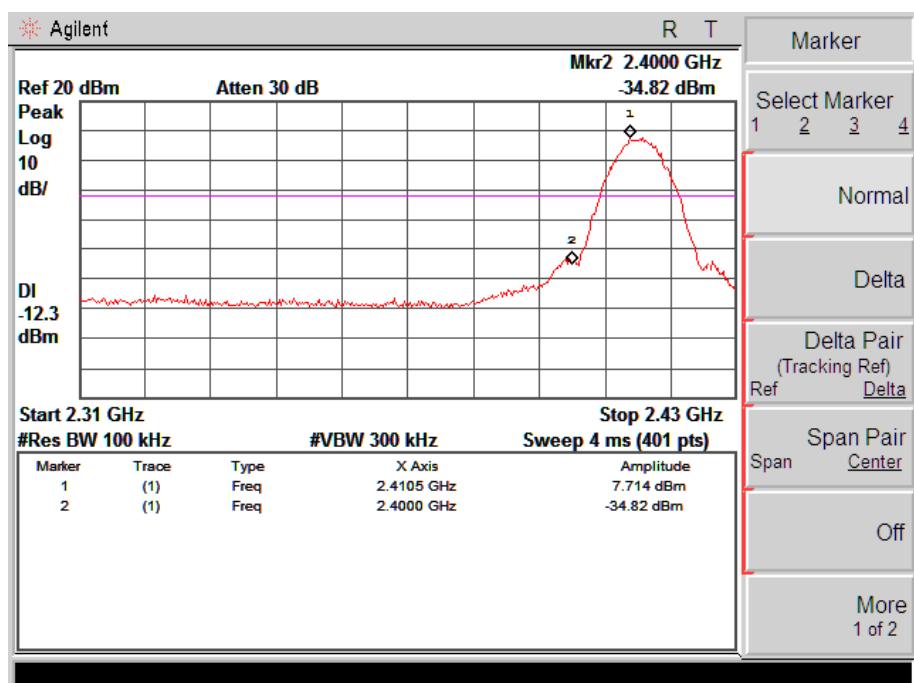


Low

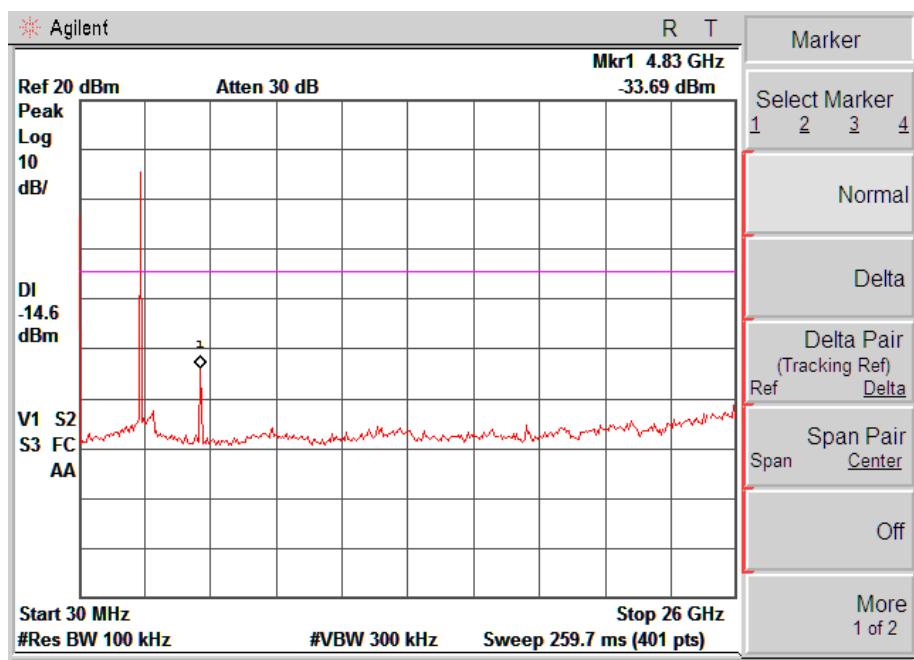


802.11b

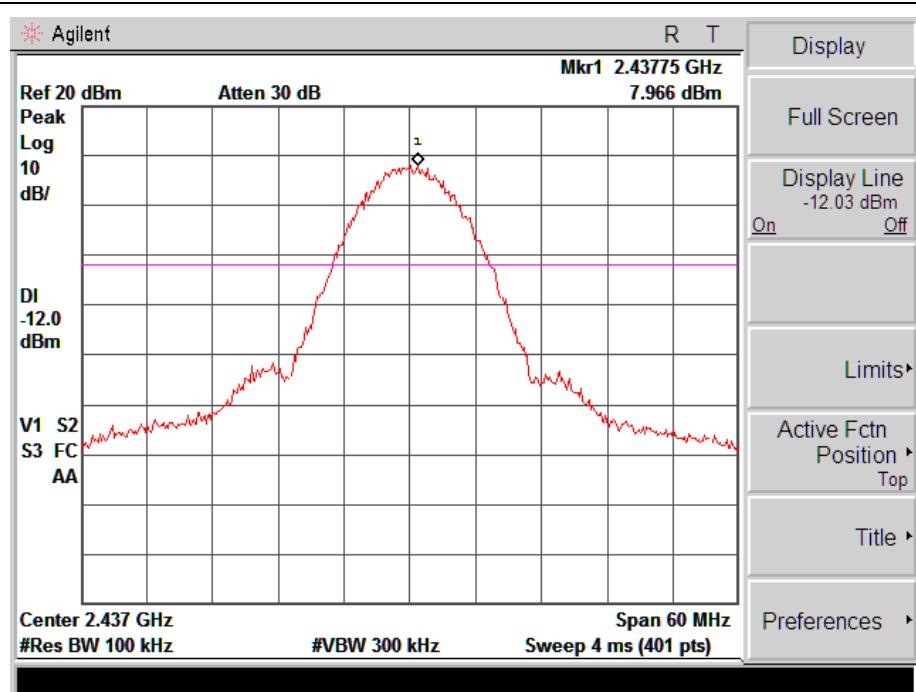


Middle

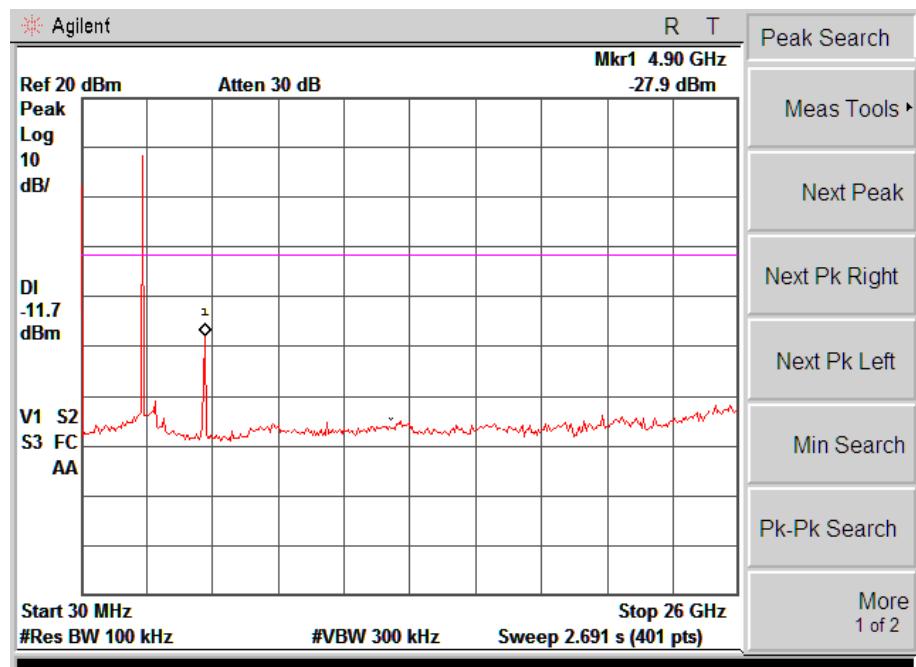


802.11b

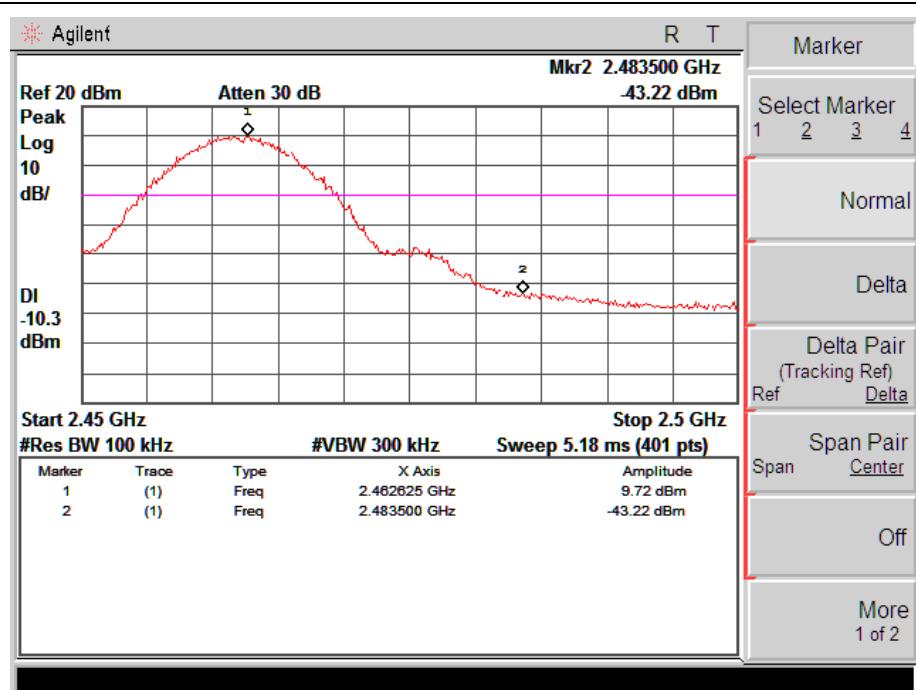


High

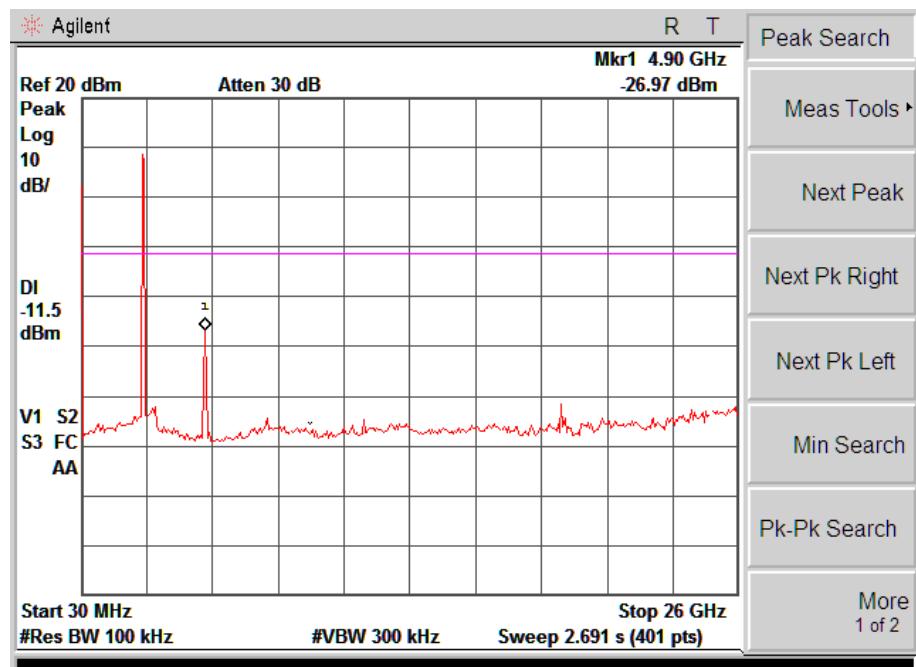


802.11g

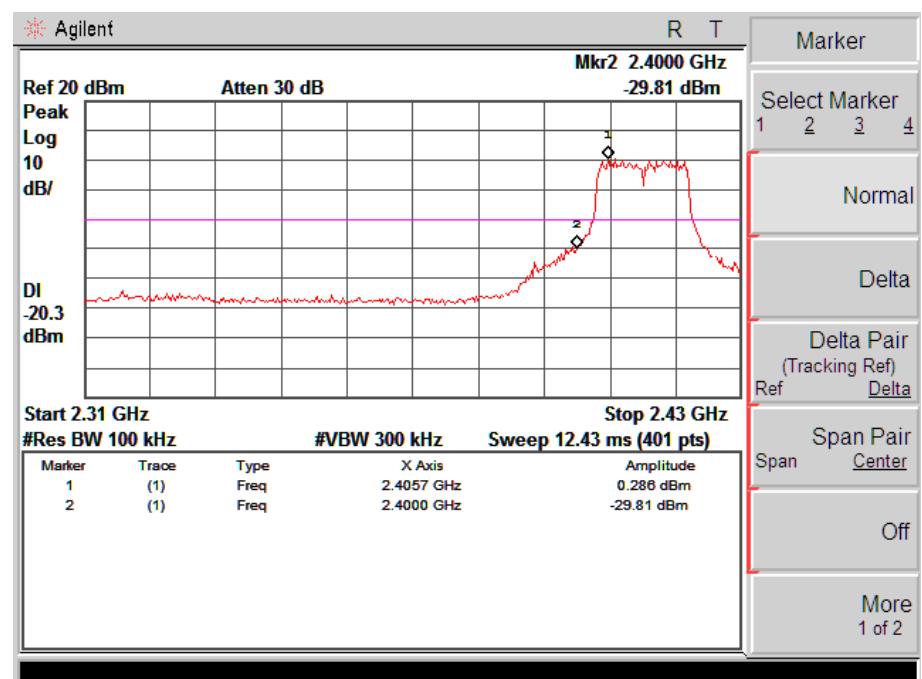


Low

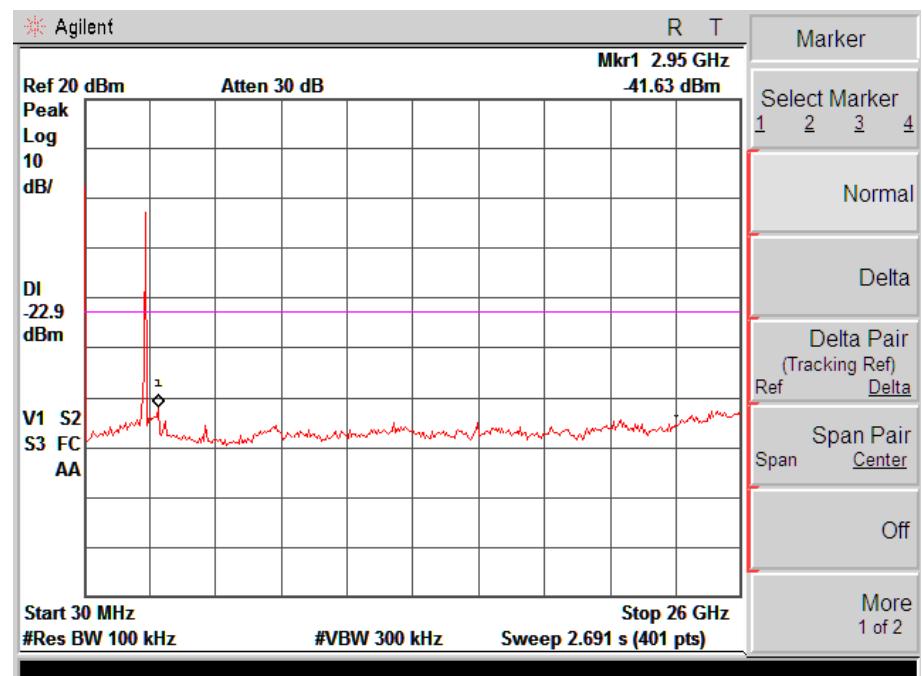


802.11g

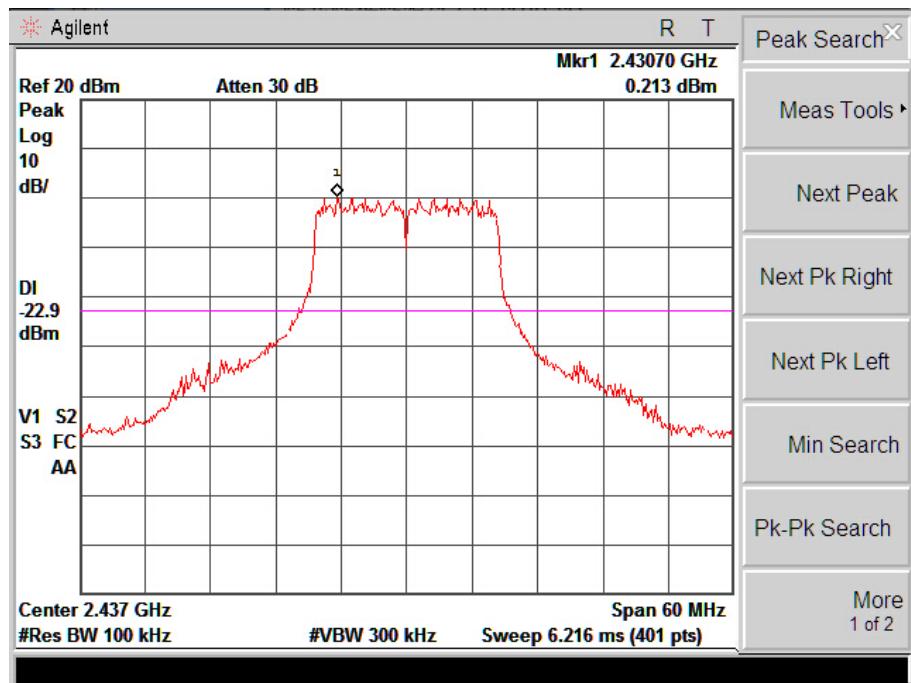


Middle

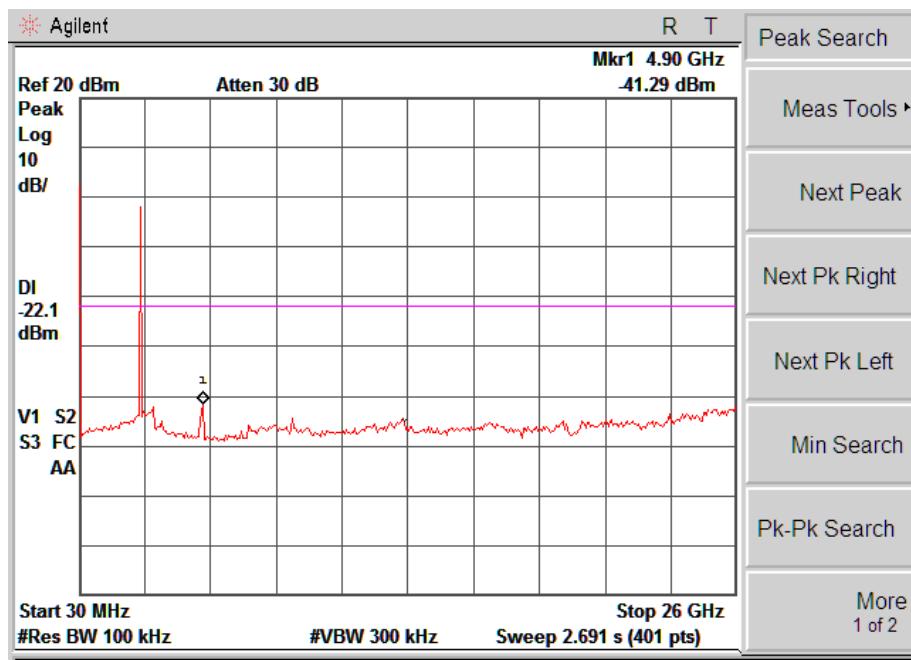


802.11g

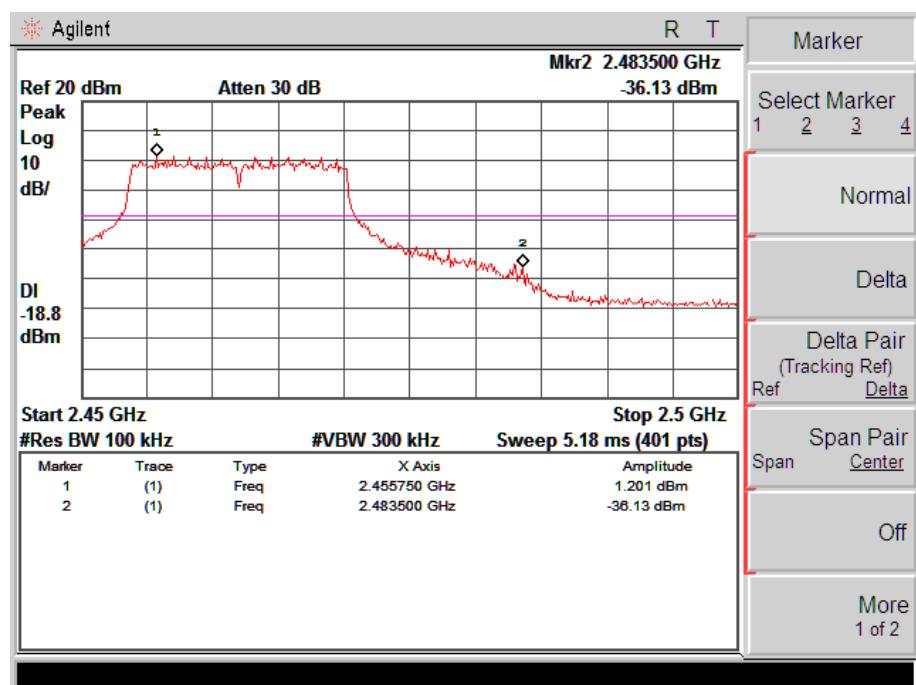


High

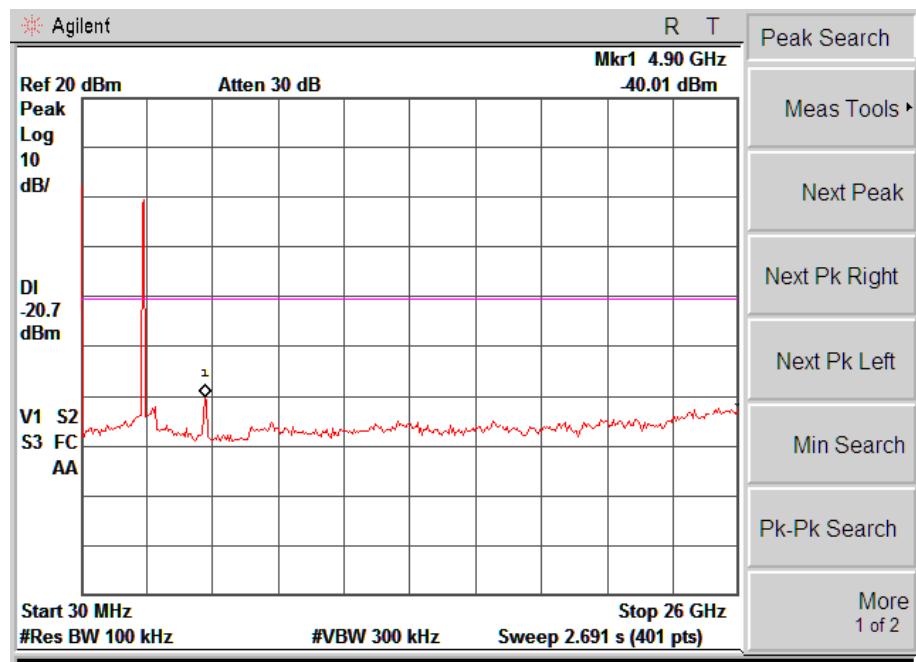


802.11n-HT20

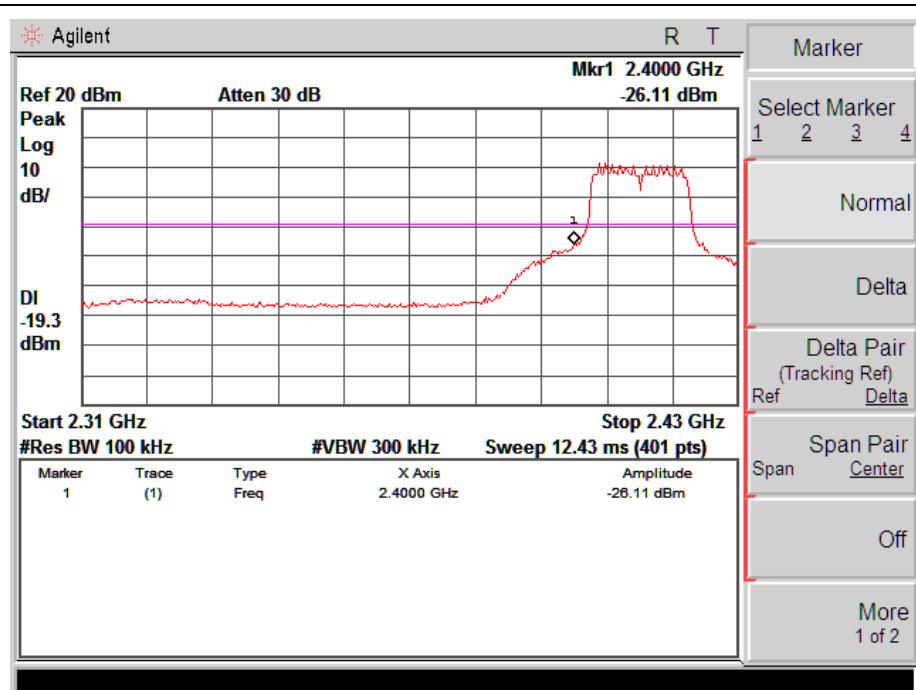


Low

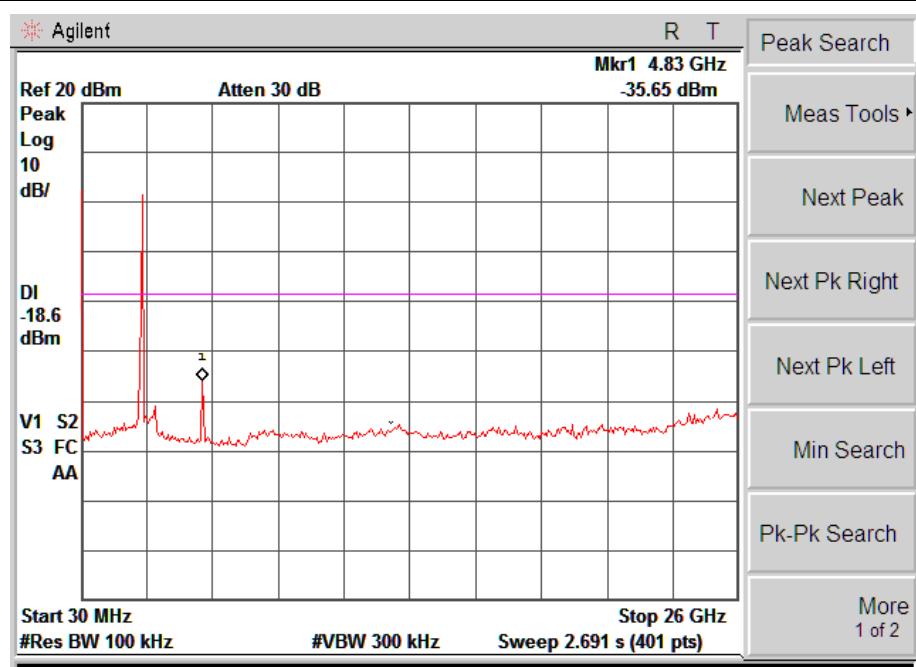

802.11n-HT20

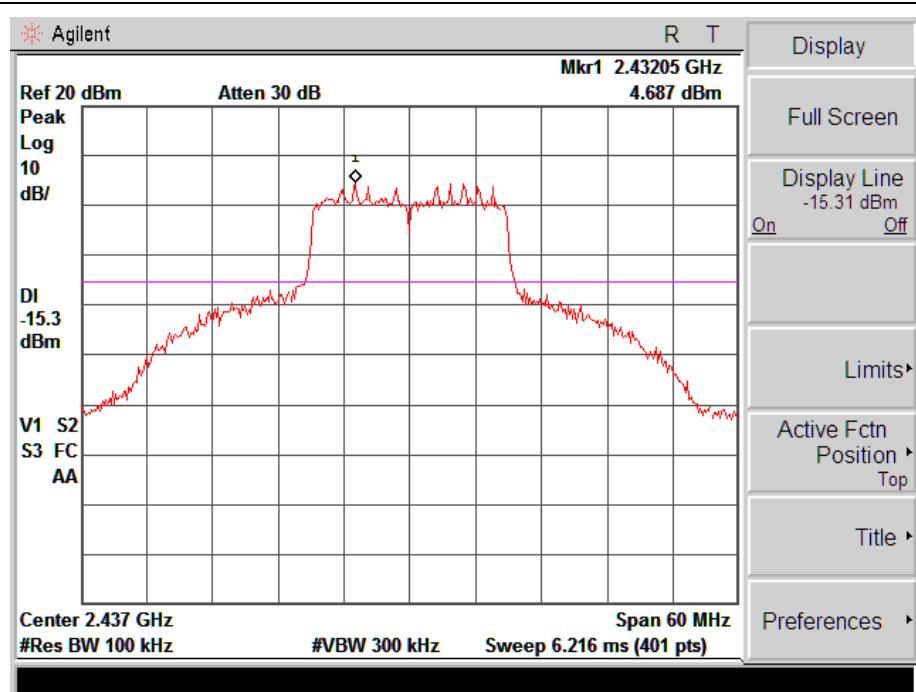


Middle

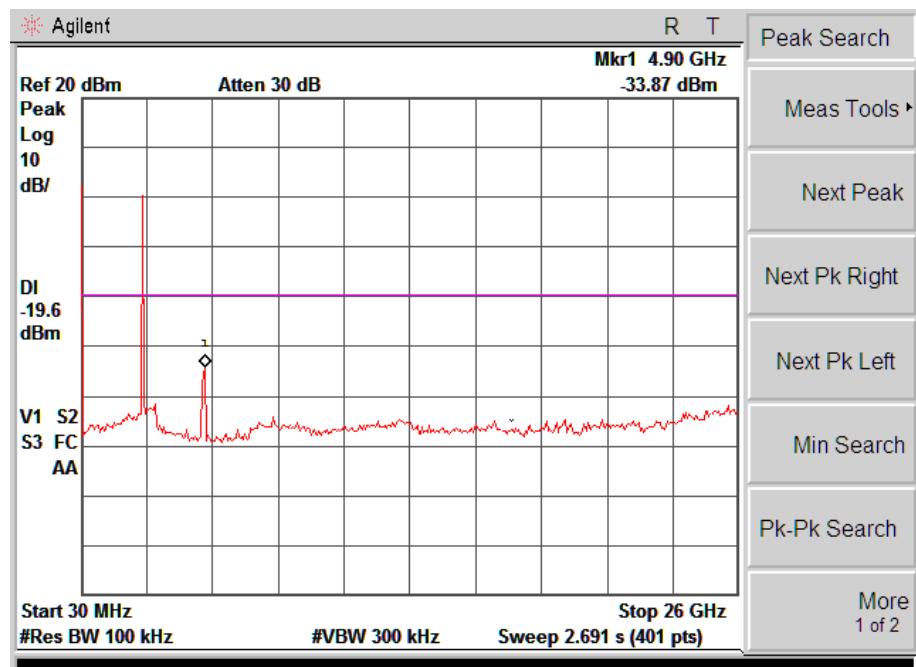


- Display**
 - Full Screen
 - Display Line -15.31 dBm
 - On
 - Off
 - Limits
 - Active Fctn Position
 - Top
 - Title
 - Preferences
-
- Peak Search
 - Meas Tools
 - Next Peak
 - Next Pk Right
 - Next Pk Left
 - Min Search
 - Pk-Pk Search
 - More 1 of 2


802.11n-HT20

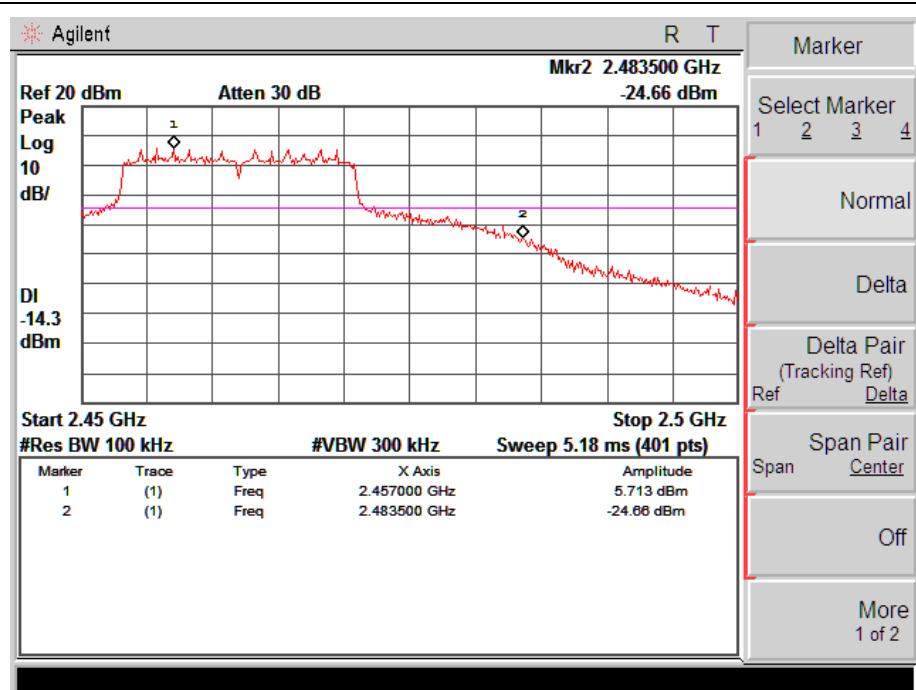


High

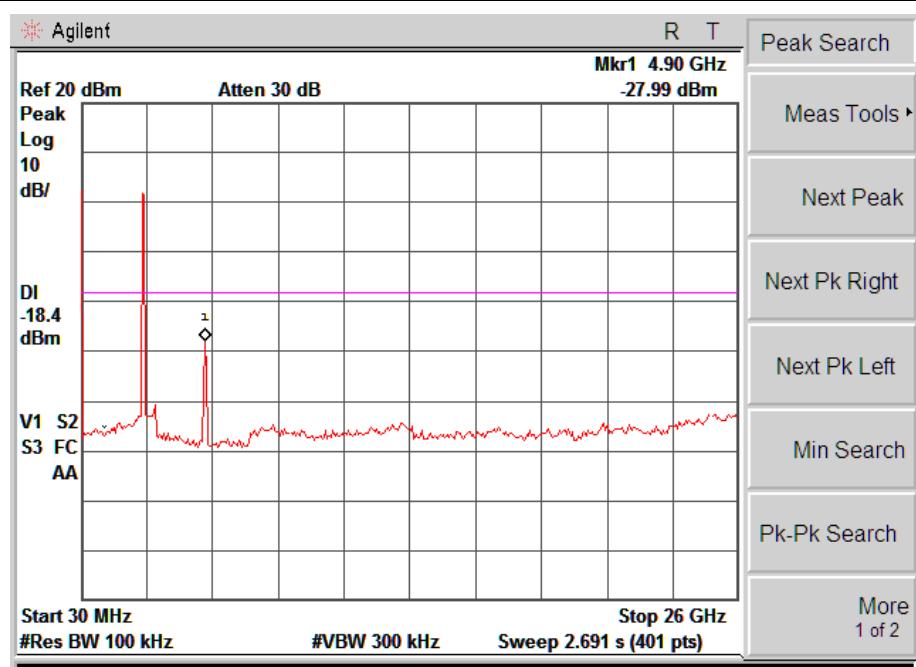


802.11n-HT40

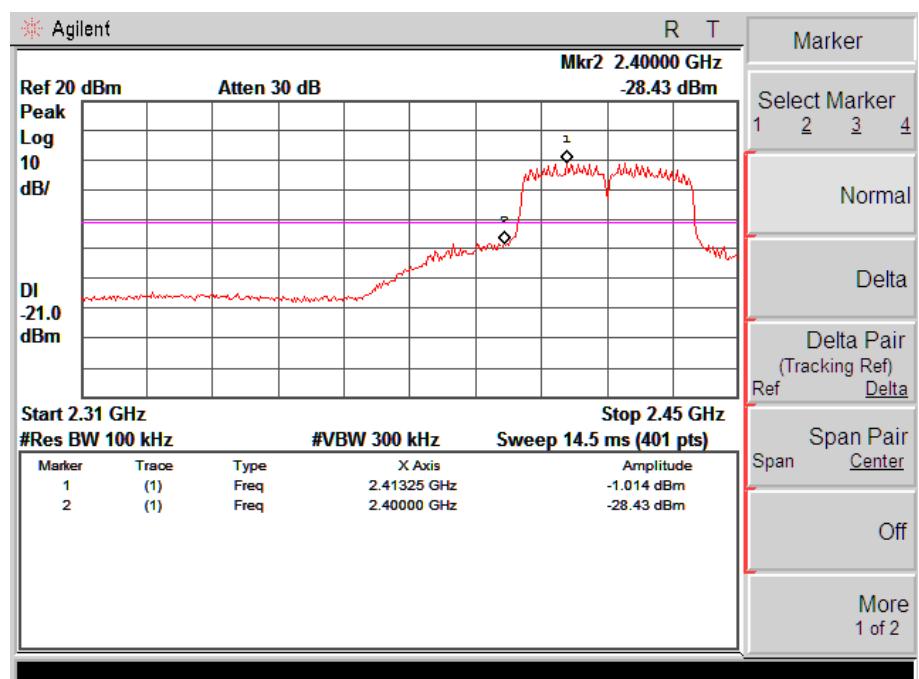


Low

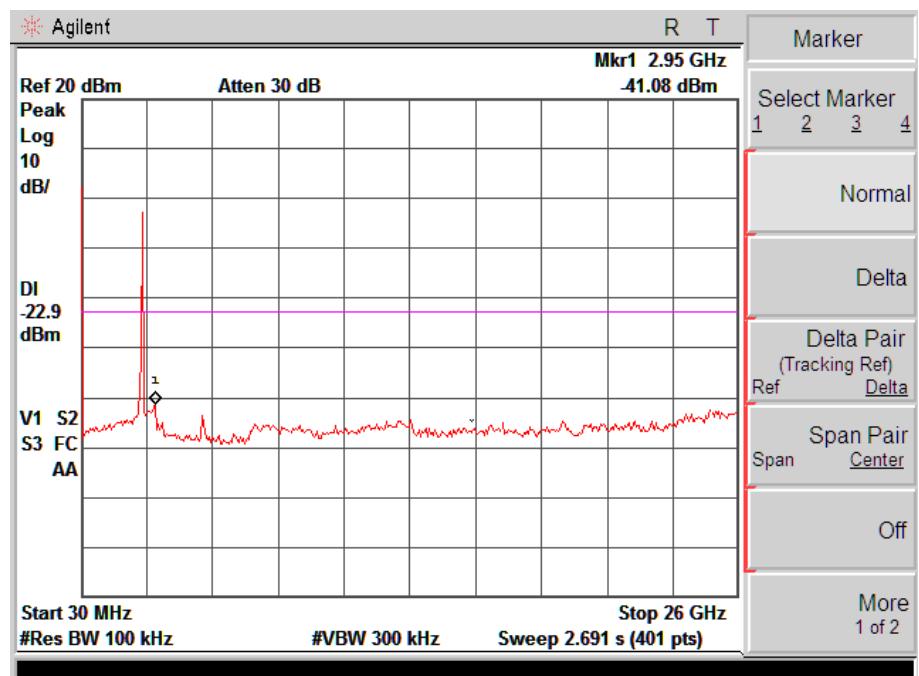


802.11n-HT40

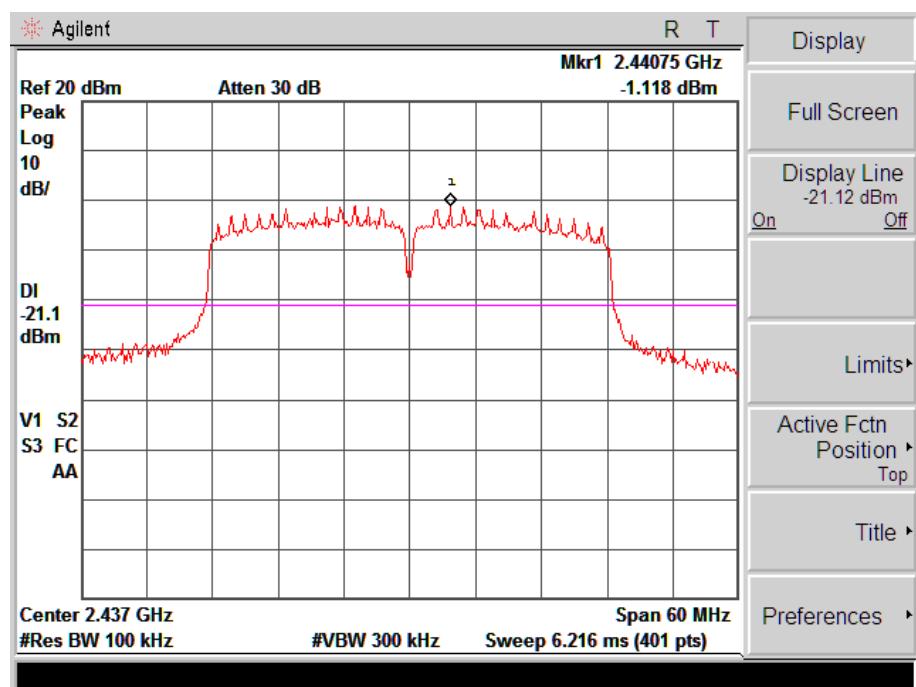


Middle

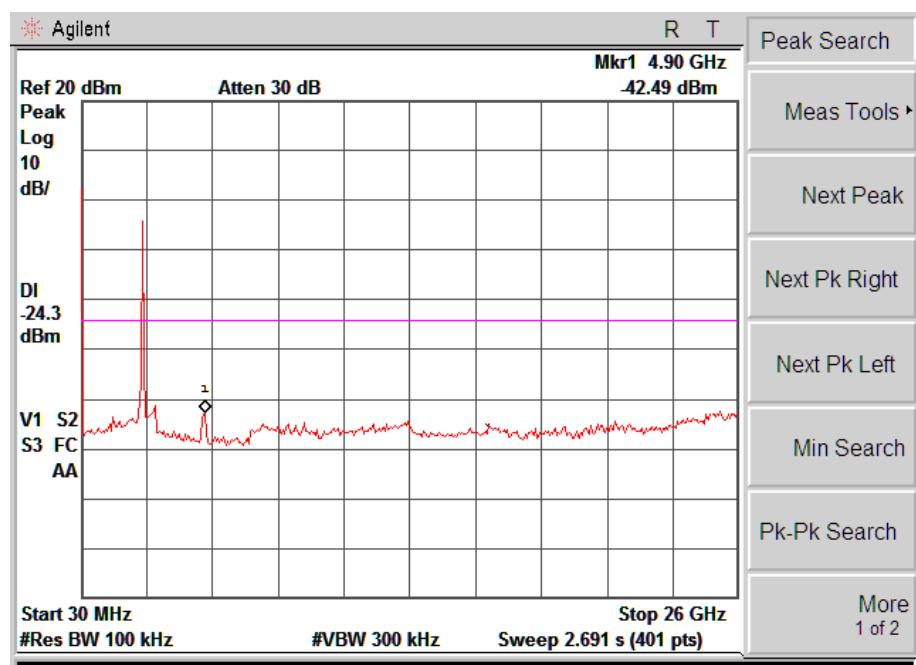

802.11n-HT40

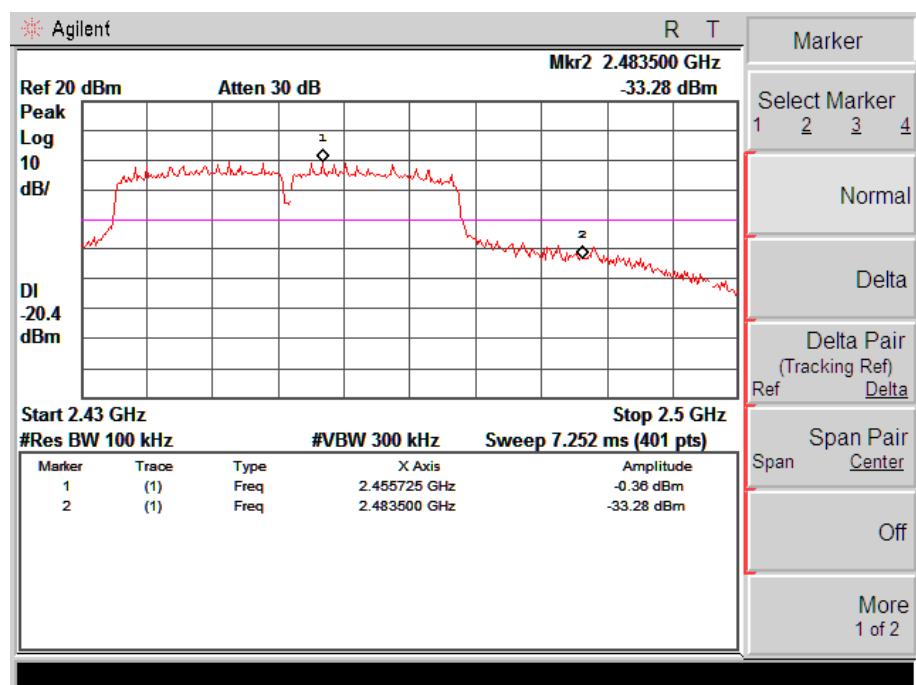

High

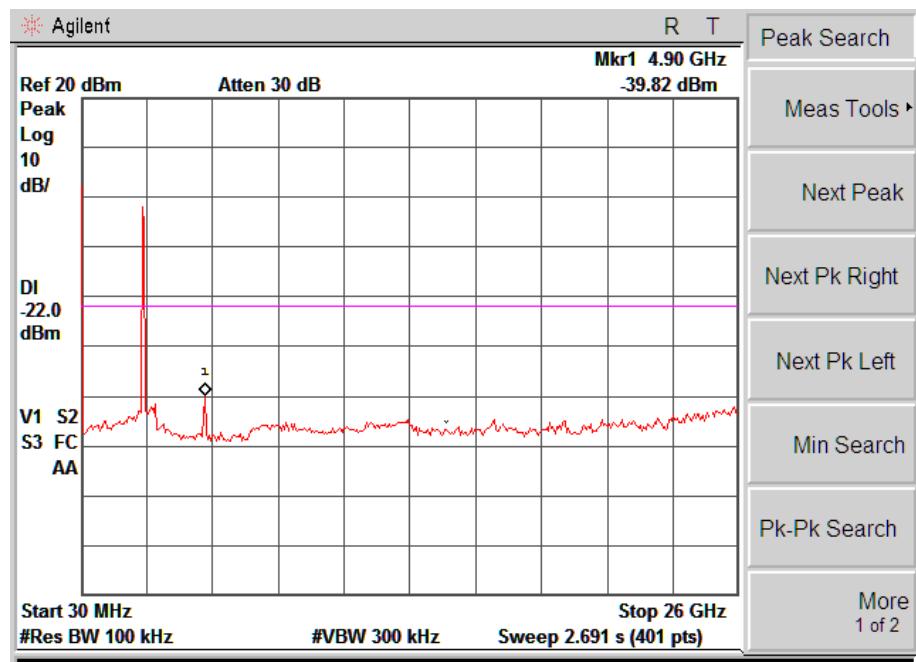


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

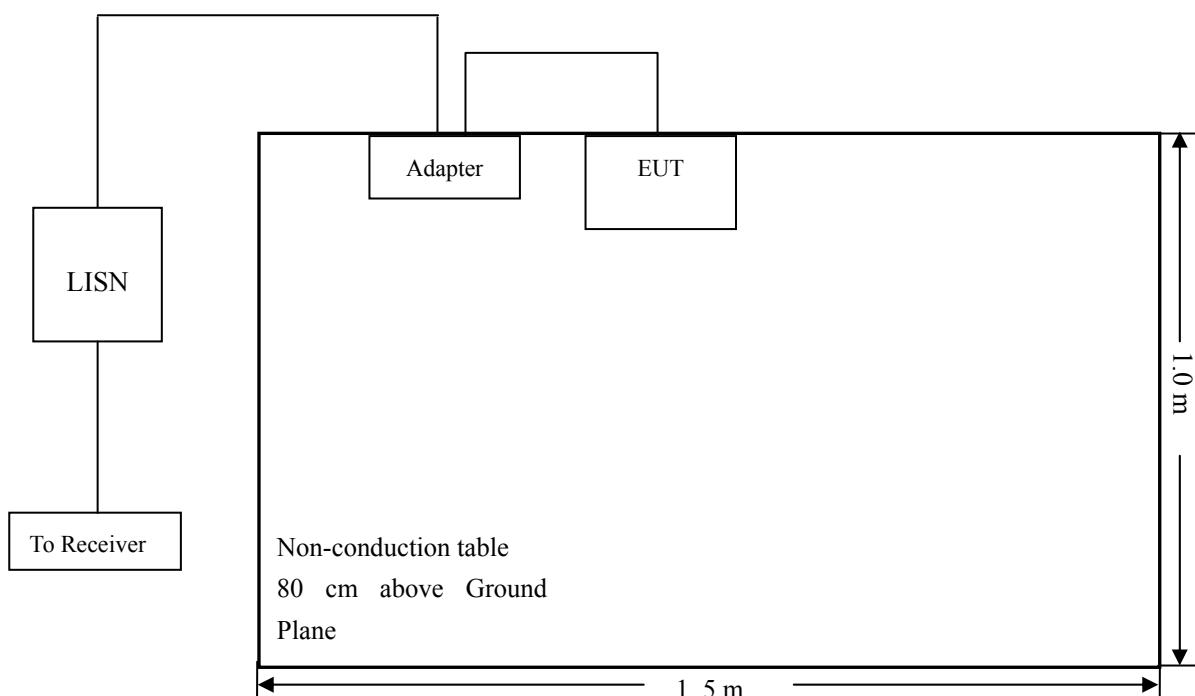

10.3 Test Receiver Setup


During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

10.4 Summary of Test Results/Plots


We test all modes(b, g, n-HT20, n-HT40), and the worst case (b mode) data was reported.

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

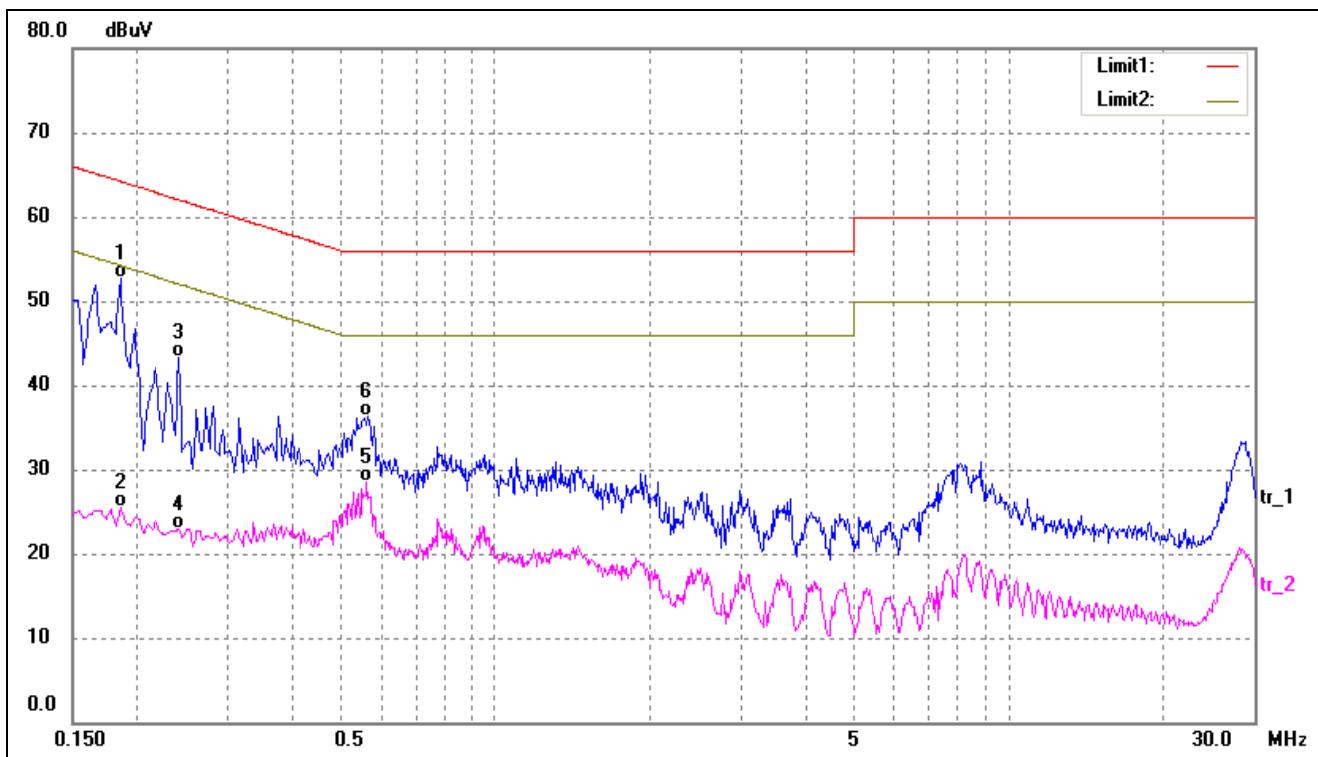

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1860	42.63	10.11	52.74	64.21	-11.47	QP
2	0.1860	15.45	10.11	25.56	54.21	-28.65	AVG
3	0.2420	33.13	10.15	43.28	62.02	-18.74	QP
4	0.2420	12.83	10.15	22.98	52.02	-29.04	AVG
5	0.5620	18.17	10.32	28.49	46.00	-17.51	AVG
6	0.5660	25.94	10.32	36.26	56.00	-19.74	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

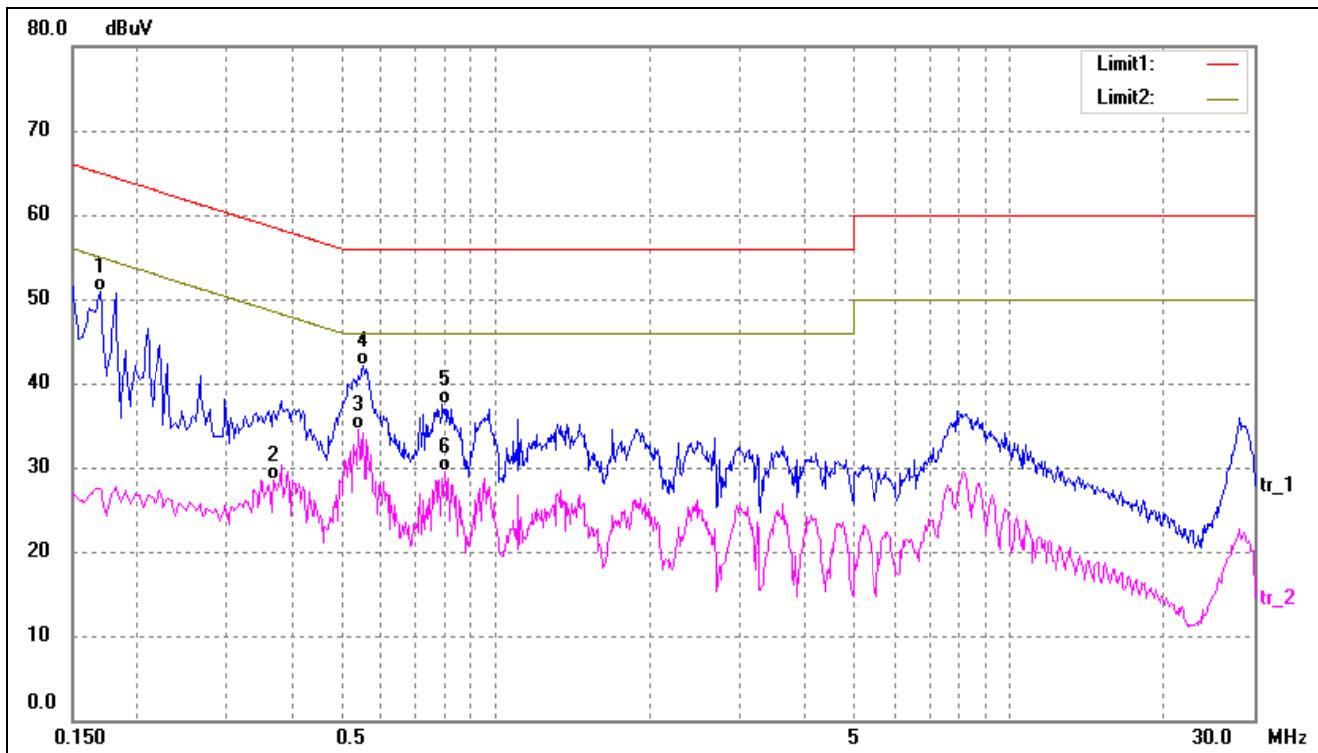

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	40.77	10.11	50.88	64.96	-14.08	QP
2	0.3700	18.31	10.24	28.55	48.50	-19.95	AVG
3*	0.5420	24.11	10.31	34.42	46.00	-11.58	AVG
4	0.5540	31.82	10.32	42.14	56.00	-13.86	QP
5	0.7900	27.15	10.43	37.58	56.00	-18.42	QP
6	0.7980	19.12	10.43	29.55	46.00	-16.45	AVG

***** END OF REPORT *****